



TEST REPORT

Report Number: C21T00056-SRD03-V02

Applicant	Toast, Incorporated
Product Name	Data Processing machine
Model Name	TT204W, TT204, TT202W, TT203, TK200, TT203W
Brand Name	Toast
FCC ID	2AMNG-TT200B
IC ID	23177-TT200B

Industrial Internet Innovation Center (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in FCC Part15, ANSI C63.10, KDB 558074, RSS-Gen Issue 5, RSS-247 Issue 2.

Prepared by		Reviewed by	
Approved by		Issue Date	2021-08-16

Industrial Internet Innovation Center (Shanghai) Co., Ltd.



FNOTE

1. This report is invalid without the signature of the writer, reviewer and authorizer.
2. This report is invalid if altered.
3. For the benefit of clients, if you have any objection to the report, please inform the testing laboratory within 15 days from the date of receiving this report.
4. Samples in the test report are provided by the client. The test results are only applicable to the samples received by the laboratory. The source information of samples (such as sample sender, manufacturer, etc.) in the test report is provided by the client, and the laboratory is not responsible for its authenticity and the measurement accuracy.
5. The test report does not represent the identification of a product by a certification body or an authorized body.
6. This report is only valid as a whole, and no part of the report can be reproduced without the written approval of Industrial Internet Innovation Center (Shanghai) Co., Ltd.
7. Without the written permission of testing institutions and accreditation bodies, this report cannot be used in part or in whole for publicity or product introduction.
8. "N/A" is used in this report to indicate that it is not applicable or available.
9. Industrial Internet Innovation Center (Shanghai) Co., Ltd. assumes the legal responsibility for the report.
10. The measurement uncertainty is not taken into account when deciding conformity, and the results of measurement (or the average of measurement results) are directly used as the criterion for the stating conformity.

Test Laboratory:

Industrial Internet Innovation Center (Shanghai) Co., Ltd.

Add: Building 4, No. 766 Jingang Rd, Pudong, Shanghai, China

Tel: +86 21 68866880



Revision Version

Report Number	Revision	Date	Memo
C21T00056-SRD03-V00	00	2021-07-22	Initial creation of test report
C21T00056-SRD03-V01	01	2021-08-10	Add test setup pictures
C21T00056-SRD03-V02	02	2021-08-16	Amendment test setup pictures



CONTENTS

1.	TEST LABORATORY	6
1.1.	TESTING LOCATION	6
1.2.	TESTING ENVIRONMENT	6
1.3.	PROJECT INFORMATION	6
2.	CLIENT INFORMATION	7
2.1.	APPLICANT INFORMATION	7
2.2.	MANUFACTURER INFORMATION	7
3.	EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	8
3.1.	ABOUT EUT	8
3.2.	INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	8
3.3.	INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	8
4.	REFERENCE DOCUMENTS	9
4.1.	REFERENCE DOCUMENTS FOR TESTING	9
4.2.	REFERENCE INFORMATION FROM CLIENT	9
5.	TEST SUMMARY	10
5.1.	SUMMARY OF TEST RESULTS	10
5.2.	STATEMENTS	10
6.	MEASUREMENT RESULTS	12
6.1.	OUTPUT POWER-CONDUCTED	13
6.2.	PEAK POWER SPECTRAL DENSITY	17
6.3.	OCCUPIED 6DB BANDWIDTH	20
6.4.	99% OCCUPIED BANDWIDTH	24
6.5.	BAND EDGES COMPLIANCE	28
6.6.	TRANSMITTER SPURIOUS EMISSION-CONDUCTED	31



6.7.	TRANSMITTER SPURIOUS EMISSION-RADIATED.....	37
6.8.	AC POWERLINE CONDUCTED EMISSION.....	58
7.	TEST EQUIPMENT LIST.....	69
7.1.	CONDUCTED TEST SYSTEM.....	69
7.2.	RADIATED EMISSION TEST SYSTEM.....	69
	ANNEX A: MEASUREMENT UNCERTAINTY.....	70
	ANNEX B: ACCREDITATION CERTIFICATE.....	71

1. Test Laboratory

1.1. Testing Location

Primary Lab:

Company Name	Industrial Internet Innovation Center (Shanghai) Co., Ltd.
Address	Building 4, No. 766 Jingang Rd, Pudong, Shanghai, China
FCC Registration No.	958356
FCC Designation No.	CN1177
IC Designation No.	CN0067

Subcontracting Lab #1:

Company Name	N/A
Address	N/A

1.2. Testing Environment

Normal Temperature	15°C~35°C
Relative Humidity	30%RH~60%RH
Supply Voltage	120V/60Hz

1.3. Project Information

Project Leader	Lu Fang
Testing Start Date	2021-05-31
Testing End Date	2021-07-21



2. Client Information

2.1. Applicant Information

Company Name	Toast, Incorporated
Address	401 Park Drive, Suite 801, Boston, MA 02215, USA
Telephone	5625462272

2.2. Manufacturer Information

Company Name	Toast, Incorporated
Address	401 Park Drive, Suite 801, Boston, MA 02215, USA
Telephone	5625462272

3. Equipment under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Product Name	Data Processing machine
Model name	TT204W, TT204, TT202W, TT203, TK200, TT203W
Supported Radio Technology and Bands	BT4.2 WLAN 802.11b,g,n WLAN 802.11a, n, ac
Hardware Version	CT541MB80C 20210226
Software Version	Sunmi-ct541-v2.1.59p69
FCC ID	CT541MB80C 20210226
IC ID	Sunmi-ct541-v2.1.59p69

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of Receipt
N05 (Mainly Supply)	N/A	CT541MB80C 20210226	Sunmi-ct541-v2.1.59p69	2021/5/31
N02 (Mainly Supply)	N/A	CT541MB80C 20210226	Sunmi-ct541-v2.1.59p69	2021/5/31
N01 (Secondary Supply)	N/A	CT541MB80C 20210226	Sunmi-ct541-v2.1.59p69	2021/5/31
N03 (Thirdly Supply)	N/A	CT541MB80C 20210226	Sunmi-ct541-v2.1.59p69	2021/5/31

*EUT ID: is internally used to identify the test sample in the lab.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Model	SN/Remark
CA01	Adapter	SOY-2400400	N/A
CB02	Adapter	WTA96-2400400-T	N/A
CA05	Adapter	SOY-2400400	N/A
UA01	Adapter Cable	N/A	N/A
UB02	Adapter Cable	N/A	N/A
UA05	Adapter Cable	N/A	N/A
AE1	RF Cable	N/A	N/A

*AE ID: is internally used to identify the test sample in the lab.

*The AE is provided by the client.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.	2018-10-01
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013
KDB 558074	Guidance for Performing Compliance Measurements on Frequency Hopping Spread Spectrum systems (DSS) Operating Under §15.247	v05r02
RSS-247 Issue 2	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices	2017
RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus	2019

4.2. Reference Information from client

Antenna gain Information of the test sample provided by Toast, Incorporated.

Maximum of Antenna Gain: 1.92 dBi

5. Test Summary

5.1. Summary of Test Results

Measurement Items	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247(b)	RSS-247 5.4	Pass
Peak Power Spectral Density	15.247(e)	RSS-247 5.2	Pass
Occupied 6dB Bandwidth	15.247(a)	RSS-247 5.2	Pass
99% Occupied Bandwidth	N/A	RSS-Gen 6.7	Pass
Band Edges Compliance	15.247(d)	RSS-247 5.5	Pass
Transmitter Spurious Emission-Conducted	15.247(d)	RSS-247 5.5	Pass
Transmitter Spurious Emission-Radiated	15.247/15.205/15.209	RSS-Gen 8.9,8.10	Pass
AC Powerline Conducted Emission	15.207	RSS-Gen 8.8	Pass

Test Conditions

Tnom	Normal Temperature
Tmin	Low Temperature
Tmax	High Temperature
Vnom	Normal Voltage
Vmin	Low Voltage
Vmax	High Voltage
Hnom	Norm Humidity
Anom	Norm Air Pressure

For this report, all the test case listed above are tested under Normal Temperature and Normal Voltage, and also under norm humidity, the specific conditions as following:

Temperature	Tnom	25°C
Voltage	Vnom	24V
Humidity	Hnom	48%
Air Pressure	Anom	1010hPa

5.2. Statements

The TT204W,TT204,TT202W,TT203,TK200,TT203W supporting BT/WLAN, manufactured by Toast, Incorporated are new products for testing.

This project have three sets of configured sample N05(N02)/N01/N03, and we mainly tested sample N05(N02)tested the worst mode N01/N03, the main difference is as below:

Mainly Supply	TT204	Main LCD panel Terminal + Sub LCD panel Terminal + Attached base support
	TT204W	The same with TT204, just the color is White
Secondary Supply	TT203	Main LCD panel Terminal + Attached base support
	TT202W,TT203W	The same with TT203, just the color is White
Thirdly Supply	TK200	Main LCD panel Terminal + Add POE module + Add one speaker

Industrial Internet Innovation Center (Shanghai) Co., Ltd. only performed test cases which identified with Pass/Fail/Inc result in section 5.1.

Industrial Internet Innovation Center (Shanghai) Co., Ltd. has verified that the compliance of the tested device specified in section 3 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 4 of this test report.

6. Measurement Results

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber1 (6.9 meters×10.9 meters×5.4 meters) did not exceed following limits along the EMC testing:


Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB,30MHz to 1GHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

6.1. Output Power-Conducted

6.1.1 Measurement Limit and method

Standard	Limit(dBm)
FCC 47 Part 15.247(b) (3)	<30
RSS-247 5.4(d)	<30

6.1.2 Test Setup

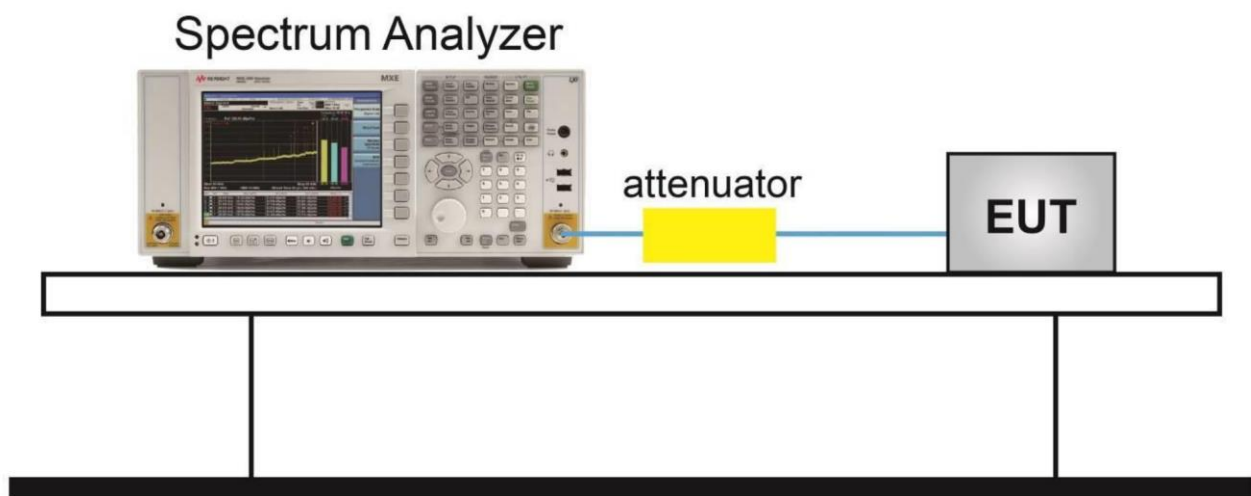

6.1.3 Test procedure

The measurement is according to ANSI C63.10 clause 11.2

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set $RBW \geq OBW(1MHz)$, $VBW \geq 3RBW(3MHz)$.
4. Span : 80MHz
5. Detector: Peak/RMS.
6. Trace mode: Max Hold
7. Spectrum Analyzer setting : Meas—channel PWR ACP—CP/ACP Config—channel bandwidth—20/40MHz
8. Method AVGPM-G (Measurement using a gated RF average-reading power meter)
Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required

Maximum Average Output Power-conducted

Measurement Results

802.11b

Mode	Reading Power (dBm)		
	2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11b	16.01	16.97	16.75
Mode	Max Power (dBm)		
	2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11b	16.01	16.97	16.75
Mode	EIRP(dBm)		
	2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11b	17.93	18.89	18.67
Mode	Duty Cycle Factor (dB)		
	2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11b	0.00	0.00	0.00

802.11g

Mode	Reading Power (dBm)		
	2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11g	8.95	14.66	12.43
Mode	Max Power (dBm)		
	2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11g	8.95	14.66	12.43
Mode	EIRP(dBm)		
	2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11g	10.87	16.58	14.35
Mode	Duty Cycle Factor (dB)		
	2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11g	0.00	0.00	0.00

802.11n(20MHZ)

Mode	Reading Power (dBm)		
	2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11n (20MHz)	11.74	14	11.23
Mode	Max Power (dBm)		
	2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11n (20MHz)	11.74	14	11.23
Mode	EIRP(dBm)		
	2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11n (20MHz)	13.66	15.92	13.15
Mode	Duty Cycle Factor (dB)		
	2412MHz(Ch1)	2437MHz(Ch6)	2462MHz(Ch11)
802.11n (20MHz)	0.00	0.00	0.00

802.11n(40MHZ)

Mode	Reading Power (dBm)		
	2422MHz(Ch3)	2437MHz(Ch7)	2452MHz(Ch11)
802.11n (20MHz)	8.76	11	9.26
Mode	Max Power (dBm)		
	2422MHz(Ch3)	2437MHz(Ch7)	2452MHz(Ch11)
802.11n (20MHz)	8.76	11	9.26
Mode	EIRP(dBm)		
	2422MHz(Ch3)	2437MHz(Ch7)	2452MHz(Ch11)
802.11n (40MHz)	10.68	12.92	11.18
Mode	Duty Cycle Factor (dB)		
	2422MHz(Ch3)	2437MHz(Ch7)	2452MHz(Ch11)
802.11n (40MHz)	0.00	0.00	0.00

Note: Max power(dBm)= Reading Power (dBm)+ Duty Cycle Factor (dB)

E.I.R.P (dBm) = Max Power (dBm) + Antenna Gain (dBi), Antenna Gain = 1.92 dBi.


Conclusion: PASS

6.2. Peak Power Spectral Density

6.2.1 Measurement Limit

Standard	Limit
FCC 47 Part 15.247(e)	$\leq 8\text{dBm}/3\text{ KHz}$
RSS-247 5.2(b)	$\leq 8\text{dBm}/3\text{ kHz}$

6.2.2 Test Setup

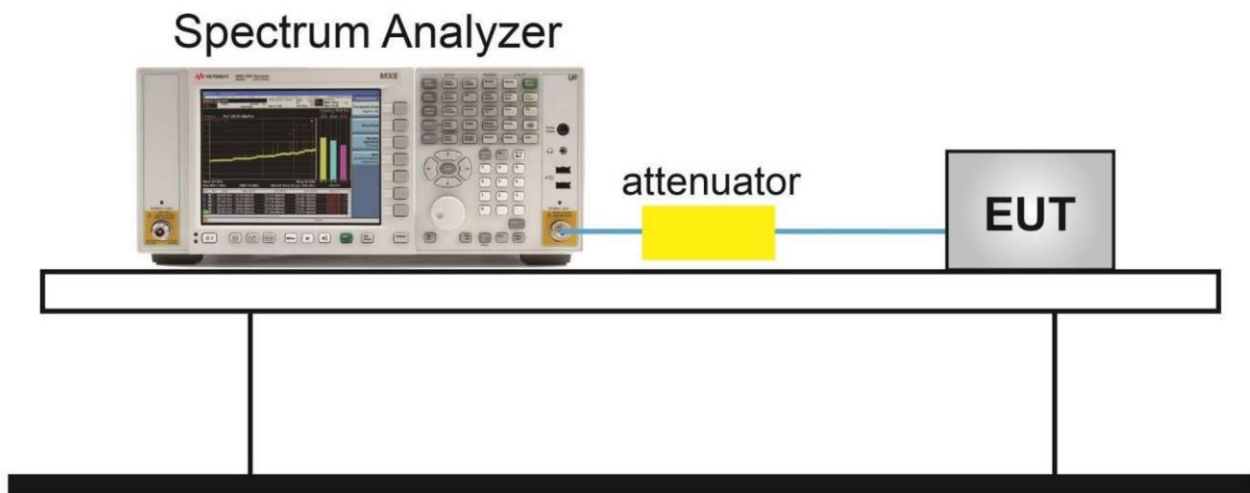

6.2.3 Test procedures

The measurement is according to ANSI C63.10 clause 11.10.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set analyzer center frequency to DTS channel center frequency.
4. Set the span to 1.5 times the DTS bandwidth.
5. Set the RBW=3kHz
6. Set the VBW $\geq [3 \times \text{RBW}]$.
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.
11. Use the peak marker function to determine the maximum amplitude level within the RBW.
12. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

Measurement Results:

<p>Power Spectral Density(dBm/3kHz) (802.11b, Ch1)</p>	<p>-13.887</p>	<p>Power Spectral Density(dBm/3kHz) (802.11b, Ch6)</p>	<p>-14.640</p>
<p>Date: 27_JUL.2021 11:18:18</p>		<p>Date: 27_JUL.2021 11:18:25</p>	
<p>Power Spectral Density (dBm/3kHz) (802.11b, Ch11)</p>	<p>-14.202</p>	<p>Power Spectral Density (dBm/3kHz) (802.11g, Ch1)</p>	<p>-18.014</p>
<p>Date: 27_JUL.2021 11:14:30</p>		<p>Date: 27_JUL.2021 11:15:24</p>	
<p>Power Spectral Density (dBm/3kHz) (802.11g, Ch6)</p>	<p>-18.687</p>	<p>Power Spectral Density (dBm/3kHz) (802.11g, Ch11)</p>	<p>-19.086</p>
<p>Date: 27_JUL.2021 11:16:28</p>		<p>Date: 27_JUL.2021 11:17:20</p>	


<p>Power Spectral Density (dBm/3kHz) (802.11n-20MHz, Ch1)</p>	<p>-18.229</p>	<p>Power Spectral Density (dBm/3kHz) (802.11n-20MHz, Ch6)</p>	<p>-19.391</p>
<p>Date: 27_JUL_2021 11:18:21</p>		<p>Date: 27_JUL_2021 11:18:18</p>	
<p>Power Spectral Density (dBm/3kHz) (802.11n-20MHz, Ch11)</p>	<p>-18.211</p>	<p>Power Spectral Density (dBm/3kHz) (802.11n-40MHz, Ch3)</p>	<p>24.342</p>
<p>Date: 27_JUL_2021 11:20:06</p>		<p>Date: 27_JUL_2021 11:21:12</p>	
<p>Power Spectral Density (dBm/3kHz) (802.11n-40MHz, Ch6)</p>	<p>-21.417</p>	<p>Power Spectral Density (dBm/3kHz) (802.11n-40MHz, Ch9)</p>	<p>-22.877</p>
<p>Date: 27_JUL_2021 11:22:13</p>		<p>Date: 27_JUL_2021 11:23:03</p>	

6.3. Occupied 6dB Bandwidth

6.3.1 Measurement Limit

Standard	Limit(KHz)
FCC 47 Part 15.247(a) (2)	≥ 500
RSS-247 5.2(a)	$\geq 500\text{kHz}$

6.3.2 Test Setup

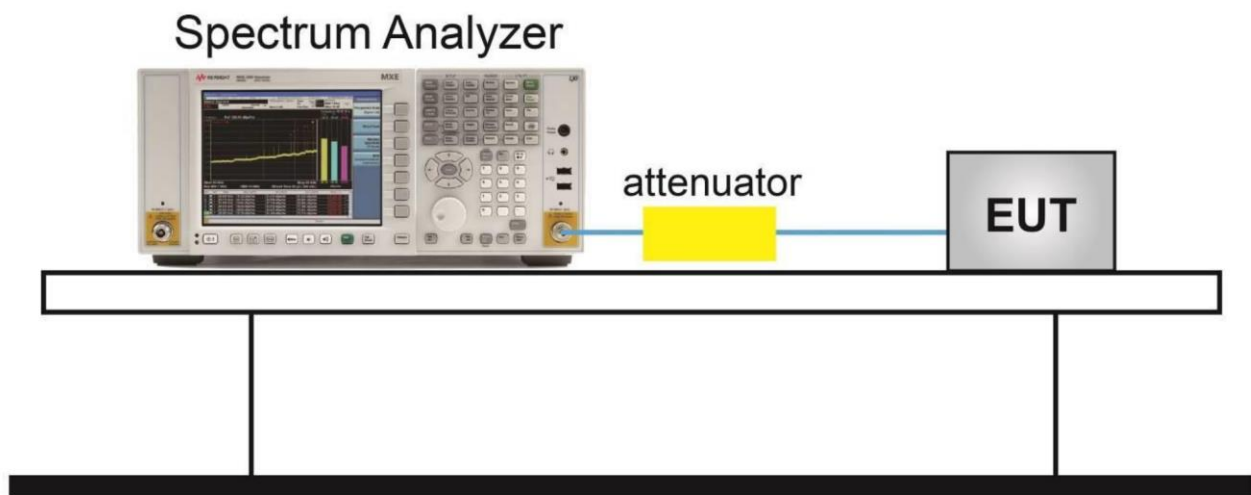

6.3.3 Test procedure

The measurement is according to ANSI C63.10 clause 11.8.


1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set RBW = 100 kHz.
4. Set the VBW $\geq [3 \times \text{RBW}]$.
5. Detector = peak.
6. Trace mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize.
9. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measurement Results

Mode	Test Result (MHz)		
	2412MHz (Ch1)	2437MHz (Ch6)	2462MHz (Ch11)
802.11b	11.03	10.06	6.54
802.11g	16.47	16.47	16.54
802.11n(20MHz)	17.69	17.69	17.69
Mode	2422MHz (Ch3)	2437MHz (Ch6)	2452MHz (Ch9)
802.11n(40MHz)	36.28	36.15	36.15

Conclusion: PASS

Test graphs as below

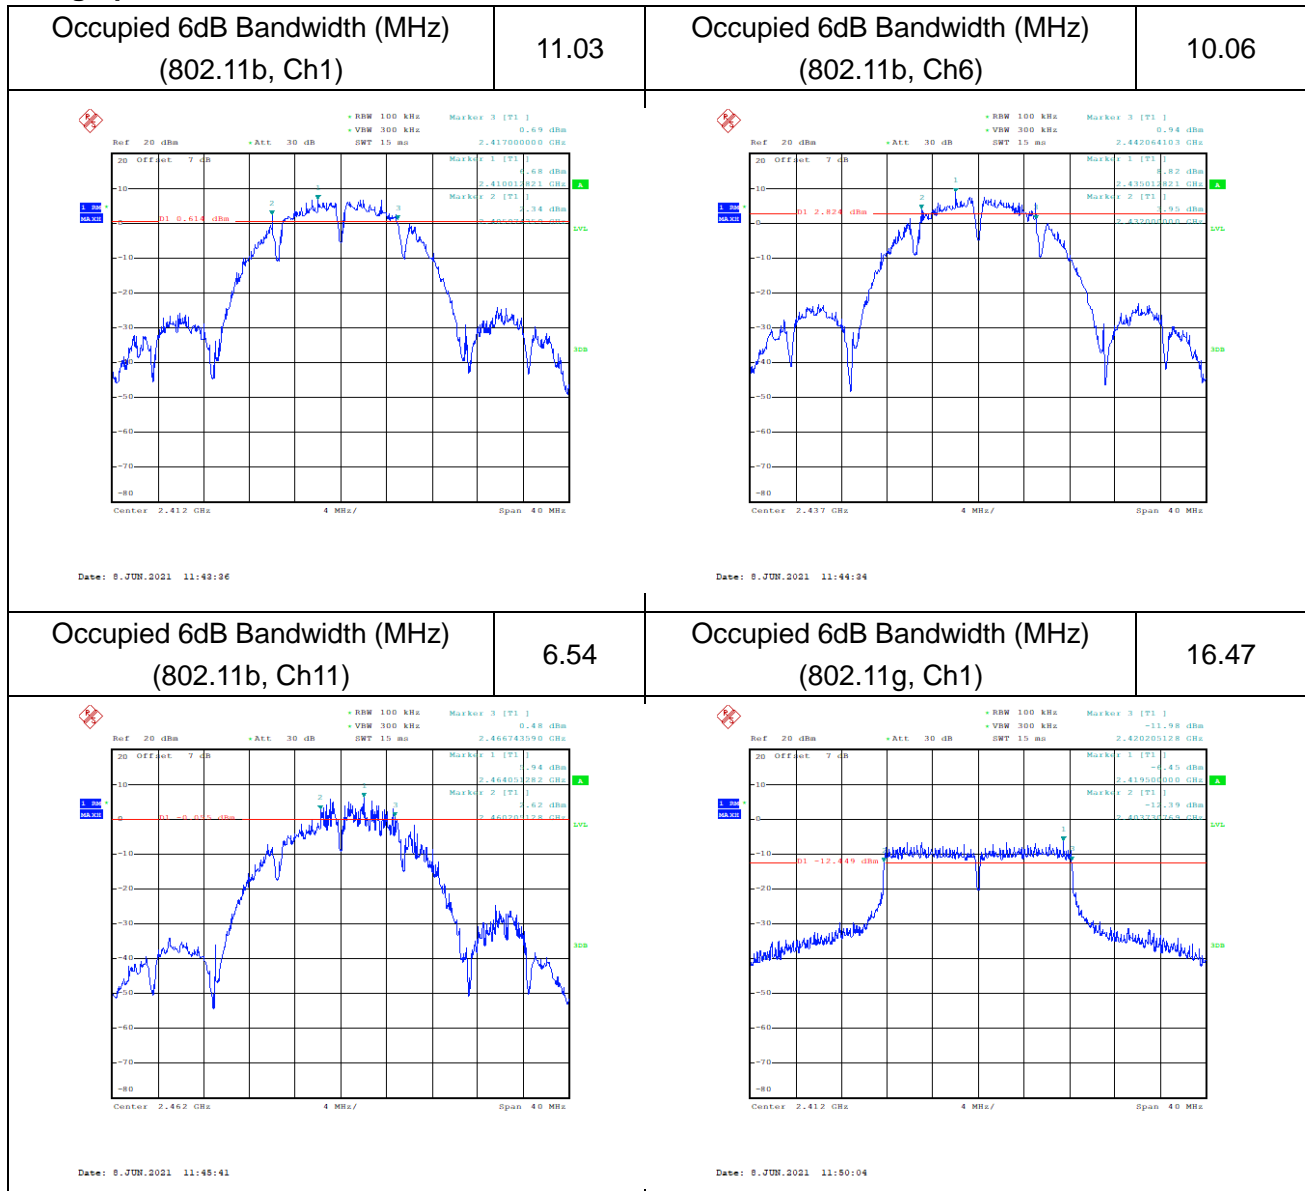

<p>Occupied 6dB Bandwidth (MHz) (802.11g, Ch6)</p>	<p>16.47</p>	<p>Occupied 6dB Bandwidth (MHz) (802.11g, Ch11)</p>	<p>16.54</p>
<p>Date: 8 JUN 2021 11:51:09</p>	<p>Date: 8 JUN 2021 11:52:16</p>		
<p>Occupied 6dB Bandwidth (MHz) (802.11n-20MHz, Ch1)</p>	<p>17.69</p>	<p>Occupied 6dB Bandwidth (MHz) (802.11n-20MHz, Ch6)</p>	<p>17.69</p>
<p>Date: 8 JUN 2021 11:54:55</p>	<p>Date: 8 JUN 2021 11:55:25</p>		


<p>Occupied 6dB Bandwidth (MHz) (802.11n-20MHz, Ch11)</p>	<p>17.69</p>	<p>Occupied 6dB Bandwidth (MHz) (802.11n-40MHz, Ch3)</p>	<p>36.28</p>
<p>Ref: 20 dBm, Att: 30 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 10 ms, Marker 3 [T1]: -13.43 dBm, 2.470540134 GHz</p> <p>Marker 1 [T1]: -1.73 dBm, 2.467000000 GHz</p> <p>Marker 2 [T1]: -1.31 dBm, 2.467000000 GHz</p> <p>Center: 2.462 GHz, 4 MHz/, Span: 40 MHz</p> <p>Date: 8 JUN 2021 11:59:55</p>	<p>Ref: 20 dBm, Att: 30 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 10 ms, Marker 3 [T1]: -13.88 dBm, 2.440700128 GHz</p> <p>Marker 1 [T1]: -1.35 dBm, 2.437000000 GHz</p> <p>Marker 2 [T1]: -1.64 dBm, 2.437000000 GHz</p> <p>Center: 2.422 GHz, 8 MHz/, Span: 80 MHz</p> <p>Date: 8 JUN 2021 12:09:20</p>		
<p>Occupied 6dB Bandwidth (MHz) (802.11n-40MHz, Ch6)</p>	<p>36.15</p>	<p>Occupied 6dB Bandwidth (MHz) (802.11n-40MHz, Ch9)</p>	<p>36.15</p>
<p>Ref: 20 dBm, Att: 30 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 10 ms, Marker 3 [T1]: -13.79 dBm, 2.435200128 GHz</p> <p>Marker 1 [T1]: -1.41 dBm, 2.432000000 GHz</p> <p>Marker 2 [T1]: -1.29 dBm, 2.432000000 GHz</p> <p>Center: 2.437 GHz, 8 MHz/, Span: 80 MHz</p> <p>Date: 8 JUN 2021 12:04:23</p>	<p>Ref: 20 dBm, Att: 30 dB, RBW: 100 kHz, VSW: 300 kHz, SWT: 10 ms, Marker 3 [T1]: -13.88 dBm, 2.470200128 GHz</p> <p>Marker 1 [T1]: -1.76 dBm, 2.467000000 GHz</p> <p>Marker 2 [T1]: -1.24 dBm, 2.467000000 GHz</p> <p>Center: 2.452 GHz, 8 MHz/, Span: 80 MHz</p> <p>Date: 8 JUN 2021 12:05:41</p>		

6.4. 99% Occupied Bandwidth

6.4.1 Measurement Limit

Standard	Limit(KHz)
RSS-Gen 6.7	N/A

6.4.2 Test Setup

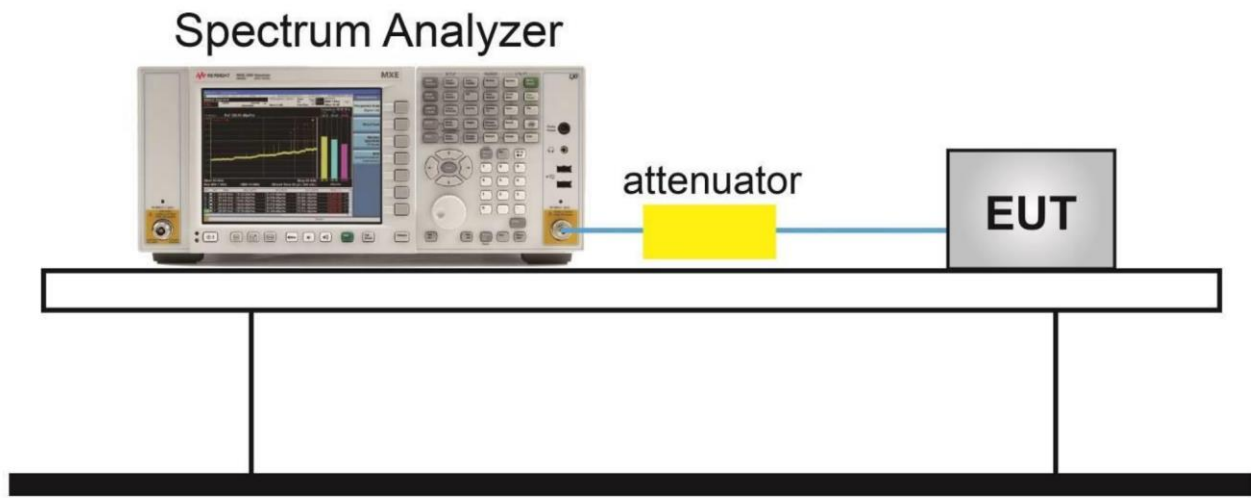

6.4.3 Test procedure

The measurement is according to ANSI C63.10 clause 6.9.3.

10. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
11. Enable EUT transmitter maximum power continuously.
12. Set RBW shall be in the range of 1% to 5% of the OBW.
13. Set the VBW $\geq [3 \times \text{RBW}]$.
14. Detector = peak.
15. Trace mode = max hold.
16. Sweep = auto couple.
17. Allow the trace to stabilize.
18. The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.




Measurement Result


Mode	Test Result (MHz)		
	2412MHz (Ch1)	2437MHz (Ch6)	2462MHz (Ch11)
802.11b	15.705	15.449	15.256
802.11g	17.115	17.308	17.244
802.11n(20MHz)	18.141	18.141	18.141
Mode	2422MHz (Ch3)	2437MHz (Ch6)	2452MHz (Ch9)
802.11n(40MHz)	37.436	37.436	37.308

Conclusion: PASS

Test graphs as below

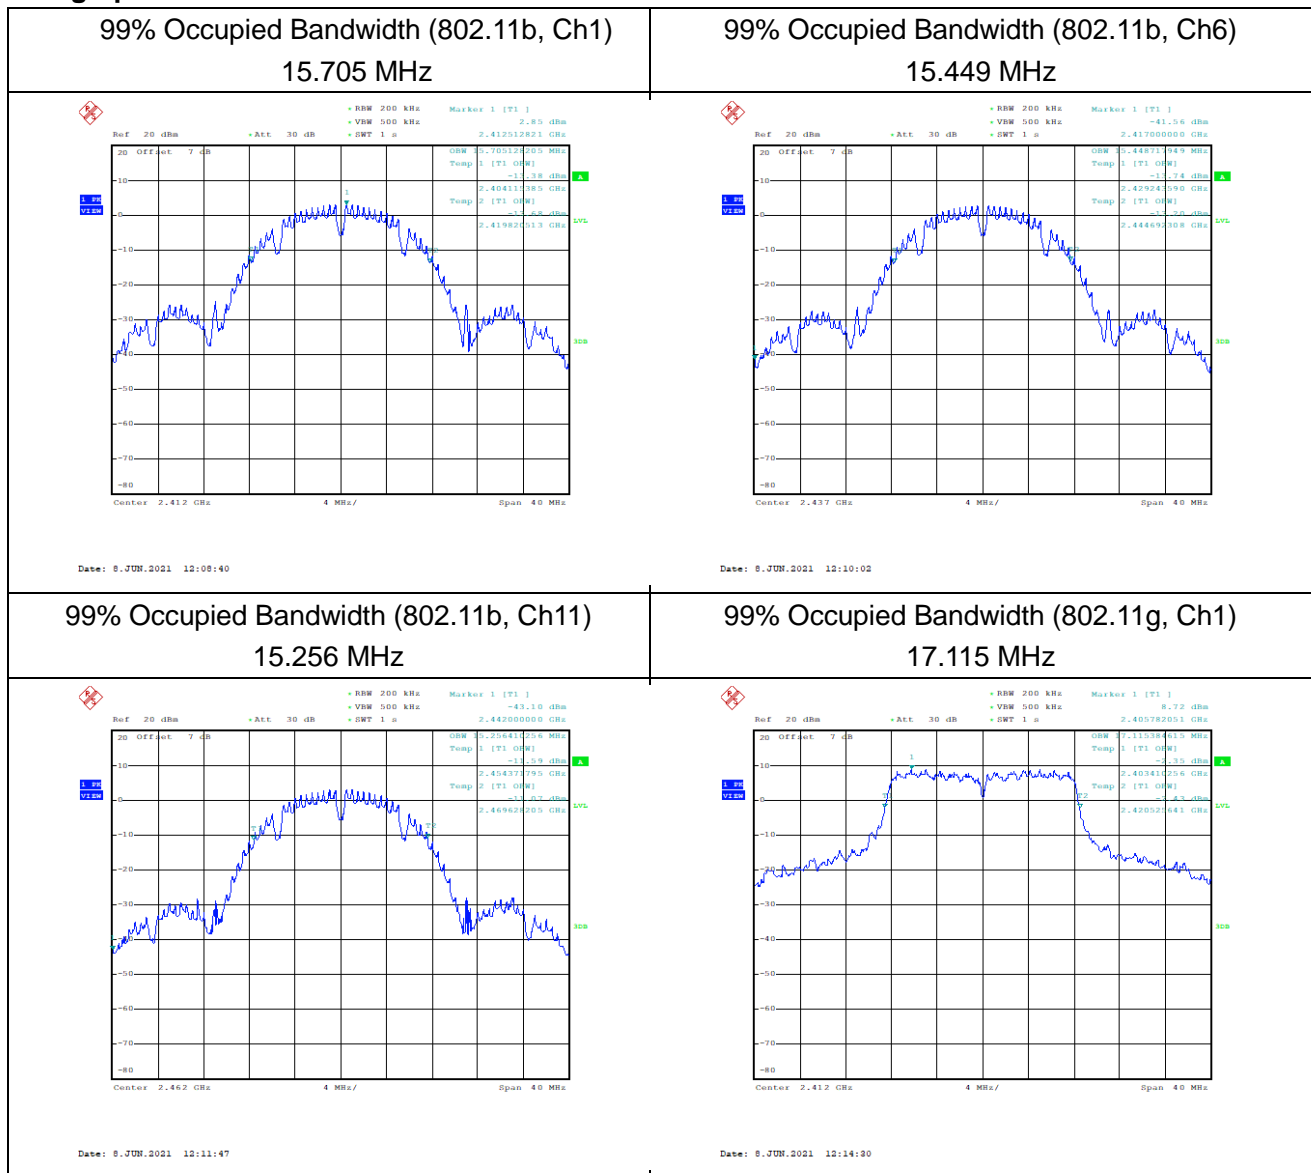


99% Occupied Bandwidth (802.11g, Ch6) 17.308 MHz

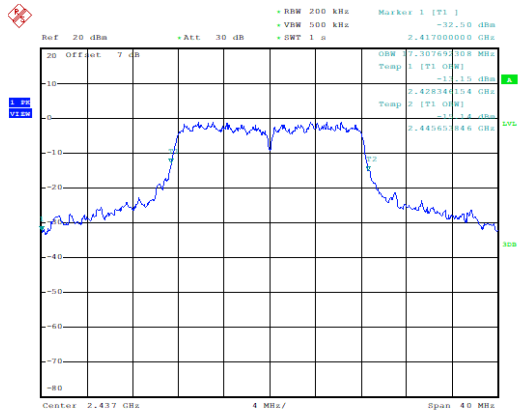


Date: 8 JUN 2021 12:15:50

99% Occupied Bandwidth (802.11g, Ch11) 17.244 MHz

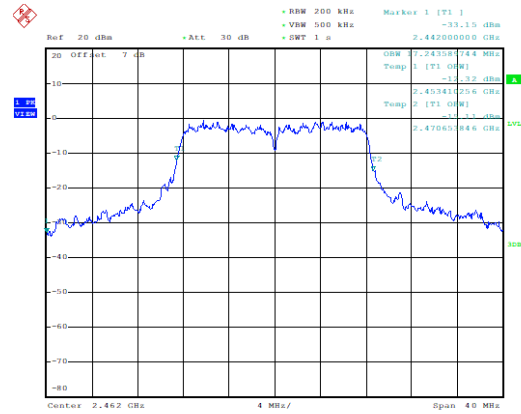


Date: 8 JUN 2021 12:17:12

99% Occupied Bandwidth (802.11n20, Ch1) 18.141 MHz

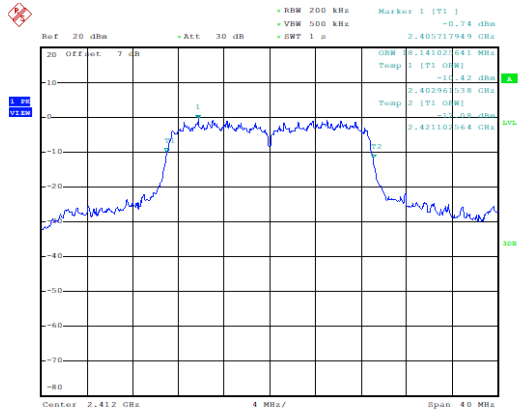


Date: 8 JUN 2021 12:20:23

99% Occupied Bandwidth (802.11n20, Ch6) 18.141 MHz

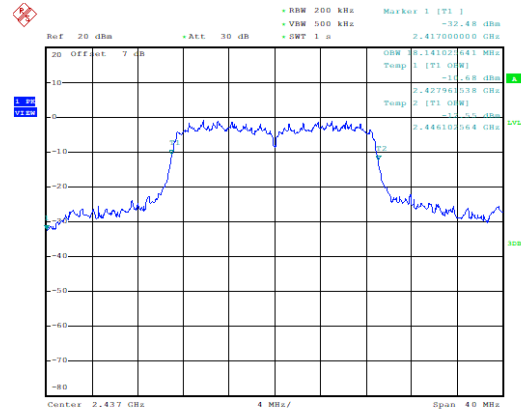


Date: 8 JUN 2021 12:21:42

99% Occupied Bandwidth (802.11n20, Ch11)
18.141 MHz

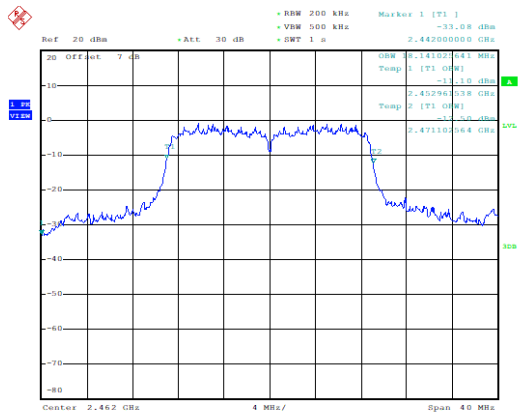


Date: 8 JUN.2021 12:22:56

99% Occupied Bandwidth (802.11n40, Ch3)
37.436 MHz

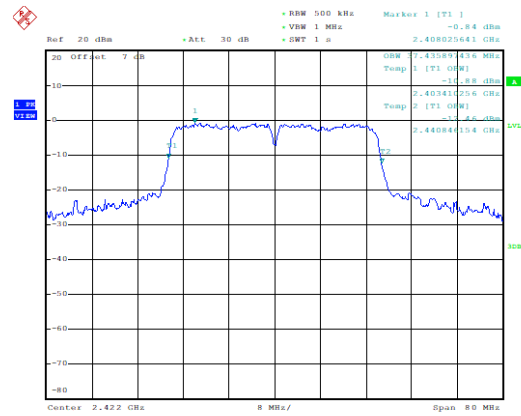


Date: 8 JUN.2021 12:25:01

99% Occupied Bandwidth (802.11n40, Ch6)
37.436 MHz

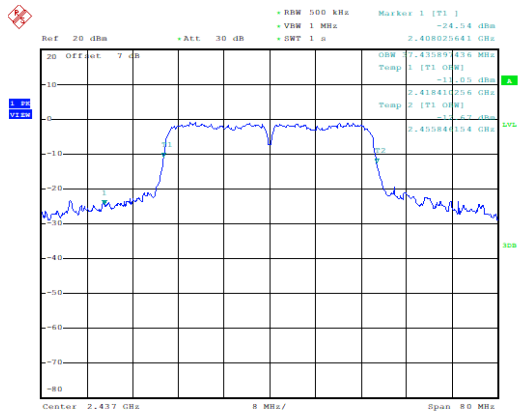

Date: 8 JUN.2021 12:26:28

99% Occupied Bandwidth (802.11n40, Ch9)
37.308 MHz

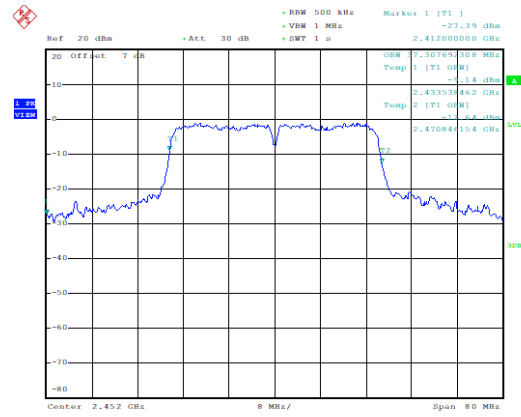


Date: 8 JUN.2021 12:28:01

6.5. Band Edges Compliance

6.5.1 Measurement Limit

Standard	Limited(dBc)
FCC 47 Part 15.247(d)	>20
RSS-247 5.5	>20

6.5.2 Test Setup

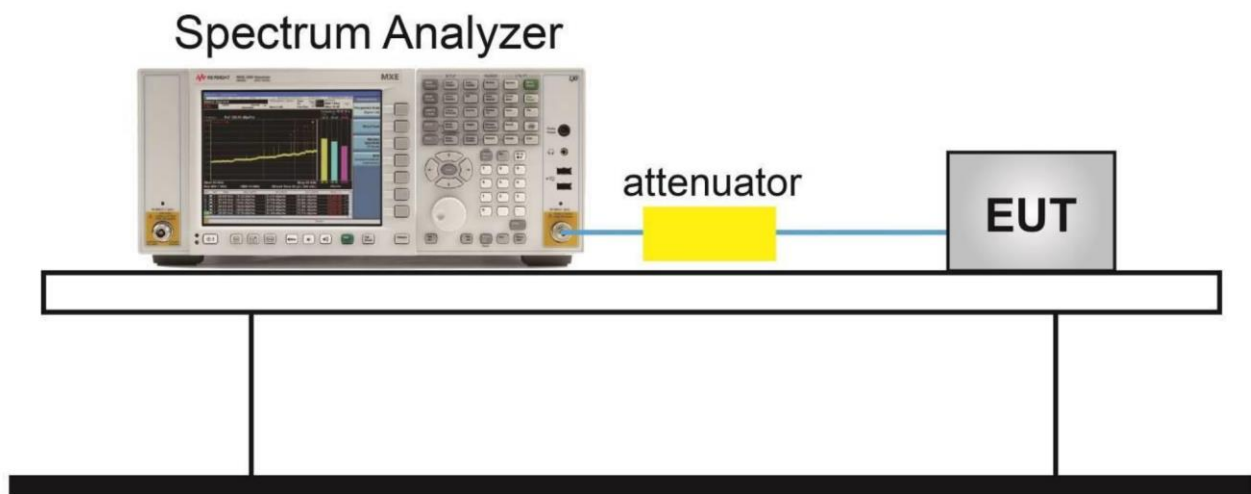


6.5.3 Test procedures


The measurement is according to ANSI C63.10 clause 11.13.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set instrument center frequency to the frequency of the emission to be measured (must be within 2MHz of the authorized band edge).
4. Set span to 2 MHz.
5. RBW = 100 kHz.
6. $VBW \geq [3 \times RBW]$.
7. Detector = peak.
8. Sweep time = auto.
9. Trace mode = max hold.
10. Allow sweep to continue until the trace stabilizes

Measurement results

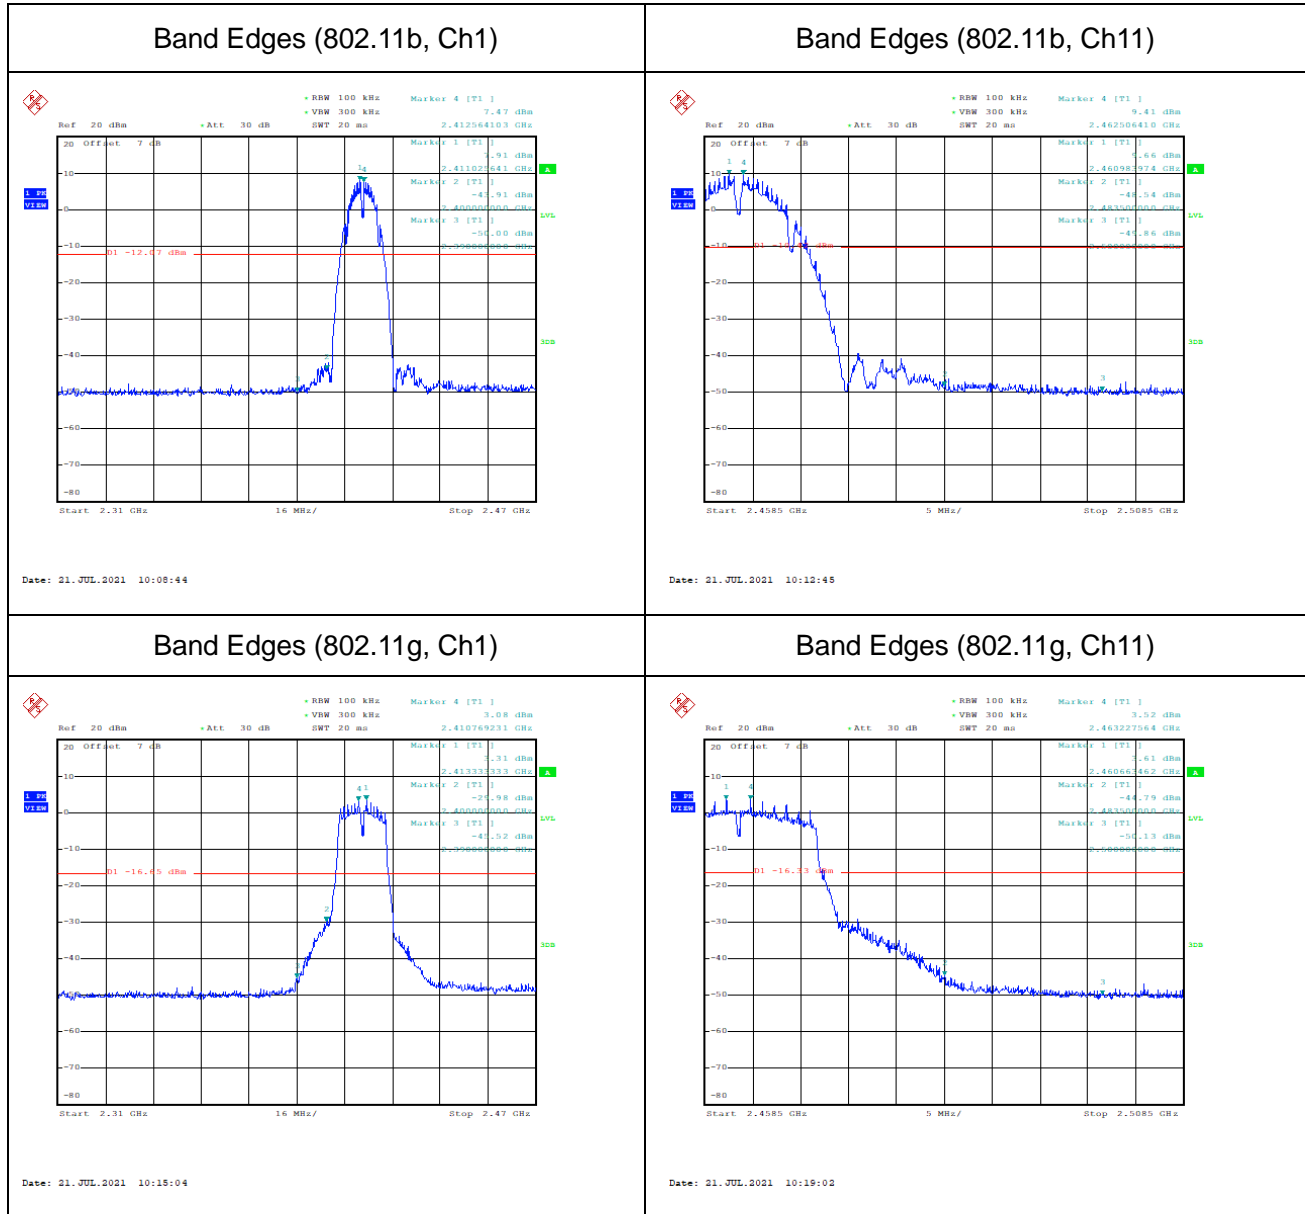


Band Edges (802.11n-20MHz, Ch1)

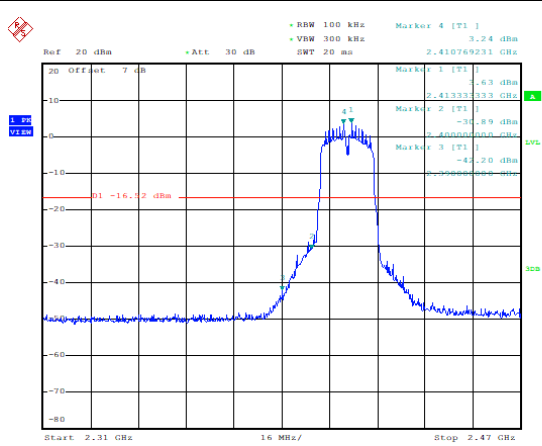


Date: 21.JUL.2021 10:21:39

Band Edges (802.11n-20MHz, Ch11)

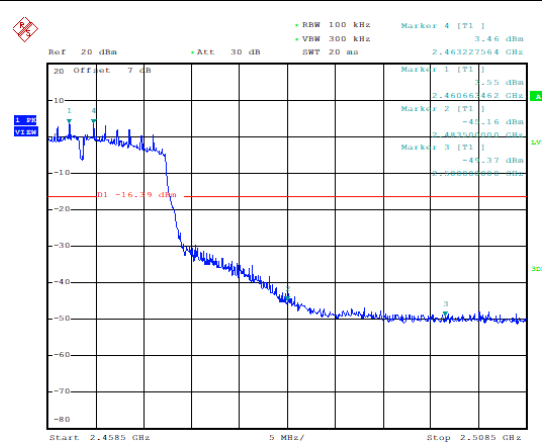


Date: 21.JUL.2021 10:26:24

Band Edges (802.11n-40MHz, Ch3)

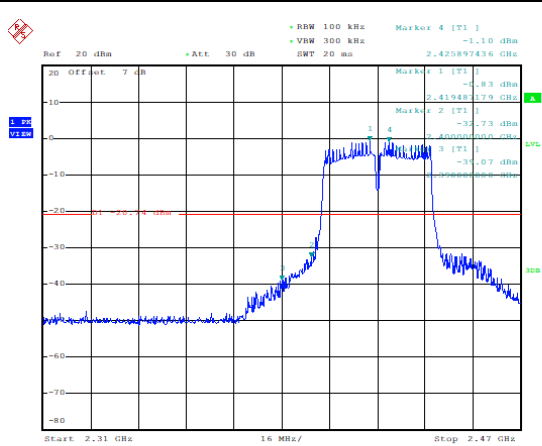

Date: 21.JUL.2021 10:28:51

Band Edges (802.11n-40MHz, Ch9)

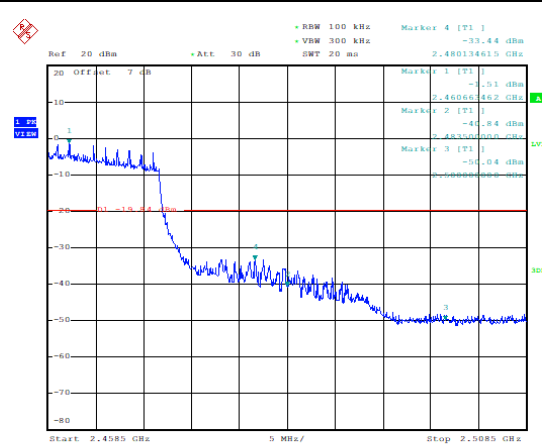

Date: 21.JUL.2021 10:28:35


Conclusion: PASS

6.6. Transmitter Spurious Emission-conducted

6.6.1 Measurement Limit

Standard	Limit
FCC 47 Part 15.247(d)	20dB below peak output power in 100KHz
RSS-247 5.5	20dB below peak output power in 100KHz

6.6.2 Test Setup

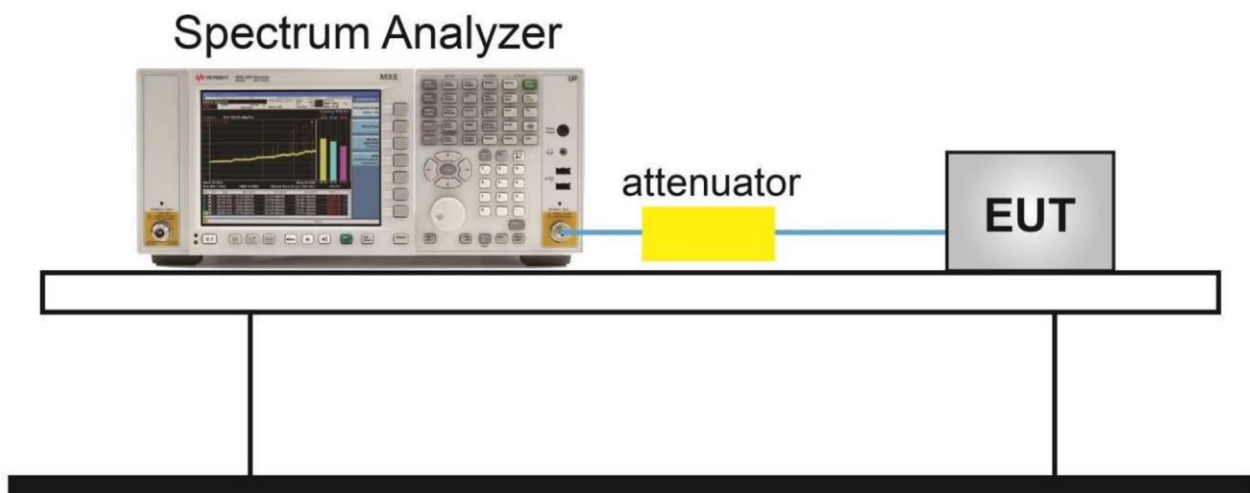

6.6.3 Test procedures

This measurement is according to ANSI C63.10 clause 11.11.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.

Reference level measurement


3. Set instrument center frequency to DTS channel center frequency.
4. Set the span to ≥ 1.5 times the DTS bandwidth.
5. Set the RBW = 100 kHz.
6. Set the VBW $\geq [3 \times \text{RBW}]$.
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.
11. Use the peak marker function to determine the maximum PSD level.

Emission level measurement

12. Set the center frequency and span to encompass frequency range to be measured.
13. Set the RBW = 100 kHz.
14. Set the VBW $\geq [3 \times \text{RBW}]$.
15. Detector = peak.
16. Sweep time = auto couple.
17. Trace mode = max hold.
18. Allow trace to fully stabilize.
19. Use the peak marker function to determine the maximum amplitude level.


Measurement Results

Conducted Spurious Emission (802.11b, Ch1)

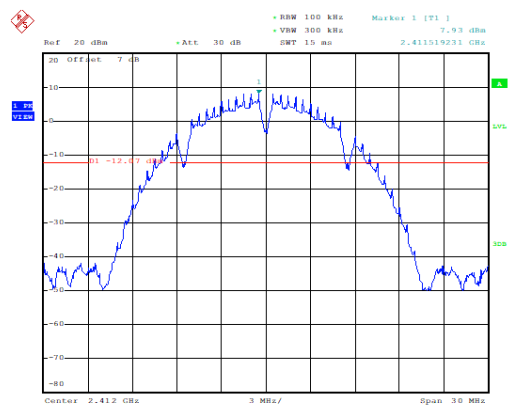


Date: 21 JUL 2021 10:08:09

Conducted Spurious Emission (802.11b, Ch1, 30MHz~26GHz)

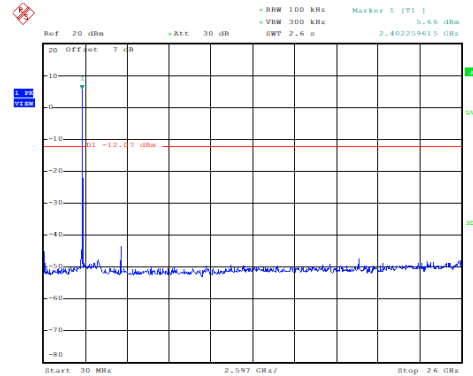


Date: 21 JUL 2021 10:09:16

Conducted Spurious Emission (802.11b, Ch6)

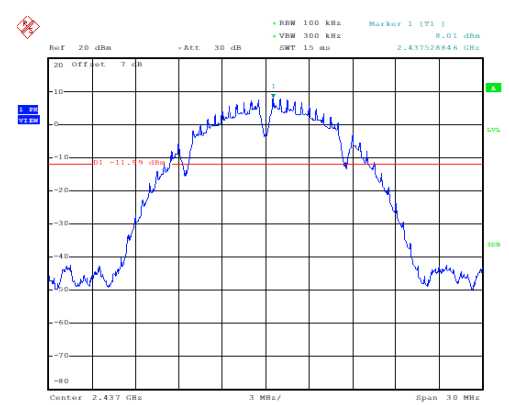


Date: 21 JUL 2021 10:10:12

Conducted Spurious Emission (802.11b, Ch6, 30MHz~26GHz)

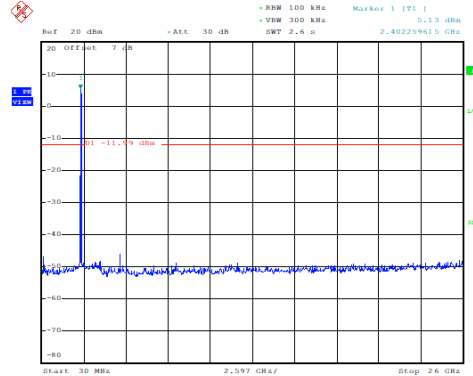


Date: 21 JUL 2021 10:11:24

Conducted Spurious Emission (802.11b, Ch11)

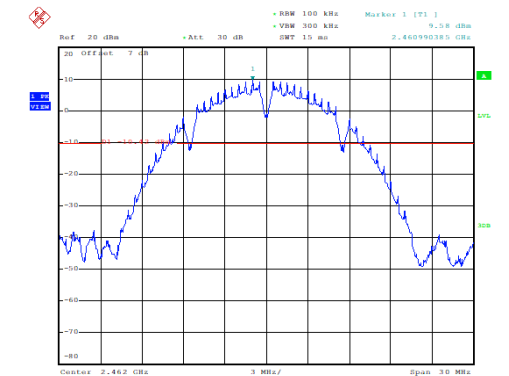


Date: 21 JUL 2021 10:12:10

Conducted Spurious Emission (802.11b, Ch11, 30MHz~26GHz)

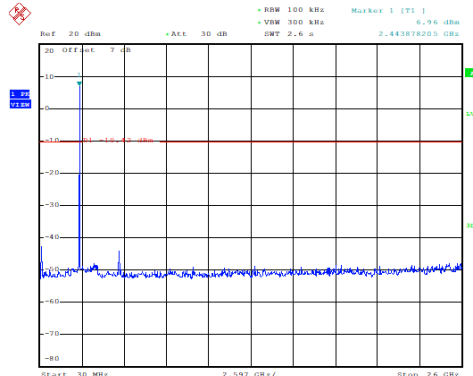


Date: 21 JUL 2021 10:12:18

Conducted Spurious Emission (802.11g, Ch1)

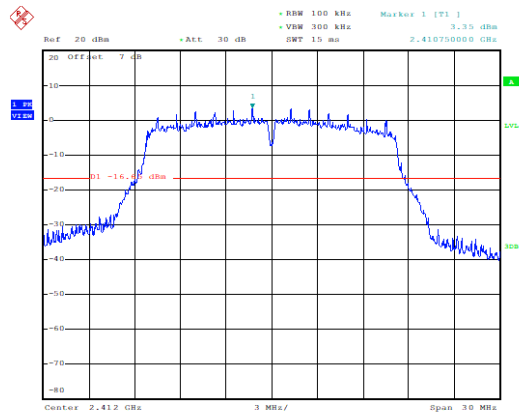


Date: 21.JUL.2021 10:14:29

Conducted Spurious Emission (802.11g, Ch1, 30MHz~26GHz)

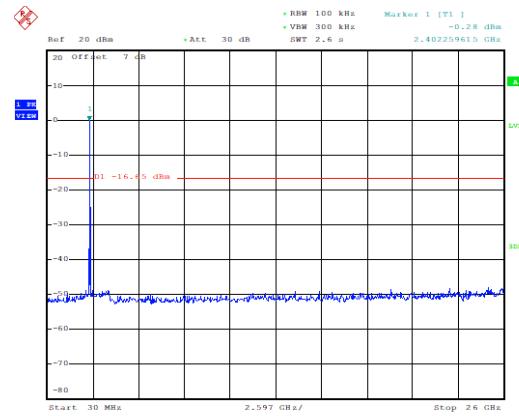


Date: 21.JUL.2021 10:15:27

Conducted Spurious Emission (802.11g, Ch6)

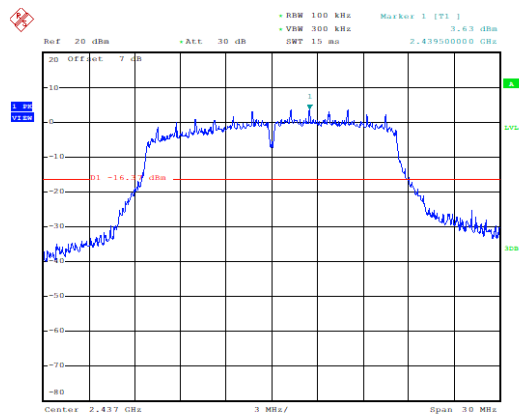


Date: 21.JUL.2021 10:16:29

Conducted Spurious Emission (802.11g, Ch6, 30MHz~26GHz)

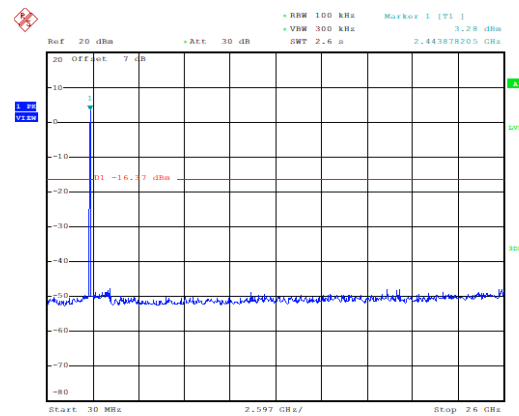


Date: 21.JUL.2021 10:17:41

Conducted Spurious Emission (802.11g, Ch11)

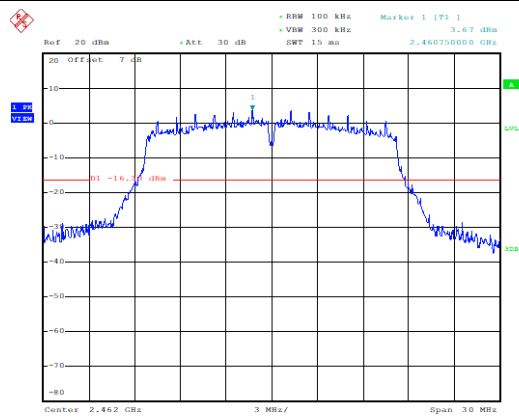


Date: 21.JUL.2021 10:18:27

Conducted Spurious Emission (802.11g, Ch11, 30MHz~26GHz)

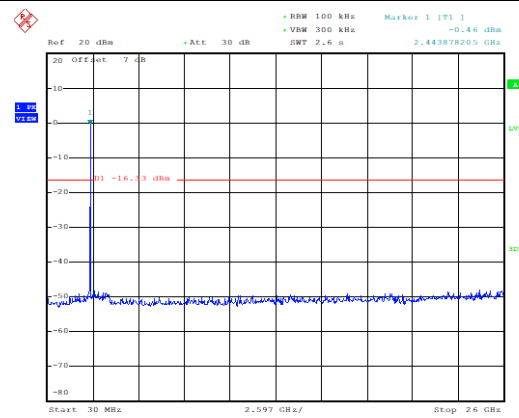


Date: 21.JUL.2021 10:19:25

Conducted Spurious Emission
(802.11n-20MHz, Ch1)

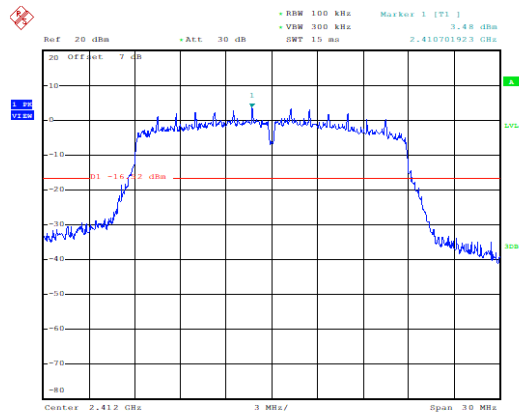


Date: 21.JUL.2021 10:21:04

Conducted Spurious Emission
(802.11n-20MHz, Ch1, 30MHz~26GHz)

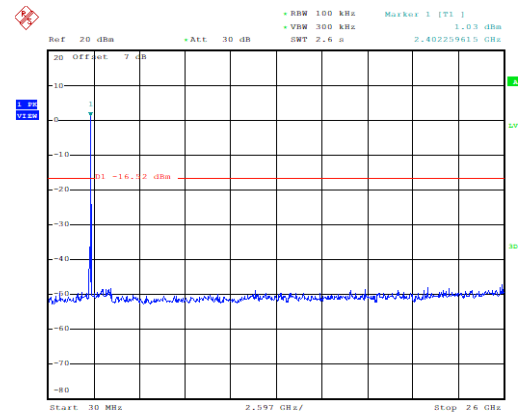


Date: 21.JUL.2021 10:22:12

Conducted Spurious Emission
(802.11n-20MHz, Ch6)

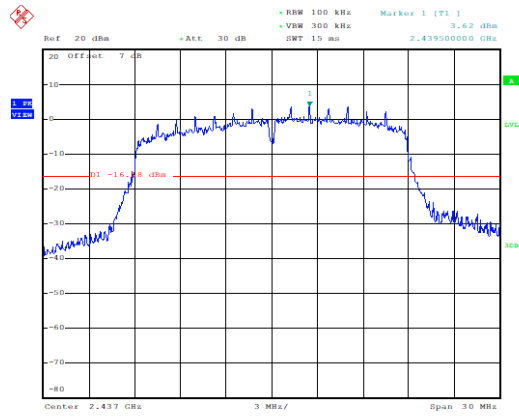


Date: 21.JUL.2021 10:22:21

Conducted Spurious Emission
(802.11n-20MHz, Ch6, 30MHz~26GHz)

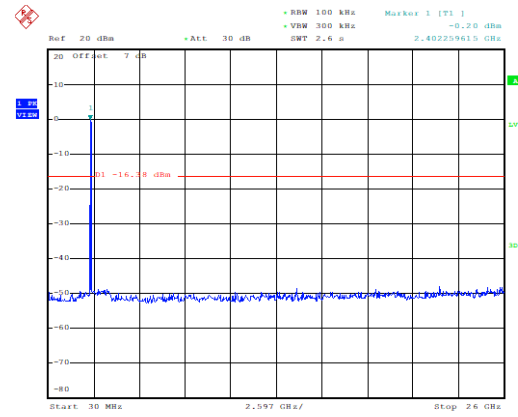


Date: 21.JUL.2021 10:24:44

Conducted Spurious Emission
(802.11n-20MHz, Ch11)

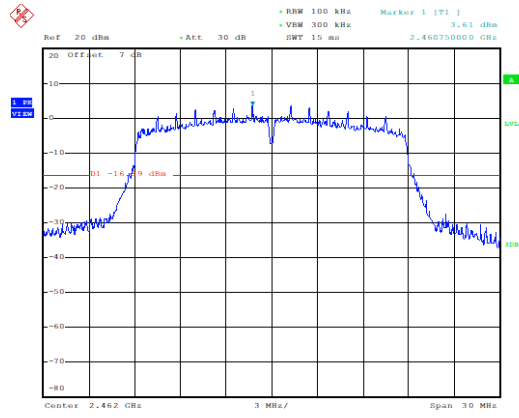


Date: 21.JUL.2021 10:25:49

Conducted Spurious Emission
(802.11n-20MHz, Ch11, 30MHz~26GHz)

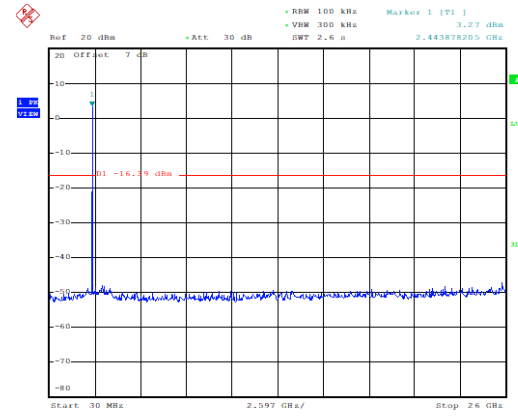


Date: 21.JUL.2021 10:26:57

Conducted Spurious Emission (802.11n-40MHz, Ch3)

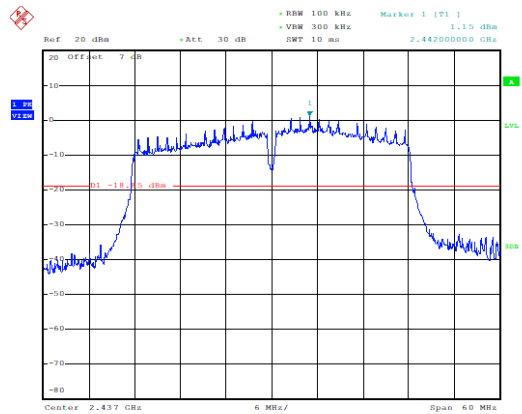


Date: 21 JUL 2021 10:20:58

Conducted Spurious Emission (802.11n-40MHz, Ch3, 30MHz~26GHz)

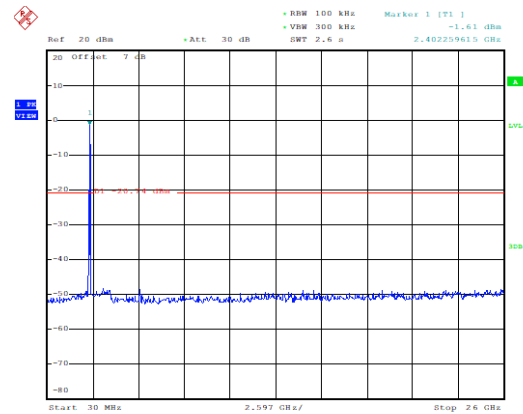


Date: 21 JUL 2021 10:29:24

Conducted Spurious Emission (802.11n-40MHz, Ch6)

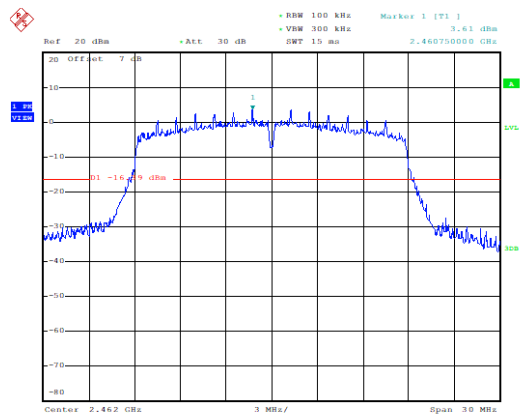


Date: 21 JUL 2021 10:25:49

Conducted Spurious Emission (802.11n-40MHz, Ch6, 30MHz~26GHz)

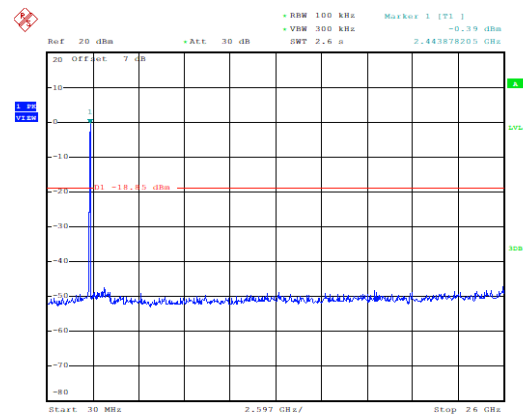


Date: 21 JUL 2021 10:32:11

Conducted Spurious Emission (802.11n-40MHz, Ch9)

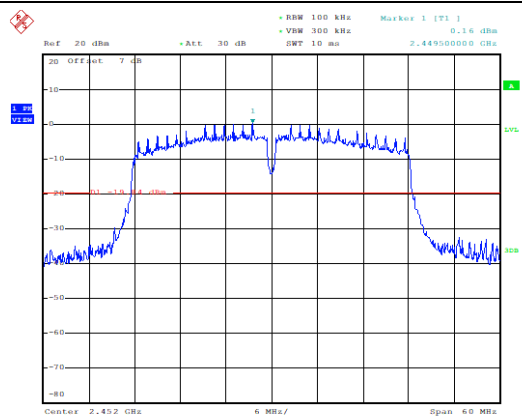

Date: 21 JUL 2021 10:22:00

Conducted Spurious Emission (802.11n-40MHz, Ch9, 30MHz~26GHz)

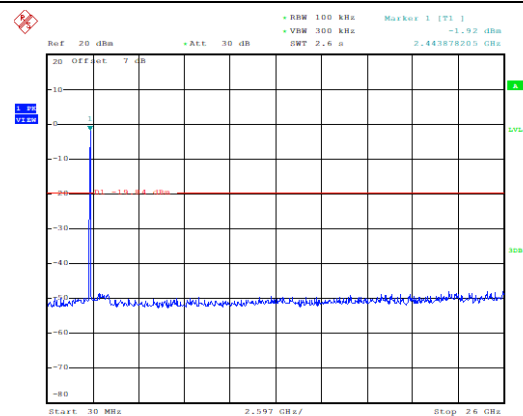

Date: 21 JUL 2021 10:24:08

6.7. Transmitter Spurious Emission-Radiated

6.7.1 Measurement Limit

Standard	Limit
FCC 47 Part 15.247,15.205,15.209	20dB below peak output power
RSS-Gen 8.9,8.10	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in 25.205(a), must also comply with the radiated emission limits specified in 15.209(a)(see 15.205(c)).


The measurement is according to ANSI C63.10 clause 11.11 and 11.12.

6.7.2 Limit in restricted band


Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30~88	100	40
88~216	150	43.5
216~960	200	46
Above 960	500	54

6.7.3 Test Setup

Below 1GHz Test Setup

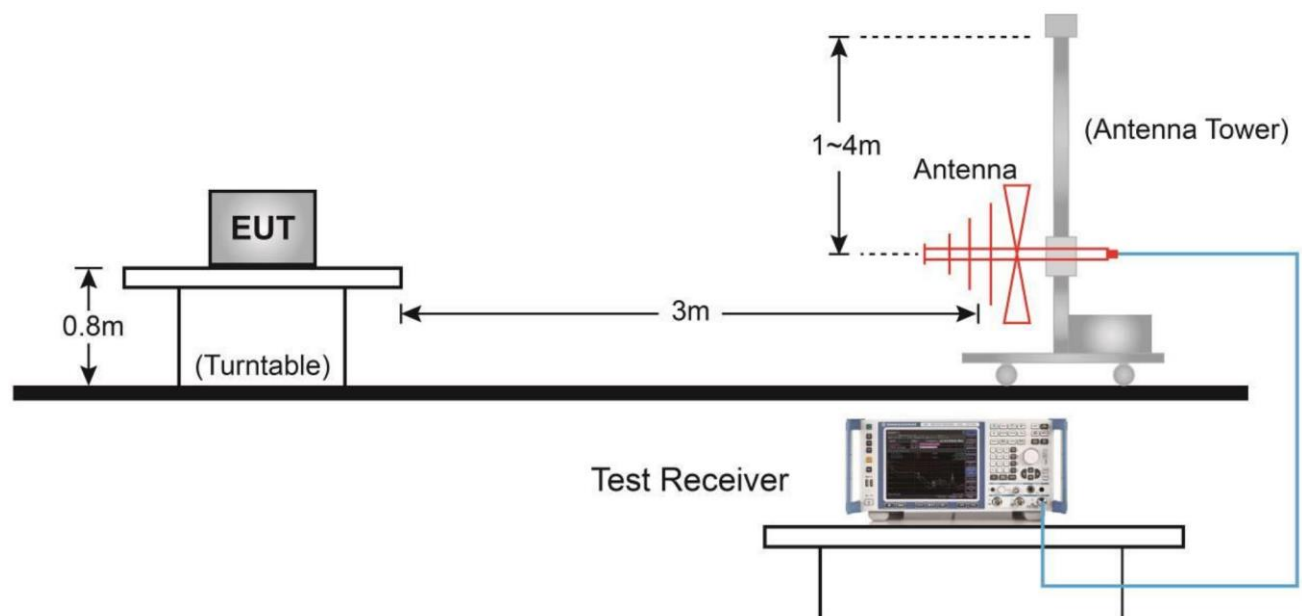

Above 1GHz Test Setup

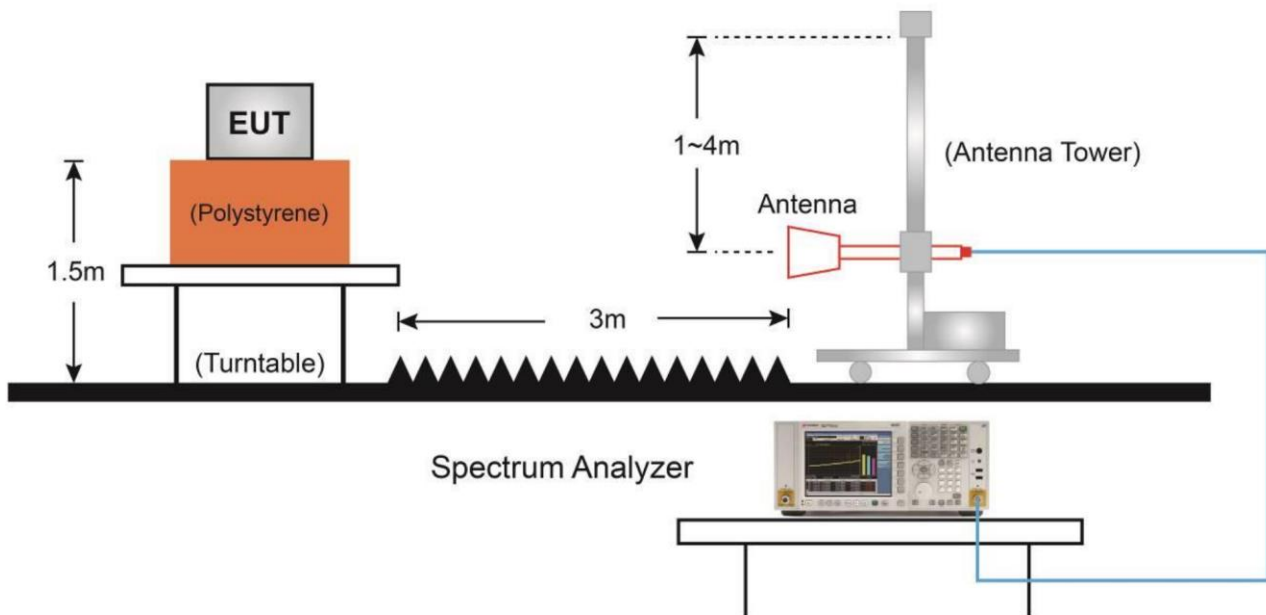

6.7.4 Test procedures

Portable, small, lightweight, or modular devices that may be handheld, worn on the body, or placed on a table during operation shall be positioned on a nonconducting platform, the top of which is 80 cm above the reference ground plane. The preferred area occupied by the EUT arrangement is 1 m by 1.5 m, but it may be larger or smaller to accommodate various sized EUTs. For testing purposes, ceiling- and wall-mounted devices also shall be positioned on a tabletop (see also ANSI C63.4-2013 section 6.3.4 and 6.3.5). In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During testing, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emission from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.


Frequency of emission (MHz)	RBW/VBW	Sweep Times (s)
30~1000	100KHz/300KHz	5
1000~4000	1MHz/3MHz	15
4000~18000	1MHz/3MHz	40
18000~26500	1MHz/3MHz	20

Measurement Results


Mainly Supply

Band edge: 802.11b, low channel

Peak detector

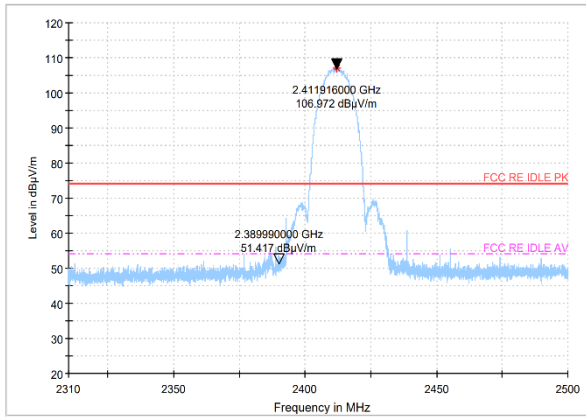


AV detector

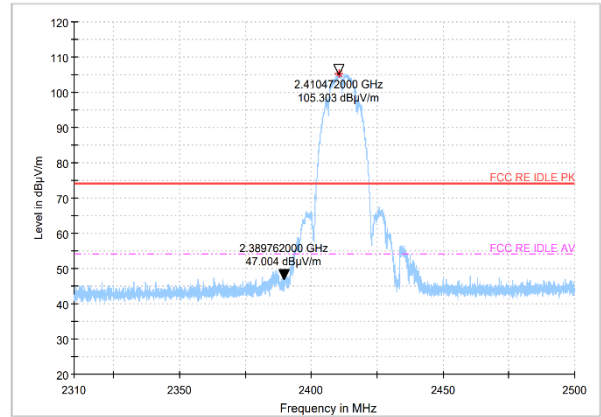


Band edge: 802.11b, high channel


Peak detector

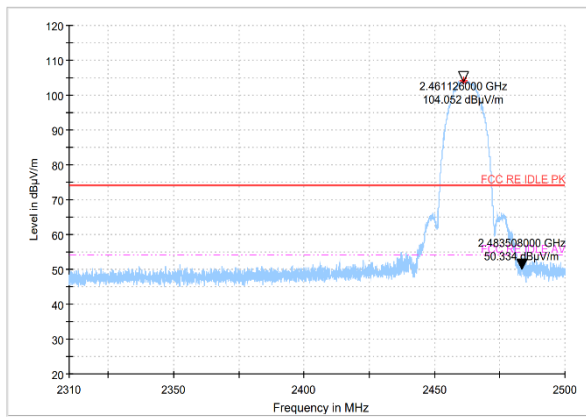


AV detector

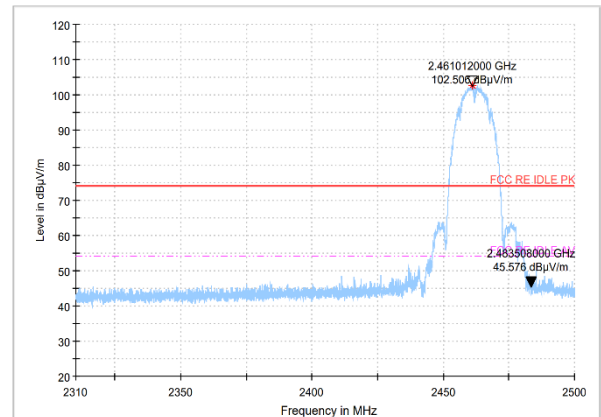


Radiated Spurious Emission
(802.11b, Ch11,30MHz~1GHz)

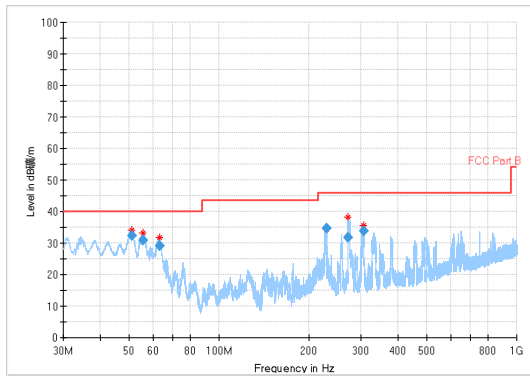

Radiated Spurious Emission
(802.11b, Ch11,1GHz~3GHz)

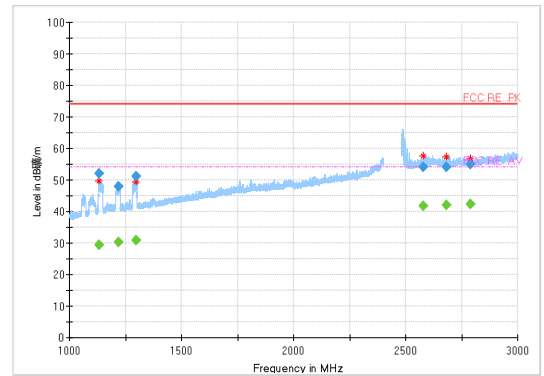

Radiated Spurious Emission
(802.11b, Ch11,3GHz~18GHz)

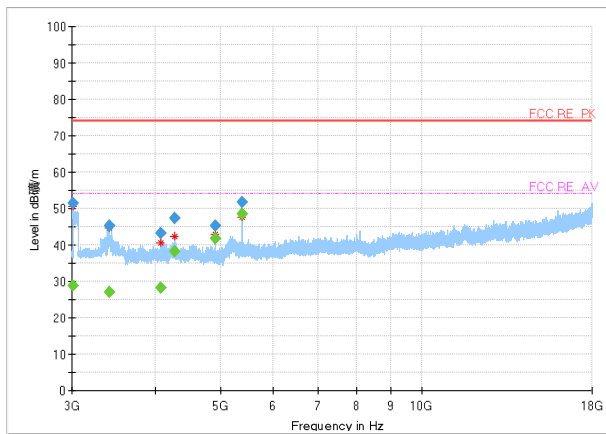


/


/

Band edge: 802.11g, low channel

Peak detector

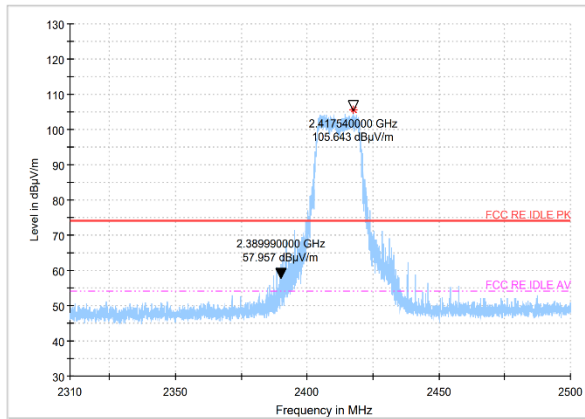


AV detector

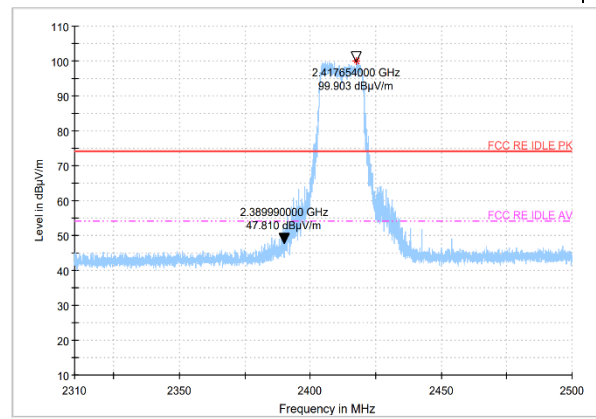


Band edge: 802.11g, high channel


Peak detector

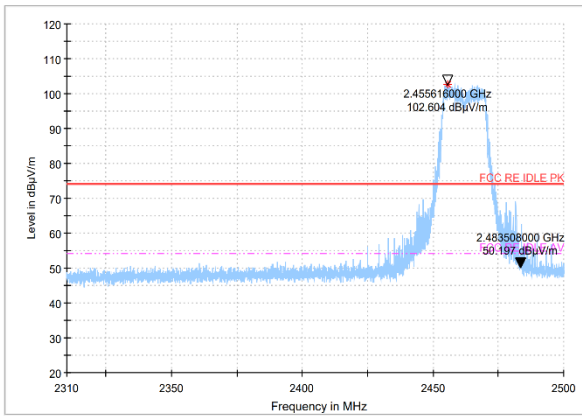


AV detector

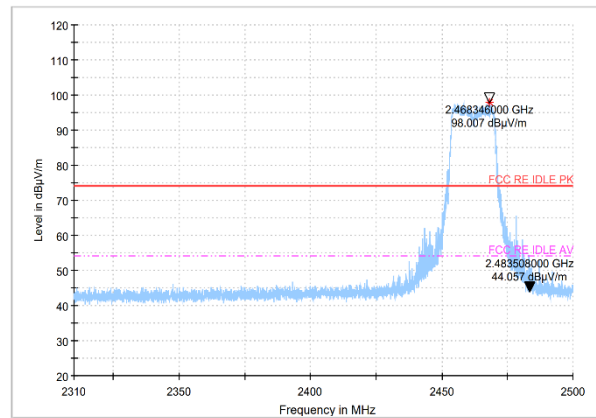


Radiated Spurious Emission
(802.11g, Ch11, 30MHz~1GHz)

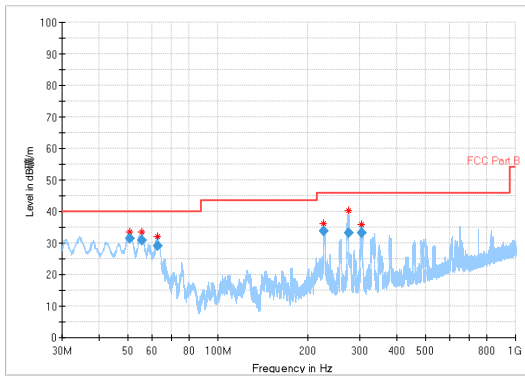

Radiated Spurious Emission
(802.11g, Ch11, 1GHz~3GHz)

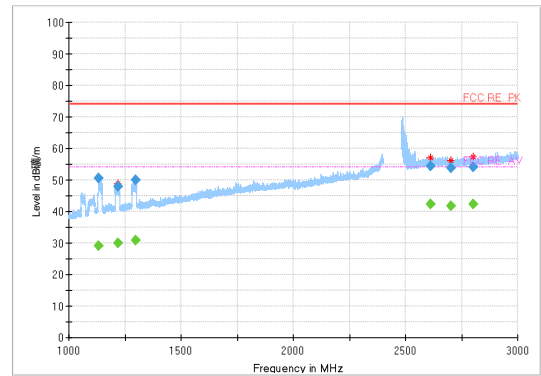

Radiated Spurious Emission
(802.11g, Ch11, 3GHz~18GHz)

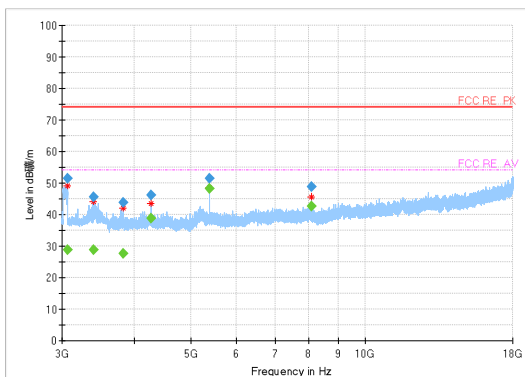


/


/

Band edge: 802.11n-20MHz, low channel

Peak detector

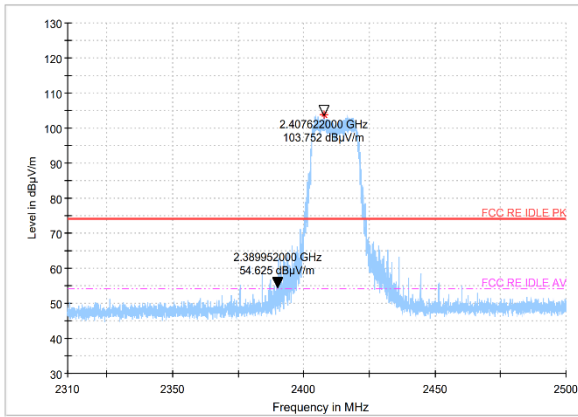


AV detector

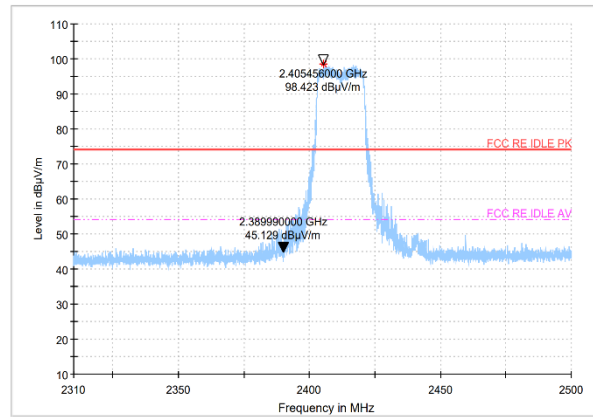


Band edge: 802.11n-20MHz, high channel


Peak detector

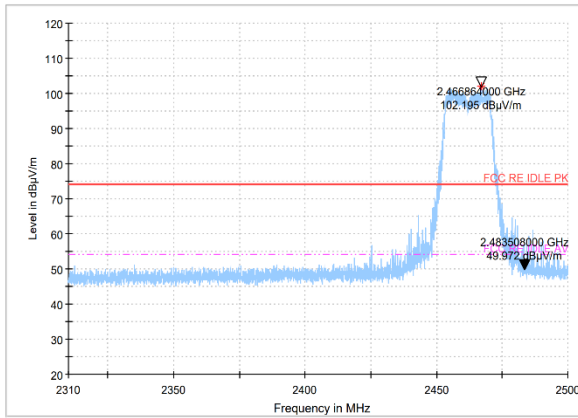


AV detector

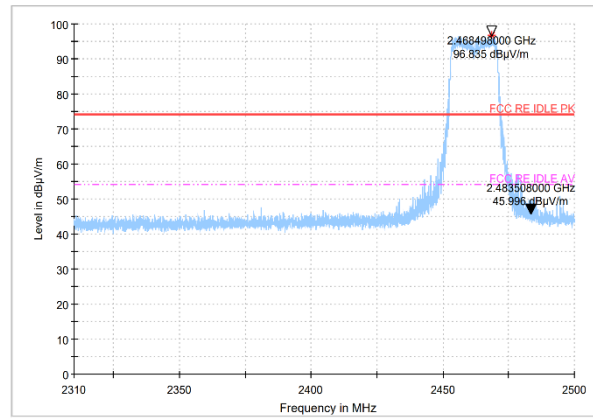


Radiated Spurious Emission
(802.11n-20MHz, Ch11,30MHz~1GHz)

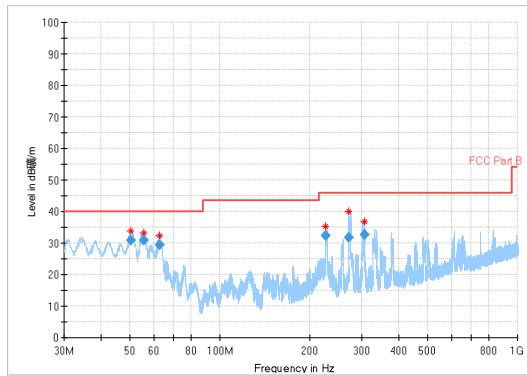

Radiated Spurious Emission
(802.11n-20MHz, Ch11,1GHz~3GHz)

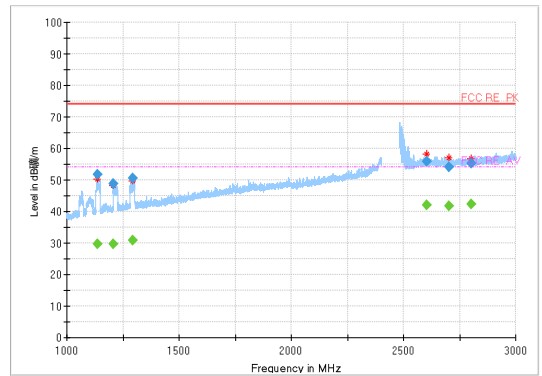

Radiated Spurious Emission
(802.11n-20MHz, Ch11, 3GHz~18GHz)

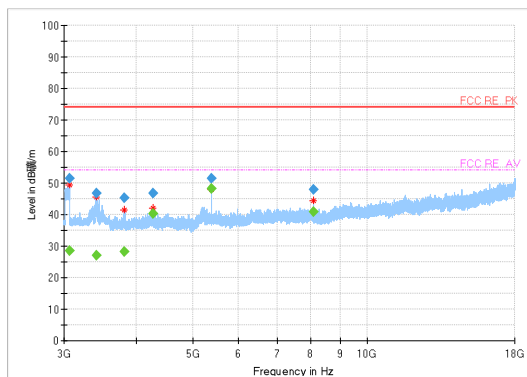


/


/

Band edge: 802.11n-40MHz, low channel

Peak detector

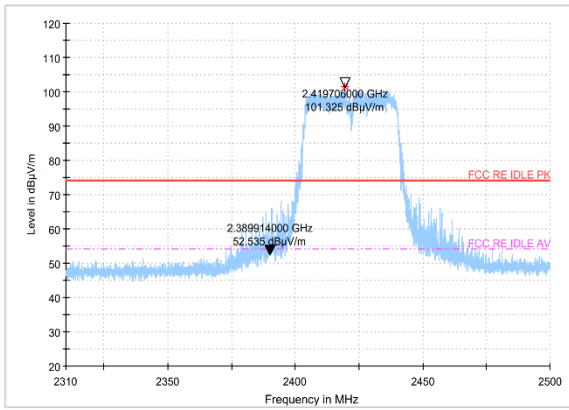


AV detector

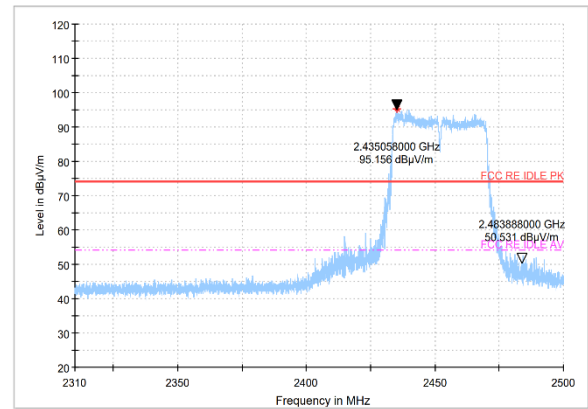


Band edge: 802.11n-40MHz, high channel


Peak detector

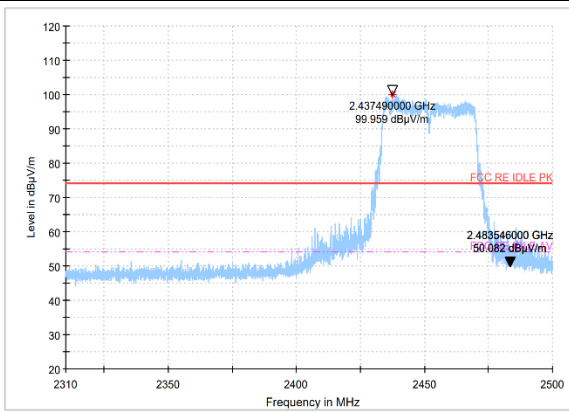


AV detector

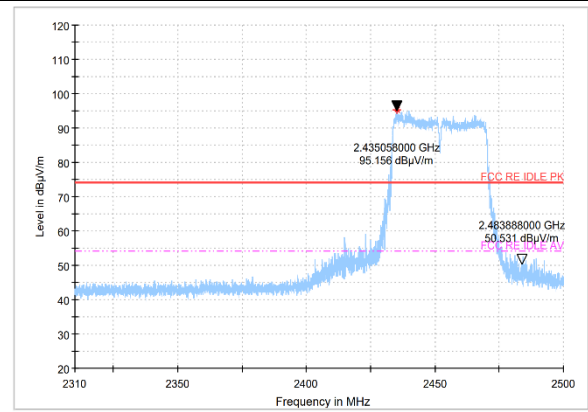


Radiated Spurious Emission
(802.11n-40MHz, Ch9,30MHz~1GHz)

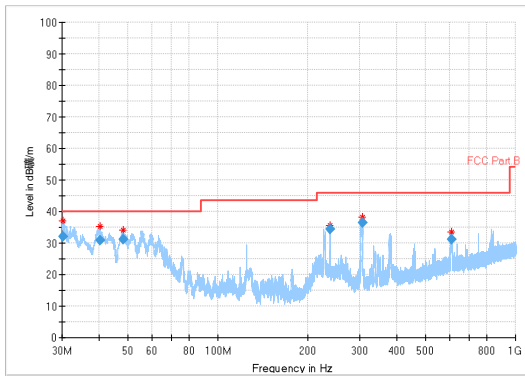

Radiated Spurious Emission
(802.11n-40MHz, Ch9,1GHz~3GHz)

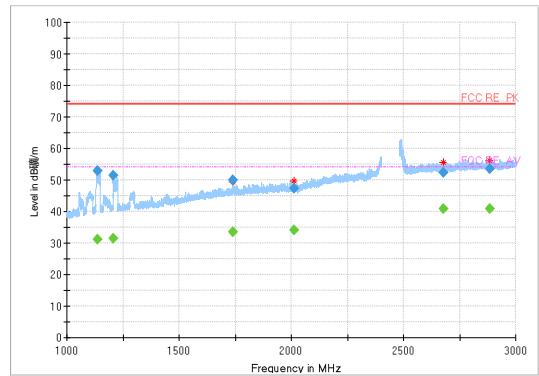

Radiated Spurious Emission
(802.11n-40MHz, Ch9, 3GHz~18GHz)

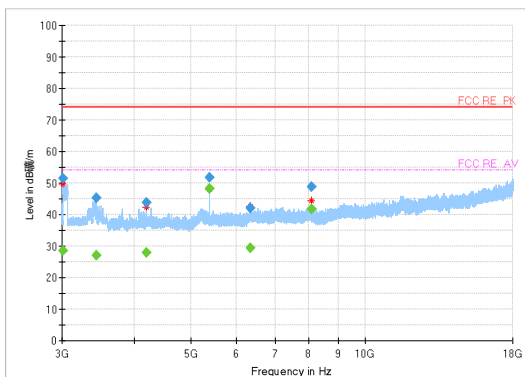


/

/


Secondary Supply

Band edge: 802.11b, low channel

Peak detector

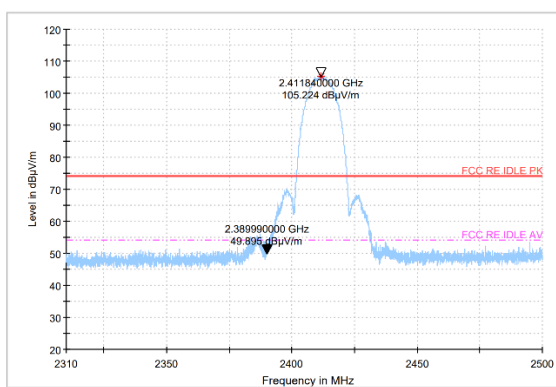


AV detector

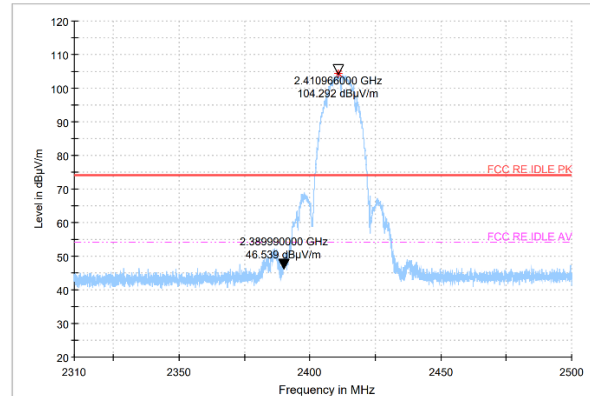


Band edge: 802.11b, high channel


Peak detector

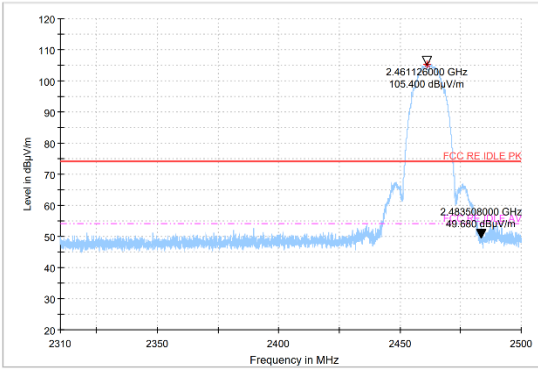


AV detector

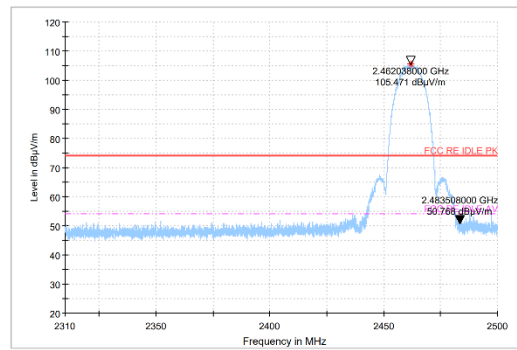


Radiated Spurious Emission (802.11b, Ch11, 30MHz~1GHz)

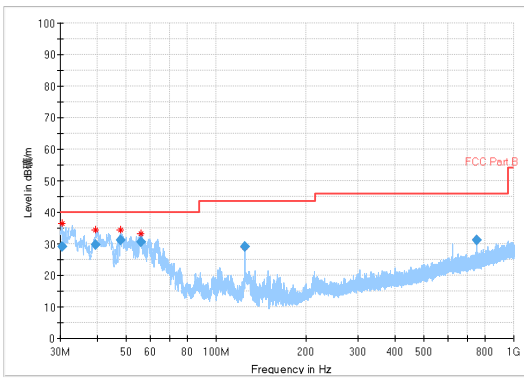

Radiated Spurious Emission (802.11b, Ch11, 1GHz~3GHz)

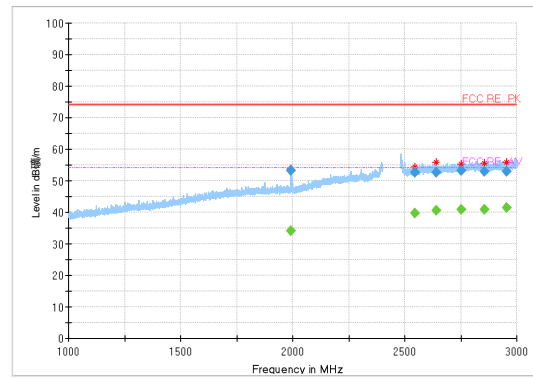

Radiated Spurious Emission (802.11b, Ch11, 3GHz~18GHz)

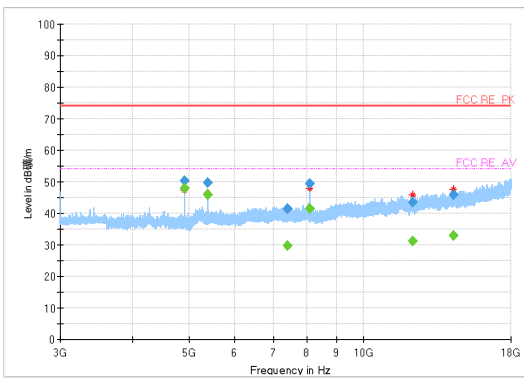


/


/

Band edge: 802.11b, low channel

Peak detector

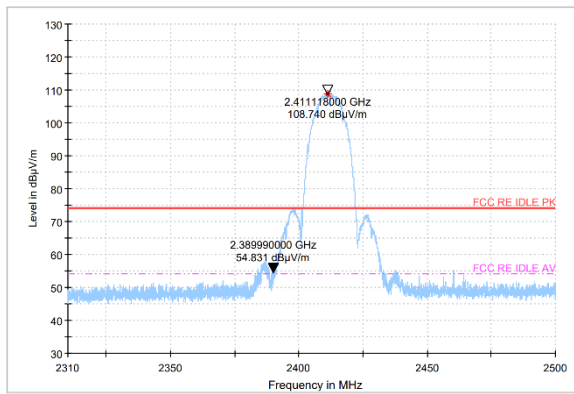


AV detector

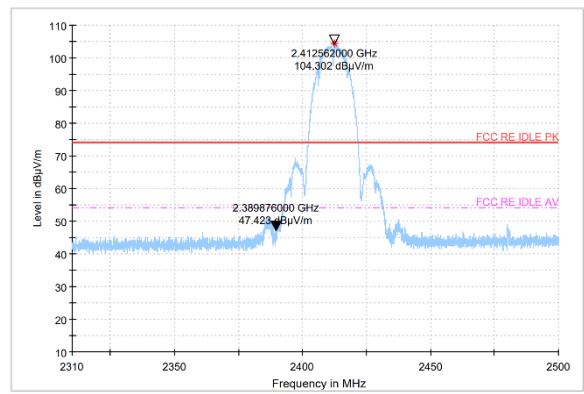


Band edge: 802.11b, high channel


Peak detector

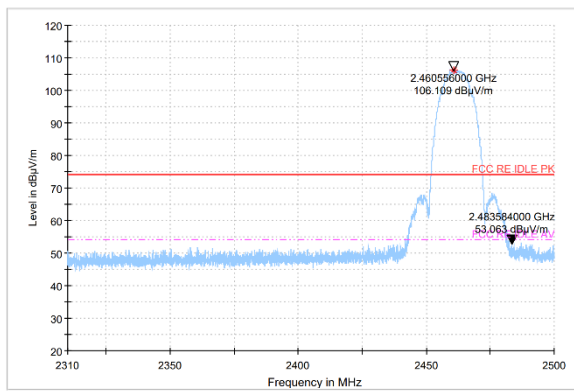


AV detector

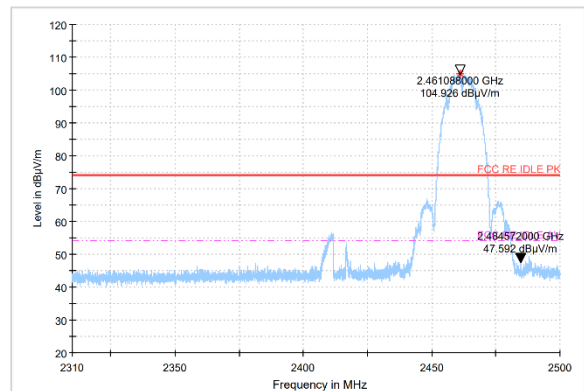


Radiated Spurious Emission (802.11b, Ch11, 30MHz~1GHz)

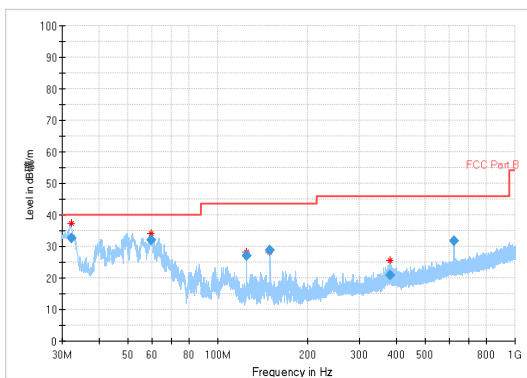

Radiated Spurious Emission (802.11b, Ch11, 1GHz~3GHz)

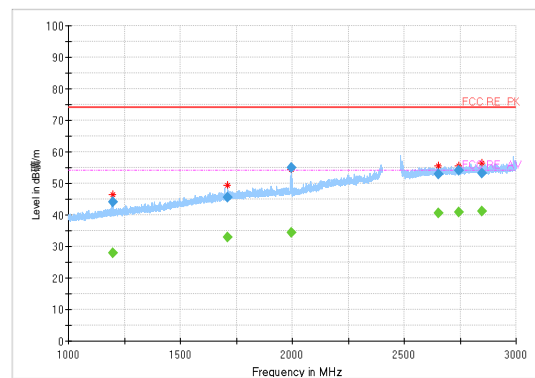
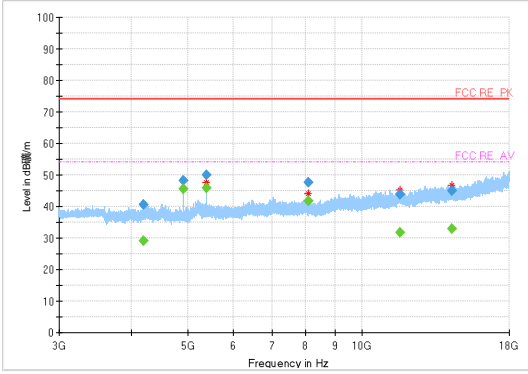
<p style="text-align: center;">Radiated Spurious Emission (802.11b, Ch11, 3GHz~18GHz)</p>	/
	/

Note:

A "reference path loss" is established and A_{Rpi} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$AR_{pi} = \text{Cable loss} + \text{Antenna Gain} - \text{Preamplifier gain}$$

$$\text{Result} = P_{Mea} + \text{Cable loss} + \text{Antenna Gain} - \text{Preamplifier gain} = P_{Mea} + AR_{pi}$$



Mainly Supply
802.11b mode
Ch11 30MHz~1GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
50.95	32.34	-15.3	47.64	V
55.73	30.77	-15.9	46.67	V
63.08	29.09	-17.2	46.29	V
229.56	34.79	-14.2	48.99	H
271.66	31.75	-12.9	44.65	H
305.83	33.88	-12.4	46.28	V

Ch11 1GHz~3GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
1133.79	52.14	1.7	50.44	H
1219.59	48.06	2.7	45.36	H
1296.94	51.11	3.6	47.51	V
2580.44	54.04	17	37.04	V
2683.14	54.17	17.3	36.87	H
2789.02	54.88	17.6	37.28	V

Ch11 1GHz~3GHz (Average)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
1133.79	29.5	1.7	27.8	H
1219.59	30.25	2.7	27.55	H
1296.94	30.85	3.6	27.25	V
2580.44	41.81	17	24.81	V
2683.14	41.97	17.3	24.67	H
2789.02	42.39	17.6	24.79	V

Ch11 3GHz~18GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
3016.4	51.59	-7.4	58.99	V
3410.6	45.3	-6.7	52.0	V
4074.4	43.35	-5.6	48.95	H
4279.5	47.44	-5.3	52.74	H
4924.1	45.18	-4.5	49.68	H
5399.9	51.68	-3.3	54.98	V

Ch11 3GHz~18GHz (Average)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
3016.4	28.76	-7.4	36.16	V
3410.6	26.92	-6.7	33.62	V
4074.4	28.24	-5.6	33.84	H
4279.5	38.27	-5.3	43.57	H
4924.1	41.66	-4.5	46.16	H
5399.9	48.53	-3.3	51.83	V

802.11g mode
Ch11 30MHz~1GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
50.69	31.53	-15.3	46.83	V
55.69	30.84	-15.9	46.74	V
62.60	29.02	-17.1	46.12	V
226.41	33.92	-14.3	48.22	H
274.73	33.28	-12.9	46.18	V
303.15	33.27	-12.5	45.77	V

Ch11 1GHz~3GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
1131.51	50.56	1.7	48.86	H
1217.91	47.87	2.6	45.27	H
1296.82	49.9	3.6	46.3	V
2611.83	54.27	17.3	36.97	H
2704.40	53.94	17.3	36.64	V
2800.54	54.24	17.6	36.64	V

Ch11 1GHz~3GHz (Average)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
1131.51	29.18	1.7	27.48	H
1217.91	30.07	2.6	27.47	H
1296.82	30.88	3.6	27.28	V
2611.83	42.32	17.3	25.02	H
2704.40	41.84	17.3	24.54	V
2800.54	42.3	17.6	24.7	V

Ch11 3GHz~18GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
3063.4	51.41	-7.5	58.91	V
3399.5	45.49	-6.7	52.19	V
3830	43.7	-6.2	49.9	H
4279.7	46.31	-5.3	51.61	H
5399.9	51.5	-3.3	54.8	V
8099.8	48.77	-1.5	50.27	V

Ch11 3GHz~18GHz (Average)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
3063.4	28.97	-7.5	36.47	V
3399.5	28.87	-6.7	35.57	V
3830	27.74	-6.2	33.94	H
4279.7	38.69	-5.3	43.99	H
5399.9	48.26	-3.3	51.56	V
8099.8	42.68	-1.5	44.18	V

802.11n-20MHz
Ch11 30MHz~1GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
50.36	31.01	-15.3	46.31	V
55.70	30.59	-15.9	46.49	V
62.85	29.21	-17.1	46.31	V
229.59	34.45	-14.2	48.65	H
273.49	31.19	-12.9	44.09	H
306.20	34.3	-12.4	46.7	V

Ch11 1GHz~3GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
1131.23	50	1.7	48.3	H
1213.55	47.88	2.6	45.28	V
1298.87	49.56	3.6	45.96	V
2545.08	54.33	16.5	37.83	V
2651.56	55.23	17.3	37.93	V
2757.85	53.97	17.5	36.47	H

Ch11 1GHz~3GHz (Average)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
1131.23	29.05	1.7	27.35	H
1213.55	30.44	2.6	27.84	V
1298.87	30.63	3.6	27.03	V
2545.08	41.18	16.5	24.68	V
2651.56	41.99	17.3	24.69	V
2757.85	41.98	17.5	24.48	H

Ch11 3GHz~18GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
3063.5	50.74	-7.5	58.24	H
3402.3	46.36	-6.7	53.06	H
4279.9	47.18	-5.3	52.48	H
4823.2	44.43	-4.8	49.23	H
5399.9	51.55	-3.3	54.85	V
8099.9	48.78	-1.5	50.28	V

Ch11 3GHz~18GHz (Average)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
3063.5	28.58	-7.5	36.08	H
3402.3	27.16	-6.7	33.86	H
4279.9	40.5	-5.3	45.8	H
4823.2	31.16	-4.8	35.96	H
5399.9	48.28	-3.3	51.58	V
8099.9	42.79	-1.5	44.29	V

802.11n-40MHz

Ch9 30MHz~1GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
30.23	32.06	-14.4	46.46	V
40.25	30.78	-12.8	43.58	V
48.12	31.1	-12.1	43.2	V
238.34	34.43	-12.5	46.93	H
306.26	36.57	-10.7	47.27	V
611.42	31.07	-3.1	34.17	V

Ch9 1GHz~3GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
1137.84	52.99	2.2	50.79	H
1207.66	51.33	2.8	48.53	H
1738.45	50.04	8.2	41.84	H
2013.89	47.49	9.8	37.69	H
2676.39	52.45	15.9	36.55	H
2883.39	53.4	16.7	36.7	V

Ch11 1GHz~3GHz (Average)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
1137.84	31.03	2.2	28.83	H
1207.66	31.38	2.8	28.58	H
1738.45	33.53	8.2	25.33	H
2013.89	34.19	9.8	24.39	H
2676.39	40.8	15.9	24.9	H
2883.39	40.92	16.7	24.22	V

Ch11 3GHz~18GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
3016.2	51.34	-7.4	58.74	V
3434.9	45.23	-6.7	51.93	H
4188.3	43.88	-5.7	49.58	H
5399.8	51.82	-3.3	55.12	V
6332.2	42.04	-2.5	44.54	H
8100	48.94	-1.5	50.44	V

Ch11 3GHz~18GHz (Average)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
3016.2	28.65	-7.4	36.05	V
3434.9	26.94	-6.7	33.64	H
4188.3	27.8	-5.7	33.5	H
5399.8	48.31	-3.3	51.61	V
6332.2	29.35	-2.5	31.85	H
8100	41.83	-1.5	43.33	V



Secondary Supply

802.11b mode

Ch11 30MHz~1GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
30.53	29.05	-14.4	43.45	V
39.33	29.7	-13	42.7	V
47.87	31.28	-12.1	43.38	V
56.12	30.48	-12.1	42.58	V
125.00	29.01	-15.6	44.61	V
750.01	31.14	-2.1	33.24	V

Ch11 1GHz~3GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
1993.06	53.24	9.1	44.14	H
2545.88	52.52	15	37.52	H
2641.22	52.59	15.8	36.79	H
2753.48	53.35	16.3	37.05	H
2855.18	52.84	16.7	36.14	V
2954.32	52.92	16.9	36.02	V

Ch11 1GHz~3GHz (Average)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
1993.06	34.17	9.1	25.07	H
2545.88	39.76	15	24.76	H
2641.22	40.63	15.8	24.83	H
2753.48	40.81	16.3	24.51	H
2855.18	41.02	16.7	24.32	V
2954.32	41.33	16.9	24.43	V

Ch11 3GHz~18GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
4924.1	50.15	-4.5	54.65	H
5399.9	49.59	-3.3	52.89	V
7389.3	41.57	-2.2	43.77	H
8100.3	49.5	-1.5	51	V
12197.8	43.43	2	41.43	H
14301.5	45.94	5.4	40.54	H

Ch11 3GHz~18GHz (Average)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
4924.1	47.9	-4.5	52.4	H
5399.9	45.78	-3.3	49.08	V
7389.3	29.73	-2.2	31.93	H
8100.3	41.6	-1.5	43.1	V
12197.8	31.19	2	29.19	H
14301.5	32.84	5.4	27.44	H

Thirdly Supply

802.11b mode

Ch11 30MHz~1GHz

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
32.16	32.57	-14.3	46.87	V
59.55	32.18	-12.3	44.48	V
124.99	27.12	-15.6	42.72	H
150.01	28.72	-17.1	45.82	H
380.03	20.78	-8.7	29.48	V
625.01	31.63	-3.1	34.73	V

Ch11 1GHz~3GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
1199.04	44.06	2.8	41.26	H
1711.94	45.63	7.8	37.83	H
1995.22	55.09	9.2	45.89	H
2653.55	52.99	15.9	37.09	H
2743.34	54.04	16.2	37.84	V
2847.23	53.38	16.6	36.78	H

Ch11 1GHz~3GHz (Average)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
1199.04	27.95	2.8	25.15	H
1711.94	32.8	7.8	25	H
1995.22	34.35	9.2	25.15	H
2653.55	40.46	15.9	24.56	H
2743.34	40.96	16.2	24.76	V
2847.23	41.23	16.6	24.63	H

Ch11 3GHz~18GHz (Peak)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
4200.1	40.49	-5.7	46.19	V
4924.1	48.33	-4.5	52.83	H
5399.7	50.12	-3.3	53.42	V
8099.9	47.74	-1.5	49.24	V
11662.5	43.8	2.1	41.7	V
14326.5	45.02	5.4	39.62	V

Ch11 3GHz~18GHz (Average)

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	PMea(dBuV/m)	Polarity
4200.1	29.01	-5.7	34.71	V
4924.1	45.7	-4.5	50.2	H
5399.7	45.91	-3.3	49.21	V
8099.9	41.87	-1.5	43.37	V
11662.5	31.79	2.1	29.69	V
14326.5	32.95	5.4	27.55	V


Note: Only the worst case is written in the report.

6.8. AC Powerline Conducted Emission

6.8.1 Method of Measurement: ANSI C63.10 clause 6.2

- 1 The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
- 2 If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
- 3 The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
- 4 If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.

If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.³⁶ Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

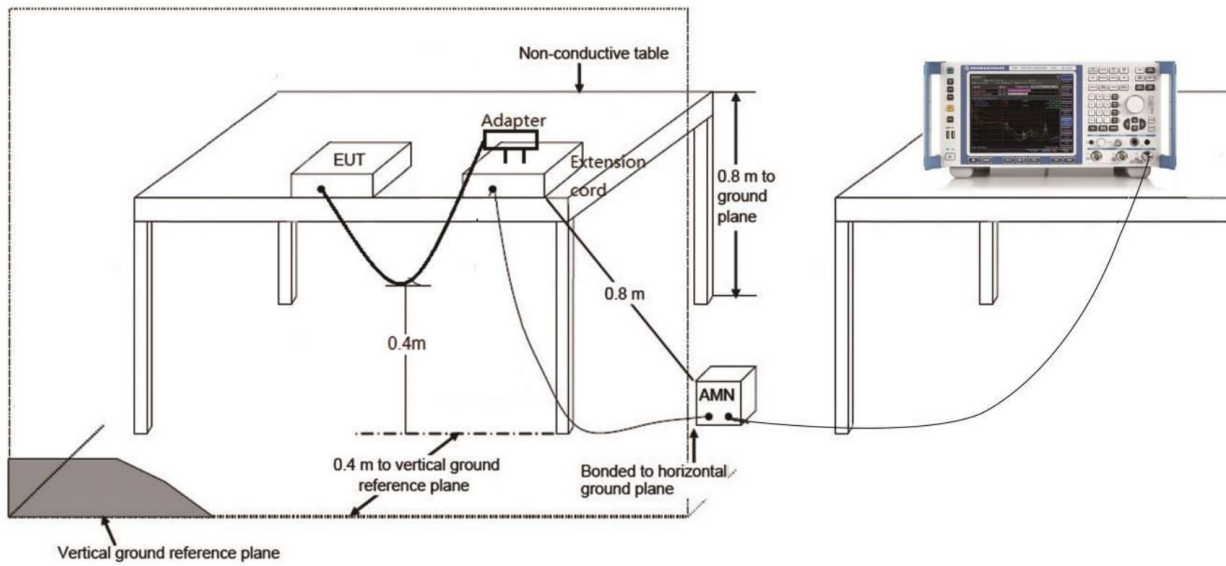

6.8.3 Test Condition

Voltage (V)	Frequency (Hz)
120	60


Measurement Result and limit:

(Quasi-peak-average Limit)

Mainly Supply
CA01

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Average Limit (dBμV)	Conclusion
0.15 to 0.5	66 to 56	56 to 46	P
0.5 to 5	56	46	
5 to 30	60	50	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

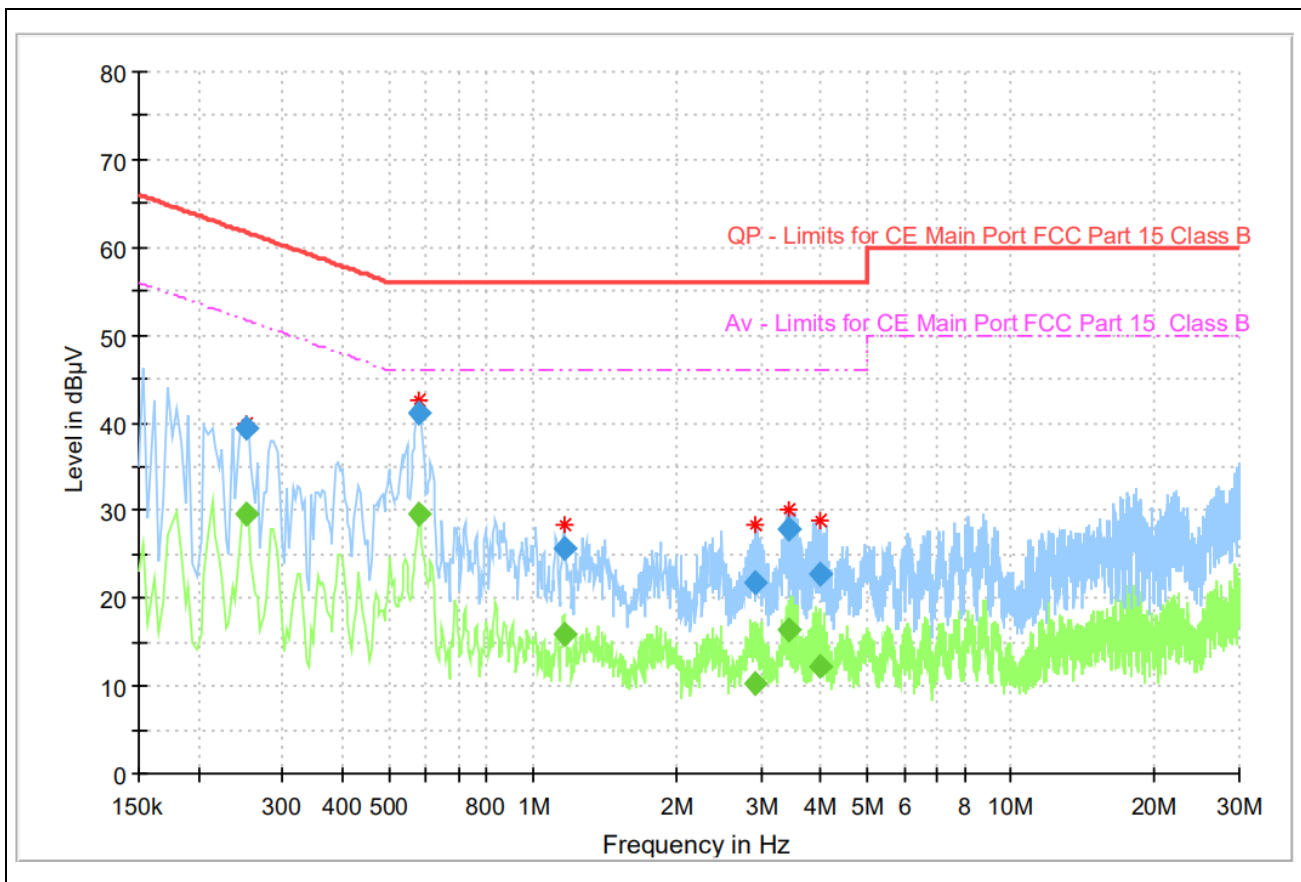


Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.250744	39.38	---	61.73	22.36	15000.0	9	N	ON	9.7
0.250744	---	29.67	51.73	22.06	15000.0	9	N	ON	9.7
0.579094	---	29.56	46	16.44	15000.0	9	N	ON	9.8
0.579094	41.04	---	56	14.96	15000.0	9	N	ON	9.8
1.161169	---	15.89	46	30.11	15000.0	9	L1	ON	10.1

1.161169	25.65	---	56	30.35	15000.0	9	L1	ON	10.1
2.907394	21.8	---	56	34.2	15000.0	9	L1	ON	10.4
2.907394	---	10.39	46	35.61	15000.0	9	L1	ON	10.4
3.429769	---	16.32	46	29.68	15000.0	9	L1	ON	10.4
3.429769	27.86	---	56	28.14	15000.0	9	L1	ON	10.4
3.9708	---	12.14	46	33.86	15000.0	9	L1	ON	10.5
3.9708	22.81	---	56	33.19	15000.0	9	L1	ON	10.5

CB02

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Average Limit (dB μ V)	Conclusion
0.15 to 0.5	67 to 56	56 to 46	P
0.5 to 5	56	46	
5 to 30	60	50	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

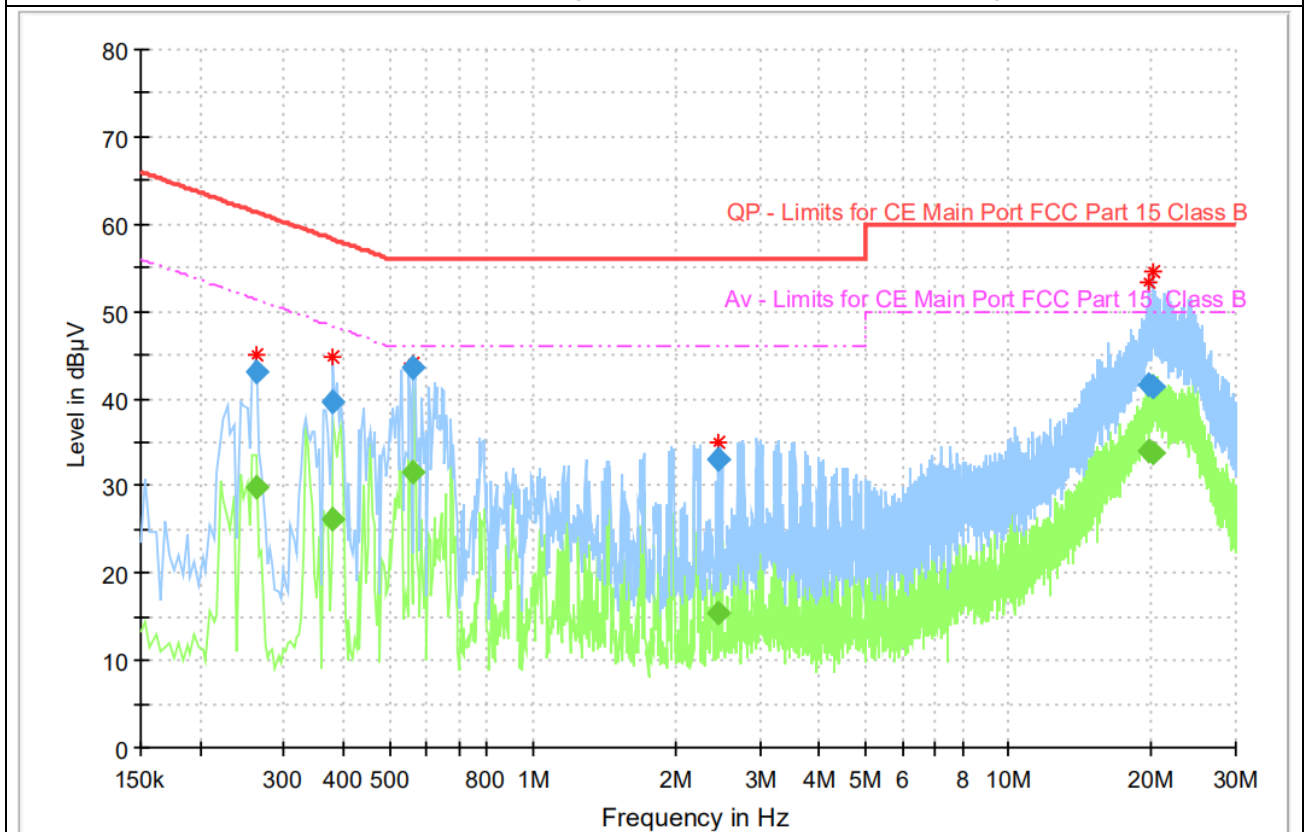


Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.261938	---	29.84	51.37	21.53	15000.0	9	L1	ON	9.8
0.261938	42.95	---	61.37	18.42	15000.0	9	L1	ON	9.8
0.381338	39.65	---	58.25	18.6	15000.0	9	N	ON	9.7
0.381338	---	26.14	48.25	22.11	15000.0	9	N	ON	9.7
0.560438	43.58	---	56	12.42	15000.0	9	N	ON	9.8
0.560438	---	31.58	46	14.42	15000.0	9	N	ON	9.8
2.452181	33.02	---	56	22.98	15000.0	9	L1	ON	10.4
2.452181	---	15.4	46	30.6	15000.0	9	L1	ON	10.4
19.6122	---	33.93	50	16.07	15000.0	9	N	ON	10.4
19.6122	41.57	---	60	18.43	15000.0	9	N	ON	10.4
20.190544	41.43	---	60	18.57	15000.0	9	L1	ON	11.1
20.190544	---	33.64	50	16.36	15000.0	9	L1	ON	11.1

Secondary Supply

CA01

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Average Limit (dBμV)	Conclusion
0.15 to 0.5	68 to 56	56 to 46	P
0.5 to 5	56	46	
5 to 30	60	50	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

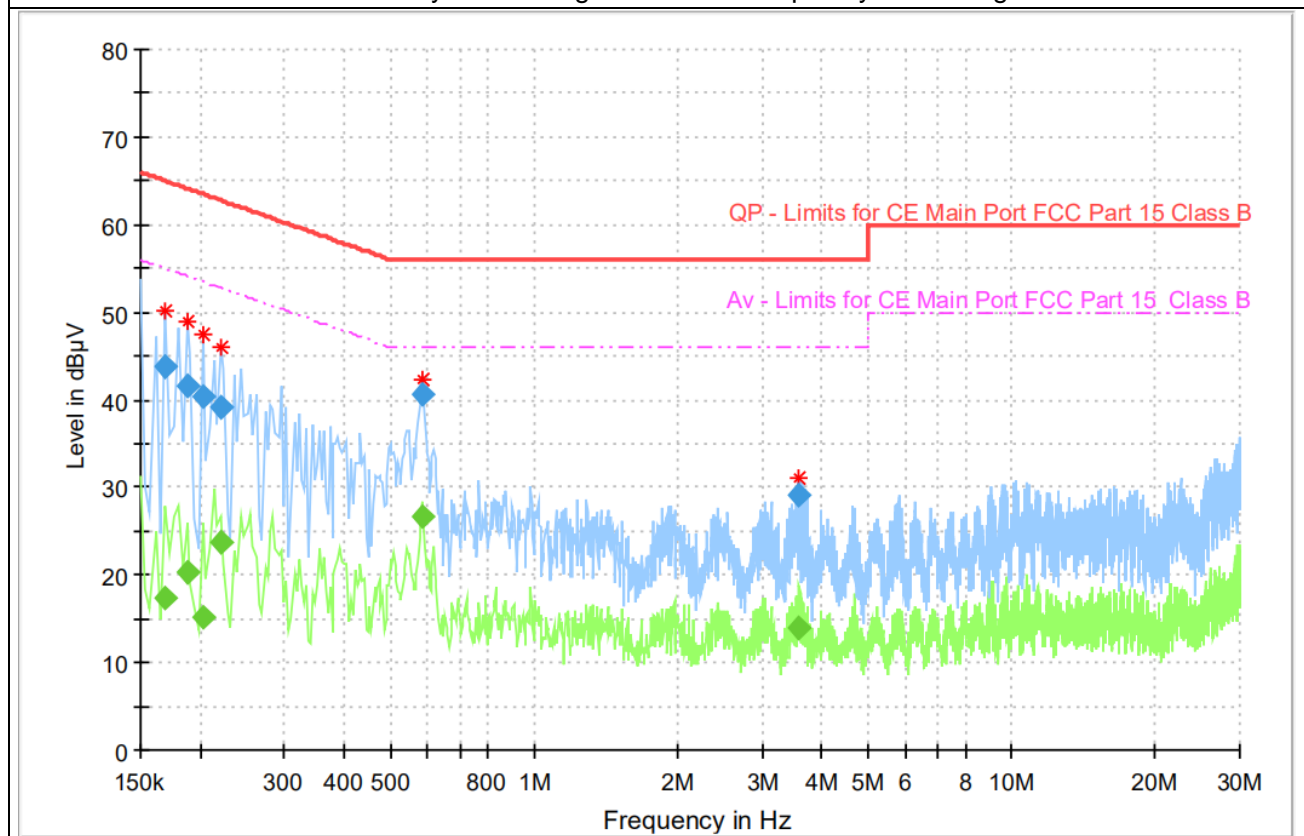


Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.168656	---	17.48	55.03	37.55	15000.0	9.000	L1	ON	9.7
0.168656	43.77	---	65.03	21.26	15000.0	9.000	L1	ON	9.7
0.187313	---	20.19	54.16	33.96	15000.0	9.000	L1	ON	9.7
0.187313	41.66	---	64.16	22.49	15000.0	9.000	L1	ON	9.7
0.202238	---	15.27	53.52	38.25	15000.0	9.000	L1	ON	9.8
0.202238	40.35	---	63.52	23.17	15000.0	9.000	L1	ON	9.8

0.220894	39.26	---	62.79	23.53	15000.0	9.000	N	ON	9.7
0.220894	---	23.70	52.79	29.08	15000.0	9.000	N	ON	9.7
0.582825	40.63	---	56.00	15.37	15000.0	9.000	N	ON	9.8
0.582825	---	26.70	46.00	19.30	15000.0	9.000	N	ON	9.8
3.597675	---	13.96	46.00	32.04	15000.0	9.000	L1	ON	10.4
3.597675	29.18	---	56.00	26.82	15000.0	9.000	L1	ON	10.4

CB02

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Average Limit (dB μ V)	Conclusion
0.15 to 0.5	69 to 56	56 to 46	P
0.5 to 5	56	46	
5 to 30	60	50	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

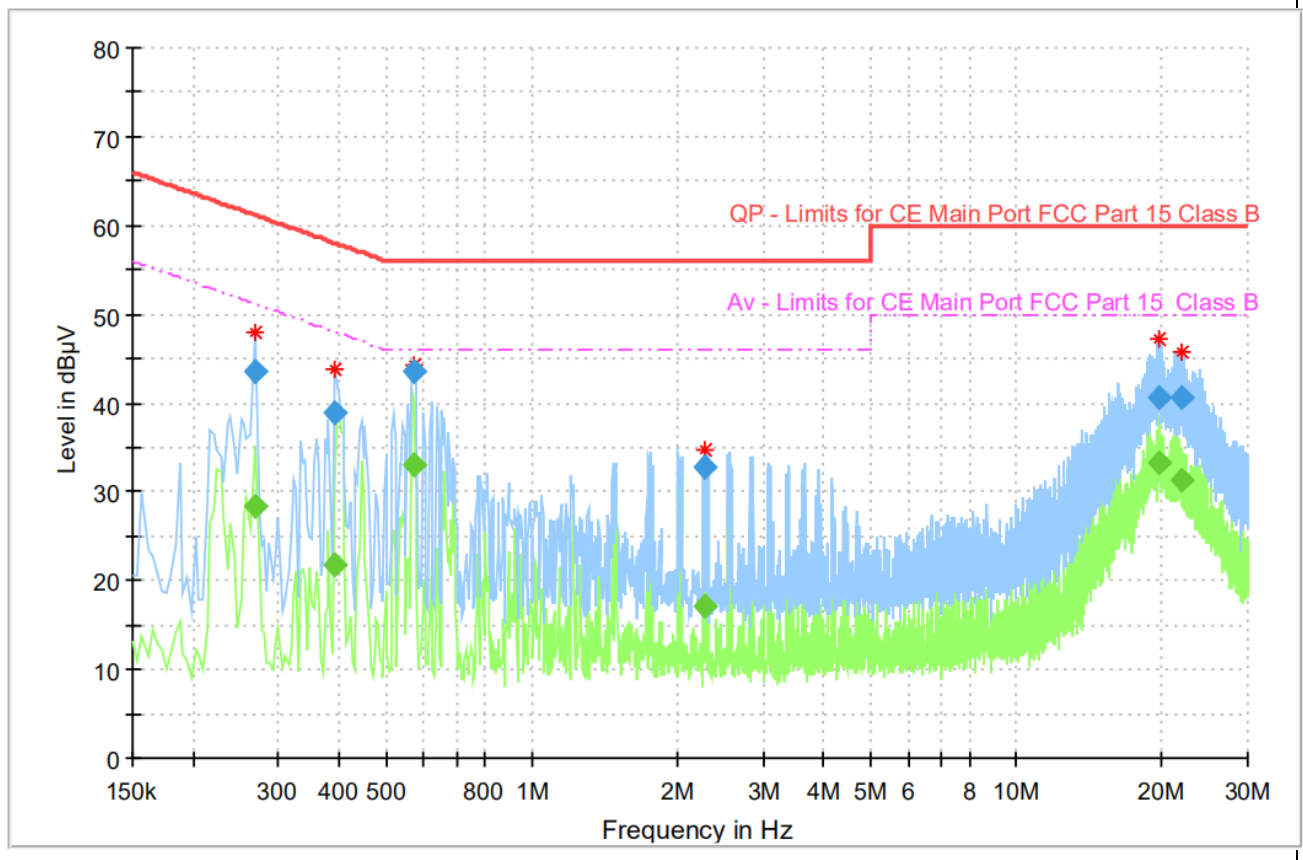


Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.269400	---	28.47	51.14	22.67	15000.0	9.000	L1	ON	9.8
0.269400	43.64	---	61.14	17.49	15000.0	9.000	L1	ON	9.8
0.392531	38.95	---	58.01	19.06	15000.0	9.000	N	ON	9.7
0.392531	---	21.72	48.01	26.29	15000.0	9.000	N	ON	9.7
0.571631	43.48	---	56.00	12.52	15000.0	9.000	N	ON	9.8
0.571631	---	33.13	46.00	12.87	15000.0	9.000	N	ON	9.8
2.284275	32.79	---	56.00	23.21	15000.0	9.000	L1	ON	10.3
2.284275	---	17.10	46.00	28.90	15000.0	9.000	L1	ON	10.3
19.630856	---	33.18	50.00	16.82	15000.0	9.000	N	ON	10.4
19.630856	40.63	---	60.00	19.37	15000.0	9.000	N	ON	10.4
21.944231	40.53	---	60.00	19.47	15000.0	9.000	L1	ON	11.0
21.944231	---	31.29	50.00	18.71	15000.0	9.000	L1	ON	11.0

Third Supplier
CA01

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Average Limit (dBμV)	Conclusion
0.15 to 0.5	70 to 56	56 to 46	P
0.5 to 5	56	46	
5 to 30	60	50	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

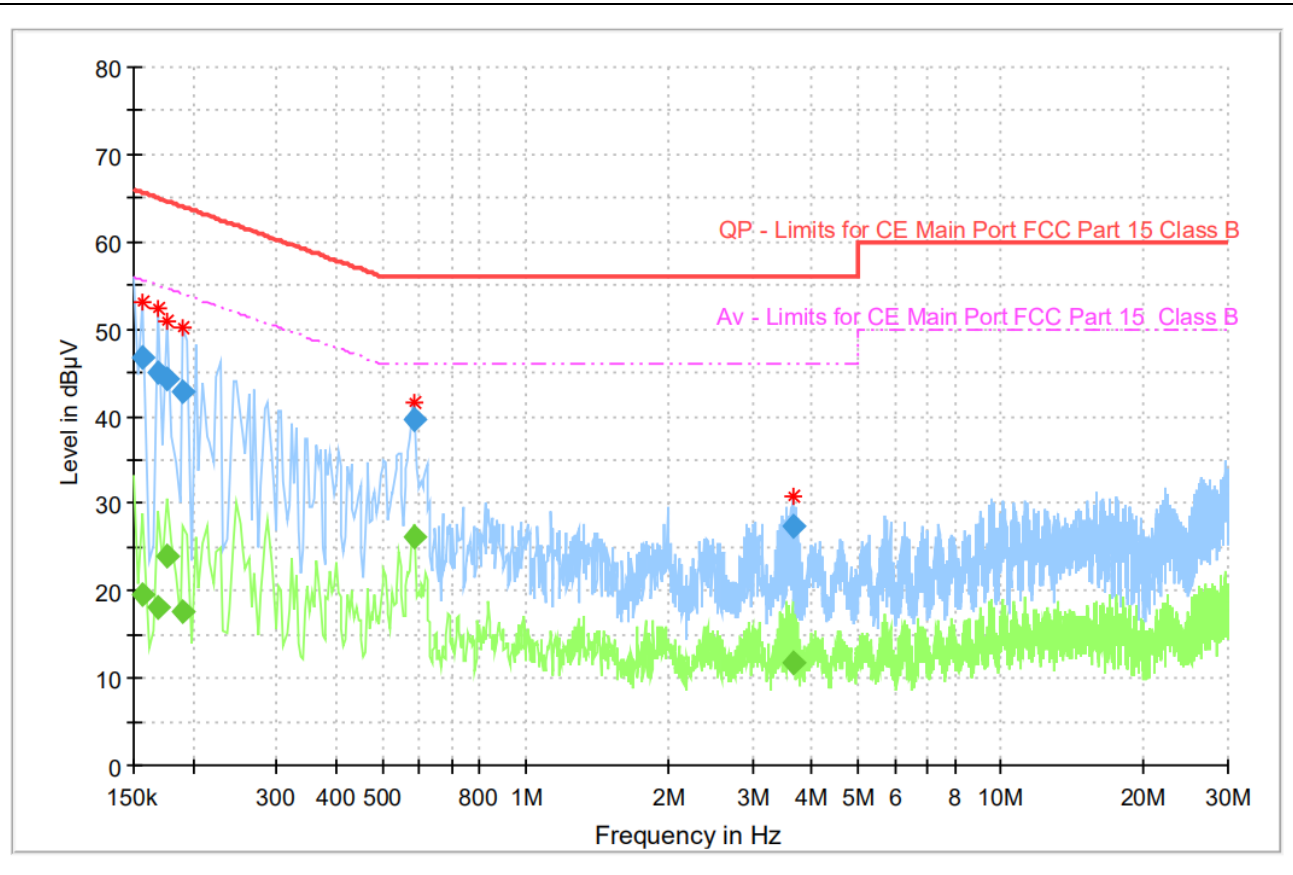


Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.157463	---	19.52	55.60	36.08	15000.0	9.000	L1	ON	9.7
0.157463	46.76	---	65.60	18.83	15000.0	9.000	L1	ON	9.7
0.168656	---	18.12	55.03	36.90	15000.0	9.000	L1	ON	9.7
0.168656	44.95	---	65.03	20.07	15000.0	9.000	L1	ON	9.7
0.176119	---	23.95	54.67	30.72	15000.0	9.000	L1	ON	9.7
0.176119	44.25	---	64.67	20.42	15000.0	9.000	L1	ON	9.7

0.191044	---	17.58	53.99	36.41	15000.0	9.000	L1	ON	9.7
0.191044	42.83	---	63.99	21.16	15000.0	9.000	L1	ON	9.7
0.582825	39.73	---	56.00	16.27	15000.0	9.000	N	ON	9.8
0.582825	---	26.11	46.00	19.89	15000.0	9.000	N	ON	9.8
3.638719	27.42	---	56.00	28.58	15000.0	9.000	L1	ON	10.5
3.638719	---	11.86	46.00	34.14	15000.0	9.000	L1	ON	10.5

CB02

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Average Limit (dB μ V)	Conclusion
0.15 to 0.5	71 to 56	56 to 46	P
0.5 to 5	56	46	
5 to 30	60	50	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

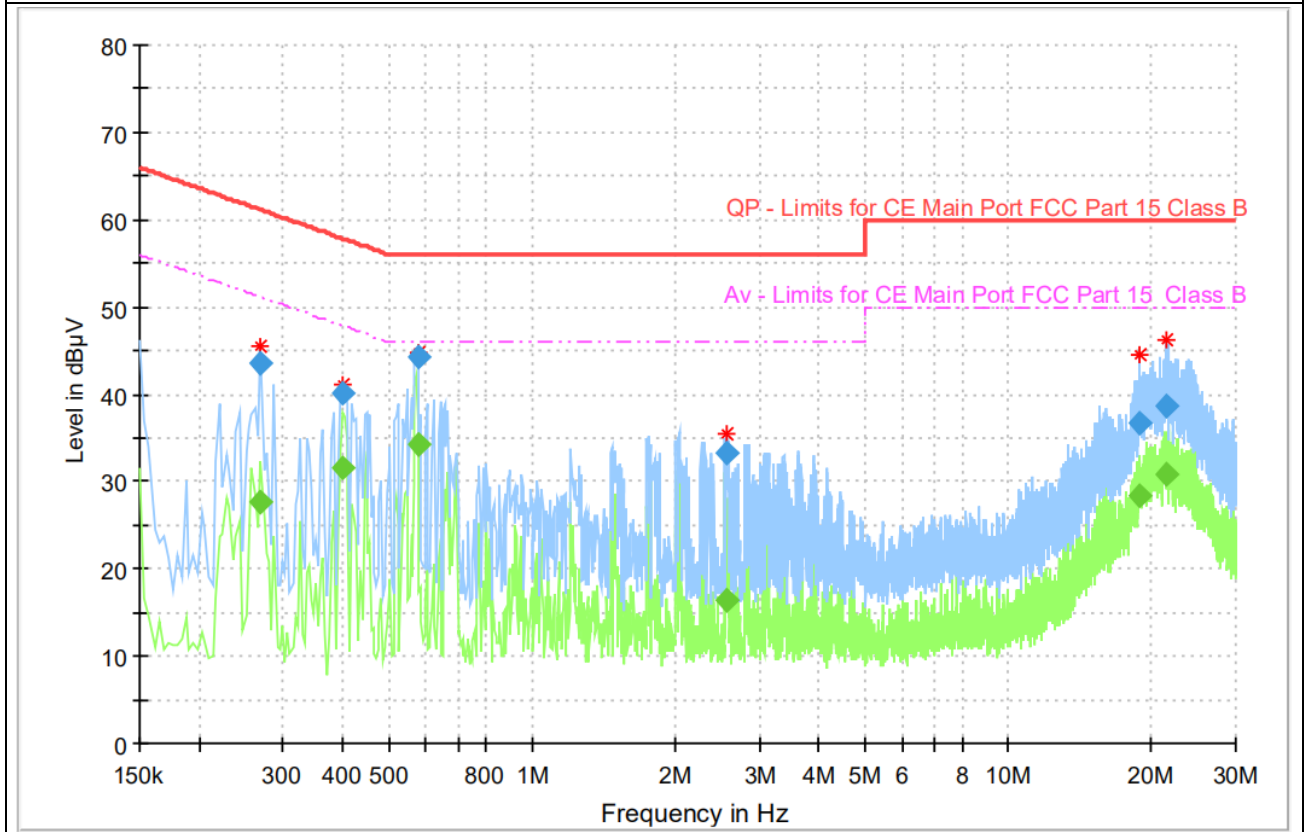

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.269400	---	27.56	51.14	23.57	15000.0	9.000	L1	ON	9.8
0.269400	43.50	---	61.14	17.64	15000.0	9.000	L1	ON	9.8
0.399994	---	31.48	47.85	16.37	15000.0	9.000	N	ON	9.7
0.399994	40.02	---	57.85	17.83	15000.0	9.000	N	ON	9.7
0.575363	44.28	---	56.00	11.72	15000.0	9.000	N	ON	9.8
0.575363	---	34.31	46.00	11.69	15000.0	9.000	N	ON	9.8
2.552925	33.23	---	56.00	22.77	15000.0	9.000	L1	ON	10.4
2.552925	---	16.50	46.00	29.50	15000.0	9.000	L1	ON	10.4
18.884606	---	28.30	50.00	21.70	15000.0	9.000	L1	ON	11.1
18.884606	36.67	---	60.00	23.33	15000.0	9.000	L1	ON	11.1
21.440513	---	30.75	50.00	19.25	15000.0	9.000	L1	ON	11.1
21.440513	38.69	---	60.00	21.31	15000.0	9.000	L1	ON	11.1

7. Test Equipment List

7.1. Conducted Test System

Item	Equipment Name	Type	Serial Number	Manufacturer	Cal. Date	Cal. interval
1	Vector Signal Analyzer	FSQ26	101091	R&S	2021-05-10	1 year
2	DC Power Supply	ZUP60-14	LOC-220Z006-0007	TDL-Lambda	2021-05-10	1 year
3	Eagle Test Software	Eagle V3.1 FCC BT/WIFI	N/A	ECIT	N/A	N/A

7.2. Radiated Emission Test System

Item	Equipment Name	Type	Serial Number	Manufacturer	Cal. Date	Cal. interval
1	Universal Radio Communication Tester	CMU200	123123	R&S	2021-05-10	1 year
2	EMI Test Receiver	ESU40	100307	R&S	2021-03-03	1 year
3	TRILOG Broadband Antenna	VULB9163	VULB9163-515	Schwarzbeck	2021-02-03	2 years
4	Double- ridged Waveguide Antenna	ETS-3117	00135890	ETS	2020-02-28	3 years
5	Universal Radio Communication Tester	CMW500	104178	R&S	2021-05-10	1 year
6	EMI Test Software	EMC32 V 9.15.00	N/A	R&S	N/A	N/A

Anechoic chamber

Fully anechoic chamber by ETS.

Annex A: Measurement Uncertainty

Measurement uncertainty for all the testing in this report are within the limit specified in 3IN documents . The detailed measurement uncertainty is defined in 3IN documents.

Measurement Items	Range	Confidence Level	Calculated Uncertainty
Peak Output Power-Conducted	2412MHz-2462MHz	95%	0.544dB
Peak Power Spectral Density	2412MHz-2462MHz	95%	0.502dB
Occupied 6dB Bandwidth	2412MHz-2462MHz	95%	69.26kHz
Band Edges-Conducted	2412MHz-2462MHz	95%	0.544dB
Conducted Emission	30MHz-2GHz	95%	0.90dB
Conducted Emission	2GHz-3.6GHz	95%	0.88dB
Conducted Emission	3.6GHz-8GHz	95%	0.96dB
Conducted Emission	8GHz-20GHz	95%	0.94dB
Conducted Emission	20GHz-22GHz	95%	0.88dB
Conducted Emission	22GHz-26GHz	95%	0.86dB
Transmitter Spurious Emission-Radiated	9KHz-30MHz	95%	5.66dB
Transmitter Spurious Emission-Radiated	30MHz-1000MHz	95%	4.98dB
Transmitter Spurious Emission-Radiated	1000MHz -18000MHz	95%	5.06dB
Transmitter Spurious Emission-Radiated	18000MHz -40000MHz	95%	5.20dB
AC Power line Conducted Emission	0.15MHz-30MHz	95%	3.66 dB

Annex B: Accreditation Certificate



Accredited Laboratory

A2LA has accredited

INDUSTRIAL INTERNET INNOVATION CENTER (SHANGHAI) CO., LTD.

Shanghai, People's Republic of China

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 12th day of April 2021.



Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 3682.01
Valid to February 28, 2023

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

*****END OF REPORT*****