

## FCC TEST REPORT

For

Chasing-Innovation Technology Co.,Ltd.

Gladius submersible drone

Test Model: GLADIUS ADVANCED

List Model No.: GLADIUS ADVANCED PRO,

GLADIUS STANDARD, GLADIUS STANDARD PRO

|                                |   |                                                                                                                   |
|--------------------------------|---|-------------------------------------------------------------------------------------------------------------------|
| Prepared for                   | : | Chasing-Innovation Technology Co.,Ltd.                                                                            |
| Address                        | : | ROOM 506 XITA BUILDING,DIGITAL CULTURE INDUSTRY<br>BASE,SHENLAN AVENUE 10128,NANSHAN DISTRICT, Shenzhen,<br>China |
| Prepared by                    | : | Shenzhen LCS Compliance Testing Laboratory Ltd.                                                                   |
| Address                        | : | 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an<br>District, Shenzhen, Guangdong, China        |
| Tel                            | : | (+86)755-82591330                                                                                                 |
| Fax                            | : | (+86)755-82591332                                                                                                 |
| Web                            | : | www.LCS-cert.com                                                                                                  |
| Mail                           | : | webmaster@LCS-cert.com                                                                                            |
| Date of receipt of test sample | : | September 12, 2017                                                                                                |
| Number of tested samples       | : | 1                                                                                                                 |
| Serial number                  | : | Prototype                                                                                                         |
| Date of Test                   | : | September 12, 2017~September 15, 2017                                                                             |
| Date of Report                 | : | April 09, 2018                                                                                                    |

## FCC TEST REPORT

### FCC CFR 47 PART 15 C(15.247): 2016

Report Reference No. .... : LCS180326063AE

Date of Issue ..... : April 09, 2018

Testing Laboratory Name..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address ..... : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,  
Bao'an District, Shenzhen, Guangdong, ChinaTesting Location/ Procedure ..... : Full application of Harmonised standards ■  
Partial application of Harmonised standards □  
Other standard testing method □

Applicant's Name ..... : Chasing-Innovation Technology Co.,Ltd.

Address ..... : ROOM 506 XITA BUILDING,DIGITAL CULTURE INDUSTRY  
BASE,SHENLAN AVENUE 10128,NANSHAN DISTRICT,  
Shenzhen, China**Test Specification**

Standard ..... : FCC CFR 47 PART 15 C(15.247): 2016

Test Report Form No. .... : LCSEMC-1.0

TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF ..... : Dated 2011-03

**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**EUT Description. .... : Gladius submersible drone**

Trade Mark ..... : N/A

Test Model..... : GLADIUS ADVANCED

Ratings ..... : For Buoy: DC 11.1V by battery  
Recharged by DC 12.6V/3.0A AC/DC Charger  
For Submersible Drone: DC 11.1V by battery  
Recharged by DC 12.6V/6.0A AC/DC ChargerResult ..... : **Positive****Compiled by:**

Leo Lee/ File administrators

**Supervised by:**

Dick Su/ Technique principal

**Approved by:**

Gavin Liang/ Manager

## FCC -- TEST REPORT

|                                  |                                 |
|----------------------------------|---------------------------------|
| Test Report No. : LCS180326063AE | April 09, 2018<br>Date of issue |
|----------------------------------|---------------------------------|

|                          |                                                                                                                     |
|--------------------------|---------------------------------------------------------------------------------------------------------------------|
| EUT.....                 | : Gladius submersible drone                                                                                         |
| Test Model.....          | : GLADIUS ADVANCED                                                                                                  |
| <b>Applicant.....</b>    | <b>: Chasing-Innovation Technology Co.,Ltd.</b>                                                                     |
| Address.....             | : ROOM 506 XITA BUILDING,DIGITAL CULTURE INDUSTRY<br>BASE,SHENLAN AVENUE 10128,NANSHAN DISTRICT,<br>Shenzhen, China |
| Telephone.....           | : /                                                                                                                 |
| Fax.....                 | : /                                                                                                                 |
| <b>Manufacturer.....</b> | <b>: Chasing-Innovation Technology Co.,Ltd.</b>                                                                     |
| Address.....             | : ROOM 506 XITA BUILDING,DIGITAL CULTURE INDUSTRY<br>BASE,SHENLAN AVENUE 10128,NANSHAN DISTRICT,<br>Shenzhen, China |
| Telephone.....           | : /                                                                                                                 |
| Fax.....                 | : /                                                                                                                 |
| <b>Factory.....</b>      | <b>: Chasing-Innovation Technology Co.,Ltd.</b>                                                                     |
| Address.....             | : ROOM 506 XITA BUILDING,DIGITAL CULTURE INDUSTRY<br>BASE,SHENLAN AVENUE 10128,NANSHAN DISTRICT,<br>Shenzhen, China |
| Telephone.....           | : /                                                                                                                 |
| Fax.....                 | : /                                                                                                                 |

|                    |                 |
|--------------------|-----------------|
| <b>Test Result</b> | <b>Positive</b> |
|--------------------|-----------------|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

**Revision History**

| Revision | Issue Date     | Revisions     | Revised By  |
|----------|----------------|---------------|-------------|
| 000      | April 09, 2018 | Initial Issue | Gavin Liang |
|          |                |               |             |
|          |                |               |             |

## TABLE OF CONTENTS

|                                                             |           |
|-------------------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION .....</b>                         | <b>6</b>  |
| 1.1. DESCRIPTION OF DEVICE (EUT) .....                      | 6         |
| 1.2. HOST SYSTEM CONFIGURATION LIST AND DETAILS .....       | 6         |
| 1.3. EXTERNAL I/O CABLE .....                               | 6         |
| 1.4. DESCRIPTION OF TEST FACILITY .....                     | 7         |
| 1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY .....         | 7         |
| 1.6. MEASUREMENT UNCERTAINTY .....                          | 7         |
| 1.7. DESCRIPTION OF TEST MODES .....                        | 8         |
| <b>2. TEST METHODOLOGY .....</b>                            | <b>9</b>  |
| 2.1. EUT CONFIGURATION .....                                | 9         |
| 2.2. EUT EXERCISE .....                                     | 9         |
| 2.3. GENERAL TEST PROCEDURES .....                          | 9         |
| <b>3. SYSTEM TEST CONFIGURATION .....</b>                   | <b>10</b> |
| 3.1. JUSTIFICATION .....                                    | 10        |
| 3.2. EUT EXERCISE SOFTWARE .....                            | 10        |
| 3.3. SPECIAL ACCESSORIES .....                              | 10        |
| 3.4. BLOCK DIAGRAM/SCHEMATICS .....                         | 10        |
| 3.5. EQUIPMENT MODIFICATIONS .....                          | 10        |
| 3.6. TEST SETUP .....                                       | 10        |
| <b>4. SUMMARY OF TEST RESULTS .....</b>                     | <b>11</b> |
| <b>5. TEST RESULT .....</b>                                 | <b>12</b> |
| 5.1. ON TIME AND DUTY CYCLE .....                           | 12        |
| 5.2. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT .....       | 14        |
| 5.3. POWER SPECTRAL DENSITY MEASUREMENT .....               | 16        |
| 5.4. 6 dB SPECTRUM BANDWIDTH MEASUREMENT .....              | 22        |
| 5.5. RADIATED EMISSIONS MEASUREMENT .....                   | 28        |
| 5.6. CONDUCTED SPURIOUS EMISSIONS AND BAND EDGES TEST ..... | 39        |
| 5.7. POWER LINE CONDUCTED EMISSIONS .....                   | 56        |
| 5.8. BAND-EDGE MEASUREMENTS FOR RADIATED EMISSIONS .....    | 61        |
| 5.9. ANTENNA REQUIREMENTS .....                             | 74        |
| <b>6. LIST OF MEASURING EQUIPMENTS .....</b>                | <b>76</b> |
| <b>7. TEST SETUP PHOTOGRAPHS OF EUT .....</b>               | <b>77</b> |
| <b>8. EXTERIOR PHOTOGRAPHS OF THE EUT .....</b>             | <b>77</b> |
| <b>9. INTERIOR PHOTOGRAPHS OF THE EUT .....</b>             | <b>77</b> |

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

|                              |                                                                                                                                                                       |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EUT                          | : Gladius submersible drone                                                                                                                                           |
| Model Number                 | : GLADIUS ADVANCED, GLADIUS ADVANCED PRO, GLADIUS STANDARD, GLADIUS STANDARD PRO                                                                                      |
| Model Declaration            | : PCB board, structure and internal of these model(s) are the same, Only models name is different for these models.                                                   |
| Test Model                   | : GLADIUS ADVANCED                                                                                                                                                    |
| Power Supply                 | : For Buoy: DC 11.1V by battery<br>Recharged by DC 12.6V/3.0A AC/DC Charger<br>For Submersible Drone: DC 11.1V by battery<br>Recharged by DC 12.6V/6.0A AC/DC Charger |
| Hardware version             | : V1.0                                                                                                                                                                |
| Software version             | : V1.0                                                                                                                                                                |
| WLAN                         | : Supported 802.11b/802.11g/802.11n                                                                                                                                   |
| WLAN FCC Operation Frequency | : IEEE 802.11b:2412-2462MHz<br>IEEE 802.11g:2412-2462MHz<br>IEEE 802.11n HT20:2412-2462MHz<br>IEEE 802.11n HT40:2422-2452MHz                                          |
| WLAN Channel Number          | : 11 Channels for WIFI 20MHz Bandwidth(802.11b/g/n-HT20)<br>7 Channels for WIFI 40MHz Bandwidth(802.11n-HT40)                                                         |
| WLAN Modulation Technology   | : IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK)<br>IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK)<br>IEEE 802.11n: OFDM (64QAM, 16QAM,QPSK,BPSK)                                  |
| Antenna Type And Gain        | : Integral Antenna 1, 3.0dBi(Max.)<br>Integral Antenna 2, 3.0dBi(Max.)<br>The Directional Gain is $3.0+10*\log(2) = 6.01\text{dBi}$                                   |

### 1.2. Host System Configuration List and Details

| Manufacturer                               | Description                           | Model      | Serial Number | Certificate |
|--------------------------------------------|---------------------------------------|------------|---------------|-------------|
| JIN XIN YU POWER (SHENZHEN) SUPPLY CO.,LTD | AC/DC Charger (For Buoy)              | XVE1260300 | ---           | FCC         |
| JIN XIN YU POWER (SHENZHEN) SUPPLY CO.,LTD | AC/DC Charger (For Submersible Drone) | XVE1260600 | ---           | FCC         |

### 1.3. External I/O Cable

| I/O Port Description                  | Quantity | Cable |
|---------------------------------------|----------|-------|
| Charging Port (For Buoy)              | 1        | N/A   |
| Charging Port (For Submersible Drone) | 1        | N/A   |

#### 1.4. Description of Test Facility

FCC Registration Number. is 254912.  
 Industry Canada Registration Number. is 9642A-1.  
 ESMD Registration Number. is ARCB0108.  
 UL Registration Number. is 100571-492.  
 TUV SUD Registration Number. is SCN1081.  
 TUV RH Registration Number. is UA 50296516-001  
 NVLAP Registration Code is 600167-0

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

#### 1.5. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

#### 1.6. Measurement Uncertainty

| Test Item              |   | Frequency Range | Uncertainty | Note |
|------------------------|---|-----------------|-------------|------|
| Radiation Uncertainty  | : | 9KHz~30MHz      | ±3.10dB     | (1)  |
|                        |   | 30MHz~200MHz    | ±2.96dB     | (1)  |
|                        |   | 200MHz~1000MHz  | ±3.10dB     | (1)  |
|                        |   | 1GHz~26.5GHz    | ±3.80dB     | (1)  |
|                        |   | 26.5GHz~40GHz   | ±3.90dB     | (1)  |
| Conduction Uncertainty | : | 150kHz~30MHz    | ±1.63dB     | (1)  |
| Power disturbance      | : | 30MHz~300MHz    | ±1.60dB     | (1)  |

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.7. Description of Test Modes

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.

AC power line conducted emission pre-test at both at AC 120V/60Hz and AC 240V/60Hz modes, recorded worst case.

Worst-case mode and channel used for 150kHz-30 MHz power line conducted emissions was determined to be 802.11b mode(High Channel).

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was determined to be 802.11b mode(High Channel).

Worst-Case data rates were utilized from preliminary testing of the Chipset, worst-case data rates used during the testing are as follows:

802.11b Mode: 1 Mbps, DSSS.

802.11g Mode: 6 Mbps, OFDM.

802.11n Mode HT20: MCS0, OFDM.

802.11n Mode HT40: MCS0, OFDM.

### Antenna & Bandwidth

| Antenna        | Chain 0 (Antenna 1)                 |                                     | Chain 1 (Antenna 2)                 |                                     | Simultaneously                      |
|----------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| Bandwidth Mode | 20MHz                               | 40MHz                               | 20MHz                               | 40MHz                               | /                                   |
| IEEE 802.11b   | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            |
| IEEE 802.11g   | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input checked="" type="checkbox"/> | <input type="checkbox"/>            | <input type="checkbox"/>            |
| IEEE 802.11n   | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |

### Channel List & Frequency

802.11b/g/n(HT20)

| Frequency Band | Channel No. | Frequency(MHz) | Channel No. | Frequency(MHz) |
|----------------|-------------|----------------|-------------|----------------|
| 2412~2462MHz   | 1           | 2412           | 7           | 2442           |
|                | 2           | 2417           | 8           | 2447           |
|                | 3           | 2422           | 9           | 2452           |
|                | 4           | 2427           | 10          | 2457           |
|                | 5           | 2432           | 11          | 2462           |
|                | 6           | 2437           | --          | --             |

IEEE 802.11n HT40

| Frequency Band | Channel No. | Frequency(MHz) | Channel No. | Frequency(MHz) |
|----------------|-------------|----------------|-------------|----------------|
| 2422~2452MHz   | 1           | --             | 7           | 2442           |
|                | 2           | --             | 8           | 2447           |
|                | 3           | 2422           | 9           | 2452           |
|                | 4           | 2427           | 10          | --             |
|                | 5           | 2432           | 11          | --             |
|                | 6           | 2437           | --          | --             |



## **2. TEST METHODOLOGY**

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd..

### **2.1. EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### **2.2. EUT Exercise**

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to FCC's request, Test Procedure KDB 558074 D01 DTS Meas Guidance v04 and KDB 662911 D01 Multiple Transmitter Output v02r01 are required to be used for this kind of FCC 15.247 digital modulation device.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

### **2.3. General Test Procedures**

#### **2.3.1 Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

#### **2.3.2 Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013

### 3. SYSTEM TEST CONFIGURATION

#### 3.1. Justification

The system was configured for testing in a continuous transmits condition.

#### 3.2. EUT Exercise Software

The system was configured for testing in a continuous transmits condition and change test channels by software (MT7620 QA V1.0.6.0) provided by application.

#### 3.3. Special Accessories

| No. | Equipment        | Manufacturer | Model No. | Serial No. | Length | shielded/<br>unshielded | Notes |
|-----|------------------|--------------|-----------|------------|--------|-------------------------|-------|
| 1   | PC               | Lenovo       | Ideapad   | A131101550 | /      | /                       | DOC   |
| 2   | Power<br>adapter | Lenovo       | CPA-A090  | 36200414   | 1.00m  | unshielded              | DOC   |

#### 3.4. Block Diagram/Schematics

Please refer to the related document

#### 3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

#### 3.6. Test Setup

Please refer to the test setup photo.

#### 4. SUMMARY OF TEST RESULTS

| Applied Standard: FCC Part 15 Subpart C |                                           |           |
|-----------------------------------------|-------------------------------------------|-----------|
| FCC Rules                               | Description of Test                       | Result    |
| §15.247(b)                              | Maximum Conducted Output Power            | Compliant |
| §15.247(e)                              | Power Spectral Density                    | Compliant |
| §15.247(a)(2)                           | 6dB Bandwidth                             | Compliant |
| §15.247(a)                              | Occupied Bandwidth                        | Compliant |
| §15.209, §15.247(d)                     | Radiated and Conducted Spurious Emissions | Compliant |
| §15.205                                 | Emissions at Restricted Band              | Compliant |
| §15.207(a)                              | Conducted Emissions                       | Compliant |
| §15.203                                 | Antenna Requirements                      | Compliant |
| §15.247(i)§2.1093                       | RF Exposure                               | Compliant |

## 5. TEST RESULT

### 5.1. On Time and Duty Cycle

#### 5.1.1. Standard Applicable

None; for reporting purpose only.


#### 5.1.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of the spectrum analyser.

#### 5.1.3. Test Procedures

1. Set the centre frequency of the spectrum analyser to the transmitting frequency;
2. Set the span=0MHz, RBW=8MHz, VBW=50MHz, Sweep time=5ms;
3. Detector = peak;
4. Trace mode = Single hold.

#### 5.1.4. Test Setup Layout

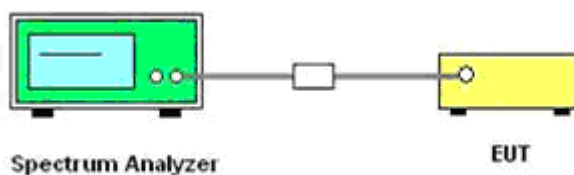


#### 5.1.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


#### 5.1.6. Test result

| Mode             | On Time<br>B<br>(ms) | Period<br>(ms) | Duty Cycle<br>x<br>(Linear) | Duty<br>Cycle<br>(%) | Duty Cycle<br>Correction<br>Factor (dB) | 1/B<br>Minimum<br>VBW(KHz) |
|------------------|----------------------|----------------|-----------------------------|----------------------|-----------------------------------------|----------------------------|
| 802.11b          | 5                    | 5              | 1                           | 100                  | 0                                       | 0.010                      |
| 802.11g          | 5                    | 5              | 1                           | 100                  | 0                                       | 0.010                      |
| 802.11n<br>-HT20 | 5                    | 5              | 1                           | 100                  | 0                                       | 0.010                      |
| 802.11n<br>-HT40 | 5                    | 5              | 1                           | 100                  | 0                                       | 0.010                      |


# Test plot of On Time and Duty Cycle

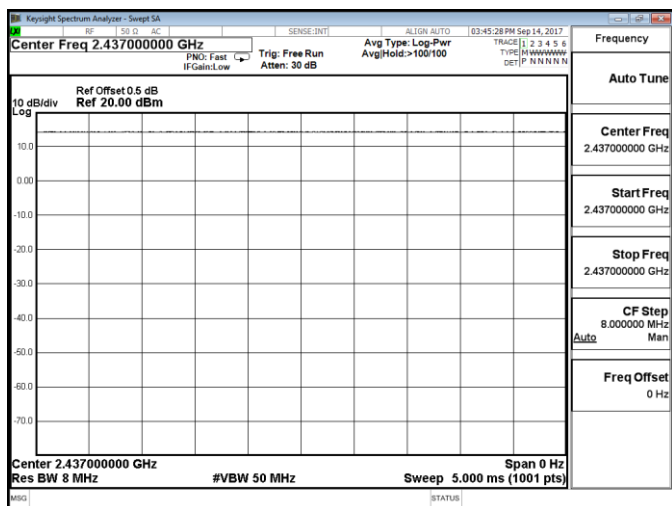


802.11b

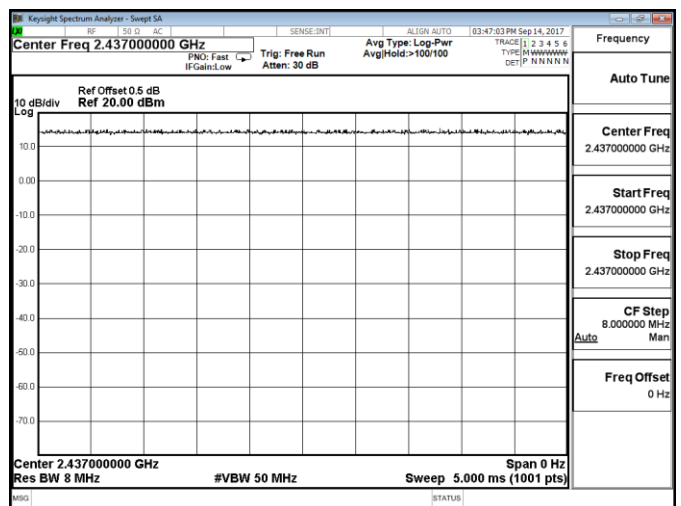

802.11g

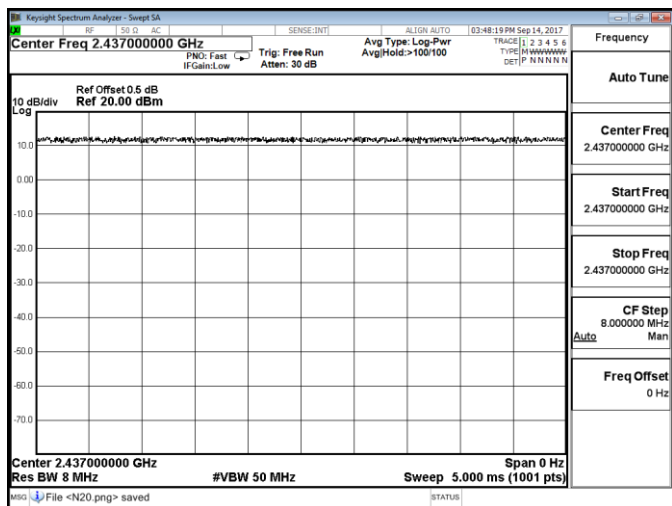

802.11n-HT20

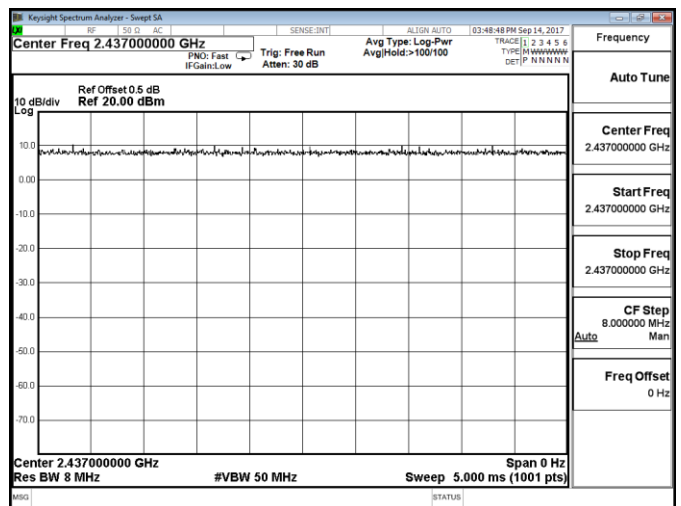

802.11n-HT40

## 5.2. Maximum Conducted Output Power Measurement

### 5.2.1. Standard Applicable

According to §15.247(b): For systems using digital modulation in the 2400-2483.5 MHz and 5725-5850 MHz band, the limit for maximum peak conducted output power is 30dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceeds 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter peak output power.


### 5.2.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of the power meter.

### 5.2.3. Test Procedures

The transmitter output (antenna port) was connected to the power meter.

### 5.2.4. Test Setup Layout

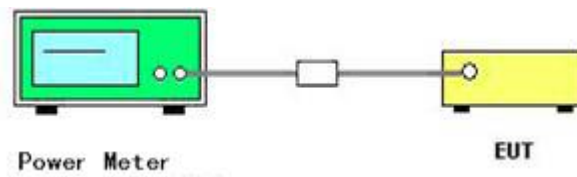

### 5.2.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 5.2.6. Test Result of Maximum Conducted Output Power

|               |             |                |             |
|---------------|-------------|----------------|-------------|
| Temperature   | 25.1℃       | Humidity       | 52.4%       |
| Test Engineer | Jayden Zhuo | Configurations | 802.11b/g/n |

| Test Mode         | Channel | Frequency (MHz) | Measured Peak Output Power (dBm) |        |       | Limits (dBm) | Verdict |
|-------------------|---------|-----------------|----------------------------------|--------|-------|--------------|---------|
|                   |         |                 | Chain0                           | Chain1 | Sum   |              |         |
| IEEE 802.11b      | 1       | 2412            | 14.72                            | 14.07  | /     | 30           | PASS    |
|                   | 6       | 2437            | 11.82                            | 11.90  | /     |              |         |
|                   | 11      | 2462            | 11.69                            | 10.64  | /     |              |         |
| IEEE 802.11g      | 1       | 2412            | 16.85                            | 16.80  | /     | 30           | PASS    |
|                   | 6       | 2437            | 15.71                            | 15.72  | /     |              |         |
|                   | 11      | 2462            | 14.18                            | 14.34  | /     |              |         |
| IEEE 802.11n HT20 | 1       | 2412            | 17.40                            | 17.40  | 20.41 | 29.99        | PASS    |
|                   | 6       | 2437            | 15.85                            | 16.21  | 19.04 |              |         |
|                   | 11      | 2462            | 15.14                            | 14.97  | 18.07 |              |         |
| IEEE 802.11n HT40 | 3       | 2422            | 16.67                            | 16.67  | 19.68 | 29.99        | PASS    |
|                   | 6       | 2437            | 15.71                            | 15.69  | 18.71 |              |         |
|                   | 9       | 2452            | 14.91                            | 14.83  | 17.88 |              |         |

## Remark:

1. Measured output power at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;  
Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40;
3. The power limits of IEEE 802.11n HT20 and IEEE 802.11 n HT40 for MIMO with CDD technology should be reduce to  $30 - ((3.0 + 10 * \log(2)) - 6.0) = 29.99\text{dBm}$  according to KDB662911D01;

### 5.3. Power Spectral Density Measurement

#### 5.3.1. Standard Applicable

According to §15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


#### 5.3.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of Spectrum Analyzer.

#### 5.3.3. Test Procedures

1. The transmitter was connected directly to a Spectrum Analyzer through a directional couple.
2. The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
3. Set the RBW = 3 kHz~100 kHz.
4. Set the VBW  $\geq 3 \times$  RBW
5. Set the span to 1.5 times the DTS channel bandwidth.
6. Detector = peak.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum power level in any 3 kHz band segment within the fundamental EBW.

#### 5.3.4. Test Setup Layout

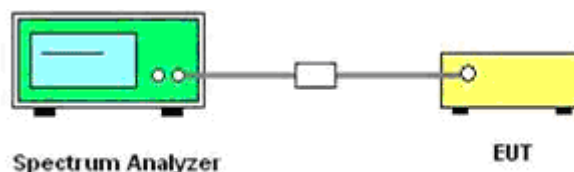

#### 5.3.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



## 5.3.6. Test Result of Power Spectral Density


|               |             |                |             |
|---------------|-------------|----------------|-------------|
| Temperature   | 25.1℃       | Humidity       | 52.4%       |
| Test Engineer | Jayden Zhuo | Configurations | 802.11b/g/n |

| Test Mode         | Channel | Frequency (MHz) | Measured Peak Power Spectrum Density (dBm/3KHz) |        |       | Limits (dBm/3KHz) | Verdict |
|-------------------|---------|-----------------|-------------------------------------------------|--------|-------|-------------------|---------|
|                   |         |                 | Chain0                                          | Chain1 | Sum   |                   |         |
| IEEE 802.11b      | 1       | 2412            | 0.103                                           | 0.892  | /     | 8                 | PASS    |
|                   | 6       | 2437            | -2.038                                          | -2.321 | /     |                   |         |
|                   | 11      | 2462            | -3.453                                          | -3.852 | /     |                   |         |
| IEEE 802.11g      | 1       | 2412            | -2.220                                          | -2.744 | /     | 8                 | PASS    |
|                   | 6       | 2437            | -3.366                                          | -3.719 | /     |                   |         |
|                   | 11      | 2462            | -4.919                                          | -5.029 | /     |                   |         |
| IEEE 802.11n HT20 | 1       | 2412            | -1.601                                          | -1.711 | 1.35  | 7.99              | PASS    |
|                   | 6       | 2437            | -3.155                                          | -3.893 | -0.50 |                   |         |
|                   | 11      | 2462            | -4.499                                          | -4.490 | -1.48 |                   |         |
| IEEE 802.11n HT40 | 3       | 2422            | -4.858                                          | -4.917 | -1.88 | 7.99              | PASS    |
|                   | 6       | 2437            | -5.193                                          | -5.851 | -2.50 |                   |         |
|                   | 9       | 2452            | -5.948                                          | -6.645 | -3.27 |                   |         |


## Remark:

1. Measured peak power spectrum density at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40;
4. Please refer to following plots;
5. The PSD limits of IEEE 802.11n HT20 and IEEE 802.11 n HT40 for MIMO with CDD technology should be reduce to  $8 - ((3.0 + 10 \cdot \log(2)) - 6.0) = 7.99\text{dBm}$  according to KDB662911D01;
6. For MIMO with CCD technology device, The Directional Gain= Gain of individual transmit antennas (dBi) + Array gain;  
 $\text{Array gain} = 10 \log(N_{\text{ant}})$ , where  $N_{\text{ant}}$  is the number of transmit antennas.


## Test plot of Power Spectral Density

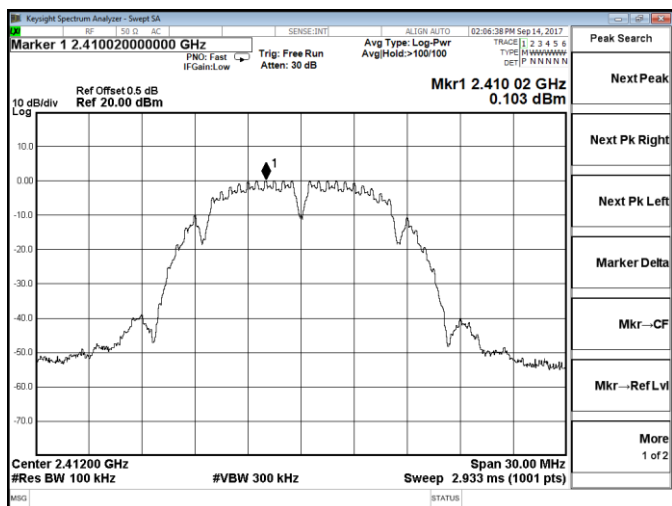


802.11b Chain 0-Low channel

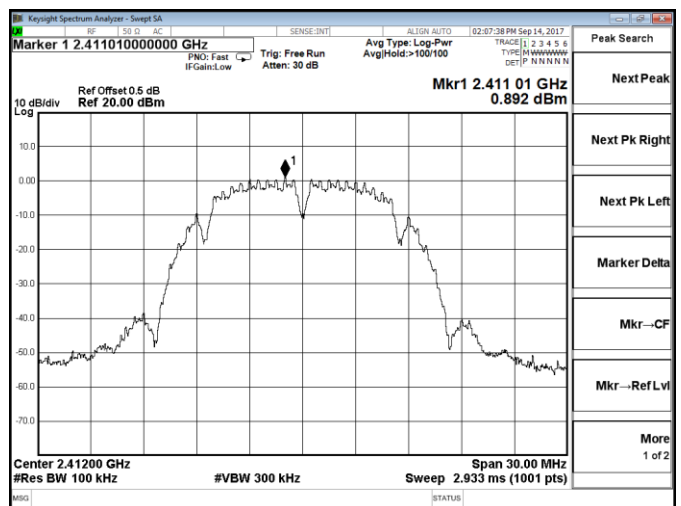


802.11b Chain 1-Low channel

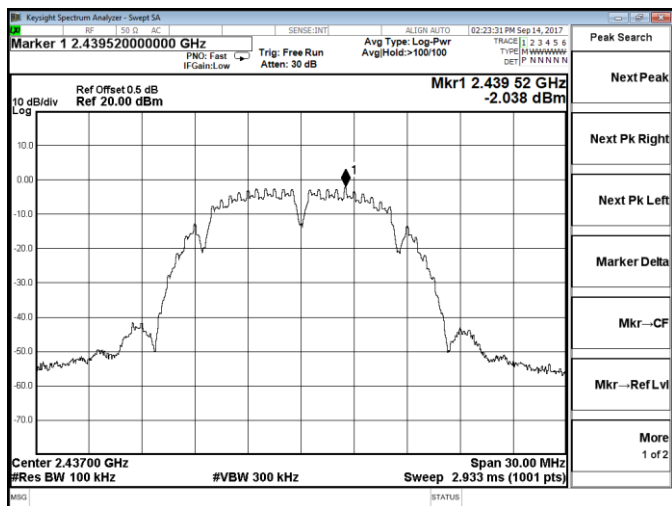


802.11b Chain 0-Middle channel

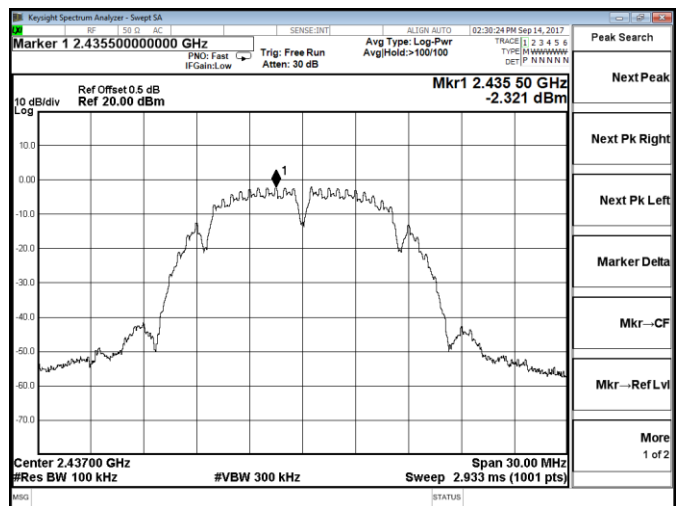

802.11b Chain 1-Middle channel

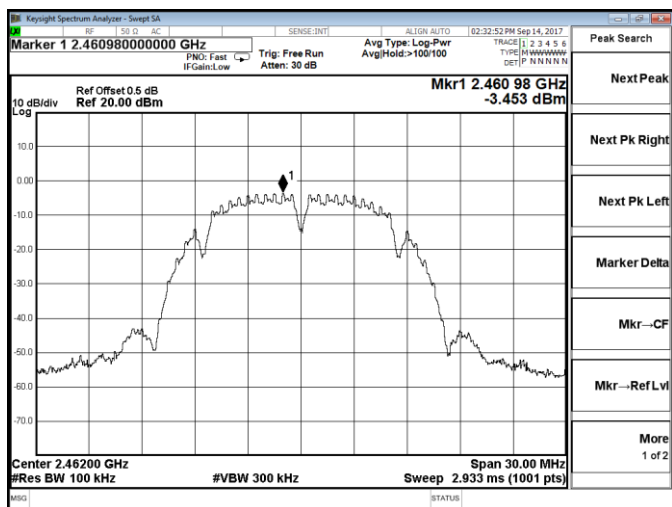


802.11b Chain 0-High channel

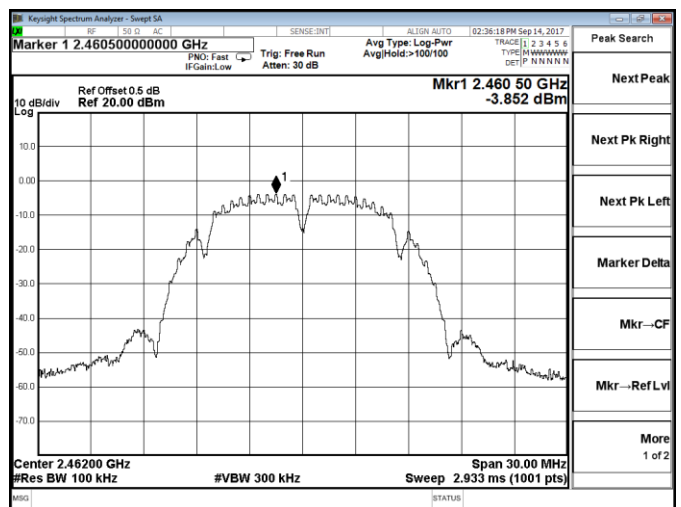


802.11b Chain 1-High channel


## Test plot of Power Spectral Density

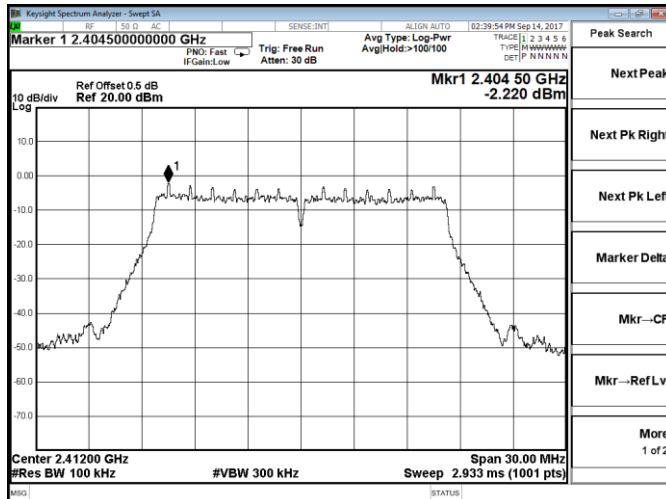


802.11g Chain 0-Low channel

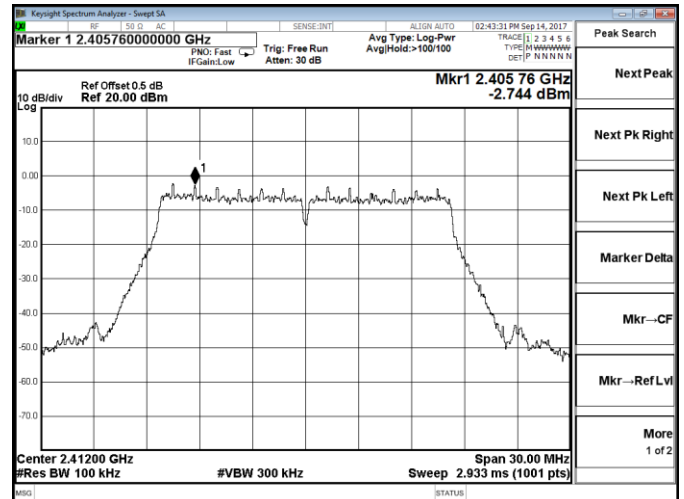


802.11g Chain 1-Low channel

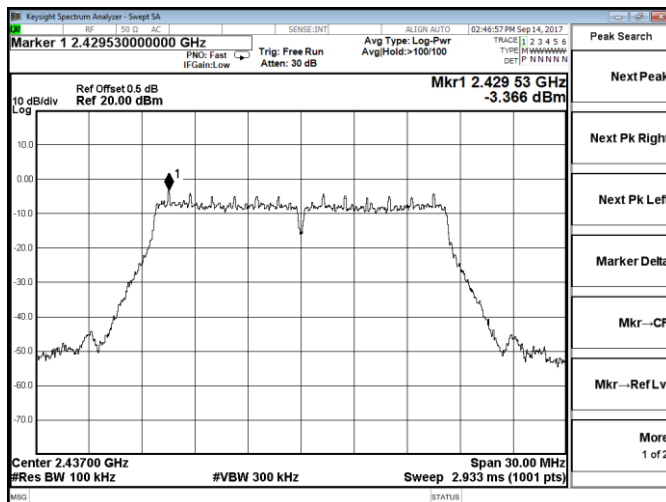


802.11g Chain 0-Middle channel

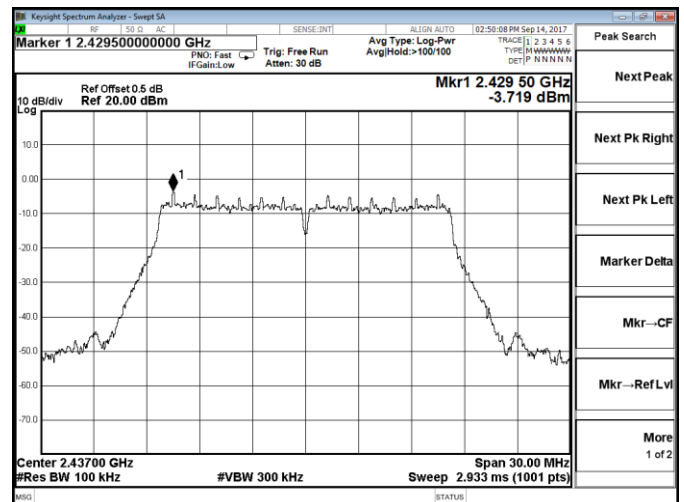

802.11g Chain 1-Middle channel


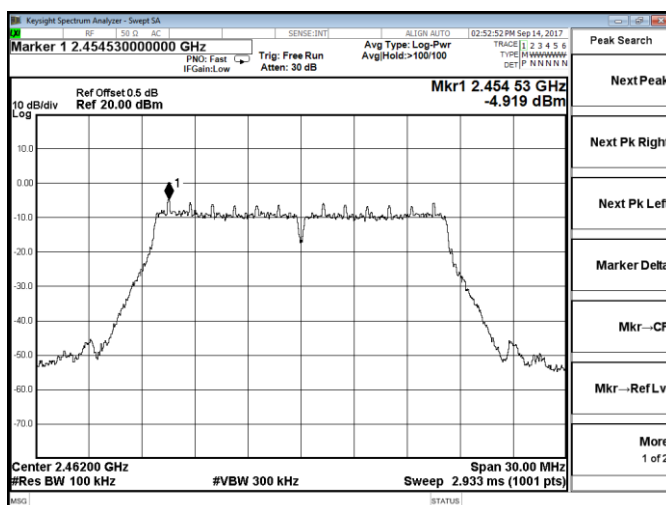


802.11g Chain 0-High channel

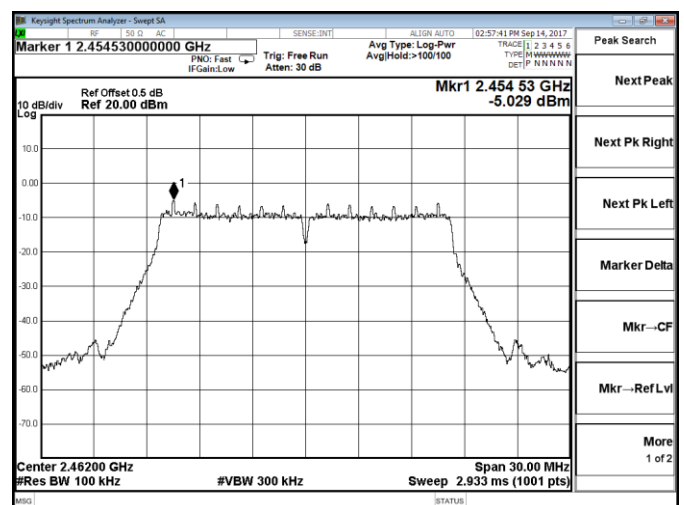



802.11g Chain 1-High channel

## Test plot of Power Spectral Density

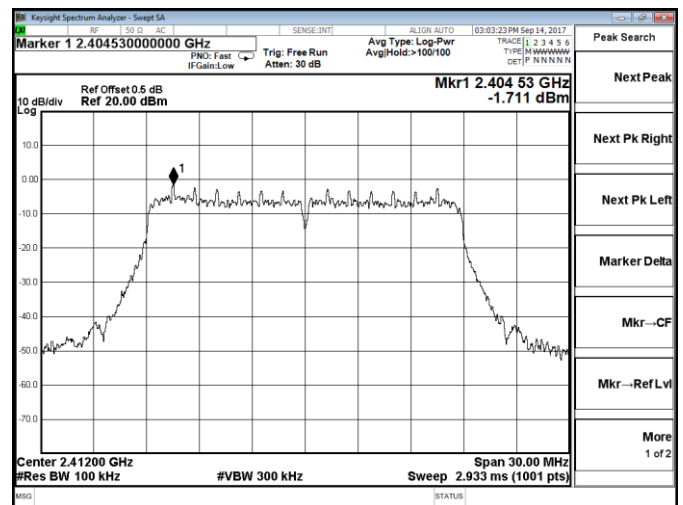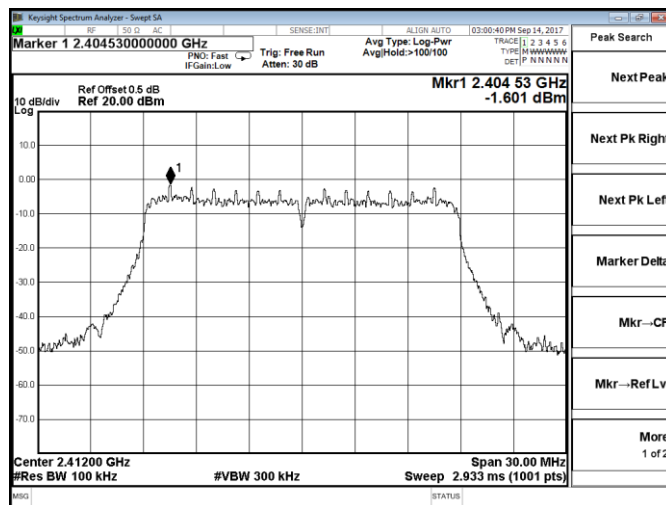



802.11n-HT20 Chain 0-Low channel

802.11n-HT20 Chain 1-Low channel

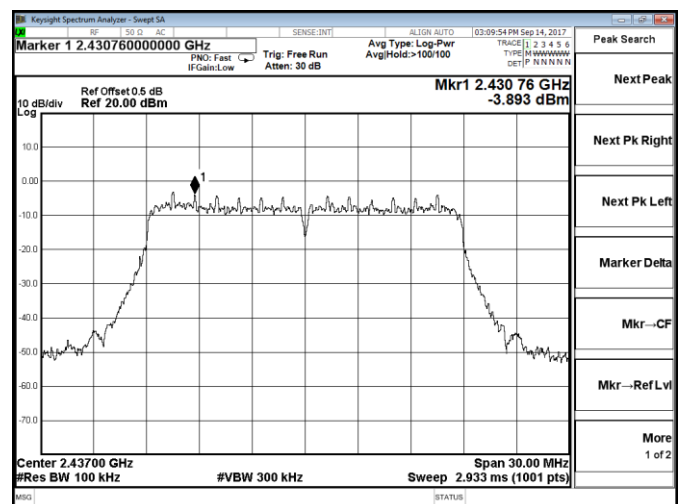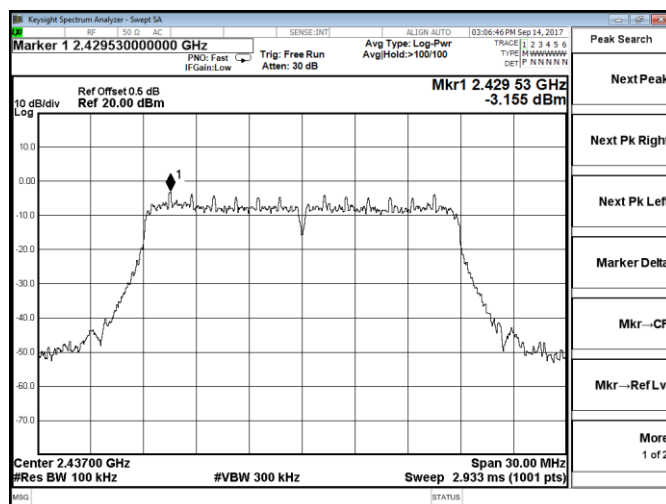

802.11n-HT20 Chain 0-Middle channel



802.11n-HT20 Chain 1-Middle channel

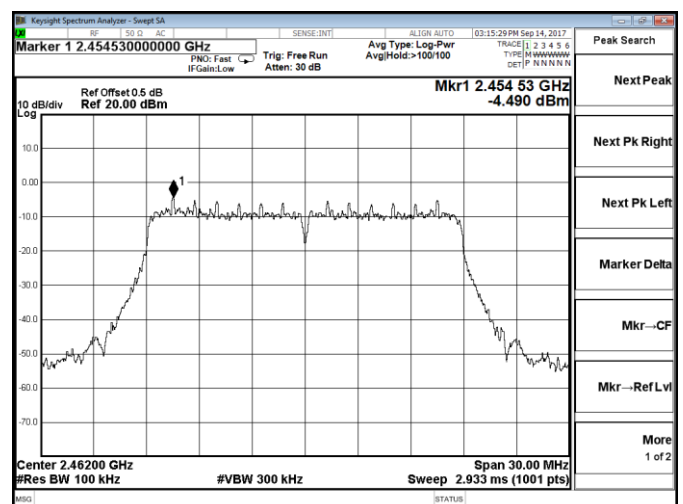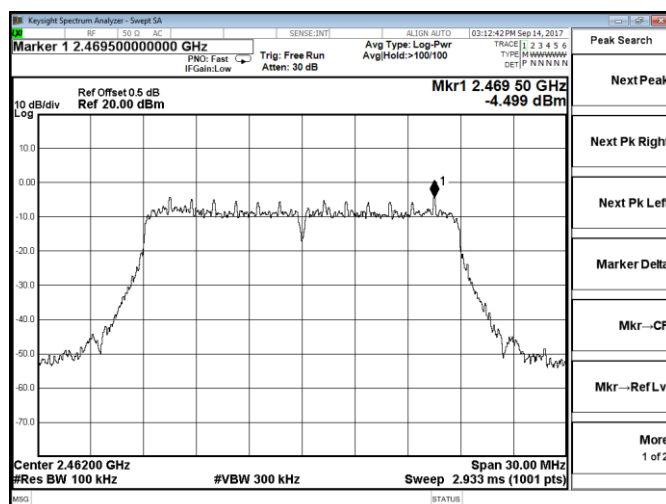

802.11n-HT20 Chain 0-High channel



802.11n-HT20 Chain 1-High channel

## Test plot of Power Spectral Density

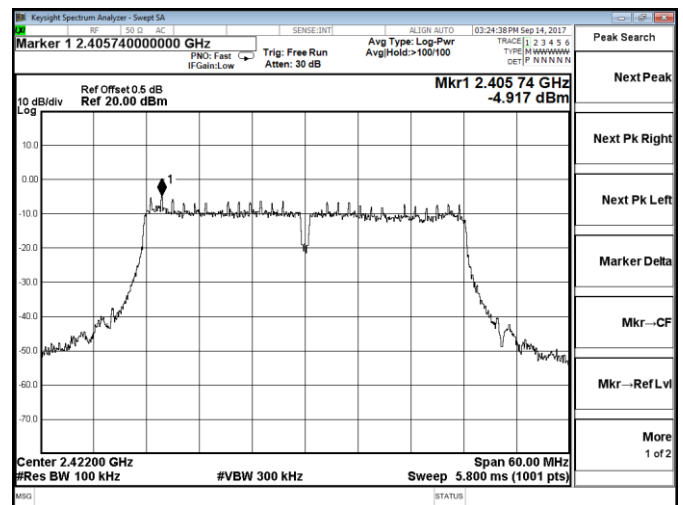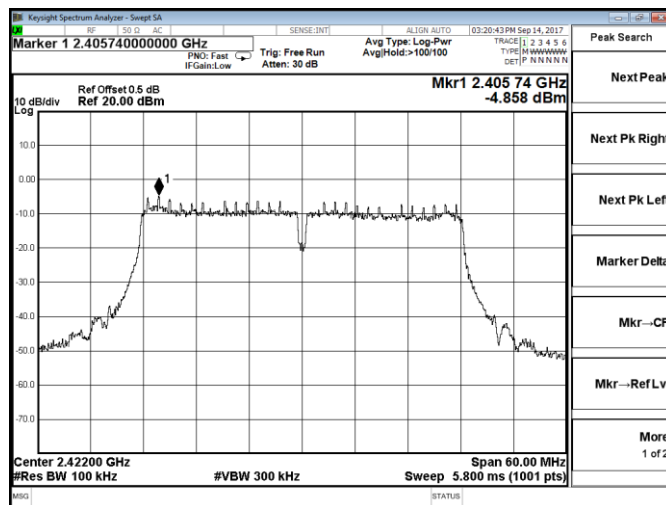



802.11n-HT40 Chain 0-Low channel

802.11n-HT40 Chain 1-Low channel

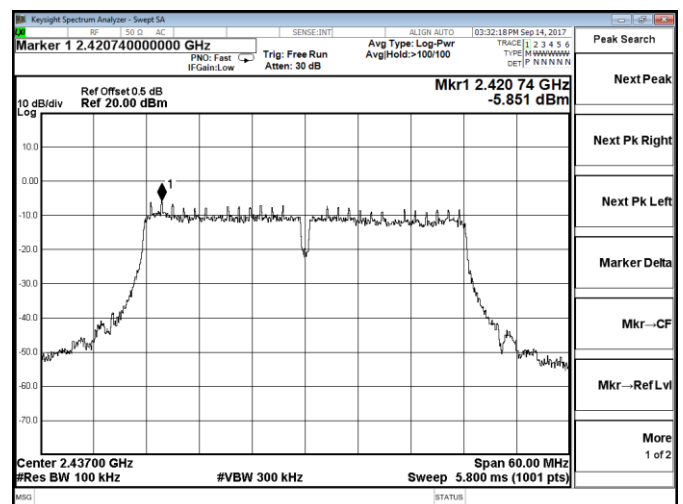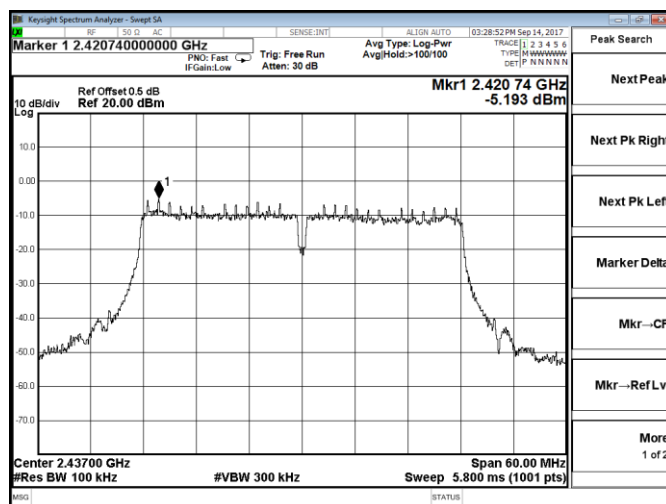

802.11n-HT40 Chain 0-Middle channel

802.11n-HT40 Chain 1-Middle channel

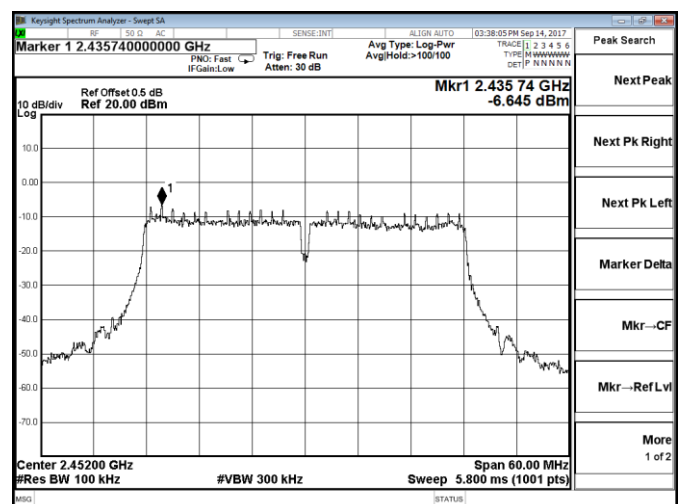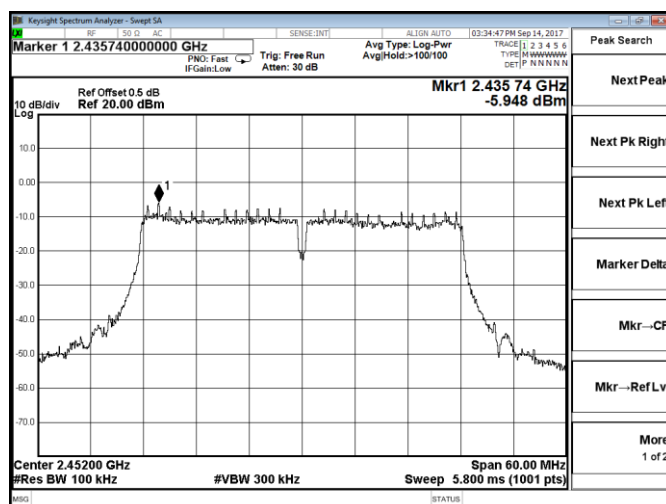

802.11n-HT40 Chain 0-High channel

802.11n-HT40 Chain 1-High channel

## 5.4. 6 dB Spectrum Bandwidth Measurement

### 5.4.1. Standard Applicable

According to §15.247(a)(2): For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

### 5.4.2. Measuring Instruments and Setting


Please refer to section 6 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

| Spectrum Parameter | Setting  |
|--------------------|----------|
| Attenuation        | Auto     |
| Span Frequency     | > RBW    |
| Detector           | Peak     |
| Trace              | Max Hold |
| Sweep Time         | 100ms    |

### 5.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth and the video bandwidth were set according to KDB558074.
3. Measured the spectrum width with power higher than 6dB below carrier.

### 5.4.4. Test Setup Layout

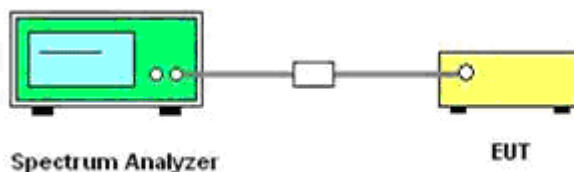

### 5.4.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 5.4.6. Test Result of 6dB Spectrum Bandwidth



|               |             |                |             |
|---------------|-------------|----------------|-------------|
| Temperature   | 25.1℃       | Humidity       | 52.4%       |
| Test Engineer | Jayden Zhuo | Configurations | 802.11b/g/n |

| Test Mode         | Channel | Frequency (MHz) | 6dB Bandwidth (MHz) |         | Limits (MHz) | Verdict |
|-------------------|---------|-----------------|---------------------|---------|--------------|---------|
|                   |         |                 | Chain 0             | Chain 1 |              |         |
| IEEE 802.11b      | 1       | 2412            | 10.06               | 10.06   | 0.500        | PASS    |
|                   | 6       | 2437            | 10.08               | 10.08   |              |         |
|                   | 11      | 2462            | 10.09               | 10.09   |              |         |
| IEEE 802.11g      | 1       | 2412            | 16.41               | 16.41   | 0.500        | PASS    |
|                   | 6       | 2437            | 16.40               | 16.40   |              |         |
|                   | 11      | 2462            | 16.39               | 16.40   |              |         |
| IEEE 802.11n HT20 | 1       | 2412            | 17.36               | 17.34   | 0.500        | PASS    |
|                   | 6       | 2437            | 17.37               | 17.34   |              |         |
|                   | 11      | 2462            | 17.35               | 17.33   |              |         |
| IEEE 802.11n HT40 | 3       | 2422            | 35.82               | 35.96   | 0.500        | PASS    |
|                   | 6       | 2437            | 35.96               | 35.95   |              |         |
|                   | 9       | 2452            | 35.97               | 35.97   |              |         |

*Remark:*



1. Measured 6dB Bandwidth at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40;

## Test plot of 6 dB Bandwidth

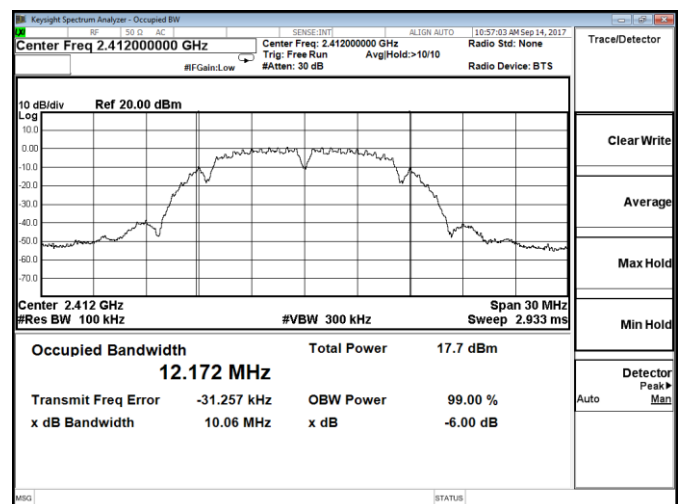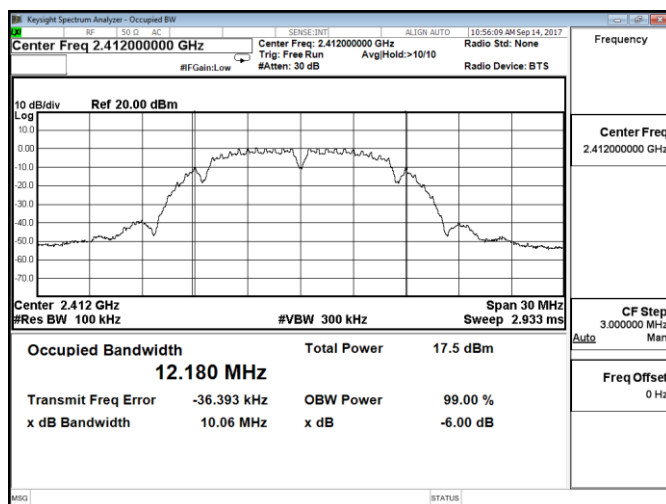



802.11b Chain 0-Low channel

802.11b Chain 1-Low channel

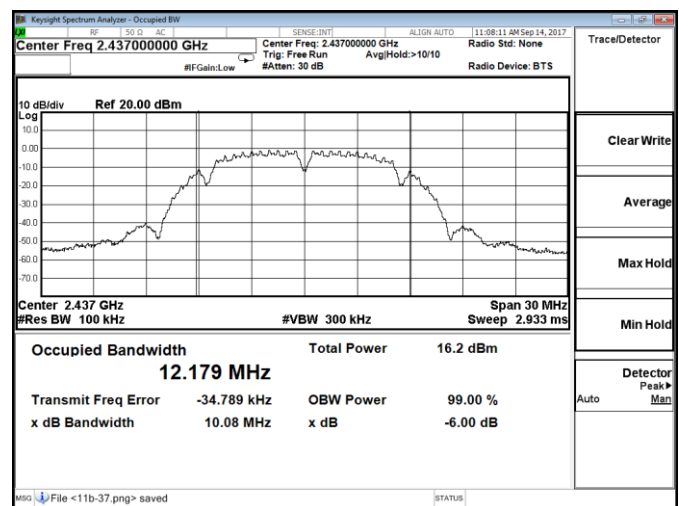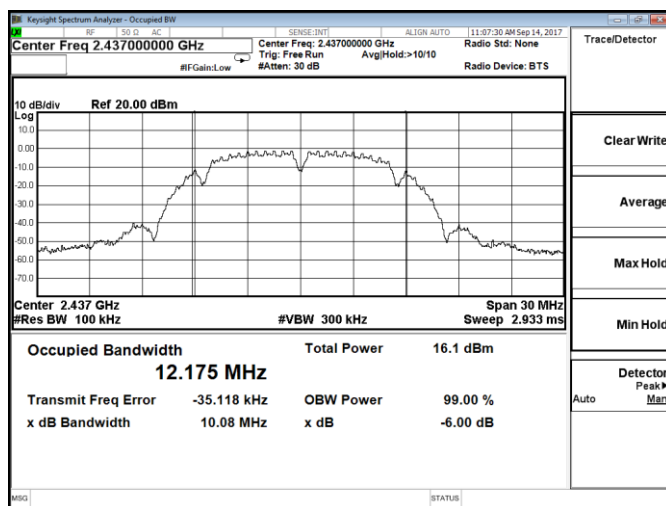

802.11b Chain 0-Middle channel

802.11b Chain 1-Middle channel

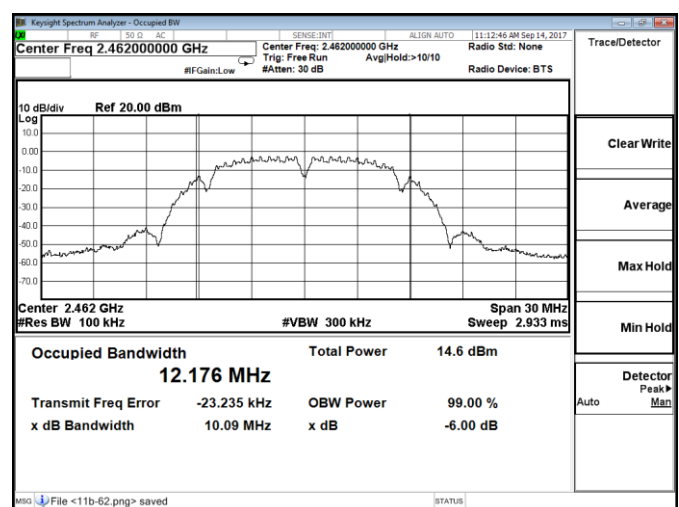
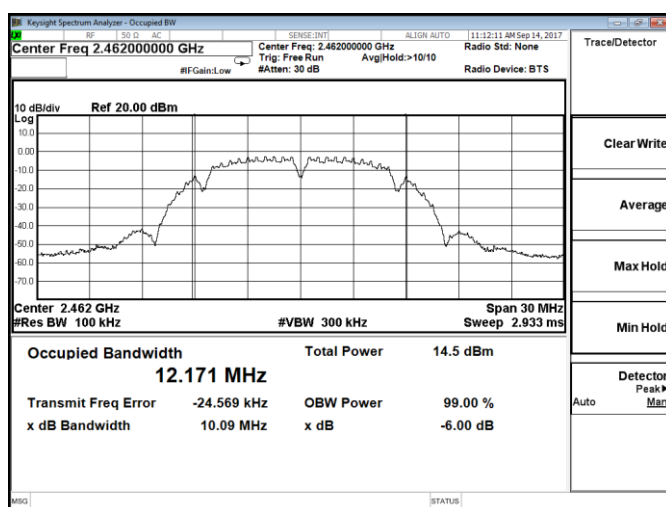


802.11b Chain 0-High channel



802.11b Chain 1-High channel





## Test plot of 6 dB Bandwidth

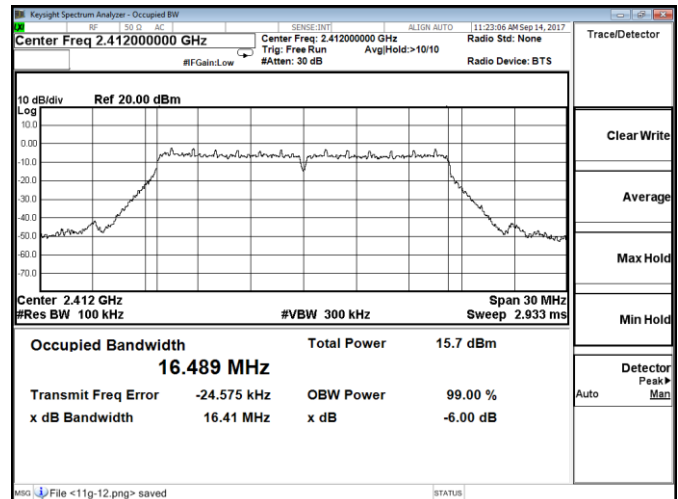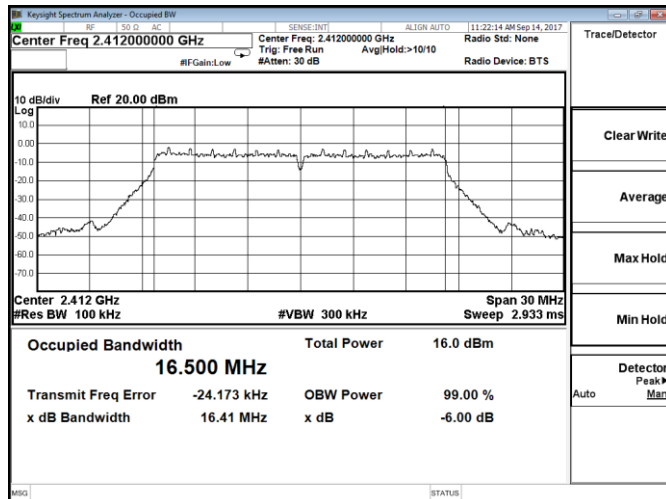

## 802.11g Chain 0-Low channel

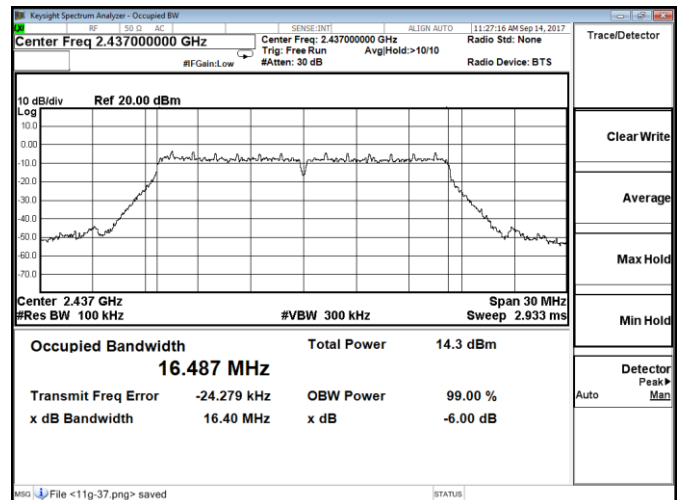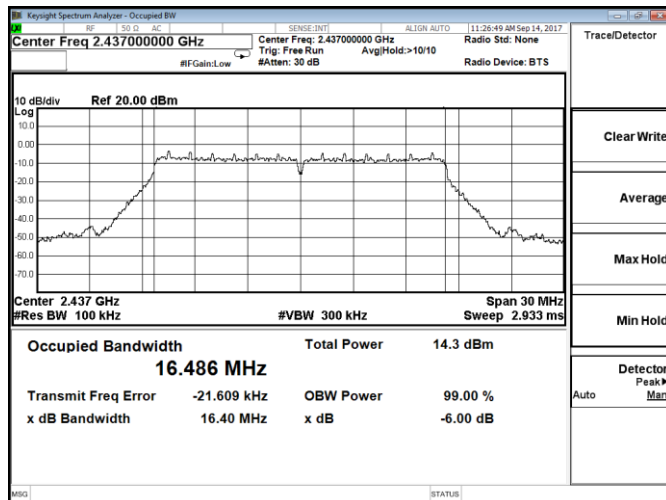



## 802.11g Chain 0-Middle channel

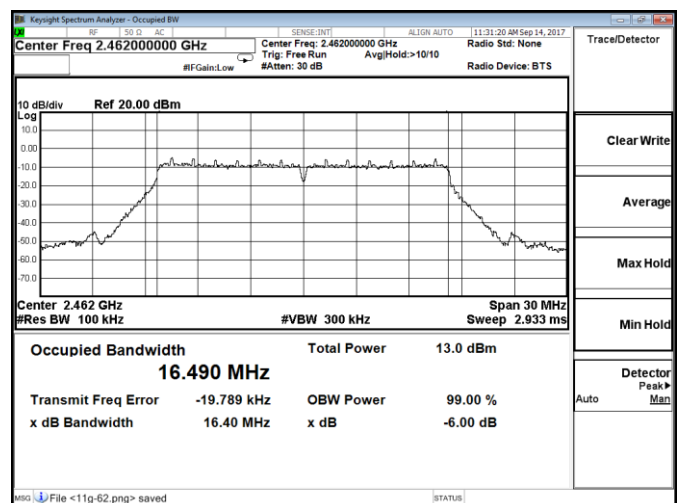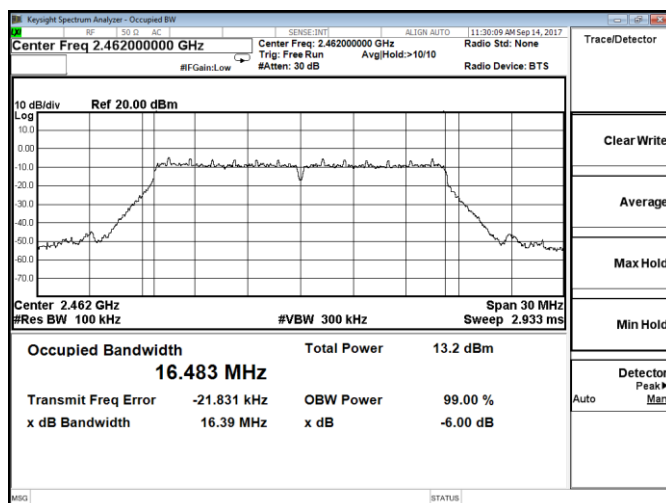

## 802.11g Chain 0-High channel



## 802.11g Chain 1-High channel

## Test plot of 6 dB Bandwidth

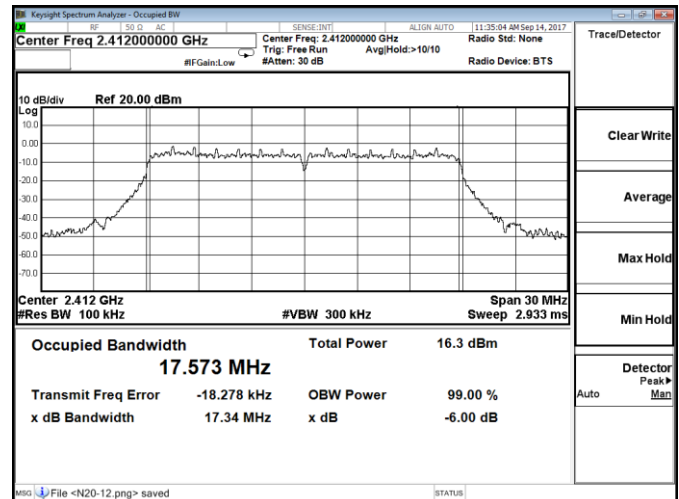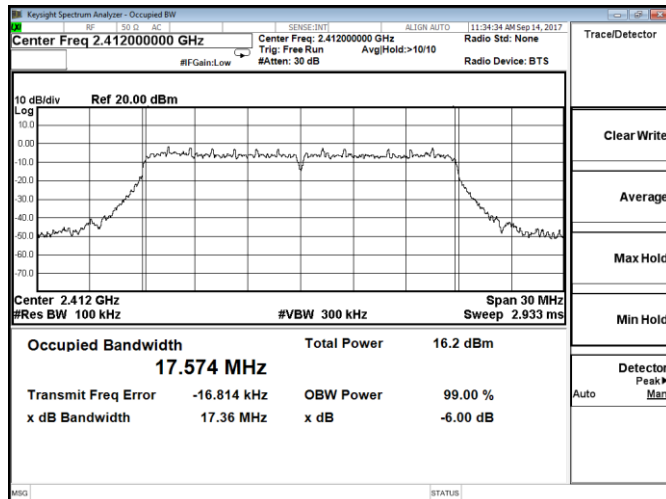



## 802.11n-HT20 Chain 0-Low channel

## 802.11n-HT20 Chain 1-Low channel

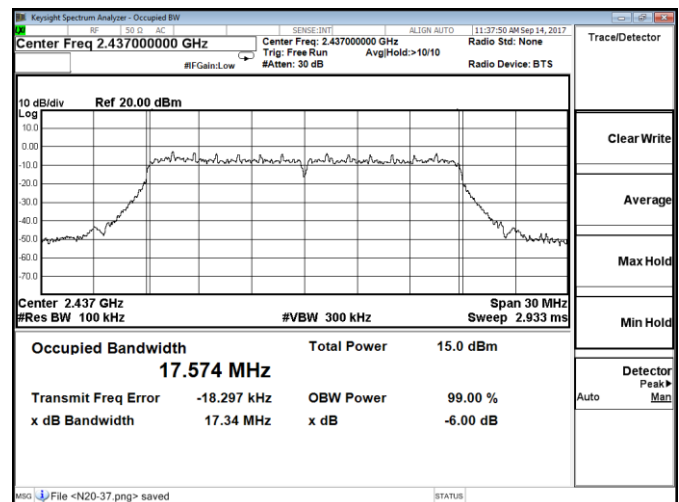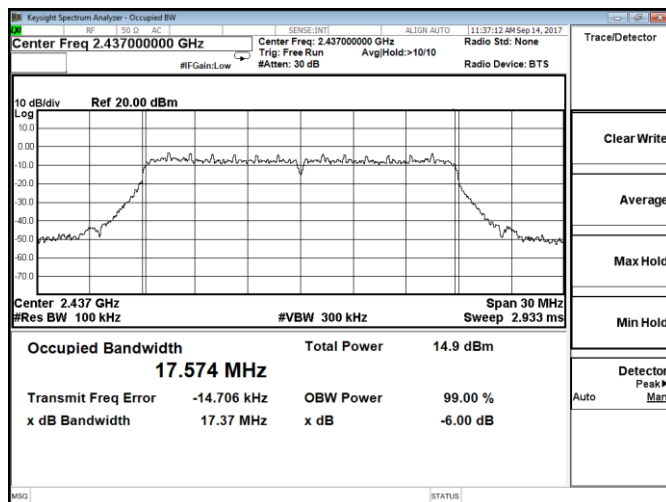

## 802.11n-HT20 Chain 0-Middle channel



## 802.11n-HT20 Chain 1-Middle channel

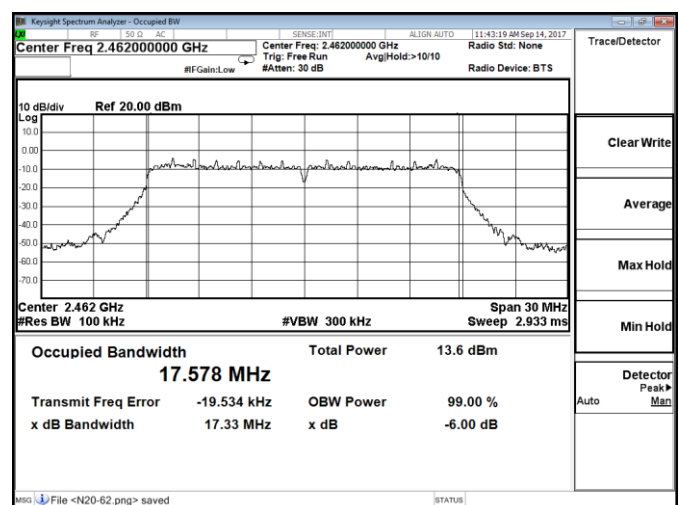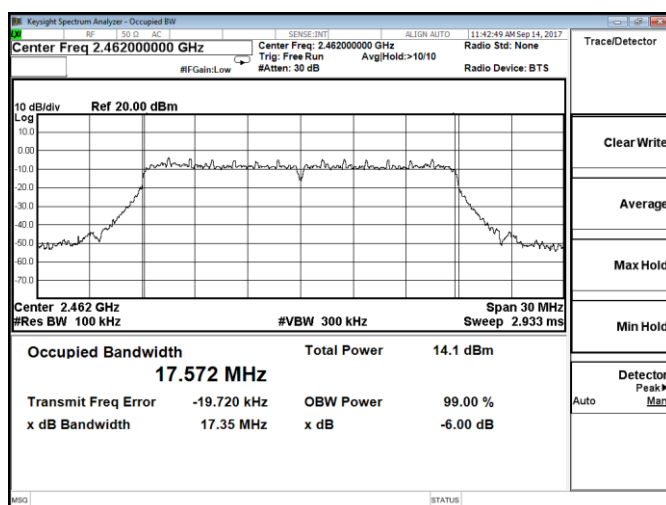



## 802.11n-HT20 Chain 0-High channel

## 802.11n-HT20 Chain 1-High channel



## Test plot of 6 dB Bandwidth

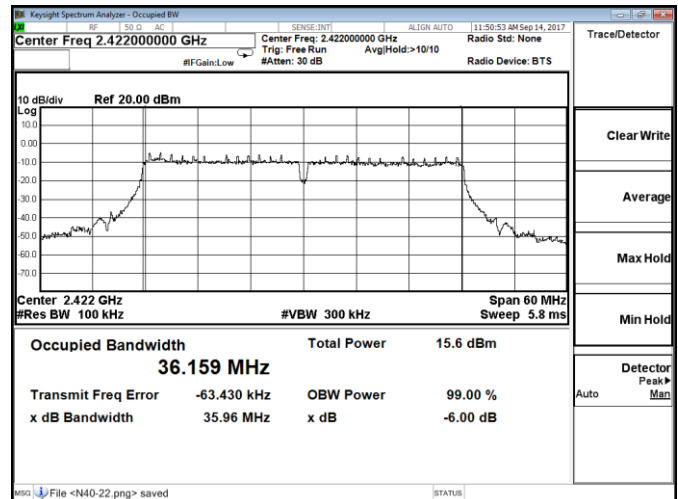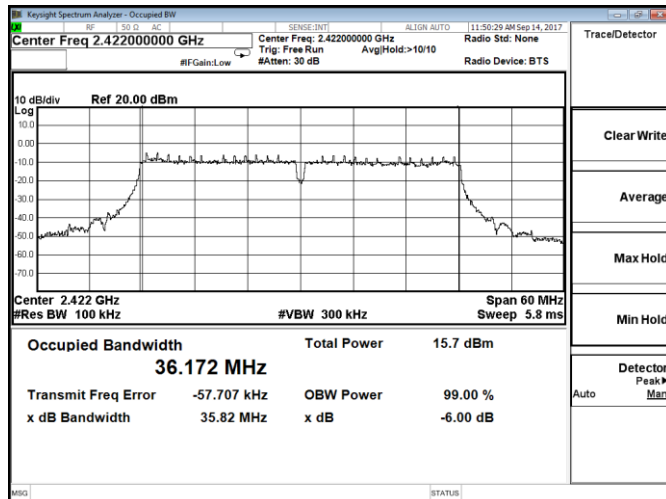

## 802.11n-HT40 Chain 0-Low channel

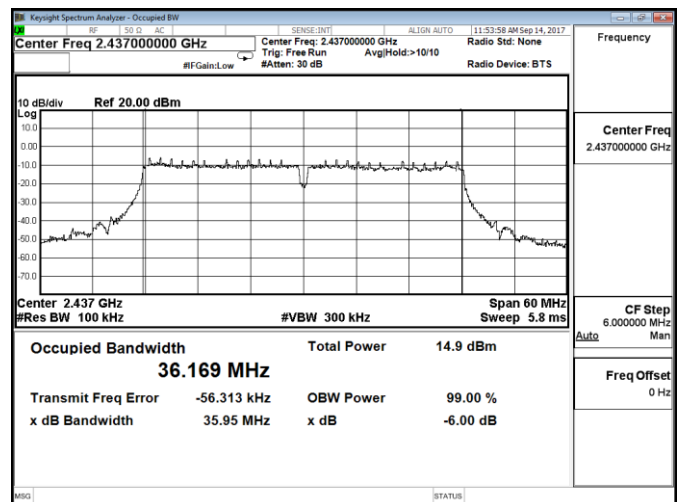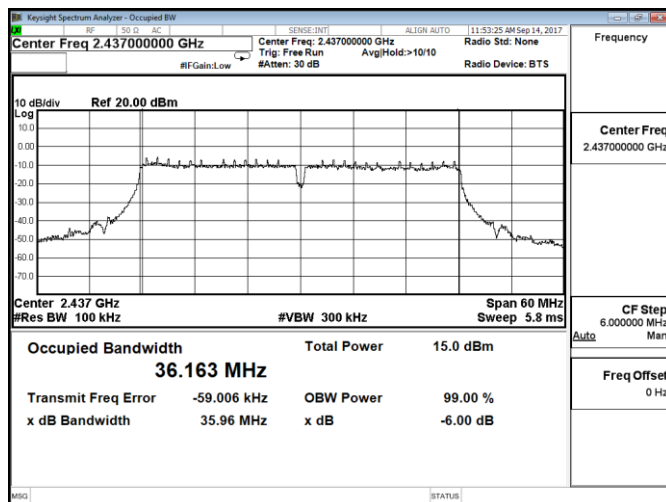

## 802.11n-HT40 Chain 0-Middle channel

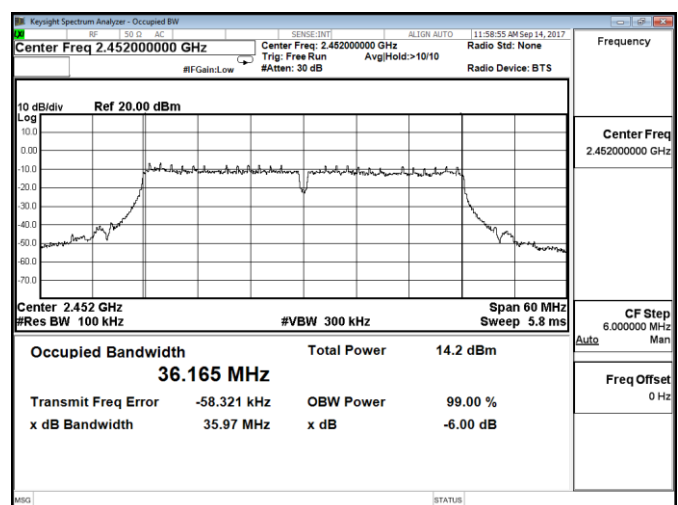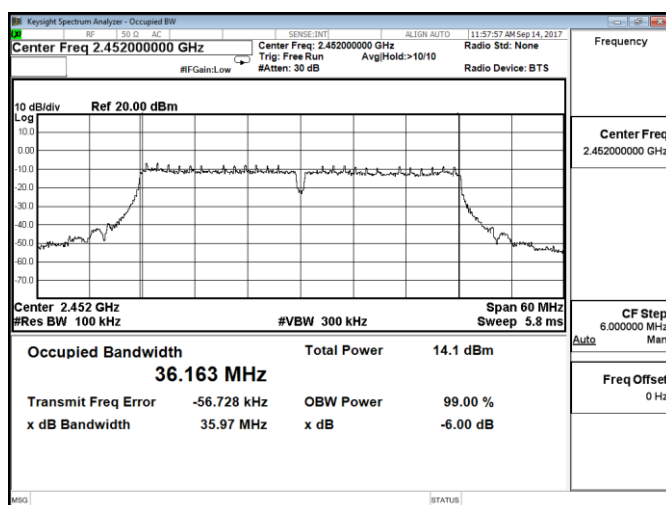

## 802.11n-HT40 Chain 0-High channel

## 802.11n-HT40 Chain 1-High channel

## 5.5. Radiated Emissions Measurement

### 5.5.1. Standard Applicable

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410     | 4.5-5.15    |
| \1\ 0.495-0.505   | 16.69475-16.69525   | 608-614       | 5.35-5.46   |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5   |
| 4.17725-4.17775   | 37.5-38.25          | 1435-1626.5   | 9.0-9.2     |
| 4.20725-4.20775   | 73-74.6             | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 74.8-75.2           | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 108-121.94          | 1718.8-1722.2 | 13.25-13.4  |
| 6.31175-6.31225   | 123-138             | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 149.9-150.05        | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2        | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 240-285             | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 322-335.4           | 3600-4400     | (\2\)       |
| 13.36-13.41       |                     |               |             |

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(KHz)                          | 300                              |
| 0.490~1.705          | 24000/F(KHz)                         | 30                               |
| 1.705~30.0           | 30                                   | 30                               |
| 30~88                | 100                                  | 3                                |
| 88~216               | 150                                  | 3                                |
| 216~960              | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

### 5.5.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter                        | Setting                                        |
|-------------------------------------------|------------------------------------------------|
| Attenuation                               | Auto                                           |
| Start Frequency                           | 1000 MHz                                       |
| Stop Frequency                            | 10th carrier harmonic                          |
| RB / VB (Emission in restricted band)     | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |
| RB / VB (Emission in non-restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter     | Setting                              |
|------------------------|--------------------------------------|
| Attenuation            | Auto                                 |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP/AVG    |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP/AVG    |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 100kHz for QP/AVG |

### 5.5.3. Test Procedures

#### 1) Sequence of testing 9 kHz to 30 MHz

##### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

##### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.5 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

##### Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

## 2) Sequence of testing 30 MHz to 1 GHz

### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

## 3) Sequence of testing 1 GHz to 18 GHz

### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.

--- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

**Final measurement:**

--- The final measurement will be performed with minimum the six highest peaks.

--- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.

--- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

**4) Sequence of testing above 18 GHz**

**Setup:**

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 1 meter.

--- The EUT was set into operation.

**Premeasurement:**

--- The antenna is moved spherical over the EUT in different polarisations of the antenna.


**Final measurement:**

--- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.


--- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

#### 5.5.4. Test Setup Layout


For radiated emissions below 30MHz

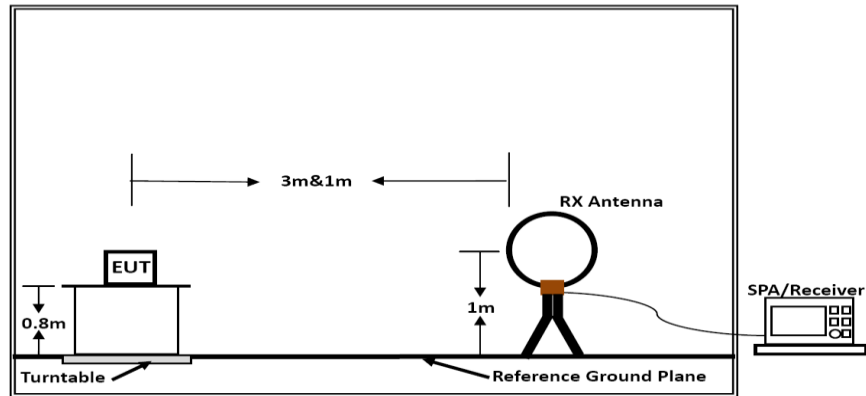

Below 30MHz

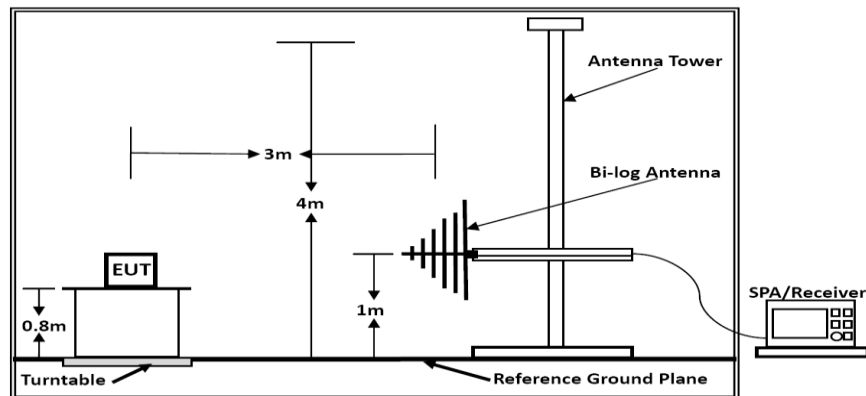

Below 1GHz

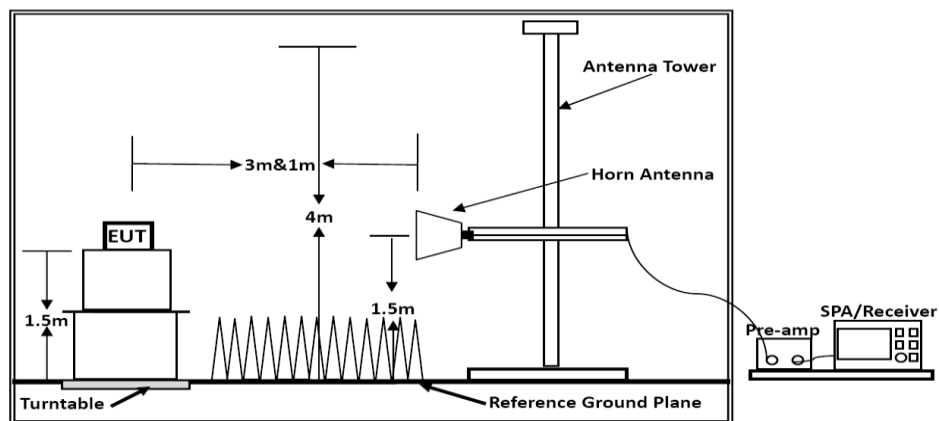

Above 1GHz

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].



## 5.5.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 5.5.6. Results of Radiated Emissions (9kHz~30MHz)

|               |                    |                |             |
|---------------|--------------------|----------------|-------------|
| Temperature   | 24.5℃              | Humidity       | 56.2%       |
| Test Engineer | Jayden Zhuo        | Configurations | 802.11b/g/n |
| Test Date     | September 13, 2017 |                |             |

| Freq. (MHz) | Level (dBUV) | Over Limit (dB) | Over Limit (dBUV) | Remark   |
|-------------|--------------|-----------------|-------------------|----------|
| -           | -            | -               | -                 | See Note |

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log$  (specific distance / test distance) (dB);

Limit line = specific limits (dBUV) + distance extrapolation factor.

## 5.5.7. Results of Radiated Emissions (30MHz~1GHz)

|               |                    |                |                   |
|---------------|--------------------|----------------|-------------------|
| Temperature   | 24.5℃              | Humidity       | 56.2%             |
| Test Engineer | Jayden Zhuo        | Configurations | 802.11b (High CH) |
| Test Date     | September 13, 2017 |                |                   |

Test result for 802.11b (High Channel) @Chain 0

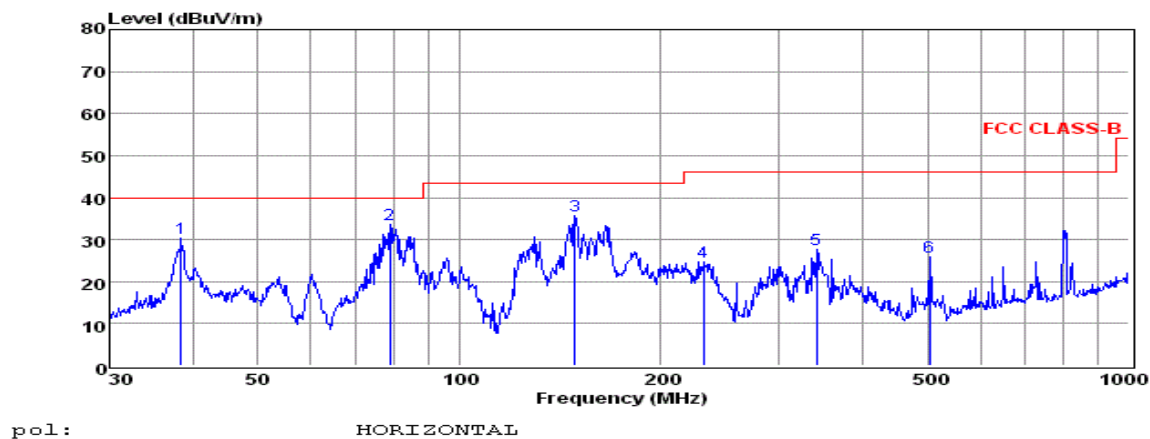


|   | Freq   | Reading | CabLos | Antfac | Measured | Limit  | Over   | Remark |
|---|--------|---------|--------|--------|----------|--------|--------|--------|
|   | MHz    | dBuV    | dB     | dB/m   | dBuV/m   | dBuV/m | dB     |        |
| 1 | 38.35  | 16.76   | 0.38   | 13.16  | 30.30    | 40.00  | -9.70  | QP     |
| 2 | 78.69  | 24.72   | 0.47   | 8.35   | 33.54    | 40.00  | -6.46  | QP     |
| 3 | 148.96 | 26.51   | 0.86   | 8.25   | 35.62    | 43.50  | -7.88  | QP     |
| 4 | 231.72 | 12.08   | 0.98   | 11.72  | 24.78    | 46.00  | -21.22 | QP     |
| 5 | 341.98 | 12.41   | 1.12   | 14.15  | 27.68    | 46.00  | -18.32 | QP     |
| 6 | 504.71 | 8.04    | 1.29   | 16.67  | 26.00    | 46.00  | -20.00 | QP     |

Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss

3. The emission that are 20dB below the official limit are not reported

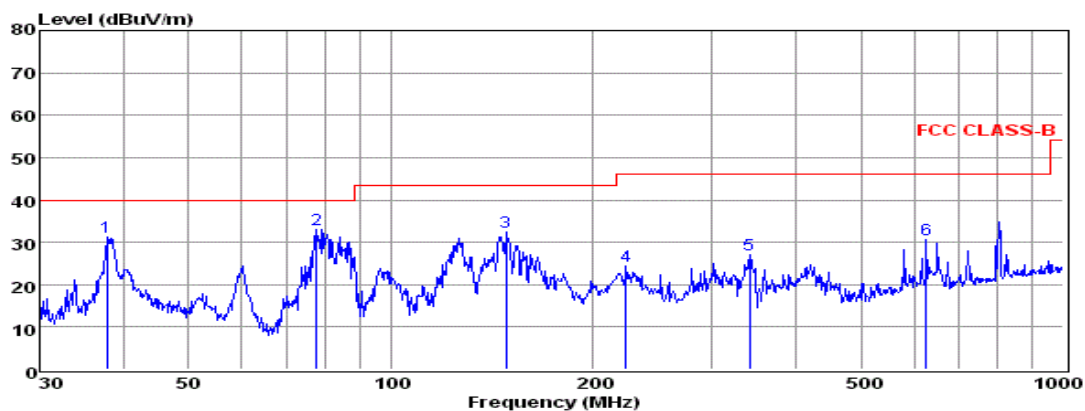

pol:

VERTICAL

|   | Freq   | Reading | CabLos | Antfac | Measured | Limit  | Over   | Remark |
|---|--------|---------|--------|--------|----------|--------|--------|--------|
|   | MHz    | dBuV    | dB     | dB/m   | dBuV/m   | dBuV/m | dB     |        |
| 1 | 37.81  | 17.79   | 0.38   | 13.02  | 31.19    | 40.00  | -8.81  | QP     |
| 2 | 77.59  | 24.49   | 0.47   | 8.18   | 33.14    | 40.00  | -6.86  | QP     |
| 3 | 148.44 | 23.24   | 0.86   | 8.25   | 32.35    | 43.50  | -11.15 | QP     |
| 4 | 223.73 | 12.15   | 0.95   | 11.37  | 24.47    | 46.00  | -21.53 | QP     |
| 5 | 341.98 | 11.76   | 1.12   | 14.15  | 27.03    | 46.00  | -18.97 | QP     |
| 6 | 625.08 | 10.64   | 1.49   | 18.54  | 30.67    | 46.00  | -15.33 | QP     |

Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss

3. The emission that are 20dB below the official limit are not reported

Note:

Pre-scan all modes and recorded the worst case results in this report (IEEE 802.11b (High Channel) @ Chain 0.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 5.5.8. Results for Radiated Emissions (Above 1GHz)

**(Worst Case at Antenna Chain 1)**

802.11b

Channel 1 / 2412 MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4824.00   | 55.40        | 33.06          | 35.04        | 3.94         | 57.36           | 74.00        | -16.64    | Peak    | Horizontal |
| 4824.00   | 41.03        | 33.06          | 35.04        | 3.94         | 42.99           | 54.00        | -11.01    | Average | Horizontal |
| 4824.00   | 55.59        | 33.06          | 35.04        | 3.94         | 57.55           | 74.00        | -16.45    | Peak    | Vertical   |
| 4824.00   | 40.62        | 33.06          | 35.04        | 3.94         | 42.58           | 54.00        | -11.42    | Average | Vertical   |

Channel 6 / 2437 MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4874.00   | 59.92        | 33.16          | 35.15        | 3.96         | 61.89           | 74.00        | -12.11    | Peak    | Horizontal |
| 4874.00   | 41.10        | 33.16          | 35.15        | 3.96         | 43.07           | 54.00        | -10.93    | Average | Horizontal |
| 4874.00   | 53.32        | 33.16          | 35.15        | 3.96         | 55.29           | 74.00        | -18.71    | Peak    | Vertical   |
| 4874.00   | 39.88        | 33.16          | 35.15        | 3.96         | 41.85           | 54.00        | -12.15    | Average | Vertical   |

Channel 11 / 2462 MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4924.00   | 59.13        | 33.26          | 35.14        | 3.98         | 61.23           | 74.00        | -12.77    | Peak    | Horizontal |
| 4924.00   | 44.07        | 33.26          | 35.14        | 3.98         | 46.17           | 54.00        | -7.83     | Average | Horizontal |
| 4924.00   | 54.63        | 33.26          | 35.14        | 3.98         | 56.73           | 74.00        | -17.27    | Peak    | Vertical   |
| 4924.00   | 38.68        | 33.26          | 35.14        | 3.98         | 40.78           | 54.00        | -13.22    | Average | Vertical   |

**(Worst Case at Antenna Chain 0)**

802.11g

Channel 1

| Freq. MHz | Reading dBuv | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4824.00   | 57.57        | 33.06          | 35.04        | 3.94         | 59.53           | 74.00        | -14.47    | Peak    | Horizontal |
| 4824.00   | 41.43        | 33.06          | 35.04        | 3.94         | 43.39           | 54.00        | -10.61    | Average | Horizontal |
| 4824.00   | 53.74        | 33.06          | 35.04        | 3.94         | 55.70           | 74.00        | -18.30    | Peak    | Vertical   |
| 4824.00   | 40.98        | 33.06          | 35.04        | 3.94         | 42.94           | 54.00        | -11.06    | Average | Vertical   |

Channel 6

| Freq. MHz | Reading dBuv | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4874.00   | 58.64        | 33.16          | 35.15        | 3.96         | 60.61           | 74.00        | -13.39    | Peak    | Horizontal |
| 4874.00   | 41.88        | 33.16          | 35.15        | 3.96         | 43.85           | 54.00        | -10.15    | Average | Horizontal |
| 4874.00   | 53.58        | 33.16          | 35.15        | 3.96         | 55.55           | 74.00        | -18.45    | Peak    | Vertical   |
| 4874.00   | 41.78        | 33.16          | 35.15        | 3.96         | 43.75           | 54.00        | -10.25    | Average | Vertical   |

Channel 11

| Freq. MHz | Reading dBuv | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4924.00   | 58.90        | 33.26          | 35.14        | 3.98         | 61.00           | 74.00        | -13.00    | Peak    | Horizontal |
| 4924.00   | 43.87        | 33.26          | 35.14        | 3.98         | 45.97           | 54.00        | -8.03     | Average | Horizontal |
| 4924.00   | 55.61        | 33.26          | 35.14        | 3.98         | 57.71           | 74.00        | -16.29    | Peak    | Vertical   |
| 4924.00   | 41.99        | 33.26          | 35.14        | 3.98         | 44.09           | 54.00        | -9.91     | Average | Vertical   |

**(Combine with Antenna Chain 0 and Antenna Chain 1)**

802.11n HT20

Channel 1

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4824.00   | 55.56        | 33.06          | 35.04        | 3.94         | 57.52           | 74.00        | -16.48    | Peak    | Horizontal |
| 4824.00   | 42.45        | 33.06          | 35.04        | 3.94         | 44.41           | 54.00        | -9.59     | Average | Horizontal |
| 4824.00   | 53.76        | 33.06          | 35.04        | 3.94         | 55.72           | 74.00        | -18.28    | Peak    | Vertical   |
| 4824.00   | 39.67        | 33.06          | 35.04        | 3.94         | 41.63           | 54.00        | -12.37    | Average | Vertical   |

Channel 6

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4874.00   | 57.65        | 33.16          | 35.15        | 3.96         | 59.62           | 74.00        | -14.38    | Peak    | Horizontal |
| 4874.00   | 43.10        | 33.16          | 35.15        | 3.96         | 45.07           | 54.00        | -8.93     | Average | Horizontal |
| 4874.00   | 53.95        | 33.16          | 35.15        | 3.96         | 55.92           | 74.00        | -18.08    | Peak    | Vertical   |
| 4874.00   | 41.39        | 33.16          | 35.15        | 3.96         | 43.36           | 54.00        | -10.64    | Average | Vertical   |

Channel 11

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4924.00   | 57.91        | 33.26          | 35.14        | 3.98         | 60.01           | 74.00        | -13.99    | Peak    | Horizontal |
| 4924.00   | 42.50        | 33.26          | 35.14        | 3.98         | 44.60           | 54.00        | -9.40     | Average | Horizontal |
| 4924.00   | 52.47        | 33.26          | 35.14        | 3.98         | 54.57           | 74.00        | -19.43    | Peak    | Vertical   |
| 4924.00   | 40.19        | 33.26          | 35.14        | 3.98         | 42.29           | 54.00        | -11.71    | Average | Vertical   |

**(Combine with Antenna Chain 0 and Antenna Chain 1)**

802.11n HT40

Channel 3

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4844.00   | 54.86        | 33.06          | 35.04        | 3.94         | 56.82           | 74.00        | -17.18    | Peak    | Horizontal |
| 4844.00   | 40.00        | 33.06          | 35.04        | 3.94         | 41.96           | 54.00        | -12.04    | Average | Horizontal |
| 4844.00   | 53.12        | 33.06          | 35.04        | 3.94         | 55.08           | 74.00        | -18.92    | Peak    | Vertical   |
| 4844.00   | 38.83        | 33.06          | 35.04        | 3.94         | 40.79           | 54.00        | -13.21    | Average | Vertical   |

Channel 6

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4874.00   | 58.64        | 33.16          | 35.15        | 3.96         | 60.61           | 74.00        | -13.39    | Peak    | Horizontal |
| 4874.00   | 41.43        | 33.16          | 35.15        | 3.96         | 43.40           | 54.00        | -10.60    | Average | Horizontal |
| 4874.00   | 55.97        | 33.16          | 35.15        | 3.96         | 57.94           | 74.00        | -16.06    | Peak    | Vertical   |
| 4874.00   | 40.64        | 33.16          | 35.15        | 3.96         | 42.61           | 54.00        | -11.39    | Average | Vertical   |

Channel 9

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark  | Pol.       |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4904.00   | 59.35        | 33.26          | 35.14        | 3.98         | 61.45           | 74.00        | -12.55    | Peak    | Horizontal |
| 4904.00   | 43.37        | 33.26          | 35.14        | 3.98         | 45.47           | 54.00        | -8.53     | Average | Horizontal |
| 4904.00   | 53.96        | 33.26          | 35.14        | 3.98         | 56.06           | 74.00        | -17.94    | Peak    | Vertical   |
| 4904.00   | 39.83        | 33.26          | 35.14        | 3.98         | 41.93           | 54.00        | -12.07    | Average | Vertical   |

**Notes:**

1. Measuring frequencies from 9 KHz - 10<sup>th</sup> harmonic or 26.5GHz (which is less), No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 9k~10th harmonic or 26.5GHz (which is less) were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40;

## 5.6. Conducted Spurious Emissions and Band Edges Test

### 5.6.1. Standard Applicable

According to §15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 5.6.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter                        | Setting       |
|-------------------------------------------|---------------|
| Detector                                  | Peak          |
| Attenuation                               | Auto          |
| RB / VB (Emission in restricted band)     | 100KHz/300KHz |
| RB / VB (Emission in non-restricted band) | 100KHz/300KHz |

### 5.6.3. Test Procedures

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz

The spectrum from 9 kHz to 26.5GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

### 5.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 5.4.4.

### 5.6.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



### 5.6.6. Test Results of Conducted Spurious Emissions

|               |             |                |             |
|---------------|-------------|----------------|-------------|
| Temperature   | 24.5℃       | Humidity       | 56.2%       |
| Test Engineer | Jayden Zhuo | Configurations | 802.11b/g/n |


## RF Conducted Spurious Emissions

IEEE 802.11b


Chain 0

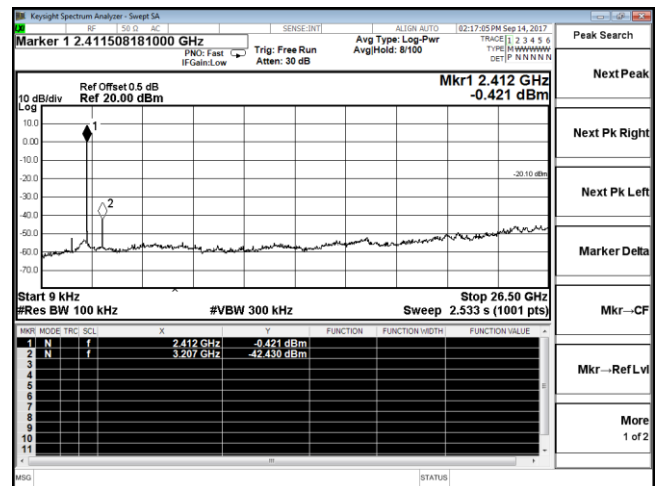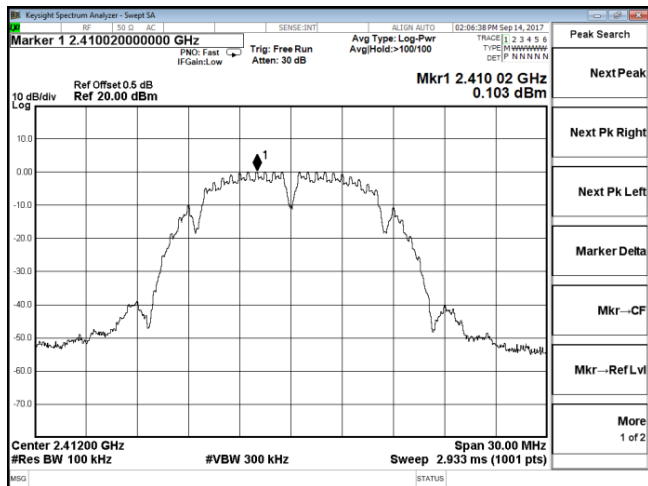


2397 MHz – 2427 MHz

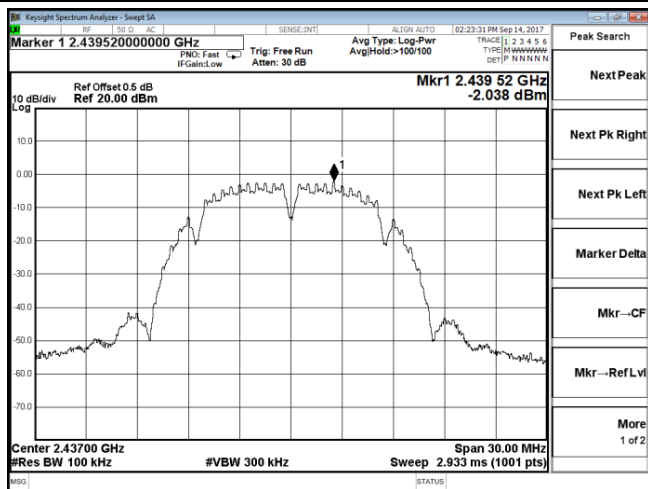


9 KHz – 26.5 GHz

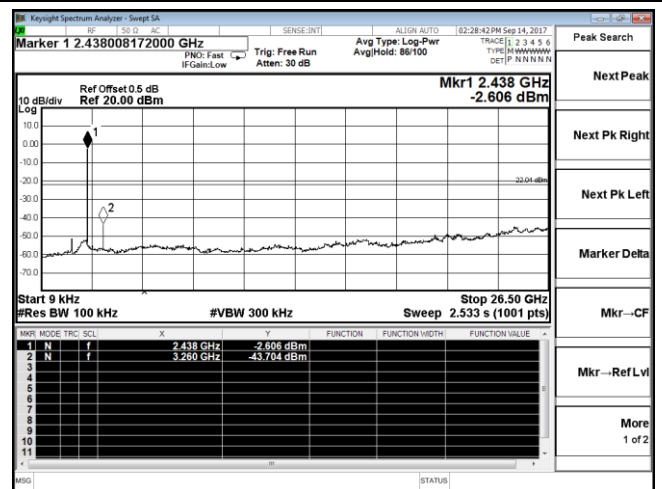

2422 MHz – 2452 MHz

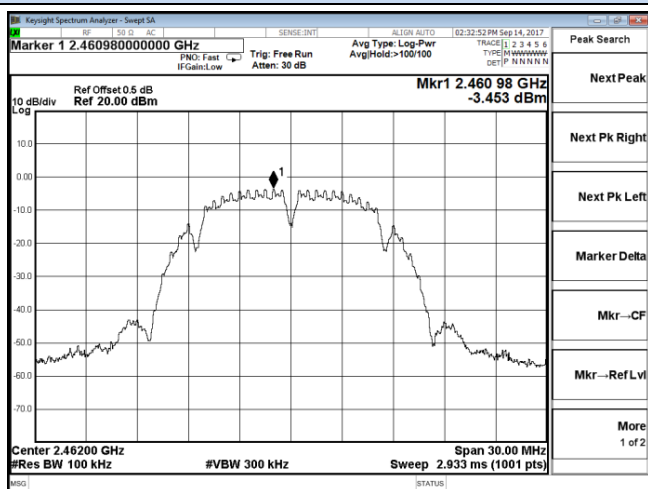

9 KHz – 26.5 GHz

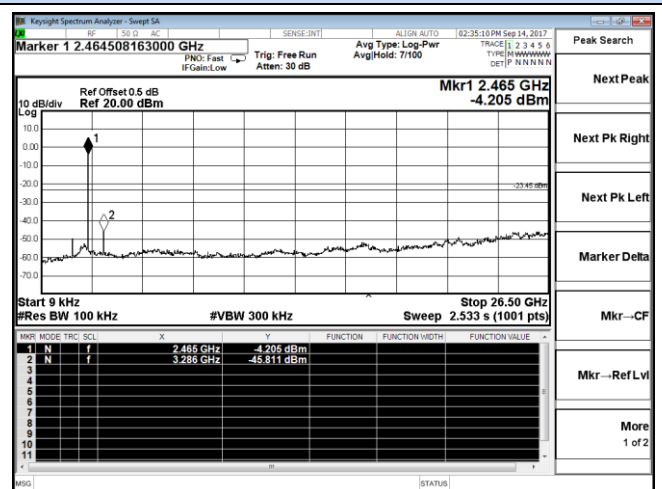

2447 MHz – 2477 MHz



9 KHz – 26.5 GHz



# RF Conducted Spurious Emissions



IEEE 802.11b

Chain 1

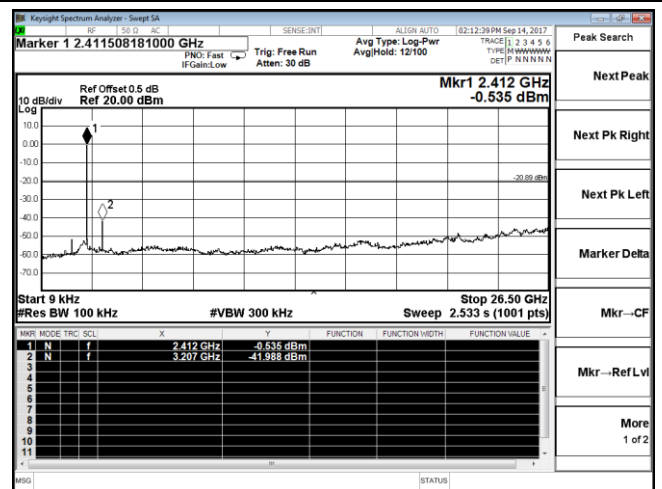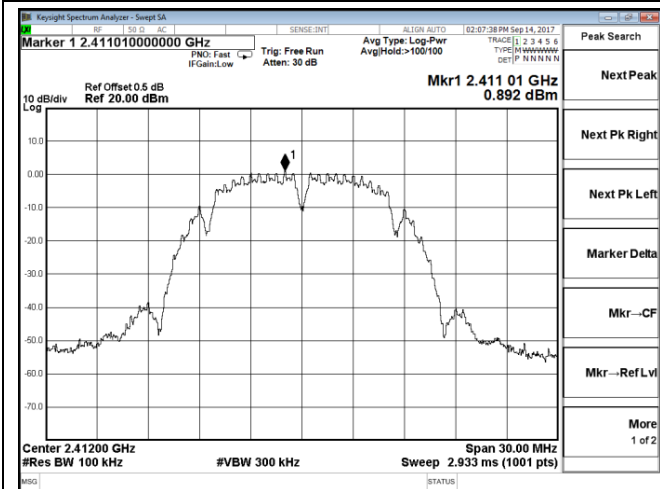



2397 MHz – 2427 MHz

9 KHz – 26.5 GHz

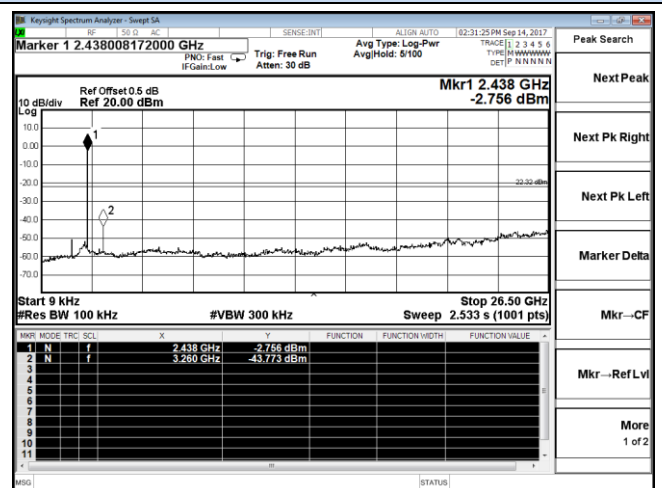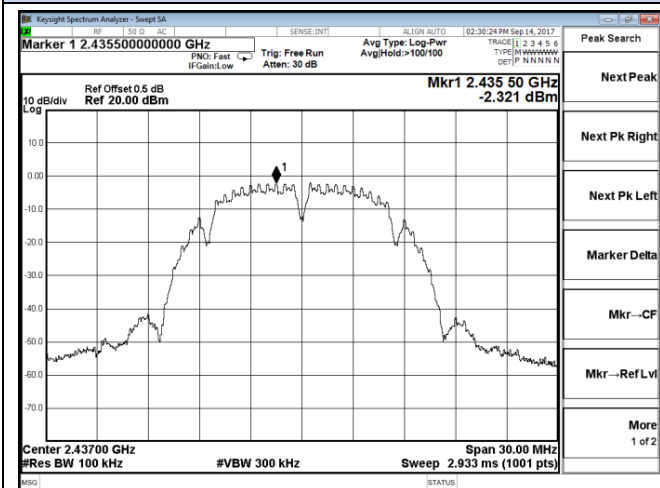

2422 MHz – 2452 MHz

9 KHz – 26.5 GHz

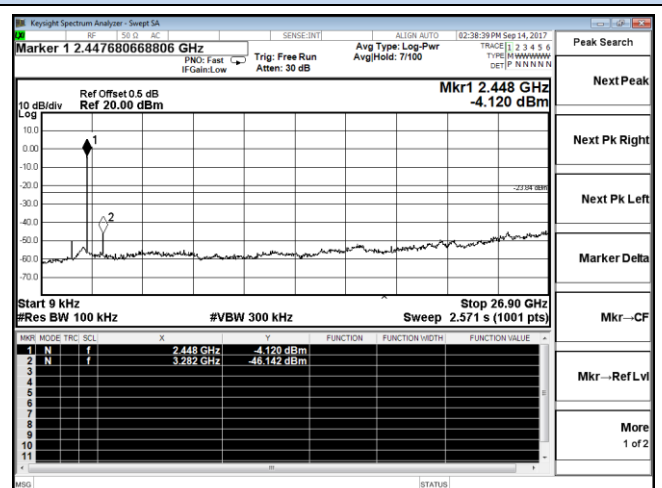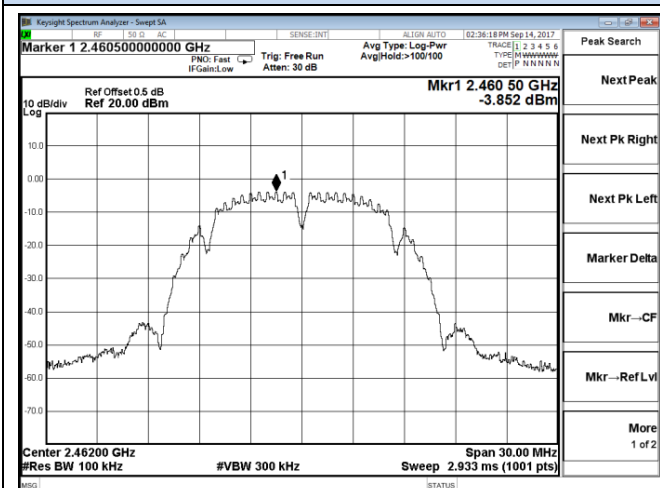



2447 MHz – 2477 MHz

9 KHz – 26.5 GHz

## RF Conducted Spurious Emissions



IEEE 802.11g

Chain 0

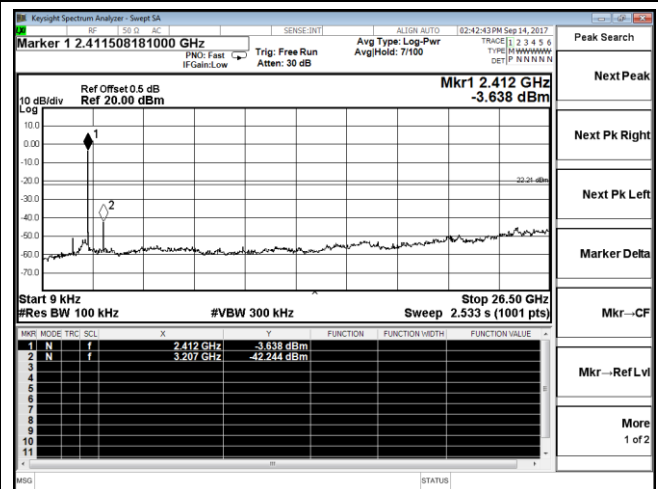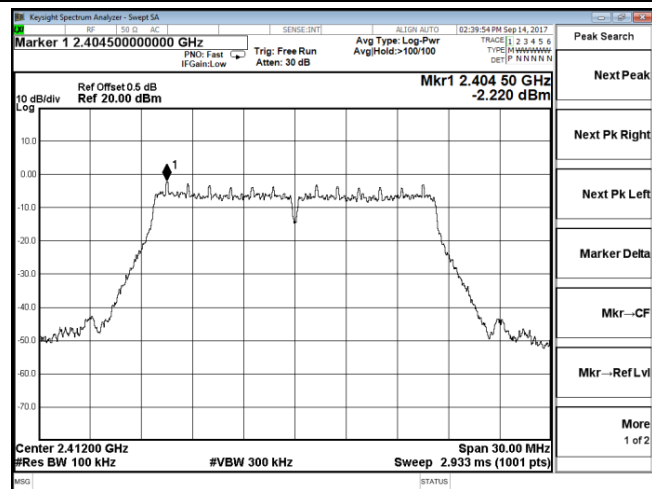



2397 MHz – 2427 MHz

9 KHz – 26.5 GHz

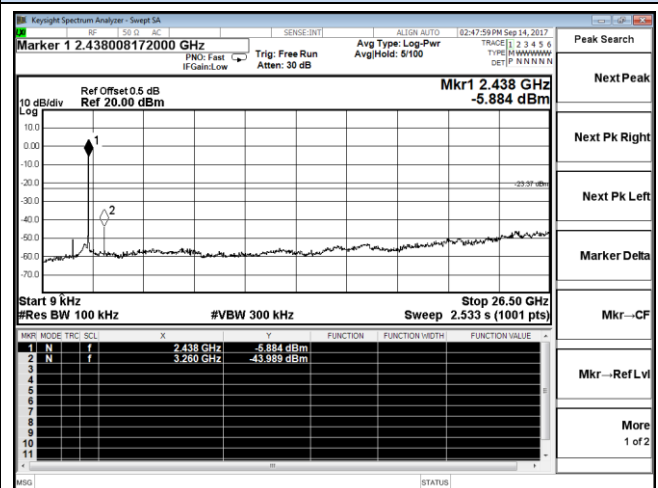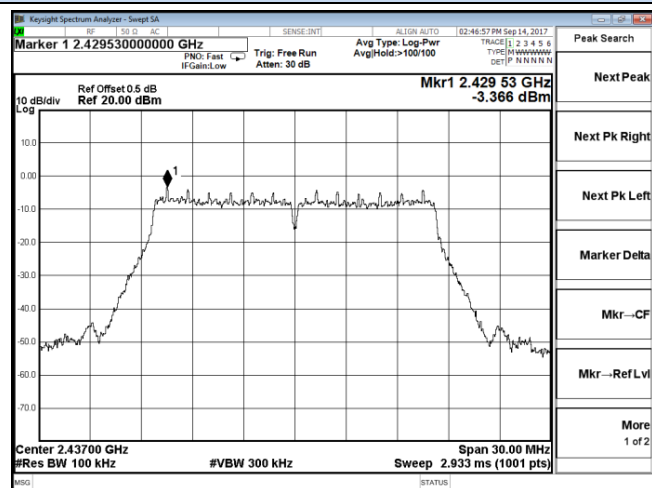

2422 MHz – 2452 MHz

9 KHz – 26.5 GHz

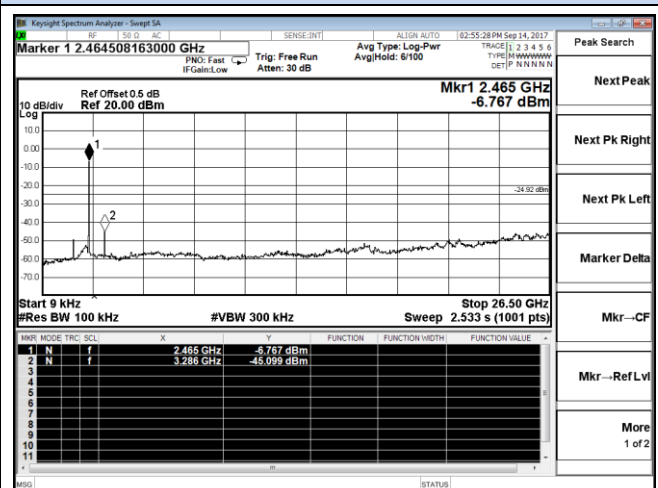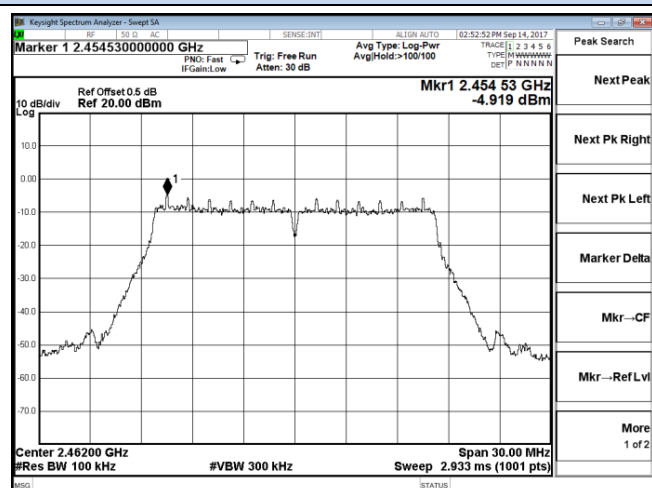


2447 MHz – 2477 MHz

9 KHz – 26.5 GHz


## RF Conducted Spurious Emissions

IEEE 802.11g


Chain 1

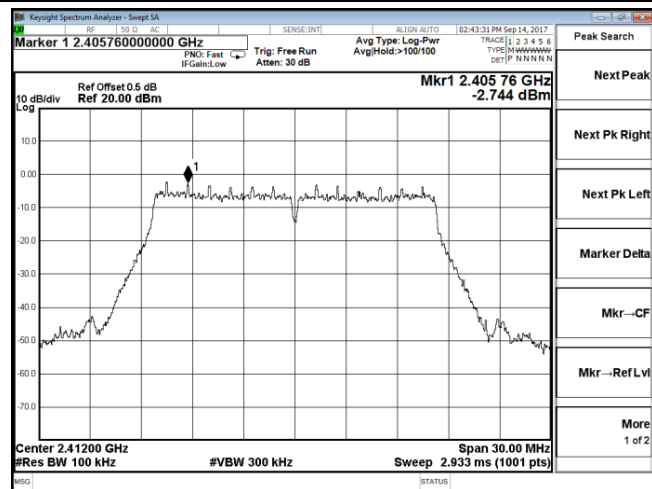


2397 MHz – 2427 MHz

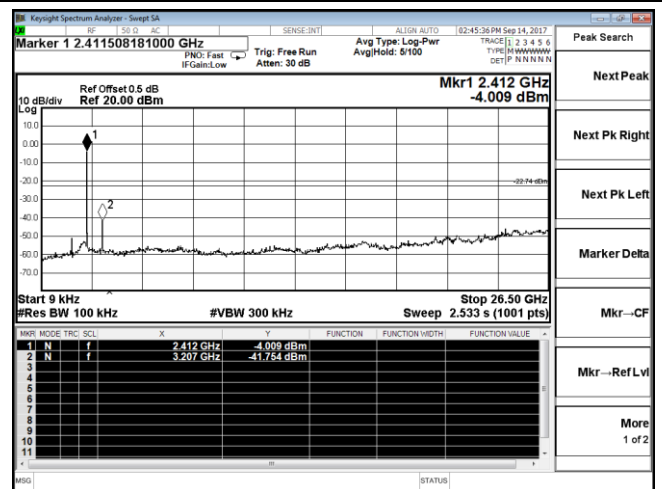


9 KHz – 26.5 GHz

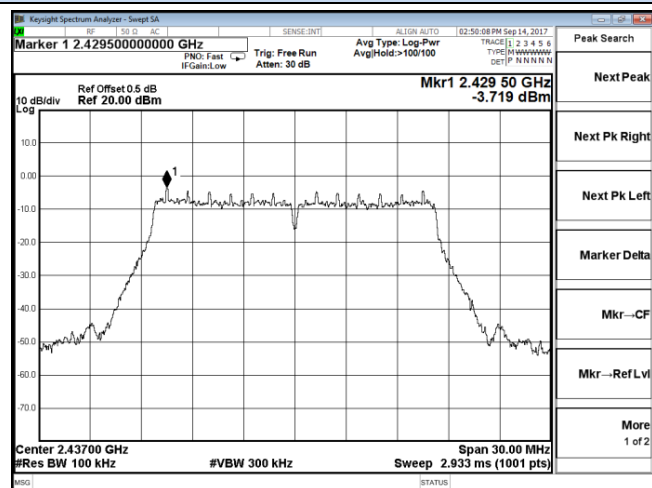


2422 MHz – 2452 MHz

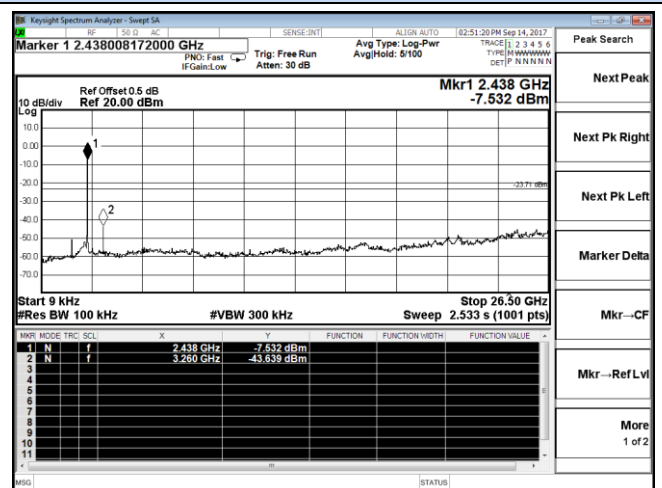

9 KHz – 26.5 GHz

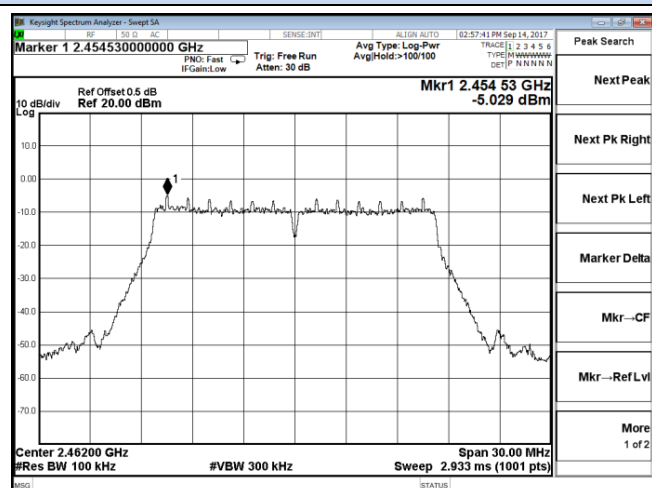

2447 MHz – 2477 MHz

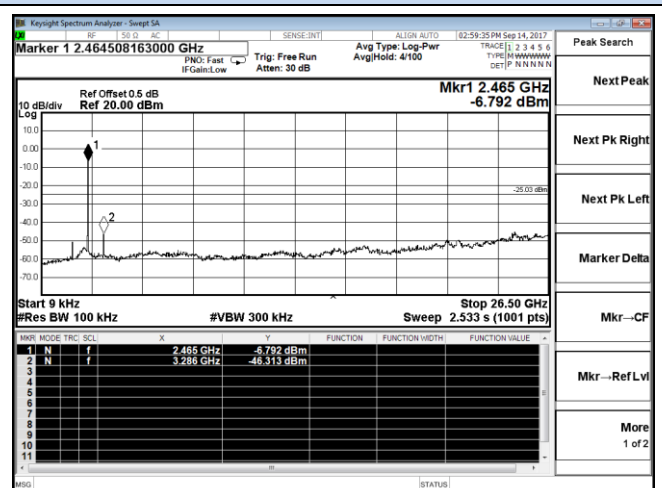


9 KHz – 26.5 GHz


## RF Conducted Spurious Emissions

### IEEE 802.11n HT20


#### Chain 0

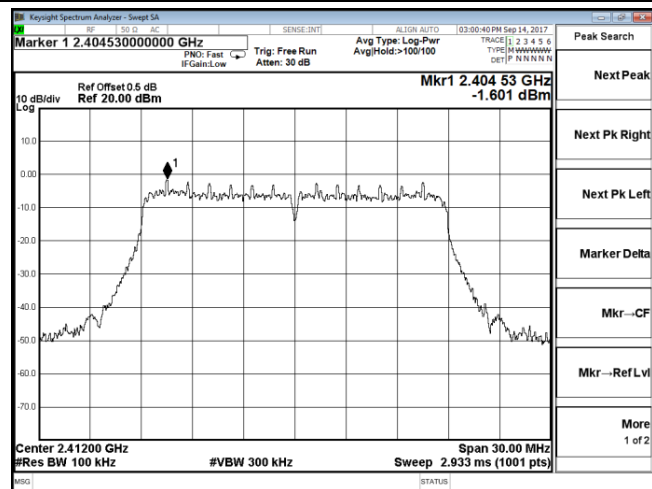


2397 MHz – 2427 MHz

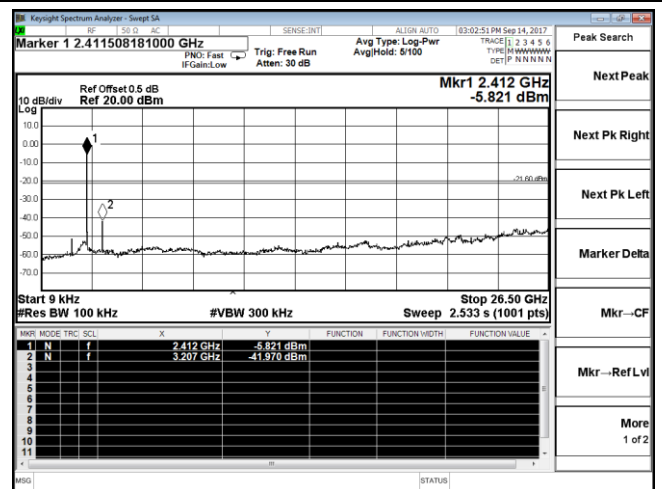


9 KHz – 26.5 GHz

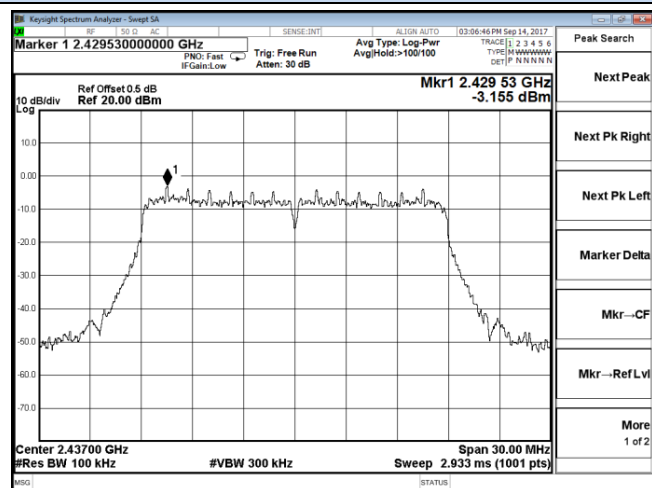


2422 MHz – 2452 MHz

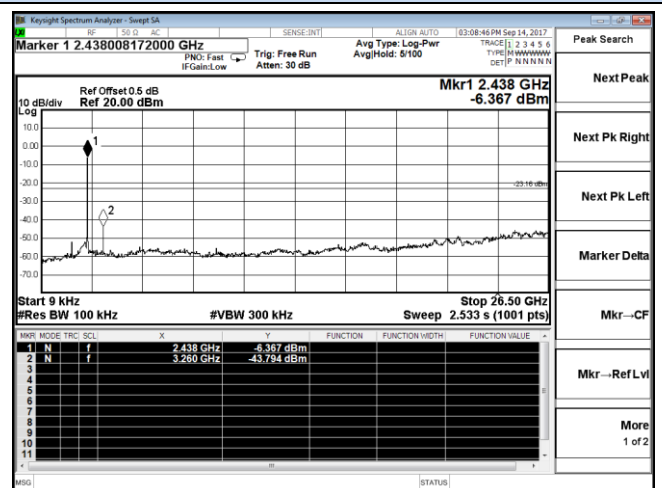

9 KHz – 26.5 GHz

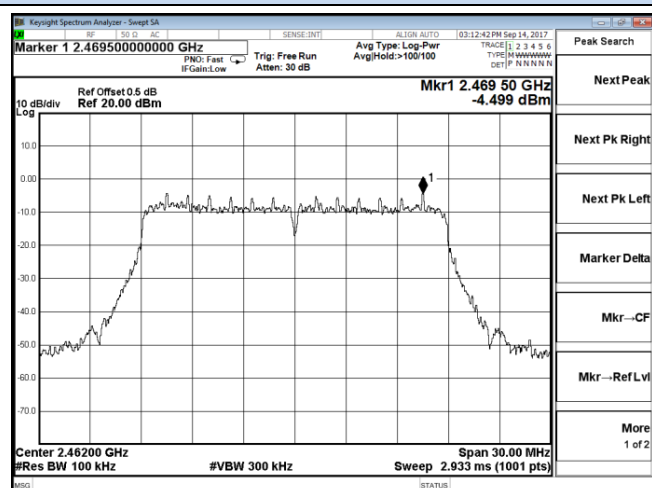

2447 MHz – 2477 MHz

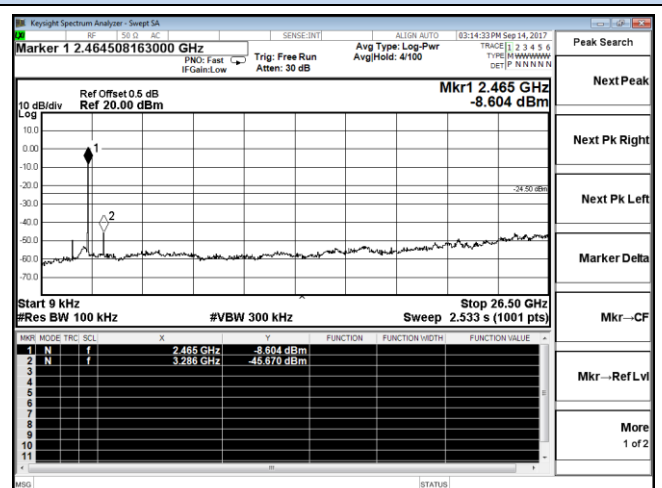


9 KHz – 26.5 GHz


# RF Conducted Spurious Emissions

## IEEE 802.11n HT20


### Chain 1

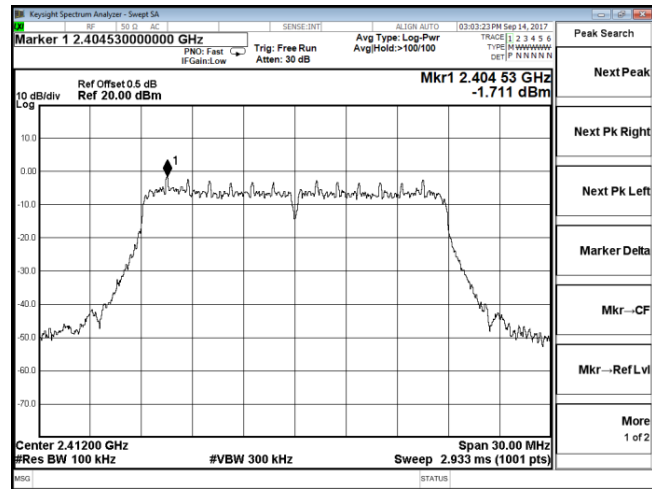


2397 MHz – 2427 MHz

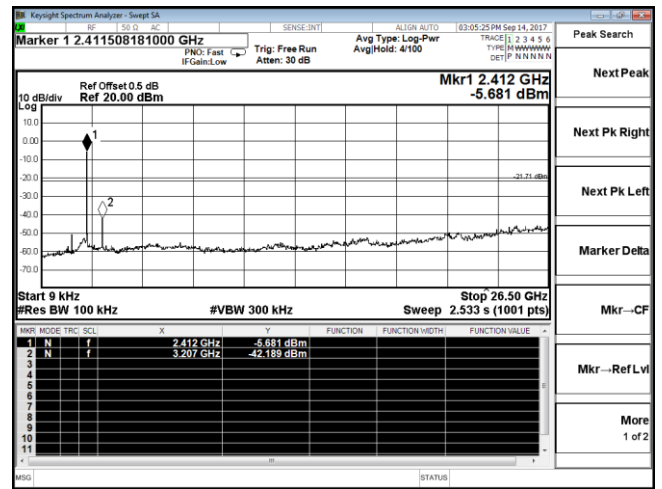


9 KHz – 26.5 GHz

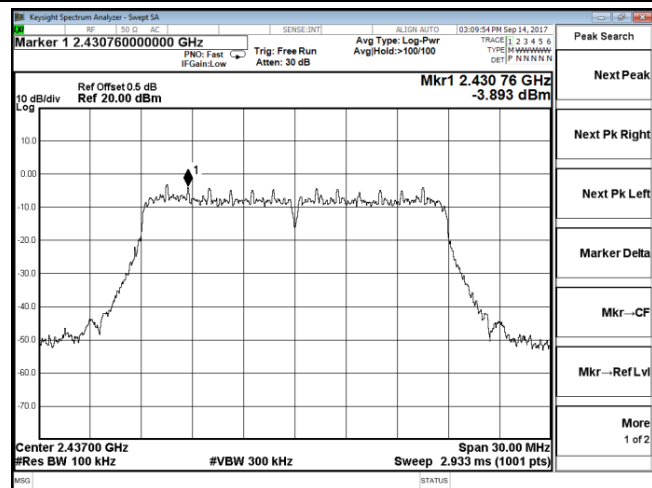


2422 MHz – 2452 MHz

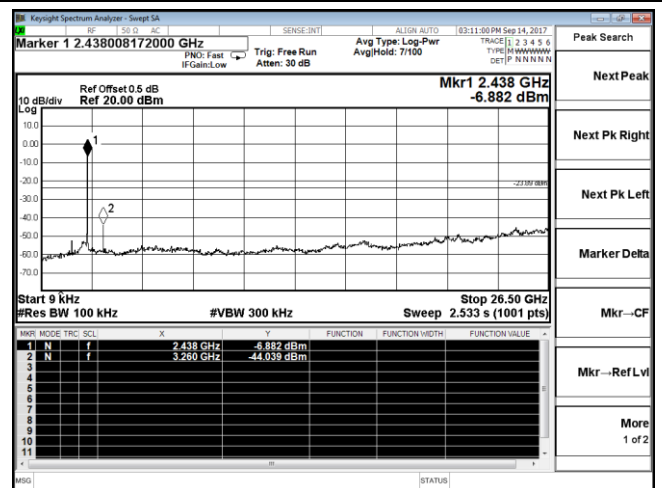

9 KHz – 26.5 GHz

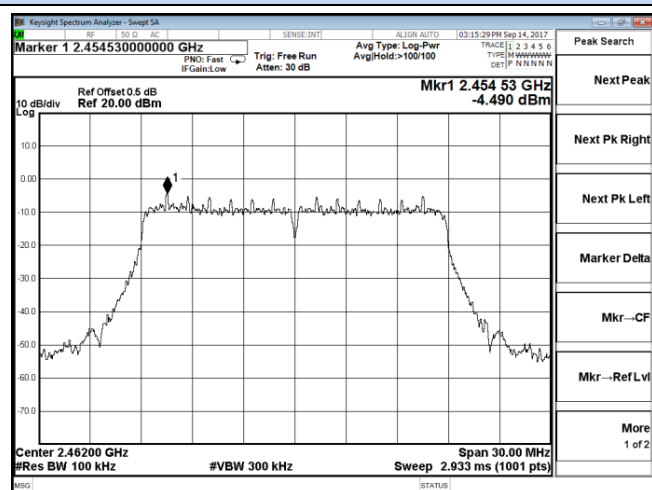

2447 MHz – 2477 MHz

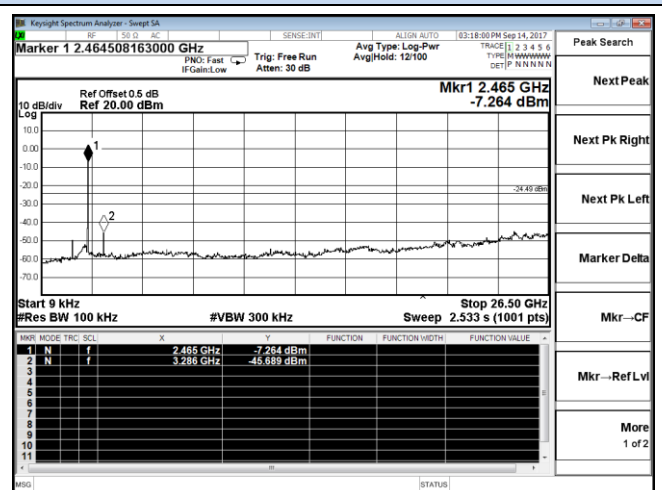

9 KHz – 26.5 GHz