

Prüfbericht-Nr.: Test report no.:	CN210UH4 (P15E-WiFi) 001	Auftrags-Nr.: Order no.:	238494087	Seite 1 von 44 Page 1 of 44
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2020-11-11	
Auftraggeber: Client:	Protech Systems Co., Ltd. No. 24, Lane 365, Yang Kuang Street, Neihu District, Taipei 114, Taiwan, R.O.C.			
Prüfgegenstand: Test item:	WiFi 802.11 a/b/g/n/ac & BT 4.1 M.2 module			
Bezeichnung / Typ-Nr.: Identification / Type no.:	P-WFBT_AP6356SD			
Auftrags-Inhalt: Order content:	FCC Part 15E Test report (WiFi 5GHz)			
Prüfgrundlage: Test specification:	FCC 47CFR Part 15: Subpart E Section 15.407			
Wareneingangsdatum: Date of sample receipt:	2020-11-25			
Prüfmuster-Nr.: Test sample no.:	A002956452-002			
Prüfzeitraum: Testing period:	2020-12-17 - 2021-06-11			
Ort der Prüfung: Place of testing:	EMC/RF Taipei Testing Site			
Prüflaboratorium: Testing laboratory:	Taipei Testing Laboratories			
Prüfergebnis*: Test result*:	Pass			
überprüft von: reviewed by:			genehmigt von: authorized by:	
Datum: Date:	2021-06-16	Ausstellungsdatum: Issue date:	2021-06-16	
Stellung / Position:	Senior Project Manager	Stellung / Position:	Senior Project Manager	
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	4 = ausreichend N/A = nicht anwendbar
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory F(ail) = failed a.m. test specification(s)	4 = sufficient N/A = not applicable
5 = mangelhaft N/T = nicht getestet				
5 = poor N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	15.407(a) & 15.203	Antenna Requirement	Pass
5.1.2	15.407(a)	Maximum Conducted Output Power	Pass
5.1.3	15.407(a)	26 dB Bandwidth	Pass
5.1.3	2.1049	99% Occupied Bandwidth	Pass
5.1.4	15.407(e)	6 dB Bandwidth (U-NII-3 Band only)	Pass
5.1.5	15.407(g)	Frequency Stability	Pass
5.1.6	15.407(a)	Power Spectral Density	Pass
5.1.7	15.407(b) & 15.205 & 15.209	Radiated Spurious Emissions and Band Edges	Pass
5.1.8	15.407(h) & KDB 905462 D02	Dynamic Frequency Selection	Pass
5.2.1	15.207	Mains Conducted Emission	Pass

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Contents

HISTORY OF THIS TEST REPORT	5
1. GENERAL REMARKS	6
1.1 COMPLEMENTARY MATERIALS.....	6
1.2 DECISION RULE OF CONFORMITY	6
2. TEST SITES	7
2.1 TEST LABORATORY	7
2.2 TEST FACILITY.....	7
2.3 TRACEABILITY	8
2.4 CALIBRATION	8
2.5 MEASUREMENT UNCERTAINTY	8
3. GENERAL PRODUCT INFORMATION.....	9
3.1 PRODUCT FUNCTION AND INTENDED USE	9
3.2 SYSTEM DETAILS AND RATINGS.....	9
3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.4 SUBMITTED DOCUMENTS.....	10
4. TEST SET-UP AND OPERATION MODES.....	11
4.1 PRINCIPLE OF CONFIGURATION SELECTION	11
4.2 CARRIER FREQUENCY AND CHANNEL.....	12
4.3 TEST OPERATION AND TEST SOFTWARE.....	13
4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	16
4.5 TEST SETUP DIAGRAM	17
4.6 DUTY CYCLE OF TEST SIGNAL	18
5. TEST RESULTS	19
5.1 TRANSMITTER REQUIREMENT & TEST SUITES	19
5.1.1 Antenna Requirement	19
5.1.2 Maximum Conducted Output Power	20
5.1.3 26 dB Bandwidth and 99% Occupied Bandwidth	24
5.1.4 6 dB Bandwidth (5725-5850MHz)	25
5.1.5 Frequency Stability Measurement.....	26
5.1.6 Power Spectral Density.....	31
5.1.7 Radiated Spurious Emissions	33
5.1.8 Dynamic Frequency Selection	38
5.2 MAINS EMISSION	43
5.2.1 Mains Conducted Emission.....	43

Prüfbericht - Nr.: CN210UH4 (P15E-WiFi) 001
Test Report No.

Seite 4 von 44
Page 4 of 44

APPENDIX A - TEST RESULT OF CONDUCTED

APPENDIX B - TEST RESULT OF RADIATED EMISSIONS & MAINS CONDUCTED EMISSION

APPENDIX SP - PHOTOGRAPHS OF TEST SETUP

APPENDIX EP - PHOTOGRAPHS OF EUT

Prüfbericht - Nr.: CN210UH4 (P15E-WiFi) 001
Test Report No.

Seite 5 von 44
Page 5 of 44

HISTORY OF THIS TEST REPORT

Report No.	Description	Date Issued
CN210UH4 (P15E-WiFi) 001	Original Release	2021-06-16

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A - Test Result of Conducted

Appendix B - Test Result of Radiated Emissions & Mains Conducted Emission

Appendix SP - Photographs of Test Setup

Appendix EP - Photographs of EUT

Applied Standard and Test Levels

Radio
FCC 47CFR Part 15: Subpart E Section 15.407
FCC 47CFR Part 2: Subpart J Section 2.1049
ANSI C63.10:2013
KDB 789033 D02 General UNII Test Procedures New Rules v02r01
KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
KDB 662911 D01 Multiple Transmitter Output v02r01

1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

2. Test Sites

2.1 Test Laboratory

Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

2.2 Test Facility

Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,
New Taipei City 244
Taiwan (R.O.C.)
FCC Registration No.: 226631
ISED Registration No.: 25563

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of k=2 to indicate a 95% level of confidence.

Emission Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (9 kHz ~ 30 MHz)	± 1.15 dB
Radiated Emission (30 MHz ~ 200 MHz)	± 1.32 dB
Radiated Emission (200 MHz ~ 1 GHz)	± 1.31 dB
Radiated Emission (1 GHz ~ 18 GHz)	± 1.53 dB
Radiated Emission (18 GHz ~ 40 GHz)	± 2.50 dB
Mains Conducted Emission	± 1.65 dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a WiFi 802.11 a/b/g/n/ac & BT 4.1 M.2 module. It contains a WLAN compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	WiFi 802.11 a/b/g/n/ac & BT 4.1 M.2 module
Type Identification	P-WFBT_AP6356SD
FCC ID	2AMRAP-WFBT-AP6356

Technical Specification of EUT

Item	EUT information
Operating Frequency	Band 1: 5180 MHz ~ 5240 MHz Band 2: 5260 MHz ~ 5320 MHz Band 3: 5500 MHz ~ 5700 MHz Band 4: 5745 MHz ~ 5825 MHz
Channel Number	Band 1: 4 for 802.11a, 802.11n HT20 / 802.11ac VHT20 2 for 802.11n HT40 / 802.11ac VHT40 1 for 802.11ac VHT80 Band 2: 4 for 802.11a, 802.11n HT20 / 802.11ac VHT20 2 for 802.11n HT40 / 802.11ac VHT40 1 for 802.11ac VHT80 Band 3: 11 for 802.11a, 802.11n HT20 / 802.11ac VHT20 5 for 802.11n HT40 / 802.11ac VHT40 2 for 802.11ac VHT80 Band 4: 5 for 802.11a, 802.11n HT20 / 802.11ac VHT20 2 802.11n HT40 / 802.11ac VHT40 1 for 802.11ac VHT80
Data Rate	802.11a: 54.0 / 48.0 / 36.0 / 24.0 / 18.0 / 12.0 / 9.0 / 6.0 Mbps 802.11n: up to MCS7 802.11ac: up to MCS9
Operation Voltage	3.3 Vdc
Modulation	OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)

Note: Only WLAN 5 GHz and BT can transmit at the same time.

Item	EUT information
Maximum Output Power (mW)	5180 ~ 5240 MHz: 51.52 5260 ~ 5320 MHz: 50.03 5500 ~ 5700 MHz: 91.00 5745 ~ 5825 MHz: 105.36
Maximum EIRP (mW)	5260 ~ 5320 MHz: 88.92 5500 ~ 5700 MHz: 161.81
DFS Mode	Slave without radar detection
Antenna Information	Refer to 5.1.1
Accessory Device	Refer to 4.4

3.3 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.4 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The test modes were adapted accordingly in reference to the instructions for use.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output expected by the customer and is going to be fixed on the firmware of the final end product.

Table for Parameters of Test Software Setting

802.11a		802.11n HT20 / 802.11ac VHT20		802.11n HT40 / 802.11ac VHT40		802.11ac VHT80	
Channel	Power Setting	Channel	Power Setting	Channel	Power Setting	Channel	Power Setting
36	50	36	53	38	37	42	14
40	50	40	55	46	55	58	36
48	50	48	55	54	55	106	30
52	51	52	55	62	47	122	48
60	46	60	58	102	37	155	65
64	45	64	56	110	55		
100	59	100	59	134	55		
116	59	116	59	151	65		
140	59	140	48	159	65		
149	69	149	69				
157	69	157	69				
165	69	165	69				

4.2 Carrier Frequency and Channel

Band	Channel	Frequency (MHz)	802.11a 802.11n HT20 802.11ac VHT20	802.11n HT40 802.11ac VHT40	802.11ac VHT80
U-NII-1 (Band 1)	36	5180	V		
	38	5190		V	
	40	5200	V		
	42	5210			V
	44	5220	V		
	46	5230		V	
	48	5240	V		
U-NII-2A (Band 2)	52	5260	V		
	54	5270		V	
	56	5280	V		
	58	5290			V
	60	5300	V		
	62	5310		V	
	64	5320	V		
U-NII-2C (Band 3)	100	5500	V		
	102	5510		V	
	104	5520	V		
	106	5530			V
	108	5540	V		
	110	5550		V	
	112	5560	V		
	116	5580	V		
	118	5590		V	
	120	5600	V		
	122	5610			V
	124	5620	V		
	126	5630		V	
	128	5640	V		
	132	5660	V		
	134	5670		V	
	136	5680	V		
	140	5700	V		
U-NII-3 (Band 4)	149	5745	V		
	151	5755		V	
	153	5765	V		
	155	5775			V
	157	5785	V		
	159	5795		V	
	161	5805	V		
	165	5825	V		

4.3 Test Operation and Test Software

Setup for testing: Test samples are provided with a USB interface which makes it possible to control them through a test software installed on a notebook computer.

This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed as below.

Test Software	Putty
---------------	-------

The samples were used as follows:
A002956452-002

Full test was applied on all test modes, but only worst case was shown.

The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and receivers.

Modulation Mode	Tx Function
802.11a	2TX (MIMO)
802.11n HT20	2TX (MIMO)
802.11n HT40	2TX (MIMO)
802.11ac VHT20	2TX (MIMO)
802.11ac VHT40	2TX (MIMO)
802.11ac VHT80	2TX (MIMO)

* The modulation and bandwidth are similar for 802.11n mode HT20/HT40 and 802.11ac mode VHT20/VHT40, therefore investigated worse case as representative mode in test report.

EUT Configure Mode	Applicable To				Description
	Antenna Port Conducted Measurement	Radiated Spurious Emissions above 1 GHz	Radiated Spurious Emissions below 1 GHz	Mains Conducted Emission	
-	√	√	√	√	-

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when position on **Y-plane**.
2. "-" means no effect.

Antenna Port Conducted Measurement

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency (MHz)	Available Channel	Tested Channel	Date Rate (Mbps)
-	802.11a	5180-5240	36 to 48	36, 40, 48	6.0
-		5260-5320	52 to 64	52, 60, 64	
-		5500-5700	100 to 140	100, 116, 140	
-		5745-5825	149 to 165	149, 157, 165	
-	802.11n HT20	5180-5240	36 to 48	36, 40, 48	6.5
-		5260-5320	52 to 64	52, 60, 64	
-		5500-5700	100 to 140	100, 116, 140	
-		5745-5825	149 to 165	149, 157, 165	
-	802.11n HT40	5180-5240	38 to 46	38, 46	MCS0
-		5260-5320	54 to 62	54, 62	
-		5500-5700	102 to 134	102, 110, 134	
-		5745-5825	151 to 159	151, 159	
-	802.11ac VHT80	5180-5240	42	42	MCS0
-		5260-5320	58	58	
-		5500-5700	106 to 122	106, 122	
-		5745-5825	155	155	
-	802.11a + BT	5180-5240 2402-2480	36 to 48 0 to 78	36 + 78	-

Radiated Spurious Emissions (Above 1 GHz)

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency (MHz)	Available Channel	Tested Channel	Date Rate (Mbps)
-	802.11a	5180-5240	36 to 48	36, 40, 48	6.0
-		5260-5320	52 to 64	52, 60, 64	
-		5500-5700	100 to 140	100, 116, 140	
-		5745-5825	149 to 165	149, 157, 165	
-	802.11n HT20	5180-5240	36 to 48	36, 40, 48	6.5
-		5260-5320	52 to 64	52, 60, 64	
-		5500-5700	100 to 140	100, 116, 140	
-		5745-5825	149 to 165	149, 157, 165	
-	802.11n HT40	5180-5240	38 to 46	38, 46	MCS0
-		5260-5320	54 to 62	54, 62	
-		5500-5700	102 to 134	102, 110, 134	
-		5745-5825	151 to 159	151, 159	
-	802.11ac VHT80	5180-5240	42	42	MCS0
-		5260-5320	58	58	
-		5500-5700	106 to 122	106, 122	
-		5745-5825	155	155	

Radiated Spurious Emissions (Below 1 GHz)

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency (MHz)	Available Channel	Tested Channel	Date Rate (Mbps)
-	802.11a	5180-5240	36 to 48	36	6.0
-	802.11n HT20	5260-5320	52 to 64	60	MCS 0
-	802.11ac VHT80	5500-5700	100 to 140	106	MCS 0
-	802.11a	5745-5825	149 to 165	149	6.0

Mains Conducted Emission Test

- ☒ Pre-Scan full test was applied on all test modes, but only worst case was shown.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency (MHz)	Available Channel	Tested Channel	Date Rate (Mbps)
-	802.11ac VHT80	5500-5700	100 to 140	106	MCS 0

Test Condition

Test Item	Ambient Temperature	Relative Humidity	Tested by
Conducted Measurement	20.3-24.7 °C	43.8-66 %	Stanislas Charles
Radiated Spurious Emissions above 1 GHz	20.5-23.3 °C	59.3-63.1 %	Simon Tsai
Radiated Spurious Emissions below 1 GHz	20.5-23.3 °C	59.3-63.1 %	Simon Tsai
Mains Conducted Emission	21.9 °C	59 %	Temo Chen

4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Accessory of EUT


None

Support Unit


Support Unit								
No	Description	Brand	Model	S/N	Shielded	Ferrite Core (Qty)	Length (cm)	Remark
A	Adapter	TUE	GQ24-120200-AX	N/A	No	0	150	Convert to 3.3Vdc
-	USB HUB	e-sense	01-GUM430	N/A	-	-	-	--
-	USB Cable	Protech	E148000	N/A	Yes	0	50	--
-	USB Keyboard	Dell	KB4021	N/A	Yes	0	180	--
-	USB Mouse	Lenovo	SM-8823	N/A	Yes	0	180	--

4.5 Test Setup Diagram

<Radiated Spurious Emissions mode>

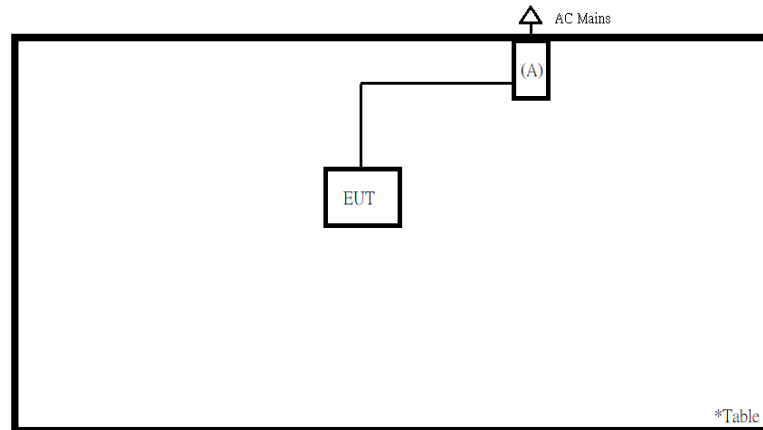


<Mains Conducted Emission mode>

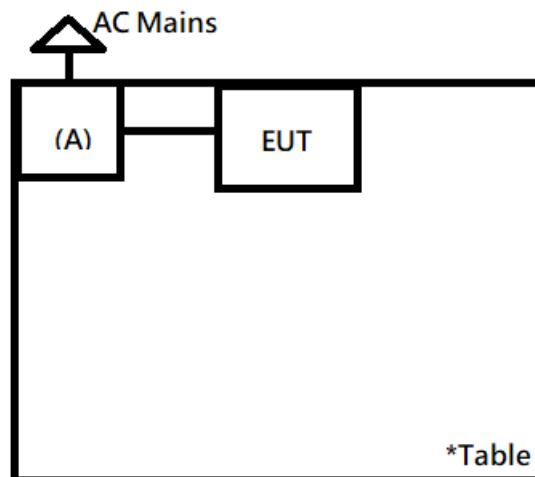

4.6 Duty Cycle of Test Signal

Mode	On + Off Time (ms)	On Time (ms)	Duty Cycle (%)	Duty Factor (dB)
802.11a	1.495	1.39	92.98	0.32
802.11n HT20	0.775	0.665	85.81	0.66
802.11n HT40	0.445	0.310	69.66	1.57
802.11ac VHT80	0.163	0.064	39.26	4.06

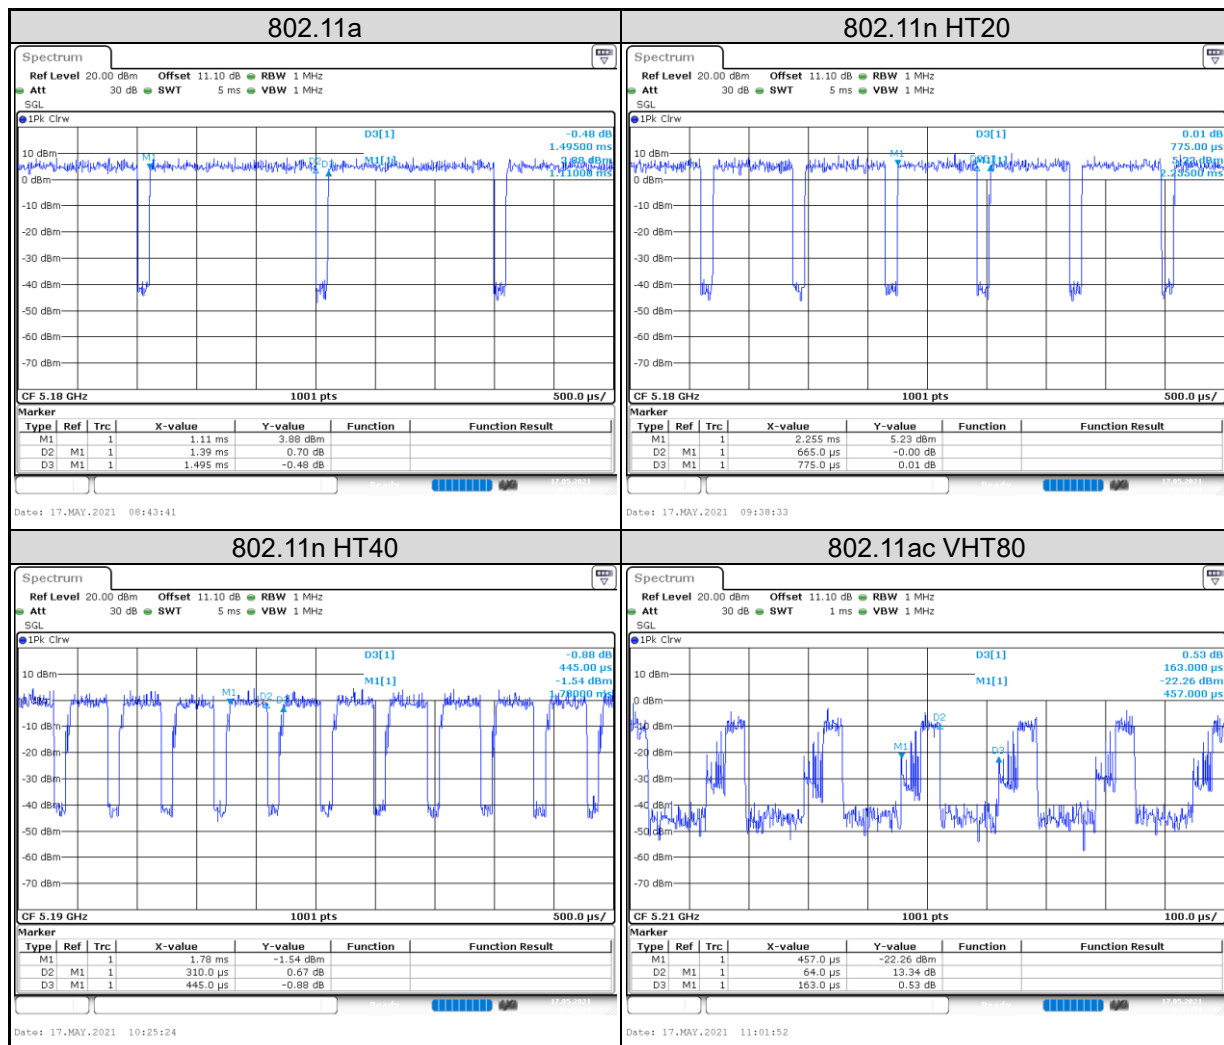

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

Requirement Use of approved antennas only

According to the manufacturer declaration, the antenna information is as listed below. The antenna is with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.

ANT	Brand	Product No.	Product Name	Antenna Gain (dBi)	Antenna Type	Antenna Position	Remark
ANT1	Radiation Technology, Inc.	C0486-ANG0016	MT-5750 2.4G/5G Antenna	2.5	PIFA	Main Antenna	Tested antenna
ANT2	Radiation Technology, Inc.	C0486-ANG0027	MH-5102 Wi-Fi 2.4G/5G Antenna	2.5	PIFA	Main Antenna	-
ANT3	Radiation Technology, Inc.	C0486-ANG0028	MH-5102 WiFi/BT Antenna	2.5	PIFA	Aux. Antenna	Tested antenna
ANT4	Joymax Electronics Co., Ltd.	TBF-RT03MPB-W70	MT-5751 WiFi/BT Antenna B	2.24	PIFA	Aux. Antenna	-

Antenna 3 and antenna 4 are the same type, they have similar characteristics on in-band and out-of-band. As for test, the higher gain antenna 1 & antenna 3 were used for testing.

Refer to EUT photo for details.

5.1.2 Maximum Conducted Output Power

Limit

Operation Band	EUT Category	Limit
U-NII-1	Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125 mW (21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
	Fixed point-to-point Access Point	1 Watt (30 dBm)
	Indoor Access Point	1 Watt (30 dBm)
	Mobile and Portable client device	250 mW (24 dBm)
U-NII-2A	---	250 mW (24 dBm) or 11 dBm + 10 log B*
U-NII-2C	---	250 mW (24 dBm) or 11 dBm + 10 log B*
U-NII-3	---	1 Watt (30 dBm)

Note: B* is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;


Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = 5 log(N_{ANT}/N_{SS}) dB or 3 dB, whichever is less for 20 MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = 10 log(N_{ANT}/N_{SS}) dB.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Power Meter	Anritsu	ML2495A	1901008	2021/3/24	2022/3/23	2021/5/16	2021/6/11
Power Sensor	Anritsu	MA2411B	1725269	2021/3/24	2022/3/23	2021/5/16	2021/6/11

Test Procedures

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to AVERAGE. Duty factor is not added to measured value.

Test Result

<802.11a>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
36	5180	12.52	11.88	15.22	33.28	24.00
40	5200	12.36	11.81	15.10	32.39	24.00
48	5240	12.60	12.07	15.35	34.30	24.00
52	5260	12.45	12.04	15.26	33.57	24.00
60	5300	11.31	11.18	14.26	26.64	24.00
64	5320	10.99	11.02	14.02	25.21	24.00
100	5500	13.60	13.82	16.72	47.01	24.00
116	5580	13.68	13.80	16.75	47.32	24.00
140	5700	13.45	13.21	16.34	43.07	24.00
149	5745	16.15	16.48	19.33	85.67	30.00
157	5785	15.57	16.08	18.84	76.61	30.00
165	5825	15.70	15.62	18.67	73.63	30.00

Note:

For U-NII-2A, U-NII-2C Band:

Ant 1

1. $11 \text{ dBm} + 10\log(21.54) = 24.33 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(21.78) = 24.38 \text{ dBm} > 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(21.70) = 24.36 \text{ dBm} > 24 \text{ dBm}$.
4. $11 \text{ dBm} + 10\log(21.86) = 24.40 \text{ dBm} > 24 \text{ dBm}$.
5. $11 \text{ dBm} + 10\log(21.54) = 24.33 \text{ dBm} > 24 \text{ dBm}$.
6. $11 \text{ dBm} + 10\log(21.74) = 24.37 \text{ dBm} > 24 \text{ dBm}$.

Ant 2

1. $11 \text{ dBm} + 10\log(21.74) = 24.37 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(21.54) = 24.33 \text{ dBm} > 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(21.70) = 24.36 \text{ dBm} > 24 \text{ dBm}$.
4. $11 \text{ dBm} + 10\log(21.66) = 24.36 \text{ dBm} > 24 \text{ dBm}$.
5. $11 \text{ dBm} + 10\log(21.42) = 24.31 \text{ dBm} > 24 \text{ dBm}$.
6. $11 \text{ dBm} + 10\log(21.54) = 24.33 \text{ dBm} > 24 \text{ dBm}$.

<802.11n HT20>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
36	5180	13.12	12.53	15.85	38.42	24.00
40	5200	13.62	12.95	16.31	42.74	24.00
48	5240	13.68	13.07	16.40	43.61	24.00
52	5260	13.29	13.12	16.22	41.84	24.00
60	5300	14.11	13.85	16.99	50.03	24.00
64	5320	13.58	13.43	16.52	44.83	24.00
100	5500	13.74	13.70	16.73	47.10	24.00
116	5580	13.67	13.47	16.58	45.51	24.00
140	5700	10.52	10.06	13.31	21.41	24.00
149	5745	17.32	17.11	20.23	105.36	30.00
157	5785	16.80	16.33	19.58	90.82	30.00
165	5825	16.76	15.72	19.28	84.75	30.00

Note:

For U-NII-2A, U-NII-2C Band:

Ant 1

1. $11 \text{ dBm} + 10\log(22.02) = 24.43 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(21.90) = 24.40 \text{ dBm} > 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(21.90) = 24.40 \text{ dBm} > 24 \text{ dBm}$.
4. $11 \text{ dBm} + 10\log(22.06) = 24.44 \text{ dBm} > 24 \text{ dBm}$.
5. $11 \text{ dBm} + 10\log(21.82) = 24.39 \text{ dBm} > 24 \text{ dBm}$.
6. $11 \text{ dBm} + 10\log(22.06) = 24.44 \text{ dBm} > 24 \text{ dBm}$.

Ant 2

1. $11 \text{ dBm} + 10\log(21.66) = 24.36 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(21.78) = 24.38 \text{ dBm} > 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(21.62) = 24.35 \text{ dBm} > 24 \text{ dBm}$.
4. $11 \text{ dBm} + 10\log(21.94) = 24.41 \text{ dBm} > 24 \text{ dBm}$.
5. $11 \text{ dBm} + 10\log(21.74) = 24.37 \text{ dBm} > 24 \text{ dBm}$.
6. $11 \text{ dBm} + 10\log(21.66) = 24.36 \text{ dBm} > 24 \text{ dBm}$.

Prüfbericht - Nr.: CN210UH4 (P15E-WiFi) 001
Test Report No.
Seite 23 von 44
Page 23 of 44
<802.11n HT40>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
38	5190	10.31	9.83	13.09	20.36	24.00
46	5230	14.30	13.91	17.12	51.52	24.00
54	5270	13.83	13.71	16.78	47.65	24.00
62	5310	12.15	11.42	14.81	30.27	24.00
102	5510	8.66	8.71	11.70	14.78	24.00
110	5550	13.17	13.08	16.14	41.07	24.00
134	5670	12.90	12.71	15.82	38.16	24.00
151	5755	16.73	15.28	19.08	80.83	30.00
159	5795	16.36	14.82	18.67	73.59	30.00

Note:

For U-NII-2A, U-NII-2C Band:

Ant 1

1. $11 \text{ dBm} + 10\log(41.08) = 27.14 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(40.92) = 27.12 \text{ dBm} > 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(41.00) = 27.13 \text{ dBm} > 24 \text{ dBm}$.
4. $11 \text{ dBm} + 10\log(40.84) = 27.11 \text{ dBm} > 24 \text{ dBm}$.
5. $11 \text{ dBm} + 10\log(41.24) = 27.15 \text{ dBm} > 24 \text{ dBm}$.

Ant 2

1. $11 \text{ dBm} + 10\log(40.68) = 27.09 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(40.92) = 27.12 \text{ dBm} > 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(40.92) = 27.12 \text{ dBm} > 24 \text{ dBm}$.
4. $11 \text{ dBm} + 10\log(40.84) = 27.11 \text{ dBm} > 24 \text{ dBm}$.
5. $11 \text{ dBm} + 10\log(41.00) = 27.13 \text{ dBm} > 24 \text{ dBm}$.

<802.11ac VHT80>

Channel	Channel Frequency (MHz)	Average Output Power (dBm)		Total Power		Limit (dBm)
		Chain 0	Chain 1	(dBm)	(mW)	
42	5210	4.13	9.32	10.47	11.14	24.00
58	5290	8.56	8.81	11.70	14.78	24.00
106	5530	6.92	7.03	9.99	9.97	24.00
122	5610	11.22	10.97	14.11	25.75	24.00
155	5775	15.54	15.09	18.33	68.09	30.00

Note:

For U-NII-2A, U-NII-2C Band:

Ant 1

1. $11 \text{ dBm} + 10\log(82.16) = 30.15 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(82.00) = 30.14 \text{ dBm} > 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(81.68) = 30.12 \text{ dBm} > 24 \text{ dBm}$.


Ant 2

1. $11 \text{ dBm} + 10\log(81.20) = 30.10 \text{ dBm} > 24 \text{ dBm}$.
2. $11 \text{ dBm} + 10\log(81.20) = 30.10 \text{ dBm} > 24 \text{ dBm}$.
3. $11 \text{ dBm} + 10\log(81.20) = 30.10 \text{ dBm} > 24 \text{ dBm}$.

5.1.3 26 dB Bandwidth and 99% Occupied Bandwidth

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2021/1/29	2022/1/28	2021/5/16	2021/6/11

Test Procedure

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
- For 99% Bandwidth Measurement, the transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.


Test Results

Please refer to Appendix A

5.1.4 6 dB Bandwidth (5725-5850MHz)

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2021/1/29	2022/1/28	2021/5/16	2021/6/11

Test Procedure

MEASUREMENT PROCEDURE REF

- Set resolution bandwidth (RBW) = 100 kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


Test Results

Please refer to Appendix A

5.1.5 Frequency Stability Measurement

Kind of Test Site Shielded room

Test Setup

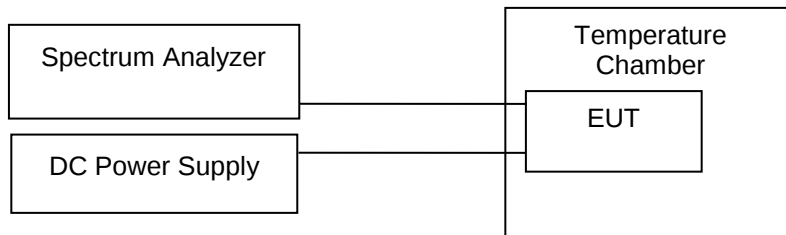

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2021/1/29	2022/1/28	2021/5/16	2021/5/16
Thermal Chamber	Giant Force	GHT-150-40-CP-SD	MAA1902-011	2021/3/4	2022/3/3	2021/5/16	2021/5/16

Test Procedure

- To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
- The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10 dB lower than the measured peak value.
- The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

Test Results
<ANT 1>

Frequency (MHz)	5200			
Voltage (V)	Measurement Frequency (MHz)			Max. Deviation (ppm)
3.63	5199.99711			0.556
3.3	5199.99219			1.502
2.97	5199.99711			0.556
Temperature (°C)	Measurement Frequency (MHz)			
	0 Minute	2 Minute	5 Minute	10 Minute
50	5200.00984	5200.01274	5200.00753	5200.01187
40	5199.9974	5199.99682	5199.99566	5199.99653
30	5199.99392	5199.99566	5199.99537	5199.99566
20	5199.99219	5199.99276	5199.99276	5199.99276
10	5200.02258	5200.02258	5200.02258	5200.02229
0	5200.03734	5200.03763	5200.03734	5200.03734
-10	5200.0437	5200.0437	5200.04342	5200.04342
-20	5200.05123	5200.05094	5200.05123	5200.05094
Max. Deviation (ppm)	9.852	9.796	9.852	9.796

Frequency (MHz)	5300			
Voltage (V)	Measurement Frequency (MHz)			Max. Deviation (ppm)
3.63	5299.99653			0.655
3.3	5299.99334			1.257
2.97	5299.99624			0.709
Temperature (°C)	Measurement Frequency (MHz)			
	0 Minute	2 Minute	5 Minute	10 Minute
50	5300.05499	5300.05731	5300.05615	5300.05673
40	5300.03531	5300.03271	5300.03242	5300.03386
30	5299.99566	5299.99537	5299.99537	5299.99537
20	5299.99334	5299.99276	5299.9919	5299.9919
10	5300.02431	5300.02489	5300.02489	5300.0246
0	5300.03705	5300.03705	5300.03705	5300.03705
-10	5300.04428	5300.04457	5300.04457	5300.04428
-20	5300.02923	5300.02923	5300.02865	5300.02865
Max. Deviation (ppm)	10.375	10.813	10.594	10.704

Prüfbericht - Nr.: CN210UH4 (P15E-WiFi) 001
Test Report No.
Seite 28 von 44
Page 28 of 44

Frequency (MHz)	5580			
Voltage (V)	Measurement Frequency (MHz)			Max. Deviation (ppm)
3.63	5579.99711			0.518
3.3	5579.99305			1.246
2.97	5579.99711			0.518
Temperature (°C)	Measurement Frequency (MHz)			
	0 Minute	2 Minute	5 Minute	10 Minute
50	5580.05789	5580.0576	5580.05644	5580.05702
40	5579.99566	5579.99624	5579.99624	5579.99624
30	5579.99508	5579.99508	5579.99508	5579.99508
20	5579.99305	5579.99305	5579.99305	5579.99305
10	5580.02315	5580.02315	5580.02315	5580.02315
0	5580.03907	5580.03907	5580.03907	5580.03878
-10	5580.04689	5580.04718	5580.04689	5580.04718
-20	5580.05673	5580.05615	5580.05615	5580.05644
Max. Deviation (ppm)	10.375	10.323	10.115	10.219

Frequency (MHz)	5785			
Voltage (V)	Measurement Frequency (MHz)			Max. Deviation (ppm)
3.63	5784.99711			0.500
3.3	5785.0055			0.951
2.97	5784.99711			0.500
Temperature (°C)	Measurement Frequency (MHz)			
	0 Minute	2 Minute	5 Minute	10 Minute
50	5785.06483	5785.06483	5785.06512	5785.06512
40	5784.99566	5784.99508	5784.99653	5784.99537
30	5784.99479	5784.99479	5784.9945	5784.99479
20	5785.0055	5785.00608	5785.00637	5785.00608
10	5785.02373	5785.02402	5785.02373	5785.02373
0	5785.04023	5785.03994	5785.03994	5785.03994
-10	5785.0492	5785.05036	5785.04747	5785.04978
-20	5785.05789	5785.05789	5785.05789	5785.05789
Max. Deviation (ppm)	11.207	11.207	11.257	11.257

<ANT 2>

Frequency (MHz)	5200			
Voltage (V)	Measurement Frequency (MHz)			Max. Deviation (ppm)
3.63	5199.99711			0.556
3.3	5199.99363			1.225
2.97	5199.99711			0.556
Temperature (°C)	Measurement Frequency (MHz)			
	0 Minute	2 Minute	5 Minute	10 Minute
50	5200.01158	5200.00868	5200.0081	5200.00926
40	5199.99595	5199.99595	5199.99653	5199.99595
30	5199.99595	5199.99595	5199.99537	5199.99566
20	5199.99363	5199.99247	5199.99247	5199.99247
10	5200.02344	5200.02344	5200.02344	5200.02315
0	5200.03734	5200.03734	5200.03734	5200.03705
-10	5200.0437	5200.0437	5200.04342	5200.0437
-20	5200.05094	5200.05094	5200.05094	5200.05094
Max. Deviation (ppm)	9.796	9.796	9.796	9.796

Frequency (MHz)	5300			
Voltage (V)	Measurement Frequency (MHz)			Max. Deviation (ppm)
3.63	5299.99624			0.709
3.3	5300.00289			0.545
2.97	5299.99624			0.709
Temperature (°C)	Measurement Frequency (MHz)			
	0 Minute	2 Minute	5 Minute	10 Minute
50	5300.02663	5300.05268	5300.05731	5300.05412
40	5300.01187	5300.03155	5300.03068	5300.0356
30	5299.99537	5299.99508	5299.99566	5299.99537
20	5300.00289	5300.00318	5300.00289	5300.0026
10	5300.02258	5300.02229	5300.02229	5300.02229
0	5300.03734	5300.03705	5300.03705	5300.03705
-10	5300.04457	5300.04457	5300.04457	5300.04428
-20	5300.03271	5300.03039	5300.03039	5300.03097
Max. Deviation (ppm)	8.571	9.940	10.813	10.211

Prüfbericht - Nr.: CN210UH4 (P15E-WiFi) 001
Test Report No.
Seite 30 von 44
Page 30 of 44

Frequency (MHz)	5580			
Voltage (V)	Measurement Frequency (MHz)			Max. Deviation (ppm)
3.63	5579.99711			0.518
3.3	5579.99276			1.297
2.97	5579.9974			0.466
Temperature (°C)	Measurement Frequency (MHz)			
	0 Minute	2 Minute	5 Minute	10 Minute
50	5580.05673	5580.0576	5580.05904	5580.05731
40	5579.99653	5579.99595	5579.99624	5579.99595
30	5579.99508	5579.99508	5579.99508	5579.99479
20	5579.99276	5579.99276	5579.99276	5579.99276
10	5580.02344	5580.02373	5580.02344	5580.02315
0	5580.03878	5580.03907	5580.03878	5580.03878
-10	5580.04631	5580.04689	5580.04718	5580.04718
-20	5580.05615	5580.05615	5580.05615	5580.05586
Max. Deviation (ppm)	10.167	10.323	10.581	10.271

Frequency (MHz)	5785			
Voltage (V)	Measurement Frequency (MHz)			Max. Deviation (ppm)
3.63	5784.99682			0.550
3.3	5785.00724			1.252
2.97	5784.99682			0.550
Temperature (°C)	Measurement Frequency (MHz)			
	0 Minute	2 Minute	5 Minute	10 Minute
50	5785.05904	5785.06686	5785.06425	5785.06483
40	5784.99566	5784.99653	5784.99595	5784.99624
30	5785.99479	5785.99479	5785.99479	5785.99479
20	5785.00724	5785.00174	5785.00579	5785.0055
10	5785.02344	5785.02315	5785.02344	5785.02315
0	5785.04023	5785.04023	5785.04023	5785.04023
-10	5785.04949	5785.04805	5785.04863	5785.04834
-20	5785.05789	5785.05789	5785.05789	5785.05789
Max. Deviation (ppm)	171.960	171.960	171.960	171.960

5.1.6 Power Spectral Density

Limit

For the 5.15~5.25GHz Bands:

For mobile and portable client devices in the 5.15~5.25GHz band, the Maximum Power spectral density shall not exceed 11dBm/MHz. For an indoor access point operating in the band 5.15~5.25GHz, the maximum power spectral density shall not exceed 17dBm/MHz.

For the 5.25~5.35GHz and 5.47~5.725GHz Bands:


The maximum power spectral density shall not exceed 11dBm/MHz.

For the 5.745~5.85GHz Bands:

The maximum power spectral density shall not exceed 30dBm/500kHz.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2021/1/29	2022/1/28	2021/5/16	2021/6/11

Test Procedure

<For U-NII-1, U-NII-2A, U-NII-2C band>

Using method SA-2

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW ≥ 3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to "free run".
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value and add 10 log (1/duty cycle)

<✖For U-NII-3>

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 500 kHz, Set VBW $\geq$ 3 RBW, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 500 kHz band segment within the fundamental EBW.
4. Sweep time = auto, trigger set to "free run".
5. Trace average at least 100 traces in power averaging mode.
6. Record the max value and add $10 \log (1/\text{duty cycle})$

For MIMO mode, calculation method follows FCC KDB 662911 Method 2) a) of power density measurement using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.

Test Results

Please refer to Appendix A

5.1.7 Radiated Spurious Emissions

Limit


Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Emissions radiated outside the restricted and authorized frequency bands must either comply with the radiated emission limits specified for the restricted bands or in §15.407(b).


Kind of Test Site 3m Semi-Anechoic Chamber

Test Setup


<Radiated Emissions below 30 MHz>

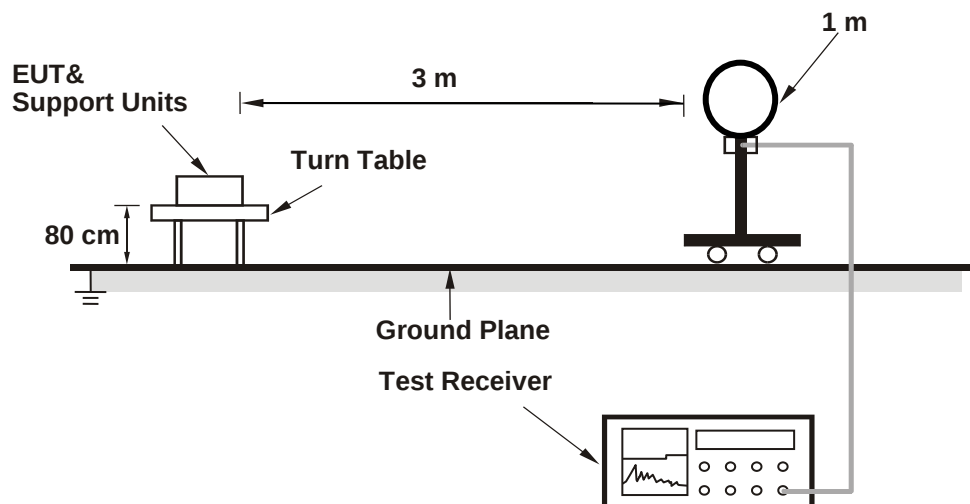

<Radiated Emissions 30 MHz to 1 GHz>

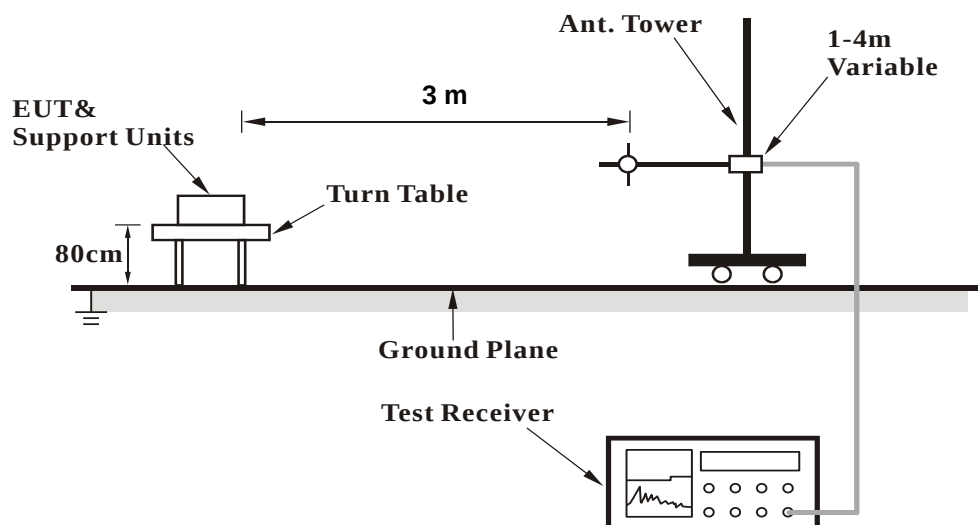

<Radiated Emissions above 1 GHz>

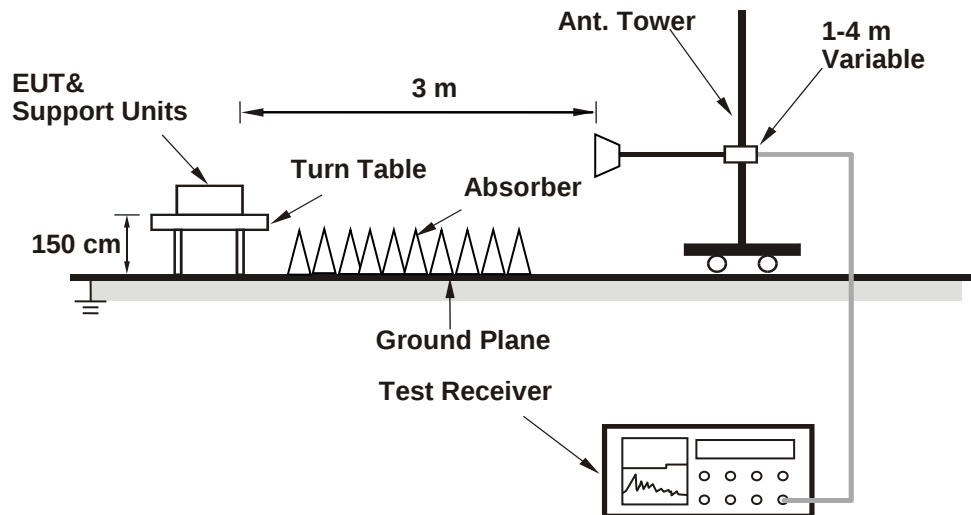

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Test Instruments

Test Period: 2021-05-05 ~ 2021-06-10

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV40	101509	2021/3/24	2022/3/23
Receiver	R&S	ESR7	102108	2021/3/17	2022/3/16
Bilog Antenna	SCHWARZBECK	VULB-9168	00950	2021/1/25	2022/1/24
Horn Antenna	ETS-Lindgren	3117	00218929	2020/11/6	2021/11/5
LF-AMP	Agilent	8447D	2727A05146	2021/2/1	2022/1/31
HF-AMP + AC source	EMCI	EMC051845SE	980635	2021/2/1	2022/1/31
HF-AMP + AC source	EMCI	EMC184045SE	980656	2021/2/9	2022/2/8
Horn Antenna	SCHWARZBECK	BBHA 9170	00890	2021/4/14	2022/4/13
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104EA	800057/4EA	2021/4/14	2022/4/13
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104	802244/4	2021/4/14	2022/4/13
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104	MY37203/4	2021/4/14	2022/4/13
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	800897/2EA	2021/3/11	2022/3/10
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	800902/2EA	2021/3/11	2022/3/10
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	801026/2EA	2021/3/11	2022/3/10
Loop Antenna	Chance Most	EMCILPA600 +calibration	287	2021/1/18	2022/1/17

Test Procedures**For Radiated Emissions below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel (OPEN), perpendicular (CLOSE), and ground-parallel (GROUND) orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated Emissions above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98 %) or 10 Hz (Duty cycle ≥ 98 %) for Average detection (AV) at frequency above 1 GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

Prüfbericht - Nr.: CN210UH4 (P15E-WiFi) 001
Test Report No.

Seite 37 von 44
Page 37 of 44

5. The Radiated Emissions testing was performed in the X(E1), Y(H) and Z(E2) axis orientation. The worst-case Axis orientation is recorded in this test report.
6. The calculation formula is explained as follows:
Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

Test Results

Please refer to Appendix B.

5.1.8 Dynamic Frequency Selection

Limit

<DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection>

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	


<DFS Response Requirement Values>

Parameter	Value
<i>Non-occupancy period</i>	Minimum 30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds See Note 1.
<i>Channel Closing Transmission Time</i>	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
<i>U-NII Detection Bandwidth</i>	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.
Note 1: <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel</i> move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the <i>U-NII Detection Bandwidth</i> detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	


Kind of Test Site Shielded room

Test Setup


<Setup for Master with injection at the Master>

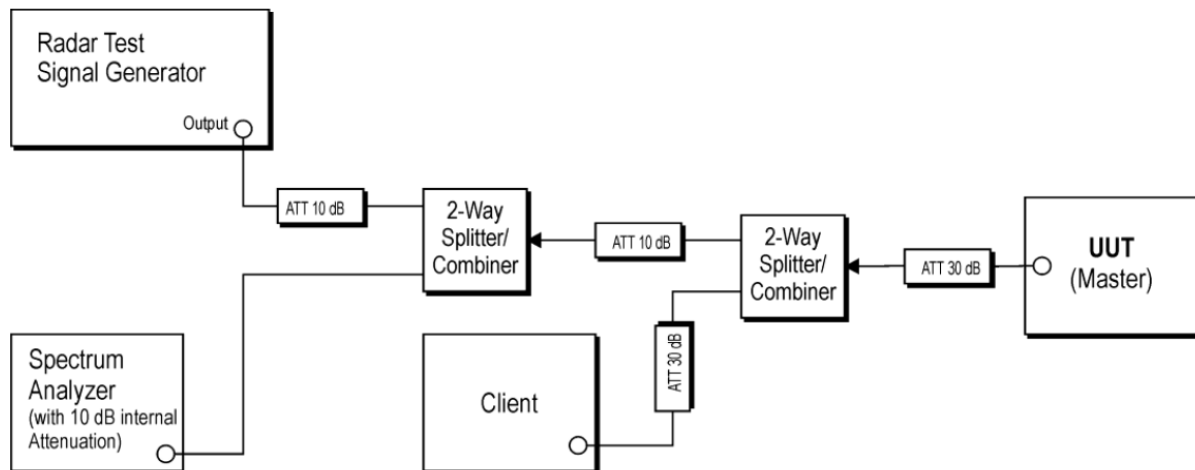

<Setup for Client with injection at the Master>

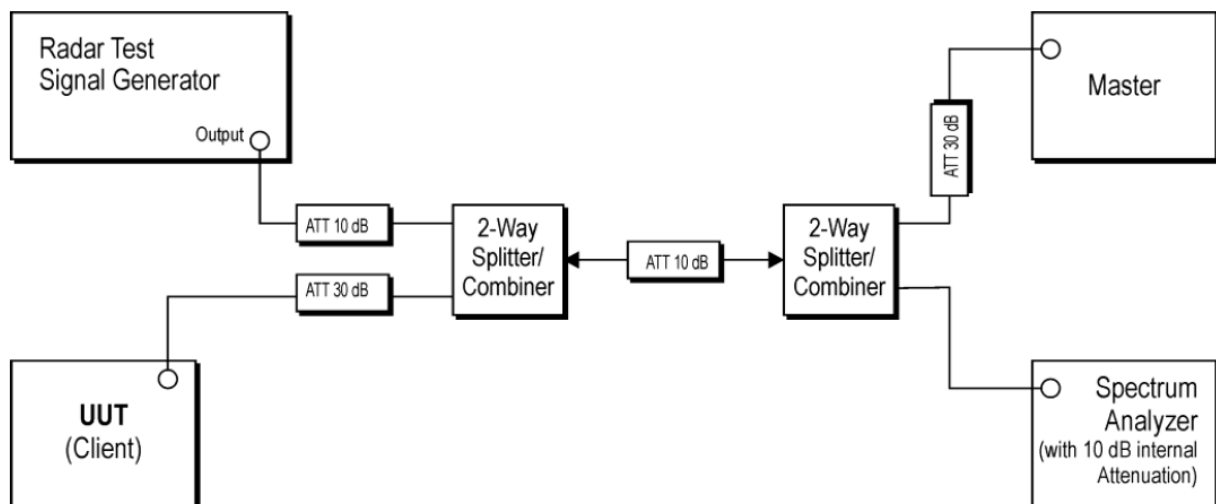

<Setup for Client with injection at the Client>

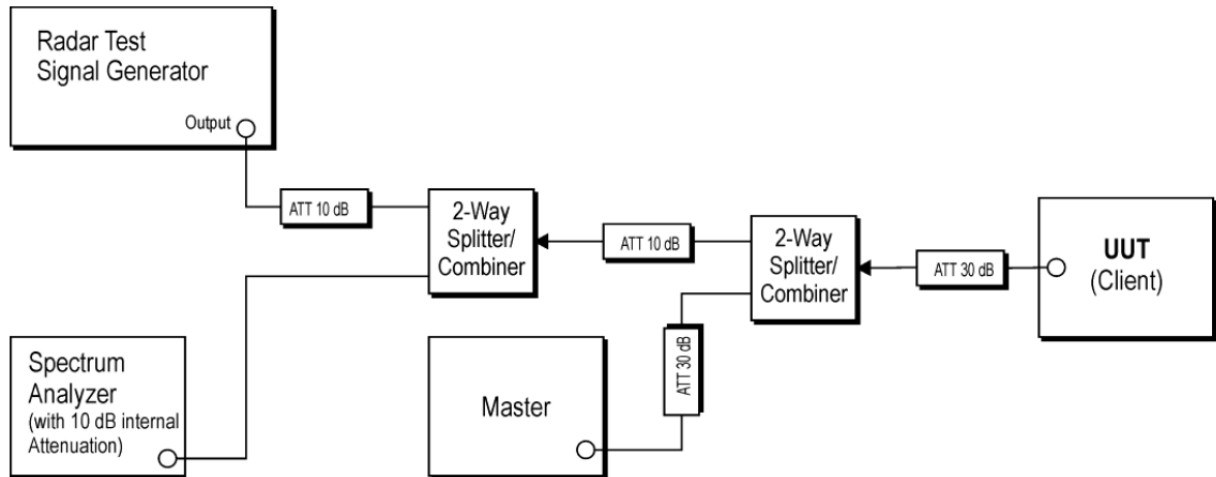

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	Agilent	N9010A	MY53470241	2020/6/2	2021/6/1	2020/12/17	2020/12/17
MXG Vector Signal Generator	Agilent	N5182B	MY53050524	2020/4/7	2021/4/6	2020/12/17	2020/12/17

Requirement

Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client Without Radar Detection
<i>DFS Detection Threshold</i>	Yes	Not required
<i>Channel Closing Transmission Time</i>	Yes	Yes
<i>Channel Move Time</i>	Yes	Yes
<i>U-NII Detection Bandwidth</i>	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
<i>U-NII Detection Bandwidth and Statistical Performance Check</i>	All BW modes must be tested	Not required
<i>Channel Move Time and Channel Closing Transmission Time</i>	Test using widest BW mode available	Test using the widest BW mode available for the link
<i>All other tests</i>	Any single BW mode	Not required


Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

Test Results

<802.11ac VHT80>

Non-occupancy period

Channel (MHz)	Limit (minute)	Result
5530	30	Pass

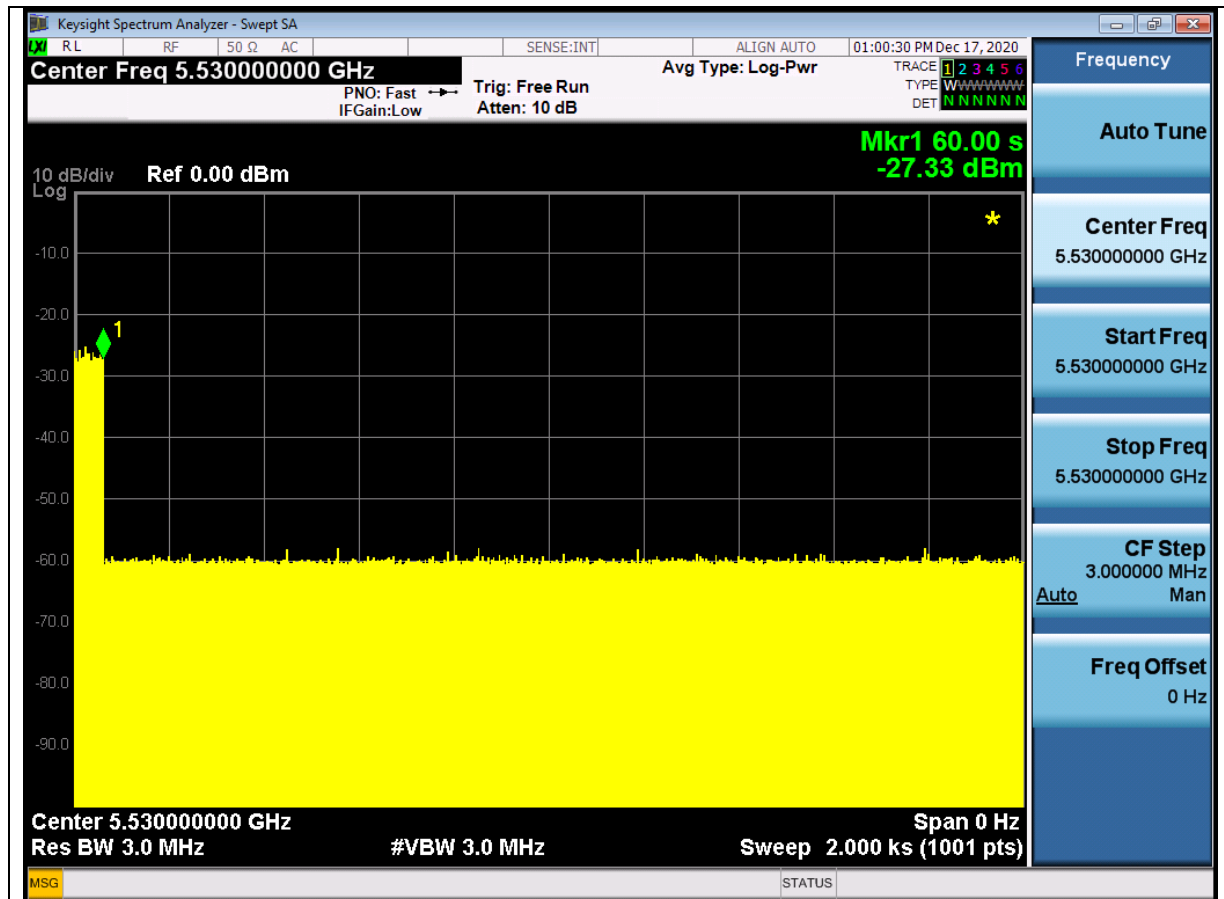

Prüfbericht - Nr.: CN210UH4 (P15E-WiFi) 001
Test Report No.


Seite 42 von 44
Page 42 of 44

Channel Moving Time


Channel (MHz)	Channel Move Time (s)	Limit (s)	Result
5530	5.6343656	10	Pass

Channel Closing Transmission Time

Channel (MHz)	Channel Closing Transmission Time (ms)	Limit (ms)	Result
5530	99.9001	200	Pass

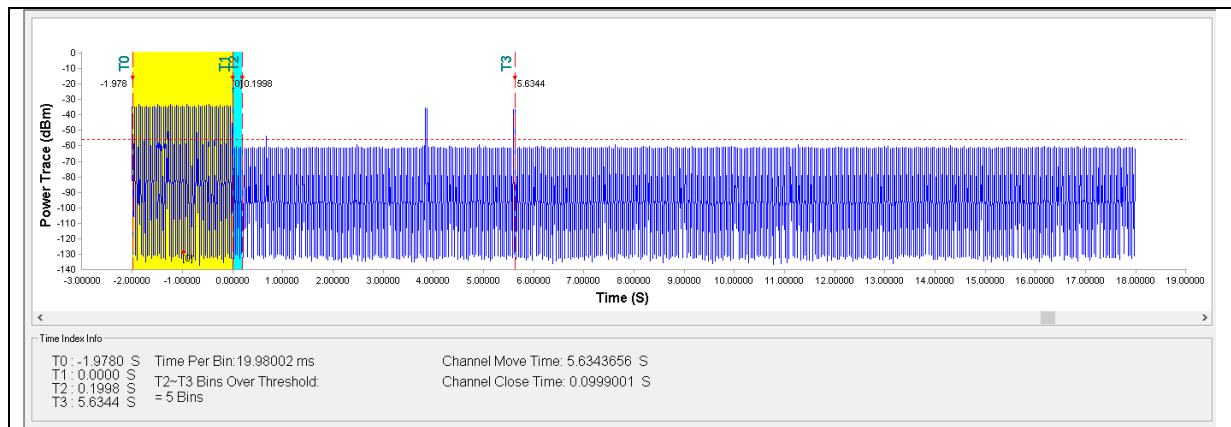

Radar Level

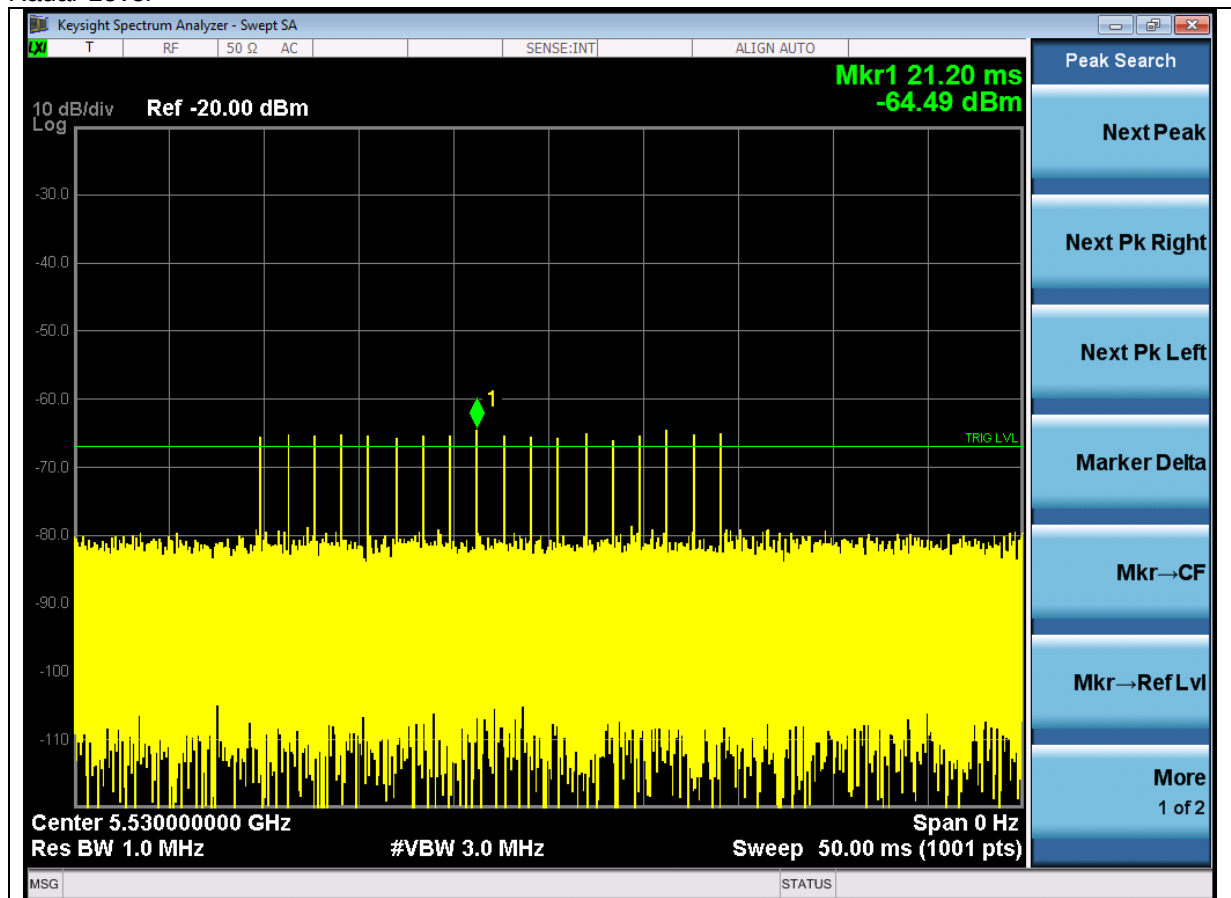

5.2 Mains Emission


5.2.1 Mains Conducted Emission

Limit

Mains Conducted emissions as defined in §15.207 must comply with the mains conducted emission limits.

Kind of Test Site Shielded room

Test Setup

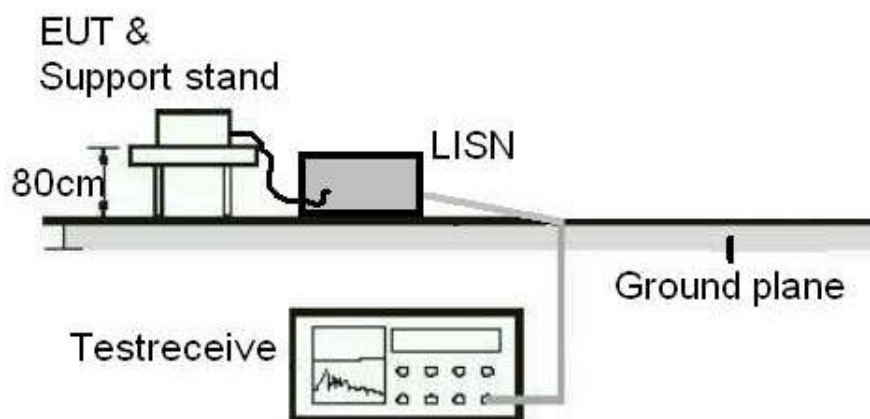

Test Instruments

Test Date: 2021-05-23

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
TWO-LINE V-NETWORK	R&S	ENV216	1816064	2020/9/10	2021/9/9
EMI Test Receiver	R&S	ESCI	1816063	2020/11/17	2021/11/16
RF Cable	N/A	N/A	EMC-003	2020/11/15	2021/11/14

Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

Test Results

Please refer to Appendix B.