



EMC TEST REPORT

Report No.: SET2022-05684

Product Name: Thermal Imaging Monocular

FCC ID: 2AMSPDTI335

IC: 22938-DTI335

Model No. : DTI 3/35, DTI 3/25

Applicant: Carl Zeiss AG

Address: Carl-Zeiss-Str. 22 73447 Oberkochen, Germany

Received Date: 2022.04.17

Dates of Testing: 2022.04.17—2022.05.13

Issued by: CCIC Southern Testing Co., Ltd.

Lab Location: Electronic Testing Building, No. 43 Shahe Road, Xili Street,
Nanshan District, Shenzhen, Guangdong, China.

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of **19** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product Name..... Thermal Imaging Monocular

Model No. DTI 3/35, DTI 3/25

Trade name ZEISS

Applicant..... Carl Zeiss AG

Applicant Address..... Carl-Zeiss-Str. 22 73447 Oberkochen, Germany

Manufacturer Carl Zeiss AG

Manufacturer Address Carl-Zeiss-Str. 22 73447 Oberkochen, Germany

Test Standards..... 47 CFR Part 15 Subpart B
ICES-003 Issue 7

Test Result..... PASS

Tested by Ruihong Xie

Ruihong Xie Test Engineer

2022.05.13

Reviewed by Chris You

Chris You Senior Engineer

2022.05.13

Approved by Shuangwen Zhang

Shuangwen Zhang, Manager

2022.05.13

**TABLE OF CONTENTS**

1.	GENERAL INFORMATION	4
1.1	EUT Description	4
1.2	Test Standards and Results	5
1.3	Facilities and Accreditations	6
1.3.1	Facilities	6
1.3.2	Test Environment Conditions	6
1.3.3	Measurement Uncertainty	6
2.	TEST CONDITIONS SETTING	7
2.1	Test Peripherals	7
2.2	Test Mode	7
2.3	Test Setup and Equipments List	8
2.3.1	Conducted Emission	8
2.3.2	Radiated Emission	8
3.	47 CFR PART 15B REQUIREMENTS	11
3.1	Conducted Emission	11
3.1.1	Requirement	11
3.1.2	Test Description	11
3.1.3	Test Result	11
3.2	Radiated Emission	14
3.2.1	Requirement	14
3.2.2	Test Description	15
3.2.3	Test Result	15

Change History		
Issue	Date	Reason for change
1.0	2022.05.13	First edition



1. GENERAL INFORMATION

1.1 EUT Description

EUT Name : Thermal Imaging Monocular
Trade Name.....: ZEISS
Brand Name.....: ZEISS
Hardware Version..... : V1.0
Software Version..... : 01040204150108
Power supply..... : Battery
Model No.: JQ033-14L
Capacitance: 4.4Ah
Rated Voltage:4.6V
Charge Limit:4.2V
Manufacturer : JinQU Electronic

*Note1:*The EUT is a Thermal Imaging monocular;

Note2: The original report is SET2021-15129, change the PCB.

*Note3 :*For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B 2018	Radio Frequency Devices
2	ICES-003 Issue 7	Information Technology Equipment (Including Digital Apparatus) — Limits and Methods of Measurement

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.107	Conducted Emission	PASS
2	15.109	Radiated Emission	PASS
3	ICES 003 Issue 7 Section3.2.1	Conducted Emission	PASS
4	ICES 003 Issue 7 Section3.2.2	Radiated Emission	PASS

NOTE:

- (1) The EUT has been tested according to 47 CFR Part 15 Subpart B, Class B. The test procedure is according to ANSI C63.4:2014.
- (2) The EUT has been tested according to ICES 003 Issue 7. The test procedure is according to ANSI C63.4:2014.



1.3 Facilities and Accreditations

1.3.1 Facilities

FCC-Registration No.: CN1283

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until April 19th, 2023.

ISED Registration: 11185A-1

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until April 20th, 2023.

A2LA Code: 5721.01

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 °C - 35 °C
Relative Humidity (%):	25% -75%
Atmospheric Pressure (kPa):	86kPa-106kPa

1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	Uc = 3.2 dB (k=2)
Uncertainty of Radiated Emission: (30MHz~1GHz)	Uc = 5.8 dB (k=2)
Uncertainty of Radiated Emission: (1~6GHz)	Uc = 5.1 dB (k=2)
Uncertainty of Radiated Emission: (6~18GHz)	Uc = 5.5 dB (k=2)

2. TEST CONDITIONS SETTING

2.1 Test Peripherals

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Support Equipment:

Description	Brand name	Model	Serial No.	FCCID
Notebook	ThinkPad	E430C	A131101550	N/A
Mouse	Logitech	M100r	25011051	N/A
AC Adapter	Simsukian	SK22G-05002	N/A	N/A

Support Cable:

Description	Shield Type	Ferrite Core	Length
PC Power adapter Cable	Un- shielding	No	1.2m
Mouse Cable	Un- shielding	No	1m

2.2 Test Mode

The EUT have the following typical setups during the test:

Setup1:Wifi+ Charger


Setup2: Idle + charger

Note: only worst-case mode setup 1 mode data provide at the report

2.3 Test Setup and Equipments List

2.3.1 Conducted Emission

A. Test Setup:

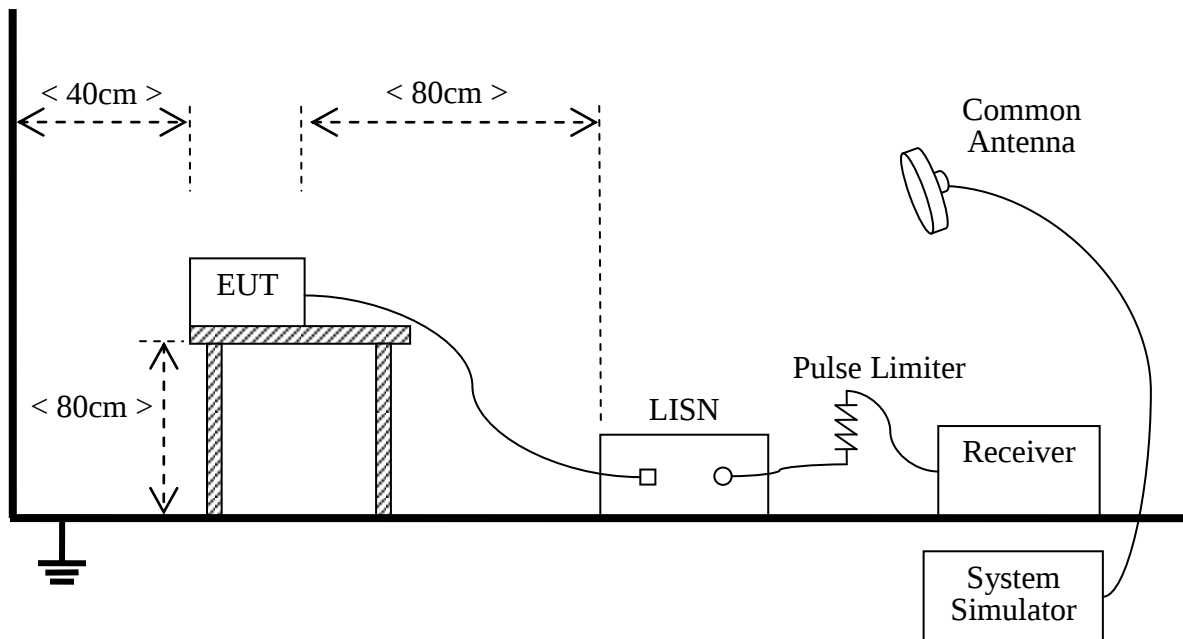

The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides $50\Omega/50\mu\text{H}$ of coupling impedance for the measuring instrument. The Common Antenna is used for the call between the EUT and the System Simulator (SS). A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.


B. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	KEYSIGHT	N9038A	A141202036	2021.09.20	2022.08.04
LISN	ROHDE&SCHWARZ	ENV216	A140701847	2021.08.02	2022.08.02
Cable	MATCHING PAD	W7	/	2021.08.02	2022.08.02


2.3.2 Radiated Emission

A. Test Setup:

- 1) For radiated emissions from 30MHz to 1GHz

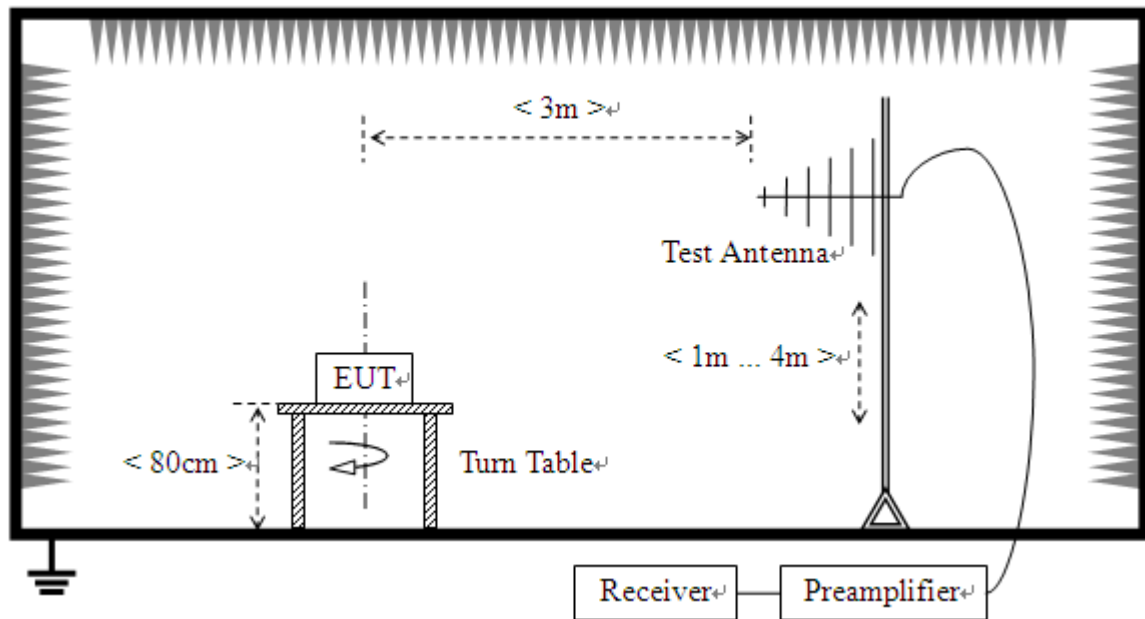

2) For radiated emissions above 1GHz

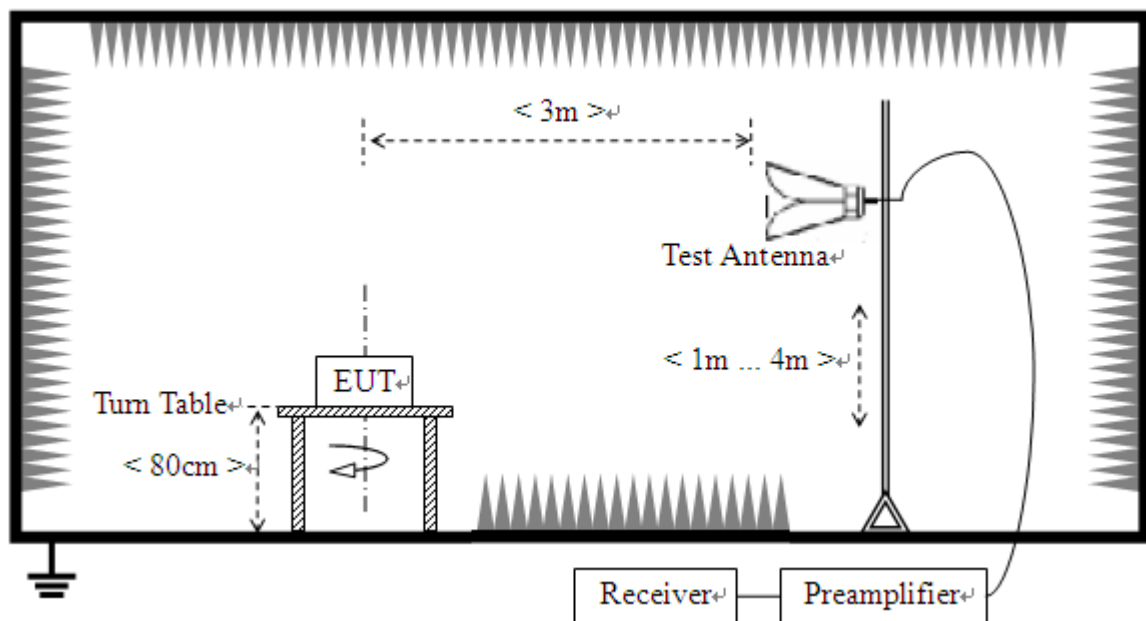

B. Test Procedure

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a



variable-height antenna master tower.

For the test Antenna:

- 1) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

C. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	KEYSIGHT	N9038A	A141202036	2021.09.20	2022.08.04
LISN	ROHDE&SCHWARZ	ENV216	A140701847	2021.09.21	2022.08.02
Shield Room	Xinju Electronics	L7300*W4500 *H3100	A181003226	2021.09.05	2024.07.29
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	A0902601	2021.06.23	2022.05.23
Broadband Ant.	2786	ETC	A150402239	2021.09.16	2024.03.03
3M Anechoic Chamber	Albatross	SAC-3MAC 9*6*6m	A0412375	2019.03.26	2023.03.25
EMI Test Receiver	ROHDE&SCHWARZ	ESW26	A180502935	2021.08.12	2022.08.06
System Simulator	ROHDE&SCHWARZ	CMW500	A150802214	2021.08.02	2022.07.22
5M Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2021.08.02	2022.07.22
EMI Horn Ant.	ETC	1209	A150402241	2021.01.02	2024.01.01

3. 47 CFR PART 15B REQUIREMENTS

3.1 Conducted Emission

3.1.1 Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- The limit subjects to the Class B digital device.
- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.1.2 Test Description

See section 2.3.1 of this report.

3.1.3 Test Result


The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

Note:

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a Nominal 120V AC,50/60Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

Test voltage and frequency (120V AC,60Hz)

A. Mains terminal disturbance voltage, L phase

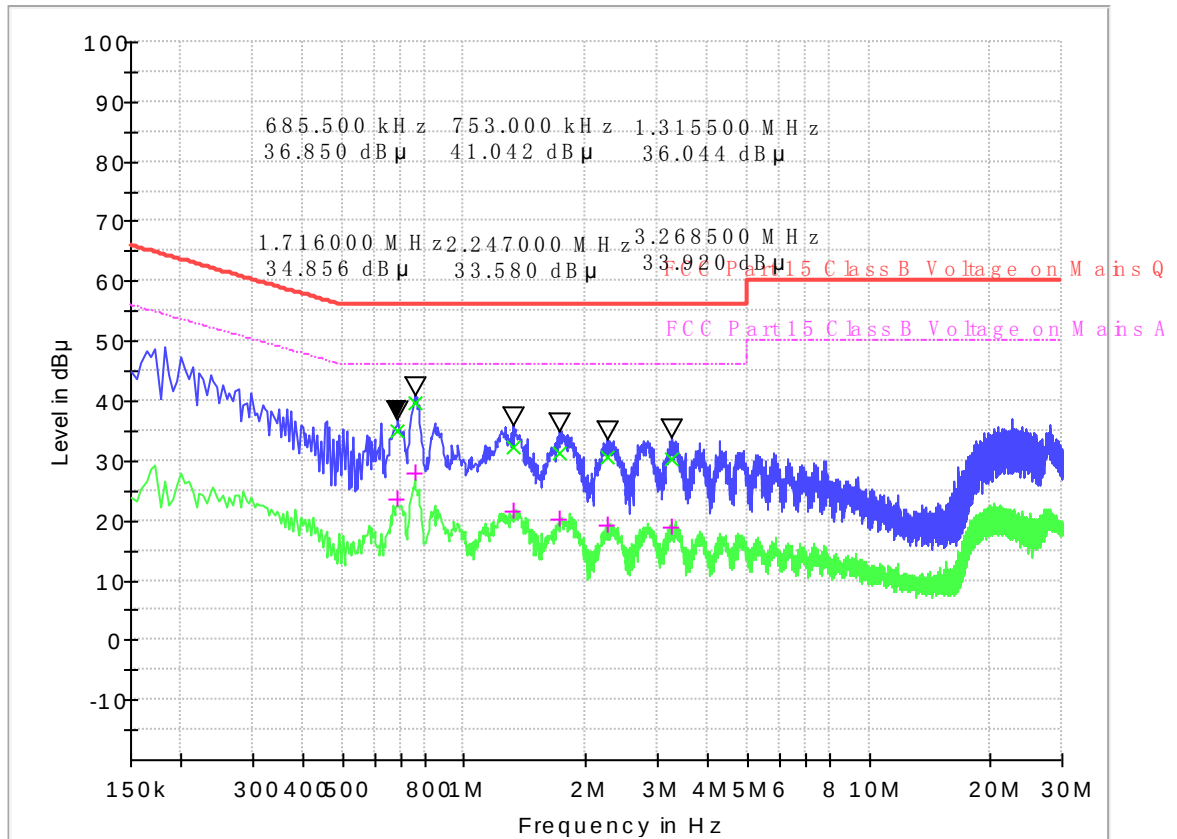


(Plot A: L Phase)

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB μ V)
0.685500	34.86	23.61	0.1	10.2	21.14	56.0	22.39	46.0
0.753000	39.79	28.01	0.2	10.2	16.21	56.0	17.99	46.0
1.315500	32.33	21.72	0.1	10.2	23.67	56.0	24.28	46.0
1.716000	31.36	20.14	0.1	10.2	24.64	56.0	25.86	46.0
2.247000	30.47	19.27	0.2	10.2	25.53	56.0	26.73	46.0
3.268500	30.17	19.05	0.2	10.2	25.83	56.0	26.95	46.0

Note: Correction factor=Cabel loss+ attenuation factor
attenuation factor=10dB

B. Mains terminal disturbance voltage, N phase

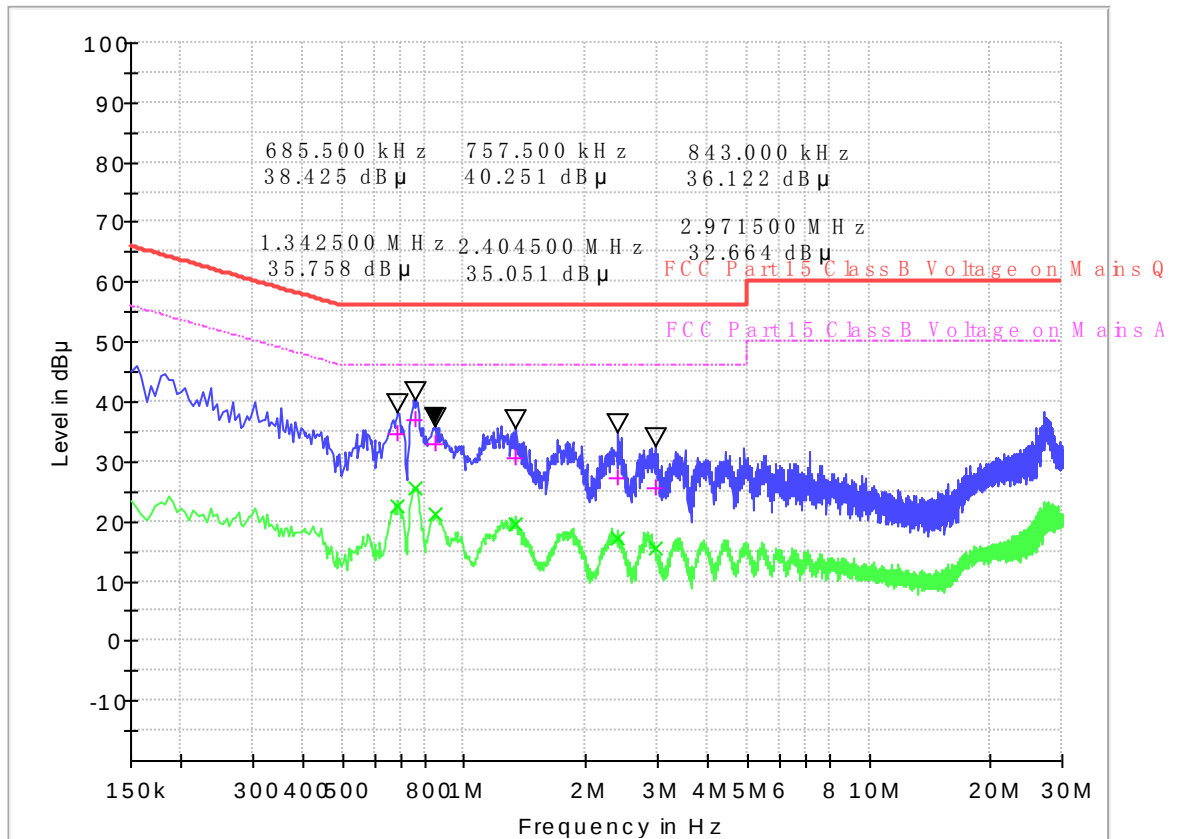

(Plot B: N Phase)

Frequency (MHz)	QuasiPeak (dB μV)	CAverage (dB μV)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB μV)
0.685500	34.67	22.66	0.1	10.2	21.33	56.0	23.34	46.0
0.757500	36.82	25.56	0.1	10.2	19.18	56.0	20.44	46.0
0.843000	32.85	21.35	0.2	10.2	23.15	56.0	24.65	46.0
1.342500	30.55	19.58	0.2	10.2	25.45	56.0	26.42	46.0
2.404500	27.38	17.21	0.1	10.2	28.62	56.0	28.79	46.0
2.971500	25.55	15.68	0.2	10.2	30.45	56.0	30.32	46.0

3.2 Radiated Emission

3.2.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength		Field Strength Limitation at 3m Measurement Dist	
	$\mu\text{V/m}$	Dist	($\mu\text{V/m}$)	($\text{dB}\mu\text{V/m}$)
30.0 - 88.0	100	3m	100	20log 100
88.0 - 216.0	150	3m	150	20log 150
216.0 - 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500

According to ICES-003 the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength Limitation at 3m Measurement Dist	
	Class A(3m) QP ($\text{dB}\mu\text{V/m}$)	Class B(3m) QP ($\text{dB}\mu\text{V/m}$)
30 - 88	50.0	40.0
88 - 216	54.0	43.5
216 - 230	56.9	46.0
230 - 960	57.0	47.0
960-1000	60.0	54.0
Frequency range (MHz)	Field Strength Limitation at 3m Measurement Dist	
	Class A(3m) ($\text{dB}\mu\text{V/m}$)	Class B(3m) ($\text{dB}\mu\text{V/m}$)
Above 1G	60(AV) /80(PK)	54(AV) /74(PK)

- For frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.
- Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

c) For below 1G :QP detector RBW 120kHz ,VBW 300kHz.

For Above 1G: PK detector RBW 1MHz,VBW 3MHz for PK value ;AV detector RBW 1MHz, VBW 10Hz for AV value.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in dBuV/m is calculated by $20\log$ Emission Level(uV/m).
- 3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $Ld1 = Ld2 * (d2/d1)^2$.

Example:

F.S Limit at 30m distance is 30uV/m, then F.S Limitation at 3m distance is adjusted as

$$Ld1 = L1 = 30\text{uV/m} * (10)^2 = 100 * 30\text{uV/m}.$$

3.2.2 Test Description

See section 2.3.2 of this report.


3.2.3 Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.


A.Radiation disturbances, antenna polarization:Vertical

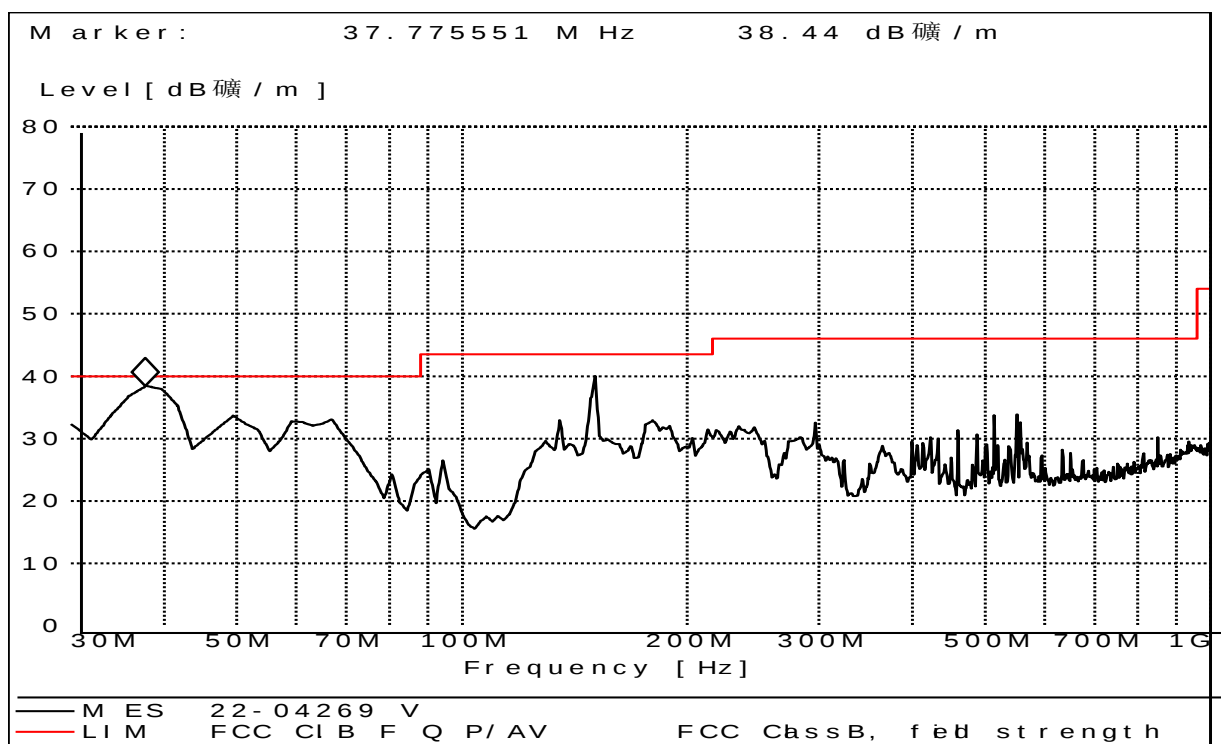

(Plot C: Test Antenna Vertical 30M - 1G)

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
30.00	29.74	120.000	119	40.00	10.26	Vertical	0.4	26.2	Pass
37.76	34.65	120.000	134	40.00	5.35	Vertical	0.4	26.1	Pass
67.85	30.55	120.000	116	40.00	9.45	Vertical	0.5	26.1	Pass
150.37	37.59	120.000	142	43.50	5.91	Vertical	0.5	27.4	Pass
179.65	29.73	120.000	133	43.50	13.77	Vertical	0.5	27.3	Pass
514.02	32.42	120.000	150	46.00	13.58	Vertical	0.8	29.1	Pass

B.Radiation disturbances, antenna polarization: Horizontal

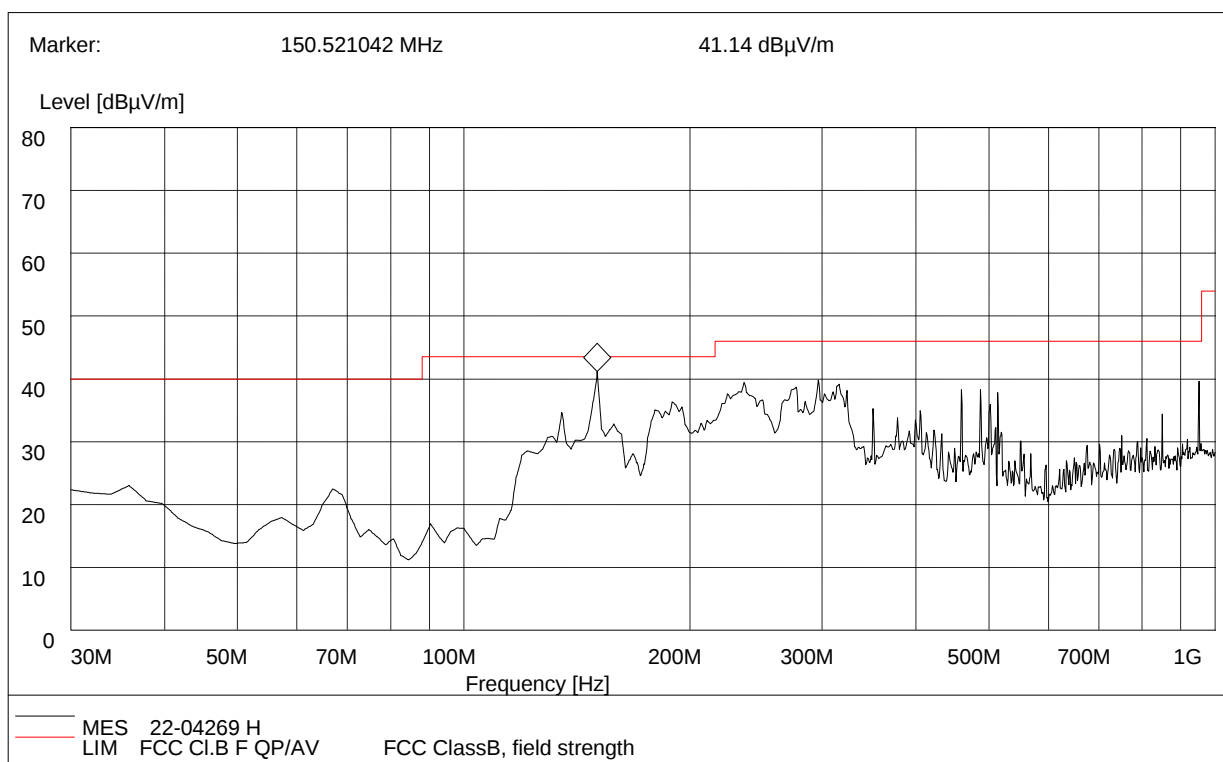


(Plot D: Test Antenna Horizontal 30M - 1G)

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
134.95	31.56	120.000	177	43.50	10.26	Horizontal	0.4	27.1	Pass
150.57	39.67	120.000	114	43.50	5.35	Horizontal	0.5	27.4	Pass
189.33	33.57	120.000	134	43.50	9.45	Horizontal	0.5	27.3	Pass
234.29	36.85	120.000	162	46.00	5.91	Horizontal	0.6	29.1	Pass
296.18	36.75	120.000	155	46.00	13.77	Horizontal	0.6	28.9	Pass
315.72	36.57	120.000	139	46.00	13.58	Horizontal	0.7	28.8	Pass

Test Result: PASS


A.Radiation disturbances, antenna polarization: Horizontal

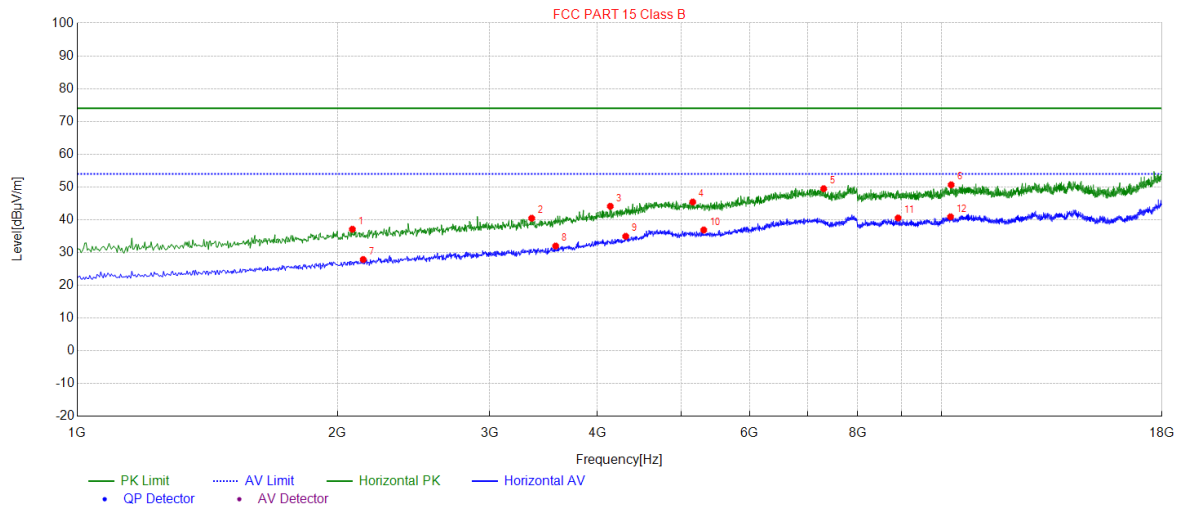

(Plot M: Test Antenna Horizontal 1G – 18G)

NO.	Freq. [MHz]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	2081.41	37.11	74.00	36.89	PK	134	130	Horizontal
2	3356.67	40.46	74.00	33.54	PK	122	240	Horizontal
3	4138.82	44.11	74.00	29.89	PK	109	250	Horizontal
4	5155.63	45.41	74.00	28.59	PK	133	49	Horizontal
5	7308.26	49.47	74.00	24.53	PK	119	62	Horizontal
6	10263.4	50.65	74.00	23.35	PK	129	134	Horizontal
7	2142.62	27.88	54.00	26.12	AV	209	129	Horizontal
8	3577.71	31.99	54.00	22.01	AV	140	293	Horizontal
9	4312.26	34.96	54.00	19.04	AV	152	27	Horizontal
10	5308.66	36.88	54.00	17.12	AV	134	330	Horizontal
11	8909.98	40.54	54.00	13.46	AV	127	151	Horizontal
12	10246.4	40.89	54.00	13.11	AV	109	208	Horizontal

B.Radiation disturbances, antenna polarization: Vertical

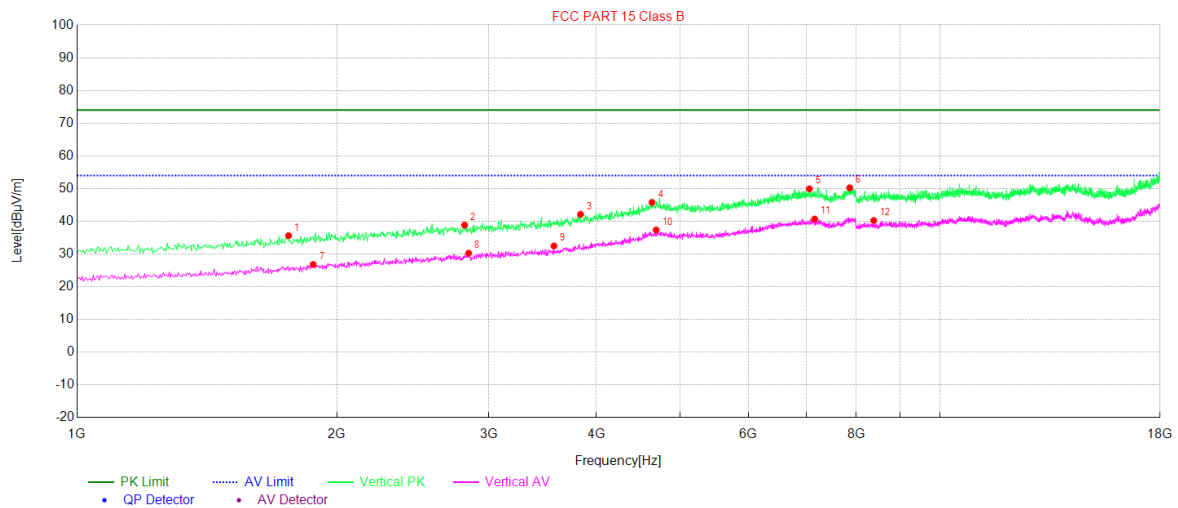

(Plot N: Test Antenna Vertical 1G – 18G)

NO.	Freq. [MHz]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	1758.35	35.62	-12.96	74.00	38.38	PK	133	27
2	2812.56	38.84	-9.35	74.00	35.16	PK	149	245
3	3832.76	42.14	-5.80	74.00	31.86	PK	172	230
4	4638.72	45.79	-1.35	74.00	28.21	PK	128	259
5	7060.01	49.92	3.39	74.00	24.08	PK	152	40
6	7862.57	50.23	4.04	74.00	23.77	PK	104	318
7	1877.37	26.81	-12.39	54.00	27.19	AV	109	184
8	2843.16	30.26	-9.17	54.00	23.74	AV	145	325
9	3570.91	32.47	-6.90	54.00	21.53	AV	132	218
10	4689.73	37.35	-1.13	54.00	16.65	AV	161	139
11	7158.63	40.70	3.46	54.00	13.30	AV	124	312
12	8382.87	40.25	4.47	54.00	13.75	AV	139	124

-----End of Report-----