



# FCC Part 15C Measurement and Test Report

For

**Dongguan Couso Technology Co., Ltd**

**No.26 Minye Road, Tangxia town, Dongguan City, China**

**FCC ID: 2AMSRCS5500G**

**FCC Rule(s):** FCC Part 15.249

**Product Description:** 2.4Ghz keyboard&mouse set

**Tested Model:** CS5500G

**Report No.:** WTD19X12088959W

**Sample Receipt Date:** 2019-12-20

**Tested Date:** 2019-12-20 to 2020-02-26

**Issued Date:** 2020-02-26

**Tested By:** Jack Huang / Engineer

**Reviewed By:** Lion Cai / RF Manager

**Approved & Authorized By:** Silin Chen / Manager

**Prepared By:**

*Jack Huang*

*Lion Cai*

*Silin Chen*

**Shenzhen SEM Test Technology Co., Ltd.**

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.



**TABLE OF CONTENTS**

**1. GENERAL INFORMATION.....4**

    1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4

    1.2 TEST STANDARDS.....7

    1.3 TEST METHODOLOGY .....7

    1.4 TEST FACILITY .....7

    1.5 EUT SETUP AND TEST MODE.....8

    1.6 MEASUREMENT UNCERTAINTY .....8

    1.7 TEST EQUIPMENT LIST AND DETAILS .....9

**2. SUMMARY OF TEST RESULTS .....11**

**3. ANTENNA REQUIREMENTS.....12**

    3.1 STANDARD APPLICABLE.....12

    3.2 TEST RESULT.....12

**4. RADIATED EMISSIONS.....13**

    4.1 STANDARD APPLICABLE.....13

    4.2 TEST PROCEDURE.....13

    4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....15

    4.4 SUMMARY OF TEST RESULTS/PLOTS .....15

**5. OUT OF BAND EMISSIONS.....24**

    5.1 STANDARD APPLICABLE.....24

    5.2 TEST PROCEDURE.....24

    5.3 SUMMARY OF TEST RESULTS/PLOTS .....24

**6. EMISSION BANDWIDTH.....27**

    6.1 STANDARD APPLICABLE.....27

    6.2 TEST PROCEDURE.....27

    6.3 SUMMARY OF TEST RESULTS/PLOTS .....27

**7. CONDUCTED EMISSIONS .....29**

    7.1 TEST PROCEDURE.....29

    7.2 BASIC TEST SETUP BLOCK DIAGRAM.....29

    7.3 TEST RECEIVER SETUP .....29

    7.4 SUMMARY OF TEST RESULTS/PLOTS .....29



## Report version

Version No.	Date of issue	Description
Rev.00	2020-02-26	Original
/	/	/



# 1. GENERAL INFORMATION

## 1.1 Product Description for Equipment Under Test (EUT)

### Client Information

Applicant: Dongguan Couso Technology Co., Ltd  
 Address of applicant: No.26 Minye Road,Tangxia town,Dongguan City,China

Manufacturer: Dongguan Couso Technology Co., Ltd  
 Address of manufacturer: No.26 Minye Road,Tangxia town,Dongguan City,China

General Description of EUT	
Product Name:	2.4Ghz keyboard&mouse set
Trade Name:	Banruo/Couso
Model No.:	CS5500G
Adding Model(s):	CS1000G, CS2000G, CS3000G, CS3100G, CS3200G,
	CS3300G, CS3400G, CS3500G, CS3600G, CS3610G,
	CS3620G, CS3630G, CS3640G, CS3650G,CS3660G,
	CS3670G, CS3680G, CS3690, CS3700G, CS3710G,
	CS3720G, CS3730G, CS3740G, CS3750G, CS3760G,
	CS3770G, CS3780G, CS3790G, CS3800G, CS3810G,
	CS3820G, CS3830G, CS3840G, CS3850G, CS3860G,
	CS3870G, CS3880G, CS3890G, CS4000G, CS4100G,
	CS4200G, CS4300G, CS4400G, CS4500G, CS4550G
	CS4600G, CS4650G, CS4700G, CS4800G, CS4900G,
	CS5000G, CS5100G, CS5200G, CS5300G, CS5400G,
	CS5500G, CS5600G, CS5700G, CS5800G, CS5900G,
	CS6000G, CS6100G, CS6200G, CS6300G, CS6400G,
	CS6500G, CS6600G, CS6700G, CS6800G, CS6900G,
	CS7000G, CS7100G, CS7200G, CS7300G, CS7400G,
	CS7500G, CS7600G, CS7700G, CS7800G, CS7900G,
	CS8000G, CS8100G, CS8200G, CS8300G, CS8400G,
	CS8500G, CS8600G, CS8700G, CS8800G, CS8900G,
	CS9000G, CS9100G, CS9200G, CS9300G, CS9400G,
	CS9500G, CS9600G, CS9700G, CS9800G, CS9900G,
	CK470TL, CS4570G, CS4380G, CK400G, CK410G,
	CK420G, CK430G, CK440G, CK450G, CK455G ,CK465G,
	CK460G, CK470T, CK480G, CK490G, CK500G CK510G,
	CK520G, CK530G, CK540G, CK550G, CK560G, CK570G,
	CK580G, CK590G, CK600G, CK601G, CK700G, CK710G,
	CK720G, CK730G, CK740G, CK750G, CK760G, CK770G,
CK780G, CK790G, CK900G, CK910G, CK920G, CK921G,	



	CK923G, CK927G, CK930G, CK940G, CK950G, CK960G, CK970G, CK980G, CK990G, CG16G, CM610G, CM611G, CM612G, CM613G, CM614G, CM615G, CM616G, CM617G, CM618G, CM619G, CM620G, CM621G, CM622G, CM623G, CM624G, CM625G, CM626G, CM627G, CM628G, CM629G, CM630G, CM631G, CM632G, CM633G, CM634G, CM635G, CM636G, CM637G, CM638G, CM639G, CM640G, CM650G, CM660G, CM670G, CM680G, CM690G, CM800G, CM810G, CM815G, CM820G, CM830G, CM830B, CM840G, CM850G, CM860G, CM870G, CM880G, CM890G, CM891G, CM892G, CM893G, CM894G, CM895G, CM896G, CM897G, CM898G, CM899G, CM898GL, SUAVE-2, ProCombo-5, ProCombo-6, ProCombo-11
Rated Voltage:	DC 1.5V
Power Adapter Model:	/
Software Version:	YJX8368_keyboardVS8510_V5.31min
Hardware Version:	TLSR8368 DICE
<p><i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model CS5500G, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

<b>Technical Characteristics of EUT</b>	
Frequency Range:	2405MHz-2475MHz
Max. Field Strength:	106.37dBuV/m
Modulation:	GFSK
Quantity of Channels:	8
Antenna Type:	PCB Antenna
Antenna Gain:	2.95dBi



➤ Center Frequency of Each of Channel:

Channel	Frequency (MHz)
00	2405
01	2411
02	2417
03	2451
04	2457
05	2463
06	2469
07	2475

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.249**: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz.

**ANSI C63.10-2013**: American National Standard for Testing Unlicensed Wireless Devices.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### Address of the test laboratory

Laboratory: Shenzhen SEM Test Technology Co., Ltd.

Address: 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

### FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.



### 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low Channel	2405MHz
TM2	Middle Channel	2451MHz
TM3	High Channel	2475MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

### 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	±0.42dB
Occupied Bandwidth	Conducted	± 1.5%
Conducted Spurious Emission	Conducted	±2.17dB
Conducted Emissions	Conducted	9-150kHz ±3.74dB
		0.15-30MHz ±3.34dB
Transmitter Spurious Emissions	Radiated	30-200MHz ±4.52dB
		0.2-1GHz ±5.56dB
		1-6GHz ±3.84dB
		6-18GHz ±3.92dB



**1.7 Test Equipment List and Details**

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2019-04-30	2020-04-29
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2019-04-30	2020-04-29
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2019-04-30	2020-04-29
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2019-04-30	2020-04-29
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2019-04-30	2020-04-29
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2019-05-05	2021-05-04
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2019-04-30	2020-04-29
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2019-04-30	2020-04-29
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2019-04-30	2020-04-29
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2019-04-30	2020-04-29
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2019-04-30	2020-04-29
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2019-04-30	2020-04-29
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2019-05-05	2021-05-04
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2019-04-30	2020-04-29
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2019-04-30	2020-04-29
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2019-04-30	2020-04-29
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2019-03-18	2020-03-17
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2019-03-18	2020-03-17
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2019-03-18	2020-03-17
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2019-03-18	2020-03-17
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17



<b>Software List</b>			
<b>Description</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Version</b>
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

\*Remark: indicates software version used in the compliance certification testing



## 2. SUMMARY OF TEST RESULTS

---

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	N/A
§15.209(a)(f)	Radiated Spurious Emissions	Compliant
§15.249(a)	Field Strength of Emissions	Compliant
§15.249(d)	Out of Band Emission	Compliant
§15.215(c)	Emission Bandwidth	Compliant

N/A: not applicable



### **3. Antenna Requirements**

---

#### **3.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Test Result**

This product has a PCB antenna, fulfill the requirement of this section.

## 4. Radiated Emissions

---

### 4.1 Standard Applicable

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of Harmonics (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.



The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

### 4.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.249(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

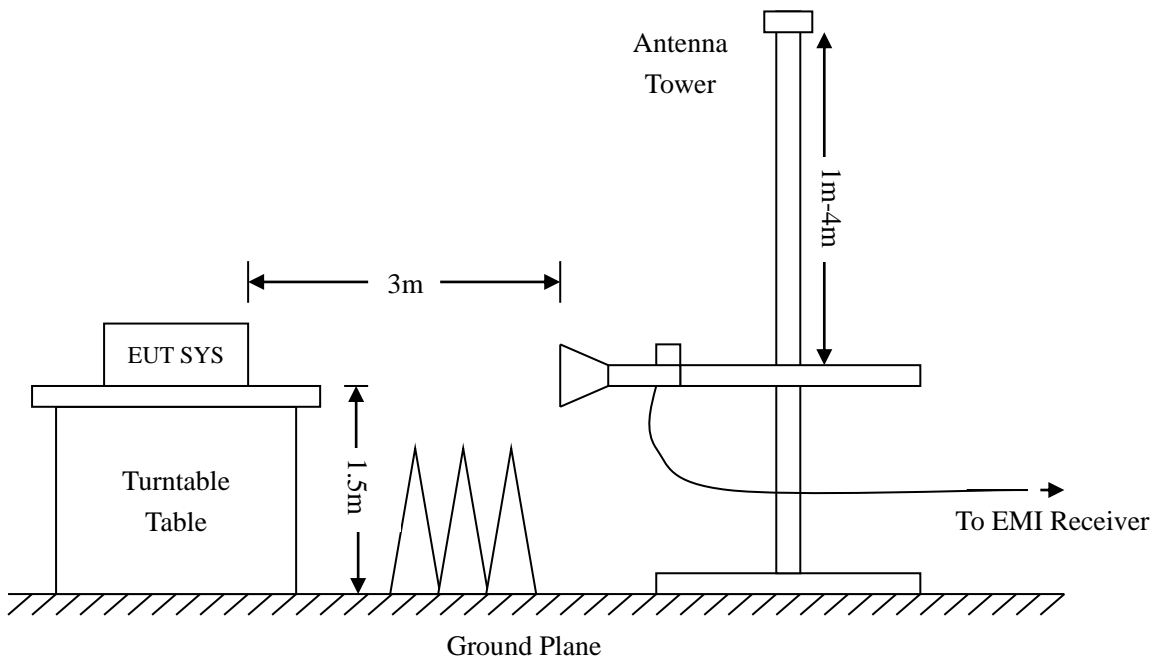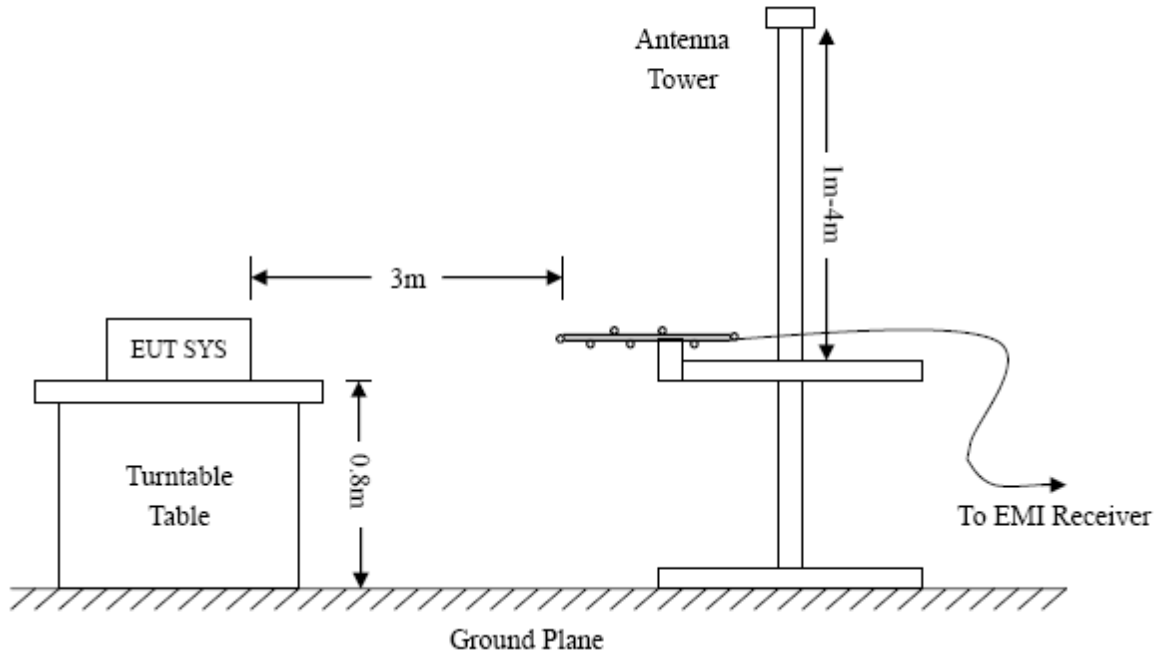

Frequency :9kHz-30MHz  
 RBW=10KHz,  
 VBW =30KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak

Frequency :30MHz-1GHz  
 RBW=120KHz,  
 VBW=300KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, QP

Frequency :Above 1GHz  
 RBW=1MHz,  
 VBW=3MHz(Peak), 10Hz(AV)  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, AV



### 4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of  $-6\text{dB}\mu\text{V}$  means the emission is  $6\text{dB}\mu\text{V}$  below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15C Limit}$$


### 4.4 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*



➤ Spurious Emissions Below 1GHz

Test Channel	Low	Polarity:	Horizontal
--------------	-----	-----------	------------

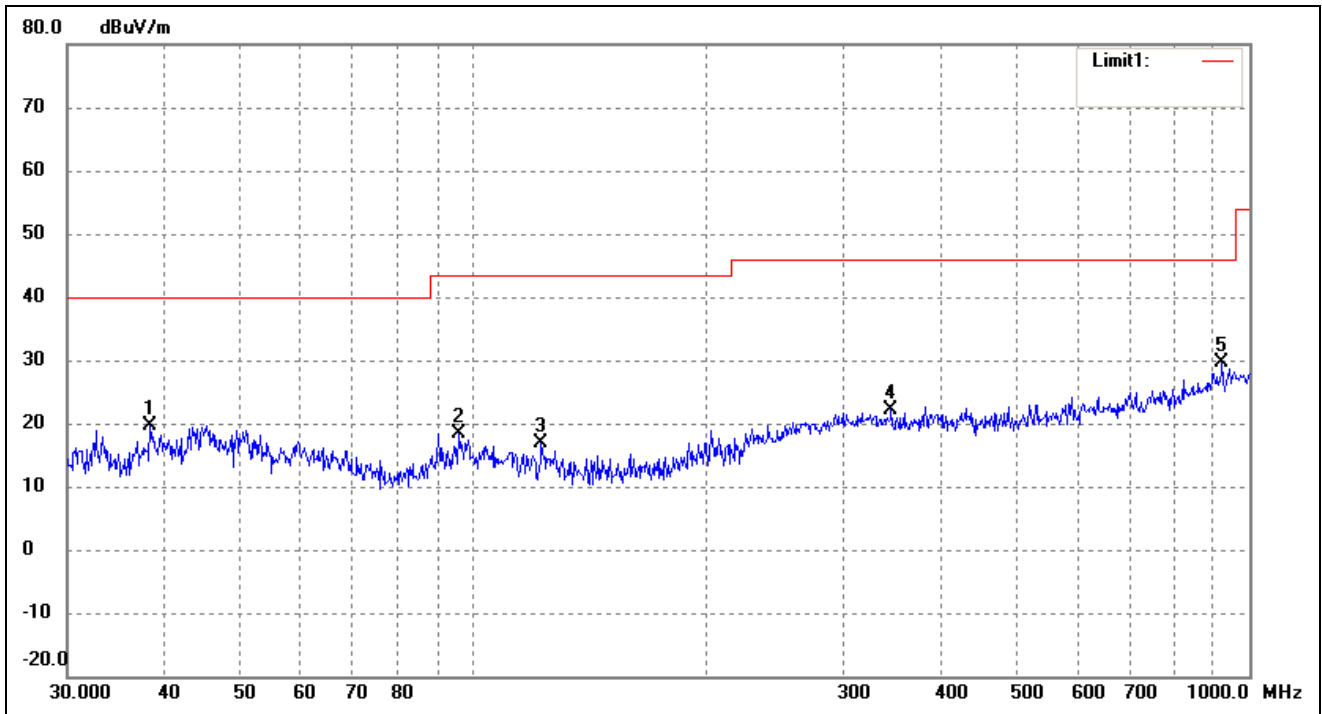


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	38.3462	34.47	-14.80	19.67	40.00	-20.33	335	100	peak
2	95.7622	34.14	-15.77	18.37	43.50	-25.13	314	100	peak
3	122.4039	33.06	-16.23	16.83	43.50	-26.67	78	100	peak
4	345.5951	29.93	-7.74	22.19	46.00	-23.81	273	100	peak
5	922.5157	30.50	-0.82	29.68	46.00	-16.32	85	100	peak






Test Channel	Low	Polarity:	Vertical
--------------	-----	-----------	----------

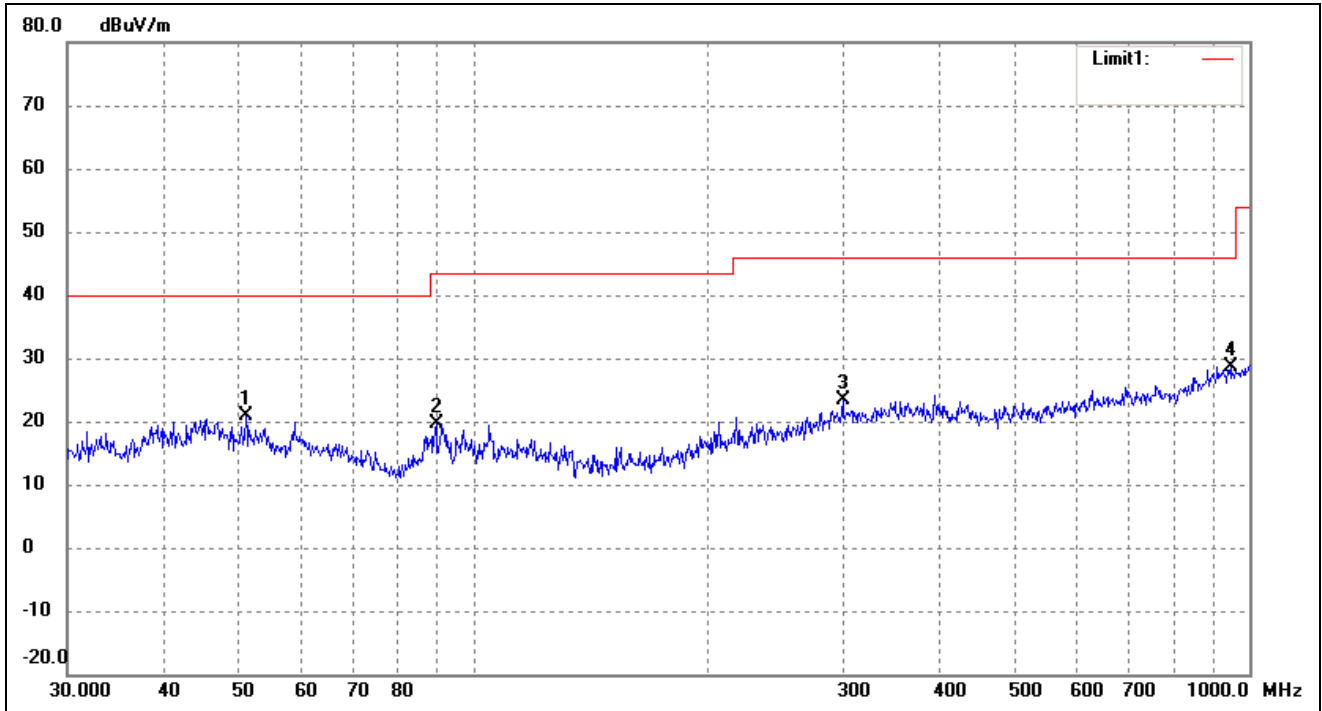

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	50.9420	34.89	-13.90	20.99	40.00	-19.01	358	100	peak
2	89.5900	36.59	-17.00	19.59	43.50	-23.91	312	100	peak
3	299.3158	31.30	-7.87	23.43	46.00	-22.57	84	100	peak
4	945.4398	29.80	-1.09	28.71	46.00	-17.29	275	100	peak




Test Channel	Middle	Polarity:	Horizontal
--------------	--------	-----------	------------

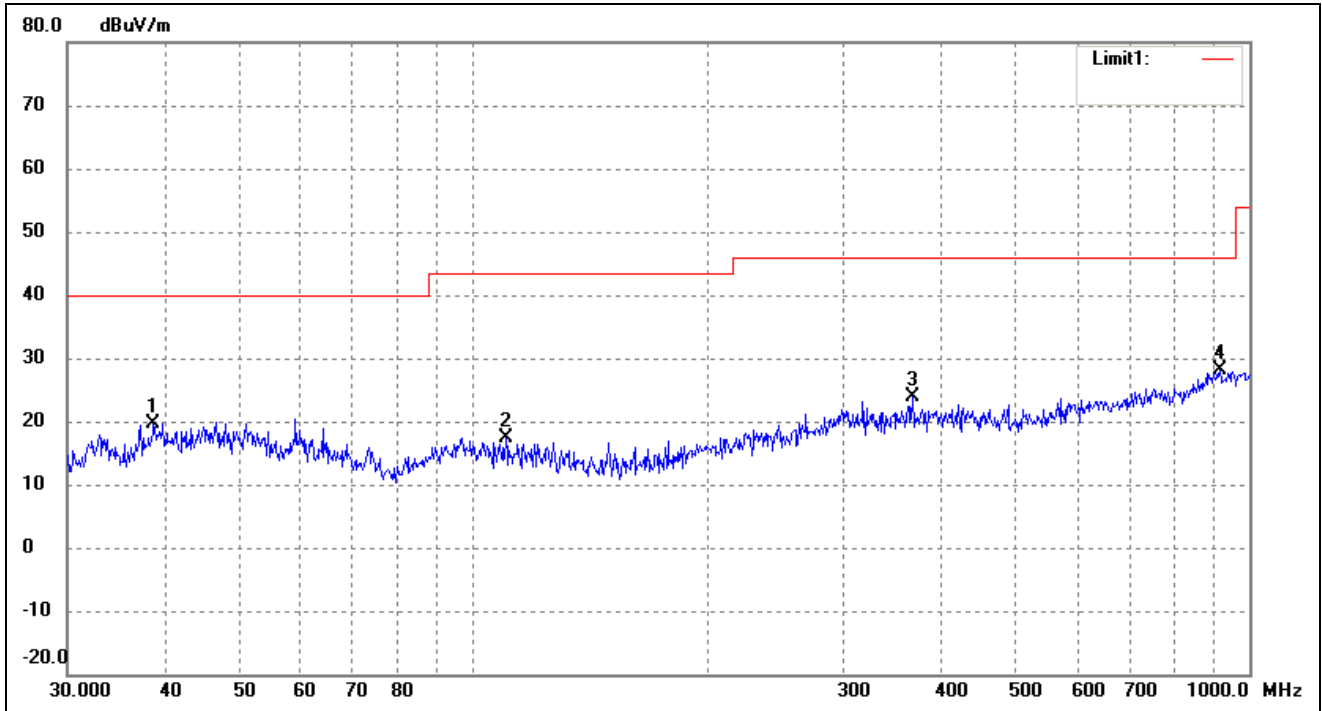

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	38.7518	34.39	-14.64	19.75	40.00	-20.25	355	100	peak
2	110.1816	32.21	-14.79	17.42	43.50	-26.08	265	100	peak
3	368.1116	31.70	-7.86	23.84	46.00	-22.16	55	100	peak
4	916.0687	29.08	-0.93	28.15	46.00	-17.85	192	100	peak




Test Channel	Middle	Polarity:	Vertical
--------------	--------	-----------	----------

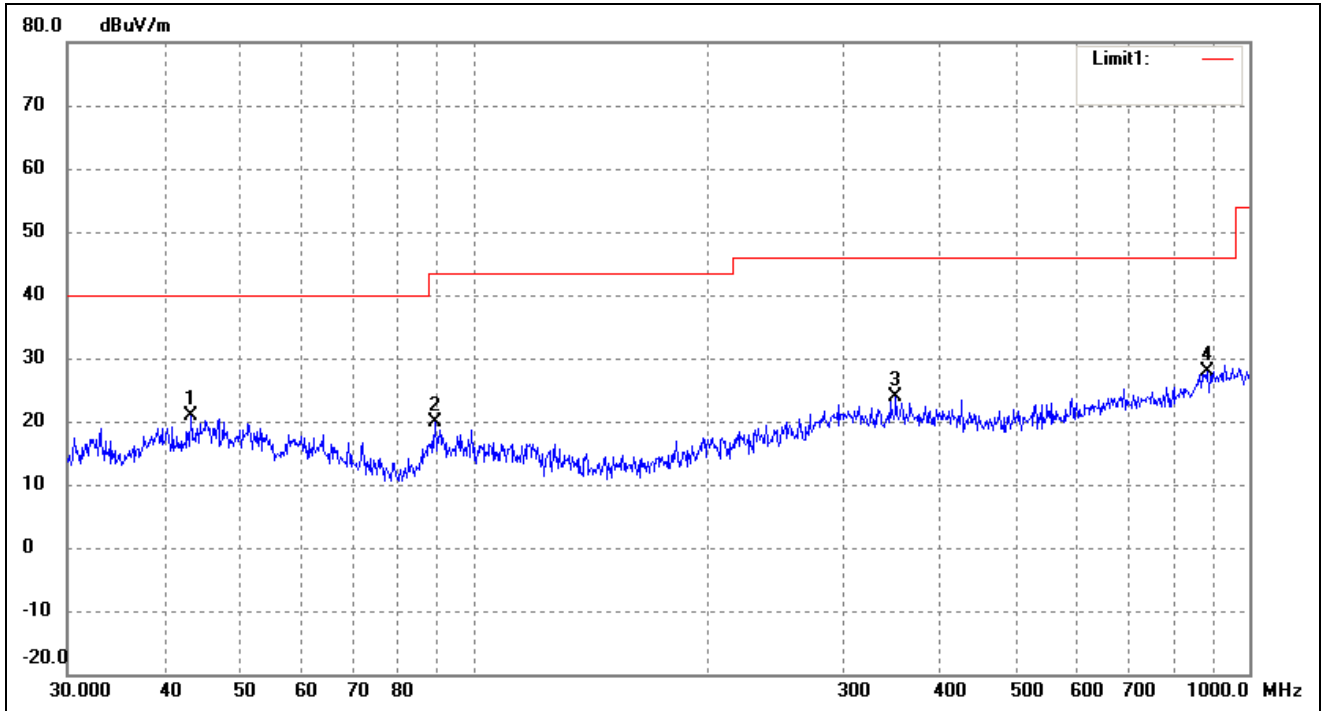

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	43.2017	34.84	-14.01	20.83	40.00	-19.17	314	100	peak
2	89.2764	36.99	-17.09	19.90	43.50	-23.60	95	100	peak
3	350.4768	31.39	-7.59	23.80	46.00	-22.20	215	100	peak
4	884.5029	29.70	-1.90	27.80	46.00	-18.20	91	100	peak




Test Channel	High	Polarity:	Horizontal
--------------	------	-----------	------------

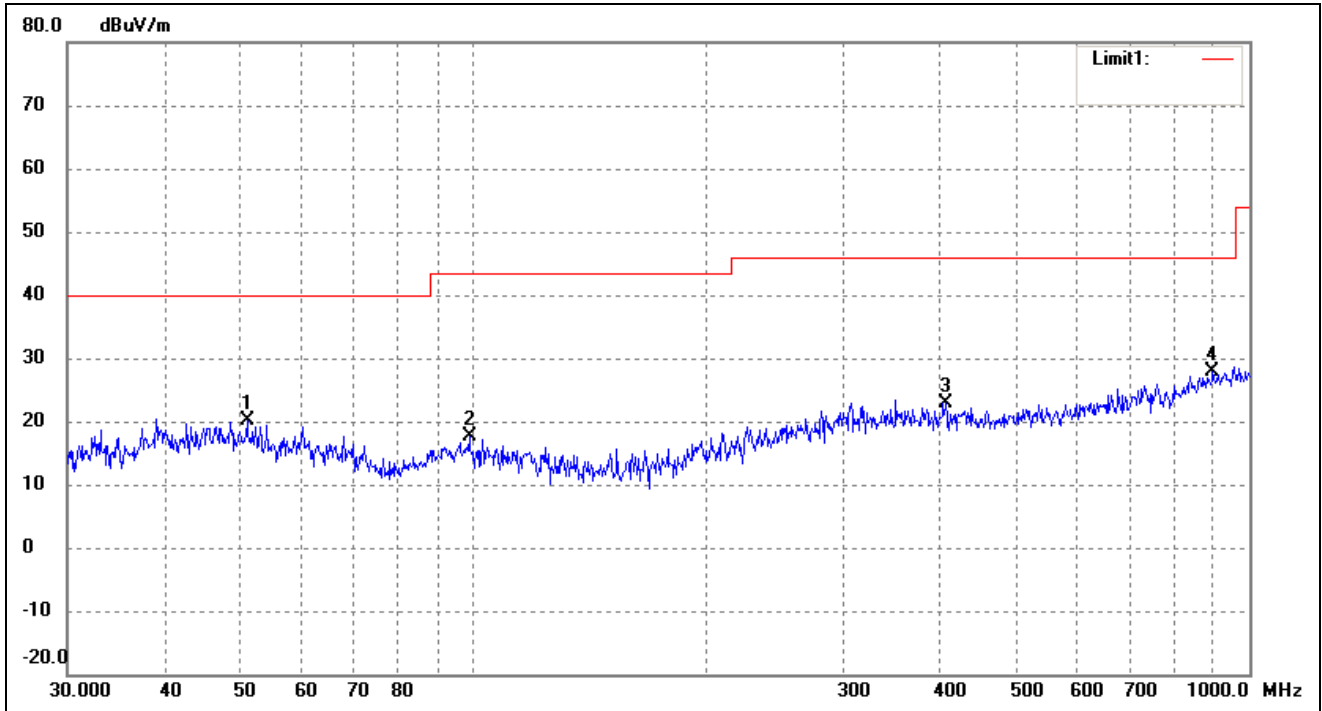

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	51.1209	34.17	-13.95	20.22	40.00	-19.78	192	100	peak
2	98.8326	32.86	-15.16	17.70	43.50	-25.80	149	100	peak
3	406.0880	30.86	-7.87	22.99	46.00	-23.01	89	100	peak
4	896.9965	29.23	-1.34	27.89	46.00	-18.11	276	100	peak



Test Channel	High	Polarity:	Vertical
--------------	------	-----------	----------

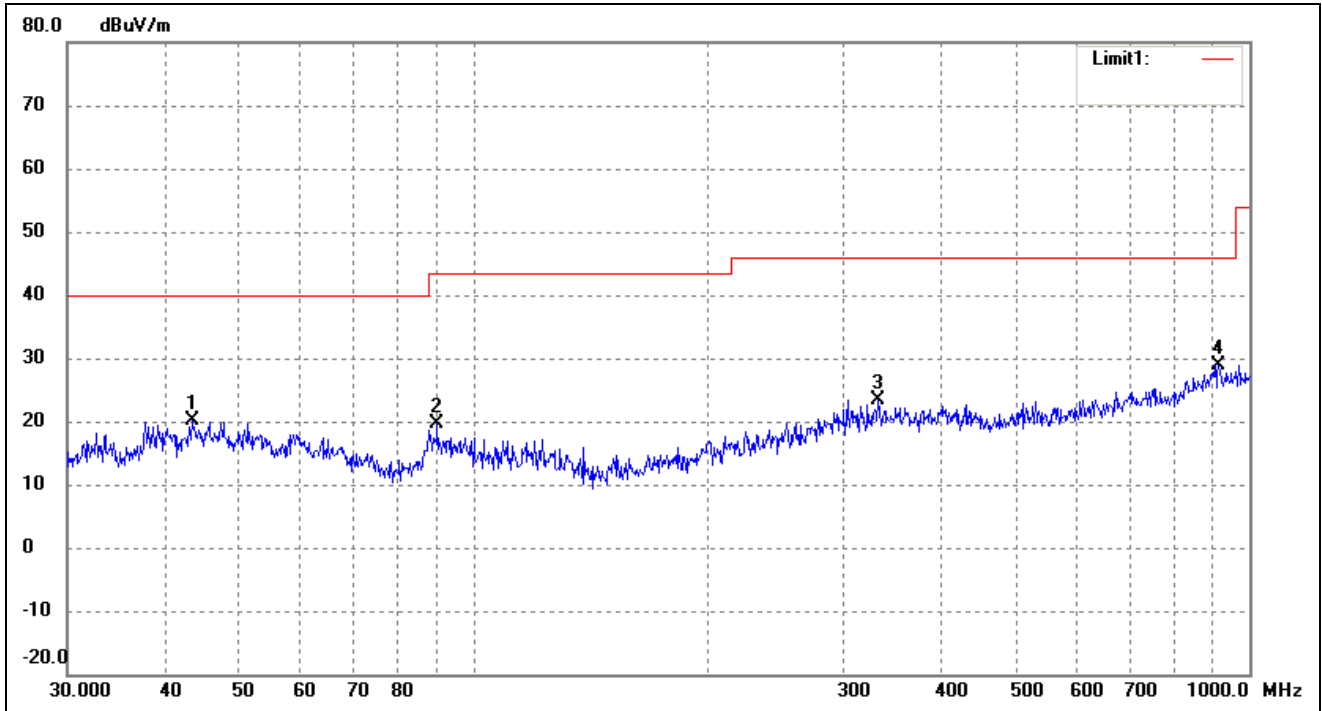

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	43.5057	34.06	-14.00	20.06	40.00	-19.94	191	100	peak
2	89.9047	36.48	-16.92	19.56	43.50	-23.94	174	100	peak
3	332.5187	31.51	-8.22	23.29	46.00	-22.71	122	100	peak
4	912.8620	29.98	-0.99	28.99	46.00	-17.01	113	100	peak



*Spurious Emissions Above 1GHz*

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2405MHz							
2405.00	115.85	-9.48	106.37	114	-7.63	H	PK
2405.00	101.42	-9.48	91.94	94	-2.06	H	AV
4810.00	65.34	-4.42	60.92	74	-13.08	H	PK
4810.00	45.87	-4.42	41.45	54	-12.55	H	AV
7215.00	54.59	-2.13	52.46	74	-21.54	H	PK
7215.00	45.48	-2.13	43.35	54	-10.65	H	AV
2405.00	99.47	-9.48	89.99	114	-24.01	V	PK
2405.00	89.46	-9.48	79.98	94	-14.02	V	AV
4810.00	61.30	-4.42	56.88	74	-17.12	V	PK
4810.00	44.38	-4.42	39.96	54	-14.04	V	AV
7215.00	46.33	-2.13	44.20	74	-29.80	V	PK
7215.00	42.25	-2.13	40.12	54	-13.88	V	AV
Middle Channel-2451MHz							
2451.00	114.57	-9.45	105.24	114	-8.76	H	PK
2451.00	101.02	-9.45	91.57	94	-2.43	H	AV
4902.00	64.80	-4.42	60.38	74	-13.62	H	PK
4902.00	47.30	-4.42	42.88	54	-11.12	H	AV
7353.00	56.07	-2.13	53.94	74	-20.06	H	PK
7353.00	45.20	-2.13	43.07	54	-10.93	H	AV
2451.00	98.82	-9.41	89.41	114	-24.59	V	PK
2451.00	88.22	-9.41	78.81	94	-15.19	V	AV
4902.00	60.16	-4.42	55.74	74	-18.26	V	PK
4902.00	44.91	-4.42	40.49	54	-13.51	V	AV
7353.00	45.53	-2.13	43.40	74	-30.60	V	PK
7353.00	42.71	-2.13	40.58	54	-13.42	V	AV



Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
High Channel-2475MHz							
2475.00	114.57	-9.41	105.24	114	-8.76	H	PK
2475.00	101.93	-9.41	92.59	94	-1.41	H	AV
4950.00	65.36	-4.42	60.94	74	-13.06	H	PK
4950.00	44.86	-4.42	40.44	54	-13.56	H	AV
7425.00	54.96	-2.13	52.83	74	-21.17	H	PK
7425.00	44.73	-2.13	42.60	54	-11.40	H	AV
2475.00	98.90	-9.41	89.49	114	-24.51	V	PK
2475.00	90.64	-9.41	81.23	94	-12.77	V	AV
4950.00	61.63	-4.42	57.21	74	-16.79	V	PK
4950.00	45.80	-4.42	41.38	54	-12.62	V	AV
7425.00	45.62	-2.13	43.49	74	-30.51	V	PK
7425.00	43.00	-2.13	40.87	54	-13.13	V	AV

*Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 5<sup>th</sup> Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*

*The measurements greater than 20dB below the limit from 9kHz to 30MHz..*



## 5. Out of Band Emissions

### 5.1 Standard Applicable

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

### 5.2 Test Procedure

As the radiation test, set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2483.5MHz, than mark the higher-level emission for comparing with the FCC rules.

### 5.3 Summary of Test Results/Plots

Test mode	Frequency	Limit	Result
	MHz	dBuV / dBc	
Lowest	2310.00	<54 dBuV	Pass
	2390.00	<54 dBuV	Pass
	2400.00	<54 dBuV	Pass
Highest	2483.50	<54 dBuV	Pass
	2500.00	<54 dBuV	Pass


The edge emissions are below the FCC 15.209 Limits or complies with the 15.249 requirements.

Please refer to the test plots as below.






Test Channel	Low	Polarity:	Horizontal (worst case)
--------------	-----	-----------	-------------------------

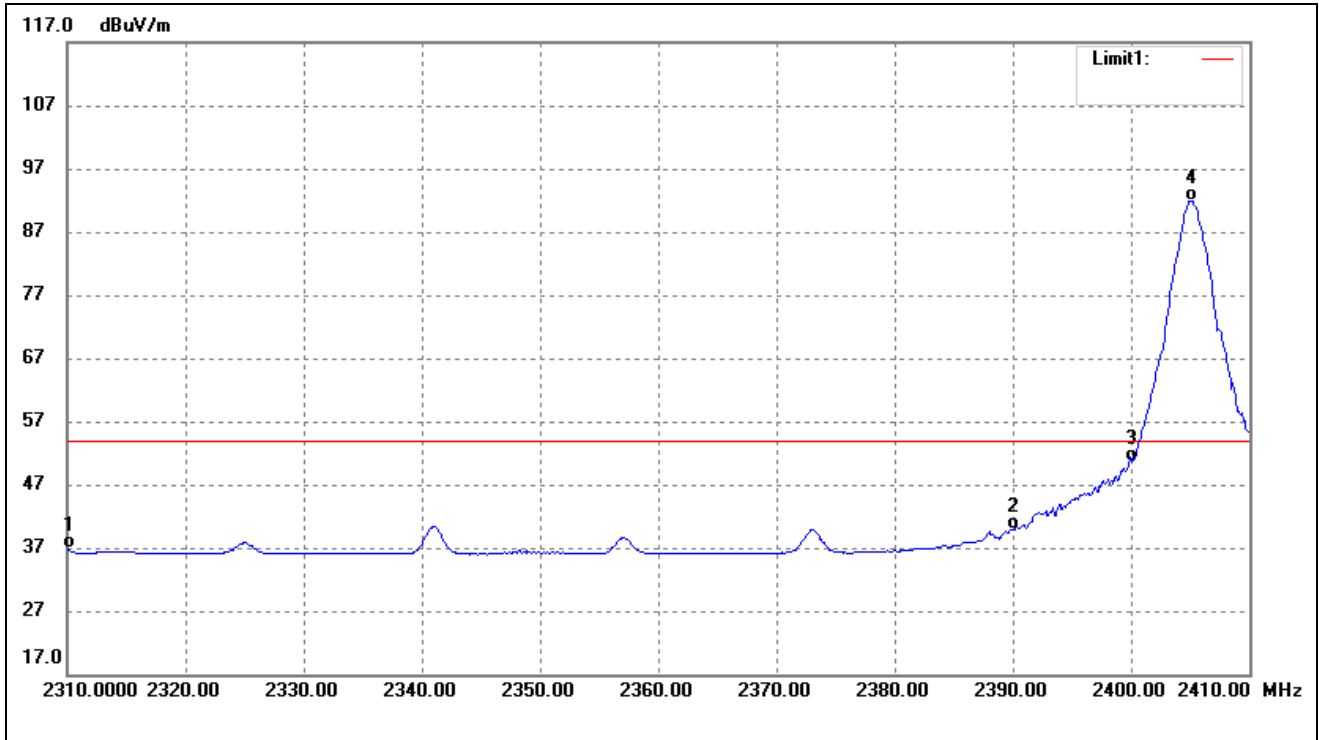

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	46.54	-9.66	36.88	54.00	-17.12	Ave Detector
	2310.000	57.79	-9.66	48.13	74.00	-25.87	Peak Detector
2	2390.000	49.47	-9.50	39.97	54.00	-14.03	Ave Detector
	2390.000	60.35	-9.50	50.85	74.00	-23.15	Peak Detector
3	2400.000	60.10	-9.48	50.62	54.00	-3.38	Ave Detector
	2400.000	77.63	-9.48	68.15	74.00	-5.85	Peak Detector
4	2405.100	101.42	-9.48	91.94	/	/	Ave Detector
	2405.500	115.85	-9.48	106.37	/	/	Peak Detector



Test Channel	High	Polarity:	Horizontal (worst case)
--------------	------	-----------	-------------------------

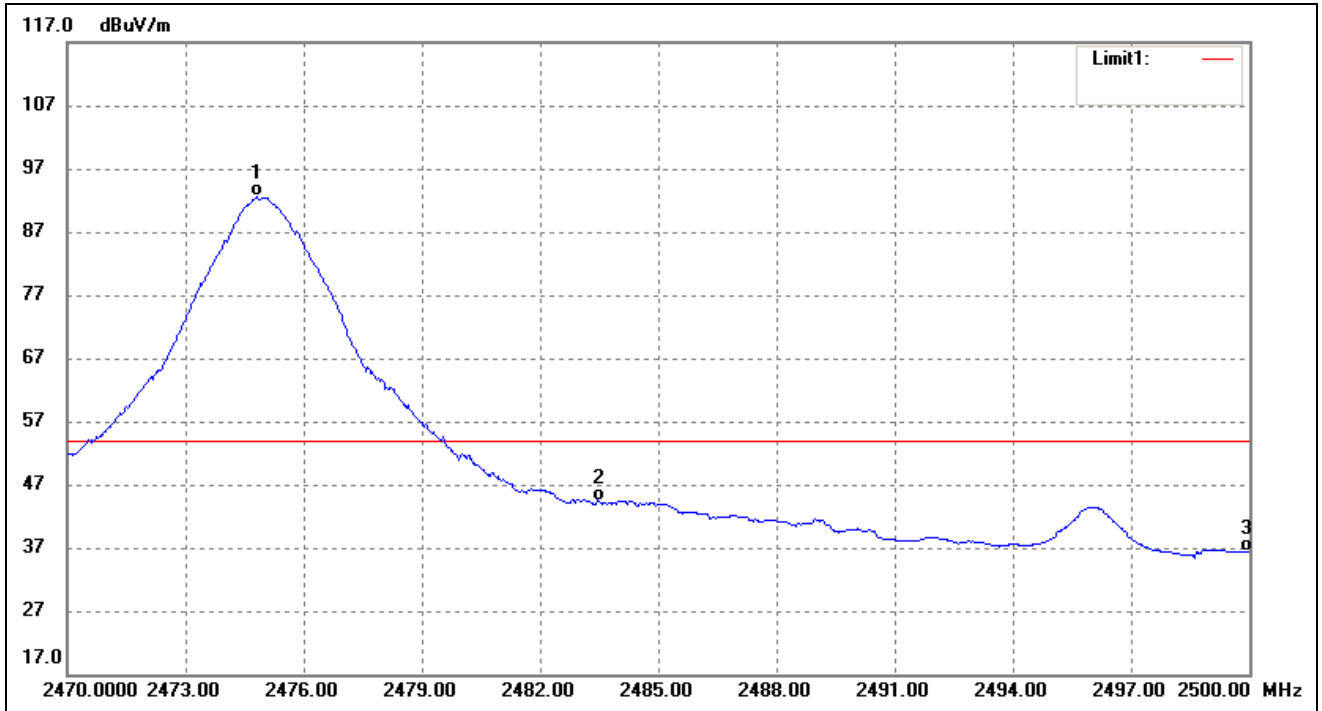

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2474.830	101.93	-9.34	92.59	/	/	Ave Detector
	2475.430	114.57	-9.33	105.24	/	/	Peak Detector
2	2483.500	53.59	-9.31	44.28	54.00	-9.72	Ave Detector
	2483.500	69.39	-9.31	60.08	74.00	-13.92	Peak Detector
3	2500.000	45.66	-9.28	36.38	54.00	-17.62	Ave Detector
	2500.000	57.92	-9.28	48.64	74.00	-25.36	Peak Detector

## 6. Emission Bandwidth

---

### 6.1 Standard Applicable

According to 15.215(c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

### 6.2 Test Procedure

According to the ANSI 63.10-2013, the emission bandwidth test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = 1MHz, centered on a transmitting channel

RBW  $\geq$  1% 20dB Bandwidth, VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down and 99% bandwidth of the emission.

### 6.3 Summary of Test Results/Plots

Test Channel	20dB Bandwidth(kHz)
Low Channel	2497
Middle Channel	2558
High Channel	2500

*Please refer to the following test plots*



<p>Low Channel</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.405 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>x dB -20.00 dB</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.405 GHz Span 5 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 2.2548 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB</p> <p>Transmit Freq Error -4.070 kHz x dB Bandwidth 2.497 MHz</p> <p>Trace 1 2 3</p> <p>Clear Write Max Hold Min Hold View Blank More 1 of 2</p>
<p>Middle Channel</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.451 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.451000000 GHz</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.451 GHz Span 5 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 2.2812 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB</p> <p>Transmit Freq Error -12.327 kHz x dB Bandwidth 2.558 MHz</p> <p>Trace 1 2 3</p> <p>Clear Write Max Hold Min Hold View Blank More 1 of 2</p>
<p>High Channel</p>	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.475 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 2.475000000 GHz</p> <p>Ref 10 dBm Atten 20 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.475 GHz Span 5 MHz</p> <p>#Res BW 30 kHz #VBW 100 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 2.2695 MHz Occ BW % Pwr 99.00 % x dB -20.00 dB</p> <p>Transmit Freq Error -16.612 kHz x dB Bandwidth 2.500 MHz</p> <p>Center Freq 2.47500000 GHz</p> <p>Start Freq 2.47250000 GHz</p> <p>Stop Freq 2.47750000 GHz</p> <p>CF Step 500.000000 kHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>


## 7. Conducted Emissions

### 7.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

### 7.2 Basic Test Setup Block Diagram

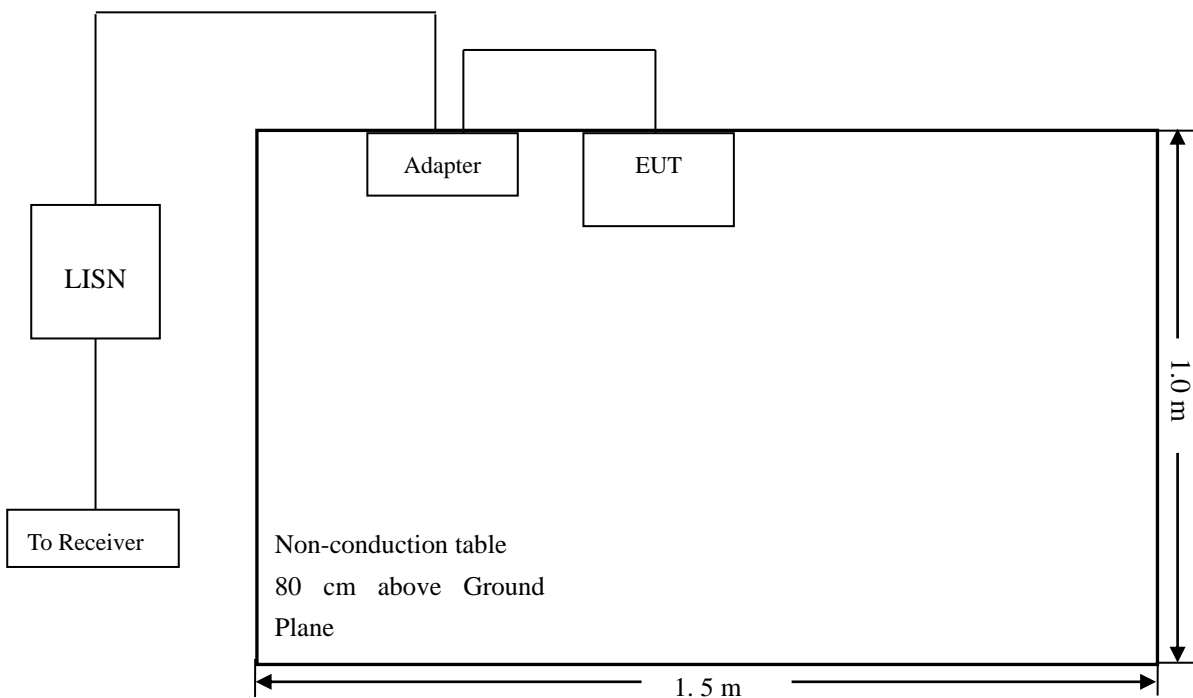

### 7.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency ..... 150 kHz  
 Stop Frequency ..... 30 MHz  
 Sweep Speed ..... Auto  
 IF Bandwidth..... 10 kHz  
 Quasi-Peak Adapter Bandwidth ..... 9 kHz  
 Quasi-Peak Adapter Mode ..... Normal

### 7.4 Summary of Test Results/Plots

Not applicable

\*\*\*\*\* END OF REPORT \*\*\*\*\*