

FCC Test Report

Report No.: AGC09477240607FR01

FCC ID	:	2AMZY-HIFIAWC
APPLICATION PURPOSE		Original Equipment
PRODUCT DESIGNATION	:	HiFi Acrylic Wireless Charger
BRAND NAME	:	Origaudio
MODEL NAME	:	Acrylic Wireless Charger, FF029
APPLICANT	:	HandStandsPromo LLC
DATE OF ISSUE	:	Jun. 19, 2024
STANDARD(S)	:	FCC Part 15 Subpart C
REPORT VERSION	:	V 1.0 V 1.0
<u>Attestation of</u>	<u>G</u> 0	bax compliance (Shenzhen) Co., Ltd



REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jun. 19, 2024	Valid	Initial Release



TABLE OF CONTENTS

1. GENERAL INFORMATION	5
2. PRODUCT INFORMATION	6
2.1 PRODUCT TECHNICAL DESCRIPTION	6
2.2 RELATED SUBMITTAL(S) / GRANT (S)	7
2.3 TEST METHODOLOGY	7
2.4 SPECIAL ACCESSORIES	7
2.5 EQUIPMENT MODIFICATIONS	7
2.6 ANTENNA REQUIREMENT	7
3. TEST ENVIRONMENT	8
3.1 ADDRESS OF THE TEST LABORATORY	8
3.2 TEST FACILITY	8
3.3 ENVIRONMENTAL CONDITIONS	9
3.4 MEASUREMENT UNCERTAINTY	9
3.5 LIST OF EQUIPMENTS USED	
4. SYSTEM TEST CONFIGURATION	11
4.1 EUT CONFIGURATION	11
4.2 EUT EXERCISE	11
4.3 CONFIGURATION OF TESTED SYSTEM	11
4.4 EQUIPMENT USED IN TESTED SYSTEM	
4.5 SUMMARY OF TEST RESULTS	
5. DESCRIPTION OF TEST MODES	
6. FIELD STRENGTH OF FUNDAMENTAL	14
6.1 PROVISIONS APPLICABLE	14
6.3 FIELD STRENGTH CALCULATION	
6.4 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
6.5 MEASUREMENT RESULTS	
7. 20 DB BANDWIDTH	
7.1 PROVISIONS APPLICABLE	24
7.2 MEASUREMENT PROCEDURE	24
7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
7.4 MEASUREMENT RESULTS	
8. AC POWER LINE CONDUCTED EMISSION TEST	
8.1 LIMITS OF LINE CONDUCTED EMISSION TEST	
8.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
	20



8.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	. 28
8.5 MEASUREMENT RESULTS	. 29
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	. 31
APPENDIX B: PHOTOGRAPHS OF TEST EUT	. 31



1. GENERAL INFORMATION

HandStandsPromo LLC
1770 South 5350 West Suite 100, Salt Lake City, Utah 84104, United States
Shenzhen Winnershine Electronics Co., Ltd
Floor 3, Building 1,32# JIAHUA Road, BAO'AN Community, YuanShan Street, Long Gang district, Shenzhen 518115 China
Shenzhen Winnershine Electronics Co., Ltd
Floor 3, Building 1,32# JIAHUA Road, BAO'AN Community, YuanShan Street, Long Gang district, Shenzhen 518115 China
HiFi Acrylic Wireless Charger
Origaudio
Acrylic Wireless Charger
FF029
All the same except for the model name.
Jun. 12, 2024
Jun. 12, 2024 to Jun. 19, 2024
No any deviation from the test method
Normal
Pass
AGCER -FCC-WPT-V1

The test results of this report relate only to the tested sample identified in this report.

Prepared By

Jack Gai

Jack Gui (Project Engineer)

Jun. 19, 2024

Reviewed By

Calvin Liu (Reviewer)

Jun. 19, 2024

Zhang

Approved By

Max Zhang (Authorized Officer)

Jun. 19, 2024



2. PRODUCT INFORMATION

2.1 PRODUCT TECHNICAL DESCRIPTION

Hardware Version	v1.0
Software Version	v1.0
Frequency Band	WPT Band 1: 110.5kHz-205kHz WPT Band 2: 110.5kHz-205kHz WPT Band 3: 110.5kHz-205kHz
Operation Frequency	126.6kHz, 142.6kHz, 153.6kHz
Modulation Type	ASK
Field Strength of Fundamental	69.76dBuV/m@3m (Max)
Antenna Designation	Coil Antenna
Input Rating	DC5V 3A, DC9V 2.22A
Wireless Charging Power	WPT 1: Wireless Output for TWS: 2.5W Max WPT 2: Wireless Output for phone: 5W/7.5W/15W Max WPT 3: Wireless Output for phone: 5W/7.5W/15W Max Wireless Output: 20W Max



2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AMZY-HIFIAWC** filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.3 TEST METHODOLOGY

The tests were performed according to following standards:

No.	Identity	Document Title			
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations			
2	FCC 47 CFR Part 15	Radio Frequency Devices			
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices			

2.4 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

2.5 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.6 ANTENNA REQUIREMENT

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antennathat uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a brokenantenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will.



3. TEST ENVIRONMENT

3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 ENVIRONMENTAL CONDITIONS

	NORMAL CONDITIONS	EXTREME CONDITIONS			
Temperature range (°C)	15 - 35	-20 - 50			
Relative humidty range	20 % - 75 %	20 % - 75 %			
Pressure range (kPa)	86 - 106	86 - 106			
Power supply					
Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.					

3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 150kHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission below 30MHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	U _c = ±2 %
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %



3.5 LIST OF EQUIPMENTS USED

• R	RF Conducted Test System						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-02-01	2025-01-31
	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A
• R	adiated Spurio	us Emission					
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31
\boxtimes	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23
	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04
	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10
	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-03-23	2025-03-22
	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23
	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03
	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22
	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08

• A	AC Power Line Conducted Emission							
Used	Equipment No.	Test Equipment	Manufacturer Model No. Serial No. Last Cal. Date (YY-MM-DD) Next Cal. (YY-MM-DD)					
\boxtimes	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27	
\boxtimes	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	
\boxtimes	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27	

• Tes	Test Software							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information			
	AGC-EM-S003	RE Test System	FARA	EZ-EMC	V.RA-03A			
\square	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71			



4. SYSTEM TEST CONFIGURATION

4.1 EUT CONFIGURATION


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT EXERCISE


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 CONFIGURATION OF TESTED SYSTEM

Radiated Emission Configure:



Conducted Emission Configure:





4.4 EQUIPMENT USED IN TESTED SYSTEM

The Following Peripheral Devices And Interface Cables Were Connected During The Measurement: Test Accessories Come From The Laboratory

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Wireless charging earphones	BT-ME10	HONOR		
2	Phone	HONOR 200 Pro	HONOR		
3	Phone	MI 11	XIAOMI		
4	Adapter	HW-050200C 01	HUAWEI		

☐ Test Accessories Come From The Manufacturer

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	HiFi Acrylic Wireless Charger	Acrylic Wireless Charger	Shenzhen Winnershine Electronics Co., Ltd		1m unshielded

4.5 SUMMARY OF TEST RESULTS

Item	FCC Rules	Description Of Test	Result
1	§15.203	Antenna Equipment	Pass
2	§15.209(a)(f)	Radiated Spurious Emission	Pass
3	§15.215(c)	20dB Bandwidth	Pass
4	§15.205(a)	Restricted Bands of Operation	Pass
5	§15.207	AC Power Line Conducted Emission	Pass



5. DESCRIPTION OF TEST MODES

Summary table of Test Cases						
Test Item	Equipment type / Modulation					
iest item	WPT_(TX:126.6kHz/142.6kHz /153.6kHz)/ ASK					
	AC/DC Adapter(DC9V) + EUT + Mobile Phone1(Battery Status: <1%)+ Mobile Phone2 (Battery Status: <1%)+Wireless earphone (Full Load)					
	AC/DC Adapter(DC9V) + EUT + Mobile Phone1(Battery Status: <50%)+ Mobile Phone2 (Battery Status: <50%)+Wireless earphone (Half Load)					
Radiated & Conducted	AC/DC Adapter(DC9V) + EUT + Mobile Phone1(Battery Status: 100%)+ Mobile Phone2 (Battery Status: 100%)+Wireless earphone (Null Load)					
Test Cases	AC/DC Adapter(DC5V) + EUT + Mobile Phone1(Battery Status: <1%)+ Mobile Phone2 (Battery Status: <1%)+Wireless earphone (Full Load)					
	AC/DC Adapter(DC5V) + EUT + Mobile Phone1(Battery Status: <50%)+ Mobile Phone2 (Battery Status: <50%)+Wireless earphone (Full Load)					
	AC/DC Adapter(DC5V) + EUT + Mobile Phone1(Battery Status: 100%)+ Mobile Phone2 (Battery Status: 100%)+Wireless earphone (Null Load)					
	AC/DC Adapter(DC9V) + EUT + Mobile Phone1(Battery Status: <1%)+ Mobile Phone2 (Battery Status: <1%)+Wireless earphone (Full Load)					
	AC/DC Adapter(DC9V) + EUT + Mobile Phone1(Battery Status: <50%)+ Mobile Phone2 (Battery Status: <50%)+Wireless earphone (Half Load)					
AC Conducted Emission	AC/DC Adapter(DC9V) + EUT + Mobile Phone1(Battery Status: 100%)+ Mobile Phone2 (Battery Status: 100%)+Wireless earphone (Null Load)					
AC Conducted Emission	AC/DC Adapter(DC5V) + EUT + Mobile Phone1(Battery Status: <1%)+ Mobile Phone2 (Battery Status: <1%)+Wireless earphone (Full Load)					
	AC/DC Adapter(DC5V) + EUT + Mobile Phone1(Battery Status: <50%)+ Mobile Phone2 (Battery Status: <50%)+Wireless earphone (Half Load)					
	AC/DC Adapter(DC5V) + EUT + Mobile Phone1(Battery Status: 100%)+ Mobile Phone2 (Battery Status: 100%)+Wireless earphone (Null Load)					

2.

For Radiated Emission, 3axis were chosen for testing for each applicable mode.



6. FIELD STRENGTH OF FUNDAMENTAL

6.1 PROVISIONS APPLICABLE

Test Requirement:	FCC Part15 C Section 15.209							
Test Method:	ANSI C63.10:2013							
Test Frequency Range:	9KHz to 1GHz							
Test site:	Measurement Distar	nce: 3m						
	Frequency	Detector	RBW	VBW	Value			
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak			
Receiver setup:	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak			
Receiver setup.	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak			
		Peak	1MHz	3MHz	Peak			
	Above 1GHz	Peak	1MHz	10Hz	Average			
	•							

Limits for frequency below 30MHz

Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.490	2400/F(kHz)	300	Quasi-peak Value
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value

Limits for frequency Above 30MHz

Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.00	Quasi-peak Value
88MHz-216MHz	43.50	Quasi-peak Value
216MHz-960MHz	46.00	Quasi-peak Value
960MHz-1GHz	54.00	Quasi-peak Value
	54.00	Average Value
Above 1GHz	74.00	Peak Value

Remark: (1) Emission level dB μ V = 20 log Emission level μ V/m

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



6.2 MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



6.3 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CF - AG - AV

where FS = Field Strength in $dB\mu V/m$

RA = Receiver Amplitude (including preamplifier) in dBµV

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB/m

AG = Amplifier Gain in dB

AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

FS = RR + LF

where $FS = Field Strength in dB\mu V/m$ RR = RA - AG - AV in dB μ V LF = CF + AF in dB

Assume a receiver reading of 52.0 dB μ V is obtained. The antenna factor of 7.4 dB/m and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 27 dB μ V/m.

This value in dB μ V/m was converted to its corresponding level in μ V/m.

 $\begin{array}{ll} {\sf RA} = 52.0 \ d{\sf B}\mu{\sf V}/{\sf m} & \\ {\sf AF} = 7.4 \ d{\sf B}/{\sf m} & {\sf RR} = 18.0 \ d{\sf B}\mu{\sf V} \\ {\sf CF} = 1.6 \ d{\sf B} & {\sf LF} = 9.0 \ d{\sf B} \\ {\sf AG} = 29.0 \ d{\sf B} & \\ {\sf AV} = 5.0 \ d{\sf B} & \\ {\sf FS} = {\sf RR} + {\sf LF} \\ {\sf FS} = 18 + 9 = 27 \ d{\sf B}\mu{\sf V}/{\sf m} & \\ \end{array}$

Level in μ V/m = Common Antilogarithm [(27 dB μ V/m)/20] = 22.4 μ V/m

Magnetic field strength calculation (9 kHz – 30 MHz)

When the limit is in terms of magnetic field, the following equation applies:

```
H[dB(\mu A/m)] = V[dB(\mu V)] + LC [dB] - GPA [dB] + AFH [dB(S/m)]
```

Where,

H is the magnetic field strength (to be compared with the limit), V is the voltage level measured by the receiver or spectrum analyzer, LC is the cable loss, GPA is the gain of the preamplifier (if used), and AFH is the magnetic antenna factor.

If the "electrical" antenna factor is used instead, the above equation becomes:


 $H[dB(\mu A/m)] = V[dB(\mu V)] + LC [dB] - GPA [dB] + AFE [dB(m-1)] - 51.5 [dB\Omega]$

where AFE is the "electric" antenna factor, as provided by the antenna calibration laboratory.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




6.4 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

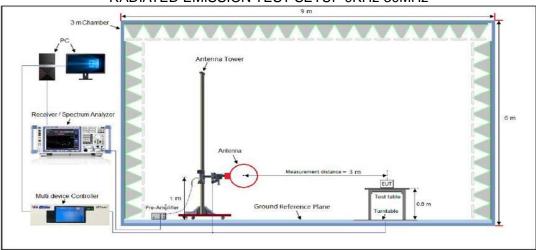

RADIATED EMISSION TEST SETUP 9KHz-30MHz

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

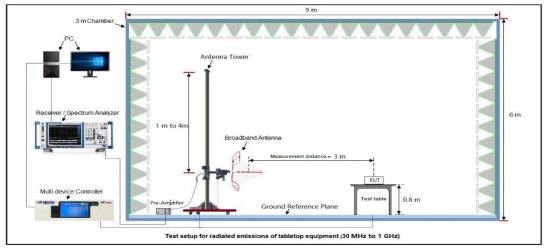


The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.205 limits.



6.5 MEASUREMENT RESULTS

ELECTRIC FIELD TEST IN THE FREQUENCY RANGE 9kHz-150kHz

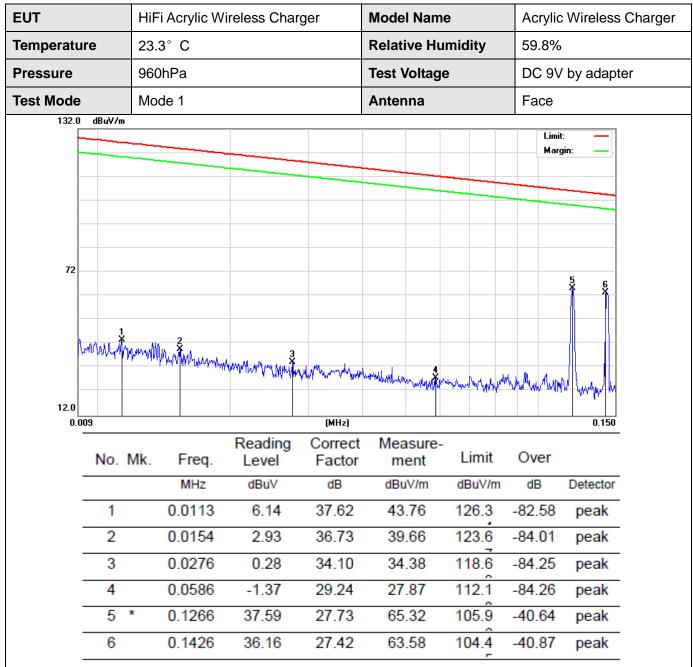


RESULT: PASS



EUT	HiFi Acrylic Wi	reless Charg	ger	Model Nam	e	Acrylic	Wireless Charger	
Temperature	23.3°C			Relative Hu	midity	59.8%		
Pressure	960hPa	Test Voltage	e	DC 9V	DC 9V by adapter			
Test Mode	Mode 1			Antenna		Side	Side	
132.0 dBuV/m						Limit		
						Marg		
							5 X X	
72								
derate								
a www.	Martin Brandhraden	ha Mada		3	4		(N.m.)	
	. Jos att.	the opposite of the stand	My manut we	3 million when the the	Matthen Montan	milledhoolding	v tv₩*t*	
12.0								
0.009			(MHz)				0.150	
No. M	lk. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	
1	0.0102	7.75	37.86	45.61	127.2	-81.62	peak	
2	0.0157	2.40	36.67	39.07	123.5	-84.43	peak	
3	0.0419	1.82	31.39	33.21	115.0	-81.82	peak	
4	0.0720	6.68	28.21	34.89	110.3	-75.46	peak	
5	0.1266	50.92	27.72	78.64	105.9	-27.28	peak	
6 *	0.1426	50.31	27.46	77.77	104.6	-26.84	peak	

ELECTRIC FIELD TEST IN THE FREQUENCY RANGE 9kHz-150kHz

RESULT: PASS





EUT	Hil	Fi Acrylic Wi	reless Char	Model Name		Acrylic	Acrylic Wireless Charge		
Temperature	23	.3° C			Relative Hu	midity	59.8%	59.8%	
Pressure	ssure 960hPa					Test Voltage DC 9V by adapte			
Test Mode	est Mode Mode 1						Face	Face	
112.0 dBuX							Limit Marg		
-8	vennadokadbi	Why Marm	Vyneron of Lowerson	majuran filameran 	erentensationalisenationalisena	www.www.wanawayn	S her-dud-lehand	Luliningen, soler, soler and all	
- Marine	nnnsiskilli	0.5		(MHz)	5		5x	30.000	
-8 0.150	o. Mk.	0.5	Reading			Limit	Mrr-Juk/4/44J-wild		
-8 0.150		0.5 Freq. MHz	Reading Level dBuV	(MHz) Correct Factor dB	5 Measure-				
-8 0.150		0.5 Freq.	Reading	(MHz) Correct Factor	5 Measure- ment	Limit	Over	30.000	
-8 0.150 No	p. Mk.	0.5 Freq. MHz	Reading Level dBuV	(MHz) Correct Factor dB	5 Measure- ment dBuV/m	Limit dBuV/m	Over	30.000 Detector	
-8 0.150 No	p. Mk.	0.5 Freq. MHz 0.1530	Reading Level dBuV 41.71	(MHz) Correct Factor dB 27.27	5 Measure- ment dBuV/m 68.98	Limit dBuV/m 103.8	Over dB -34.82	30.000 Detector peak	
-8 0.150 No	p. Mk. 1	0.5 Freq. MHz 0.1530 0.3286	Reading Level dBuV 41.71 31.55	(MHz) Correct Factor dB 27.27 25.31	5 Measure- ment dBuV/m 68.98 56.86	Limit dBuV/m 103.8 97.25	Over dB -34.82 -40.39	30.000 Detector peak peak	
-8 0.150 No	p. Mk. 1 2 3	0.1530 0.3286 0.5237	Reading Level dBuV 41.71 31.55 14.83	(мнг) Соггест Factor dB 27.27 25.31 25.39	56.86 40.22	Limit dBuV/m 103.8 97.25 73.22	Over dB -34.82 -40.39 -33.00	30.000 Detector peak peak peak	

ELECTRIC FIELD TEST IN THE FREQUENCY RANGE 150kHz-30MHz

RESULT: PASS



JT	HiFi Acrylic Wireless Charger			Model Name	9	Acrylic	Acrylic Wireless	
emperature	23.3° C			Relative Hu	midity	59.8%)	
ressure	960hPa			Test Voltage	;	DC 9V	DC 9V by adapter	
est Mode				Antenna		Side	Side	
122.0 dBuV/m	• · · · · · ·					Limit		
						Marg		
1								
62								
62	2							
	2							
A.			4			5	6	
Muman	under of the state	A marthadate and the second	and wanted to the second state of the second s	Andrew Additionad on publication	all market you have		6 MM man	
Marine		A month and the second	ghalansadi. Magan <mark>4</mark> ghalansadi. Magan <mark>4</mark>	taulaanatallisaadap yoddoor	uter and the property of the second		6 AMA Man Market	
Marine		A _{noro} hondarinahonnon	and work of the second second	And any And Social optimal Social	ultracetat grapes	-Merosperior	Man mar	
2.0		A mover from the Westerney			where what you are	Morente de la composition de la composition de la composition de la		
	0.5		(MHz)	5	ultreacht gereacht		6 4 ¹⁴ 4 ¹⁴ 30.000	
2.0	0.5	Reading	(MHz) Correct	5 Measure-				
2.0	0.5 Mk. Freq.	Reading Level	(MHz) Correct Factor	5 Measure- ment	Limit	Over	30.000	
2.0 0.150 No.	0.5 Mk. Freq. MHz	Reading Level dBuV	(MHz) Correct Factor dB	5 Measure- ment dBuV/m	Limit dBuV/m	Over dB	30.000 Detector	
2.0 0.150 No.	0.5 0.5 Mk. Freq. MHz 0.1530	Reading Level dBuV 42.96	(MHz) Correct Factor dB 27.28	5 Measure- ment dBuV/m 70.24	Limit dBuV/m 103.8	Over dB -33.57	30.000 Detector peak	
2.0 0.150 No.	0.5 Mk. Freq. MHz	Reading Level dBuV	(MHz) Correct Factor dB	5 Measure- ment dBuV/m	Limit dBuV/m	Over dB	30.000 Detector	
2.0 0.150 No.	0.5 0.5 Mk. Freq. MHz 0.1530	Reading Level dBuV 42.96	(MHz) Correct Factor dB 27.28	5 Measure- ment dBuV/m 70.24	Limit dBuV/m 103.8	Over dB -33.57	30.000 Detector peak	
2.0 0.150 No. 1 2.0	0.5 0.5 Mk. Freq. MHz 0.1530 0.3303	Reading Level dBuV 42.96 26.03	(MHz) Correct Factor dB 27.28 25.32	5 Measure- ment dBuV/m 70.24 51.35	Limit dBuV/m 103.8 97.20	Over dB -33.57 -45.85	30.000 Detector peak peak	
2.0 0.150 No. 1 2 3	0.5 Mk. Freq. MHz 0.1530 0.3303 * 0.5523	Reading Level dBuV 42.96 26.03 14.92	(мнг) Correct Factor dB 27.28 25.32 25.38	5 Measure- ment dBuV/m 70.24 51.35 40.30	Limit dBuV/m 103.8 97.20 72.76	Over dB -33.57 -45.85 -32.46	30.000 Detector peak peak peak	

ELECTRIC FIELD TEST IN THE FREQUENCY RANGE 150kHz-30MHz

RESULT: PASS

- NOTES:
- 1. Quasi-Peak detector is used for frequency below 30MHz.
- 2. Negative value in the margin column shows emission below limit.
- 3. All measurements were made with 0.6m loop antenna at 3m distance. All emissions are below the QP limit.
- 4. Corr. Factor= Antenna Factor (dB/m) + Cable Loss (dB)
- 5. Loop antenna is used for the emission under 30MHz.



IT mperature essure	HiFi /		RADIATED EMISSION E					
-	HiFi Acrylic Wireless Charger					Acry Cha	lic Wireless rger	
essure	23.3	°C		Relative	Relative Humidity		59.8%	
	960h	960hPa Mode 1			Test Voltage Antenna		DC 9V by adapte Horizontal	
st Mode	Mode							
72.0 dBuV/m								
						Limit:		
						Marg	in:	
							fi	
							ŝ	
32				3	4 X	5 Mandarahan	and the second second	
			. 🍇	, Å	Jun	and the state of t	V.	
	1 X	1 when the state	month have well "	Manufarty Mr.	~~~			
www.warder.	hepotitic of the matter was	a the Andrew Marine	"NUT	ruger .				
-8 30.000 40	50 60	70 80	(MHz)	300	400	500 600 70	DO 1000.000	
		Reading	Correct	Measure-				
No. Mk.	Freq.	Level	Factor	ment	Limit	Over		
					dD. Aller	-ID	Detector	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	
	5.8047	8.01	12.79	20.80	40.00	-19.20	peak	
1 55								
	6.4409	15.32	12.94	28.26	43.50	-15.24	peak	
2 186	6.4409 2.1794	15.32 13.69	12.94 16.50	28.26 30.19	43.50 46.00	-15.24 -15.81	peak peak	
2 186 3 312							· · ·	
2 186 3 312 4 370	2.1794	13.69	16.50	30.19	46.00	-15.81	peak	

RADIATED EMISSION BELOW 1GHz

RESULT: PASS



	RADI	ATED EMISSION	BELOW 10				
EUT	HiFi Acrylic Wir	eless Charger	Model Na	ame	Acryl Char	ic Wireless ger	
Temperature	23.3°C		Relative	Humidity	59.89	%	
Pressure	960hPa		Test Volt	Test Voltage		V by adapter	
Test Mode	Mode 1		Antenna	Antenna		cal	
72.0 dBuV/m							
					Limit: Margir	n	
	2				6		
32		3		The Martin Marian	when when when	when the product of the	
The show the states	P. My manuscrath	where we wanted	h munit	with Weeks	• ·		
v	1 A MARCH PROVIDE APPLICAT		hourse and the				
-8							
30.000 40 5	0 60 70 80	(MHz)	300	400 5	00 600 70	0 1000.000	
	Readi	ng Correct	Measure-				
No. Mk.	Freq. Leve	<u> </u>	ment	Limit	Over		
	MHz dBuV	′ dB	dBuV/m	dBuV/m	dB	Detector	
1 41.	.7129 15.93	3 16.92	32.85	40.00	-7.15	peak	
2 * 55.	.8047 18.42	2 17.06	35.48	40.00	-4.52	peak	
3 148.	.4410 13.11	1 18.20	31.31	43.50	-12.19	peak	
4 191.	.7450 14.18	8 18.15	32.33	43.50	-11.17	peak	
5 373.	.3112 10.3	5 21.33	31.68	46.00	-14.32	peak	
6 721.	.7259 6.92	2 28.64	35.56	46.00	-10.44	peak	

RADIATED EMISSION BELOW 1GHz

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Over=Measurement-Limit.

- 2. All test modes had been pre-tested. The mode 5 is the worst case and recorded in the report.
- 3. The "Factor" value can be calculated automatically by software of measurement system.



7. 20 dB BANDWIDTH

7.1 PROVISIONS APPLICABLE


N/A

7.2 MEASUREMENT PROCEDURE

Set the parameters of SPA as below:

- 1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
- 2. Centre frequency = Operation Frequency
- 3. The resolution bandwidth of 300Hz and the video bandwidth of 1kHz were used.
- 4. Span: 3kHz, Sweep time: Auto
- 5. Set the EUT to continue transmitting mode. Allow the trace to stabilize. Use the "N dB down" function of SPA to define the bandwidth.
- 6. Measured the spectrum width with power higher than 20dB below carrier.
- 7. Measured the 99% OBW.
- 8. Record the plots and Reported.

7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

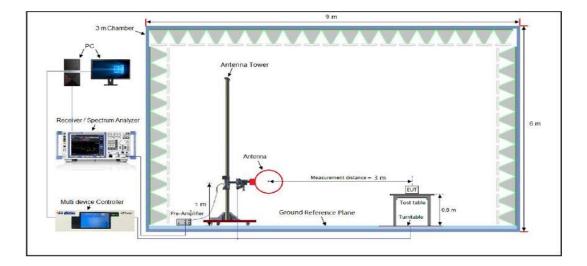





7.4 MEASUREMENT RESULTS

	Tes	t Data of Occupied Bandwi	dth and -20dB Bandwic	lth	
Test Mode	Test Channel (kHz)	99% Occupied Bandwidth (kHz)	-20dB Bandwidth (kHz)	Limits (kHz)	Pass or Fail
ASK	126.6	0.696	0.818	N/A	Pass
ASK	142.6	0.704	0.824	N/A	Pass
ASK	153.6	1.114	0.952	N/A	Pass

Test Graphs of Occupied Bandwidth&-20dB Bandwidth

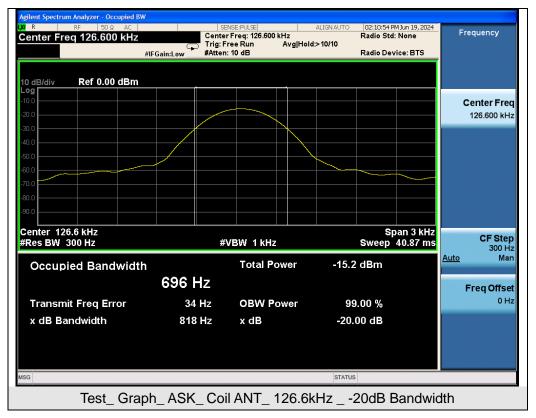



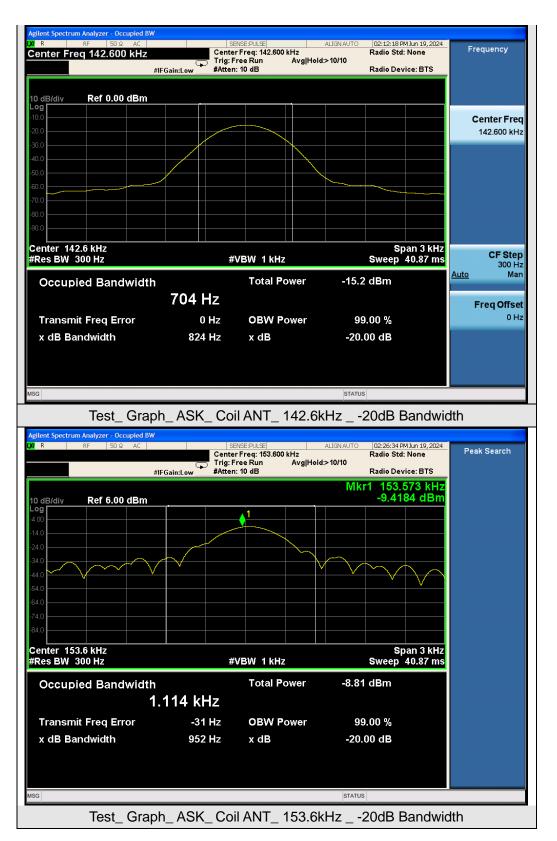

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



8. AC POWER LINE CONDUCTED EMISSION TEST

8.1 LIMITS OF LINE CONDUCTED EMISSION TEST


Fragmenta	Maximum RF Line Voltage				
Frequency	Q.P. (dBµV)	Average (dBµV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

8.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

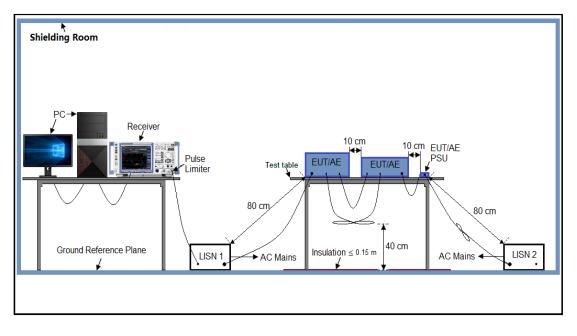



8.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 9V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.


Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

8.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.



8.5 MEASUREMENT RESULTS

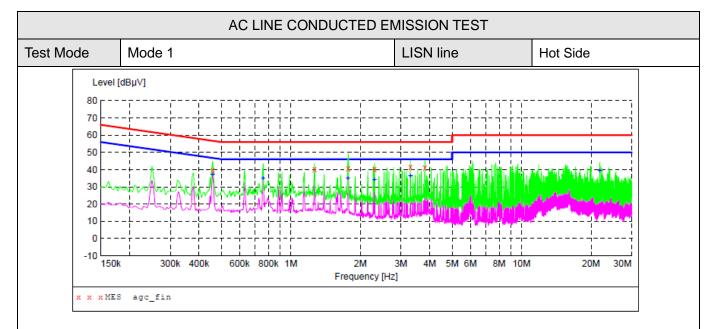

MEASUREMENT RESULT: "agc fin"

2024/6/16	14:24					
Frequen M	cy Level Hz dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.4580	00 40.00	6.1	57	16.7	QP	L1
1.2660	00 40.30	6.2	56	15.7	QP	ь1
1.7740	00 40.80	6.2	56	15.2	QP	L1
2.3020	00 40.30	6.3	56	15.7	QP	ь1
3.2940	00 41.40	6.3	56	14.6	QP	ь1
3.8060	00 41.00	6.3	56	15.0	QP	ь1

MEASUREMENT RESULT: "agc fin2"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.458000	37.00	6.1	47	9.7	AV	L1
0.758000	35.00	6.2	46	11.0	AV	L1
1.766000	35.00	6.2	46	11.0	AV	L1
2.302000	34.10	6.3	46	11.9	AV	L1
3.294000	36.30	6.3	46	9.7	AV	L1
21.818000	39.30	7.4	50	10.7	AV	L1

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Line

Ν


Ν

Ν

Ν

Ν

Ν

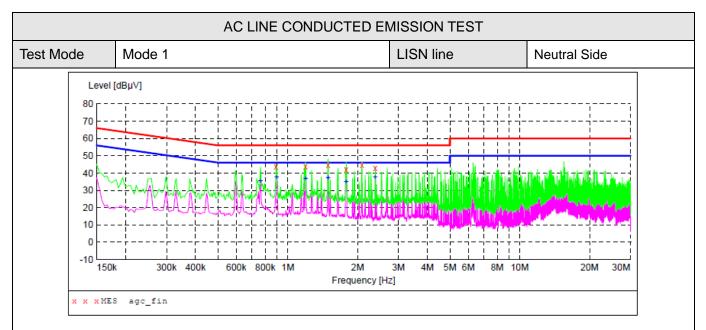

MEASUREMENT RESULT: "agc fin"

2024/6/16 14:28 Transd Limit Margin Frequency Level Detector MHz dBµV dB dBµV dB 0.890000 6.2 56 12.2 43.80 QP 1.190000 43.60 6.2 56 12.4 OP 1.490000 44.70 6.2 56 11.3 QP 1.786000 42.00 6.2 56 14.0 QP 56 2.086000 44.70 6.2 11.3 QP 2.382000 43.10 6.3 56 12.9 QP

MEASUREMENT RESULT: "agc fin2"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.762000	35.50	6.2	46	10.5	AV	N
0.894000	37.80	6.2	46	8.2	AV	N
1.194000	36.60	6.2	46	9.4	AV	N
1.490000	37.20	6.2	46	8.8	AV	N
1.786000	34.90	6.2	46	11.1	AV	N
2.382000	37.60	6.3	46	8.4	AV	N

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC09477240607AP01

APPENDIX B: PHOTOGRAPHS OF TEST EUT

Refer to the Report No.: AGC09477240607AP02

-----END OF REPORT-----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.