

<b>Prüfbericht-Nr.:</b> <i>Test report no.:</i>	<b>CN222YPF 001</b>	<b>Auftrags-Nr.:</b> <i>Order no.:</i>	<b>244407066</b>	Seite 1 von 108 Page 1 of 108
<b>Kunden-Referenz-Nr.:</b> <i>Client reference no.:</i>	<b>P00590493</b>	<b>Auftragsdatum:</b> <i>Order date:</i>	<b>2022-02-14</b>	
<b>Auftraggeber:</b> <i>Client:</i>	<b>Beijing Roborock Technology Co., Ltd.</b> Floor 6, Suite 6016, 6017, 6018, Building C, Kangjian Baosheng Plaza, No. 8 Heiquan Road, Haidian District, 100192 Beijing, P. R. China			
<b>Prüfgegenstand:</b> <i>Test item:</i>	Robotic Vacuum Cleaner			
<b>Bezeichnung / Typ-Nr.:</b> <i>Identification / Type no.:</i>	Q340RR 2AN2O-Q340RR01 23317-Q340RR01			
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	C2PC			
<b>Prüfgrundlage:</b> <i>Test specification:</i>	FCC CFR47 Part 15, Subpart C Section 15.247 RSS-Gen Issue 5, Amendment 2, February 2021 RSS-247 Issue 2, February 2017 ANSI C63.10: 2013			
<b>Wareneingangsdatum:</b> <i>Date of sample receipt:</i>	2022-02-14	Refer to photo document		
<b>Prüfmuster-Nr.:</b> <i>Test sample no.:</i>	A003212047-003~004			
<b>Prüfzeitraum:</b> <i>Testing period:</i>	Refer to test report			
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	TÜV Rheinland (Shanghai) Co., Ltd.			
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	TÜV Rheinland (Shanghai) Co., Ltd.			
<b>Prüfergebnis*:</b> <i>Test result*:</i>	Pass			
<b>geprüft von:</b> <i>tested by:</i>	<u>X Yanli Fan</u>	<b>genehmigt von:</b> <i>authorized by:</i>	<u>X Hongfei Wu</u>	
<b>Datum:</b> <i>Date:</i> 2022-04-06	Signed by: Yanli Fan	<b>Ausstellungsdatum:</b> <i>Issue date:</i> 2022-04-06	Signed by: Hongfei Wu	
<b>Stellung / Position:</b>	PE/Yanli Fan	<b>Stellung / Position:</b>	Reviewer/Hongfei Wu	
<b>Sonstiges /</b> <i>Other:</i>	HVIN: Q340RR-FN31 This report is for Class II permission change application due to the PCB and the power setting of 802.11b (from -50 to -55) is changed. So only the related tests were performed.			
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
* Legend:	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested
<b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b> <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

## TEST SUMMARY

### 5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

### 5.1.2 6dB & 99% BANDWIDTH

RESULT: Pass

### 5.1.3 PEAK OUTPUT POWER

RESULT: Pass

### 5.1.4 POWER SPECTRAL DENSITY

RESULT: Pass

### 5.1.5 CONDUCTED BAND EDGE AND OUT-OF BAND EMISSIONS

RESULT: Pass

### 5.2.1 CONDUCTED EMISSION

RESULT: Pass

### 5.3.1 RADIATED BAND-EDGE

RESULT: Pass

### 5.3.2 RADIATED SPURIOUS EMISSION

RESULT: Pass

## Contents

<b>1.</b>	<b>GENERAL REMARKS .....</b>	<b>4</b>
<b>1.1</b>	<b>COMPLEMENTARY MATERIALS.....</b>	<b>4</b>
<b>2.</b>	<b>TEST SITES .....</b>	<b>4</b>
<b>2.1</b>	<b>TEST FACILITIES .....</b>	<b>4</b>
<b>2.2</b>	<b>LIST OF TEST AND MEASUREMENT INSTRUMENTS.....</b>	<b>5</b>
<b>2.3</b>	<b>TRACEABILITY .....</b>	<b>5</b>
<b>2.4</b>	<b>CALIBRATION .....</b>	<b>5</b>
<b>2.5</b>	<b>MEASUREMENT UNCERTAINTY .....</b>	<b>6</b>
<b>3.</b>	<b>GENERAL PRODUCT INFORMATION.....</b>	<b>7</b>
<b>3.1</b>	<b>PRODUCT FUNCTION AND INTENDED USE .....</b>	<b>7</b>
<b>3.2</b>	<b>RATINGS AND SYSTEM DETAILS.....</b>	<b>7</b>
<b>3.3</b>	<b>INDEPENDENT OPERATION MODES.....</b>	<b>8</b>
<b>3.4</b>	<b>NOISE GENERATING AND NOISE SUPPRESSING PARTS .....</b>	<b>8</b>
<b>3.5</b>	<b>SUBMITTED DOCUMENTS.....</b>	<b>8</b>
<b>4.</b>	<b>TEST SET-UP AND OPERATION MODES.....</b>	<b>9</b>
<b>4.1</b>	<b>PRINCIPLE OF CONFIGURATION SELECTION .....</b>	<b>9</b>
<b>4.2</b>	<b>TEST OPERATION AND TEST SOFTWARE.....</b>	<b>9</b>
<b>4.3</b>	<b>SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT .....</b>	<b>9</b>
<b>4.4</b>	<b>COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....</b>	<b>9</b>
<b>5.</b>	<b>TEST RESULTS .....</b>	<b>10</b>
<b>5.1</b>	<b>CONDUCTED TESTING AT ANTENNA PORT .....</b>	<b>10</b>
5.1.1	<i>Antenna Requirement.....</i>	<i>10</i>
5.1.2	<i>6dB &amp; 99% Bandwidth.....</i>	<i>12</i>
5.1.3	<i>Peak Output Power .....</i>	<i>15</i>
5.1.4	<i>Power Spectral Density .....</i>	<i>17</i>
5.1.5	<i>Conducted Band Edge and out-of Band Emissions.....</i>	<i>19</i>
<b>5.2</b>	<b>EMISSION IN THE FREQUENCY RANGE UP TO 30MHZ.....</b>	<b>23</b>
5.2.1	<i>Conducted Emission.....</i>	<i>23</i>
<b>5.3</b>	<b>EMISSION IN THE FREQUENCY RANGE ABOVE 30MHZ .....</b>	<b>26</b>
5.3.1	<i>Radiated Band-Edge .....</i>	<i>26</i>
5.3.2	<i>Radiated Spurious Emission.....</i>	<i>33</i>
<b>6.</b>	<b>LIST OF TABLES .....</b>	<b>106</b>
<b>7.</b>	<b>LIST OF FIGURES .....</b>	<b>106</b>

## 1. General Remarks

### 1.1 Complementary Materials

Null.

## 2. Test Sites

### 2.1 Test Facilities

TÜV Rheinland (Shanghai) Co., Ltd.

Shanghai TUV Rheinland Building No. 177, 178 Lane 777, West Guangzhong Rd, Jing'an District, Shanghai, China

The used test equipment is in accordance with CISPR 16 for measurement of radio interference.

The Federal Communications Commission has reviewed the technical characteristics of the radiated and conducted emission facility, and has found these test facilities to be in compliance with the requirements of section 2.948 of the FCC rules. The description of the test facility is listed under FCC registration number 958801.

The Innovation, Science and Economic Development Canada has reviewed the technical characteristics of the radiated and conducted emission facility, and has found these test facilities to be in compliance. The description of the test facility is listed under chambers filing number 2932F.

## 2.2 List of Test and Measurement Instruments

**Table 1: List of Test and Measurement Equipment**

Instrument	Manufacturer	Type No.	Asset No.	Cali. Due Date
3m modified semi-anechoic chamber	Frankonia	SAC3	G1811378	2022-06-27
Bilog antenna	Teseq	CBL 6112D	G1811425	2023-03-10
EMI test receiver	Rohde & Schwarz	ESCI	G1811402	2022-09-01
Spectrum analyser	Rohde & Schwarz	FSV40	G1822702	2023-03-10
Preamplifier	Taiwan EMCI	EMC184045SE	G1825372	2023-05-14
Log periodic antenna	Rohde & Schwarz	HL050	G1811417	2023-03-10
Broadband Horn Antenna	Schwarzbeck	BBHA 9170	9170-305	2023-07-10
Preamplifier	Taiwan EMCI	EMC051845SE	G1825371	2023-05-14
Spectrum Analyzer	Keysight	N9020A	MY54500180	2023-09-07
Thermohygrometer	Testo	608-H1	1241320614	2023-10-12
EMI test receiver	R&S	ESIB26	G1811380	2023-03-06
Artificial main network	R&S	ENV432	G1830003	2022-11-01
EMC measurement software	R&S	EMC32 (Ver 10.20.01)	G1824845	N/A

## 2.3 Traceability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

## 2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

## 2.5 Measurement Uncertainty

**Table 2: Measurement Uncertainty**

Measurement Type	Frequency	Uncertainty
Antenna Port Conducted Emission	< 1GHz	±0.39dB
	> 1GHz	±0.68dB
Conducted Emission	150kHz - 30MHz	±3.39dB
Radiated Emission	9kHz - 30MHz	±2.93dB
	30MHz - 1GHz	±5.34dB
	> 1GHz	±5.40dB

### 3. General Product Information

#### 3.1 Product Function and Intended Use

The EUT (Equipment Under Test) is a Robotic Vacuum Cleaner which supports Wi-Fi.

The aim of this report is to evaluate the RF characteristic of the Wi-Fi Part of this EUT.

For details refer to the User Manual and Circuit Diagram.

#### 3.2 Ratings and System Details

**Table 3: Technical Specification of EUT**

General Description of EUT	
Product Name:	Robotic Vacuum Cleaner
Model No.:	Q340RR
Rated Voltage:	DC 20V, 1.2A
Technical Specification of W-LAN	
Frequency Range:	2412~2462MHz
Modulation Type:	DSSS (CCK, DQPSK, DBPSK) OFDM (QPSK/BPSK/16QAM/64QAM)
Antenna Type:	Internal antenna
Antenna Gain:	3.87 dBi
Receiver Category:	1

### 3.3 Independent Operation Modes

**Table 4: Independent Operation Modes**

Test Mode Tx	Operating Mode	Channel Number	Channel Frequency [MHz]
TM1	802.11b	1	2412
TM2	802.11b	6	2437
TM3	802.11b	11	2462
TM4	802.11g	1	2412
TM5	802.11g	6	2437
TM6	802.11g	11	2462
TM7	802.11n-HT20	1	2412
TM8	802.11n-HT20	6	2437
TM9	802.11n-HT20	11	2462
Test Mode			
TM10	Normal		

### 3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

### 3.5 Submitted Documents

- Bill of Material
- PCB Layout
- Photo Document
- Circuit Diagram
- Instruction Manual
- Rating Label



## 4. Test Set-up and Operation Modes

### 4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

### 4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.10: 2013.

**Table 5: Power parameter value**

Operating Mode	Power Parameter Value
802.11b	-55
802.11g	-50
802.11n-HT20	-50

### 4.3 Special Accessories and Auxiliary Equipment

**Table 6: Auxiliary Equipment**

Product Name	Model Name	Manufactory
Laptop	TP00001A	Lenovo

### 4.4 Countermeasures to achieve EMC Compliance

Null.

## 5. Test Results

### 5.1 Conducted Testing at Antenna Port

#### 5.1.1 Antenna Requirement

**RESULT:** **Pass**

According to the manufacturer declared, the EUT has one internal antenna, the directional gain of antenna is 3.87 dBi and the antenna is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

**Table 7: Antenna Requirement**

#### FCC 15.203 – Antenna Requirement 1

Requirement:	No antenna other than that furnished by the responsible party shall be used with the device	
Results:	Antenna type:	Internal antenna
Verdict:	Pass	

#### FCC 15.204 – Antenna Requirement 2

Requirement:	An intentional radiator may be operated only with the antenna with which it is authorized. If an antenna is marketed with the intentional radiator, it shall be of a type which is authorized with the intentional radiator.	
Results:	Only one internal antenna can be used	
Verdict:	Pass	

#### RSS-Gen 6.4 – External Control

Requirement:	The device shall not have any external controls accessible to the user that enable it to be adjusted, selected or programmed to operate in violation of the regulatory requirements, including RSS-Gen and the applicable RSSs	
Results:	The device does not have any transmitter external controls accessible to the user that can be adjusted and operated in violation of the limits of this standard.	
Verdict:	PASS	

**RSS-Gen 6.8 – Antenna Requirement**

Requirement: When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

Results:

a) Antenna Type:	Internal antenna
b) Manufacture:	N/A
c) Model No.:	N/A
d) Gain with reference to an isotropic radiator:	3.87 dBi

Verdict: PASS

**5.1.2 6dB & 99% Bandwidth****RESULT:****Pass**

Date of testing : 2022-03-03  
Ambient temperature : 22.2°C  
Relative humidity : 51.4%  
Atmospheric pressure : 101kPa  
Test requirement : FCC Part 15.247(a)(2)  
RSS-247 Issue 2, February 2017, Clause 5.2(a)  
Test procedure : ANSI C63.10: 2013  
Test voltage : DC 20V  
Test modes applied : TM1 to TM3

**Table 8: 6dB & 99% Bandwidth**

Test Mode	Data rate/ MCS	CH.	Freq. [MHz]	6dB Bandwidth [MHz]	6dB Bandwidth limit [kHz]	99% Bandwidth [MHz]
TM1	1Mbps	1	2412	9.134	≥500	11.291
TM2	1Mbps	6	2437	9.129	≥500	11.335
TM3	1Mbps	11	2462	9.129	≥500	11.343

**Figure 1: 6dB Bandwidth**


**Figure 2: 99% Bandwidth**


### 5.1.3 Peak Output Power

**RESULT:****Pass**

Date of testing : 2022-03-03  
Ambient temperature : 22.2°C  
Relative humidity : 51.4%  
Atmospheric pressure : 101kPa  
Test requirement : FCC Part 15.247(b)(3)  
RSS-247 Issue 2, February 2017, Clause 5.4(d)  
Test procedure : ANSI C63.10: 2013  
Test voltage : DC 20V  
Test modes applied : TM1 to TM3

**Table 9: Peak Output Power**

Mode	Antenna Gain [dBi]	Data rate/ MCS	CH.	Freq. [MHz]	Maximum Peak Conducted Output Power [dBm]	Peak Conducted Output Power Limit [dBm]	Maximum EIRP [dBm]	EIRP Limit [dBm]
TM1	3.87	1Mbps	1	2412	14.21	30	18.08	36
TM2		1Mbps	6	2437	13.52	30	17.39	36
TM3		1Mbps	11	2462	13.22	30	17.09	36

Note:

EIRP=Peak Conducted Output Power + Antenna Gain

**Figure 3: Peak Output Power**



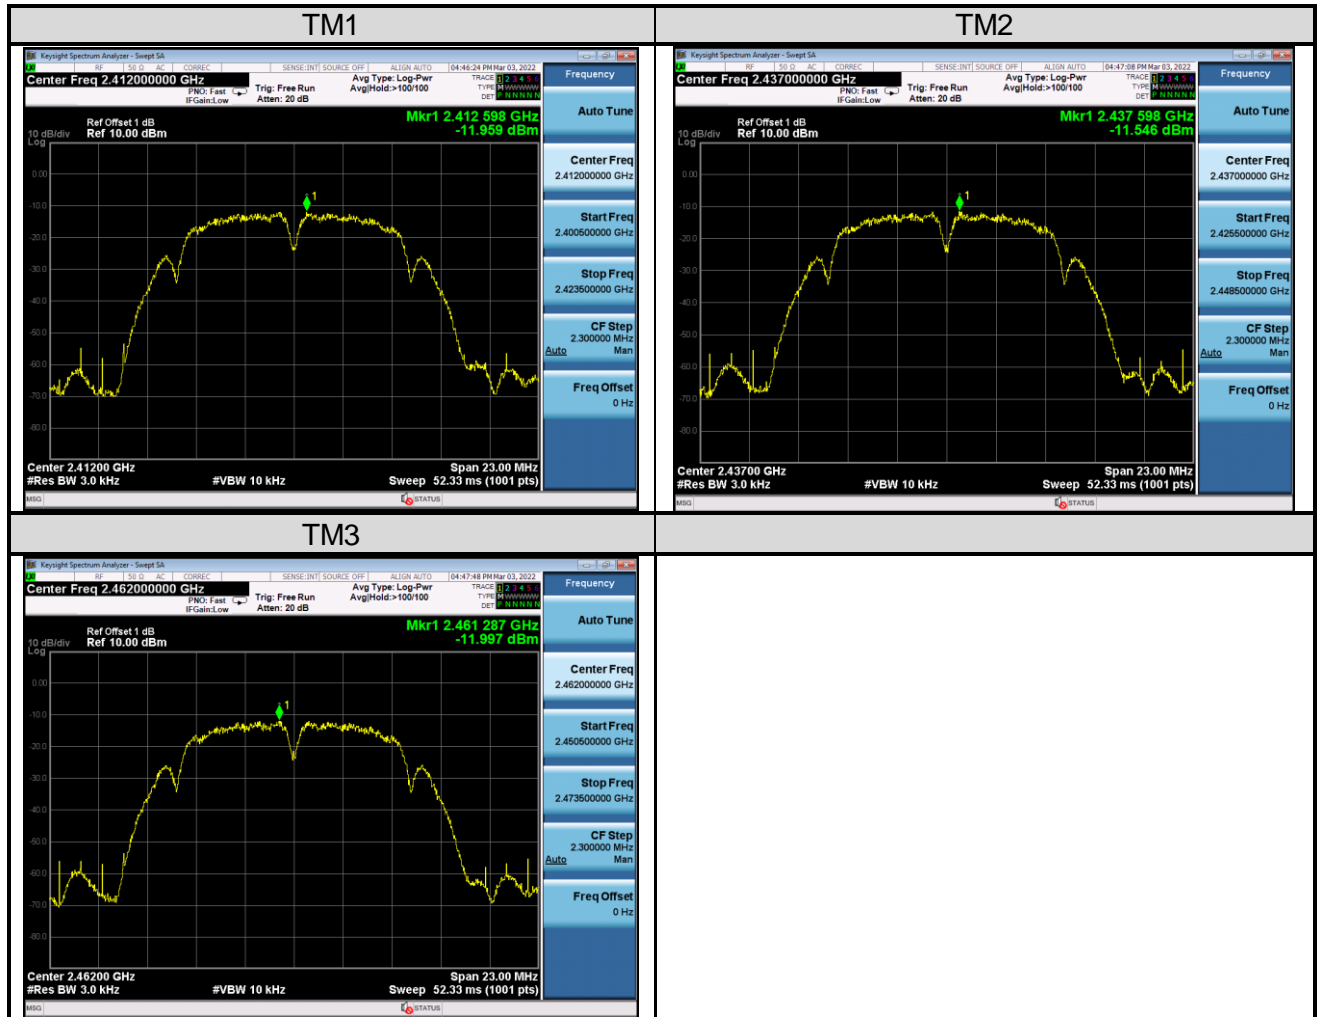

### 5.1.4 Power Spectral Density

**RESULT:****Pass**

Date of testing : 2022-03-03  
Ambient temperature : 22.2°C  
Relative humidity : 51.4%  
Atmospheric pressure : 101kPa  
Test requirement : FCC Part 15.247(e)  
RSS-247 Issue 2, February 2017, Clause 5.2(b)  
Test procedure : ANSI C63.10: 2013  
Test voltage : DC 20V  
Test modes applied : TM1 to TM3

**Table 10: Power Spectral Density**

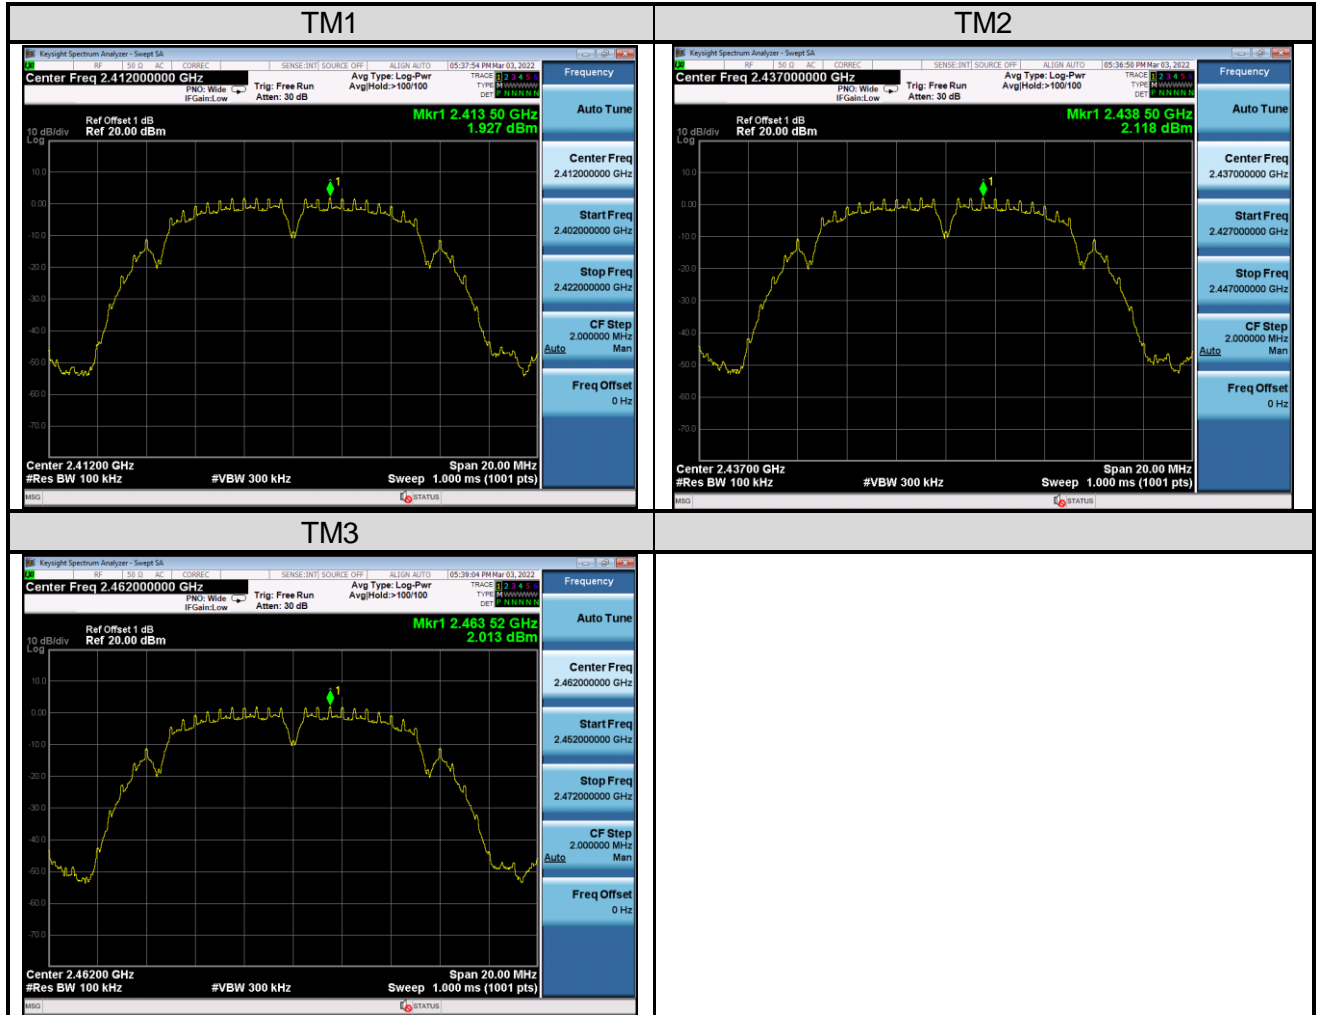
Mode	Data rate/ MCS	CH.	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]
TM1	1Mbps	1	2412	-11.959	8
TM2	1Mbps	6	2437	-11.546	8
TM3	1Mbps	11	2462	-11.997	8

**Figure 4: Power Spectral Density**


### 5.1.5 Conducted Band Edge and out-of Band Emissions

**RESULT:****Pass**

Date of testing : 2022-03-03  
Ambient temperature : 22.2°C  
Relative humidity : 51.4%  
Atmospheric pressure : 101kPa  
Test requirement : FCC Part 15.247(d)  
RSS-247 Issue 2, February 2017, Clause 5.5  
Test procedure : ANSI C63.10: 2013  
Test voltage : DC 20V  
Test modes applied : TM1 to TM3

**Figure 5: Reference level**


**Figure 6: Conducted Spurious Emission**

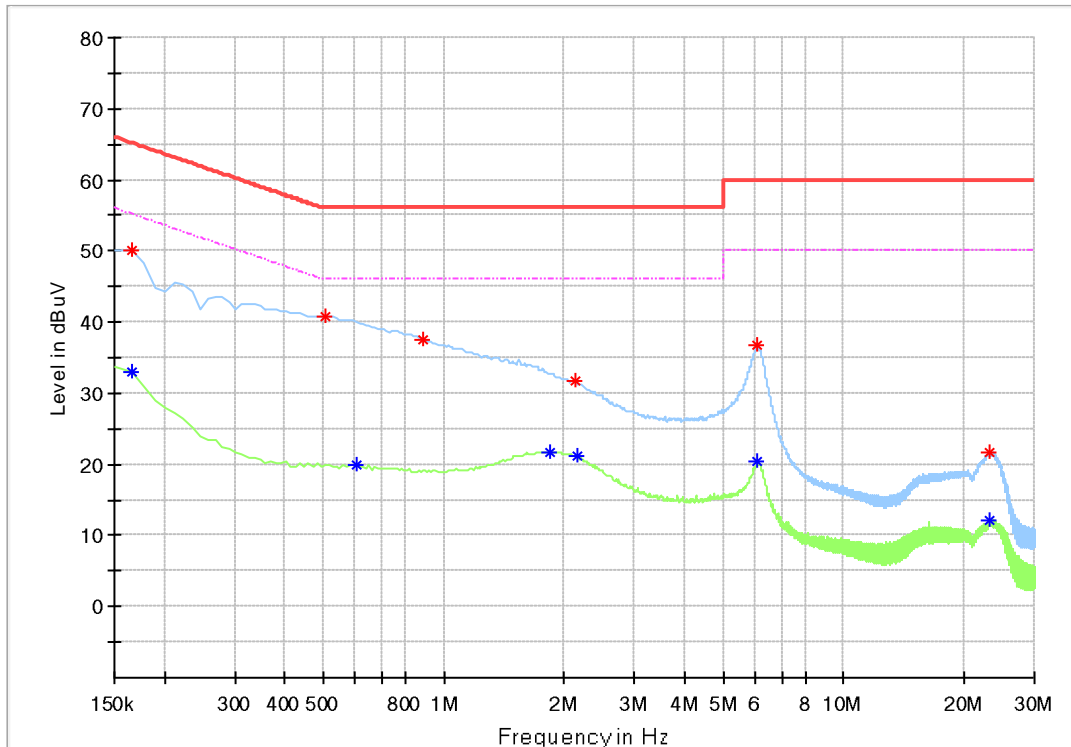

**Figure 7: Conducted Band Edge**


## 5.2 Emission in the Frequency Range up to 30MHz

### 5.2.1 Conducted Emission

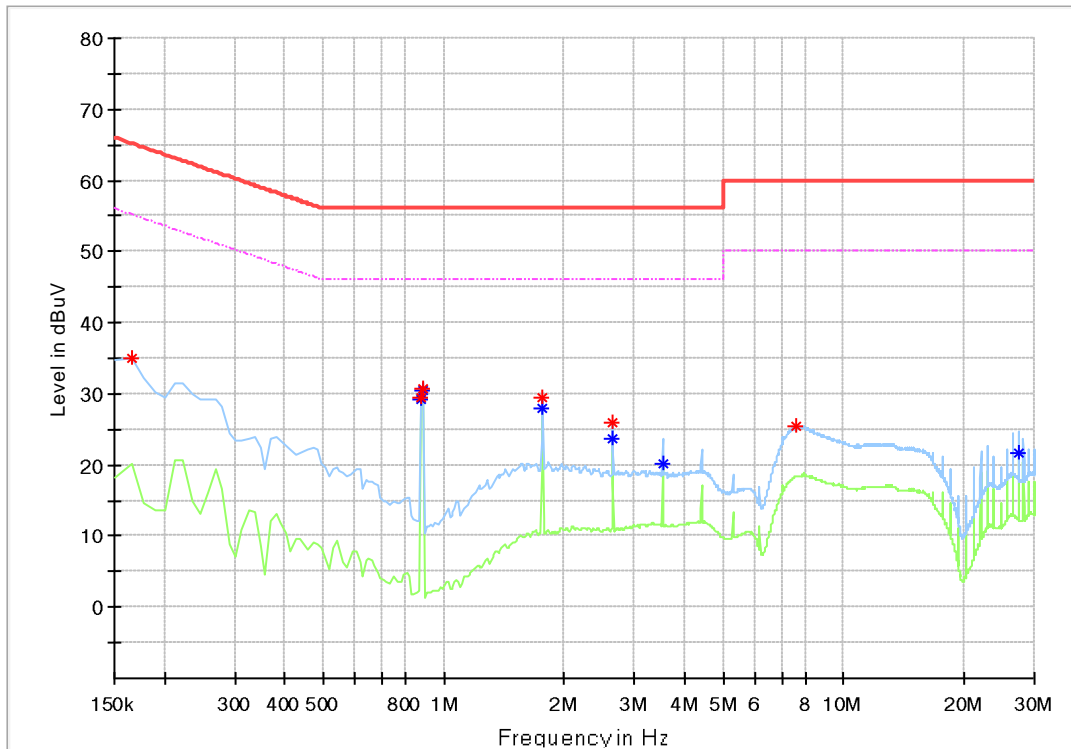
**RESULT:****Pass**

Date of testing	:	2022-02-17
Ambient temperature	:	22.3°C
Relative humidity	:	48.6%
Atmospheric pressure	:	101kPa
Test requirement	:	FCC Part 15.207 (a) RSS-Gen Issue 5, Amendment 2, February 2021, Clause 8.8
Test procedure	:	ANSI C63.10: 2013
Test voltage	:	AC 120V/60Hz
Test modes applied	:	TM10

**Figure 8: Conducted Emission, L**

**Critical\_Freqs**

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line
23.184375	21.64	---	60.00	38.36	L
2.124375	31.65	---	56.00	24.35	L
6.061875	36.65	---	60.00	23.35	L
0.886875	37.62	---	56.00	18.38	L
0.504375	40.74	---	56.00	15.26	L
0.166875	50.19	---	65.12	14.93	L
0.166875	---	32.99	55.12	22.12	L
0.605625	---	19.96	46.00	26.04	L
1.843125	---	21.75	46.00	24.25	L
2.158125	---	21.21	46.00	24.79	L
6.061875	---	20.32	50.00	29.68	L
23.285625	---	12.19	50.00	37.81	L



**Figure 9: Conducted Emission, N**

**Critical\_Freqs**

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line
7.614375	25.49	---	60.00	34.51	N
2.641875	25.99	---	56.00	30.01	N
1.764375	29.45	---	56.00	26.55	N
0.875625	29.58	---	56.00	26.42	N
0.886875	30.67	---	56.00	25.33	N
0.166875	35.04	---	65.12	30.08	N
0.875625	---	29.32	46.00	16.68	N
0.886875	---	30.44	46.00	15.56	N
1.764375	---	28.02	46.00	17.98	N
2.641875	---	23.58	46.00	22.42	N
3.519375	---	20.10	46.00	25.90	N
27.313125	---	21.76	50.00	28.24	N

## 5.3 Emission in the Frequency Range above 30MHz

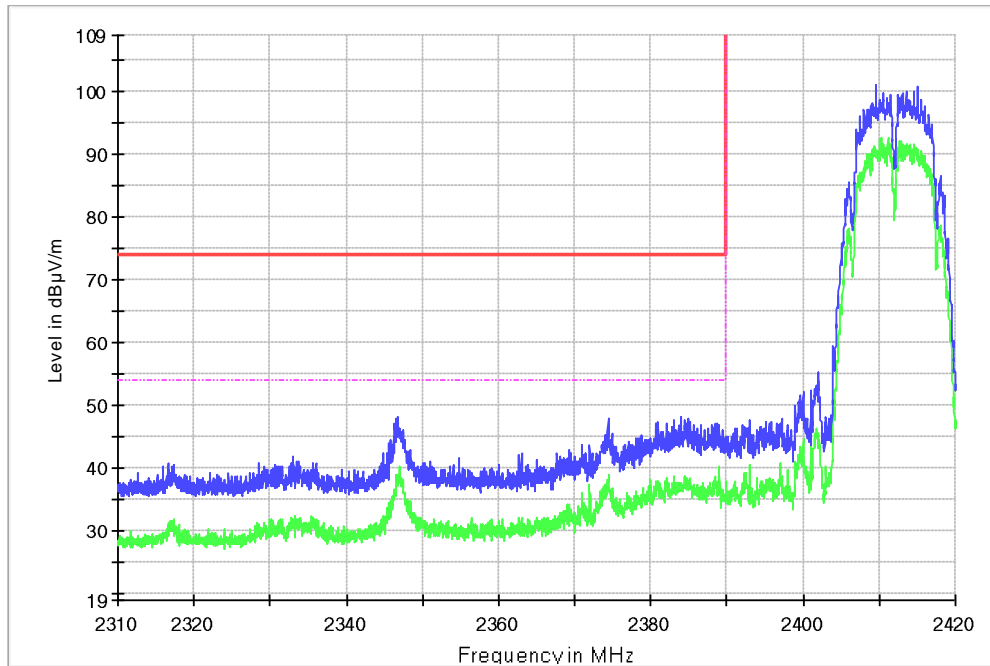
### 5.3.1 Radiated Band-Edge

**RESULT:****Pass**

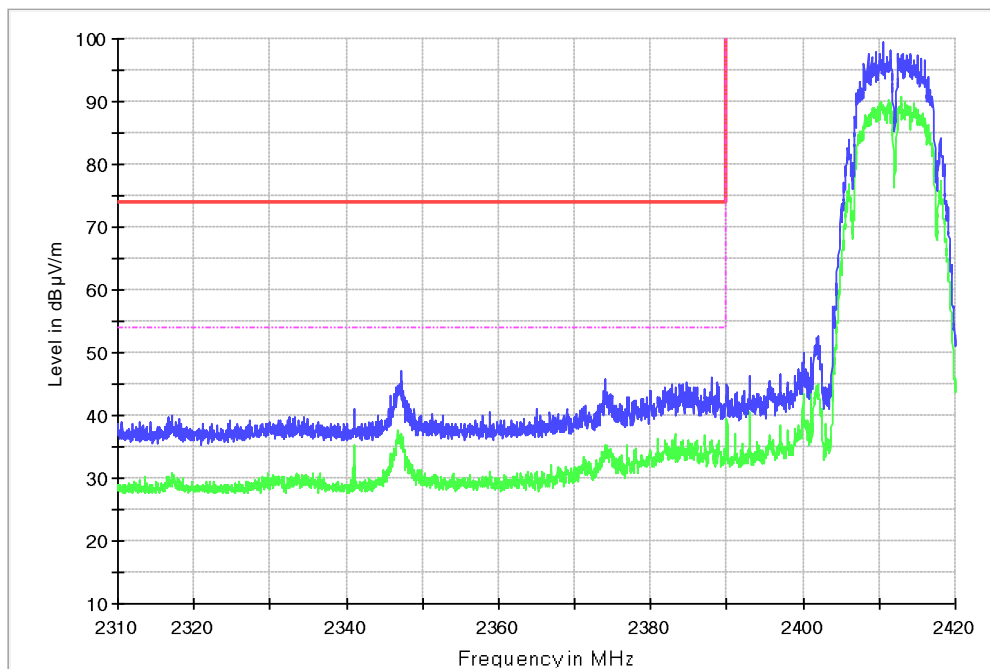
Date of testing	:	2022-03-01
Ambient temperature	:	22.8°C
Relative humidity	:	49.2%
Atmospheric pressure	:	101kPa
Test requirement	:	FCC Part 15.247(d) FCC Part 15.205(a) FCC Part 15.209(a) RSS-Gen Issue 5, Amendment 2, February 2021, Clause 8.9 RSS-Gen Issue 5, Amendment 2, February 2021, Clause 8.10 RSS-247 Issue 2, February 2017, Clause 5.5
Test procedure	:	ANSI C63.10: 2013
Test voltage	:	DC 20V
Test modes applied	:	TM1, TM3, TM4, TM6, TM7, TM9

**Figure 10: Radiated Band-Edge, TM1, H**

2310 2410 BE 1-18GHz HL050 FSV40 Pre

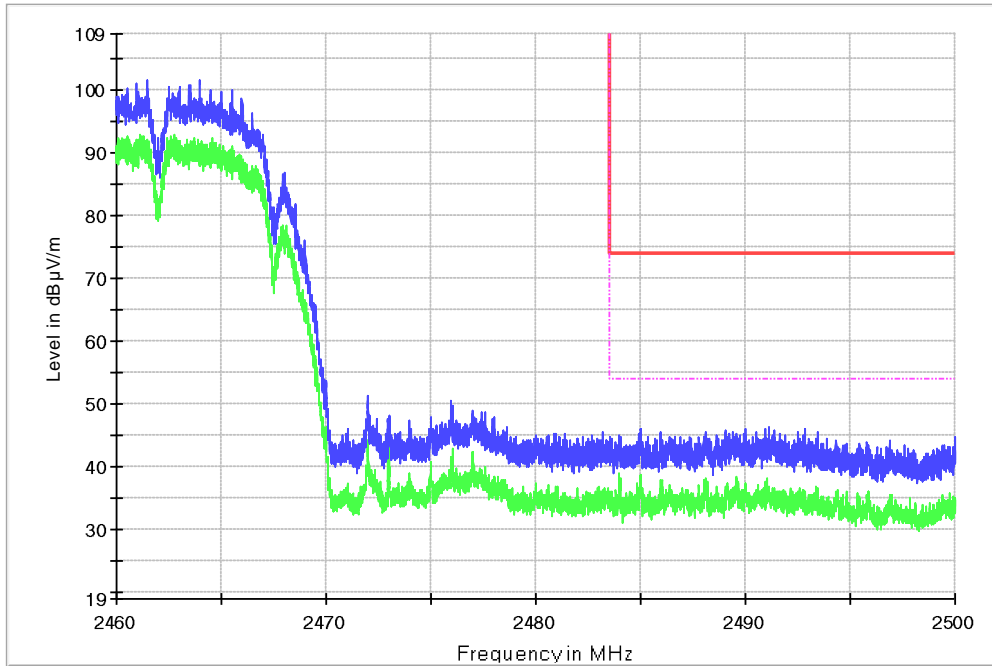

**Figure 11: Radiated Band-Edge, TM1, V**

2310 2410 BE 1-18GHz HL050 FSV40 Pre

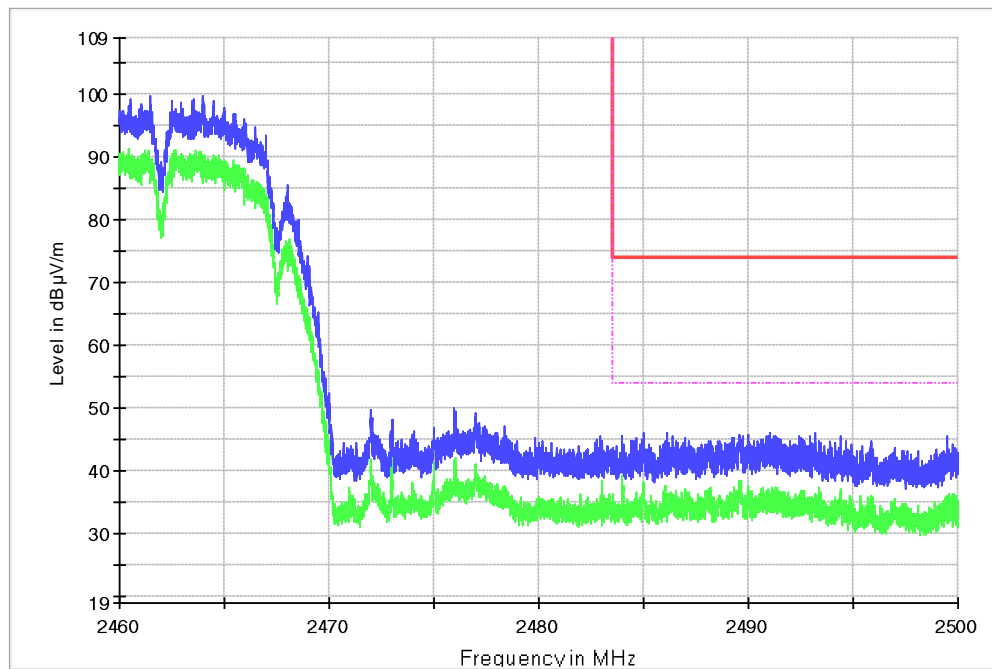


**Figure 12: Radiated Band-Edge, TM3, H**

2470° 2500 BE 1-18GHz HL050 FSV40 Pre

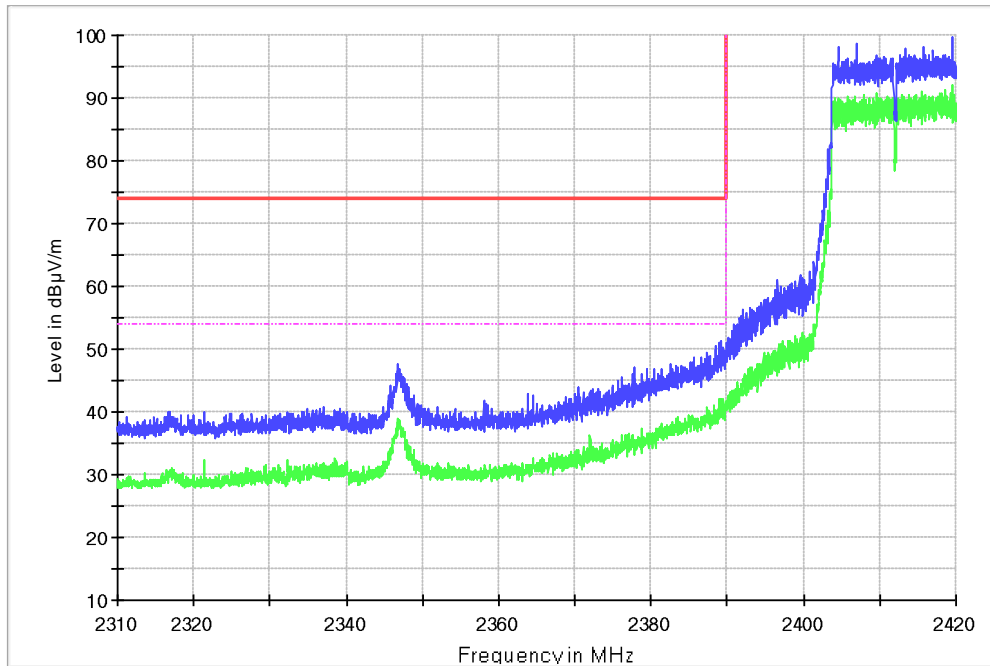

**Figure 13: Radiated Band-Edge, TM3, V**

2470° 2500 BE 1-18GHz HL050 FSV40 Pre

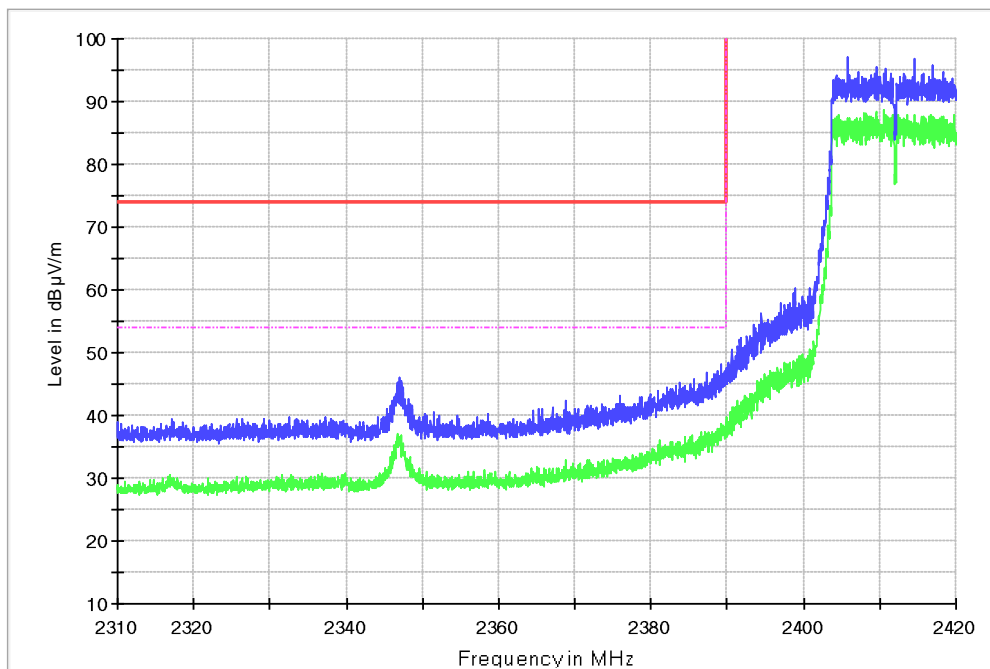


**Figure 14: Radiated Band-Edge, TM4, H**

2310` 2410 BE 1-18GHz HL050 FSV40 Pre

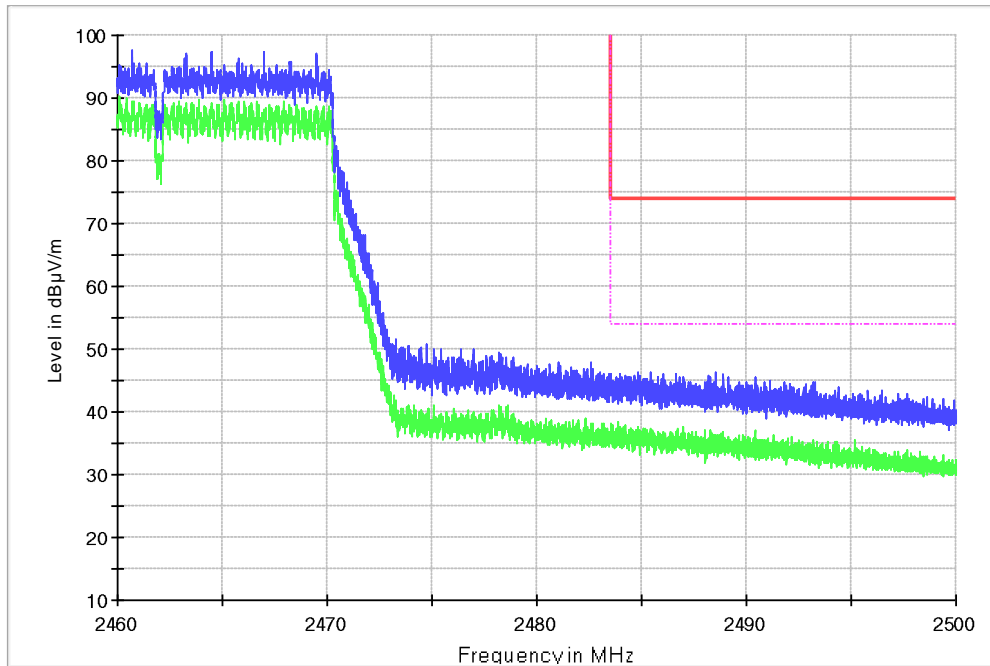

**Figure 15: Radiated Band-Edge, TM4, V**

2310` 2410 BE 1-18GHz HL050 FSV40 Pre

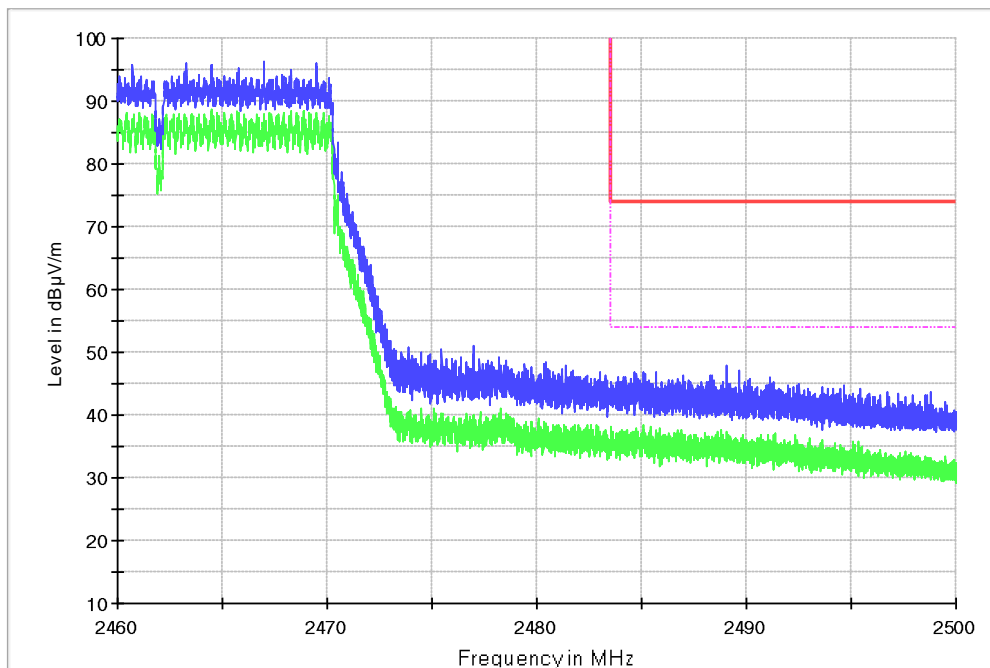


**Figure 16: Radiated Band-Edge, TM6, H**

2470° 2500 BE 1-18GHz HL050 FSV40 Pre

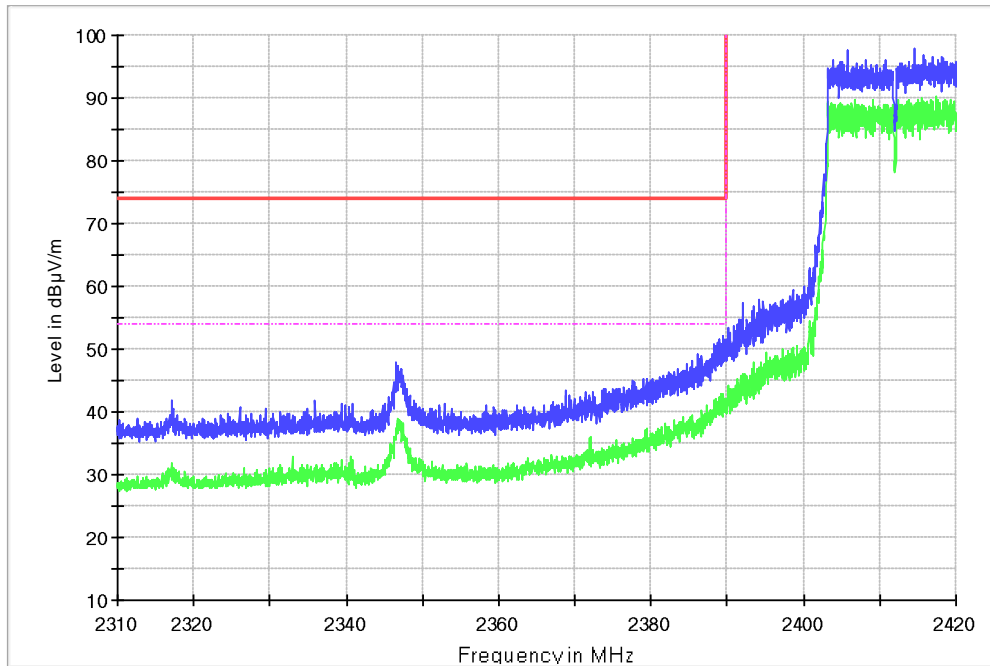

**Figure 17: Radiated Band-Edge, TM6, V**

2470° 2500 BE 1-18GHz HL050 FSV40 Pre

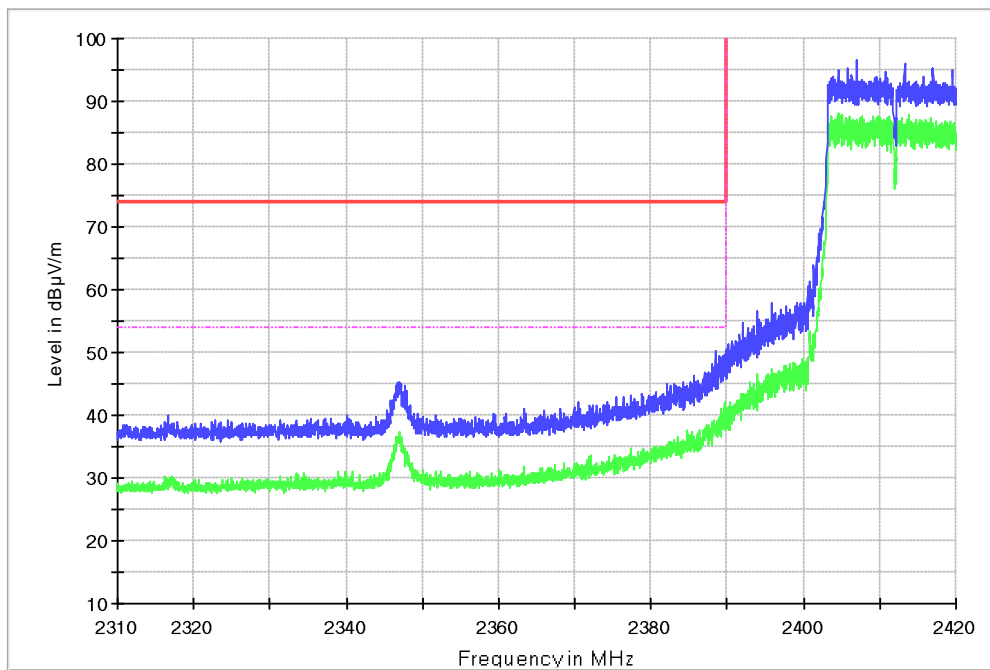


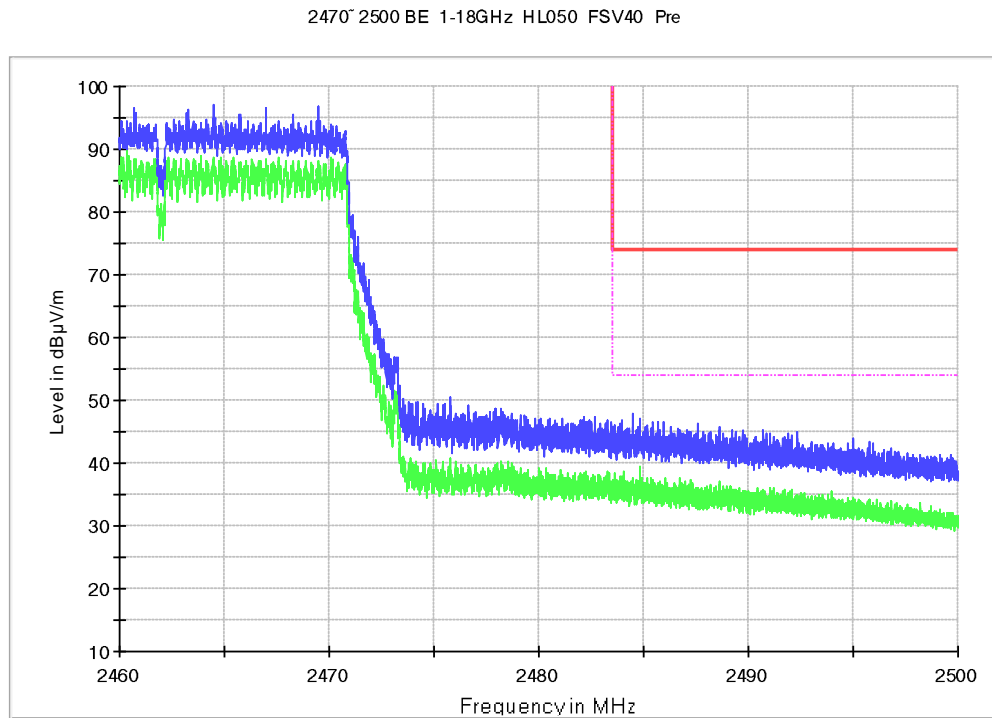
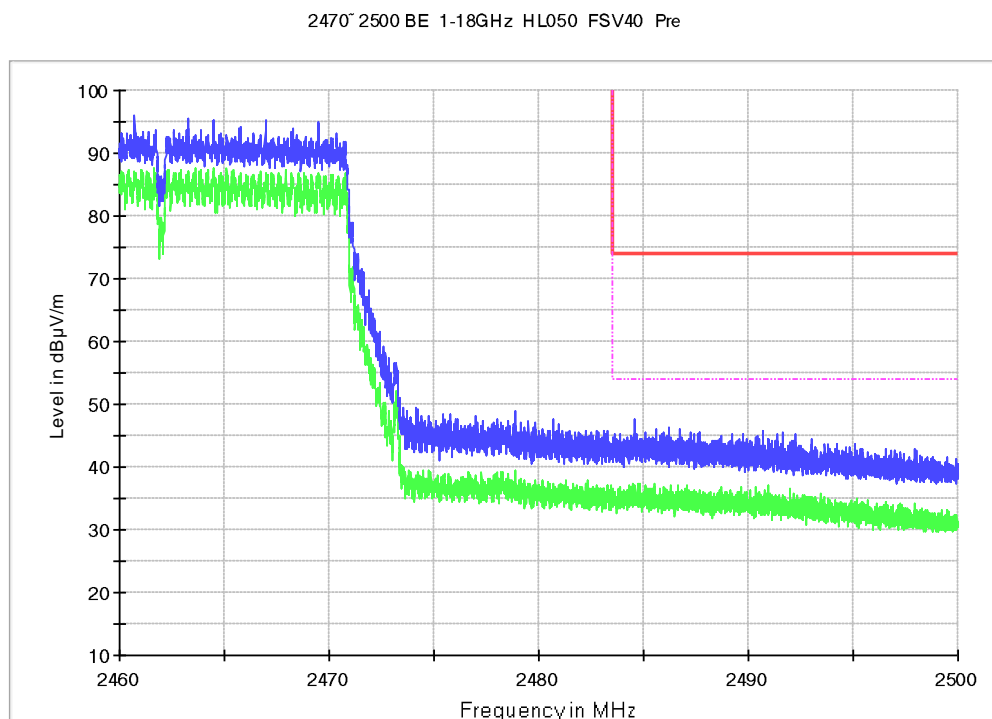
**Figure 18: Radiated Band-Edge, TM7, H**

2310 2410 BE 1-18GHz HL050 FSV40 Pre


**Figure 19: Radiated Band-Edge, TM7, V**

2310 2410 BE 1-18GHz HL050 FSV40 Pre



**Figure 20: Radiated Band-Edge, TM9, H**

**Figure 21: Radiated Band-Edge, TM9, V**




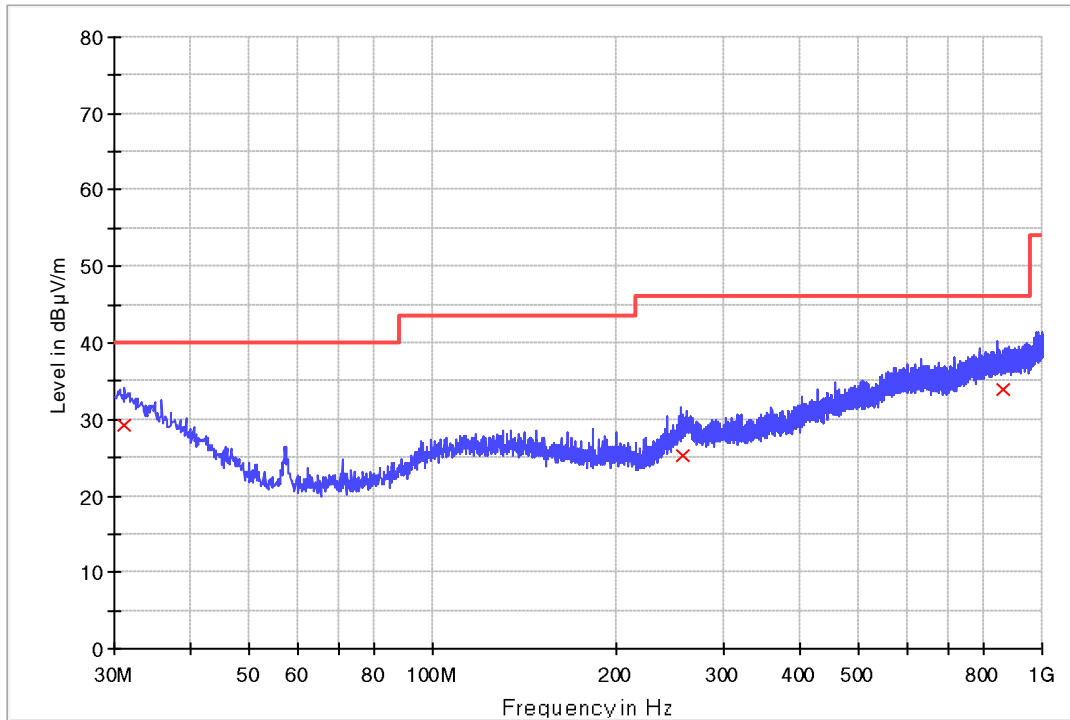
### 5.3.2 Radiated Spurious Emission

**RESULT:****Pass**

Date of testing	:	2022-02-28~2022-03-03
Ambient temperature	:	22.8°C
Relative humidity	:	48.6%
Atmospheric pressure	:	101kPa
Test requirement	:	FCC Part 15.247(d) FCC Part 15.209(a) RSS-Gen Issue 5, Amendment 2, February 2021, Clause 8.9 RSS-247 Issue 2, February 2017, Clause 5.5
Test procedure	:	ANSI C63.10: 2013
Test voltage	:	DC 20V
Test modes applied	:	TM1 to TM9

**Figure 22: Radiated Spurious Emission, TM1, 30MHz to 1GHz, H**

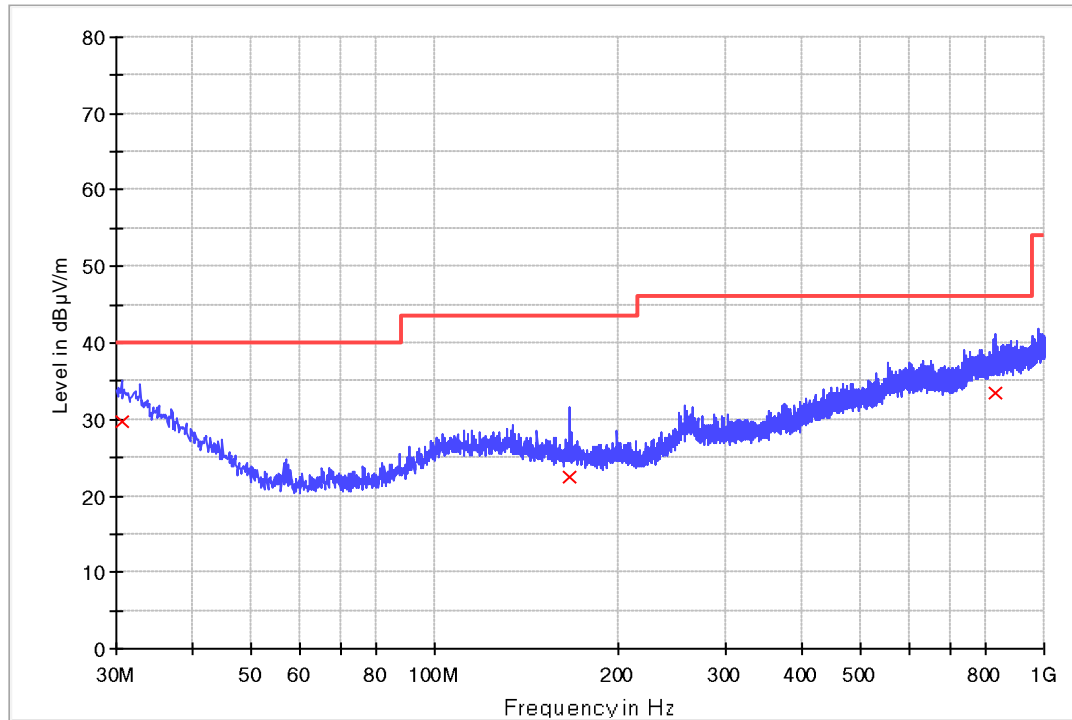
Radiated emission (30M-1GHz) 1 Range FCC


**Limit and Margin**

Frequency (MHz)	QuasiPeak (dBµV/m)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
31.212500	29.3	H	24.8	10.7	40.0
256.858750	25.2	H	20.3	20.8	46.0
859.592500	33.9	H	28.0	12.1	46.0

**Figure 23: Radiated Spurious Emission, TM1, 30MHz to 1GHz, V**

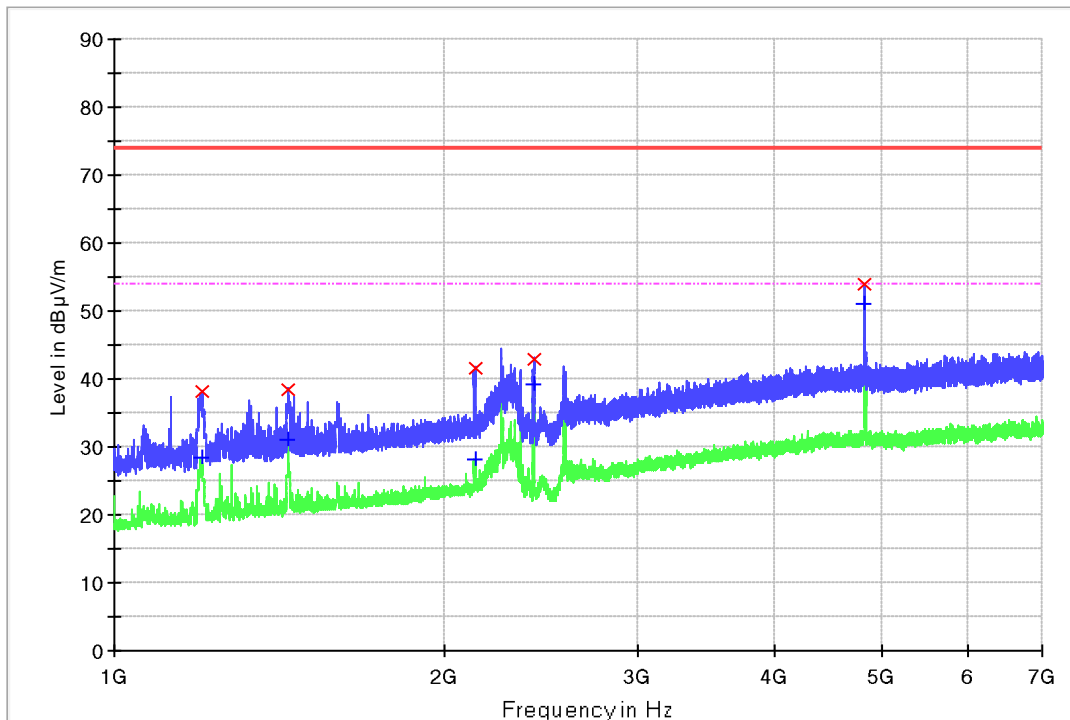
Radiated emission (30M-1GHz) 1 Range FCC


**Limit and Margin**

Frequency (MHz)	QuasiPeak (dBµV/m)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
30.606250	29.6	V	25.1	10.4	40.0
166.042500	22.5	V	16.5	21.0	43.5
830.613750	33.4	V	27.5	12.6	46.0

**Figure 24: Radiated Spurious Emission, TM1, 1GHz to 7GHz, H**

RE 1-18GHz HL050 FSV40 Pre


**Limit and Margin PK**

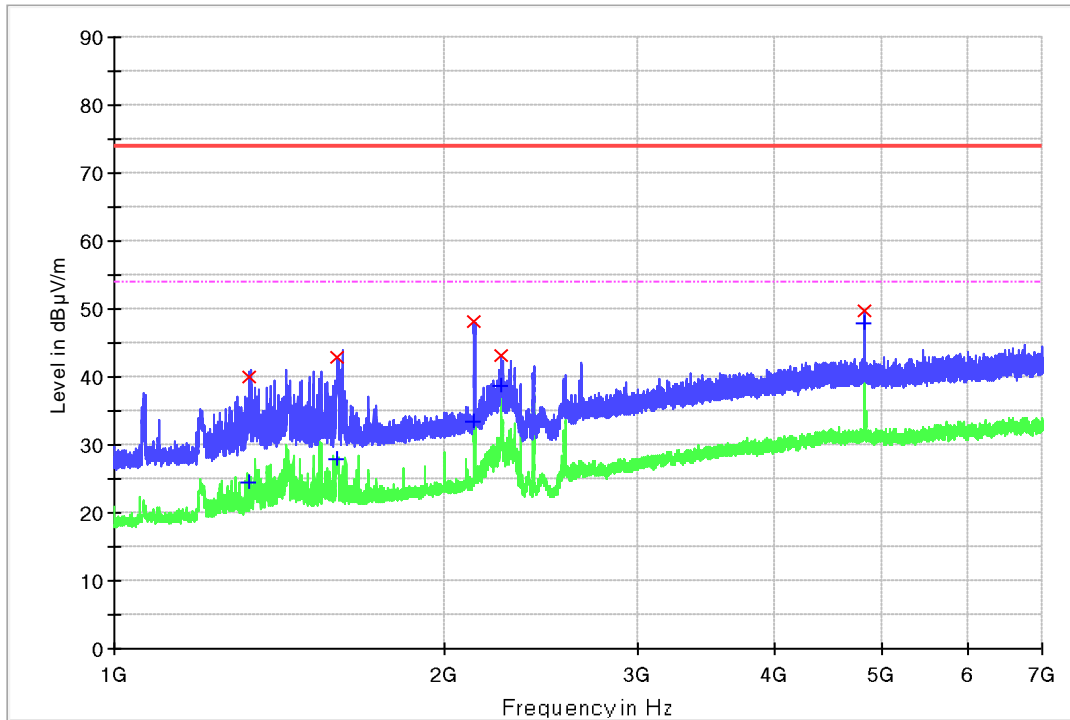
Frequency (MHz)	MaxPeak (dBµV/m)	Pol	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
1200.812500	38.2	H	-21.2	35.8	74.0
1439.687500	38.5	H	-19.4	35.5	74.0
2129.500000	41.7	H	-15.7	32.3	74.0
2409.062500	43.0	H	-14.4	31.0	74.0
4824.062500	54.0	H	-6.5	20.0	74.0

**Limit and Margin AV**

Frequency (MHz)	Average (dBµV/m)	Pol	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
1200.812500	28.4	H	-21.2	25.6	54.0
1439.687500	31.1	H	-19.4	22.9	54.0
2129.500000	28.1	H	-15.7	25.9	54.0
2409.062500	39.2	H	-14.4	14.8	54.0
4824.062500	51.0	H	-6.5	3.0	54.0

**Figure 25: Radiated Spurious Emission, TM1, 1GHz to 7GHz, V**

RE 1-18GHz HL050 FSV40 Pre


**Limit and Margin PK**

Frequency (MHz)	MaxPeak (dBµV/m)	Pol	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
1327.375000	39.9	V	-20.2	34.1	74.0
1597.937500	42.8	V	-18.3	31.2	74.0
2128.937500	48.2	V	-15.7	25.8	74.0
2252.125000	43.1	V	-15.2	30.9	74.0
4823.875000	49.7	V	-6.5	24.3	74.0

**Limit and Margin AV**

Frequency (MHz)	Average (dBµV/m)	Pol	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
1327.375000	24.4	V	-20.2	29.6	54.0
1597.937500	28.0	V	-18.3	26.0	54.0
2128.937500	33.4	V	-15.7	20.6	54.0
2252.125000	38.6	V	-15.2	15.4	54.0
4823.875000	47.8	V	-6.5	6.2	54.0

Figure 26: Radiated Spurious Emission, TM1, 7GHz to 18GHz, H

RE 1-18GHz HL050 FSV40 Pre

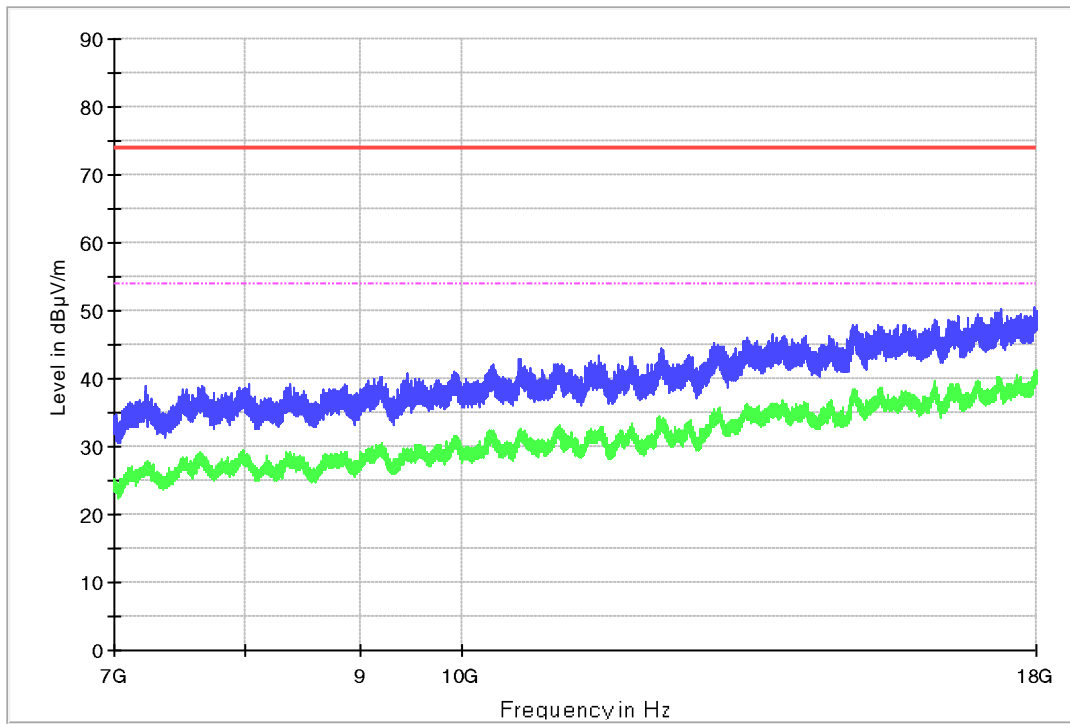
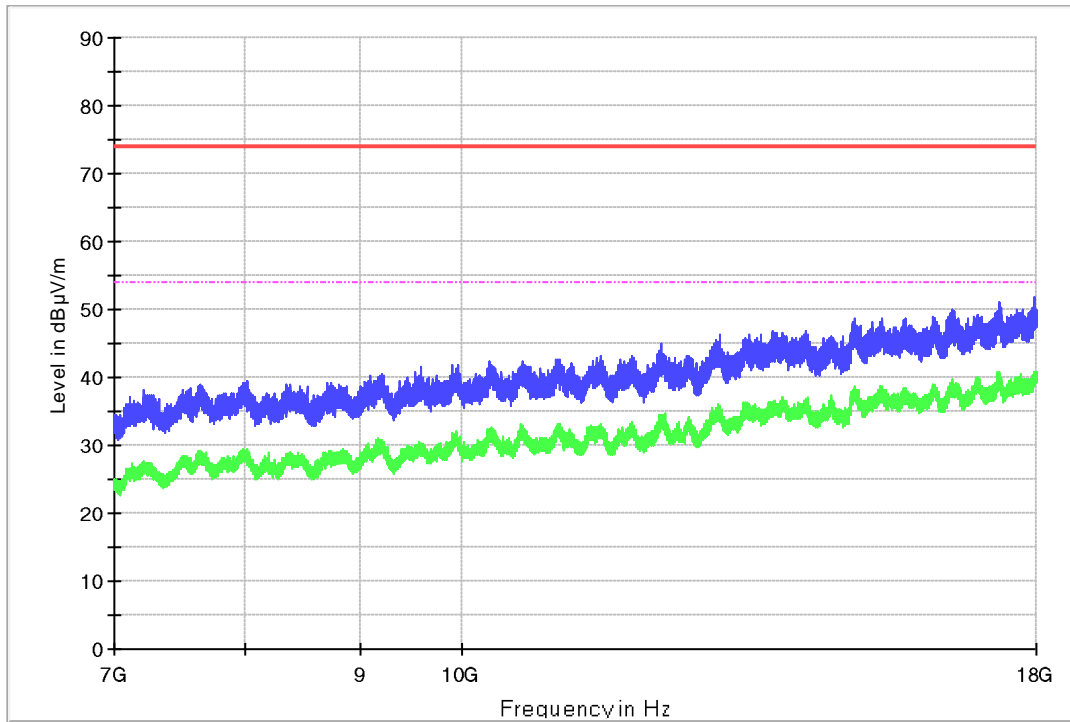


Figure 27: Radiated Spurious Emission, TM1, 7GHz to 18GHz, V

RE 1-18GHz HL050 FSV40 Pre



**Figure 28: Radiated Spurious Emission, TM1, 18GHz to 25GHz, H**

RE 18-40GHz 9170 FSV40 Pre

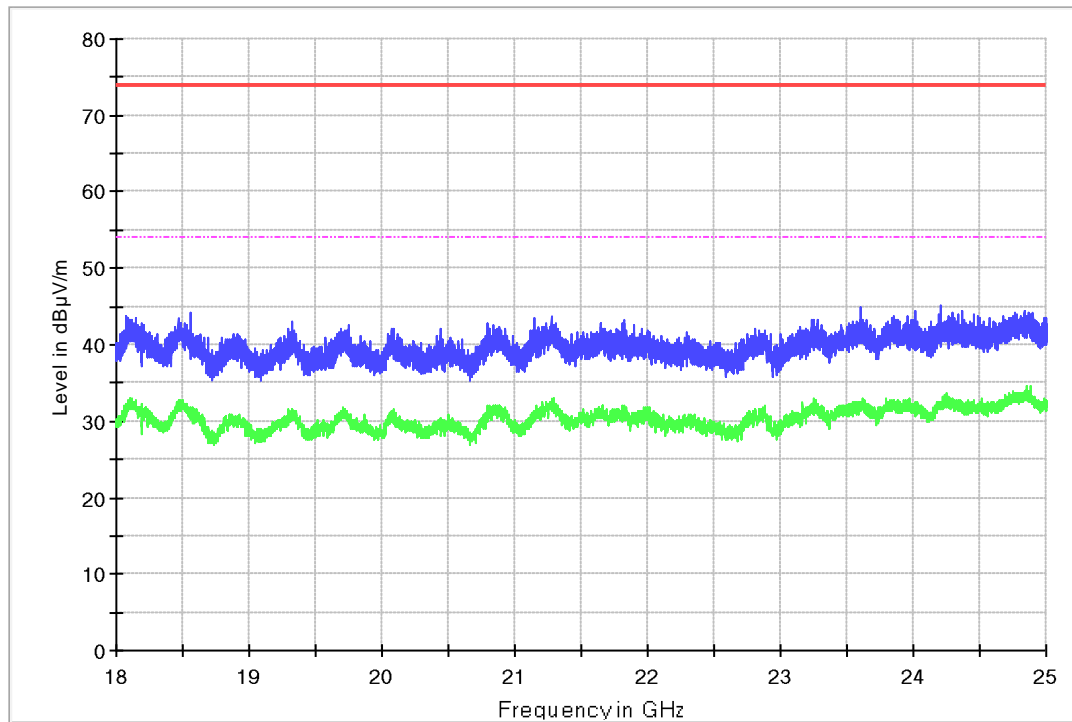
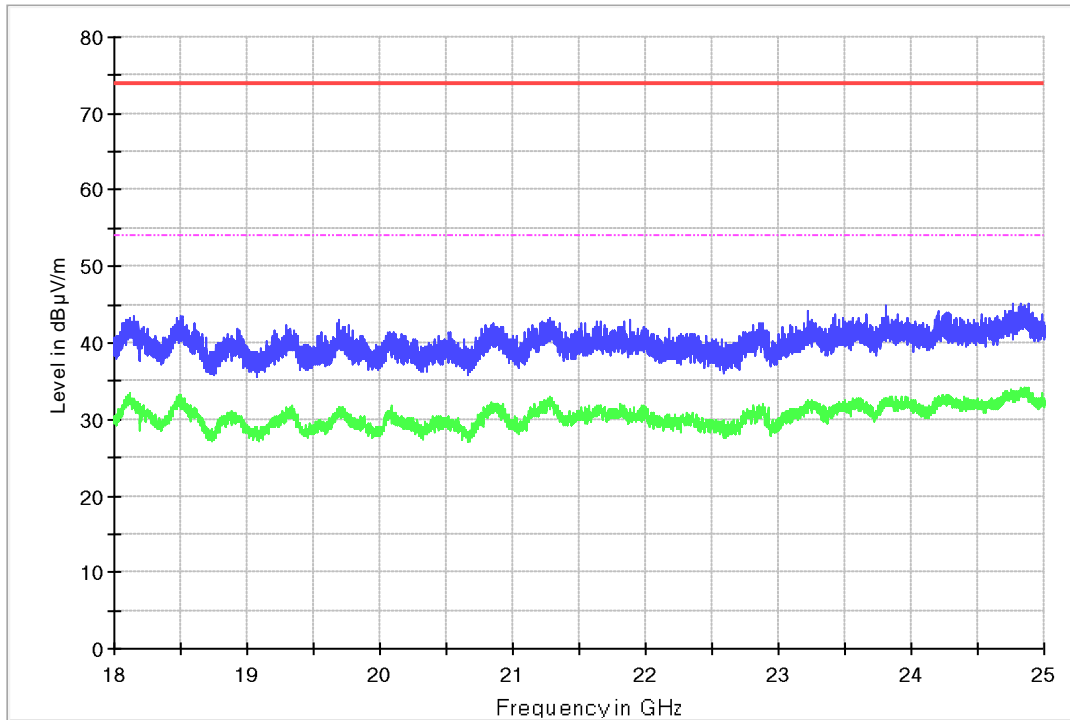




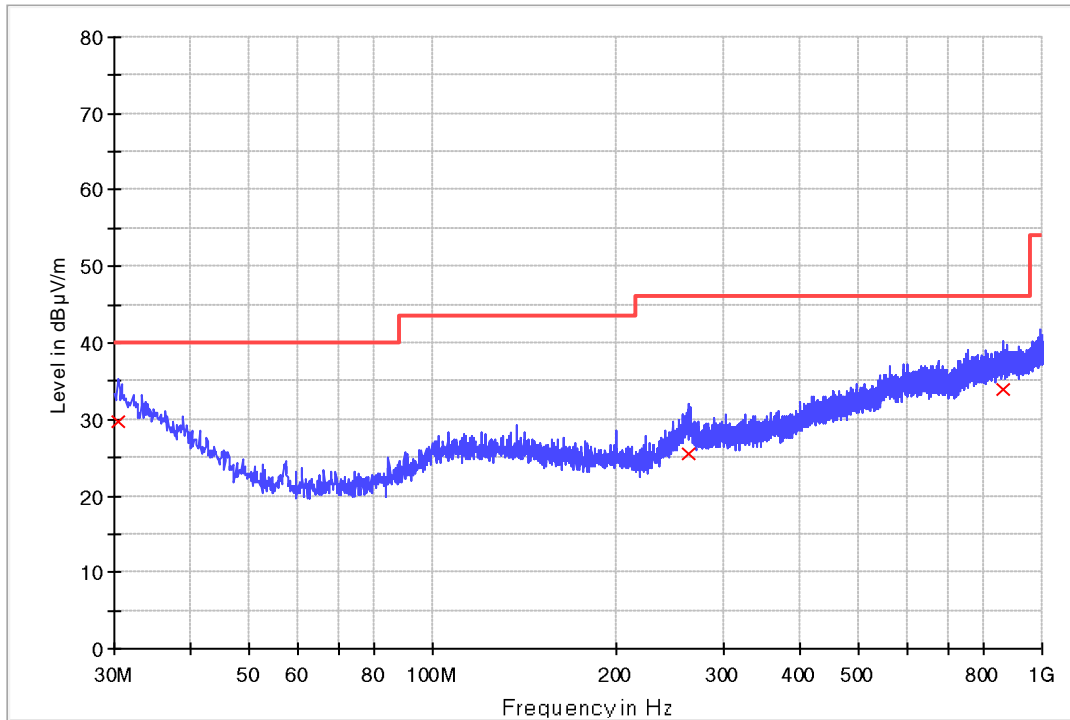
Figure 29: Radiated Spurious Emission, TM1, 18GHz to 25GHz, V

RE 18-40GHz 9170 FSV40 Pre



**Figure 30: Radiated Spurious Emission, TM2, 30MHz to 1GHz, H**

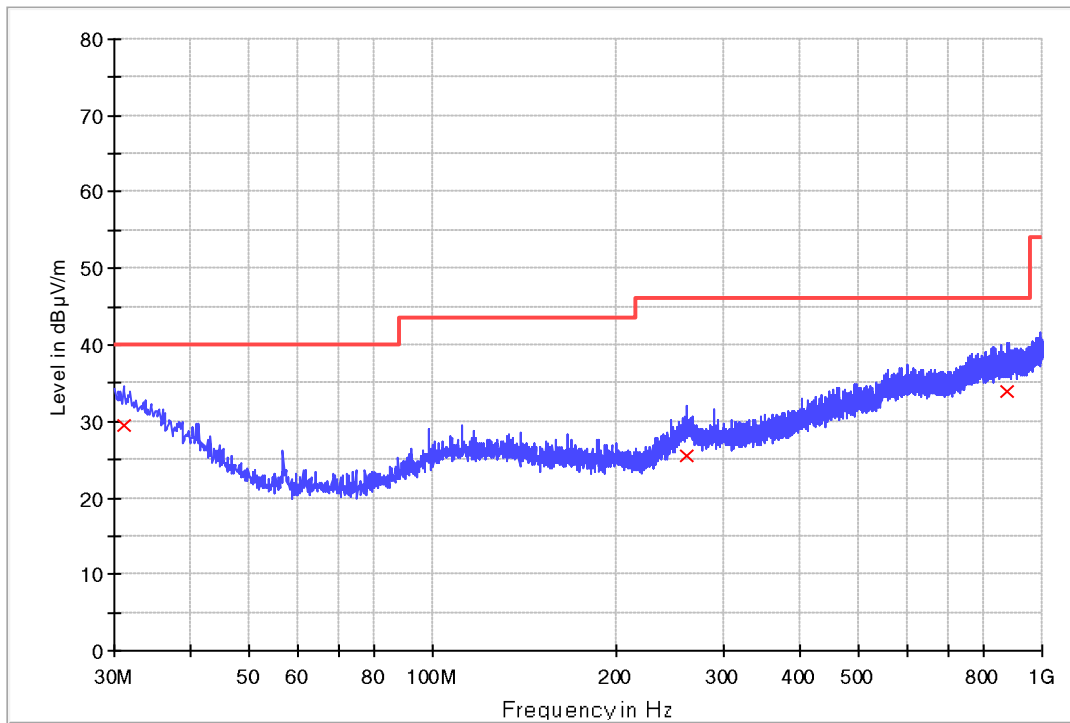
Radiated emission (30M-1GHz) 1 Range FCC


**Limit and Margin**

Frequency (MHz)	QuasiPeak (dBµV/m)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
30.363750	29.8	H	25.2	10.2	40.0
262.800000	25.5	H	20.7	20.5	46.0
862.260000	33.9	H	27.9	12.1	46.0

**Figure 31: Radiated Spurious Emission, TM2, 30MHz to 1GHz, V**

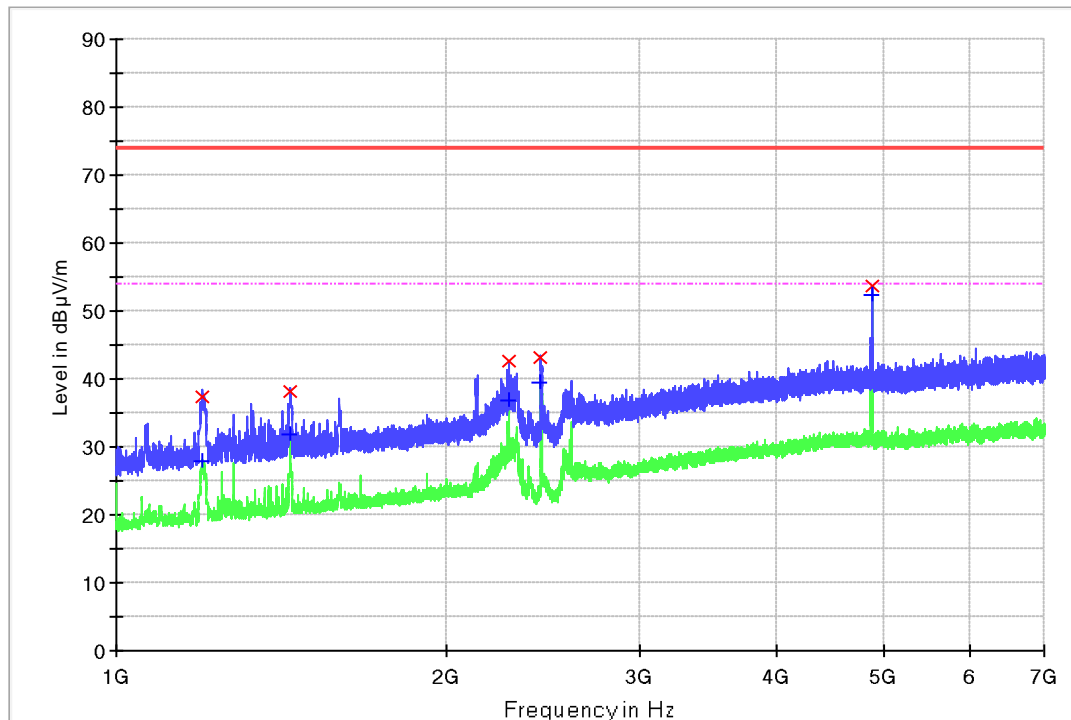
Radiated emission (30M-1GHz) 1 Range FCC


**Limit and Margin**

Frequency (MHz)	QuasiPeak (dBµV/m)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
31.091250	29.4	V	24.9	10.6	40.0
260.860000	25.6	V	20.7	20.4	46.0
876.325000	34.0	V	28.0	12.0	46.0

**Figure 32: Radiated Spurious Emission, TM2, 1GHz to 7GHz, H**

RE 1-18GHz HL050 FSV40 Pre


**Limit and Margin PK**

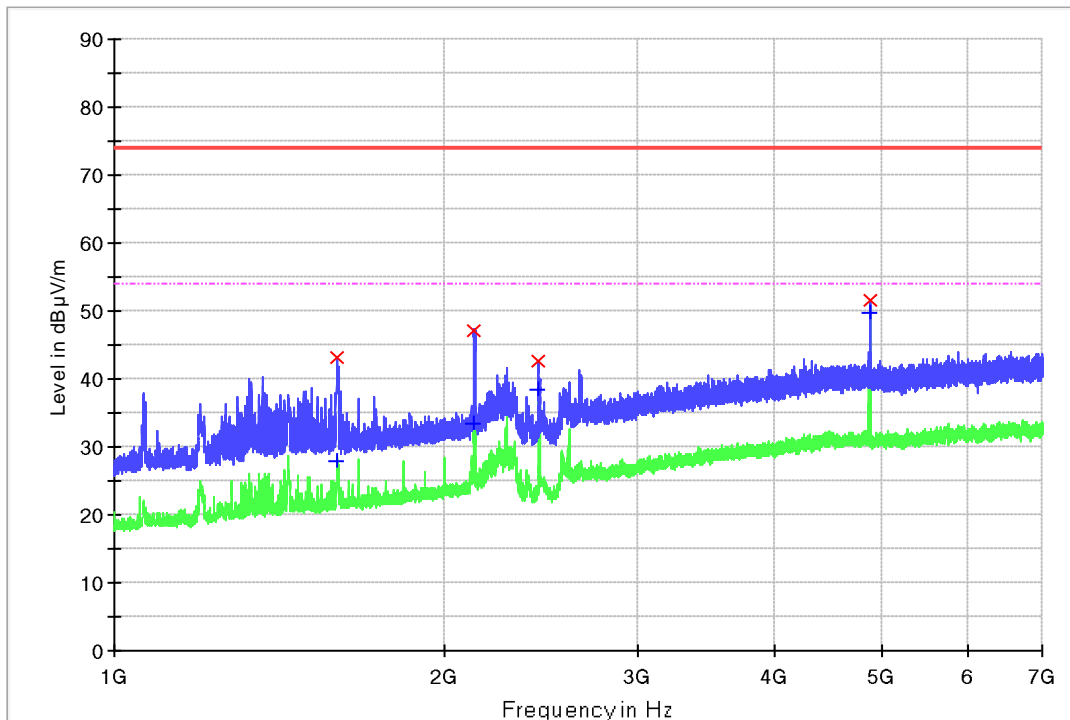
Frequency (MHz)	MaxPeak (dBµV/m)	Pol	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
1198.000000	37.3	H	-21.2	36.7	74.0
1439.687500	38.0	H	-19.4	36.0	74.0
2277.062500	42.7	H	-15.1	31.3	74.0
2434.000000	43.1	H	-14.3	30.9	74.0
4873.937500	53.7	H	-6.5	20.3	74.0

**Limit and Margin AV**

Frequency (MHz)	Average (dBµV/m)	Pol	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
1198.000000	28.0	H	-21.2	26.0	54.0
1439.687500	31.8	H	-19.4	22.2	54.0
2277.062500	36.9	H	-15.1	17.1	54.0
2434.000000	39.4	H	-14.3	14.6	54.0
4873.937500	52.3	H	-6.5	1.7	54.0

**Figure 33: Radiated Spurious Emission, TM2, 1GHz to 7GHz, V**

RE 1-18GHz HL050 FSV40 Pre


**Limit and Margin PK**

Frequency (MHz)	MaxPeak (dBµV/m)	Pol	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
1592.500000	43.2	V	-18.4	30.8	74.0
2123.875000	47.2	V	-15.8	26.8	74.0
2434.750000	42.6	V	-14.3	31.4	74.0
4873.937500	51.6	V	-6.5	22.4	74.0

**Limit and Margin AV**

Frequency (MHz)	Average (dBµV/m)	Pol	Corr. (dB)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
1592.500000	27.9	V	-18.4	26.1	54.0
2123.875000	33.3	V	-15.8	20.7	54.0
2434.750000	38.4	V	-14.3	15.6	54.0
4873.937500	49.7	V	-6.5	4.3	54.0

Figure 34: Radiated Spurious Emission, TM2, 7GHz to 18GHz, H

RE 1-18GHz HL050 FSV40 Pre

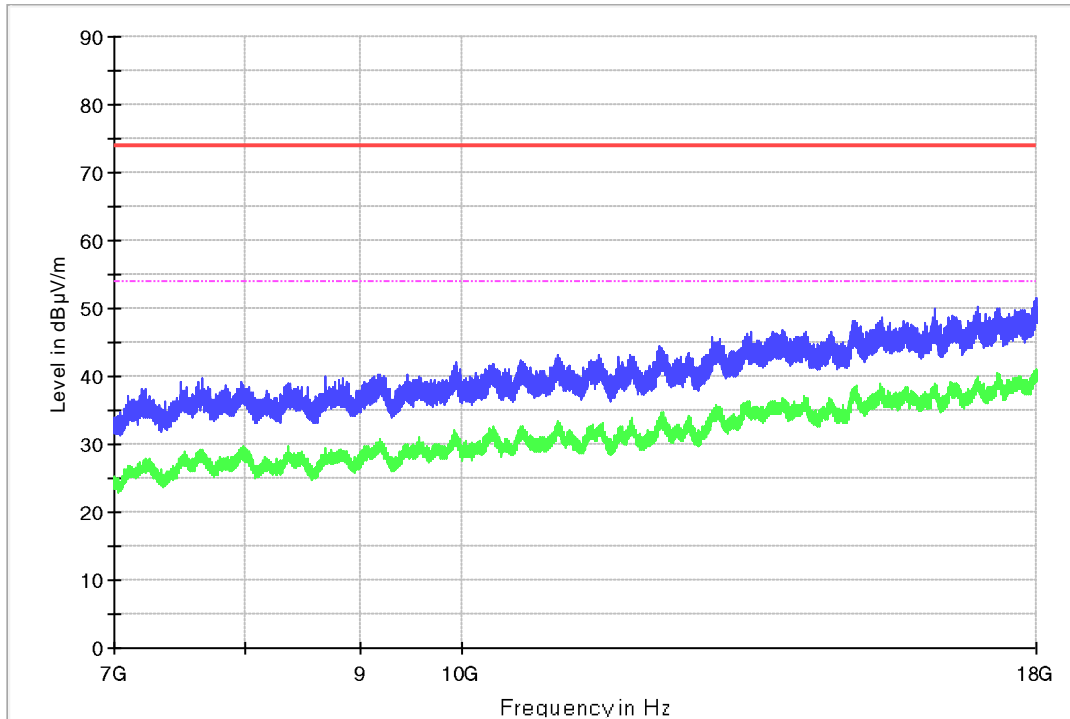


Figure 35: Radiated Spurious Emission, TM2, 7GHz to 18GHz, V

RE 1-18GHz HL050 FSV40 Pre

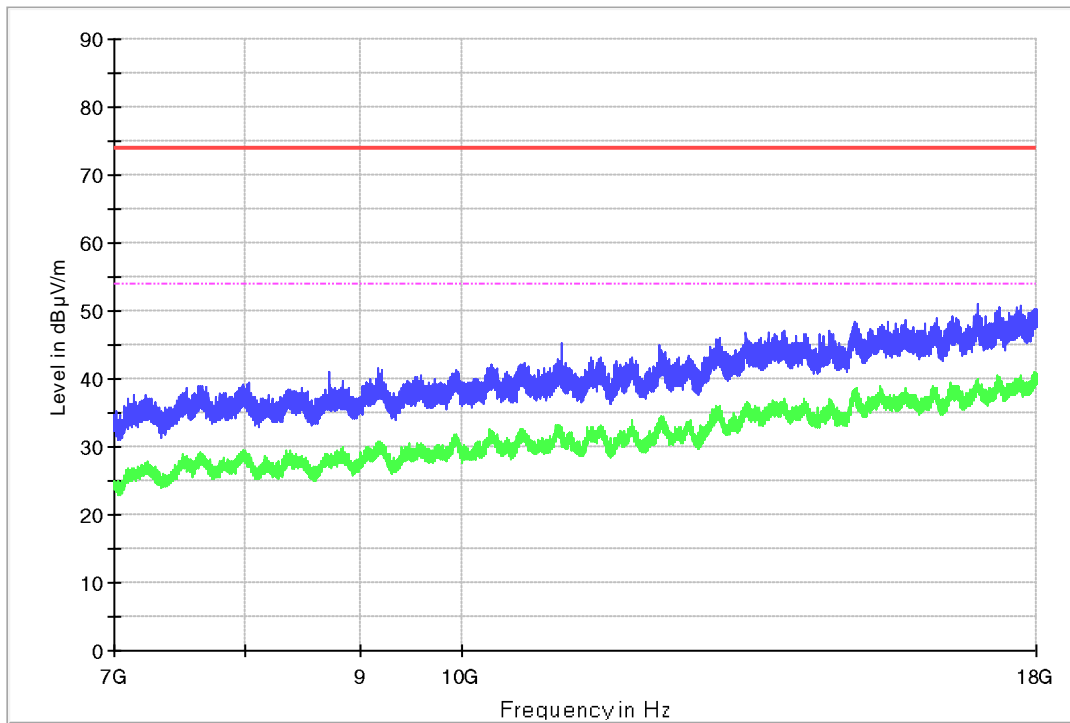


Figure 36: Radiated Spurious Emission, TM2, 18GHz to 25GHz, H

RE 18-40GHz 9170 FSV40 Pre

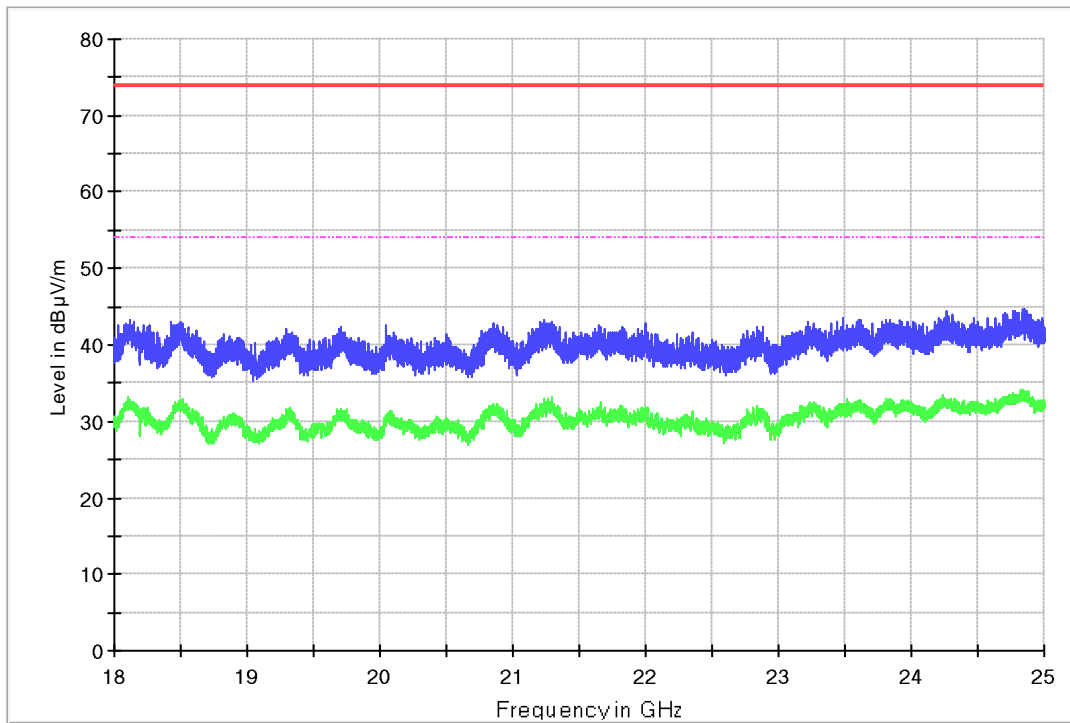
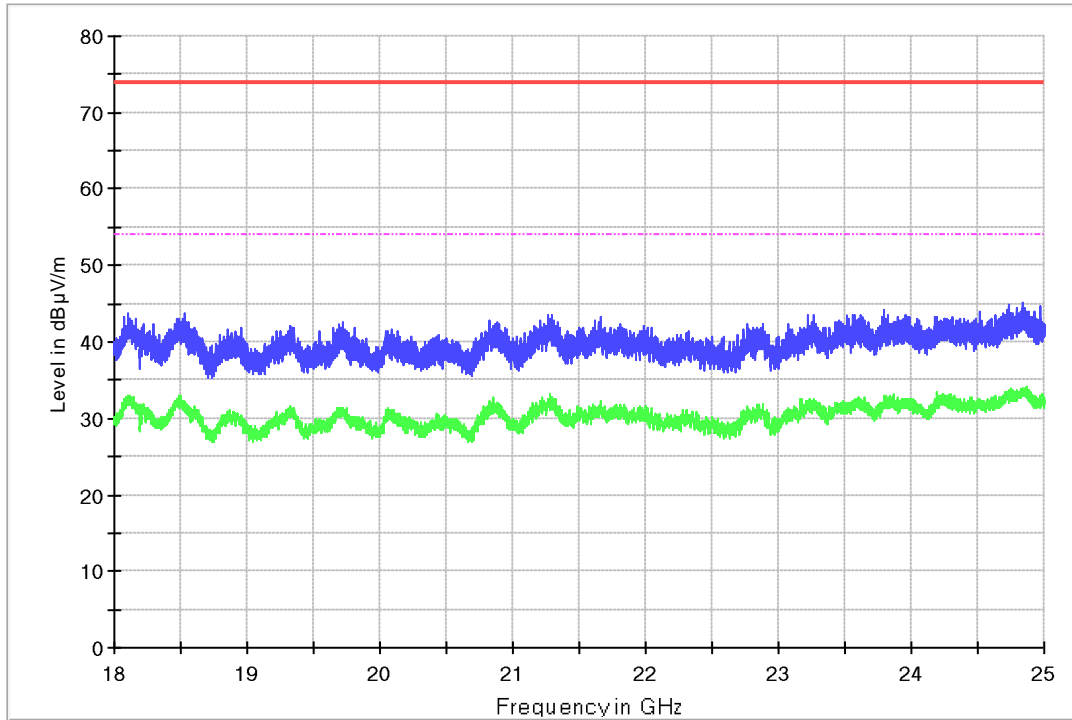




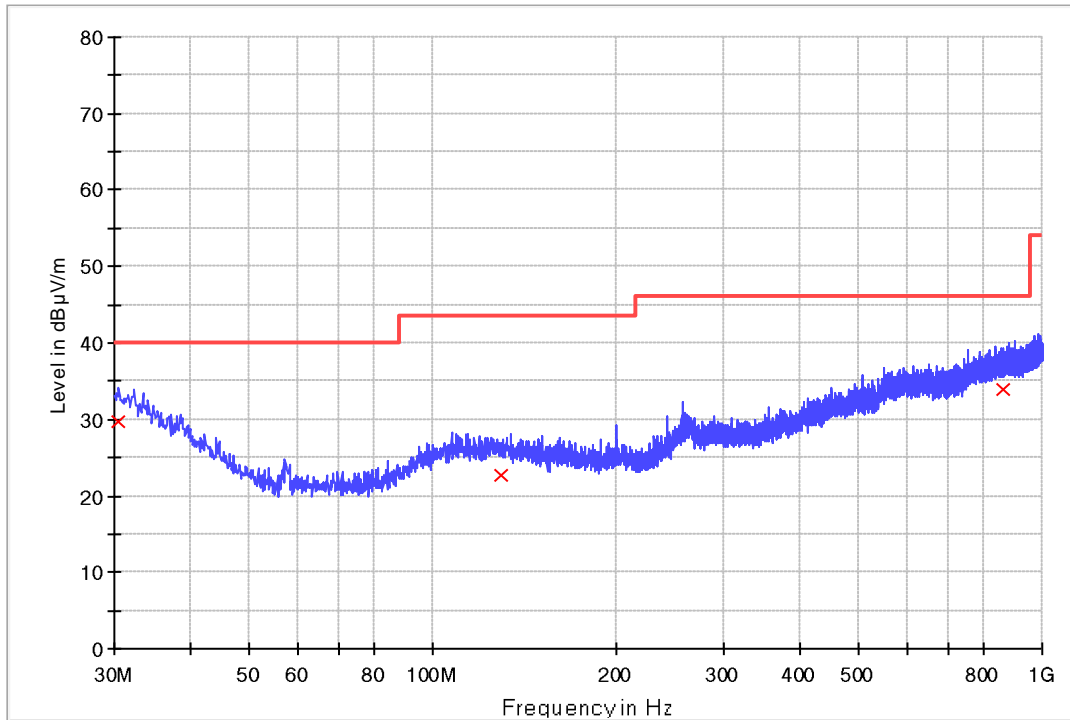
Figure 37: Radiated Spurious Emission, TM2, 18GHz to 25GHz, V

RE 18-40GHz 9170 FSV40 Pre



**Figure 38: Radiated Spurious Emission, TM3, 30MHz to 1GHz, H**

Radiated emission (30M-1GHz) 1 Range FCC


**Limit and Margin**

Frequency (MHz)	QuasiPeak (dBµV/m)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
30.485000	29.7	H	25.2	10.3	40.0
129.182500	22.7	H	18.7	20.8	43.5
862.017500	33.9	H	27.9	12.1	46.0