

Beijing Roborock Technology Co., Ltd.

RF TEST REPORT

Report Type:

FCC Part 15.247 & ISED RSS-247 RF report

Model:

QX0PEA

REPORT NUMBER:

230101330SHA-001

ISSUE DATE:

Feb 23, 2023

DOCUMENT CONTROL NUMBER:

TTRF15.247-03_V1 © 2018 Intertek



Applicant: Beijing Roborock Technology Co., Ltd.
Floor 6, Suite 6016, 6017, 6018, Building C, Kangjian Baosheng Plaza,
No.8 Heiquan Road, Haidian District, Beijing, P.R. China

Manufacturer: Beijing Roborock Technology Co., Ltd.
Floor 6, Suite 6016, 6017, 6018, Building C, Kangjian Baosheng Plaza,
No.8 Heiquan Road, Haidian District, Beijing, P.R. China

FCC ID: 2AN2O-QX0PEA01

IC: 23317-QX0PEA01

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2020): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2013): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

RSS-247 Issue 2 (February 2017): Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

RSS-Gen Issue 5 (April 2018)+A1(March 2019): General Requirements for Compliance of Radio Apparatus

PREPARED BY:

Teddy Yin

Project Engineer
Teddy Yin

REVIEWED BY:

Wakeyou Wang

Reviewer
Wakeyou Wang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

REVISION HISTORY.....	5
MEASUREMENT RESULT SUMMARY	6
1 GENERAL INFORMATION	7
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	7
1.2 TECHNICAL SPECIFICATION	7
1.3 DESCRIPTION OF TEST FACILITY	9
2 TEST SPECIFICATIONS.....	10
2.1 STANDARDS OR SPECIFICATION	10
2.2 MODE OF OPERATION DURING THE TEST.....	10
2.3 TEST SOFTWARE LIST	11
2.4 TEST PERIPHERALS LIST	11
2.5 TEST ENVIRONMENT CONDITION:.....	11
2.6 INSTRUMENT LIST	12
2.7 MEASUREMENT UNCERTAINTY	13
3 MINIMUM 6DB BANDWIDTH.....	14
3.1 LIMIT	14
3.2 MEASUREMENT PROCEDURE	14
3.3 TEST CONFIGURATION	14
3.4 TEST RESULTS OF MINIMUM 6DB BANDWIDTH	14
4 MAXIMUM CONDUCTED OUTPUT POWER AND E.I.R.P.....	15
4.1 LIMIT	15
4.2 MEASUREMENT PROCEDURE	15
4.3 TEST CONFIGURATION	15
4.4 TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER.....	15
5 POWER SPECTRUM DENSITY	16
5.1 LIMIT	16
5.2 MEASUREMENT PROCEDURE	16
5.3 TEST CONFIGURATION	17
5.4 TEST RESULTS OF POWER SPECTRUM DENSITY	17
6 EMISSION OUTSIDE THE FREQUENCY BAND	18
6.1 LIMIT	18
6.2 MEASUREMENT PROCEDURE	18
6.3 TEST CONFIGURATION	19
6.4 THE RESULTS OF EMISSION OUTSIDE THE FREQUENCY BAND.....	19
7 RADIATED EMISSIONS IN RESTRICTED FREQUENCY BANDS.....	20
7.1 LIMIT	20
7.2 MEASUREMENT PROCEDURE	20
7.3 TEST CONFIGURATION	22
7.4 TEST RESULTS OF RADIATED EMISSIONS	24
8 POWER LINE CONDUCTED EMISSION.....	29
8.1 LIMIT	29
8.2 TEST CONFIGURATION	29
8.3 MEASUREMENT PROCEDURE	30

TEST REPORT

8.4 TEST RESULTS OF POWER LINE CONDUCTED EMISSION..... 31

9 OCCUPIED BANDWIDTH 33

9.1 LIMIT 33

9.2 MEASUREMENT PROCEDURE 33

9.3 TEST CONFIGURATION 33

9.4 THE RESULTS OF OCCUPIED BANDWIDTH 33

10 ANTENNA REQUIREMENT 34

APPENDIX A: TEST RESULTS 35

Revision History

Report No.	Version	Description	Issued Date
230101330SHA-001	Rev. 01	Initial issue of report	Feb 23, 2023

Measurement result summary

TEST ITEM	FCC REFERANCE	IC REFERANCE	RESULT
Minimum 6dB Bandwidth	15.247(a)(2)	RSS-247 Issue 2 Clause 5.2	Pass
Maximum conducted output power and e.i.r.p.	15.247(b)(3)	RSS-247 Issue 2 Clause 5.4	Pass
Power spectrum density	15.247(e)	RSS-247 Issue 2 Clause 5.2	Pass
Emission outside the frequency band	15.247(d)	RSS-247 Issue 2 Clause 5.5	Pass
Radiated Emissions in restricted frequency bands	15.247(d), 15.205&15.209	RSS-Gen Issue 5 Clause 8.9&8.10	Pass
Power line conducted emission	15.207(a)	RSS-Gen Issue 5 Clause 8.8	Pass
Occupied bandwidth	-	RSS-Gen Issue 5 Clause 6.7	Tested
Antenna requirement	15.203	-	Pass

Notes: 1: NA =Not Applicable

2: Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

3: Additions, Deviations and Exclusions from Standards: None.

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name:	Robotic Vacuum Cleaner
Type/Model/PMN:	QX0PEA
HVIN:	QX0PEA-BLM8
Description of EUT:	EUT is a Robotic Vacuum Cleaner. EUT supports WIFI function. There is only one model and the worst data is listed in the report.
Rating:	Rated input: 20VDC, 1.5A
EUT type:	<input type="checkbox"/> Table top <input checked="" type="checkbox"/> Floor standing
Software Version:	V1.0
Hardware Version:	V1.0
Sample No.:	0230115-42-003
Sample received date:	Feb 1, 2023
Date of test:	Feb 1~21, 2023

1.2 Technical Specification

Frequency Range:	2412MHz ~ 2462MHz
Support Standards:	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n-HT20, IEEE 802.11n-HT40
Type of Modulation:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11n-HT20: OFDM (64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11n-HT40: OFDM (64-QAM, 16-QAM, QPSK, BPSK)
Channel Number:	11 Channels for 802.11b, 802.11g and 802.11n(HT20) 7 Channels for 802.11n(HT40)
Data Rate:	IEEE 802.11b: Up to 11 Mbps IEEE 802.11g: Up to 54 Mbps IEEE 802.11n-HT20: Up to MCS7 IEEE 802.11n-HT40: Up to MCS7
Channel Separation:	5 MHz

1.3 Antenna information

Antenna No.	Model	Antenna type	Antenna Gain	Note
1	/	PCB antenna	2.54dBi	

Mode	Tx/Rx Function	Beamforming function	CDD function
802.11b	1Tx/1Rx	NO	NO
802.11g	1Tx/1Rx	NO	NO
802.11n(HT20)	1Tx/1Rx	NO	NO
802.11n(HT40)	1Tx/1Rx	NO	NO

1.4 Description of Test Facility

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0014
	VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2020)
 ANSI C63.10 (2013)
 KDB 558074 D01(v05r02)
 RSS-247 Issue 2 (February 2017)
 RSS-Gen Issue 5 (April 2018)+A1(March 2019)

2.2 Mode of operation during the test

While testing transmitting mode of EUT, the continuously transmission was applied by following software.

Software name	Manufacturer	Version	Supplied by
Adb command	roborock	01	Manufacturer

The lowest, middle and highest channel were tested as representatives.

Frequency Band (MHz)	Mode	Lowest (MHz)	Middle (MHz)	Highest (MHz)
2400-2483.5	802.11b	2412	2437	2462
	802.11g	2412	2437	2462
	802.11n(HT20)	2412	2437	2462
	802.11n(HT40)	2422	2437	2452

Data rate VS Power:

The pre-scan for the conducted power with all rates in each modulation and bands was used, and the worst case was found and used in all test cases. After this pre-scan, we choose the following table of the data rate as the worst case.

Frequency Band (MHz)	Mode	Worst case data rate	Power Setting
2400-2483.5	802.11b	1Mbps	default
	802.11g	6Mbps	default
	802.11n(HT20)	MCS0	default
	802.11n(HT40)	MCS0	default

The EUT will use two types antenna, and there have the following test mode:

Radiated test mode:

Mode 1: EUT transmitted signal with internal antenna;

Conducted test mode:

Mode 2: EUT transmitted signal from PCBA RF port connected to SPA directly;

We have verified all test modes, and choose the worst mode 1 for radiated test and mode 2 for conducted test as representatively to list the results in this report.

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

2.4 Test peripherals list

Item No.	Name	Band and Model	Description
1	Laptop computer	HP ProBook 6470b	100-240V AC, 50/60Hz
2	Docking station	EWFD12LRR	Input:120V~, 60Hz Output: 20VDC, 1.5A

2.5 Test environment condition:

Test items	Temperature	Humidity
Minimum 6dB Bandwidth	22°C	55% RH
Maximum conducted output power and e.i.r.p.		
Power spectrum density		
Emission outside the frequency band		
Occupied bandwidth		
Radiated Emissions in restricted frequency bands	22°C	55% RH
Power line conducted emission	22°C	55% RH

2.6 Instrument list

Conducted Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESR7	EC 6194	2023-12-09
<input checked="" type="checkbox"/>	A.M.N.	R&S	ESH2-Z5	EC 3119	2023-11-09
<input checked="" type="checkbox"/>	Shielded room	Zhongyu	-	EC 2838	2024-01-11
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESIB 26	EC 3045	2023-10-19
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112B	EC 6411	2023-08-23
<input checked="" type="checkbox"/>	Pre-amplifier	R&S	AFS42-00101800-25-S-42	EC5262	2023-06-04
<input checked="" type="checkbox"/>	Horn antenna	ETS	3117	EC 4792-1	2023-08-28
<input checked="" type="checkbox"/>	Semi-anechoic chamber	Albatross	-	EC 3048	2023-07-08
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	PXA Signal Analyzer	Keysight	N9030A	EC 5338	2023-03-14
<input checked="" type="checkbox"/>	Coaxial cable	ETS	/	/	2023-03-14
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3783	2023-03-08
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 5198	2023-03-08

2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Maximum peak output power	± 0.74dB
Radiated Emissions in restricted frequency bands below 1GHz	± 4.90dB
Radiated Emissions in restricted frequency bands above 1GHz	± 5.02dB
Emission outside the frequency band	± 2.89dB
Occupied Channel Bandwidth	± 0.88 %
Power line conducted emission	± 3.19dB

3 Minimum 6dB bandwidth

Test result: Pass


3.1 Limit

For systems using digital modulation techniques that may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz bands, the minimum 6 dB bandwidth shall be at least 500 kHz.

3.2 Measurement Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.3 Test Configuration

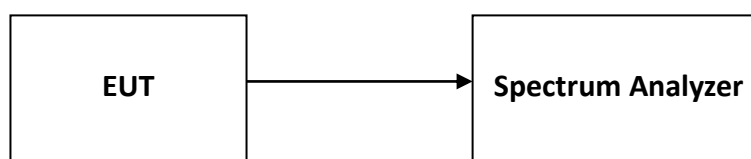

3.4 Test Results of Minimum 6dB bandwidth

Please refer to Appendix A

4 Maximum conducted output power and e.i.r.p.

Test result: Pass

4.1 Limit


For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 W. (The e.i.r.p. shall not exceed 4 W)

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 30dBm and 30+ (6 –antenna gain-beam forming gain).

4.2 Measurement Procedure

The EUT was tested according to DTS test procedure of “KDB558074 D01v05r02 15.247 Meas Guidance” (clause 8.3.1.2) for compliance requirements.

4.3 Test Configuration

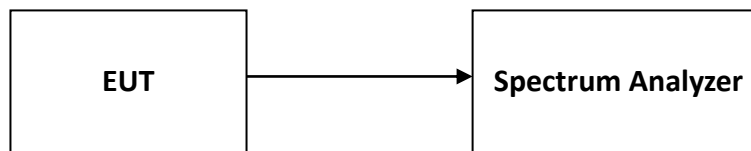

4.4 Test Results of Maximum conducted output power

Please refer to Appendix A

5 Power spectrum density

Test result: Pass

5.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.


If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 8dBm/MHz and $8 + (6 - \text{antenna gain} - \text{beam forming gain})$.

5.2 Measurement Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

5.3 Test Configuration

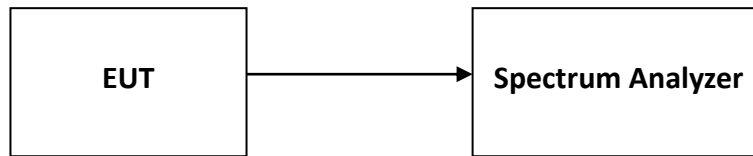

5.4 Test Results of Power spectrum density

Please refer to Appendix A

TEST REPORT

6 Emission outside the frequency band

Test result: Pass

6.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

6.2 Measurement Procedure

Reference level measurement

Establish a reference level by using the following procedure:


- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Emission level measurement

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq 3 \times$ RBW.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

6.3 Test Configuration

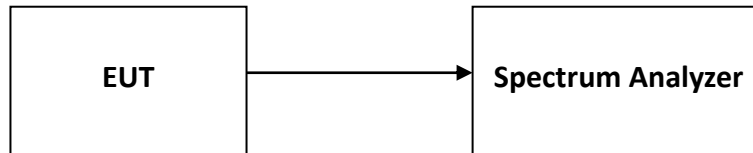

6.4 The results of Emission outside the frequency band

Please refer to Appendix A

7 Radiated Emissions in restricted frequency bands

Test result: Pass

7.1 Limit

The radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified showed as below:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

7.2 Measurement Procedure

For Radiated emission below 30MHz:

- The EUT was placed on the top of a rotating table 0.8 meters (0.1 meters for floor-standing device) above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, the lowest height of the magnetic antenna was 1 m above the ground.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

TEST REPORT**For Radiated emission above 30MHz:**


- a) The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) or 0.1 meters (for floor-standing device) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 3 x RBW (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported

7.3 Test Configuration


For Radiated emission below 30MHz:

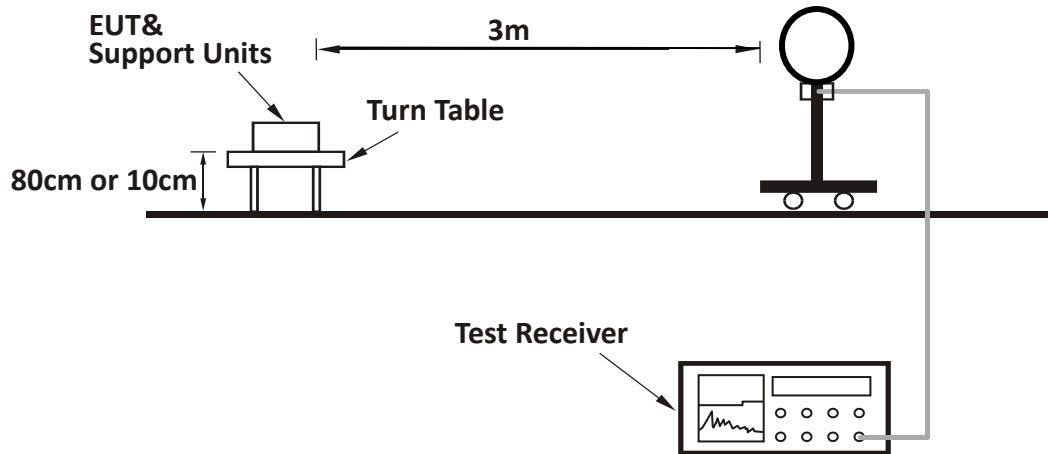

For Radiated emission 30MHz to 1GHz:

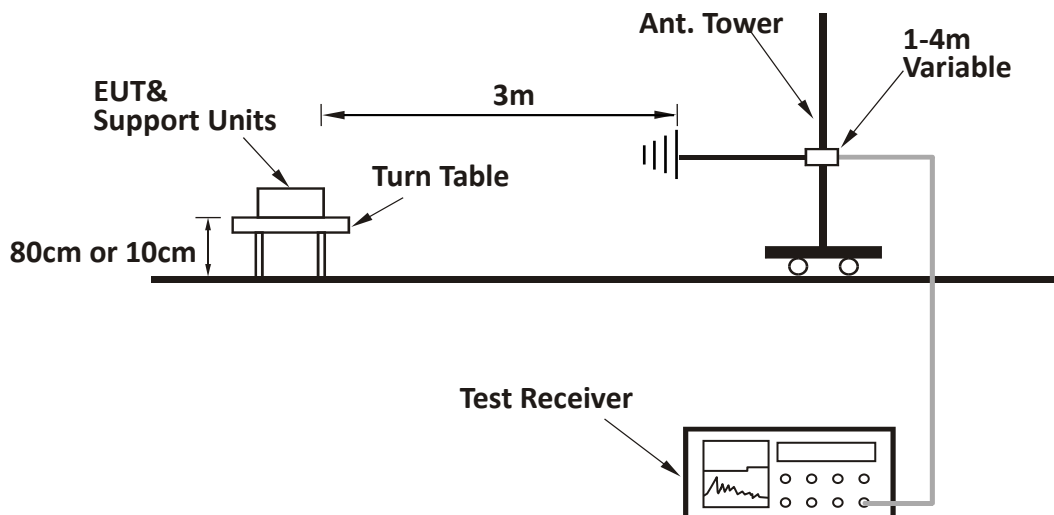

For Radiated emission above 1GHz:

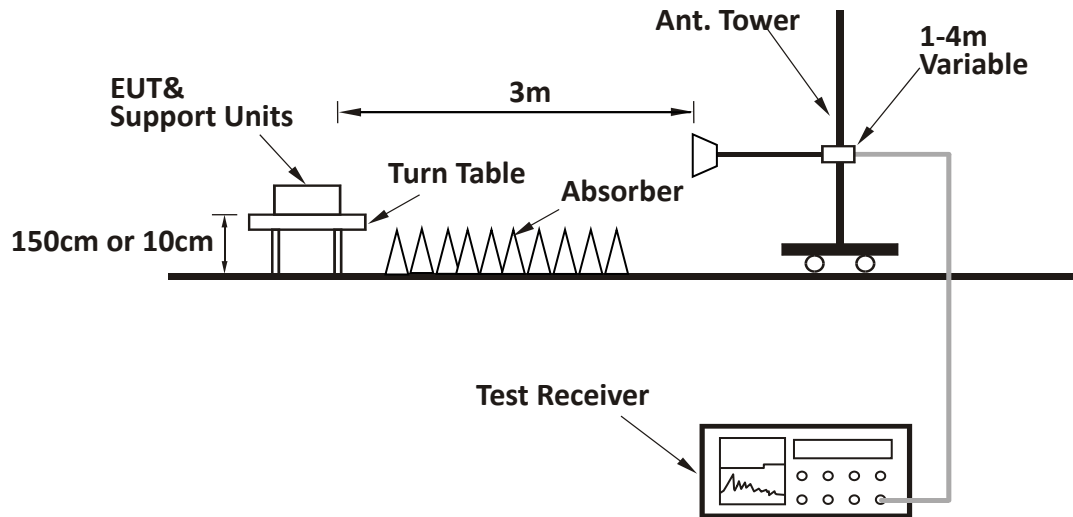


TEST REPORT

7.4 Test Results of Radiated Emissions


The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 1 5.31(o) was not reported.

The worst waveform from 30MHz to 1000MHz is listed as below:

Horizontal

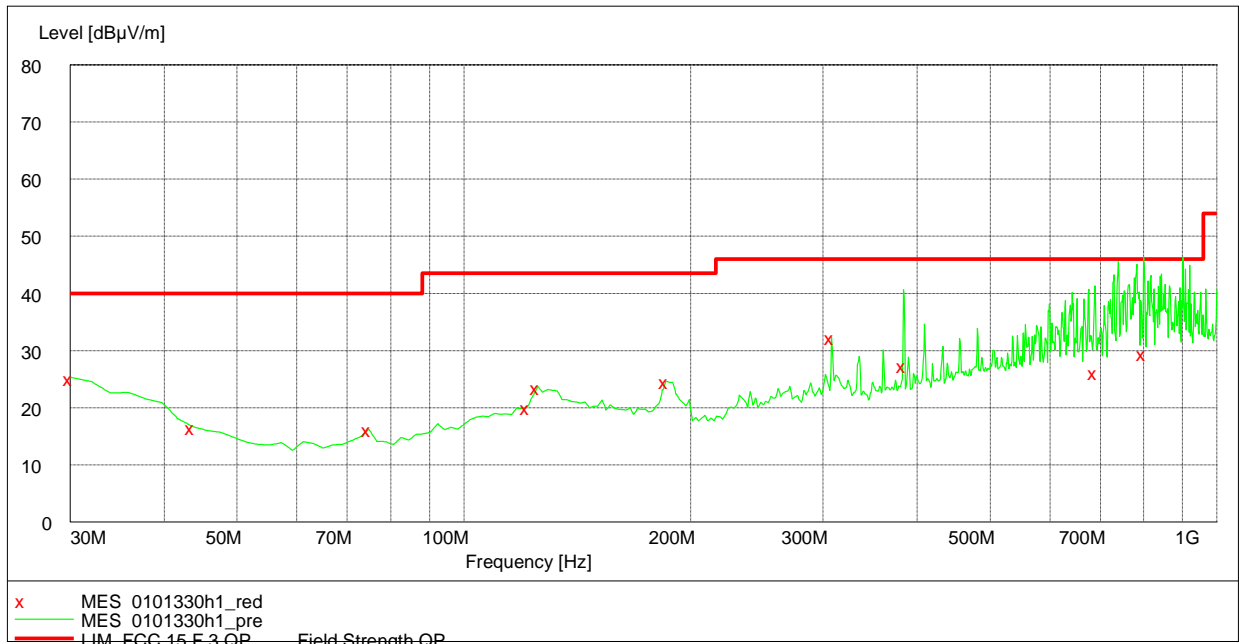

Vertical

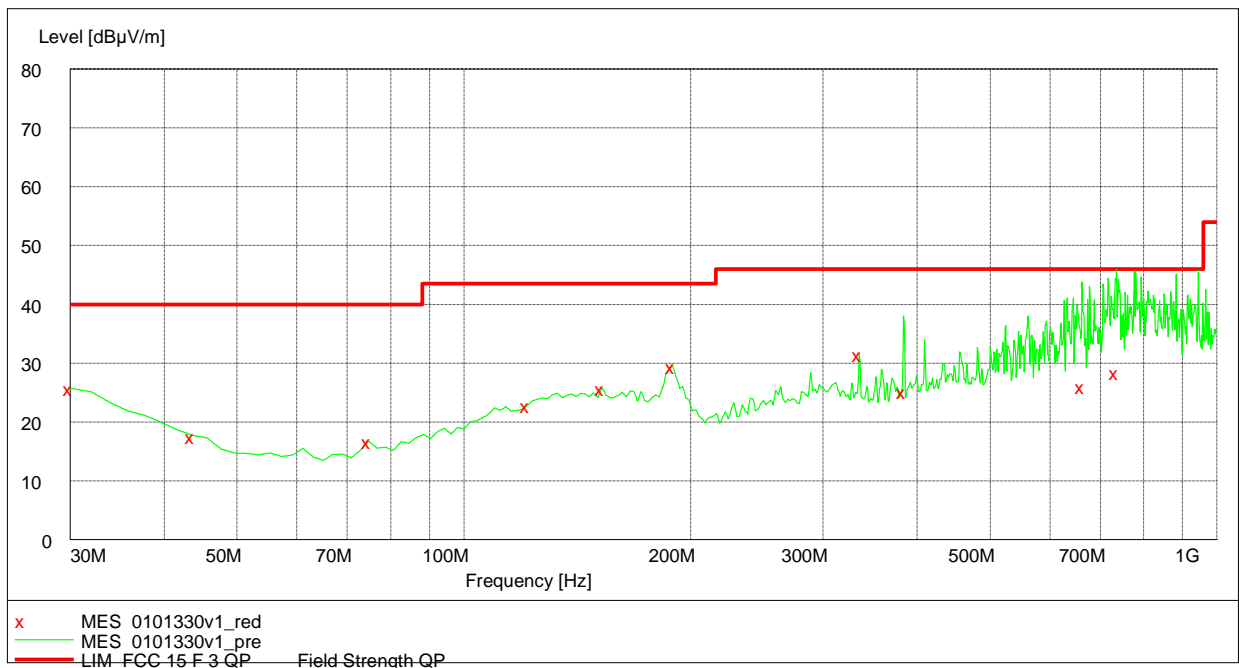

TEST REPORT

Test data below 1GHz

Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
H	30.00	25.30	21.40	40.00	14.70	PK
H	185.51	24.60	11.20	43.50	18.90	PK
H	307.98	32.30	16.00	46.00	13.70	PK
H	383.79	27.42	18.00	46.00	18.58	QP
H	688.98	26.33	22.50	46.00	19.67	QP
H	799.78	29.54	23.60	46.00	16.46	QP
V	30.00	25.70	21.40	40.00	14.30	PK
V	189.40	29.50	11.20	43.50	14.00	PK
V	335.19	31.60	16.80	46.00	14.40	PK
V	383.79	25.31	18.00	46.00	20.69	QP
V	661.76	26.18	22.30	46.00	19.82	QP
V	735.63	28.45	23.00	46.00	17.55	QP

Note: The worst test result (30MHz to 1GHz) of 802.11b channel L (2412MHz) was chosen to list in the report as representative.

Test result above 1GHz:

The emission was conducted from 1GHz to 25GHz

802.11b

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H/V	2390.00	56.62	37.1	74	17.38	PK
	H/V	2390.00	47.45	37.1	54	6.55	AV
	H/V	4824.00	45.71	3.0	74	28.29	PK
	H/V	4824.00	39.66	3.0	54	14.34	AV
	H/V	7236.00	47.74	7.8	74	26.26	PK
	H/V	7236.00	41.26	7.8	54	12.74	AV
M	H/V	4874.00	44.84	3.1	74	29.16	PK
	H/V	4874.00	38.53	3.1	54	15.47	AV

TEST REPORT

	H/V	7311.00	49.64	8.1	74	24.36	PK
	H/V	7311.00	43.15	8.1	54	10.85	AV
H	H/V	2483.50	59.34	37.3	74	14.66	PK
	H/V	2483.50	50.18	37.3	54	3.82	AV
	H/V	4924.00	43.74	3.3	74	30.26	PK
	H/V	4924.00	37.23	3.3	54	16.77	AV
	H/V	7386.00	49.85	8.3	74	24.15	PK
	H/V	7386.00	43.76	8.3	54	10.24	AV

802.11g

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H/V	2390.00	58.37	37.1	74	15.63	PK
	H/V	2390.00	49.22	37.1	54	4.78	AV
	H/V	4824.00	44.46	3.0	74	29.54	PK
	H/V	4824.00	38.51	3.0	54	15.49	AV
	H/V	7236.00	47.58	7.8	74	26.42	PK
	H/V	7236.00	41.82	7.8	54	12.18	AV
M	H/V	4874.00	44.17	3.1	74	29.83	PK
	H/V	4874.00	38.38	3.1	54	15.62	AV
	H/V	7311.00	47.53	8.1	74	26.47	PK
	H/V	7311.00	41.61	8.1	54	12.39	AV
H	H/V	2483.50	60.67	37.3	74	13.33	PK
	H/V	2483.50	51.45	37.3	54	2.55	AV
	H/V	4924.00	44.25	3.3	74	29.75	PK
	H/V	4924.00	38.49	3.3	54	15.51	AV
	H/V	7386.00	49.36	8.3	74	24.64	PK
	H/V	7386.00	43.18	8.3	54	10.82	AV

TEST REPORT

802.11n(HT20)

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H/V	2390.00	58.84	37.1	74	15.16	PK
	H/V	2390.00	49.35	37.1	54	4.65	AV
	H/V	4824.00	45.55	3.0	74	28.45	PK
	H/V	4824.00	39.73	3.0	54	14.27	AV
	H/V	7236.00	47.39	7.8	74	26.61	PK
	H/V	7236.00	41.53	7.8	54	12.47	AV
M	H/V	4874.00	43.87	3.1	74	30.13	PK
	H/V	4874.00	37.58	3.1	54	16.42	AV
	H/V	7311.00	46.61	8.1	74	27.39	PK
	H/V	7311.00	40.79	8.1	54	13.21	AV
H	H/V	2483.50	61.53	37.3	74	12.47	PK
	H/V	2483.50	51.86	37.3	54	2.14	AV
	H/V	4924.00	44.69	3.3	74	29.31	PK
	H/V	4924.00	38.57	3.3	54	15.43	AV
	H/V	7386.00	49.72	8.3	74	24.28	PK
	H/V	7386.00	43.64	8.3	54	10.36	AV

802.11n(HT40)

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H/V	2390.00	59.31	37.1	74	14.69	PK
	H/V	2390.00	50.86	37.1	54	3.14	AV
	H/V	4844.00	43.47	3.0	74	30.53	PK
	H/V	4844.00	36.26	3.0	54	17.74	AV
	H/V	7266.00	47.62	8.0	74	26.38	PK
	H/V	7266.00	41.33	8.0	54	12.67	AV
M	H/V	4874.00	43.16	3.1	74	30.84	PK

TEST REPORT

	H/V	4874.00	36.62	3.1	54	17.38	AV
	H/V	7311.00	47.54	8.1	74	26.46	PK
	H/V	7311.00	41.37	8.1	54	12.63	AV
H	H/V	2483.50	62.35	37.3	74	11.65	PK
	H/V	2483.50	52.16	37.3	54	1.84	AV
	H/V	4904.00	44.63	3.2	74	29.37	PK
	H/V	4904.00	37.83	3.2	54	16.17	AV
	H/V	7356.00	49.57	8.2	74	24.43	PK
	H/V	7356.00	43.35	8.2	54	10.65	AV

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = Limit - Corrected Reading
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
 Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
 Limit = 40.00dBuV/m.
 Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m;
 Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m;
 Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB.

8 Power line conducted emission


Test result: Pass

8.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

8.2 Test Configuration

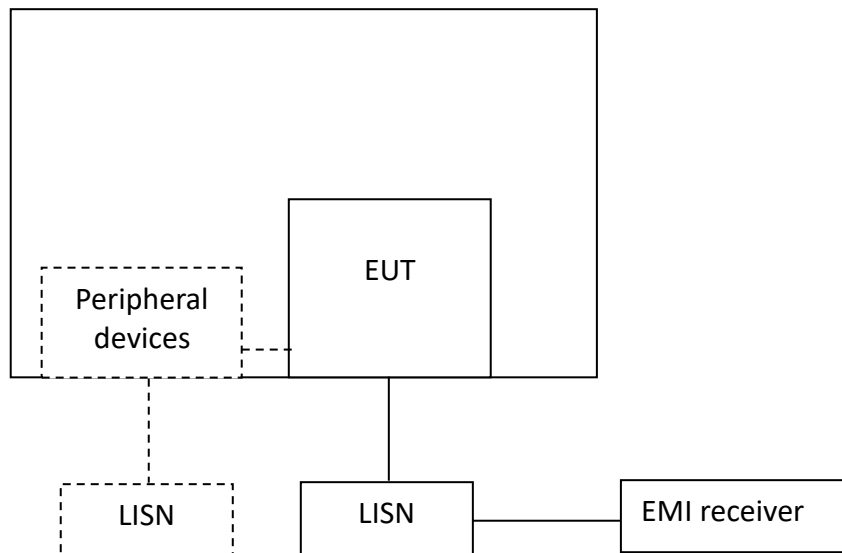

TEST REPORT**8.3 Measurement Procedure**



Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.

8.4 Test Results of Power line conducted emission

Power supply: 120V~, 60Hz

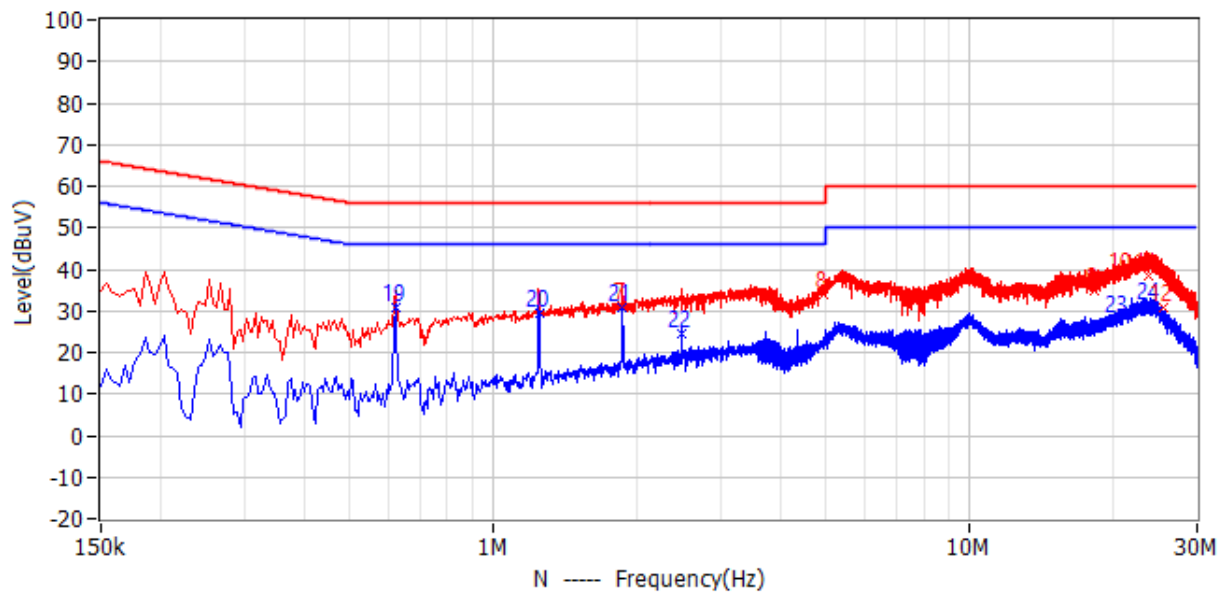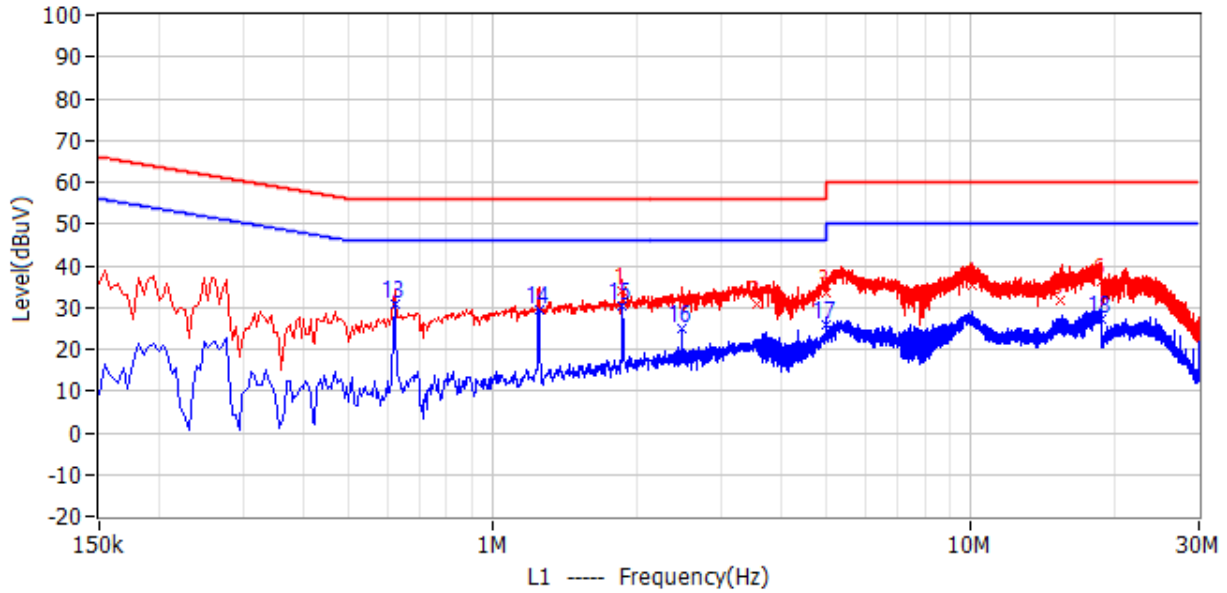

No.	Frequency	Limit dBuV	Level dBuV	Delta dB	Reading dBuV	Factor dB	Detector	Phase
1	1.869MHz	56.0	34.1	-21.9	27.9	6.2	QP	L1
2	3.561MHz	56.0	31.0	-25.0	24.8	6.2	QP	L1
3	4.983MHz	56.0	33.6	-22.4	27.3	6.3	QP	L1
4	10.028MHz	60.0	35.1	-24.9	28.8	6.3	QP	L1
5	15.405MHz	60.0	31.9	-28.1	25.5	6.4	QP	L1
6	18.704MHz	60.0	36.4	-23.6	30.0	6.4	QP	L1
7	1.869MHz	56.0	31.1	-24.9	24.8	6.3	QP	N

TEST REPORT

No.	Frequency	Limit dBuV	Level dBuV	Delta dB	Reading dBuV	Factor dB	Detector	Phase
8	4.952MHz	56.0	34.0	-22.0	27.7	6.3	QP	N
9	18.326MHz	60.0	34.9	-25.1	28.4	6.5	QP	N
10	20.864MHz	60.0	38.5	-21.5	32.0	6.5	QP	N
11	23.735MHz	60.0	38.3	-21.7	31.8	6.5	QP	N
12	25.530MHz	60.0	30.7	-29.3	24.1	6.6	QP	N
13	622.500kHz	46.0	30.9	-15.1	24.7	6.2	CAV	L1
14	1.248MHz	46.0	29.6	-16.4	23.4	6.2	CAV	L1
15	1.869MHz	46.0	30.4	-15.6	24.2	6.2	CAV	L1
16	2.490MHz	46.0	24.9	-21.1	18.7	6.2	CAV	L1
17	4.983MHz	46.0	25.9	-20.1	19.6	6.3	CAV	L1
18	18.681MHz	50.0	27.1	-22.9	20.7	6.4	CAV	L1
19	622.500kHz	46.0	30.7	-15.3	24.4	6.3	CAV	N
20	1.248MHz	46.0	29.6	-16.4	23.3	6.3	CAV	N
21	1.869MHz	46.0	30.7	-15.3	24.4	6.3	CAV	N
22	2.490MHz	46.0	24.6	-21.4	18.3	6.3	CAV	N
23	20.562MHz	50.0	28.0	-22.0	21.5	6.5	CAV	N
24	23.973MHz	50.0	31.1	-18.9	24.6	6.5	CAV	N

- Remark: 1. Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.*
- 2. Level = Original Receiver Reading + Factor*
- 3. Delta = Level- Limit*
- 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.*

9 Occupied Bandwidth

Test result: Tested

9.1 Limit


None

9.2 Measurement Procedure

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

9.3 Test Configuration

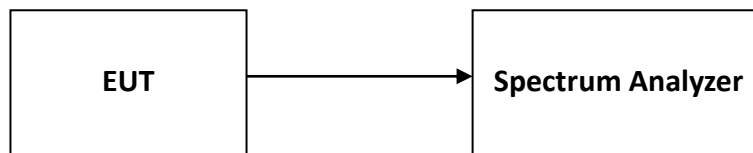

9.4 The results of Occupied Bandwidth

Please refer to Appendix A

10 Antenna requirement

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

EUT uses a permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

TEST REPORT

Appendix A: Test results


1. RF Output Power


1.1 Test Result and Data


WLAN PEAK Output Power						
Mode	Test Frequency (MHz)	Ant	Max Power (dBm)	Limit (dBm)	EIRP (dBm)	Result
802.11b	2412	Ant0	19.40	30	21.94	Pass
802.11b	2437	Ant0	17.28	30	19.82	Pass
802.11b	2462	Ant0	17.71	30	20.25	Pass
802.11g	2412	Ant0	18.41	30	20.95	Pass
802.11g	2437	Ant0	18.94	30	21.48	Pass
802.11g	2462	Ant0	19.53	30	22.07	Pass
802.11n (HT20)	2412	Ant0	18.31	30	20.85	Pass
802.11n (HT20)	2437	Ant0	18.79	30	21.33	Pass
802.11n (HT20)	2462	Ant0	19.65	30	22.19	Pass
802.11n (HT40)	2422	Ant0	17.84	30	20.38	Pass
802.11n (HT40)	2437	Ant0	18.67	30	21.21	Pass
802.11n (HT40)	2452	Ant0	19.07	30	21.61	Pass

Conclusion: The maximum EIRP = 19.65dBm+2.54dBi = 22.19dBm = 0.17W which is lower than the limit of 4W listed in RSS-247.

1.2 Test Plots

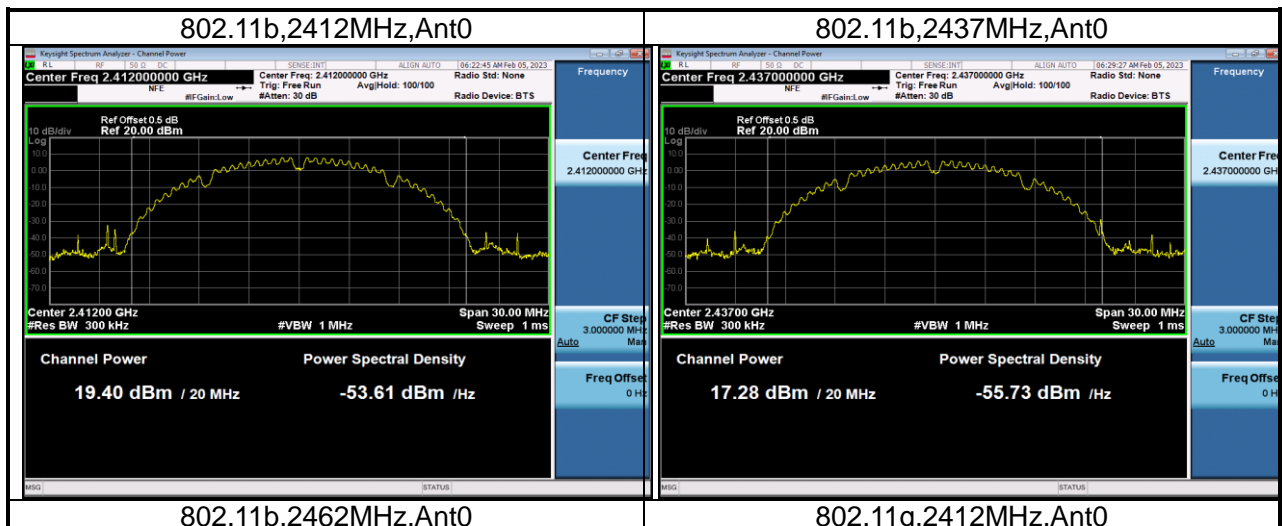

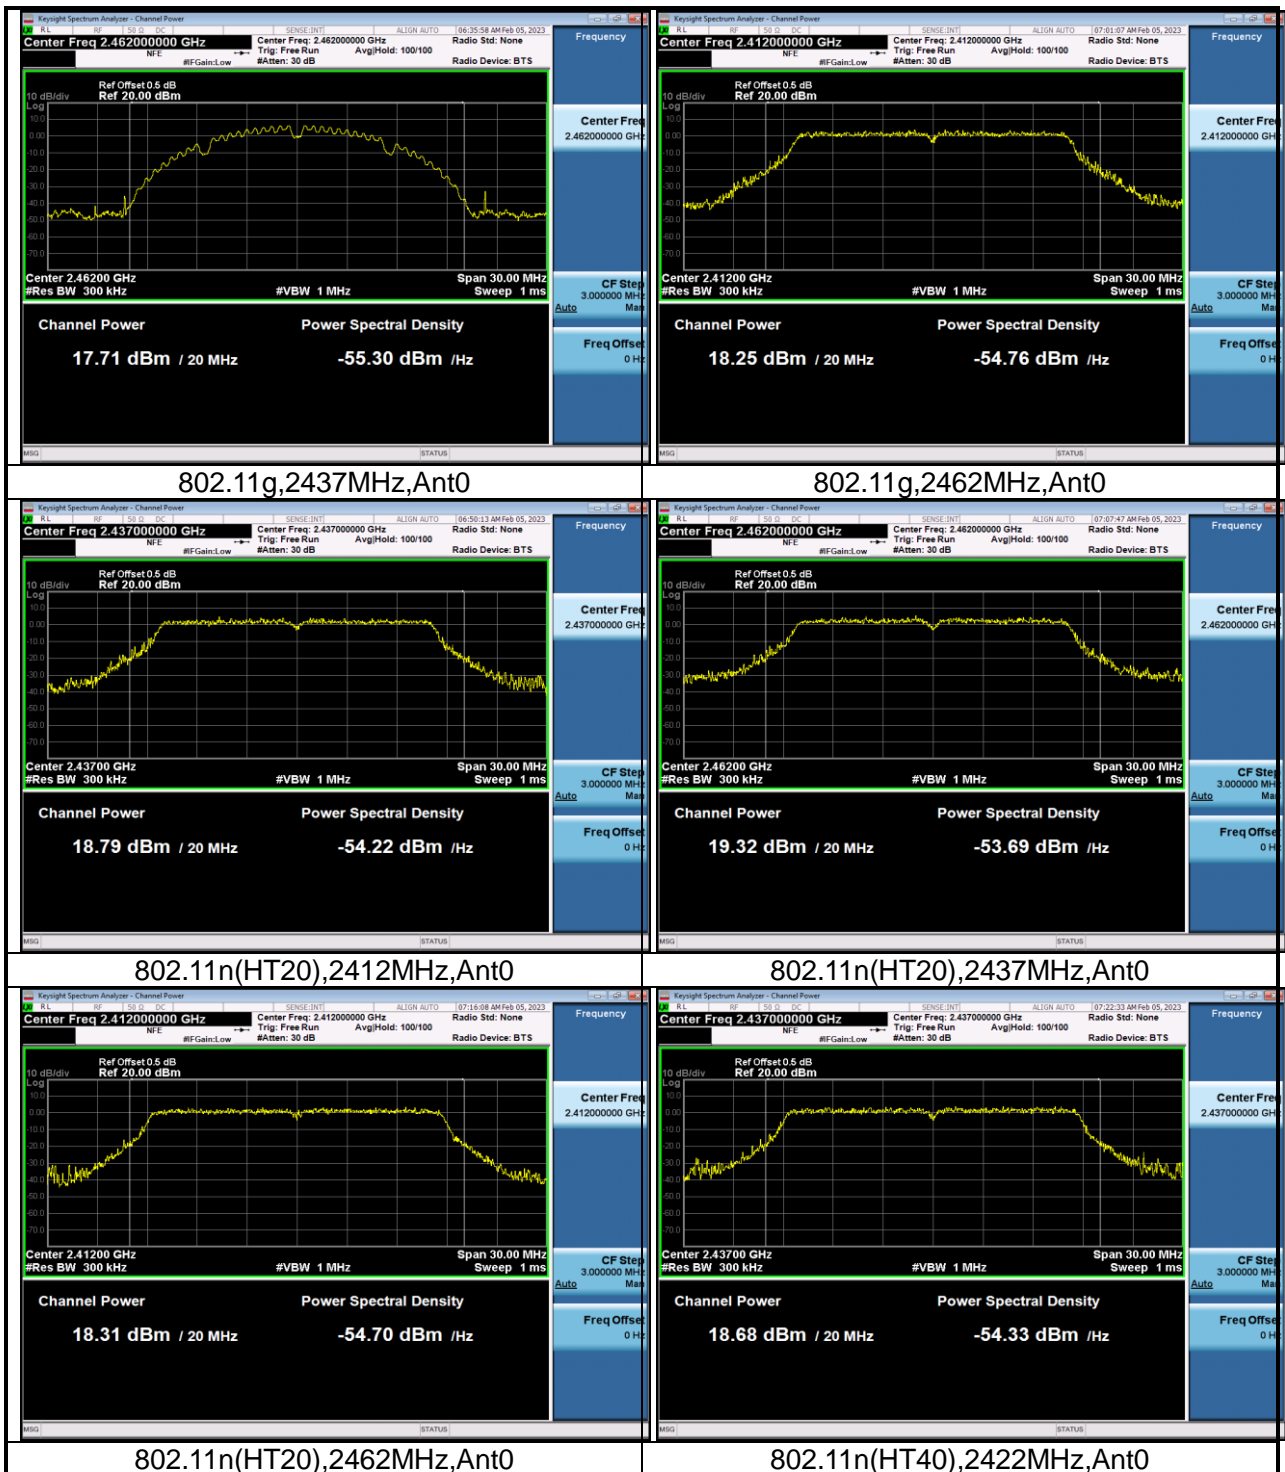

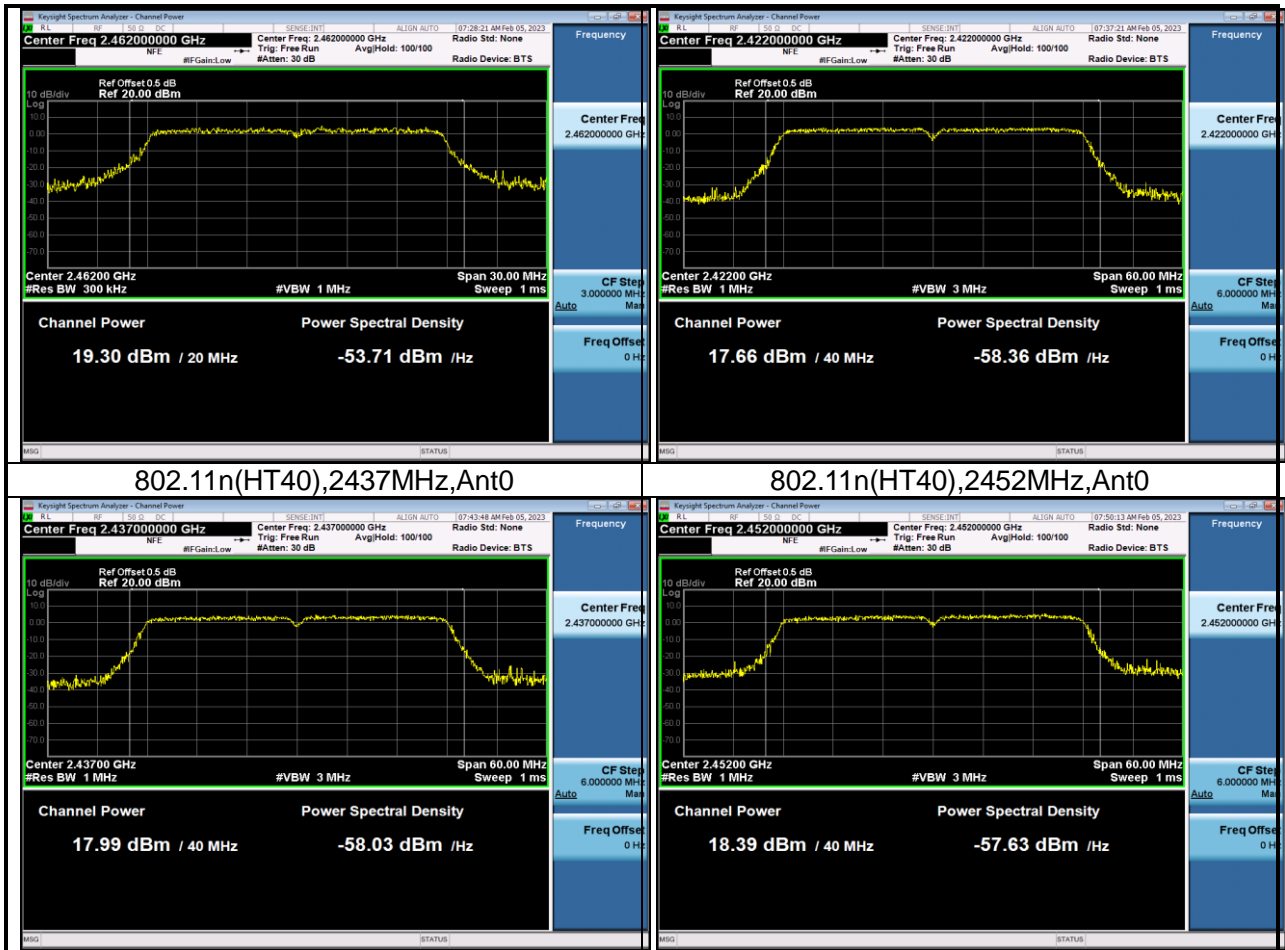

2. Minimum 6dB bandwidth


2.1 Test Result and Data

WLAN Occupied 6dB Bandwidth				
Mode	Test Frequency (MHz)	Ant	Occupied Bandwidth (MHz)	Result
802.11b	2412	Ant0	9.06	Pass
802.11b	2437	Ant0	8.11	Pass
802.11b	2462	Ant0	8.56	Pass
802.11g	2412	Ant0	16.38	Pass
802.11g	2437	Ant0	16.38	Pass
802.11g	2462	Ant0	16.38	Pass
802.11n (HT20)	2412	Ant0	17.58	Pass
802.11n (HT20)	2437	Ant0	17.36	Pass
802.11n (HT20)	2462	Ant0	17.57	Pass
802.11n (HT40)	2422	Ant0	35.88	Pass


TEST REPORT

802.11n (HT40)	2437	Ant0	35.88	Pass
802.11n (HT40)	2452	Ant0	35.56	Pass

2.2 Test Plots

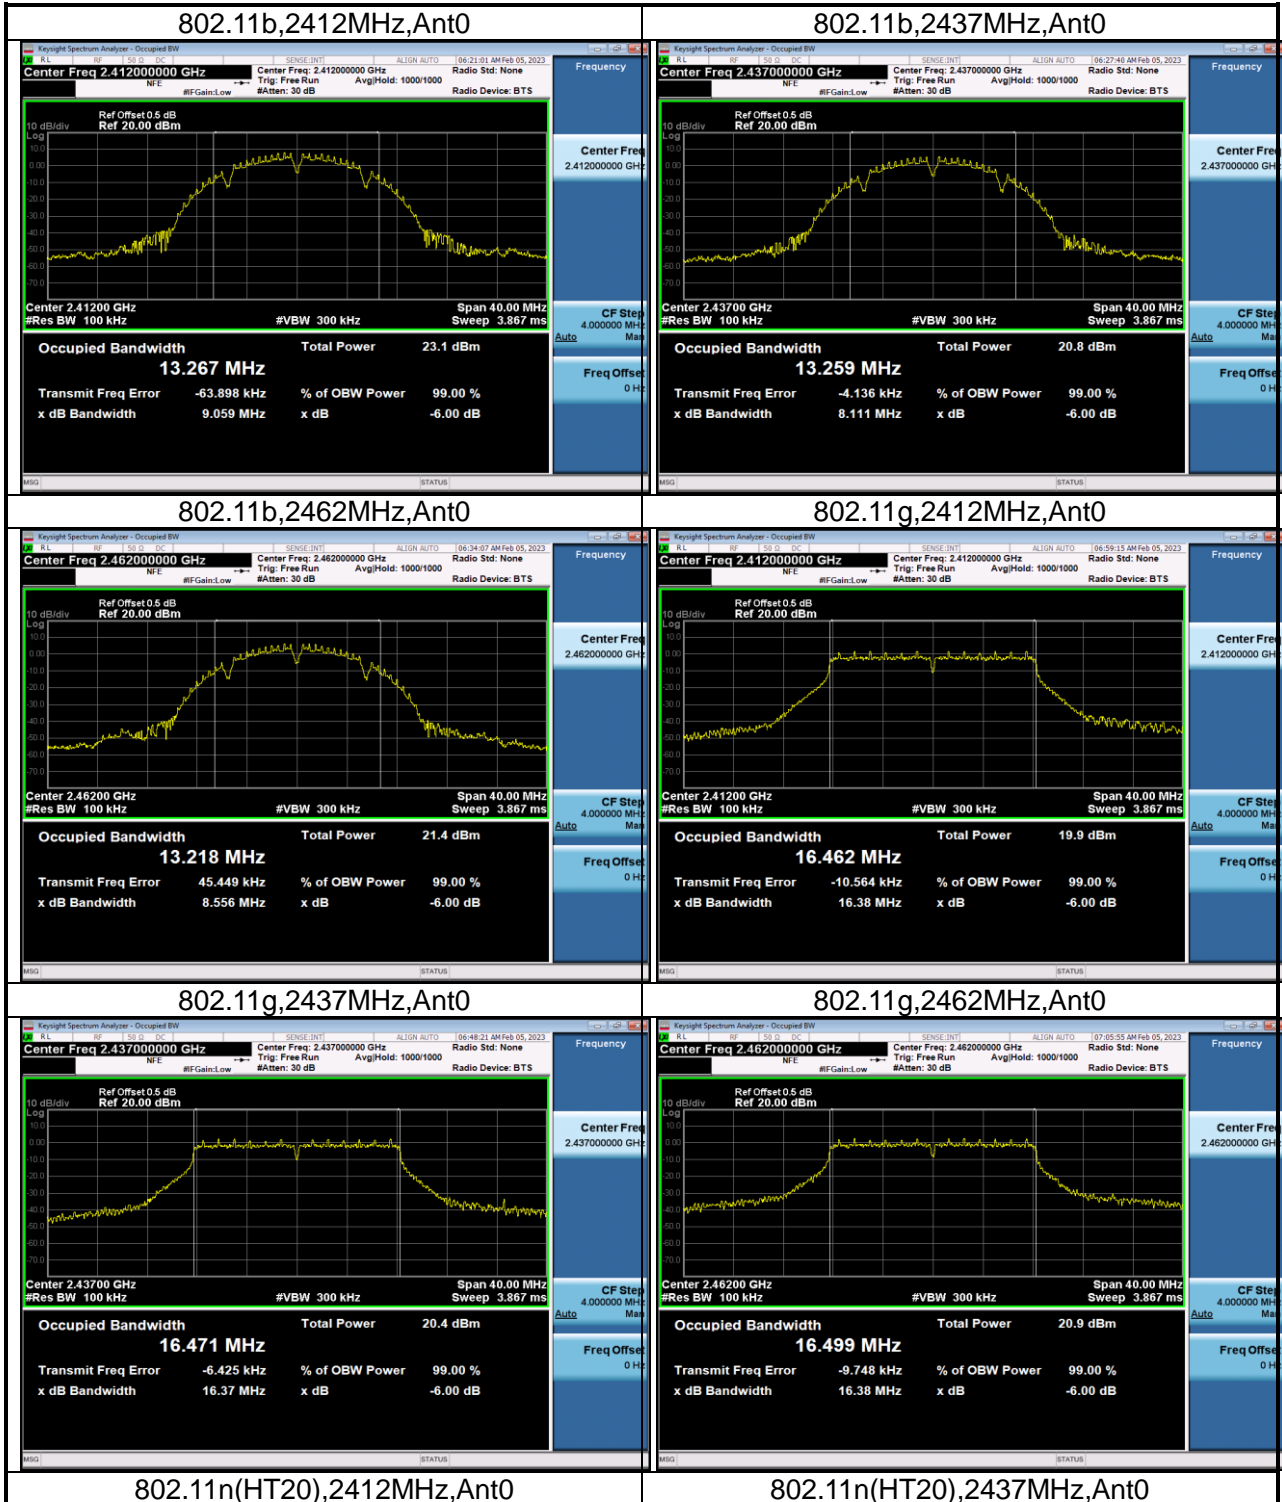

TEST REPORT

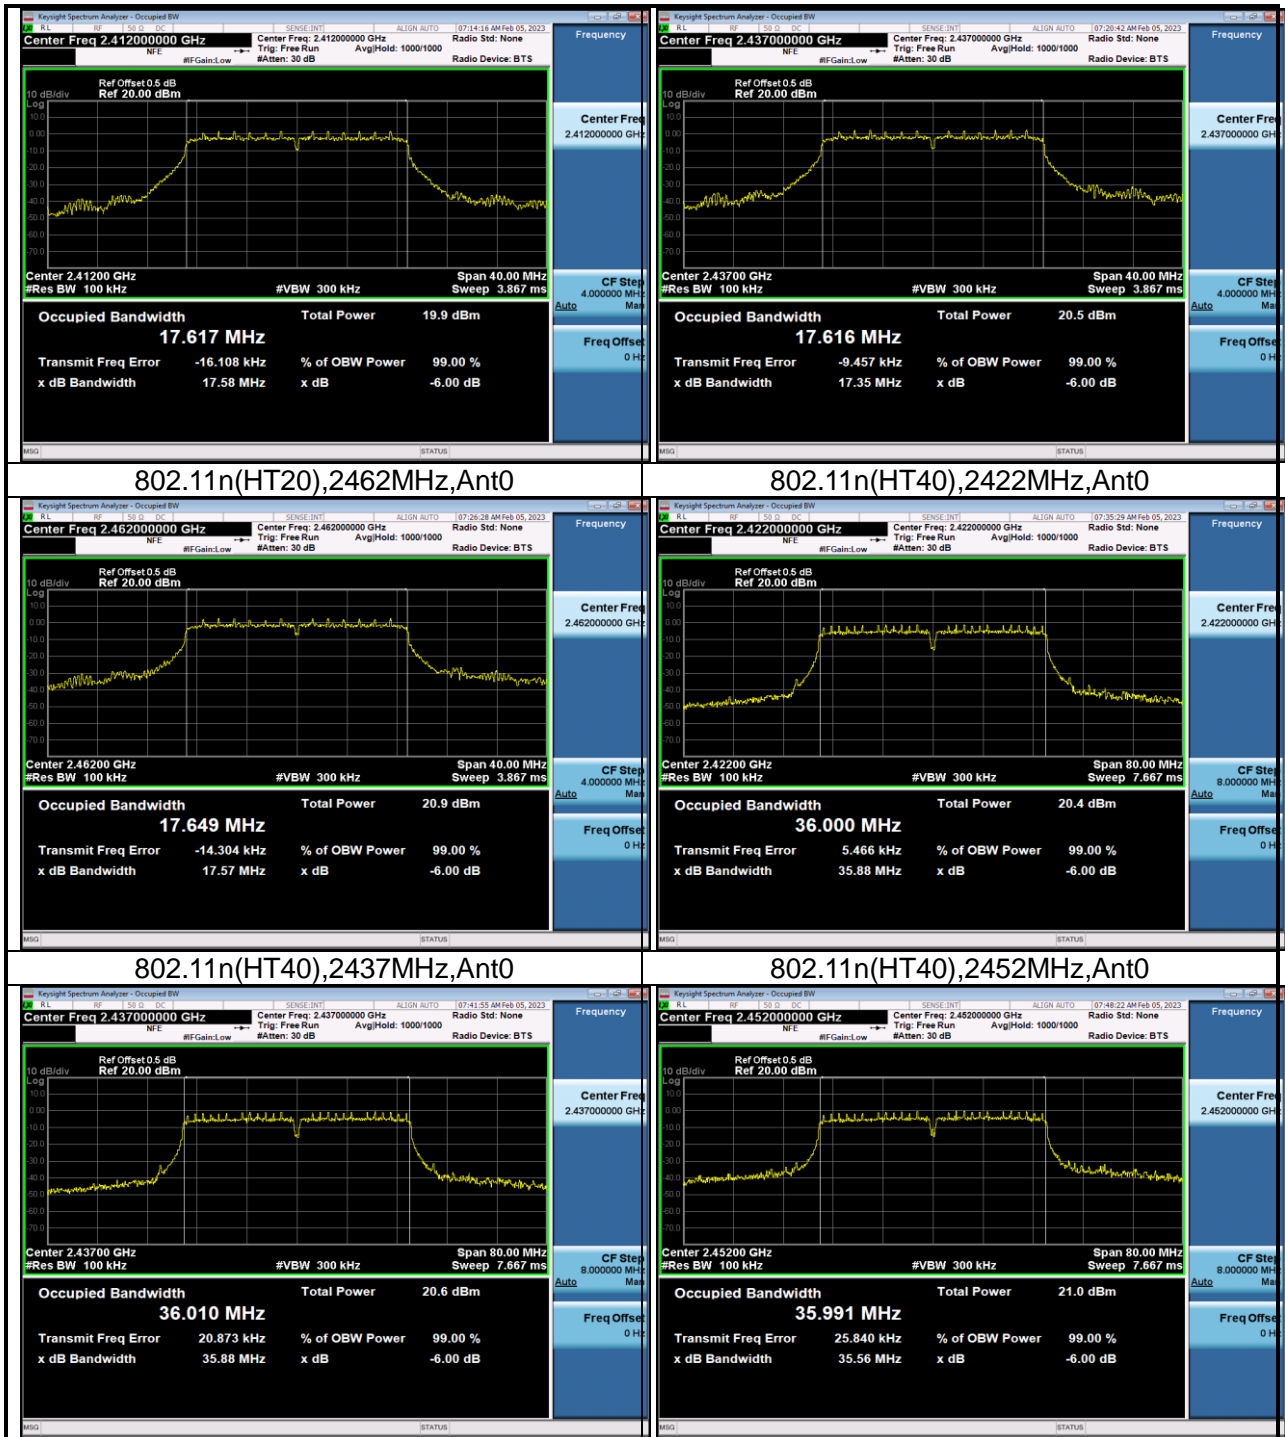


TEST REPORT


3. Occupied Bandwidth


3.1 Test Result and Data

WLAN 99% Occupied Bandwidth				
Mode	Test Frequency (MHz)	Ant	99% Occupied Bandwidth (MHz)	Result
802.11b	2412	Ant0	13.266	Pass
802.11b	2437	Ant0	13.272	Pass
802.11b	2462	Ant0	13.242	Pass
802.11g	2412	Ant0	17.022	Pass
802.11g	2437	Ant0	16.999	Pass
802.11g	2462	Ant0	17.171	Pass
802.11n (HT20)	2412	Ant0	17.934	Pass
802.11n (HT20)	2437	Ant0	17.937	Pass
802.11n (HT20)	2462	Ant0	18.002	Pass
802.11n (HT40)	2422	Ant0	36.889	Pass
802.11n (HT40)	2437	Ant0	36.850	Pass
802.11n (HT40)	2452	Ant0	36.897	Pass

3.2 Test Plots

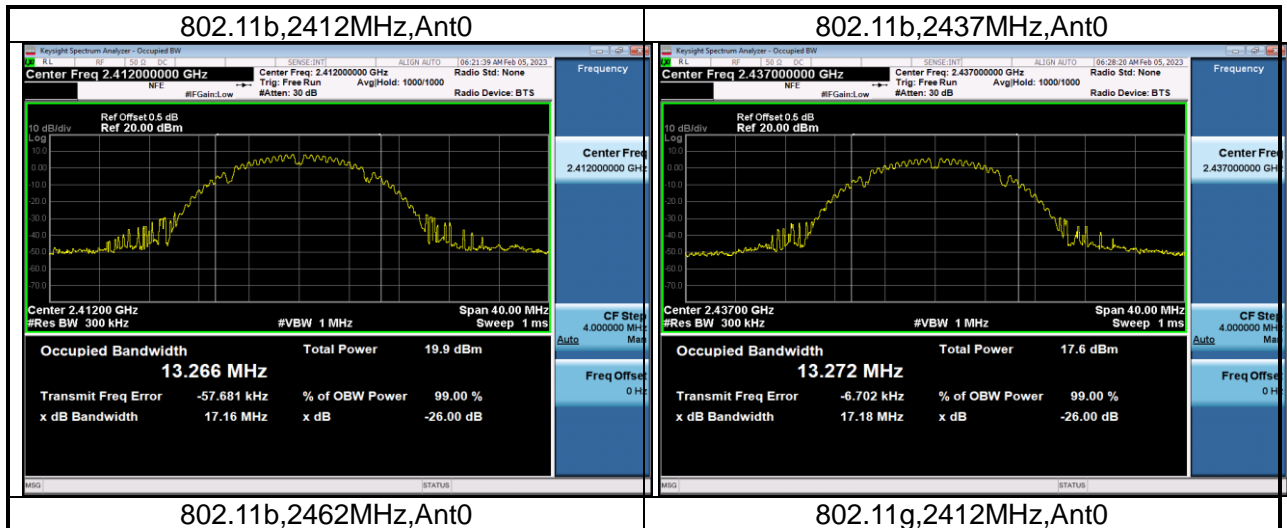

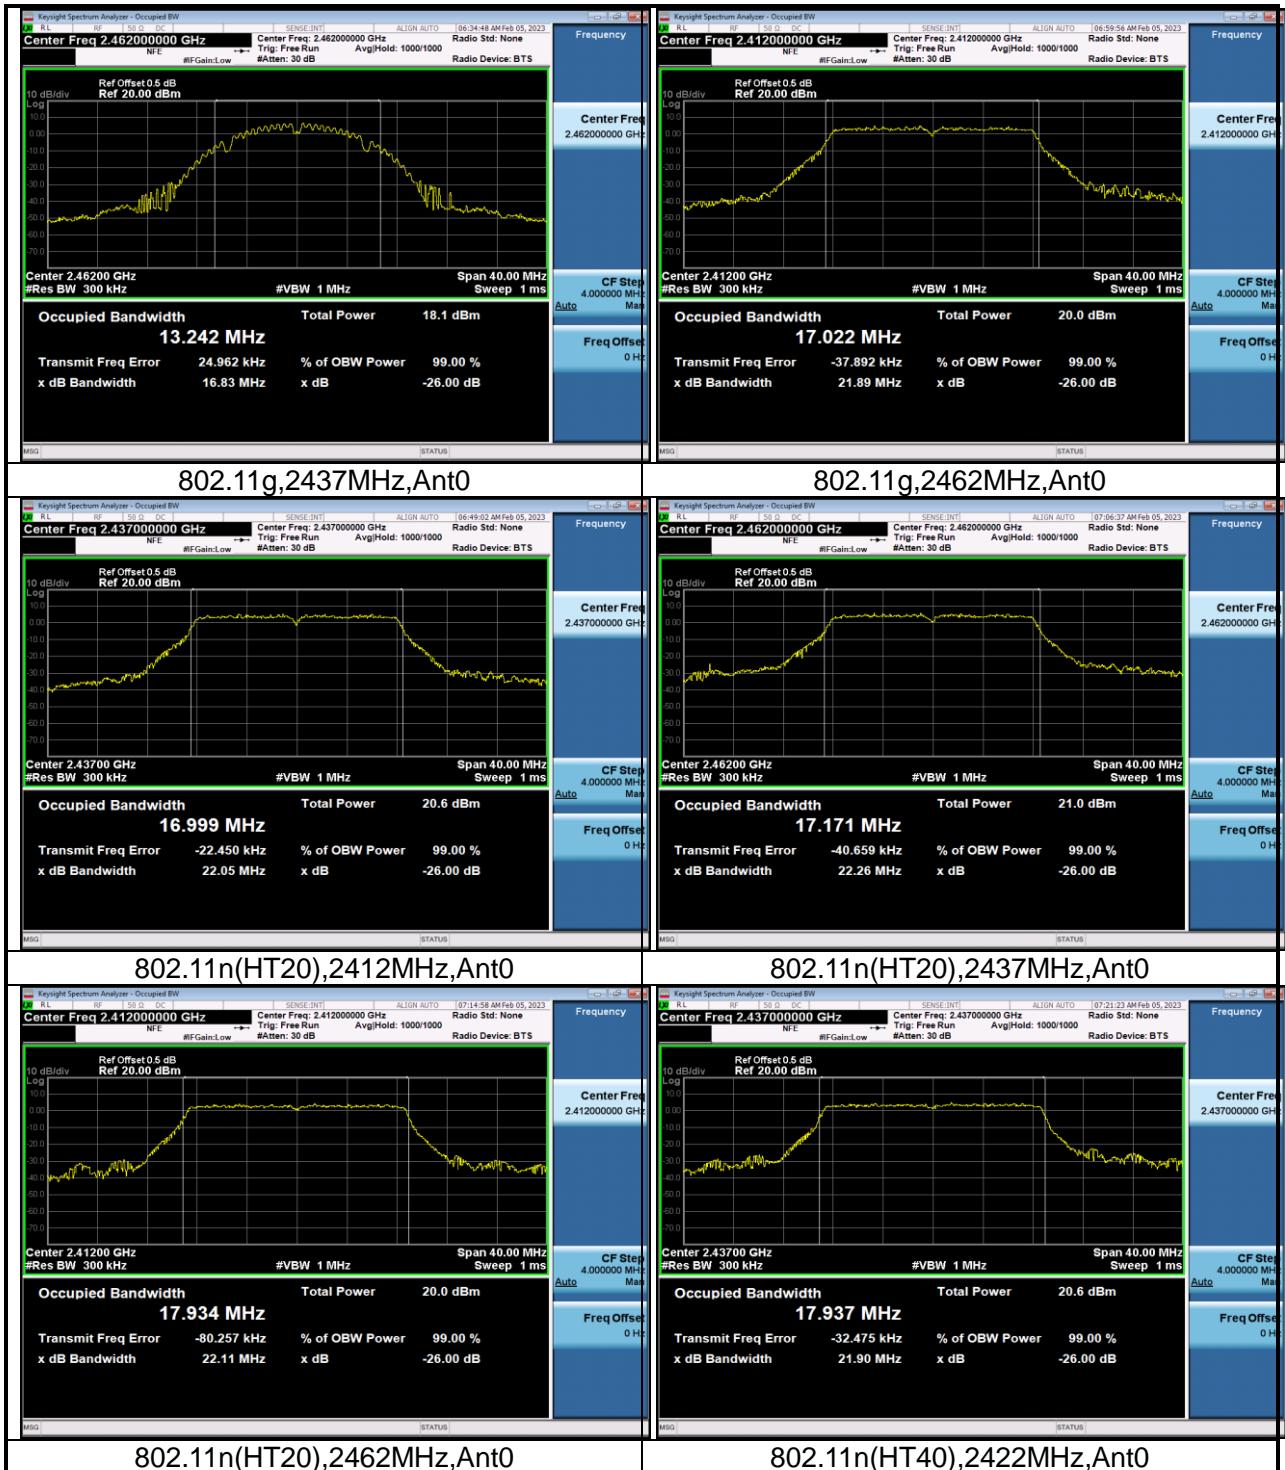

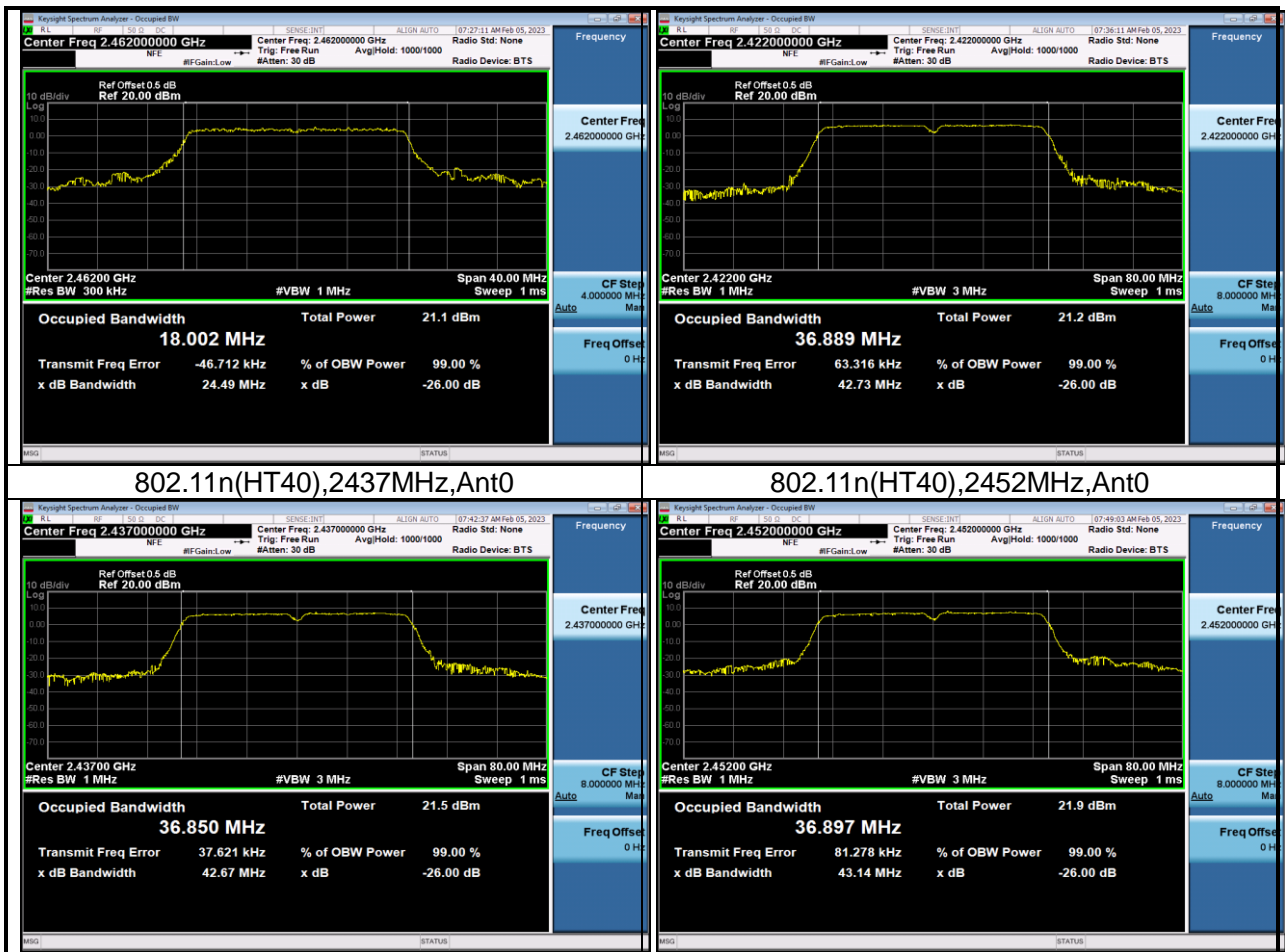

4. Power Spectral Density

4.1 Test Result and Data


WLAN PEAK Power Spectral Density						
Mode	Test Frequency (MHz)	Ant	PSD (dBm)	RBW (kHz)	Limit (dBm)	Result
802.11b	2412	Ant0	-5.003	3	8	Pass
802.11b	2437	Ant0	-8.169	3	8	Pass
802.11b	2462	Ant0	-8.228	3	8	Pass
802.11g	2412	Ant0	-11.476	3	8	Pass
802.11g	2437	Ant0	-10.849	3	8	Pass
802.11g	2462	Ant0	-10.292	3	8	Pass
802.11n (HT20)	2412	Ant0	-11.570	3	8	Pass
802.11n (HT20)	2437	Ant0	-10.853	3	8	Pass
802.11n (HT20)	2462	Ant0	-10.298	3	8	Pass

TEST REPORT

802.11n (HT40)	2422	Ant0	-14.335	3	8	Pass
802.11n (HT40)	2437	Ant0	-13.450	3	8	Pass
802.11n (HT40)	2452	Ant0	-13.006	3	8	Pass

4.2 Test Plots



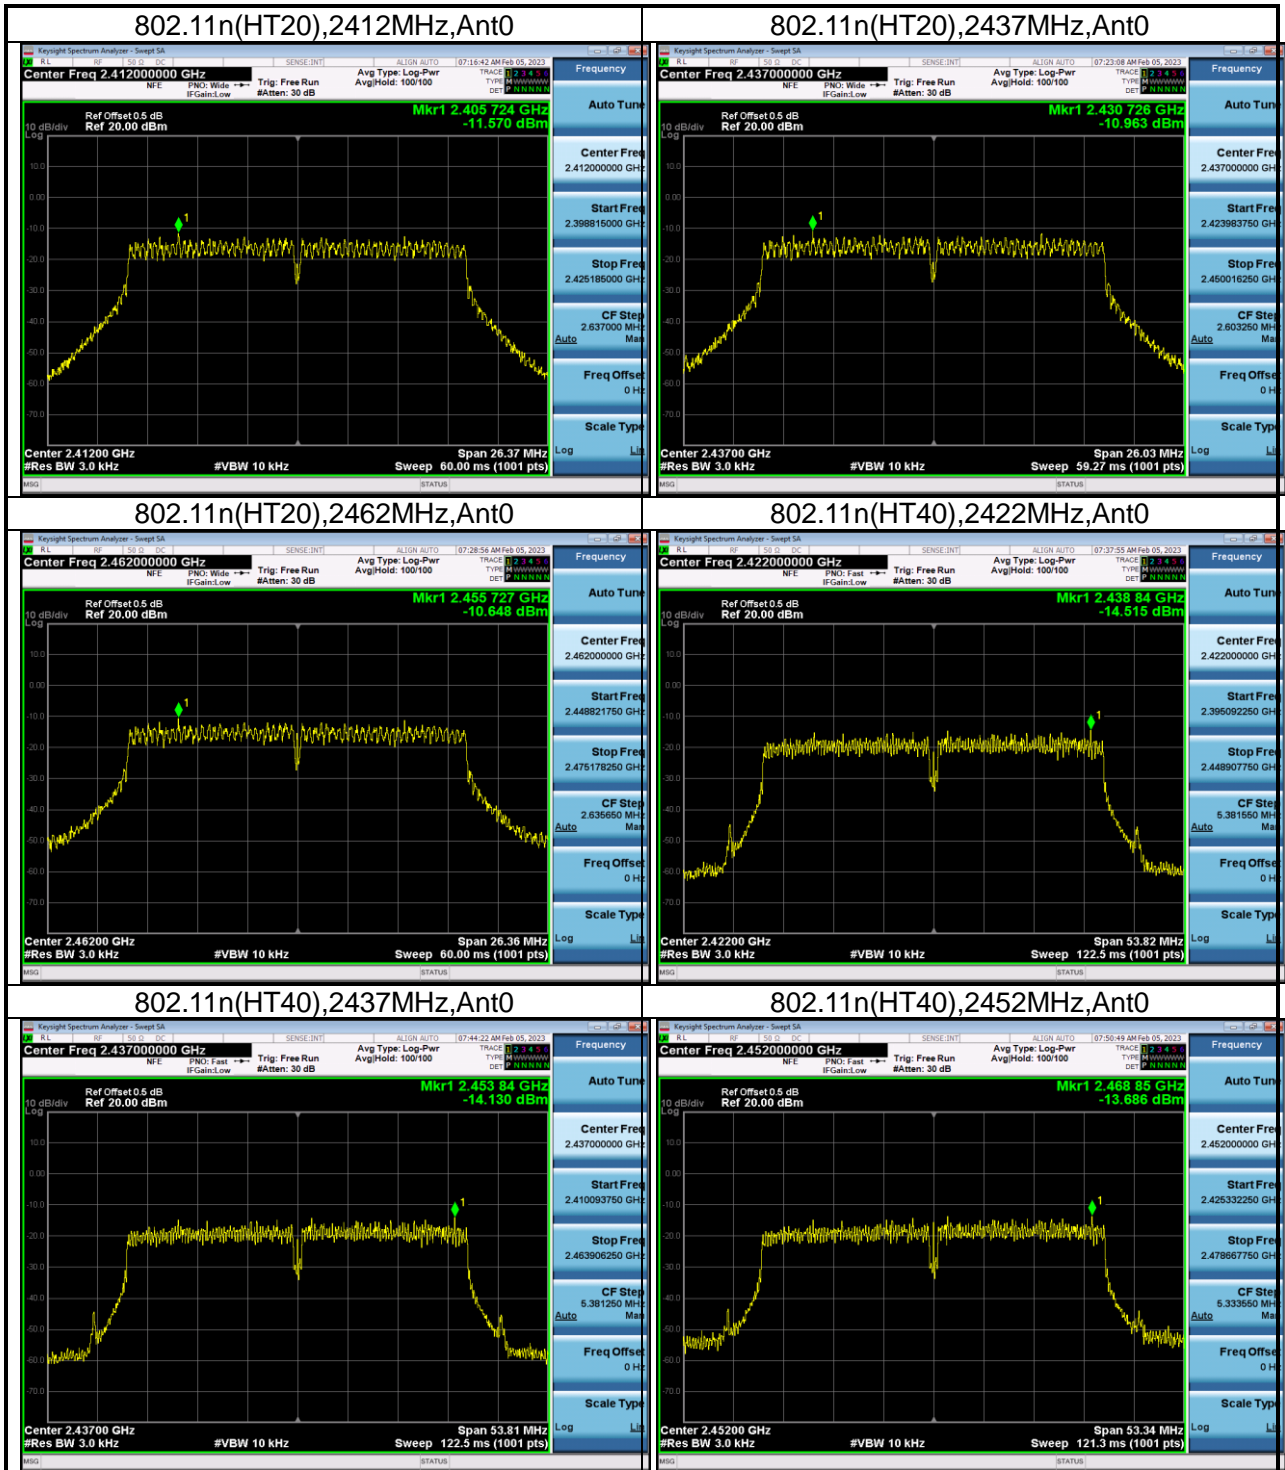

TEST REPORT

5. Emission outside the frequency band

5.1 Test Result and Data

WLAN Transmitter Spurious Emission						
Mode	Test Frequency (MHz)	Ant	Plot No.	Frequency Range	Emission (dBm)	Result
802.11b	2412	Ant0	1	Reference Level	7.70	Pass
802.11b	2412	Ant0	2	Band Edge	-46.25	Pass
802.11b	2412	Ant0	3	30MHz~2310MHz	-55.08	Pass
802.11b	2412	Ant0	4	2500MHz~5000MHz	-47.00	Pass
802.11b	2412	Ant0	5	5000MHz~25000MHz	-42.22	Pass
802.11b	2437	Ant0	1	Reference Level	5.35	Pass
802.11b	2437	Ant0	2	Band Edge	-55.86	Pass
802.11b	2437	Ant0	3	30MHz~2310MHz	-56.88	Pass
802.11b	2437	Ant0	4	2500MHz~5000MHz	-51.53	Pass
802.11b	2437	Ant0	5	5000MHz~25000MHz	-43.38	Pass
802.11b	2462	Ant0	1	Reference Level	5.48	Pass
802.11b	2462	Ant0	2	Band Edge	-55.21	Pass
802.11b	2462	Ant0	3	30MHz~2310MHz	-55.66	Pass
802.11b	2462	Ant0	4	2500MHz~5000MHz	-49.78	Pass
802.11b	2462	Ant0	5	5000MHz~25000MHz	-43.30	Pass
802.11g	2412	Ant0	1	Reference Level	1.55	Pass
802.11g	2412	Ant0	2	Band Edge	-36.51	Pass
802.11g	2412	Ant0	3	30MHz~2310MHz	-56.65	Pass
802.11g	2412	Ant0	4	2500MHz~5000MHz	-54.11	Pass
802.11g	2412	Ant0	5	5000MHz~25000MHz	-43.50	Pass
802.11g	2437	Ant0	1	Reference Level	2.21	Pass
802.11g	2437	Ant0	2	Band Edge	-54.75	Pass
802.11g	2437	Ant0	3	30MHz~2310MHz	-55.99	Pass
802.11g	2437	Ant0	4	2500MHz~5000MHz	-53.78	Pass
802.11g	2437	Ant0	5	5000MHz~25000MHz	-44.04	Pass
802.11g	2462	Ant0	1	Reference Level	2.30	Pass
802.11g	2462	Ant0	2	Band Edge	-38.95	Pass

TEST REPORT

802.11g	2462	Ant0	3	30MHz~2310MHz	-55.05	Pass
802.11g	2462	Ant0	4	2500MHz~5000MHz	-50.49	Pass
802.11g	2462	Ant0	5	5000MHz~25000MHz	-43.66	Pass
802.11n (HT20)	2412	Ant0	1	Reference Level	1.55	Pass
802.11n (HT20)	2412	Ant0	2	Band Edge	-36.35	Pass
802.11n (HT20)	2412	Ant0	3	30MHz~2310MHz	-55.33	Pass
802.11n (HT20)	2412	Ant0	4	2500MHz~5000MHz	-54.21	Pass
802.11n (HT20)	2412	Ant0	5	5000MHz~25000MHz	-43.40	Pass
802.11n (HT20)	2437	Ant0	1	Reference Level	1.96	Pass
802.11n (HT20)	2437	Ant0	2	Band Edge	-52.28	Pass
802.11n (HT20)	2437	Ant0	3	30MHz~2310MHz	-55.86	Pass
802.11n (HT20)	2437	Ant0	4	2500MHz~5000MHz	-53.34	Pass
802.11n (HT20)	2437	Ant0	5	5000MHz~25000MHz	-44.09	Pass
802.11n (HT20)	2462	Ant0	1	Reference Level	2.42	Pass
802.11n (HT20)	2462	Ant0	2	Band Edge	-34.87	Pass
802.11n (HT20)	2462	Ant0	3	30MHz~2310MHz	-54.46	Pass
802.11n (HT20)	2462	Ant0	4	2500MHz~5000MHz	-50.25	Pass
802.11n (HT20)	2462	Ant0	5	5000MHz~25000MHz	-43.44	Pass
802.11n (HT40)	2422	Ant0	1	Reference Level	-1.08	Pass
802.11n (HT40)	2422	Ant0	2	Band Edge	-36.30	Pass
802.11n (HT40)	2422	Ant0	3	30MHz~2310MHz	-56.11	Pass
802.11n (HT40)	2422	Ant0	4	2500MHz~5000MHz	-53.94	Pass
802.11n (HT40)	2422	Ant0	5	5000MHz~25000MHz	-43.82	Pass
802.11n (HT40)	2437	Ant0	1	Reference Level	-0.72	Pass
802.11n (HT40)	2437	Ant0	2	Band Edge	-44.93	Pass
802.11n (HT40)	2437	Ant0	3	30MHz~2310MHz	-56.55	Pass
802.11n (HT40)	2437	Ant0	4	2500MHz~5000MHz	-52.09	Pass

802.11n (HT40)	2437	Ant0	5	5000MHz~25000MHz	-43.66	Pass
802.11n (HT40)	2452	Ant0	1	Reference Level	-0.33	Pass
802.11n (HT40)	2452	Ant0	2	Band Edge	-35.72	Pass
802.11n (HT40)	2452	Ant0	3	30MHz~2310MHz	-54.58	Pass
802.11n (HT40)	2452	Ant0	4	2500MHz~5000MHz	-43.66	Pass
802.11n (HT40)	2452	Ant0	5	5000MHz~25000MHz	-43.70	Pass

5.2 Test plots

