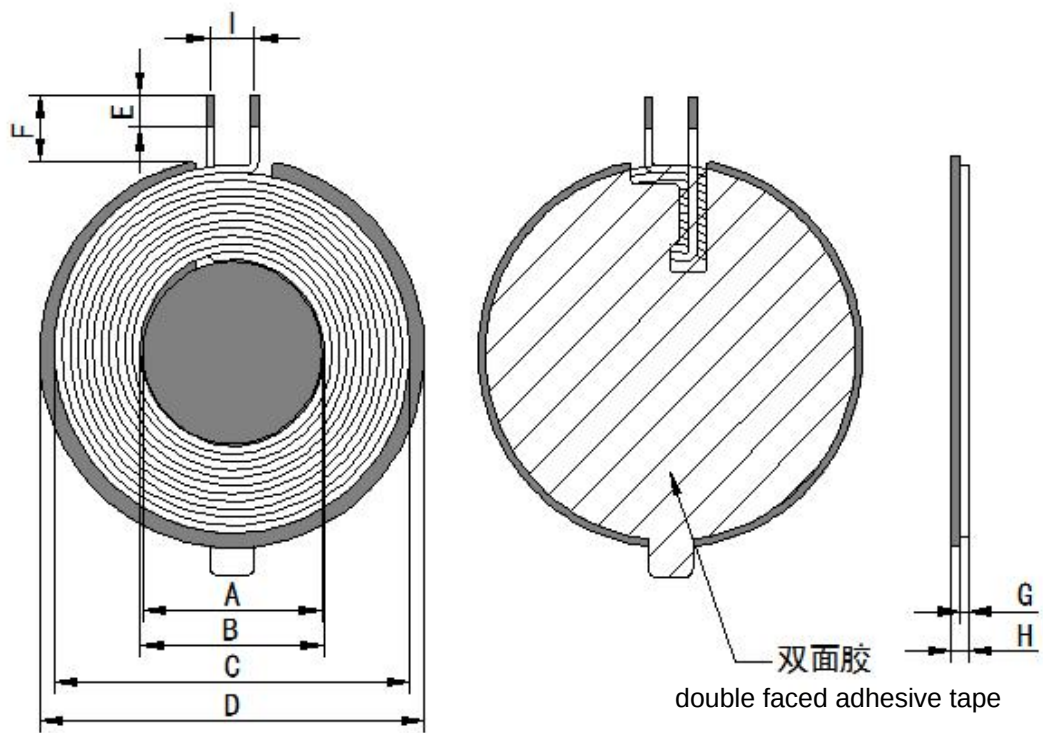

规格承认书

Specification for Approval

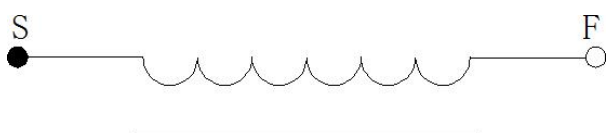
1. 尺寸规格 Dimension specification



单位(Unit):毫米(mm)

A	B	C	D	E	F
20+0.25/-1.2	20.5±0.5	39.6+0.3/-1.5	42.9±0.5	3+0.5/-1.5	7.3±1
G	H	I			
0.95±0.05	2.3MAX	5±1.5			
PS: (H)不含离型纸;					

2.原理图 Schematic diagram



3.电器特性 Electronic character

温度 TEMPERATURE:25±10℃,湿度 RELATIVE HUMIDITY :65±20%

项目 TIEM	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
IND	8.1UH±5%	100 KHZ/1.0V	HY23830
DCR	60 mΩ MAX	\	HY23830
Q 值	80 min	100 KHZ/1.0V	HY23830

4.线圈参数 Coil specification

圈数 Turns	线径 Wire Dia.	绕线方式 疏/密 Wdg. Type Spred/Close	绕线方向 Wdg.Direction	相交 是/否 Intersect Yes/Not	线圈 正/反贴 Coil Positive/Anti Paste
11TS	0.08*80P 热风绞线 (Stranded wire)	密绕 (Close)	逆时针 (Anticlockwise)	相交 (Yes)	反贴 (Anti-/Paste)

5.材料清单 Bill of Materials

材料名称 Material name	品名描述 Description	物料代码 Material Code
线材 wire rod	0.08*80P 热风绞线 Stranded wire	JX-2U-F-0025
铁氧体 ferrite	42.9±0.5*5.2±0.5*0.8±0.1H (带孔带槽) With holes and grooves	
圆形硬磁 Circular hard magnetic	20*0.8H (无孔无槽) No holes or grooves	
圆形双面胶 Circular double-sided tape	41.3*0.05H(无孔无槽单面背胶) Single side adhesive without hole and groove	SMJ-T-0078
圆形普通双面胶 Round plain double-sided tape	18*0.08H (无孔, 无槽带手撕) No hole, no groove with hand tear	SMJ-T-0010
胶水 glue	JS-E7202 (加稠) 白胶 (thickened) white glue	E7202W
锡条 tin bar	环保无铅焊锡条 Environmentally friendly lead-free solder bar	无铅高温锡条 Lead-free high temperature tin strip

。