



FCC Test Report

APPLICANT : Mundo Reader S.L.
EQUIPMENT : Mobile Phone
BRAND NAME : Suro, BQ
MODEL NAME : Carbon, Aquaris X3
FCC ID : 2AN87CARBON
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification

The product was received on Oct. 14, 2019 and testing was completed on Jan. 23, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1. GENERAL DESCRIPTION 5

 1.1. Applicant..... 5

 1.2. Manufacturer 5

 1.3. Product Feature of Equipment Under Test 5

 1.4. Product Specification of Equipment Under Test 6

 1.5. Modification of EUT 7

 1.6. Test Location 8

 1.7. Test Software 8

 1.8. Applicable Standards 8

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9

 2.1. Test Mode 9

 2.2. Connection Diagram of Test System 11

 2.3. Support Unit used in test configuration and system 12

 2.4. EUT Operation Test Setup 13

3. TEST RESULT 14

 3.1. Test of AC Conducted Emission Measurement 14

 3.2. Test of Radiated Emission Measurement 18

4. LIST OF MEASURING EQUIPMENT 23

5. UNCERTAINTY OF EVALUATION 24

APPENDIX A. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC9O1409	Rev. 01	Initial issue of report	Mar. 06, 2020



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 4.37 dB at 13.560 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 3.86 dB at 36.790 MHz for Quasi-Peak

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1. General Description

1.1. Applicant

Mundo READER S.L.

Calle Sofia, 10, Parque Industrial y Tecnológico 28232 Las Rozas Europolis, Madrid, Spain

1.2. Manufacturer

Mundo Reader S.L.

Calle Sofia, 10, Parque Industrial y Tecnológico 28232 Las Rozas Europolis, Madrid, Spain

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Suro, BQ
Model Name	Carbon, Aquaris X3
FCC ID	2AN87CARBON
EUT supports Radios application	GSM/WCDMA/LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40 Bluetooth BR/EDR/LE FM Receiver/GNSS
IMEI Code	Conduction/Radiation: 355379058091132/955379058096636 for Sample 1 355379058094631/355379058100131 for Sample 2
HW Version	1.A.1
SW Version	1.2.0_20200211-1558
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 12 : 699.7 MHz ~ 715.3 MHz LTE Band 13 : 779.5 MHz ~ 784.5 MHz LTE Band 17 : 706.5 MHz ~ 713.5 MHz LTE Band 26 : 814.7 MHz ~ 848.3 MHz LTE Band 38 : 2572.5 MHz ~ 2617.5 MHz LTE Band 41 : 2537.5 MHz ~ 2652.5 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5700 MHz 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5 MHz ~ 2687.5 MHz LTE Band 12 : 729.7 MHz ~ 745.3 MHz LTE Band 13 : 748.5 MHz ~ 753.5 MHz LTE Band 17 : 736.5 MHz ~ 743.5 MHz LTE Band 26 : 859.7 MHz ~ 893.3 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz LTE Band 41 : 2537.5 MHz ~ 2652.5 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5700 MHz 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz GNSS : 1559 MHz ~ 1610 MHz NFC : 13.56 MHz FM: 88MHz~108MHz
Antenna Type	WWAN : PIFA Antenna WLAN : PIFA Antenna Bluetooth : PIFA Antenna GNSS: PIFA Antenna NFC : Loop Antenna



	FM: External Handset Antenna
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK (Uplink) HSDPA/DC-HSDPA : QPSK (Uplink) HSUPA : QPSK (Uplink) HSPA+ : 16QAM (Uplink) DC-HSDPA : 64QAM LTE: QPSK / 16QAM / 64QAM (Downlink only) 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK NFC: ASK FM

GNSS = BDS + Galileo + GLONASS + GPS

1.5. Modification of EUT

No modifications are made to the EUT during all test items.



1.6. Test Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH02-KS TH01-KS	CN1257	314309

1.7. Test Software

Item	Site	Manufacture	Name	Version
1.	03CH02-KS	AUDIX	E3	6.2009-8-24a
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart B
- ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2. Test Configuration of Equipment Under Test

2.1. Test Mode


The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM 850(L) Idle + Earphone + USB Cable 1(Charging from Adapter1) + BT Idle + WLAN Idle(2.4G) + Camera(Rear) + SIM 1 for Sample 1
	Mode 2: PCS 1900 Idle + Earphone + USB Cable 2(Charging from Adapter2) + BT Idle + WLAN Idle(5G) + Camera(Front) + SIM 2 for Sample 1
	Mode 3: LTE Band 12(M) Idle + Earphone + USB Cable 1(Charging from Adapter1) + BT Idle + WLAN Idle(2.4G) + MP4 + SIM 1 for Sample 1
	Mode 4: LTE Band 13(L) Idle + Earphone + USB Cable 1(Charging from Adapter1) + BT Idle + WLAN Idle(5G) + FM Rx(98Mhz) + SIM 2 for Sample 1
	Mode 5: LTE Band 17(H) Idle + Earphone + USB Cable 1(Charging from Adapter1) + BT Idle + WLAN Idle(2.4G) + NFC On + SIM 1 for Sample 1
	Mode 6: LTE Band 26(H) Idle + Earphone + USB Cable 1(Data Link with Notebook) + BT Idle + WLAN Idle(5G) + GNSS RX + SIM 2 for Sample 1
	Mode 7: LTE Band 7 Idle + Earphone + USB Cable 2(Data Link with Notebook) + BT Idle + WLAN Idle(2.4G) + GNSS RX + SIM 1 for Sample 1
	Mode 8: LTE Band 2 Idle + Earphone + USB Cable 1(Charging from Adapter1) + BT Idle + WLAN Idle(2.4G) + NFC On + SIM 1 for Sample 2

Radiated Emissions	<p>Mode 1: GSM 850(L) Idle + Earphone + USB Cable 1(Charging from Adapter1) + BT Idle + WLAN Idle(2.4G) + Camera(Rear) + SIM 1 for Sample 1</p> <p>Mode 2: PCS 1900 Idle + Earphone + USB Cable 2(Charging from Adapter2) + BT Idle + WLAN Idle(5G) + Camera(Front) + SIM 2 for Sample 1</p> <p>Mode 3: LTE Band 12(M) Idle + Earphone + USB Cable 1(Charging from Adapter1) + BT Idle + WLAN Idle(2.4G) + MP4 + SIM 1 for Sample 1</p> <p>Mode 4: LTE Band 13(L) Idle + Earphone + USB Cable 1(Charging from Adapter1) + BT Idle + WLAN Idle(5G) + FM Rx(88Mhz) + SIM 2 for Sample 1</p> <p>Mode 5: LTE Band 17(H) Idle + Earphone + USB Cable 1(Charging from Adapter1) + BT Idle + WLAN Idle(2.4G) + NFC On + SIM 1 for Sample 1</p> <p>Mode 6: LTE Band 26(H) Idle + Earphone + USB Cable 1(Data Link with Notebook) + BT Idle + WLAN Idle(5G) + GNSS RX + SIM 2 for Sample 1</p> <p>Mode 7: LTE Band 7 Idle + Earphone + USB Cable 2(Data Link with Notebook) + BT Idle + WLAN Idle(2.4G) + GNSS RX + SIM 1 for Sample 1</p> <p>Mode 8: LTE Band 7 Idle + Earphone + USB Cable 1(Charging from Adapter1) + BT Idle + WLAN Idle(2.4G) + Camera(Rear) + SIM 1 for Sample 2</p>
<p>Remark:</p> <ol style="list-style-type: none"> 1. The worst case of AC is mode 5; only the test data of this mode is reported. 2. The worst case of RE is mode 8; only the test data of this mode is reported. 3. Data Link with Notebook / PC means data application transferred mode between EUT and Notebook / PC. 4. Pre-scanned Low/Middle/High channel for GSM 850/WCDMA Band V/LTE Band 5/12/13/17/26 and FM Rx, the worst channel was recorded in this report. 5. Sample 1 is 1st source LCD panel, Sample 2 is 2nd source LCD panel, the others are the same. 	

2.2.Connection Diagram of Test System

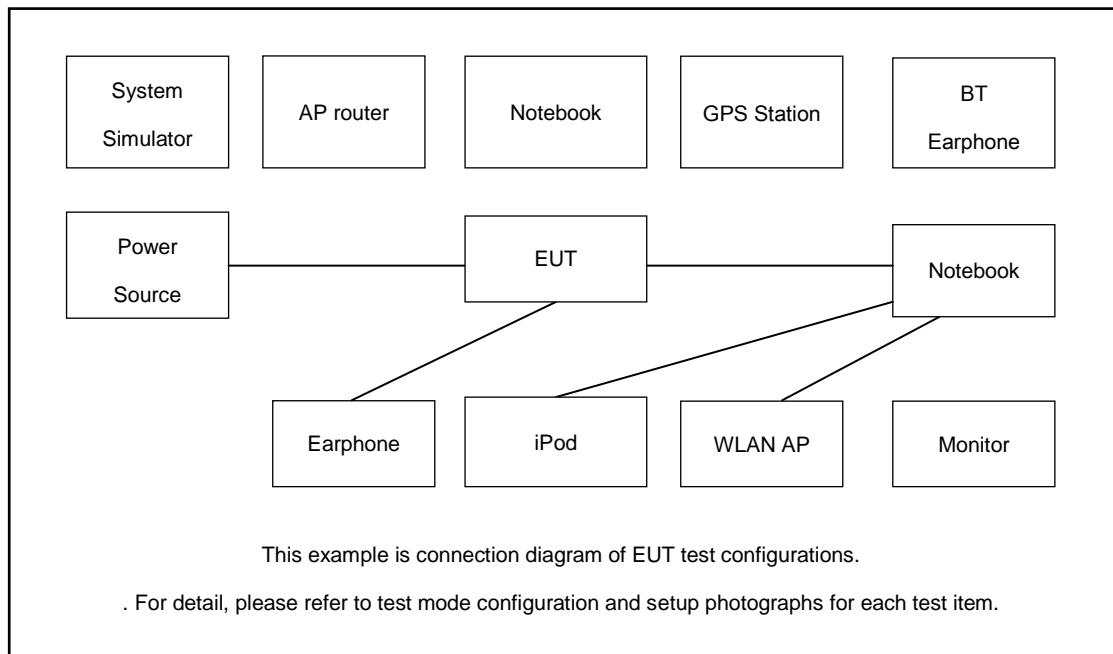

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
3.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
4.	Notebook	Lenovo	YOGA S730-131WL	N/A	N/A	Unshielded,1.8m
5.	Notebook	Lenovo	V130-141KB001	N/A	N/A	Unshielded,1.8m
6.	Earphone	N/A	N/A	N/A	N/A	Unshielded,1.2m
7.	Base Station	R&S	CMU 200	N/A	N/A	Unshielded,1.8m
8.	WLAN AP	TP-Link	TL-WDR5600	N/A	N/A	Unshielded,1.8m
9.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
10.	Hard disk	Lenovo	FH310	Fcc DoC	Shielded, 1.2m	N/A
11.	Hard Disk	Lenovo	F310	DoC	Shielded, 1.2m	N/A
12.	SD Card	Kingston	8GB	N/A	N/A	N/A
13.	SD Card	SanDisk	Uitra	N/A	N/A	N/A
14.	Bluetooth Earphone	Xiaomi	LYEJ02LM	N/A	N/A	N/A
15.	Signal Generator	R&S	SMBV100A	N/A	N/A	Unshielded,1.8m
16.	Vector Signal Generator	R&S	SMBV100A	258305	N/A	N/A
17.	Adapter 1(Type C)	N/A	N/A	N/A	N/A	N/A
18.	Adapter 2(Type A)	N/A	N/A	N/A	N/A	N/A



2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on NFC Function.
4. Turn on MPEG4 function.
5. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.

3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.1.4 Test Setup





3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

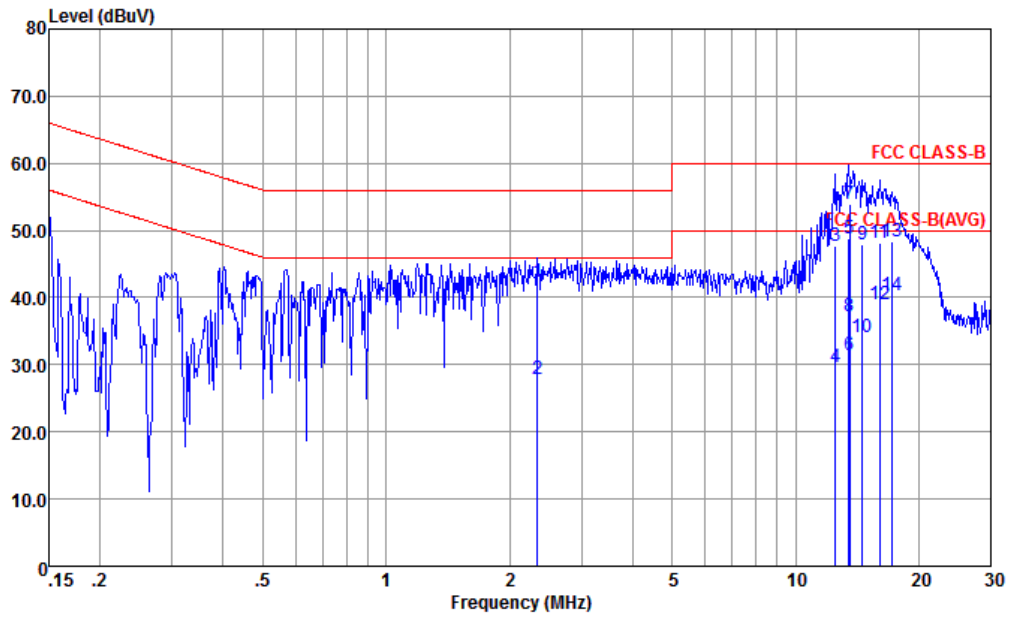


Site : CO01-KS
 Condition : FCC CLASS-B LISN-L-191028-060105 LINE
 Project : (FC) 901409
 mode : Mode 5
 : 955379058091132/955379058096636 #13

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	2.346	42.25	-13.75	56.00	31.90	0.12	10.23	QP
2	2.346	27.85	-18.15	46.00	17.50	0.12	10.23	Average
3	12.516	47.79	-12.21	60.00	37.10	0.32	10.37	QP
4	12.516	29.59	-20.41	50.00	18.90	0.32	10.37	Average
5	13.479	48.82	-11.18	60.00	38.10	0.34	10.38	QP
6	13.479	31.32	-18.68	50.00	20.60	0.34	10.38	Average
7 *	13.560	54.03	-5.97	60.00	43.31	0.34	10.38	QP
8	13.560	37.13	-12.87	50.00	26.41	0.34	10.38	Average
9	14.594	47.86	-12.14	60.00	37.10	0.37	10.39	QP
10	14.594	34.06	-15.94	50.00	23.30	0.37	10.39	Average
11	16.055	48.16	-11.84	60.00	37.30	0.44	10.42	QP
12	16.055	39.06	-10.94	50.00	28.20	0.44	10.42	Average
13	17.199	48.44	-11.56	60.00	37.50	0.50	10.44	QP
14	17.199	40.24	-9.76	50.00	29.30	0.50	10.44	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

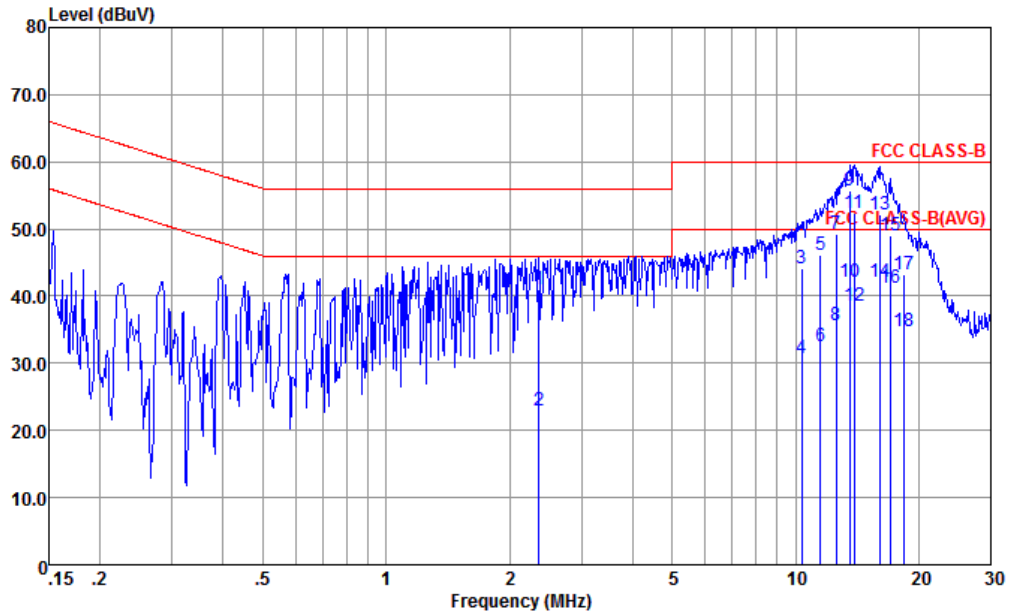

Site : CO01-KS
 Condition : FCC CLASS-B LISN-N-191028-060105 NEUTRAL
 Project : (FC) 901409
 mode : Mode 5
 : 955379058091132/955379058096636 #13

Freq	Level	Over	Limit	Read	LISN	Cable	Remark
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	2.358	40.97	-15.03	56.00	30.60	0.14	10.23 QP
2	2.358	22.87	-23.13	46.00	12.50	0.14	10.23 Average
3	10.342	44.21	-15.79	60.00	33.60	0.26	10.35 QP
4	10.342	30.71	-19.29	50.00	20.10	0.26	10.35 Average
5	11.498	46.15	-13.85	60.00	35.50	0.29	10.36 QP
6	11.498	32.55	-17.45	50.00	21.90	0.29	10.36 Average
7	12.582	49.20	-10.80	60.00	38.51	0.32	10.37 QP
8	12.582	35.60	-14.40	50.00	24.91	0.32	10.37 Average
9 *	13.560	55.63	-4.37	60.00	44.90	0.35	10.38 QP
10	13.560	42.03	-7.97	50.00	31.30	0.35	10.38 Average
11	13.915	52.34	-7.66	60.00	41.60	0.35	10.39 QP
12	13.915	38.64	-11.36	50.00	27.90	0.35	10.39 Average
13	16.055	52.06	-7.94	60.00	41.20	0.44	10.42 QP
14	16.055	42.06	-7.94	50.00	31.20	0.44	10.42 Average
15	17.018	49.13	-10.87	60.00	38.20	0.49	10.44 QP
16	17.018	41.13	-8.87	50.00	30.20	0.49	10.44 Average
17	18.426	43.22	-16.78	60.00	32.19	0.56	10.47 QP
18	18.426	34.82	-15.18	50.00	23.79	0.56	10.47 Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz




For radiated emissions above 1GHz

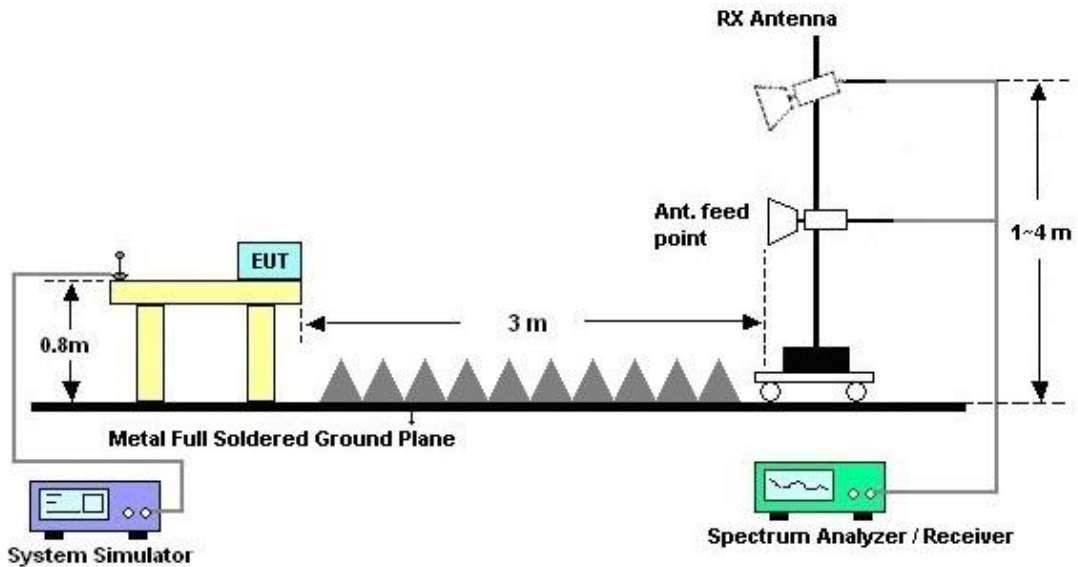



3.2.5. Test Result of Radiated Emission

Test Engineer :	Jack Guo	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#7 is system simulator signal which can be ignored.		

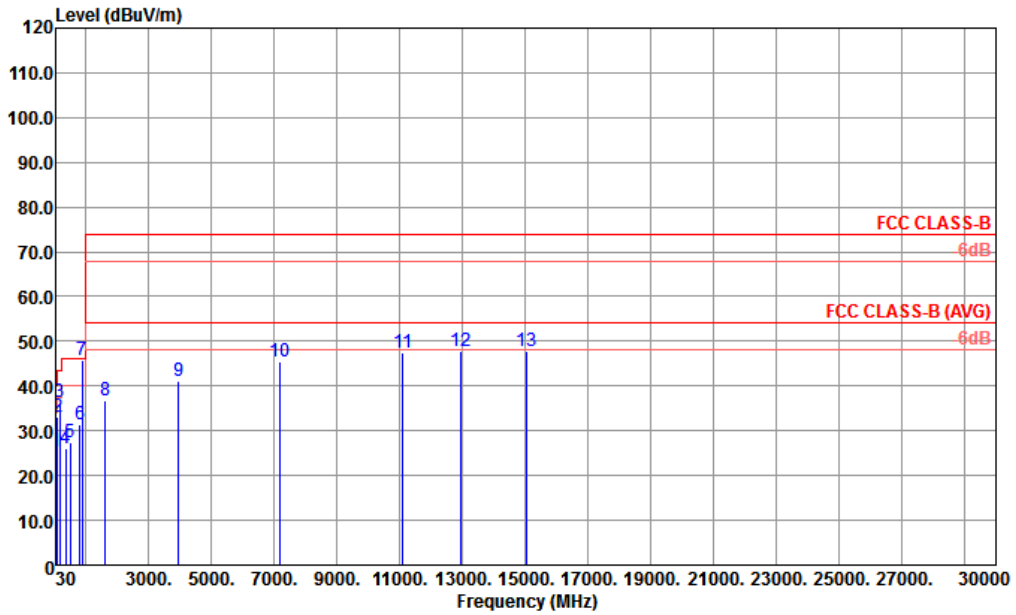


Site : 03CH02-KS
 Condition : FCC CLASS-B 3m LF 49922-3M HORIZONTAL
 Project : (FC)901409
 Mode : 8
 IMEI : 355379058094631 355379058100131 #36
 battery : 5%
 : from mode 1

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	36.790	25.26	-14.74	40.00	35.36	21.14	0.72	31.96	---	---	Peak
2	94.020	33.17	-10.33	43.50	48.50	15.48	1.12	31.93	---	---	Peak
3	170.650	36.54	-6.96	43.50	50.60	16.34	1.52	31.92	100	0	Peak
4	346.220	26.07	-19.93	46.00	35.55	20.50	2.09	32.07	---	---	Peak
5	495.600	27.55	-18.45	46.00	33.26	24.00	2.55	32.26	---	---	Peak
6	806.970	31.30	-14.70	46.00	31.74	28.35	3.28	32.07	---	---	Peak
7 !	869.050	45.87			44.88	29.26	3.39	31.66	---	---	Peak
8	1624.000	36.66	-37.34	74.00	38.14	27.86	4.57	33.91	---	---	Peak
9	3960.000	41.27	-32.73	74.00	31.40	34.41	7.44	31.98	---	---	Peak
10	7192.000	45.56	-28.44	74.00	30.70	36.28	10.09	31.51	---	---	Peak
11	11088.000	47.45	-26.55	74.00	27.91	38.38	13.42	32.26	---	---	Peak
12	12951.000	47.63	-26.37	74.00	26.15	38.93	14.34	31.79	---	---	Peak
13	15030.000	47.85	-26.15	74.00	24.49	39.52	15.63	31.79	---	---	Peak



Test Engineer :	Jack Guo	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Remark :	#6 is system simulator signal which can be ignored.		

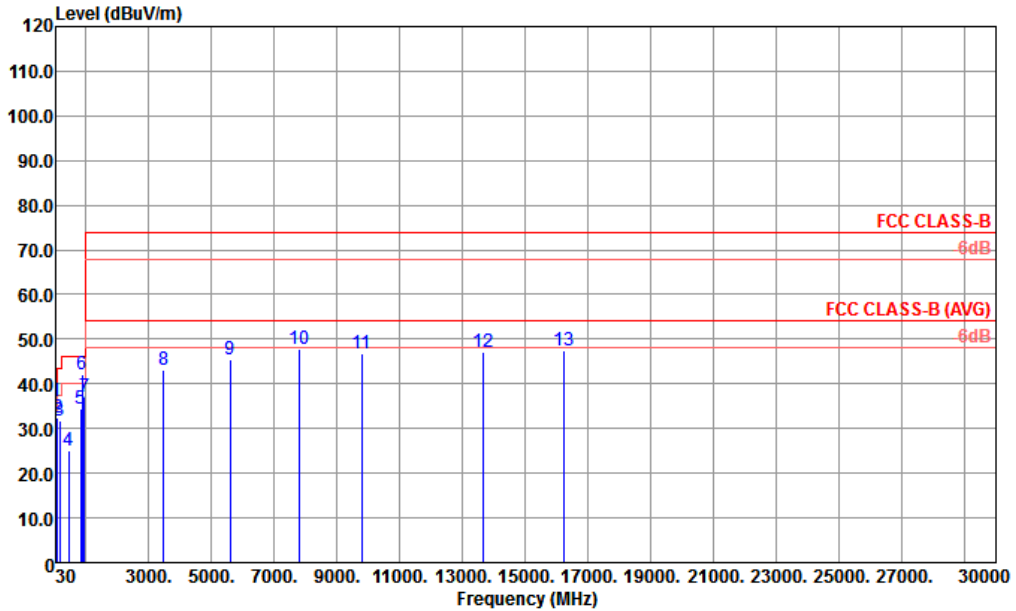

Site : 03CH02-KS
 Condition : FCC CLASS-B 3m LF 49922-3M VERTICAL
 Project : (FC)901409
 Mode : 8
 IMEI : 355379058094631 355379058100131 #36
 battery : 5%
 : from mode 1

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	cm	deg	
1 !	36.790	36.14	-3.86	40.00	46.24	21.14	0.72	31.96	100	250 QP
2	94.990	32.28	-11.22	43.50	47.48	15.60	1.13	31.93	---	Peak
3	156.100	31.63	-11.87	43.50	45.16	16.95	1.46	31.94	---	Peak
4	442.250	25.06	-20.94	46.00	31.98	22.92	2.36	32.20	---	Peak
5	821.520	34.33	-11.67	46.00	34.33	28.67	3.31	31.98	---	Peak
6 !	869.050	42.01			41.02	29.26	3.39	31.66	---	Peak
7	948.590	36.95	-9.05	46.00	33.53	30.87	3.55	31.00	---	Peak
8	3472.000	43.05	-30.95	74.00	34.09	34.04	6.91	31.99	---	Peak
9	5600.000	45.39	-28.61	74.00	32.27	35.18	8.94	31.00	---	Peak
10	7792.000	47.65	-26.35	74.00	32.55	36.28	10.84	32.02	---	Peak
11	9774.000	46.74	-27.26	74.00	27.94	37.80	12.33	31.33	---	Peak
12	13671.000	47.19	-26.81	74.00	24.86	38.83	15.17	31.67	---	Peak
13	16218.000	47.57	-26.43	74.00	21.97	40.52	16.81	31.73	---	Peak

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 16, 2019	Jan. 23, 2020	Apr. 15, 2020	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 18, 2019	Jan. 23, 2020	Oct. 17, 2020	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Oct. 28, 2019	Jan. 23, 2020	Oct. 27, 2020	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	AC 0V~300V, 45Hz~1000Hz	Oct. 18, 2019	Jan. 23, 2020	Oct. 17, 2020	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Ma x 30dBm	Oct. 18, 2019	Dec. 28, 2019	Oct. 17,2020	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz-44G,MAX 30dB	Apr.15, 2019	Dec. 28, 2019	Apr. 16, 2020	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	May 30, 2019	Dec. 28, 2019	May 29, 2020	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Jan. 27, 2019	Dec. 28, 2019	Jan. 26, 2020	Radiation (03CH02-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2019	Dec. 28, 2019	Jan. 04, 2020	Radiation (03CH02-KS)
Amplifier	MITEQ	TTA1840-35-H G	1887435	18~40GHz	Feb. 08, 2019	Dec. 28, 2019	Feb. 07, 2020	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Aug. 06, 2019	Dec. 28, 2019	Aug. 05, 2020	Radiation (03CH02-KS)
Amplifier	Keysight	83017A	MY57280106	500MHz~26.5G Hz	Apr. 15, 2019	Dec. 28, 2019	Apr. 14, 2020	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	61601000247 3	N/A	NCR	Dec. 28, 2019	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Dec. 28, 2019	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Dec. 28, 2019	NCR	Radiation (03CH02-KS)

NCR: No Calibration Required



5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
---	--------