

TEST REPORT

Reference No. : WTS17S0990532-1E V1
FCC ID : 2AN97-DF-M3
Applicant : Shen Zhen Top-Peak Electronics Co., Ltd.
Address : 103 Huayuan Technology Park Block D, Xixiang, Baoan, Shenzhen, China
Manufacturer : The same as above
Address : The same as above
Product : Robomb
Model(s) : DF-M3
Brand Name : SINOCHIP
Standards : FCC CFR47 Part 15.247: 2017
Date of Receipt sample : 2017-10-14
Date of Test : 2017-12-12 to 2017-12-25
Date of Issue : 2018-1-25
Test Result : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China
Tel :+86-755-83551033
Fax:+86-755-83552400

Compiled by:

Ford Wang

Ford Wang / Project Engineer

Approved by:



Philo Zhong / Manager

2 Laboratories Introduction

Waltek Services (Shenzhen) Co., Ltd is a professional third-party testing and certification laboratory with multi-year product testing and certification experience, established strictly in accordance with ISO/IEC 17025 requirements, and accredited by ILAC (International Laboratory Accreditation Cooperation) member. A2LA (American Association for Laboratory Accreditation) of USA, Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC(The Federal Communications Commission), CEC(California energy efficiency), IC(Industry Canada). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as Intertek(ETL-SEMKO), TÜV Rheinland, TÜV SÜD, etc.



Waltek Services (Shenzhen) Co., Ltd is one of the largest and the most comprehensive third party testing laboratory in China. Our test capability covered four large fields: safety test, Electro Magnetic Compatibility (EMC), and energy performance, wireless radio. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

Test Facility:**A. Accreditations for Conformity Assessment (International)**

Country/Region	Accreditation Body	Scope	Note
USA	A2LA (Certificate No.: 4243.01)	FCC ID \ DOC \ VOC	1
Canada		IC ID \ VOC	2
Japan		MIC-T \ MIC-R	-
Europe		EMCD \ RED	-
Taiwan		NCC	-
Hong Kong		OFCA	-
Australia		RCM	-
India	International Services	WPC	-
Thailand		NTC	-
Singapore		IDA	-

Note:

1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476.
2. IC Canada Registration No.: 7760A

B. TCBs and Notify Bodies Recognized Testing Laboratory.

Recognized Testing Laboratory of ...	Notify body number
TUV Rheinland	Optional.
Intertek	
TUV SUD	
SGS	
Phoenix Testlab GmbH	0700
Element Materials Technology Warwick Ltd	0891
Timco Engineering, Inc.	1177
Eurofins Product Service GmbH	0681

3 Contents

	Page
1 COVER PAGE.....	1
2 LABORATORIES INTRODUCTION.....	2
3 CONTENTS	4
4 REVISION HISTORY	6
5 GENERAL INFORMATION.....	7
5.1 GENERAL DESCRIPTION OF E.U.T	7
5.2 DETAILS OF E.U.T.	7
5.3 CHANNEL LIST	8
5.4 TEST MODE	8
6 TEST SUMMARY	9
7 EQUIPMENT USED DURING TEST	10
7.1 EQUIPMENTS LIST	10
7.2 DESCRIPTION OF SUPPORT UNITS	11
7.3 MEASUREMENT UNCERTAINTY	11
7.4 TEST EQUIPMENT CALIBRATION	11
8 CONDUCTED EMISSION	12
8.1 E.U.T. OPERATION	12
8.2 EUT SETUP.....	12
8.3 MEASUREMENT DESCRIPTION	12
8.4 CONDUCTED EMISSION TEST RESULT	12
9 RADIATED SPURIOUS EMISSIONS.....	13
9.1 EUT OPERATION.....	13
9.2 TEST SETUP	14
9.3 SPECTRUM ANALYZER SETUP	15
9.4 TEST PROCEDURE	16
9.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	16
9.6 SUMMARY OF TEST RESULTS	17
10 CONDUCTED SPURIOUS EMISSIONS.....	20
10.1 TEST PROCEDURE.....	20
10.2 TEST RESULT	21
11 BAND EDGE MEASUREMENT	24
11.1 TEST PROCEDURE.....	24
11.2 TEST RESULT	25
12 20 DB BANDWIDTH MEASUREMENT	27
12.1 TEST PROCEDURE.....	27
12.2 TEST RESULT	27
13 MAXIMUM PEAK OUTPUT POWER	29
13.1 TEST PROCEDURE.....	29
13.2 TEST RESULT	29
14 HOPPING CHANNEL SEPARATION	32
14.1 TEST PROCEDURE.....	32
14.2 TEST RESULT	32
15 NUMBER OF HOPPING FREQUENCY.....	35

15.1	TEST PROCEDURE.....	35
15.2	TEST RESULT	35
16	DWELL TIME	36
16.1	TEST PROCEDURE.....	36
16.2	TEST RESULT	36
17	ANTENNA REQUIREMENT	39
18	PHOTOGRAPHS OF TEST SETUP AND EUT.....	40
18.1	SETUP PHOTO MODEL DF-M3 FCC ID: 2AN97-DF-M3	40
18.2	EUT – EXTERNAL VIEW MODEL DF-M3 FCC ID: 2AN97-DF-M3.....	41
18.3	EUT – INTERNAL VIEW MODEL DF-M3 FCC ID: 2AN97-DF-M3	44

4 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS17S09905 32-1E	2017-10-14	2017-12-12 to 2017-12- 25	2017-12-26	original	-	Replaced
WTS17S09905 32-1E V1	2017-10-14	2017-12-12 to 2017-12- 25	2018-1-25	Version 1	Updated	Vaild

5 General Information

5.1 General Description of E.U.T.

Product: Robomb
Model(s): DF-M3
Model Description: N/A
Hardware Version: HT-F802/F803
Software Version: F803 v3.0

5.2 Details of E.U.T.

Operation Frequency: 2420~2475MHz
Max. RF output power: -3.11dBm
Type of Modulation: GFSK
Antenna installation: internal permanent antenna
Antenna Gain: 4.0dBi
Ratings: Battery 1.5A*4

5.3 Channel List

Normal

Channel No.	Frequency (MHz)						
0	2420	1	2421	2	2422	3	2423
4	2424	5	2425	6	2426	7	2427
8	2428	9	2429	10	2430	11	2431
12	2432	13	2433	14	2434	15	2435
16	2436	17	2437	18	2438	19	2439
20	2440	21	2441	22	2442	23	2443
24	2444	25	2445	26	2446	27	2447
28	2448	29	2449	30	2450	31	2451
32	2452	33	2453	34	2454	35	2455
36	2456	37	2457	38	2458	39	2459
40	2460	41	2461	42	2462	43	2463
44	2464	45	2465	46	2466	47	2467
48	2468	49	2469	50	2470	51	2471
52	2472	53	2473	54	2474	55	2475

5.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests; the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting	2420MHz	2445MHz	2475MHz

6 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious emissions	15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
Conducted Emission	15.207	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Antenna Requirement	15.203	Complies

7 Equipment Used during Test

7.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2017-09-12	2018-09-11
2.	LISN	R&S	ENV216	101215	2017-09-12	2018-09-11
3.	Cable	Top	TYPE16(3.5M)	-	2017-09-12	2018-09-11
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2017-09-12	2018-09-11
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	2017-09-12	2018-09-11
3.	Limiter	York	MTS-IMP-136	261115-001-0024	2017-09-12	2018-09-11
4.	Cable	LARGE	RF300	-	2017-09-12	2018-09-11
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	2017-04-29	2018-04-28
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	2017-04-09	2018-04-08
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2017-04-09	2018-04-08
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2017-09-12	2018-09-11
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2017-04-09	2018-04-08
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2017-04-09	2018-04-08
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2017-04-13	2018-04-12
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	2017-04-13	2018-04-12
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2017-04-13	2018-04-12
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2017-04-09	2018-04-08
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	2017-04-13	2018-04-12
4	Cable	HUBER+SUHNER	CBL2	525178	2017-04-13	2018-04-12

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2017-09-12	2018-09-11
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2017-09-12	2018-09-11
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2017-09-12	2018-09-11

7.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

7.3 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	± 3.64 dB(AC mains 150KHz~30MHz)
Radiated Spurious Emissions	± 5.08 dB (Bilog antenna 30M~1000MHz) ± 4.99 dB (Horn antenna 1000M~25000MHz)
Radio Frequency	± 1 x 10 ⁻⁷ Hz
RF Power	± 0.42 dB
Dwell time	1.0%
Conducted Spurious Emissions	± 2.76 dB (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor:k=2	

7.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

8 Conducted Emission

Test Requirement: FCC CFR 47 Part 15 Section 15.207

Test Method: ANSI C63.10:2013

Test Result: PASS

Frequency Range: 150kHz to 30MHz

Class/Severity:

Limit:

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

8.1 E.U.T. Operation

Operating Environment :

Temperature: 22.8 °C

Humidity: 52.6 % RH


Atmospheric Pressure: 101.2kPa

EUT Operation :

The test was performed in TX Transmitting mode, the test data were shown in the report.

8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10: 2013.

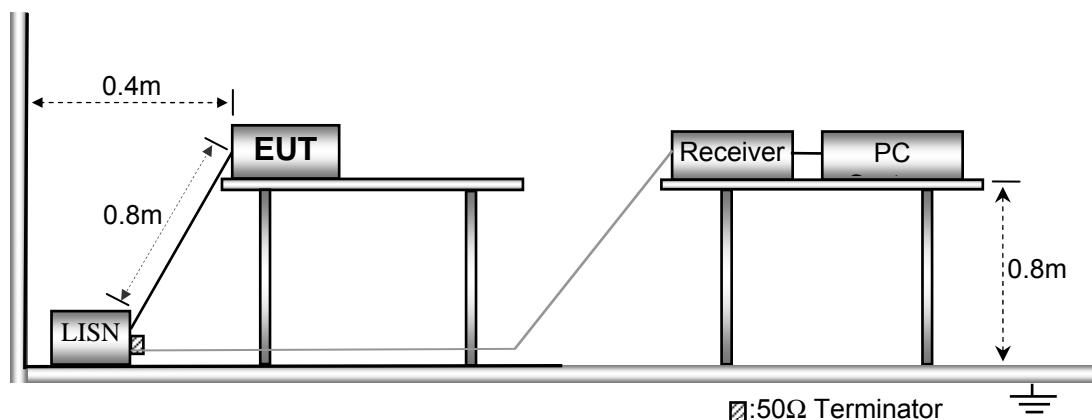

8.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

8.4 Conducted Emission Test Result

Note: Not Applicable

9 Radiated Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.205 &15.209 & 15.247

Test Method: ANSI C63.10: 2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log ^{(2400/F(kHz))} + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log ^{(24000/F(kHz))} + 40
1.705 ~ 30	30	30	100 * 30	20log ⁽³⁰⁾ + 40
30 ~ 88	100	3	100	20log ⁽¹⁰⁰⁾
88 ~ 216	150	3	150	20log ⁽¹⁵⁰⁾
216 ~ 960	200	3	200	20log ⁽²⁰⁰⁾
Above 960	500	3	500	20log ⁽⁵⁰⁰⁾

9.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 51.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in TX Transmitting mode, the test data were shown in the report.


9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10: 2013.


The test setup for emission measurement below 30MHz.

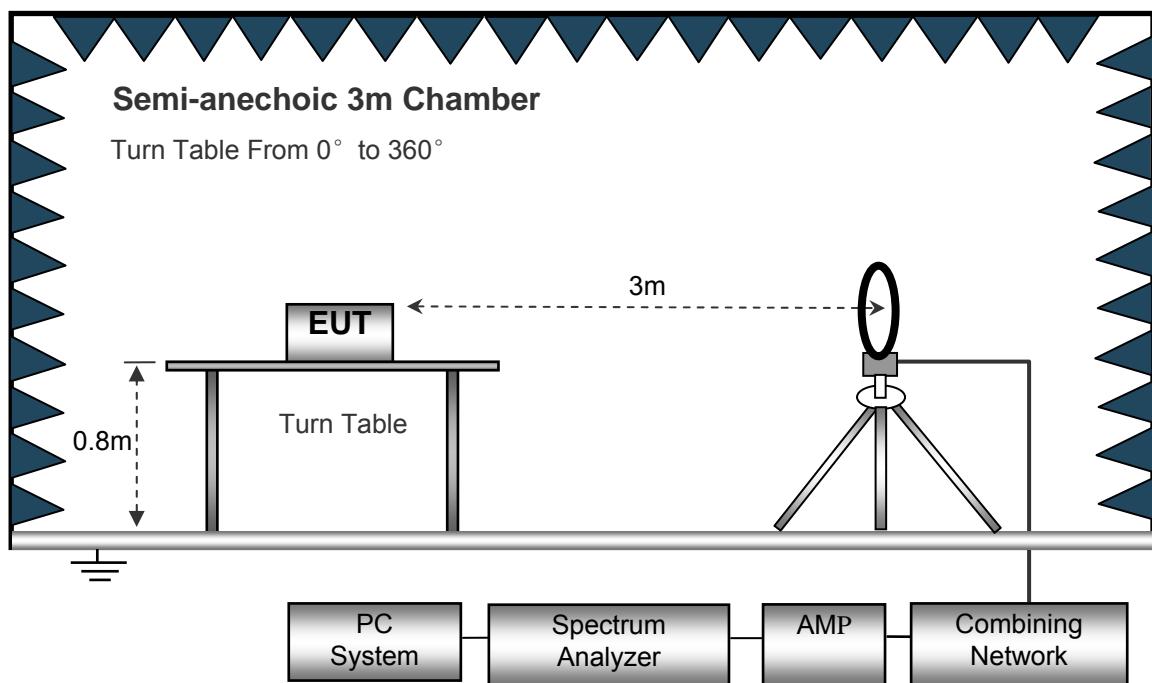

The test setup for emission measurement from 30 MHz to 1 GHz.

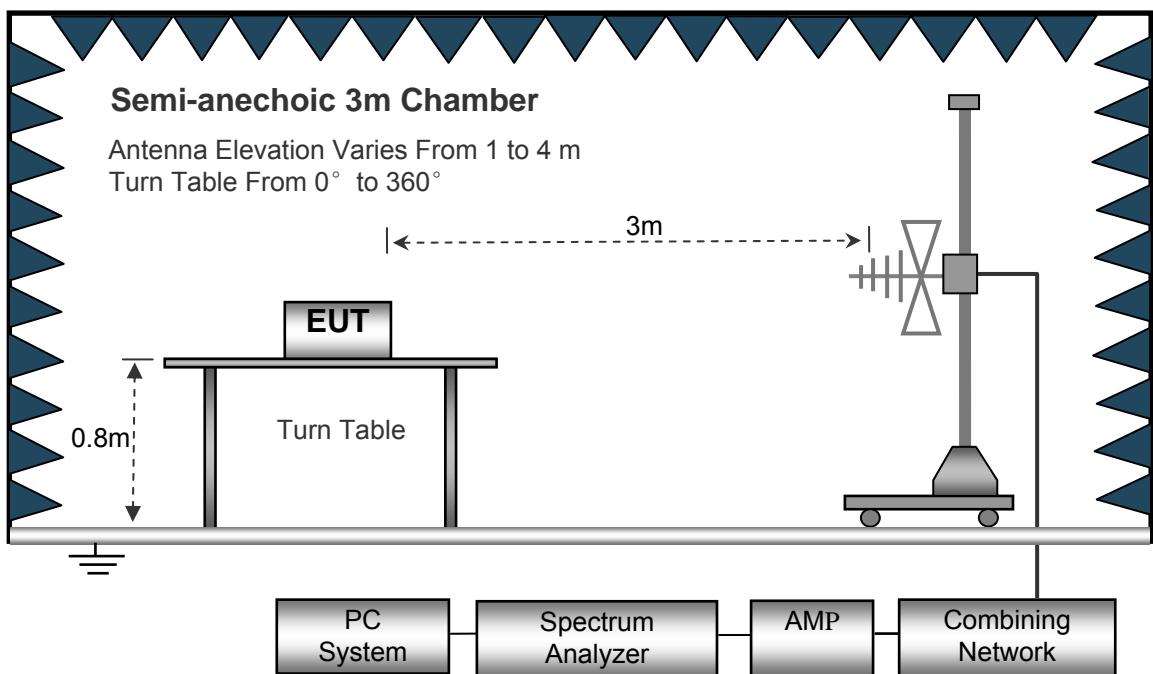

The test setup for emission measurement above 1 GHz.

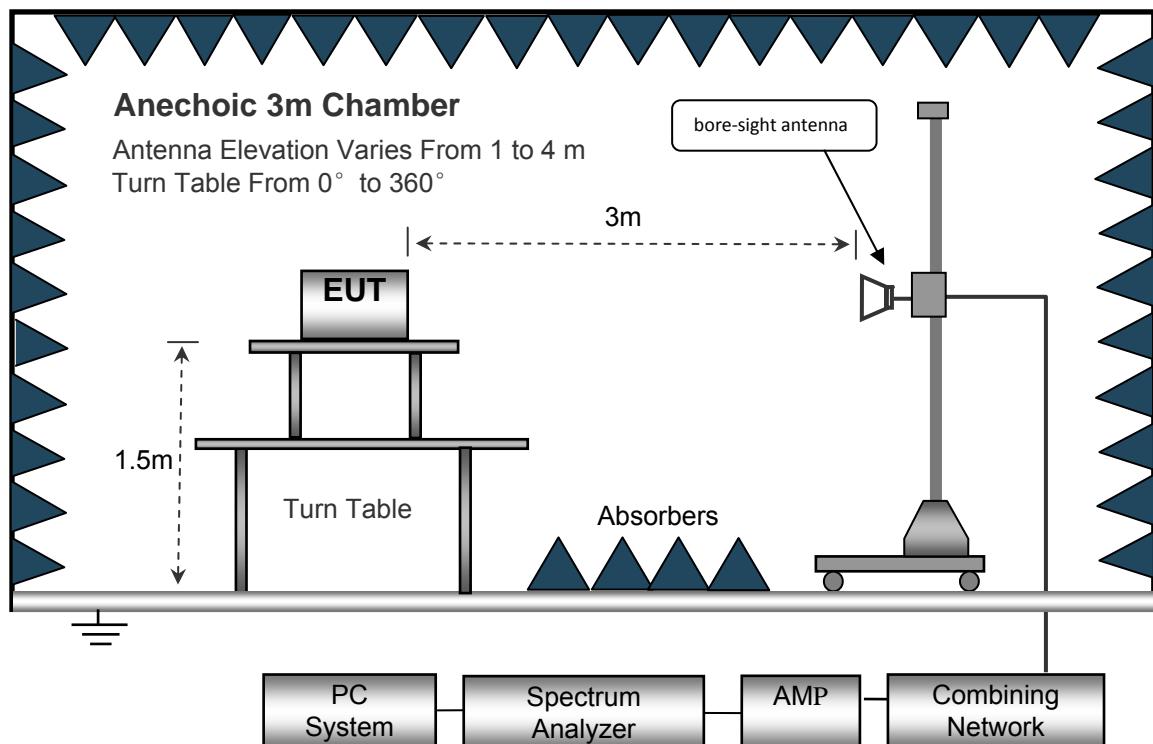

9.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed	Auto
IF Bandwidth.....	10kHz
Video Bandwidth.....	10kHz
Resolution Bandwidth.....	10kHz

30MHz ~ 1GHz

Sweep Speed	Auto
Detector	PK
Resolution Bandwidth.....	100kHz
Video Bandwidth.....	300kHz

Above 1GHz

Sweep Speed	Auto
Detector	PK
Resolution Bandwidth.....	1MHz
Video Bandwidth.....	3MHz
Detector	Ave.
Resolution Bandwidth.....	1MHz
Video Bandwidth.....	10Hz

9.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the Z position. So the data shown was the Z position only.

9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

9.6 Summary of Test Results

Test Frequency: 9KHz~30MHz

Remark: only the worst data (GFSK modulation Low channel mode) were recorded.

Frequency (MHz)	Measurement results dB μ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB μ V/m @30m	Limits dB μ V/m @30m	Margin dB
6.122	24.56	QP	21.84	40.00	6.40	29.54	-23.14
8.304	25.81	QP	21.02	40.00	6.83	29.54	-22.71
26.127	25.69	QP	20.55	40.00	6.24	29.54	-23.30

Test Frequency: 30MHz ~ 18GHz

Remark: only the worst data (GFSK modulation mode) were recorded.

Frequency (MHz)	Receiver Reading (dB μ V)	Detector (PK/QP/Ave)	Turn table Angle Degree	RX Antenna		Corrected Factor	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
				Height (m)	Polar (H/V)				
GFSK Low Channel									
255.62	35.63	QP	93	1.6	H	-13.35	22.28	46.00	-23.72
252.06	40.56	QP	189	1.0	V	-13.35	27.21	46.00	-18.79
4804.00	44.92	PK	194	1.9	V	-1.06	43.86	74.00	-30.14
4804.00	43.66	Ave	194	1.9	V	-1.06	42.60	54.00	-11.40
7206.00	41.93	PK	189	2.0	H	1.33	43.26	74.00	-30.74
7206.00	35.21	Ave	189	2.0	H	1.33	36.54	54.00	-17.46
2329.41	45.49	PK	238	1.6	V	-13.19	32.30	74.00	-41.70
2329.41	39.74	Ave	238	1.6	V	-13.19	26.55	54.00	-27.45
2377.28	44.08	PK	24	1.9	H	-13.14	30.94	74.00	-43.06
2377.28	37.55	Ave	24	1.9	H	-13.14	24.41	54.00	-29.59
2495.85	42.82	PK	106	1.0	V	-13.08	29.74	74.00	-44.26
2495.85	38.81	Ave	106	1.0	V	-13.08	25.73	54.00	-28.27

Frequency (MHz)	Receiver Reading (dB μ V)	Detector (PK/QP/Ave)	Turn table Angle Degree	RX Antenna		Corrected Factor	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
				Height (m)	Polar (H/V)				
GFSK Middle Channel									
255.62	37.09	QP	11	1.8	H	-13.35	23.74	46.00	-22.26
252.06	42.45	QP	125	1.9	V	-13.35	29.10	46.00	-16.90
4882.00	46.20	PK	327	1.2	V	-0.62	45.58	74.00	-28.42
4882.00	42.23	Ave	327	1.2	V	-0.62	41.61	54.00	-12.39
7323.00	38.90	PK	292	1.5	H	2.21	41.11	74.00	-32.89
7323.00	34.56	Ave	292	1.5	H	2.21	36.77	54.00	-17.23
2326.11	46.12	PK	142	1.2	V	-13.19	32.93	74.00	-41.07
2326.11	39.24	Ave	142	1.2	V	-13.19	26.05	54.00	-27.95
2350.71	44.04	PK	325	1.1	H	-13.14	30.90	74.00	-43.10
2350.71	36.16	Ave	325	1.1	H	-13.14	23.02	54.00	-30.98
2487.21	43.66	PK	355	1.3	V	-13.08	30.58	74.00	-43.42
2487.21	36.11	Ave	355	1.3	V	-13.08	23.03	54.00	-30.97

Frequency (MHz)	Receiver Reading (dB μ V)	Detector (PK/QP/Ave)	Turn table Angle Degree	RX Antenna		Corrected Factor	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
				Height (m)	Polar (H/V)				
GFSK High Channel									
255.62	38.22	QP	143	1.0	H	-13.35	24.87	46.00	-21.13
252.06	42.56	QP	279	1.8	V	-13.35	29.21	46.00	-16.79
4960.00	43.89	PK	47	1.3	V	-0.24	43.65	74.00	-30.35
4960.00	40.39	Ave	47	1.3	V	-0.24	40.15	54.00	-13.85
7440.00	39.26	PK	262	1.4	H	2.84	42.10	74.00	-31.90
7440.00	36.23	Ave	262	1.4	H	2.84	39.07	54.00	-14.93
2342.97	46.17	PK	208	1.4	V	-13.19	32.98	74.00	-41.02
2342.97	37.63	Ave	208	1.4	V	-13.19	24.44	54.00	-29.56
2373.24	43.93	PK	73	1.2	H	-13.14	30.79	74.00	-43.21
2373.24	37.17	Ave	73	1.2	H	-13.14	24.03	54.00	-29.97
2486.28	43.25	PK	259	1.5	V	-13.08	30.17	74.00	-43.83
2486.28	38.77	Ave	259	1.5	V	-13.08	25.69	54.00	-28.31

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not recorded

10 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: ANSI C63.10: 2013

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto



Detector function = peak, Trace = max hold


Above 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold

10.2 Test Result

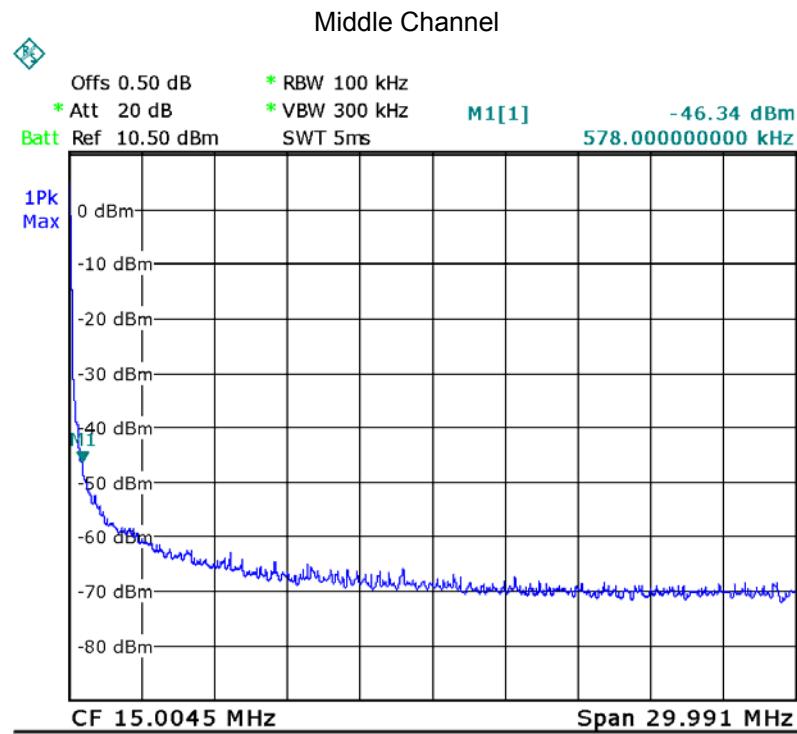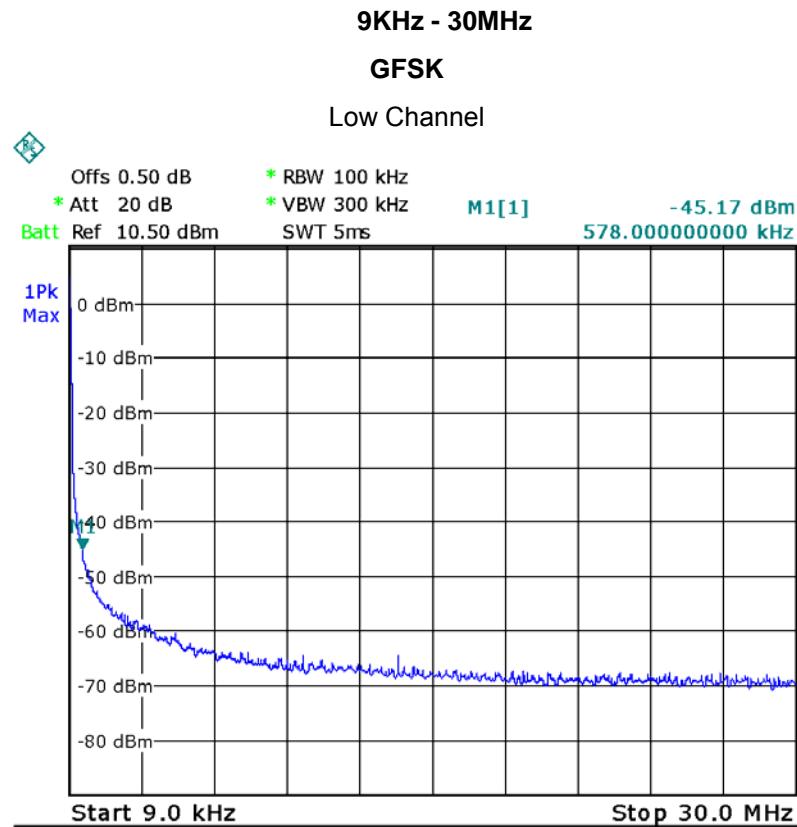

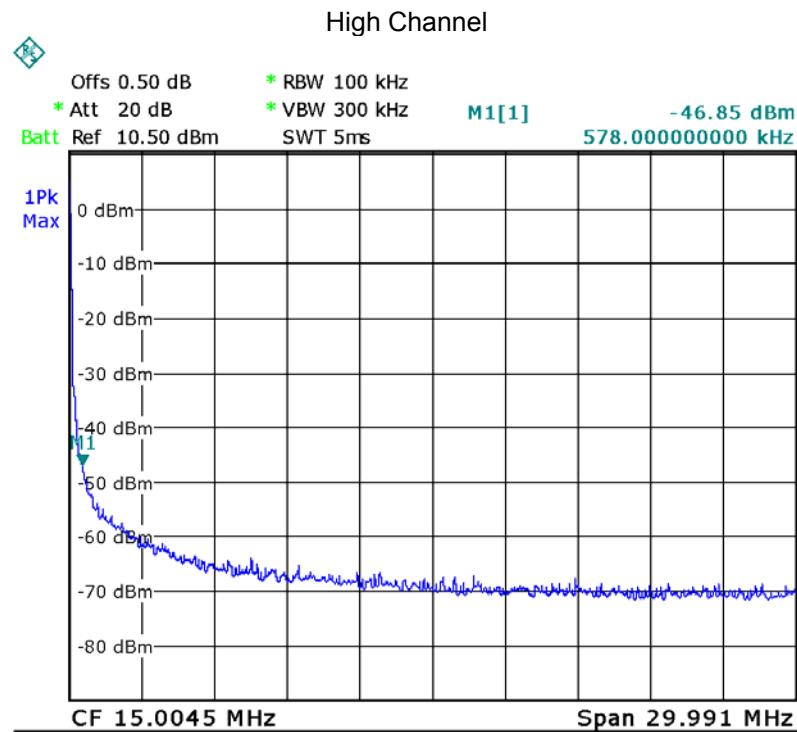

30MHz – 25GHz

GFSK Low Channel

Fundamental



GFSK Middle Channel


Fundamental


GFSK High Channel


Fundamental




11 Band Edge Measurement



Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	ANSI C63.10: 2013
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting

11.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

11.2 Test Result

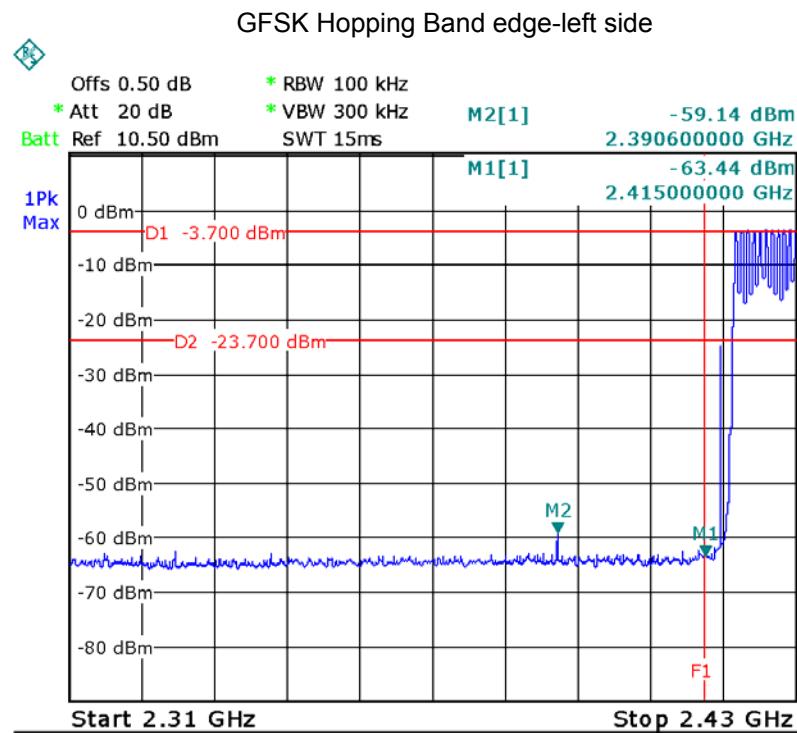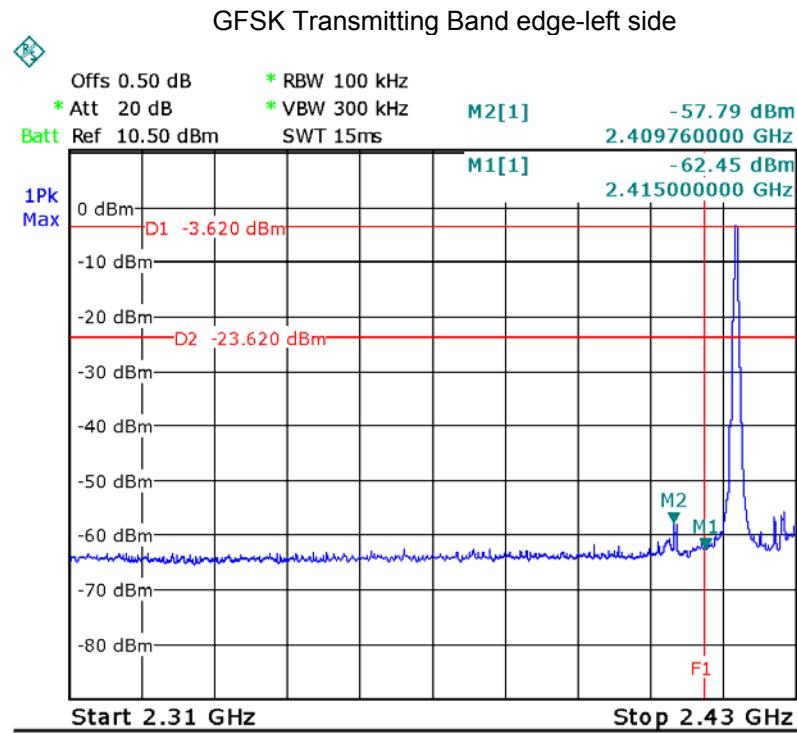

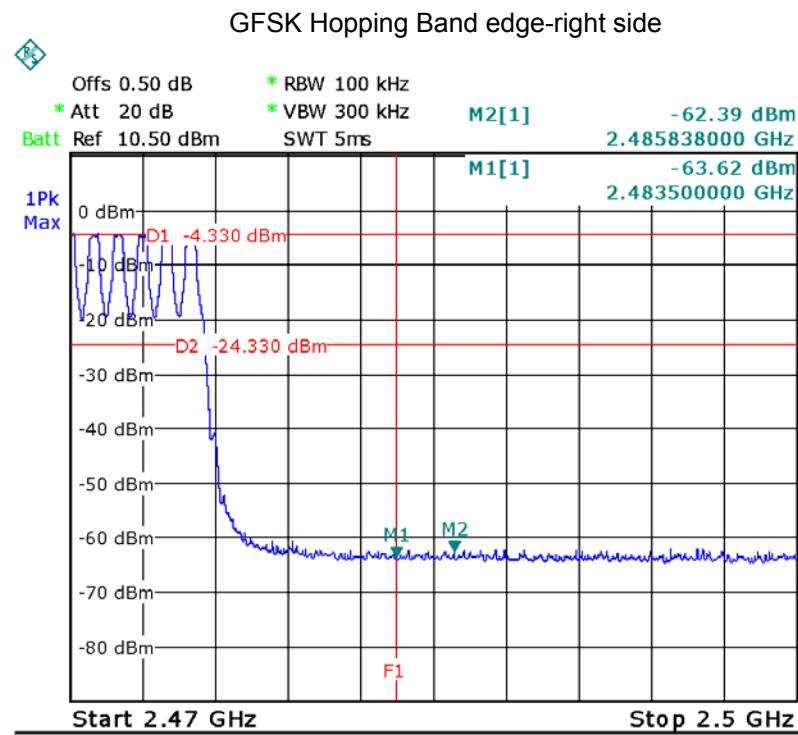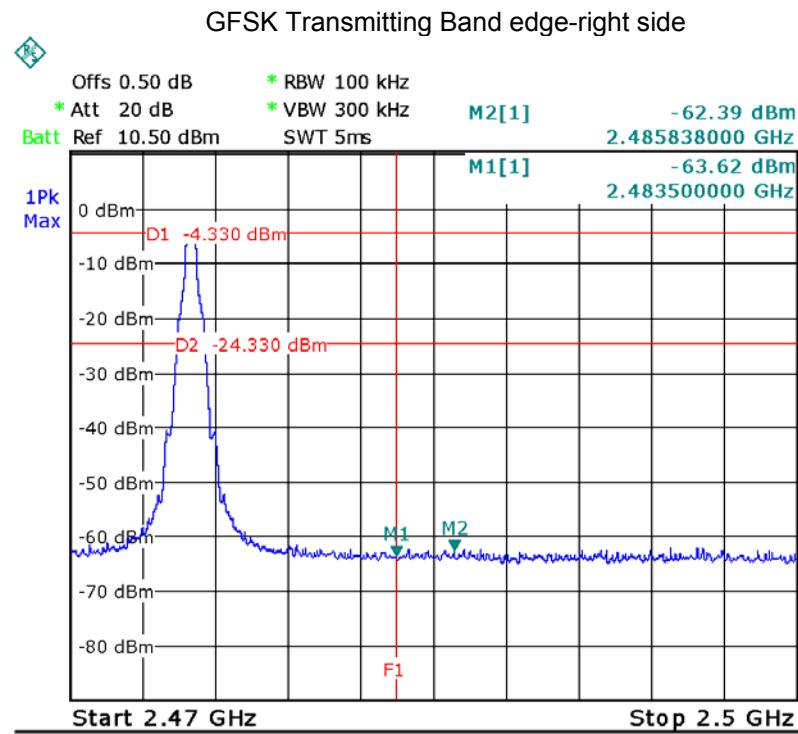

12 20 dB Bandwidth Measurement


Test Requirement: FCC CFR47 Part 15 Section 15.247
 Test Method: ANSI C63.10: 2013
 Test Mode: Test in fixing operating frequency at low, Middle, high channel.



12.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz

12.2 Test Result

Modulation	Test Channel	Bandwidth(MHz)
GFSK	Low	1.377
GFSK	Middle	1.359
GFSK	High	1.437

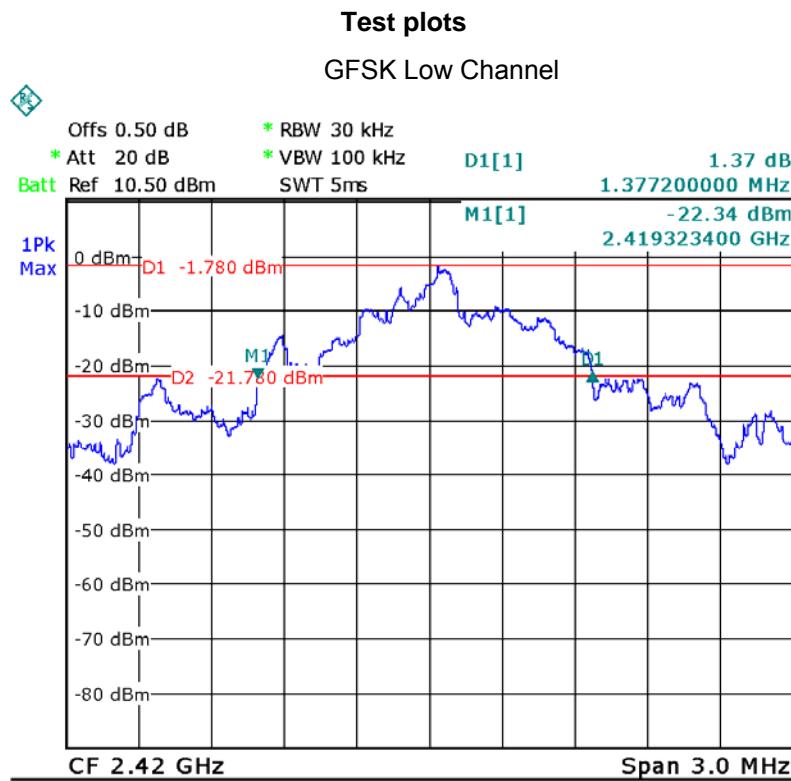

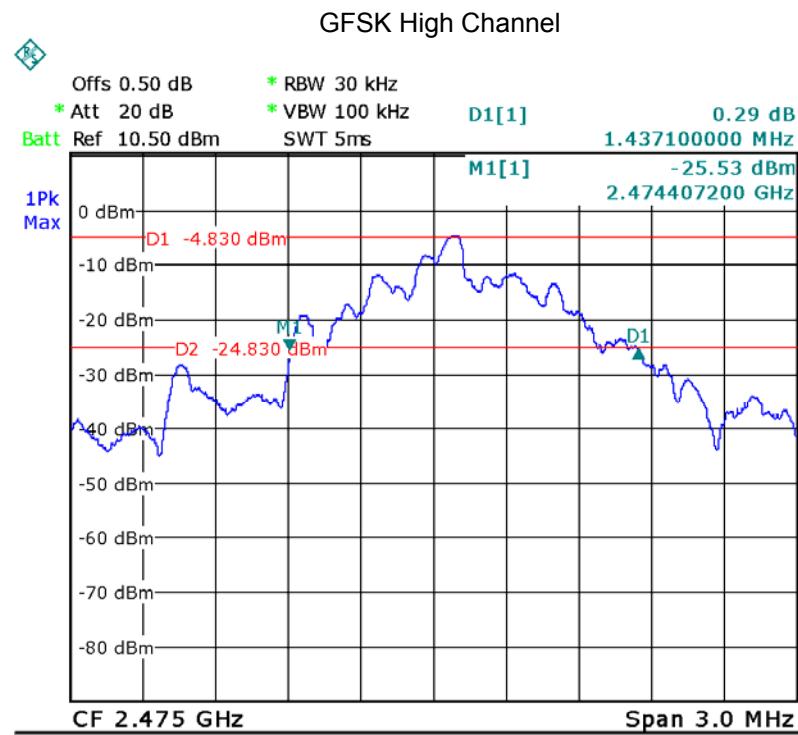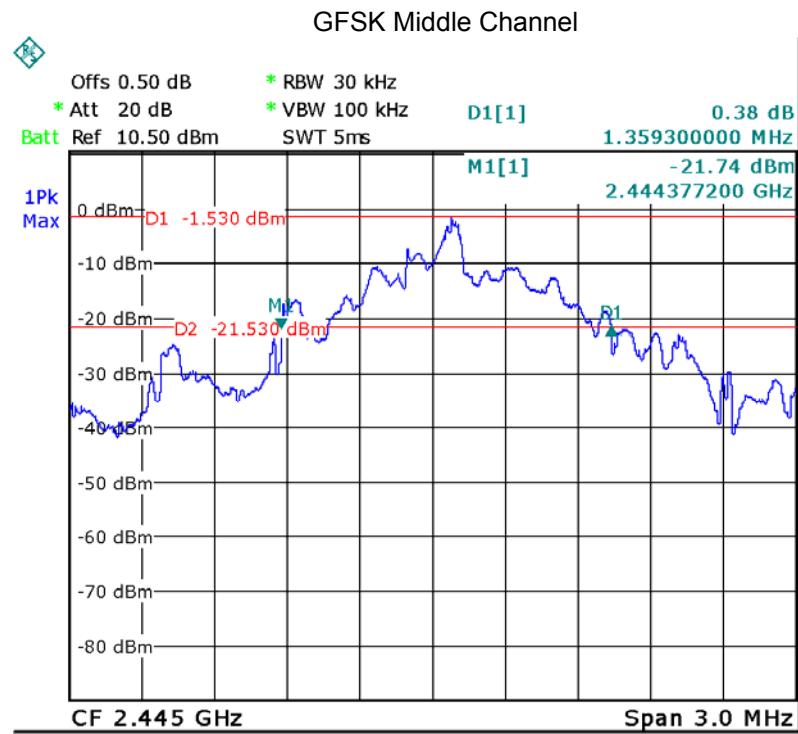

13 Maximum Peak Output Power



Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10: 2013
Test Limit:	Regulation 15.247 (a)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater: 0.125 watts..
Test mode:	Test in fixing frequency transmitting mode.


13.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

13.2 Test Result

Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Low	-3.11	21
GFSK	Middle	-3.90	21
GFSK	High	-4.81	21

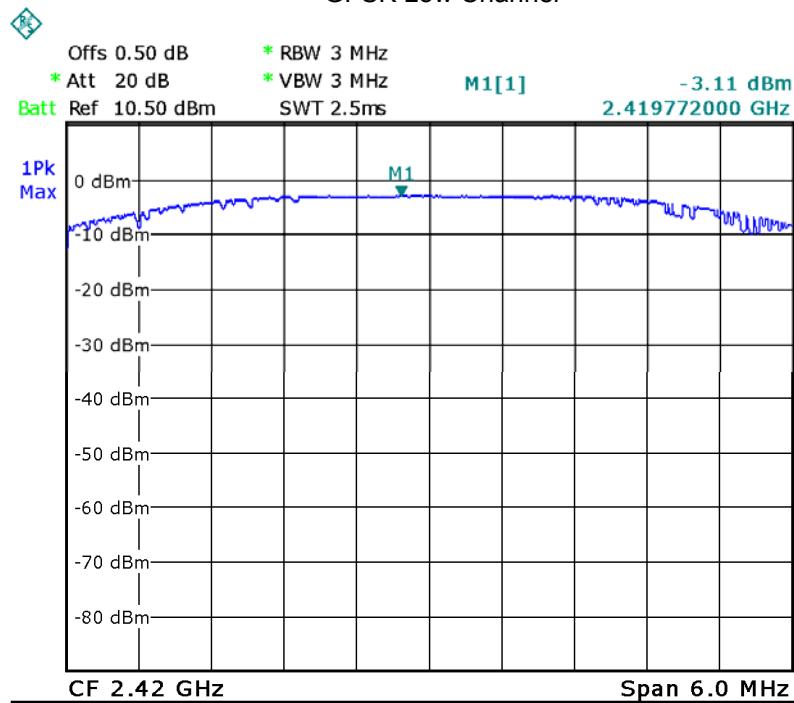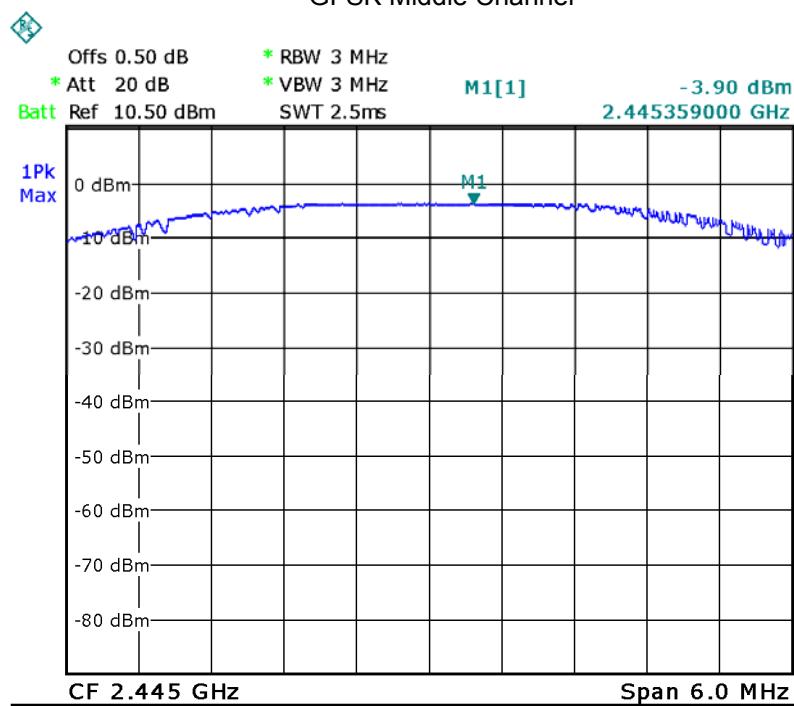Test plots**GFSK Low Channel****GFSK Middle Channel**

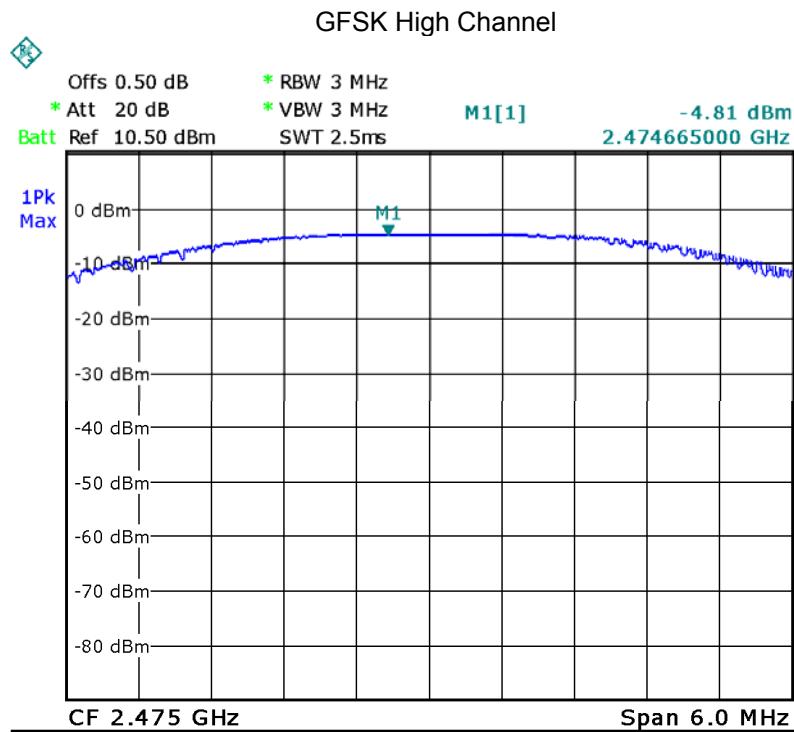

14 Hopping Channel Separation



Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10: 2013
Test Limit:	Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.
Test Mode:	Test in hopping transmitting operating mode.


14.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 3.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

14.2 Test Result

Modulation	Test Channel	Separation (MHz)	Limit(MHz)	Result
GFSK	Low	1.000	0.918	PASS
GFSK	Middle	1.000	0.906	PASS
GFSK	High	1.000	0.958	PASS

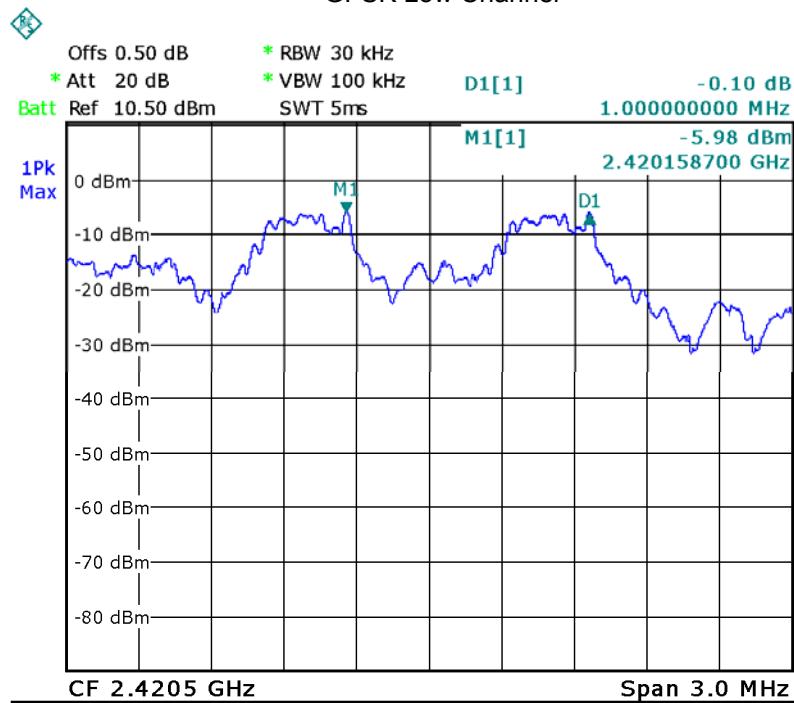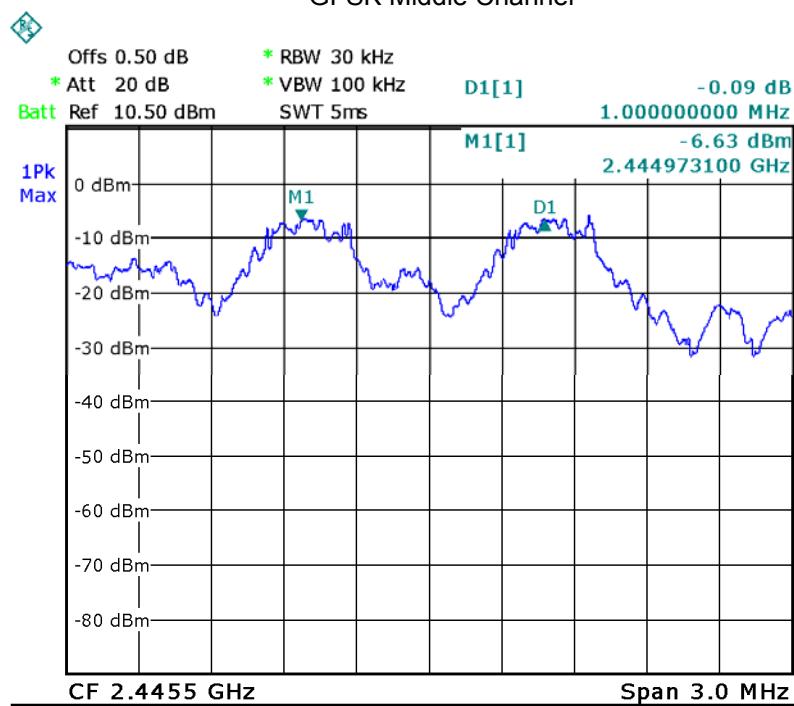Test plots**GFSK Low Channel****GFSK Middle Channel**

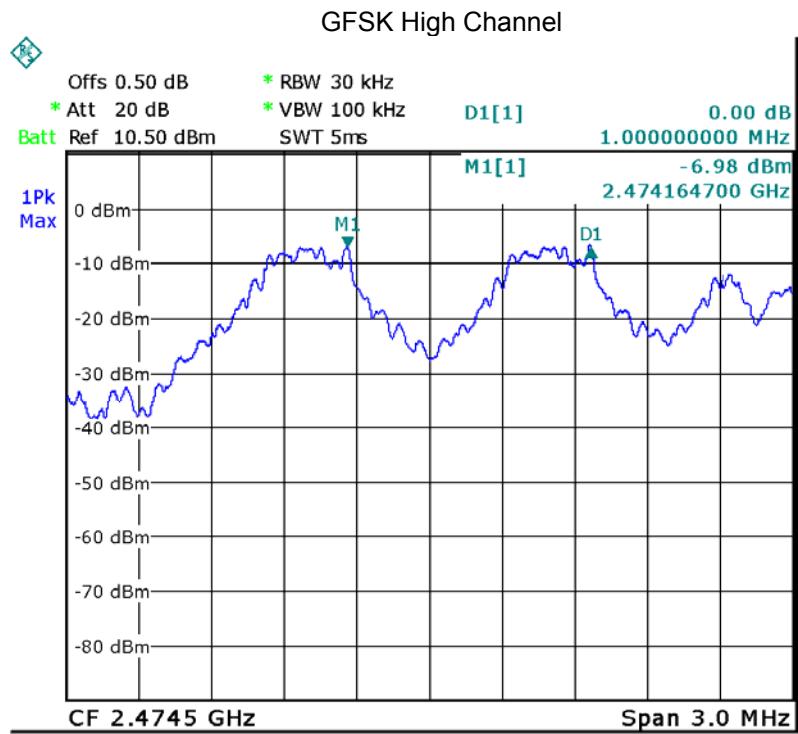

15 Number of Hopping Frequency

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10: 2013
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.


15.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

15.2 Test Result

Test Plots:

56 Channels in total

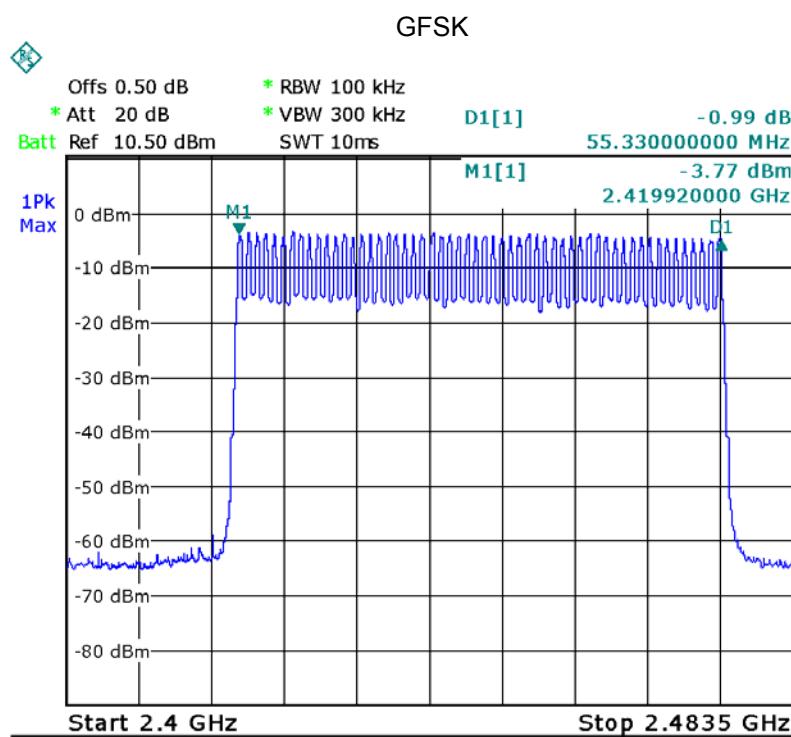

16 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10: 2013
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

16.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz.Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

16.2 Test Result

DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).


DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).



DH1 Packet permit maximum 1600 / 79 /2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

Data Packet	Dwell Time(s)
DH5	$1600/79/6*0.4*79*(\text{MkrDelta})/1000$
DH3	$1600/79/4*0.4*79*(\text{MkrDelta})/1000$
DH1	$1600/79/2*0.4*79*(\text{MkrDelta})/1000$
Remark: Mkr Delta is once pulse time.	

Modulation	Data Packet	Channel	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	DH5	Low	0.420	0.045	0.4
		middle	0.450	0.048	0.4
		High	0.450	0.048	0.4

Remark: Only the worst-case mode DH5 is recorded.

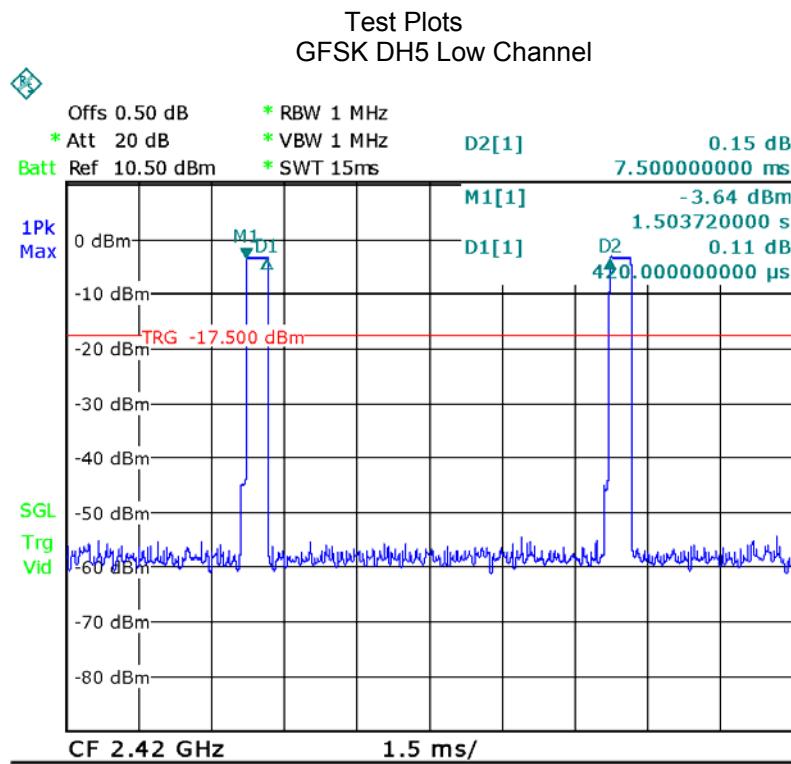

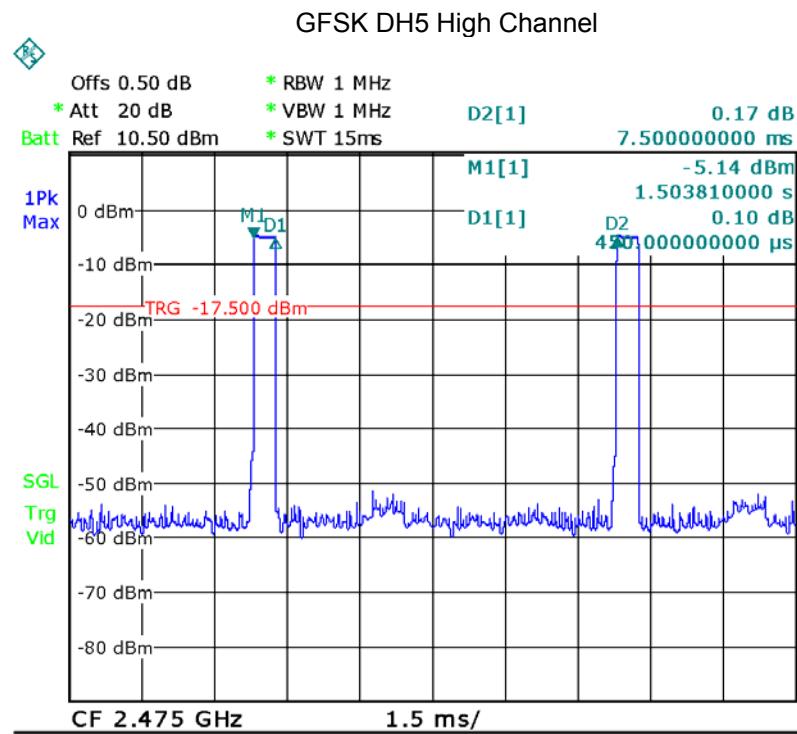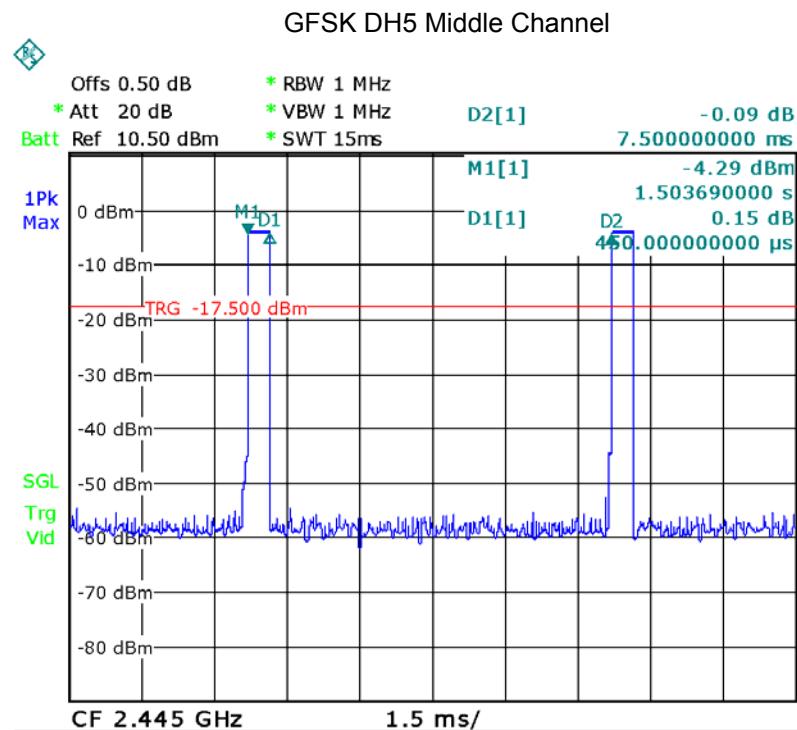

17 Antenna Requirement


According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna, fulfil the requirement of this section.

18 Photographs of Test Setup and EUT.


18.1 Setup photo Model DF-M3 FCC ID: 2AN97-DF-M3

Photograph - Spurious Emissions Radiated Test Setup

For 30MHz-1000MHz

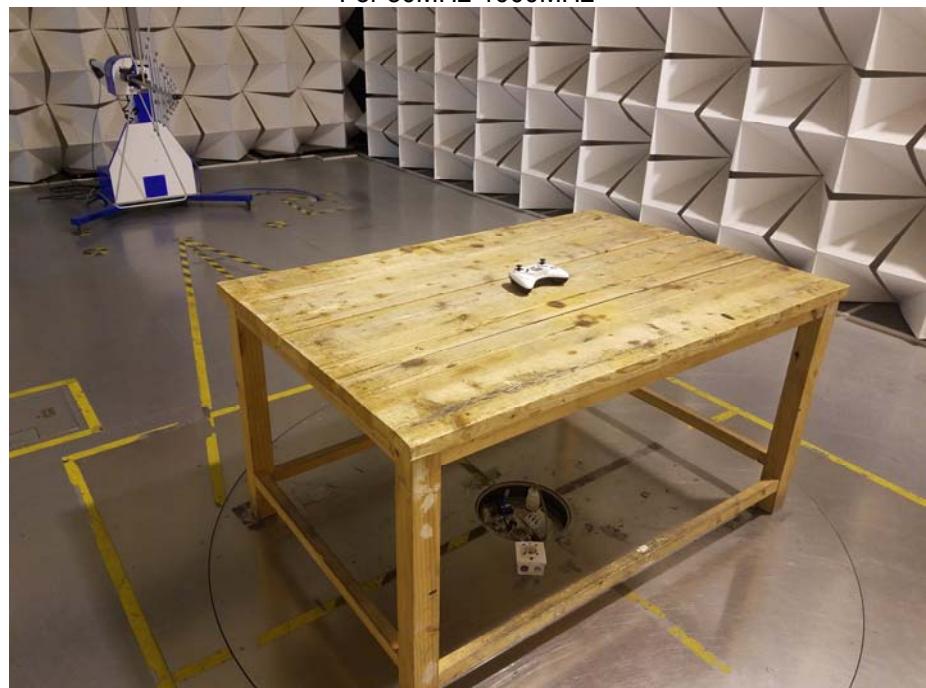

For Above 1GHz

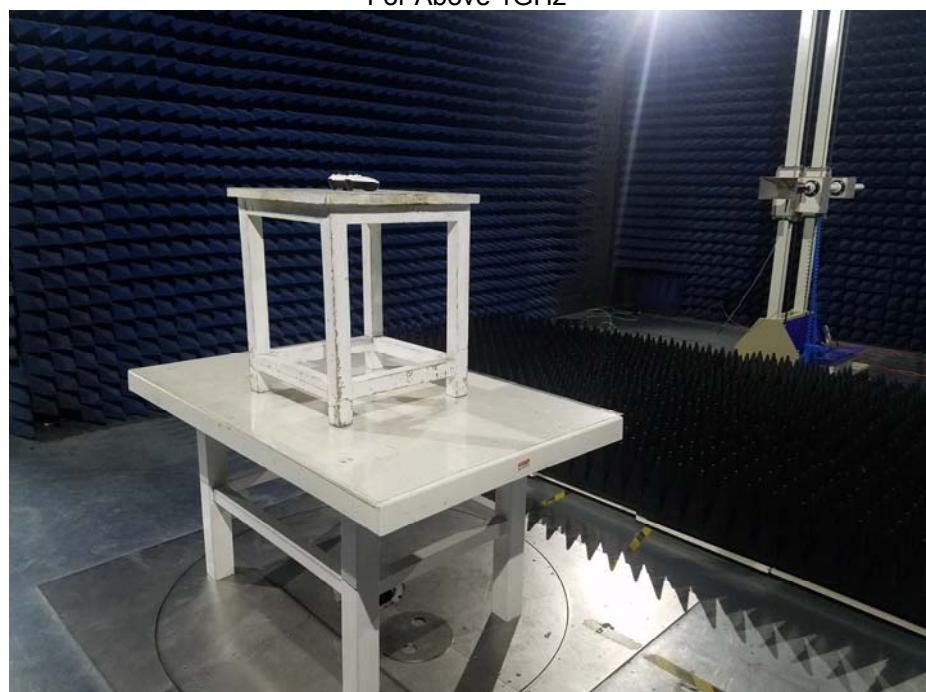



18.2 EUT – External View Model DF-M3 FCC ID: 2AN97-DF-M3





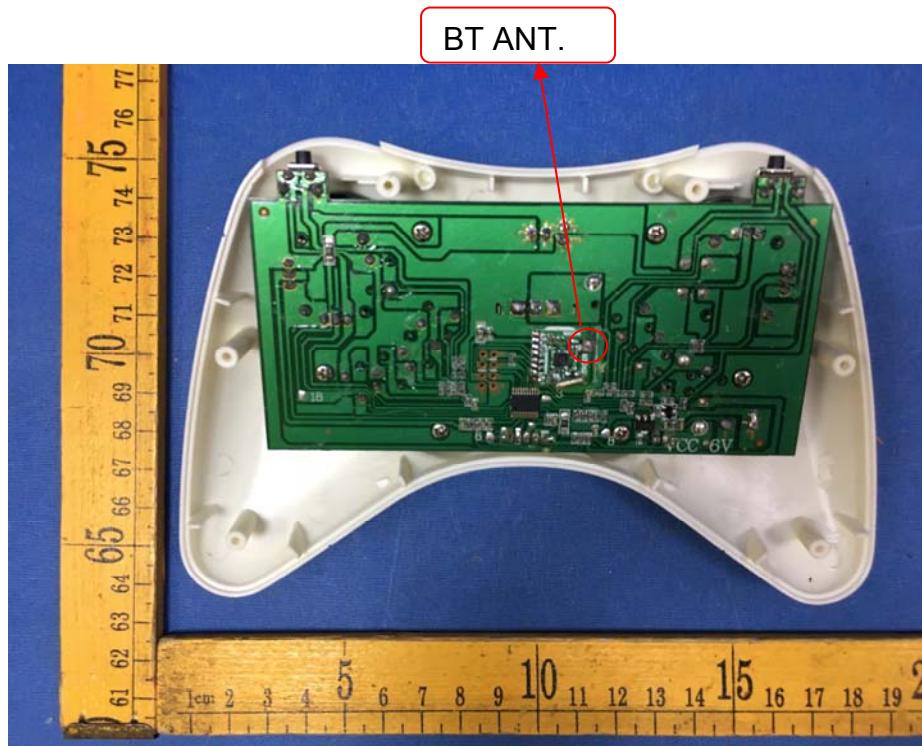

18.3 EUT – Internal View Model DF-M3 FCC ID: 2AN97-DF-M3

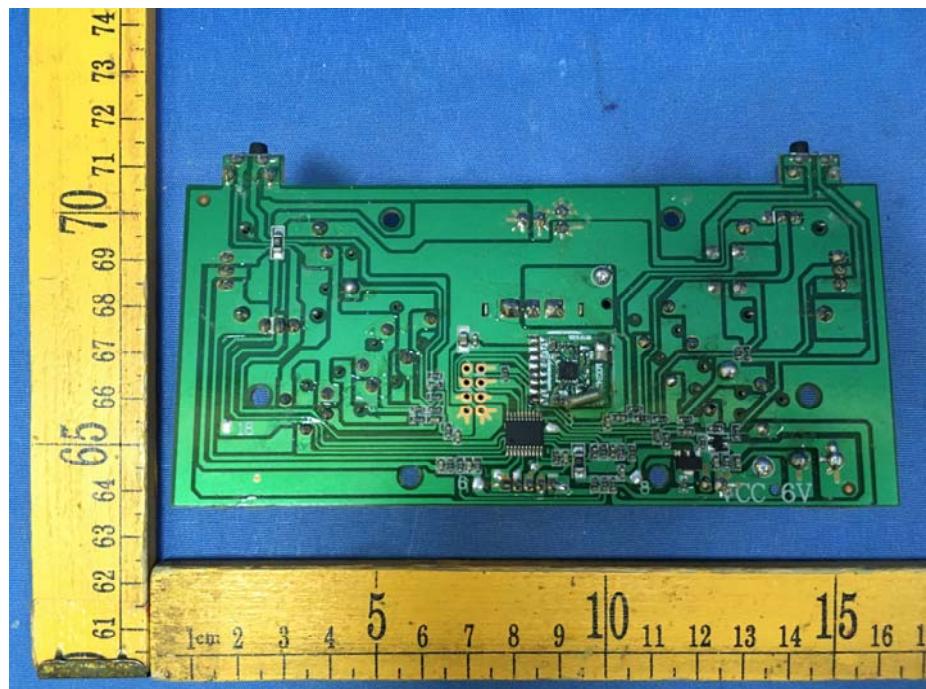

=====End of Report=====