

TEST REPORT

Product Name : Bluetooth voice remote control
Brand Mark : N/A
Model No. : AN2704-1IP-003
FCC ID : 2AN9I-AN2704
Report Number : BLA-EMC-202301-A2002
Date of Sample Receipt : 2023/1/10
Date of Test : 2023/1/10 to 2023/2/15
Date of Issue : 2023/2/15
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Prepared for:

Dongguan Anycon Intelligent Technology Co.,Ltd
No12,Limin Road,Jinxiaotang Industrial Park,Fenggang,Dongguan

Prepared by:

BlueAsia Technical Services(Shenzhen) Co.,Ltd.
No.41, South of Beihuan Road, Shangwu Community, Shiyan Subdistrict,
Bao'an District, Shenzhen, Guangdong, China
TEL: +86-755-23059481

Compiled by:

Jozu

Review by:

Sueels

Approved by:

Blue Zheng

Date:

2023/2/15



REPORT REVISE RECORD

Version No.	Date	Description
00	2023/2/15	Original

BlueAsia

TABLE OF CONTENTS

1	TEST SUMMARY	5
2	GENERAL INFORMATION	6
3	GENERAL DESCRIPTION OF E.U.T.	6
4	TEST ENVIRONMENT	7
5	TEST MODE	7
6	MEASUREMENT UNCERTAINTY	7
7	DESCRIPTION OF SUPPORT UNIT	8
8	LABORATORY LOCATION	8
9	TEST INSTRUMENTS LIST	9
10	CONDUCTED BAND EDGES MEASUREMENT	11
10.1	LIMITS	11
10.2	BLOCK DIAGRAM OF TEST SETUP	11
10.3	TEST DATA	12
11	ANTENNA REQUIREMENT	13
11.1	CONCLUSION	13
12	RADIATED SPURIOUS EMISSIONS	14
12.1	LIMITS	14
12.2	BLOCK DIAGRAM OF TEST SETUP	15
12.3	PROCEDURE	15
12.4	TEST DATA	17
13	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	26
13.1	LIMITS	26
13.2	BLOCK DIAGRAM OF TEST SETUP	27
13.3	PROCEDURE	27
13.4	TEST DATA	29
14	CONDUCTED SPURIOUS EMISSIONS	34
14.1	LIMITS	34
14.2	BLOCK DIAGRAM OF TEST SETUP	34
14.3	TEST DATA	35

15	POWER SPECTRUM DENSITY	36
15.1	LIMITS	36
15.2	BLOCK DIAGRAM OF TEST SETUP	36
15.3	TEST DATA	36
16	CONDUCTED PEAK OUTPUT POWER	37
16.1	LIMITS	37
16.2	BLOCK DIAGRAM OF TEST SETUP	37
16.3	TEST DATA	38
17	MINIMUM 6DB BANDWIDTH	39
17.1	LIMITS	39
17.2	BLOCK DIAGRAM OF TEST SETUP	39
17.3	TEST DATA	39
18	APPENDIX	40
	APPENDIX A: PHOTOGRAPHS OF TEST SETUP	55
	APPENDIX B: PHOTOGRAPHS OF EUT	56

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass

2 GENERAL INFORMATION

Applicant	Dongguan Anycon Intelligent Technology Co.,Ltd
Address	No12,Limin Road,Jinxiaotang Industrial Park,Fenggang,Dongguan
Manufacturer	Dongguan Anycon Intelligent Technology Co.,Ltd.
Address	No12,LiminRoad,jinxiaotangIndustrialPark,Fenggang,Dongguan
Factory	Dongguan Anycon Intelligent Technology Co.,Ltd.
Address	No12,LiminRoad,jinxiaotangIndustrialPark,Fenggang,Dongguan
Product Name	Bluetooth voice remote control
Test Model No.	AN2704-1IP-003

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	N/A
Software Version	N/A
Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK
Channel Spacing:	2MHz
Number of Channels:	40
Antenna Type:	PCB Antenna
Antenna Gain:	-1.95dBi (Provided by the applicant)

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	DC3.0V

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in transmitting mode with modulation
Remark: Only the data of the worst mode would be recorded in this report.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

Parameter	Expanded Uncertainty (Confidence of 95%)
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Temperature	±3 °C
Supply voltages	±3 %
Time	±5 %
Unwanted Radiated Emission (30MHz ~ 1000MHz)	±4.35 dB
Unwanted Radiated Emission (1GHz ~ 18GHz)	±4.44 dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	HASEE	K610D	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:
BlueAsia Technical Services(Shenzhen) Co.,Ltd.
No.41, South of Beihuan Road, Shangwu Community, Shiyao Subdistrict, Bao'an District,
Shenzhen,Guangdong ,China
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

9 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber 1	SKET	966	N/A	2020/11/10	2023/11/9
Chamber 2	SKET	966	N/A	2021/07/20	2024/07/19
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Receiver	R&S	ESR7	101199	2022/09/15	2023/09/14
Receiver	R&S	ESPI7	101477	2022/07/16	2023/07/15
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2022/09/15	2023/09/14
Horn Antenna	Schwarzbeck	BBHA9120D	01892 P:00331	2022/09/13	2025/09/12
Amplifier	SKET	LNPA_30M01G-30	SK2021060801	2022/07/16	2023/07/15
Amplifier	SKET	PA-000318G-45	N/A	2022/09/13	2023/09/12
Amplifier	SKET	LNPA_18G40G-50	SK2022071301	2022/07/14	2023/07/13
Filter group	SKET	2.4G/5G Filter group r	N/A	2022/07/16	2023/07/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2022/9/14	2025/9/13
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of RF Conducted Test					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Spectrum	Agilent	N9020A	MY49100060	2022/09/07	2023/09/06
Spectrum	KEYSIGHT	N9030A	MY52350152	2022/07/01	2023/06/30
Spectrum	KEYSIGHT	N9010A	MY54330814	2022/07/01	2023/06/30
Signal Generator	Agilent	N5182A	MY47420955	2022/09/07	2023/09/06
Signal Generator	Agilent	E8257D	MY44320250	2022/07/01	2023/06/30
Signal Generator	Agilent	N5181A	MY46240904	2022/08/02	2023/08/01
Signal Generator	R&S	CMW500	132429	2022/09/07	2023/09/06
BluetoothTester	Anritsu	MT8852B	06262047872	2022/09/07	2023/09/06
Power probe	DARE	RPR3006W	14I00889SN042	2022/09/07	2023/09/06
DCPowersupply	zhaoxin	KXN-305D	20K305D1221363	2022/09/14	2023/09/13
DCPowersupply	zhaoxin	RXN-1505D	19R1505D050168	2022/09/14	2023/09/13
2.4GHz/5GHz RF Test software	MTS	MTS 8310	Version 2.0.0.0	N/A	N/A
Audio Analyzer	Audioprecision	N/A	ATSI-41094	2022/7/1	2023/6/30


10 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

10.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

10.2 BLOCK DIAGRAM OF TEST SETUP

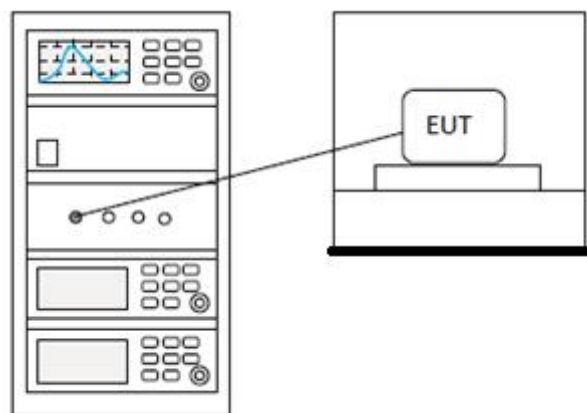

10.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia

11 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


11.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 1dBi.

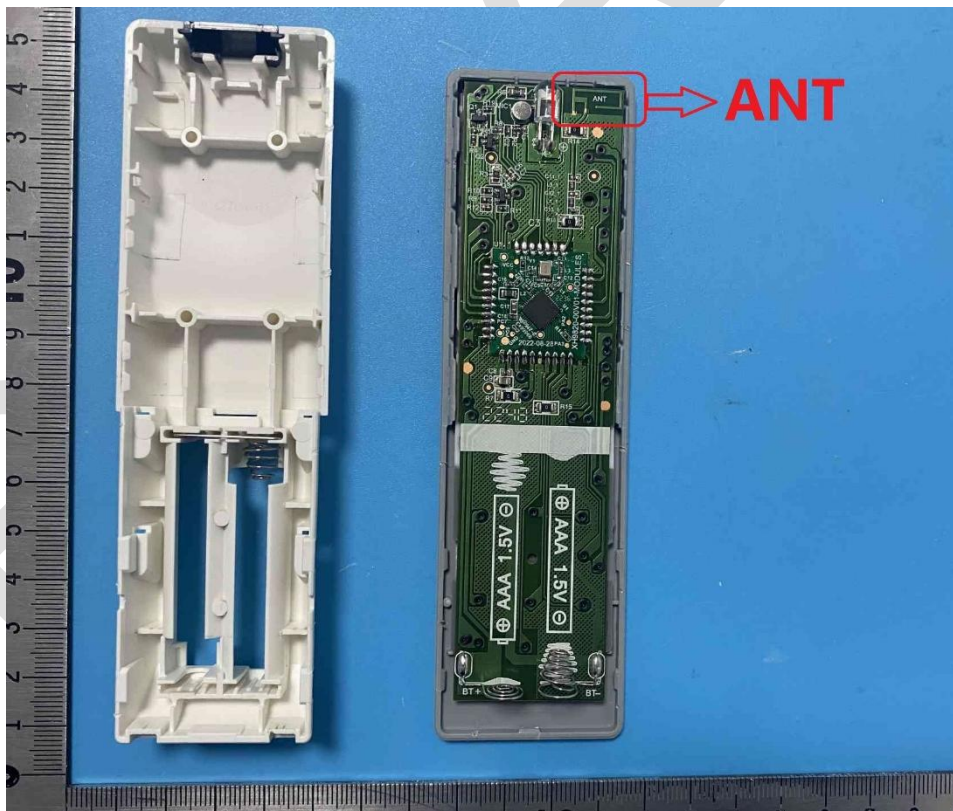

12 RADIATED SPURIOUS EMISSIONS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX mode (SE) below 1G;TX mode (SE) Above 1G
Test Mode (Final Test)	TX mode (SE) below 1G;TX mode (SE) Above 1G
Tester	Jozu
Temperature	25℃
Humidity	60%

12.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

12.2 BLOCK DIAGRAM OF TEST SETUP

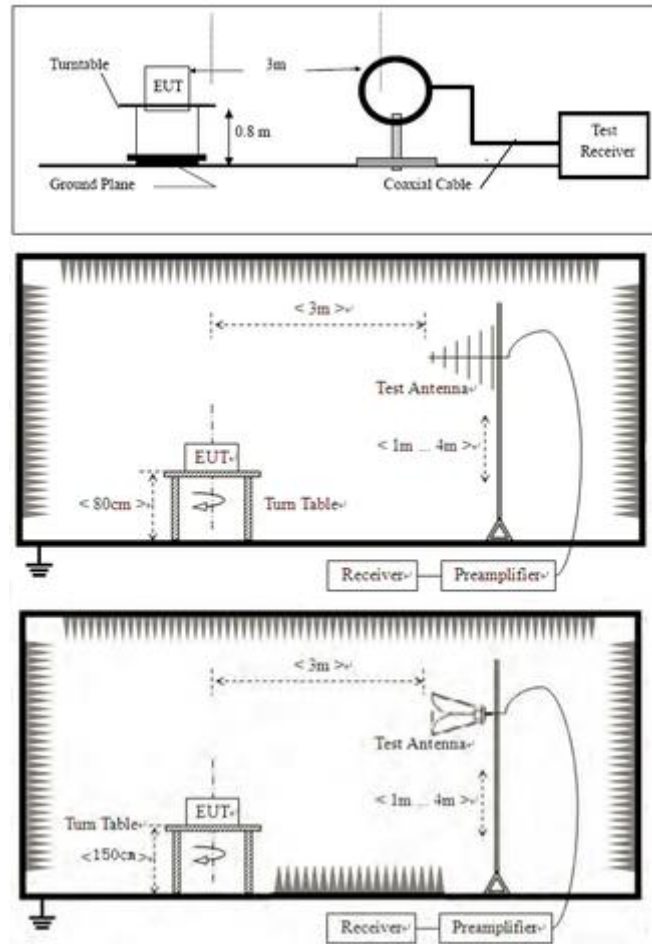

12.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

12.4 TEST DATA


[TestMode: TX mode (SE) below 1G]; [Polarity: Horizontal]

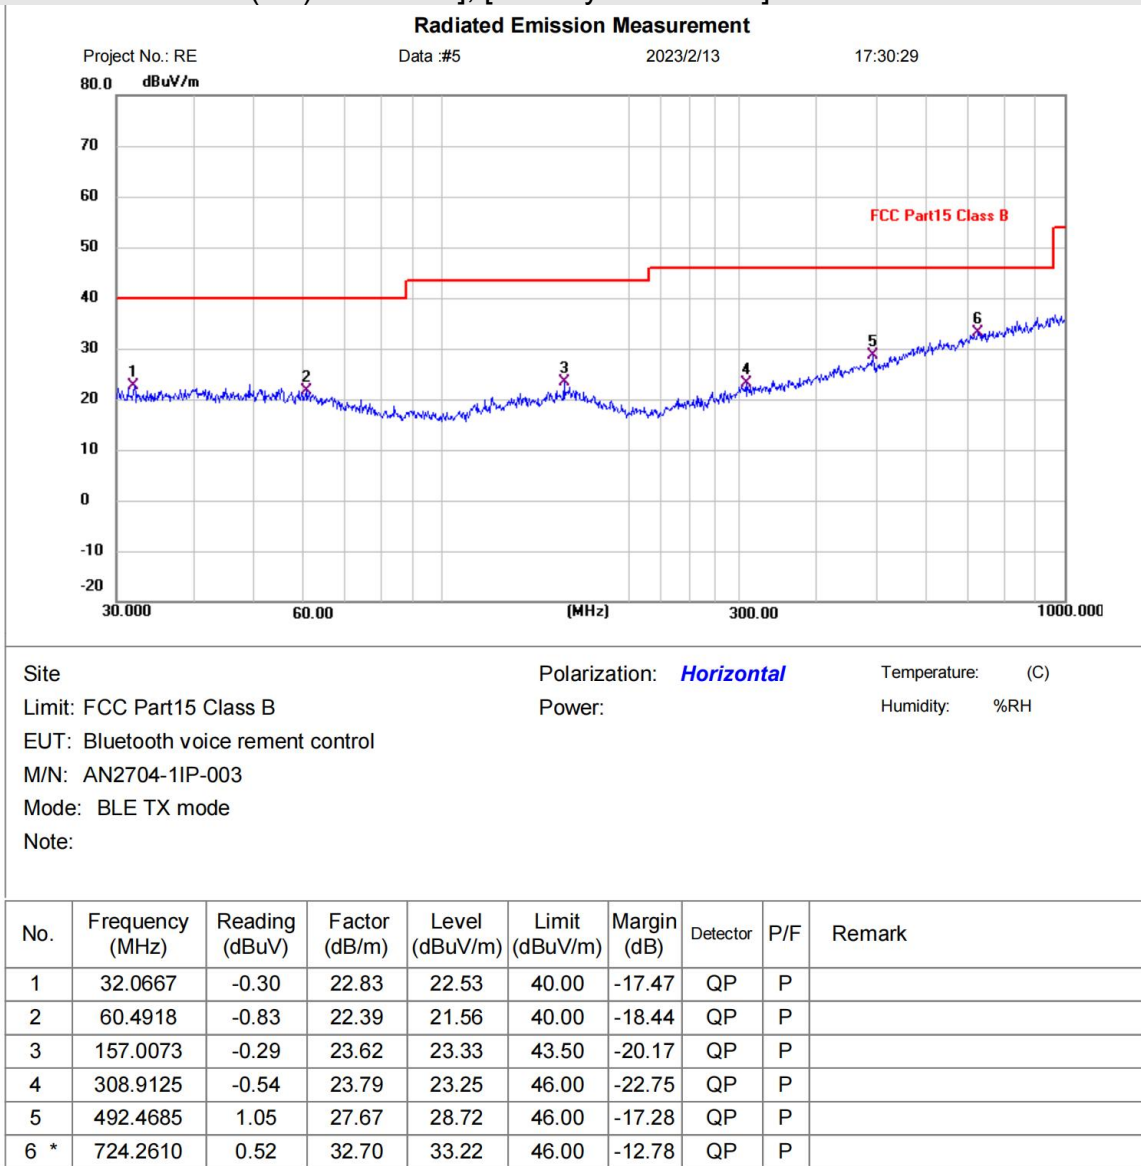

*:Maximum data x:Over limit !:over margin

Test Result: Pass

[TestMode: TX mode (SE) below 1G]; [Polarity: Vertical]

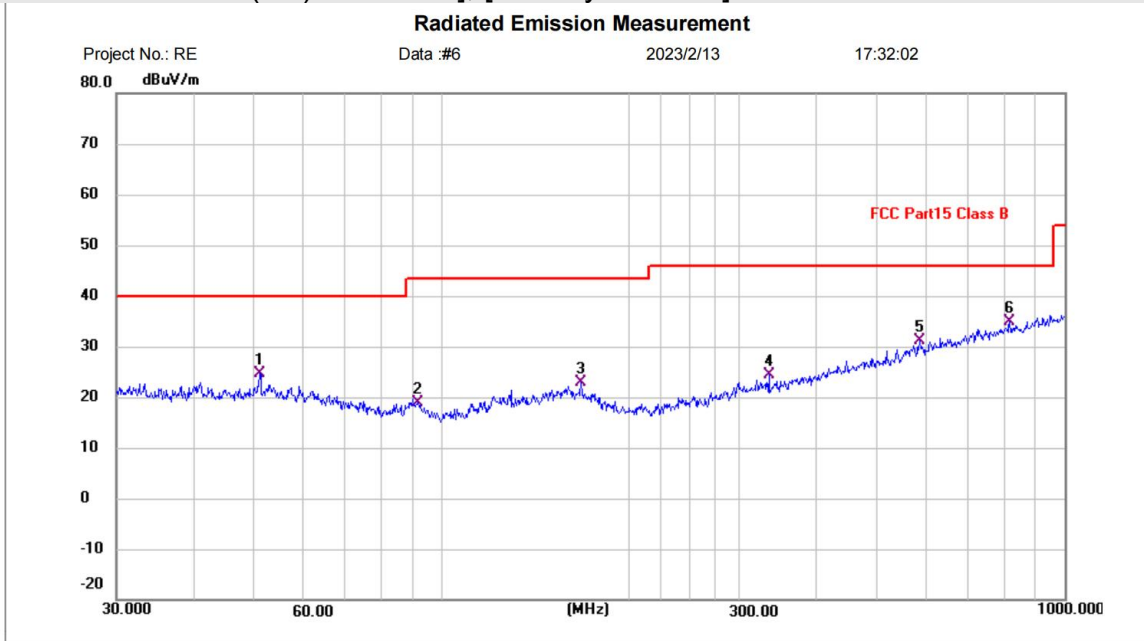

Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 Class B	Power:	Humidity: %RH
EUT: Bluetooth voice rement control		
M/N: AN2704-11P-003		
Mode: BLE TX mode		
Note:		


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	50.9420	1.10	23.59	24.69	40.00	-15.31	QP	P	
2	91.4949	-0.26	19.20	18.94	43.50	-24.56	QP	P	
3	167.2368	0.28	22.69	22.97	43.50	-20.53	QP	P	
4	334.8589	0.59	23.89	24.48	46.00	-21.52	QP	P	
5	584.7895	0.51	30.50	31.01	46.00	-14.99	QP	P	
6 *	815.9678	0.50	34.27	34.77	46.00	-11.23	QP	P	

*:Maximum data x:Over limit !:over margin

Test Result: Pass

Above 1GHz:

[TestMode: TX low channel]; [Polarity: Horizontal]

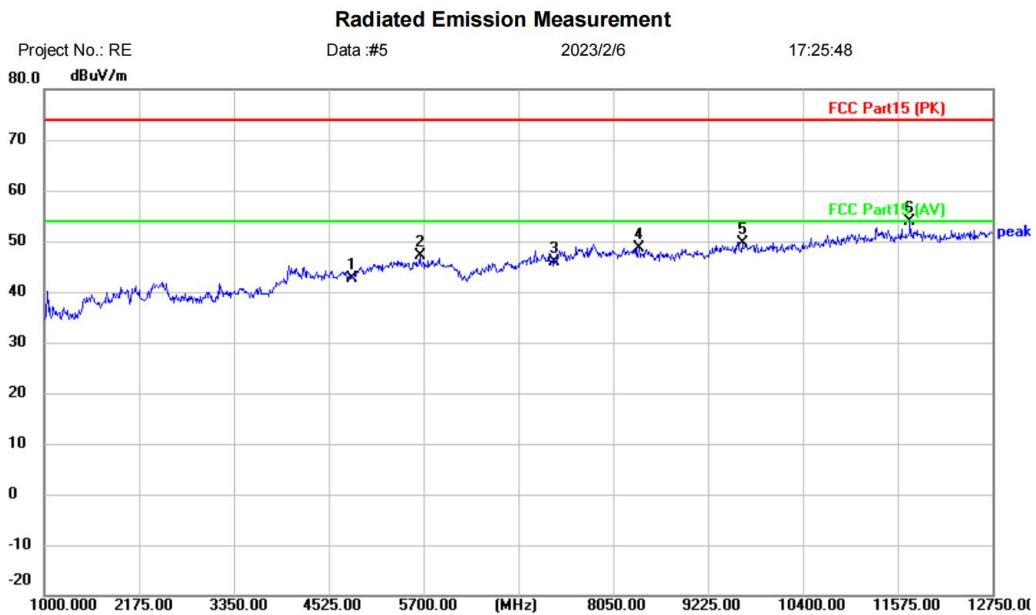

Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: Bluetooth voice remote control		
M/N: AN2704-11P-003		
Mode: BLE TX-L		
Note:		


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4824.000	38.53	4.13	42.66	74.00	-31.34	peak	
2		5653.000	40.26	6.76	47.02	74.00	-26.98	peak	
3		7326.000	37.64	8.21	45.85	74.00	-28.15	peak	
4		8367.250	39.63	9.07	48.70	74.00	-25.30	peak	
5		9648.000	38.51	11.01	49.52	74.00	-24.48	peak	
6	*	11727.750	40.19	13.77	53.96	74.00	-20.04	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX low channel]; [Polarity: Vertical]

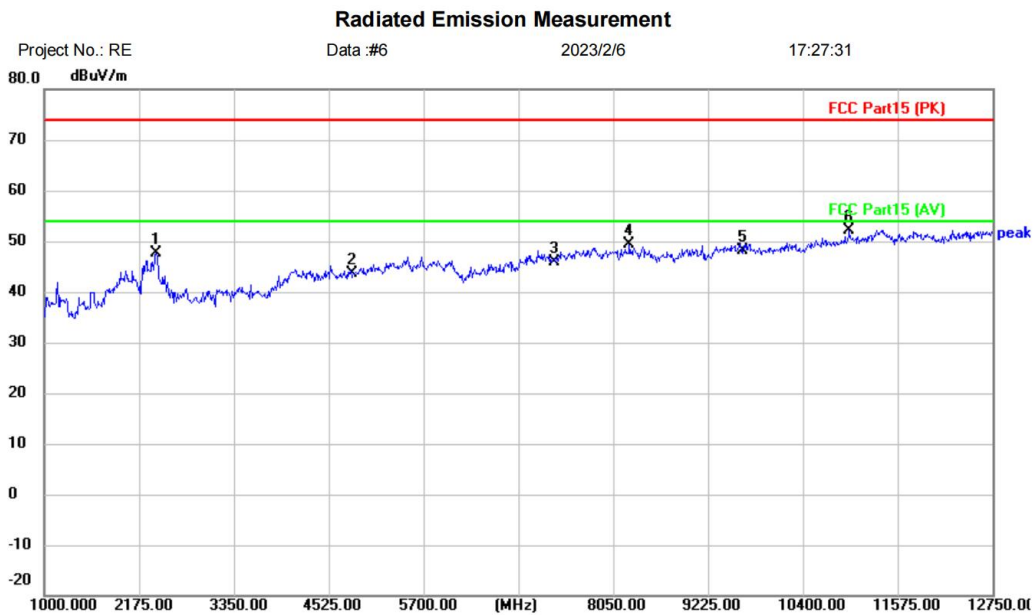

Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Bluetooth voice remote control
 M/N: AN2704-11P-003
 Mode: BLE TX-L
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2386.500	48.66	-1.11	47.55	74.00	-26.45	peak	
2		4824.000	39.58	4.13	43.71	74.00	-30.29	peak	
3		7326.000	37.73	8.21	45.94	74.00	-28.06	peak	
4		8249.750	40.26	9.01	49.27	74.00	-24.73	peak	
5		9648.000	37.12	11.01	48.13	74.00	-25.87	peak	
6	*	10975.750	38.73	13.42	52.15	74.00	-21.85	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX mid channel]; [Polarity: Horizontal]

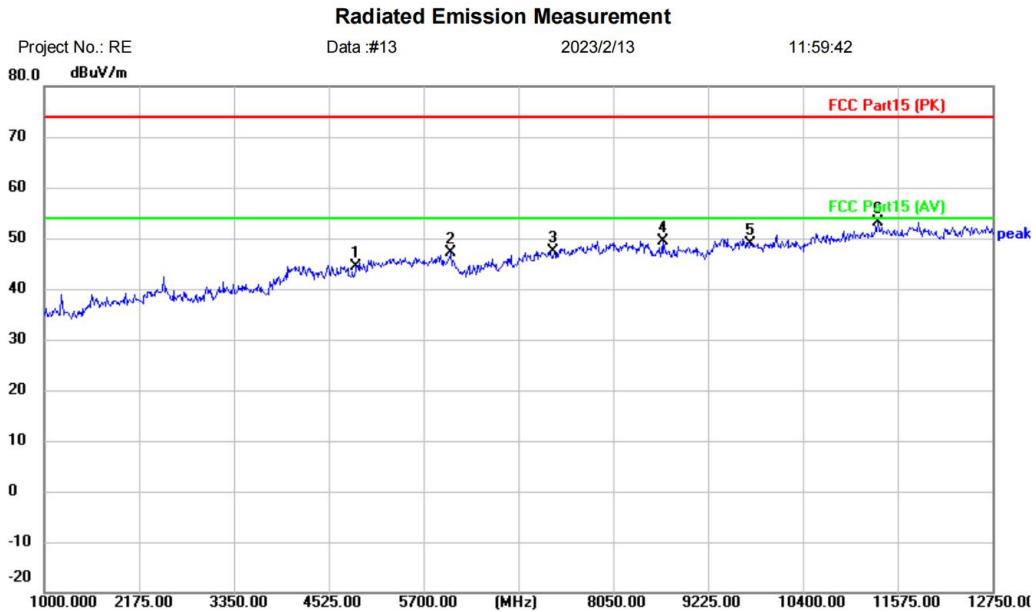

Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Bluetooth voice remote control
 M/N: AN2704-11P-003
 Mode: BLE TX-M
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4874.000	39.98	4.32	44.30	74.00	-29.70	peak	
2		6040.750	43.14	4.07	47.21	74.00	-26.79	peak	
3		7311.000	39.20	8.18	47.38	74.00	-26.62	peak	
4		8661.000	40.23	9.20	49.43	74.00	-24.57	peak	
5		9748.000	37.50	11.26	48.76	74.00	-25.24	peak	
6	*	11328.250	39.56	13.59	53.15	74.00	-20.85	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX mid channel]; [Polarity: Vertical]

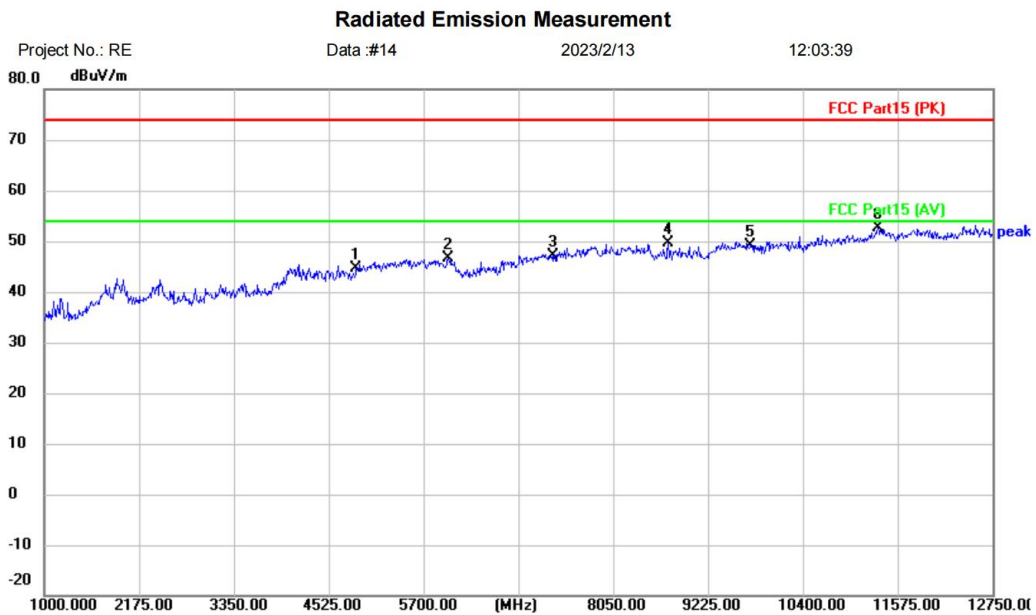

Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Bluetooth voice remote control
 M/N: AN2704-11P-003
 Mode: BLE TX-M
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4874.000	40.40	4.32	44.72	74.00	-29.28	peak	
2		6005.500	42.75	3.92	46.67	74.00	-27.33	peak	
3		7311.000	38.97	8.18	47.15	74.00	-26.85	peak	
4		8731.500	40.28	9.23	49.51	74.00	-24.49	peak	
5		9748.000	37.97	11.26	49.23	74.00	-24.77	peak	
6	*	11328.250	38.92	13.59	52.51	74.00	-21.49	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Horizontal]

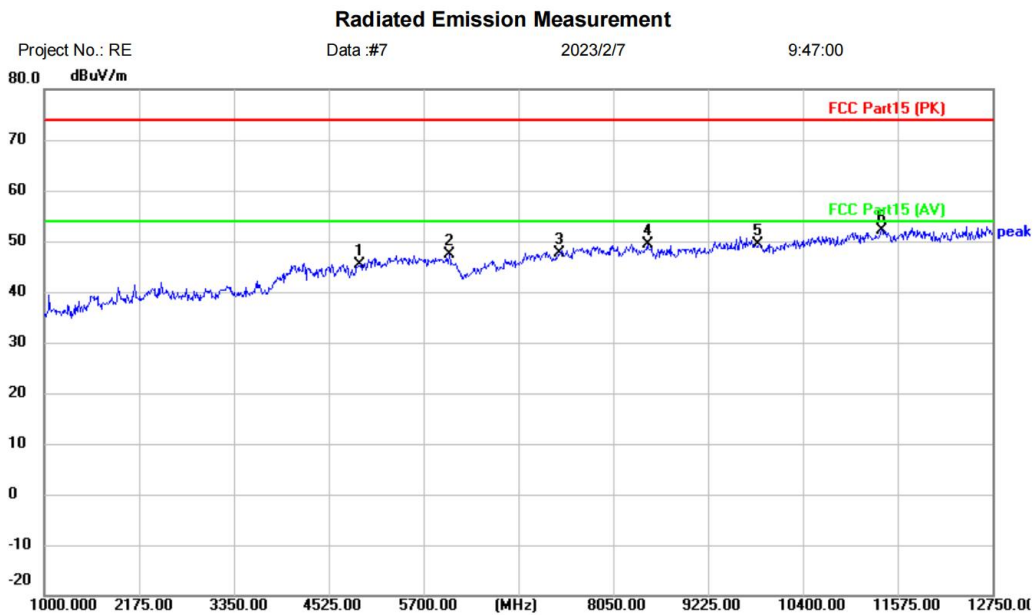

Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Bluetooth voice remote control
 M/N: AN2704-11P-003
 Mode: BLE TX-H
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4924.000	40.57	4.82	45.39	74.00	-28.61	peak	
2		6017.250	43.29	3.97	47.26	74.00	-26.74	peak	
3		7386.000	39.26	8.36	47.62	74.00	-26.38	peak	
4		8473.000	40.33	9.12	49.45	74.00	-24.55	peak	
5		9848.000	37.86	11.52	49.38	74.00	-24.62	peak	
6	*	11375.250	38.63	13.62	52.25	74.00	-21.75	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Vertical]

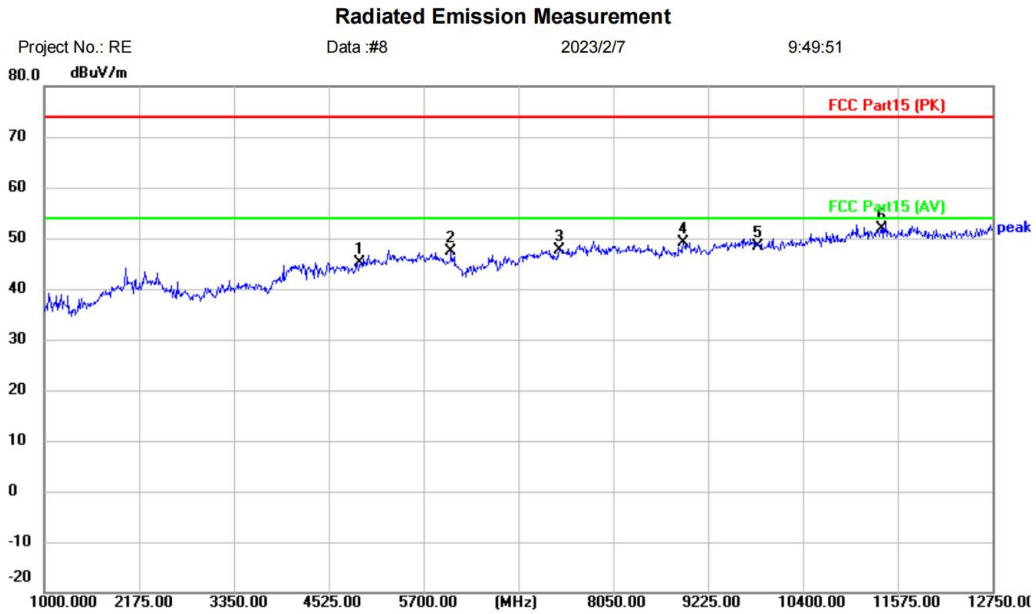

Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Bluetooth voice remote control
 M/N: AN2704-11P-003
 Mode: BLE TX-H
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		4924.000	40.23	4.82	45.05	74.00	-28.95	peak	
2		6040.750	43.26	4.07	47.33	74.00	-26.67	peak	
3		7386.000	39.32	8.36	47.68	74.00	-26.32	peak	
4		8919.500	39.71	9.31	49.02	74.00	-24.98	peak	
5		9848.000	36.74	11.52	48.26	74.00	-25.74	peak	
6	*	11375.250	38.24	13.62	51.86	74.00	-22.14	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

Remark:

1. Final Level = Receiver Read level + Correct factor
2. Correct factor = Antenna Factor + Cable Loss – Preamplifier Factor
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

BlueAsia

13 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

13.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

13.2 BLOCK DIAGRAM OF TEST SETUP

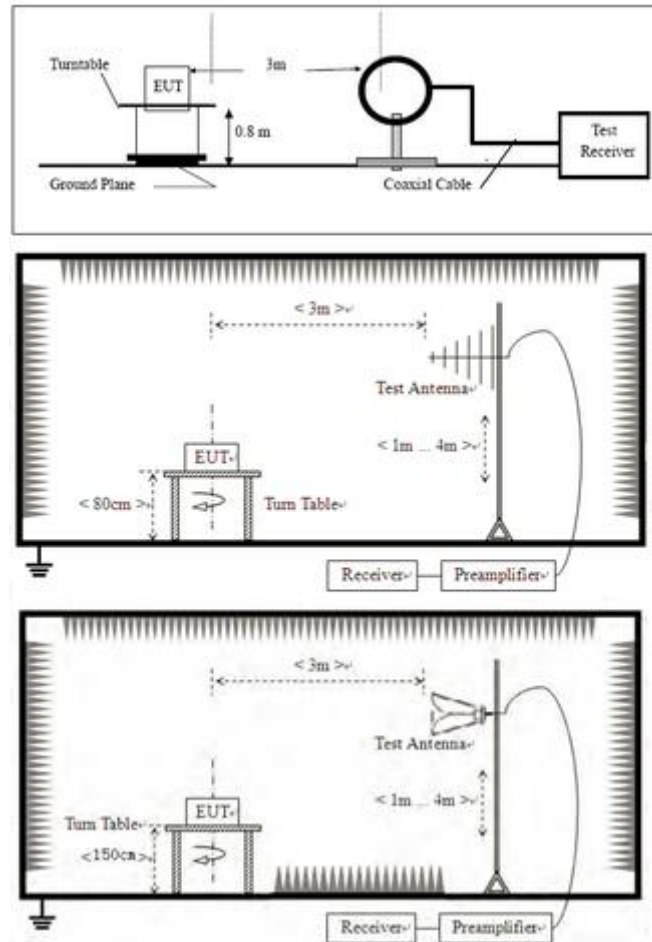

13.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: $Level = Read\ Level + Cable\ Loss + Antenna\ Factor - Preamp\ Factor$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

13.4 TEST DATA

[TestMode: TX low channel]; [Polarity: Horizontal]

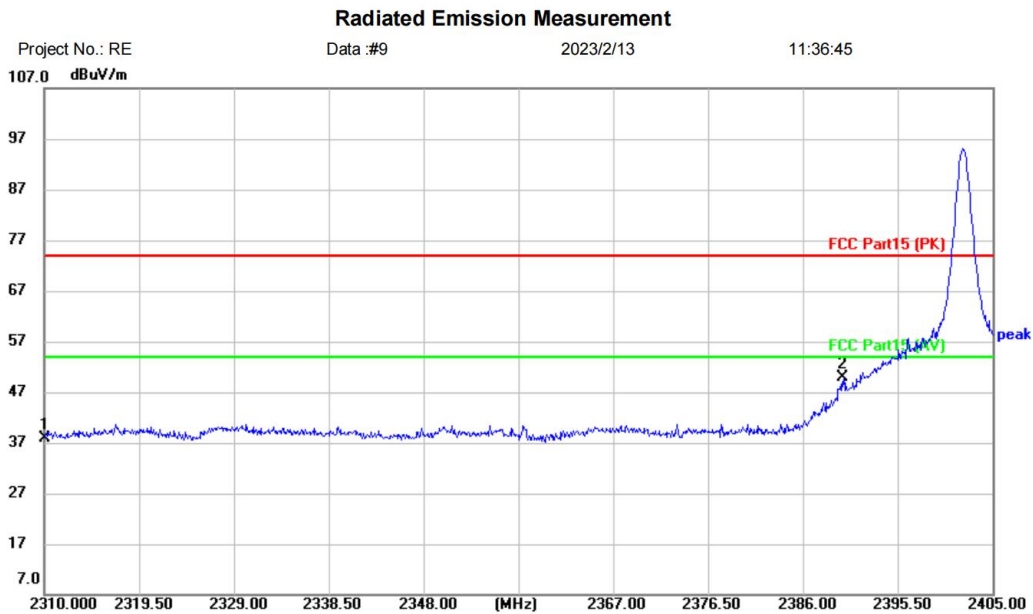

Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: Bluetooth voice remote control		
M/N: AN2704-1IP-003		
Mode: BLE TX-L		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2310.000	42.11	-4.27	37.84	74.00	-36.16	peak	
2	*	2390.000	53.63	-3.82	49.81	74.00	-24.19	peak	

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

[TestMode: TX low channel]; [Polarity: Vertical]

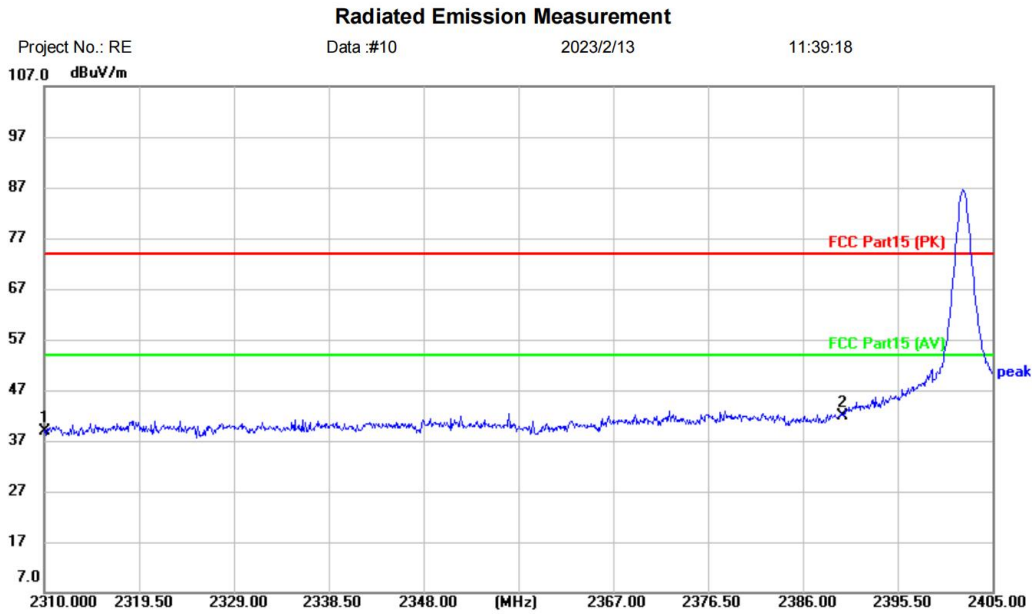

Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: Bluetooth voice remote control		
M/N: AN2704-11P-003		
Mode: BLE TX-L		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2310.000	43.10	-4.27	38.83	74.00	-35.17	peak	
2	*	2390.000	45.73	-3.82	41.91	74.00	-32.09	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass