

# FCC REPORT

**Applicant:** Netronix Group.INC  
**Address of Applicant:** 3401 Greys Ferry Avenue Philadelphia, PA 19146  
**Manufacturer/Factory:** Shenzhen Hampoo Science & Technology Co., Ltd.  
**Address of Manufacturer/Factory:** 21F, Block A, Building 11, the interchange between Keji South Road and Gaoxin South 9th Road, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, China

### Equipment Under Test (EUT)

**Product Name:** Thiamis  
**Model No.:** 1000  
**Trade mark:** N/A  
**FCC ID:** 2AN9Q-1000  
**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.247  
**Date of sample receipt:** October 28, 2018  
**Date of Test:** October 28- December 07, 2018  
**Date of report issued:** December 07, 2018  
**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

A handwritten signature in black ink, appearing to read 'Robinson Lo', is written over a circular blue stamp. The stamp contains the text 'GLOBAL UNITED TECHNOLOGY SERVICES CO., LTD.' around the perimeter and 'GTS' in the center. The date '2018 Dec.' is also visible within the stamp.

**Robinson Lo**

**Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 2 Version

Version No.	Date	Description
00	December 07, 2018	Original

Prepared By:



**Project Engineer**

Date:

December 07, 2018

Check By:



**Reviewer**

Date:

December 07, 2018

## 3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
4.1 MEASUREMENT UNCERTAINTY .....	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT .....	5
5.2 TEST MODE .....	7
5.3 DESCRIPTION OF SUPPORT UNITS .....	7
5.4 TEST FACILITY.....	7
5.5 TEST LOCATION .....	7
6 TEST INSTRUMENTS LIST .....	8
7 TEST RESULTS AND MEASUREMENT DATA.....	10
7.1 ANTENNA REQUIREMENT .....	10
7.2 CONDUCTED EMISSIONS .....	11
7.3 CONDUCTED PEAK OUTPUT POWER.....	14
7.4 CHANNEL BANDWIDTH .....	15
7.5 POWER SPECTRAL DENSITY .....	17
7.6 BAND EDGES.....	19
7.6.1 Conducted Emission Method.....	19
7.6.2 Radiated Emission Method.....	21
7.7 SPURIOUS EMISSION.....	24
7.7.1 Conducted Emission Method.....	24
7.7.2 Radiated Emission Method.....	31
8 TEST SETUP PHOTO .....	39
9 EUT CONSTRUCTIONAL DETAILS .....	40

## 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

*Pass: The EUT complies with the essential requirements in the standard.*

*Remark : Test according to ANSI C63.4:2014 and ANSI C63.10:2013*

*N/A means not applicable.*

### 4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

## 5 General Information

### 5.1 General Description of EUT

Product Name:	Thiamis
Model No.:	1000
Serial No.:	1018453
Test sample(s) ID:	GTS201812000044-1
Sample(s) Status	Engineer sample
Operation Frequency:	2405MHz~2480MHz
Channel numbers:	16
Channel separation:	5MHz
Modulation type:	O-QPSK
Antenna Type:	Integral Antenna
Antenna gain:	0dBi(declare by Applicant)
Power supply:	DC12V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2405MHz	5	2425MHz	9	2445MHz	13	2465MHz
2	2410MHz	6	2430MHz	10	2450MHz	14	2470MHz
3	2415MHz	7	2435MHz	11	2455MHz	15	2475MHz
4	2420MHz	8	2440MHz	12	2460MHz	16	2480 MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2405MHz
The middle channel	2440MHz
The Highest channel	2480MHz

## 5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

## 5.3 Description of Support Units

None
------

## 5.4 Test Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"><li>● <b>FCC —Registration No.: 381383</b> Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383, January 08, 2018</li><li>● <b>Industry Canada (IC) —Registration No.: 9079A-2</b> The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016.</li></ul>
--

## 5.5 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China Tel: 0755-27798480 Fax: 0755-27798960

## 6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 27 2018	June. 26 2019
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 27 2018	June. 26 2019
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 27 2018	June. 26 2019
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 27 2018	June. 26 2019
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 27 2018	June. 26 2019
9	Coaxial Cable	GTS	N/A	GTS211	June. 27 2018	June. 26 2019
10	Coaxial cable	GTS	N/A	GTS210	June. 27 2018	June. 26 2019
11	Coaxial Cable	GTS	N/A	GTS212	June. 27 2018	June. 26 2019
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 27 2018	June. 26 2019
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 27 2018	June. 26 2019
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 27 2018	June. 26 2019
15	Band filter	Amindeon	82346	GTS219	June. 27 2018	June. 26 2019
16	Power Meter	Anritsu	ML2495A	GTS540	June. 27 2018	June. 26 2019
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 27 2018	June. 26 2019
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 27 2018	June. 26 2019
19	Splitter	Agilent	11636B	GTS237	June. 27 2018	June. 26 2019
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 27 2018	June. 26 2019




<b>Conducted Emission</b>						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.16 2014	May.15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 27 2018	June. 26 2019
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 27 2018	June. 26 2019
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June. 27 2018	June. 26 2019
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June. 27 2018	June. 26 2019
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	June. 27 2018	June. 26 2019

<b>RF Conducted Test:</b>						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	June. 27 2018	June. 26 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 27 2018	June. 26 2019
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June. 27 2018	June. 26 2019
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	June. 27 2018	June. 26 2019
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	June. 27 2018	June. 26 2019
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	June. 27 2018	June. 26 2019
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	June. 27 2018	June. 26 2019
8	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 27 2018	June. 26 2019
9	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	June. 27 2018	June. 26 2019

<b>General used equipment:</b>						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 27 2018	June. 26 2019
2	Barometer	ChangChun	DYM3	GTS255	June. 27 2018	June. 26 2019

## 7 Test results and Measurement Data

### 7.1 Antenna requirement

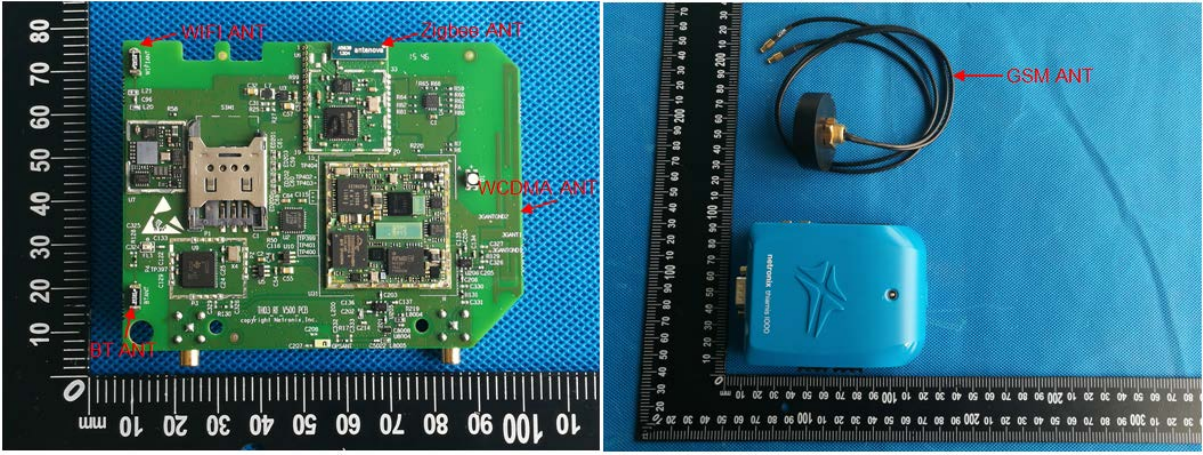
<b>Standard requirement:</b>	FCC Part15 C Section 15.203 /247(c)
<p><b>15.203 requirement:</b></p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p><b>15.247(c) (1)(i) requirement:</b></p> <p>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p>	
<b>EUT Antenna:</b>	
<p><i>The antenna is integral Antenna, the best case gain of the antenna is 0dBi</i></p>	
	

## 7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Test Frequency Range:	150KHz to 30MHz														
Class / Severity:	Class B														
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* Decreases with the logarithm of the frequency.</p>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test setup:	<p><i>Remark</i>  E.U.T: Equipment Under Test  LISN: Line Impedance Stabilization Network  Test table height=0.8m</p>														
Test procedure:	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.</li> </ol>														
Test Instruments:	Refer to section 6.0 for details														
Test mode:	Refer to section 5.2 for details														
Test voltage:	AC 120V, 60Hz														
Test results:	Pass														


**Measurement data**

EUT :	Thiamis	Model Name. :	1000
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	Input: AC120V/60Hz Output: DC 12V	Test Mode :	Worst mode-GFSK

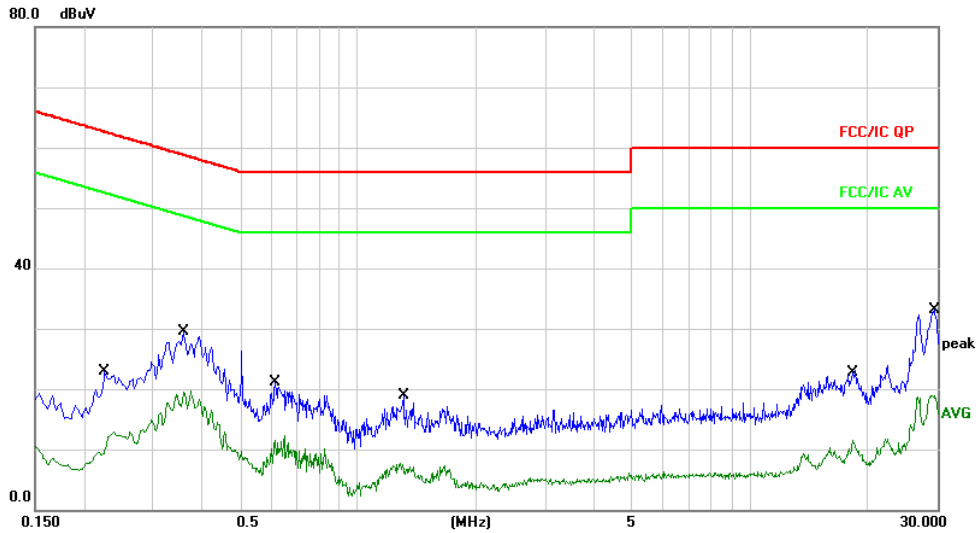

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2260	13.23	9.65	22.88	62.59	-39.71	QP	
2		0.2260	3.28	9.65	12.93	52.59	-39.66	AVG	
3		0.3580	19.87	9.67	29.54	58.77	-29.23	QP	
4		0.3580	10.01	9.67	19.68	48.77	-29.09	AVG	
5		0.6140	11.33	9.68	21.01	56.00	-34.99	QP	
6		0.6140	2.57	9.68	12.25	46.00	-33.75	AVG	
7		1.3060	9.25	9.70	18.95	56.00	-37.05	QP	
8		1.3060	-1.99	9.70	7.71	46.00	-38.29	AVG	
9		18.2420	13.17	9.87	23.04	60.00	-36.96	QP	
10		18.2420	1.63	9.87	11.50	50.00	-38.50	AVG	
11	*	29.3940	23.27	9.87	33.14	60.00	-26.86	QP	
12		29.3940	9.13	9.87	19.00	50.00	-31.00	AVG	

EUT :	Thiamis	Model Name. :	1000
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	Input: AC120V/60Hz Output: DC 12V	Test Mode :	Worst mode-GFSK

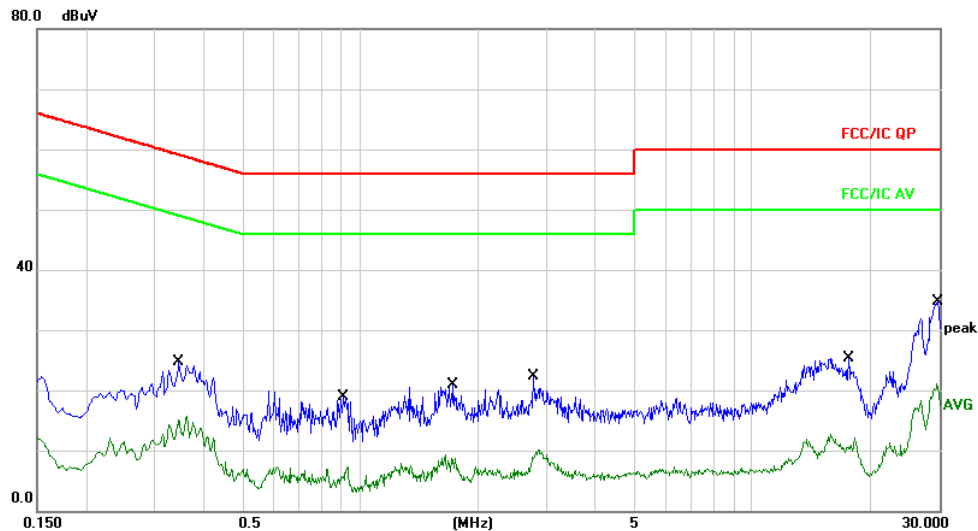


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.3460	14.98	9.66	24.64	59.06	-34.42	QP	
2		0.3460	6.01	9.66	15.67	49.06	-33.39	AVG	
3		0.9060	9.12	9.69	18.81	56.00	-37.19	QP	
4		0.9060	-2.43	9.69	7.26	46.00	-38.74	AVG	
5		1.7340	11.16	9.70	20.86	56.00	-35.14	QP	
6		1.7340	-1.01	9.70	8.69	46.00	-37.31	AVG	
7		2.7740	12.64	9.72	22.36	56.00	-33.64	QP	
8		2.7740	0.38	9.72	10.10	46.00	-35.90	AVG	
9		17.6540	15.47	9.87	25.34	60.00	-34.66	QP	
10		17.6540	2.23	9.87	12.10	50.00	-37.90	AVG	
11	*	29.6940	24.84	9.86	34.70	60.00	-25.30	QP	
12		29.6940	11.16	9.86	21.02	50.00	-28.98	AVG	

**Notes:**

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.


### 7.3 Conducted Peak Output Power

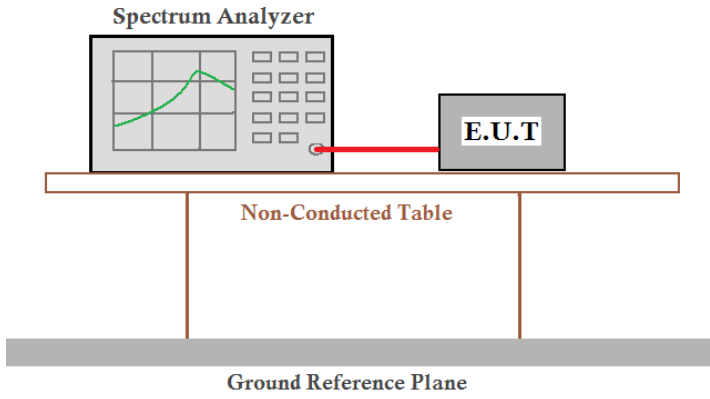Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05
Limit:	30dBm
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two legs and sits on a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

#### Measurement Data

Frequency (MHz)	Peak Output Power (dBm)	Limit(dBm)	Result
2405	6.14	30	PASS
2440	6.28		
2480	5.83		

## 7.4 Channel Bandwidth

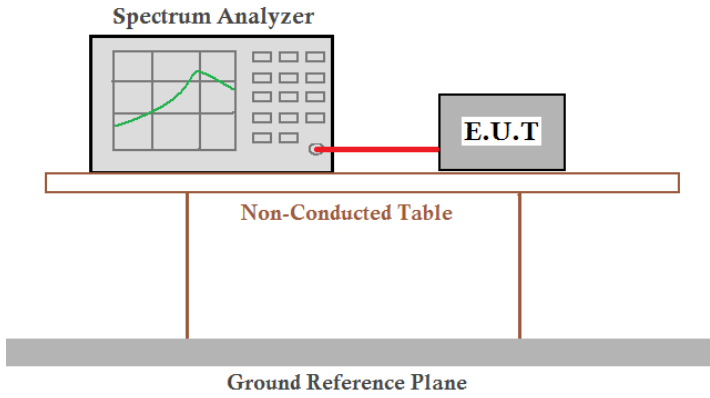
Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05
Limit:	>500KHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

## Measurement Data


Frequency (MHz)	Channel Bandwidth (MHz)	Limit(KHz)	Result
2405	1.621	>500	Pass
2440	1.650		
2480	1.664		

Test plot as follows:


Lowest channel

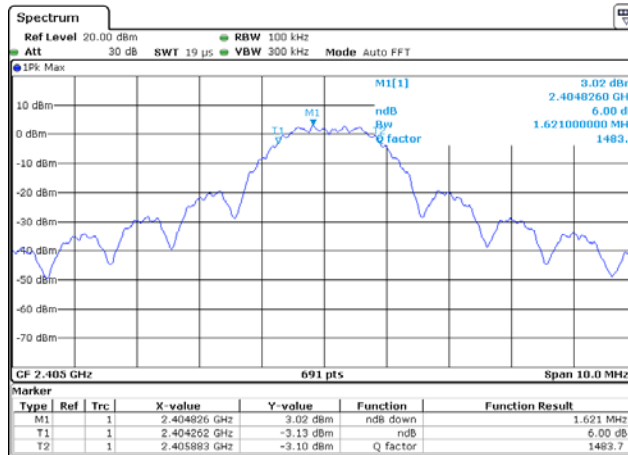

Middle channel

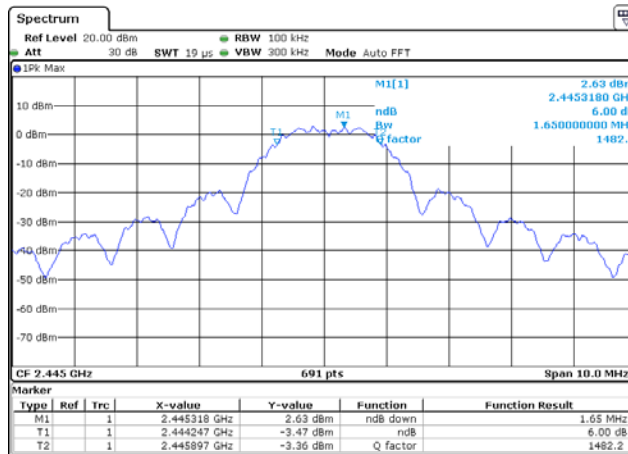


Highest channel

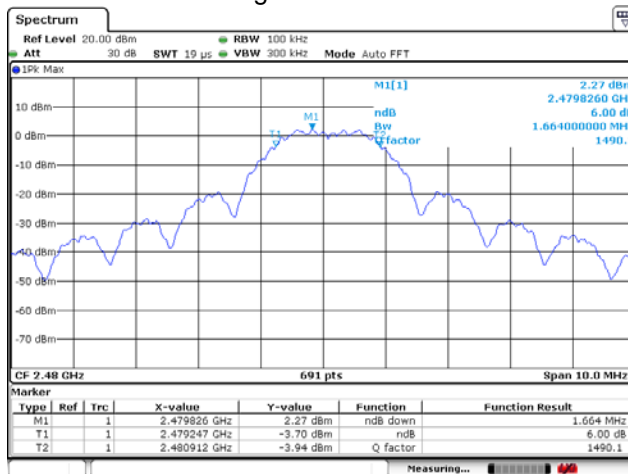



## 7.5 Power Spectral Density

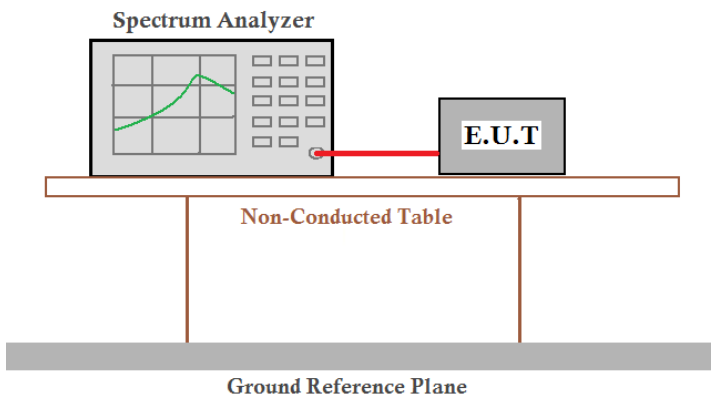
Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05
Limit:	8dBm/3kHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement Data


Frequency (MHz)	Power Spectral Density (dBm)	Limit (dBm/3kHz)	Result
2405	-6.49	8.00	Pass
2440	-7.15		
2480	-7.21		

Test plot as follows:


Lowest channel

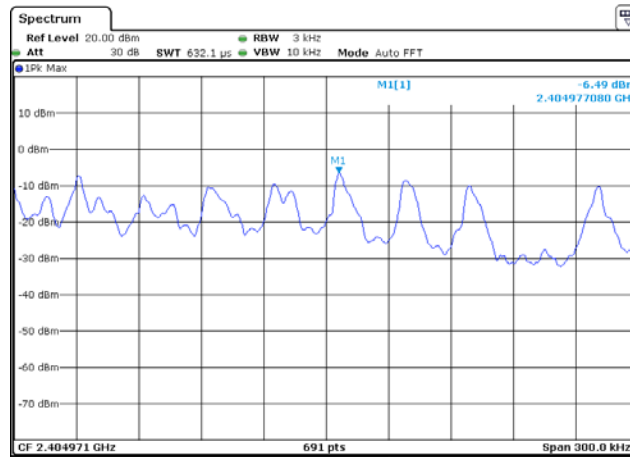

Middle channel

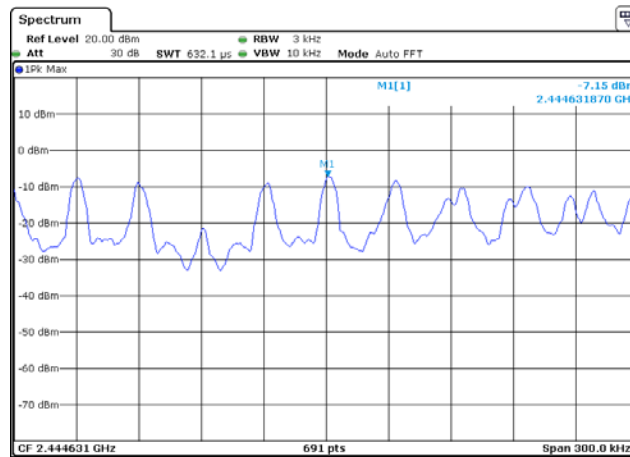


Highest channel

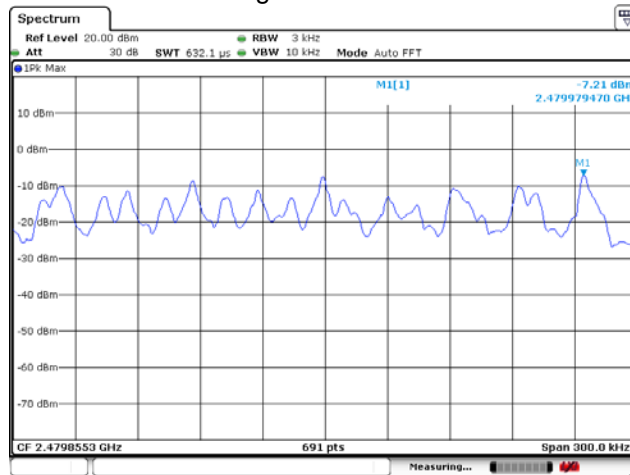


## 7.6 Band edges

### 7.6.1 Conducted Emission Method

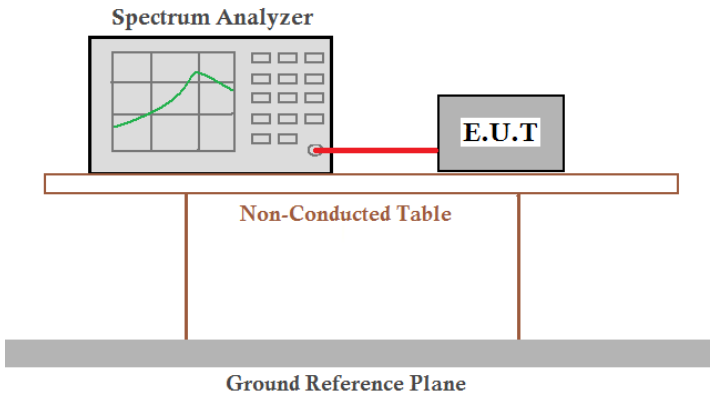
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two legs. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Test plot as follows:

Lowest channel

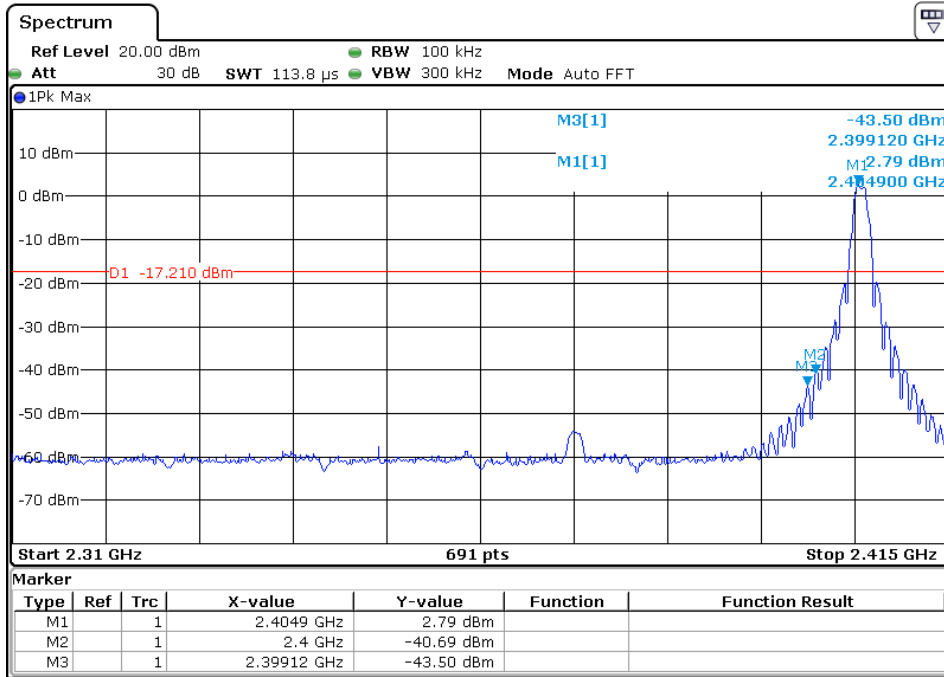

Highest channel

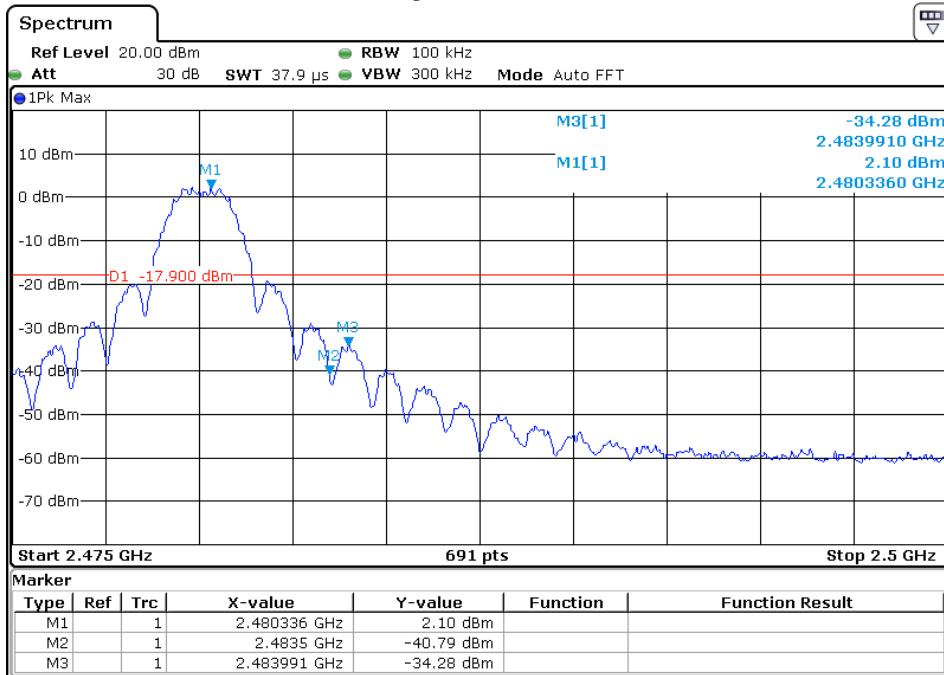

## 7.6.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		RMS	1MHz	3MHz	Average
Limit:	Frequency		Limit (dBuV/m @3m)		Value
	Above 1GHz		54.00		Average
			74.00		Peak
Test setup:					
Test Procedure:	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> <li>7. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.</li> </ol>				
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.2 for details				
Test results:	Pass				

**Measurement data:**

Remark: The pre-test were performed on lowest, middle and highest frequencies, only the worst case's was showed.

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	37.95	27.91	5.30	24.64	46.52	74.00	-27.48	Vertical
2390.00	38.45	27.59	5.38	24.71	46.71	74.00	-27.29	Vertical
2400.00	38.68	27.58	5.39	24.72	46.93	74.00	-27.07	Vertical
2310.00	36.27	27.91	5.30	24.64	44.84	74.00	-29.16	Horizontal
2390.00	36.71	27.59	5.38	24.71	44.97	74.00	-29.03	Horizontal
2400.00	38.05	27.58	5.39	24.72	46.30	74.00	-27.70	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	29.13	27.91	5.30	24.64	37.70	54.00	-16.30	Vertical
2390.00	29.54	27.59	5.38	24.71	37.80	54.00	-16.20	Vertical
2400.00	30.07	27.58	5.39	24.72	38.32	54.00	-15.68	Vertical
2310.00	26.96	27.91	5.30	24.64	35.53	54.00	-18.47	Horizontal
2390.00	28.25	27.59	5.38	24.71	36.51	54.00	-17.49	Horizontal
2400.00	28.69	27.58	5.39	24.72	36.94	54.00	-17.06	Horizontal

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	41.65	27.53	5.47	24.80	49.85	74.00	-24.15	Vertical
2500.00	32.46	27.55	5.49	24.86	40.64	74.00	-33.36	Vertical
2483.50	34.87	27.53	5.47	24.80	43.07	74.00	-30.93	Horizontal
2500.00	25.90	27.55	5.49	24.86	34.08	74.00	-39.92	Horizontal

Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	34.41	27.53	5.47	24.80	42.61	54.00	-11.39	Vertical
2500.00	24.47	27.55	5.49	24.86	32.65	54.00	-21.35	Vertical
2483.50	25.08	27.53	5.47	24.80	33.28	54.00	-20.72	Horizontal
2500.00	18.41	27.55	5.49	24.86	26.59	54.00	-27.41	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 7.7 Spurious Emission

### 7.7.1 Conducted Emission Method

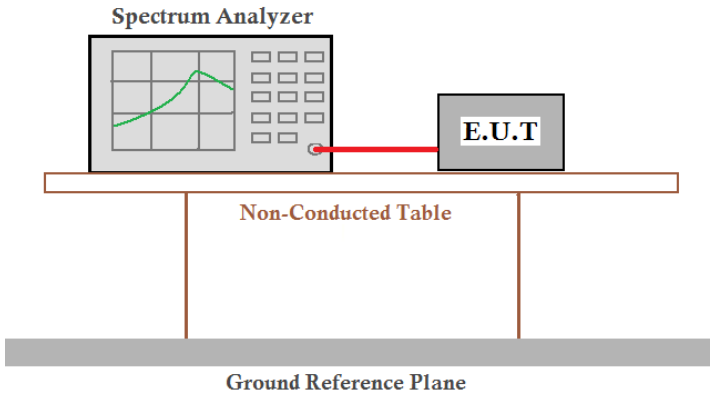Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V05
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass




Test plot as follows:


Result plot as follows:

Channel 1: 2.405GHz:


30 MHz to 1 GHz

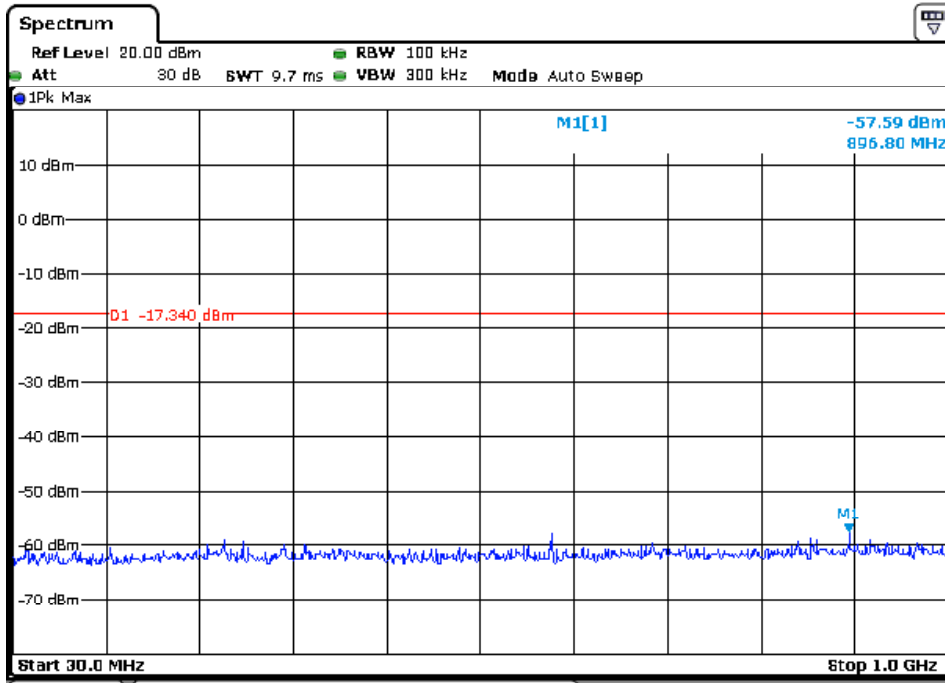


1 G to 3 GHz

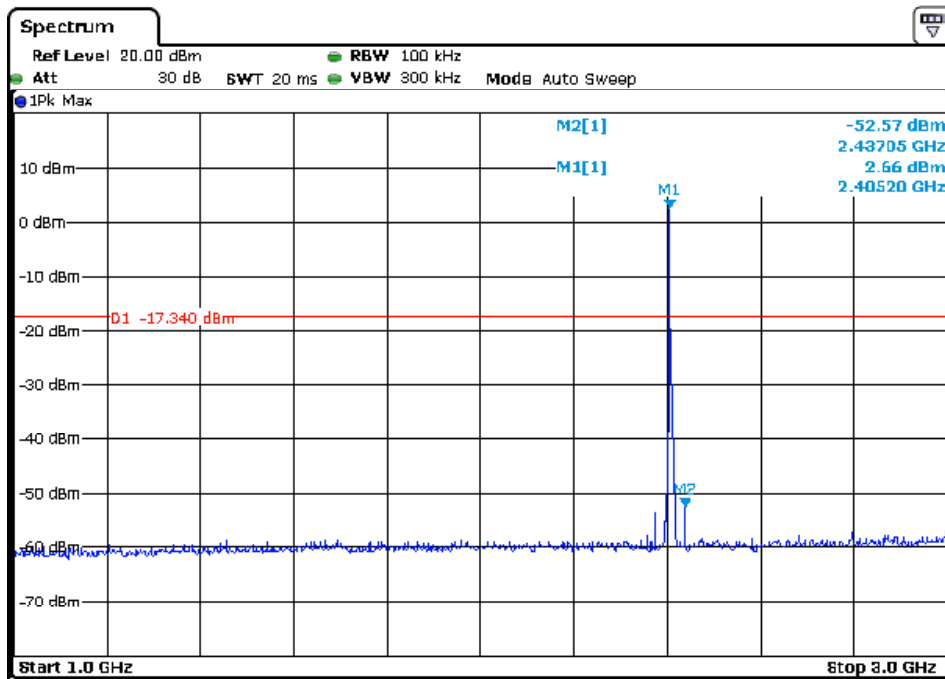

### 3 G to 13 GHz

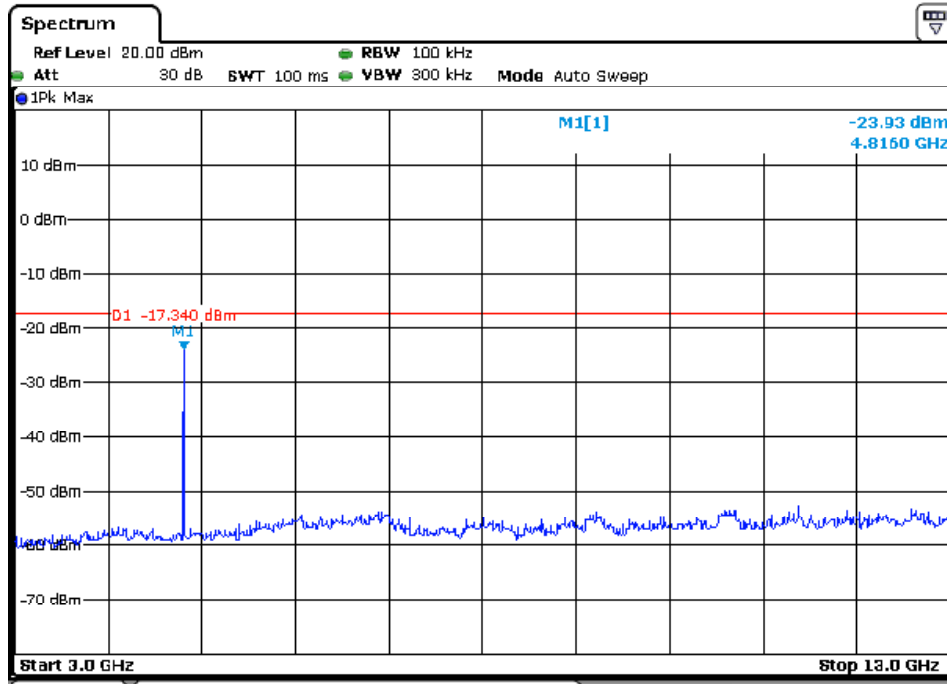


### 13 G to 25 GHz

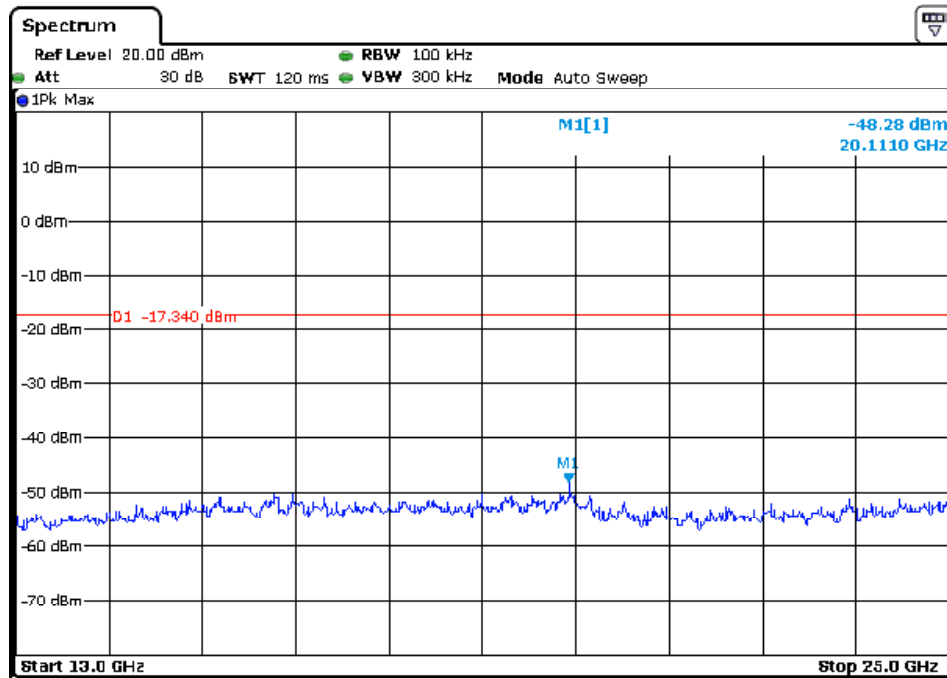


Channel 9: 2.445GHz:


30 MHz to 1 GHz

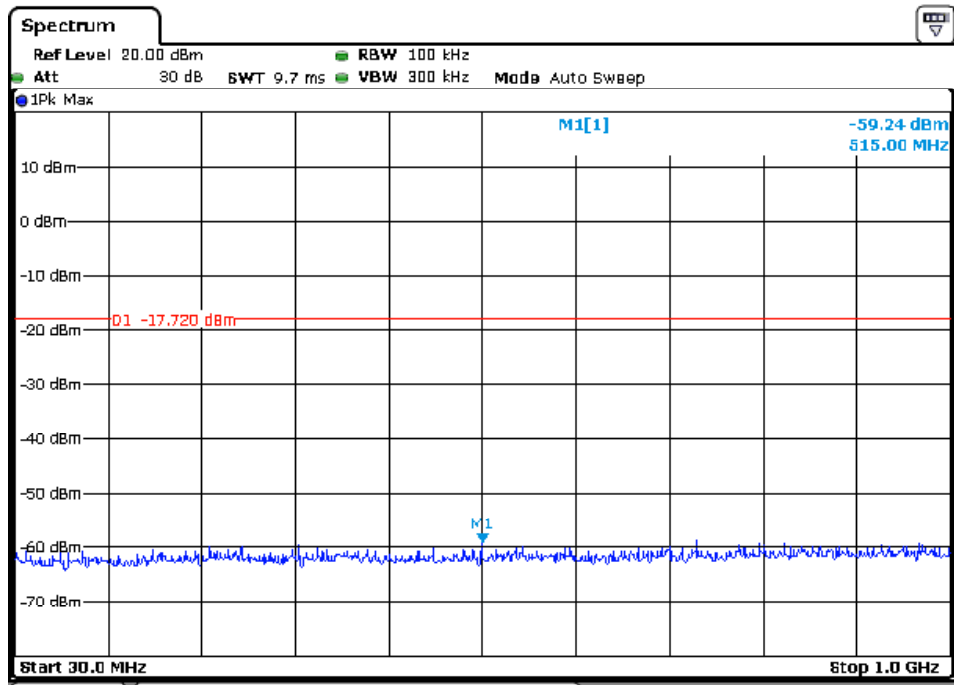


1 G to 3 GHz

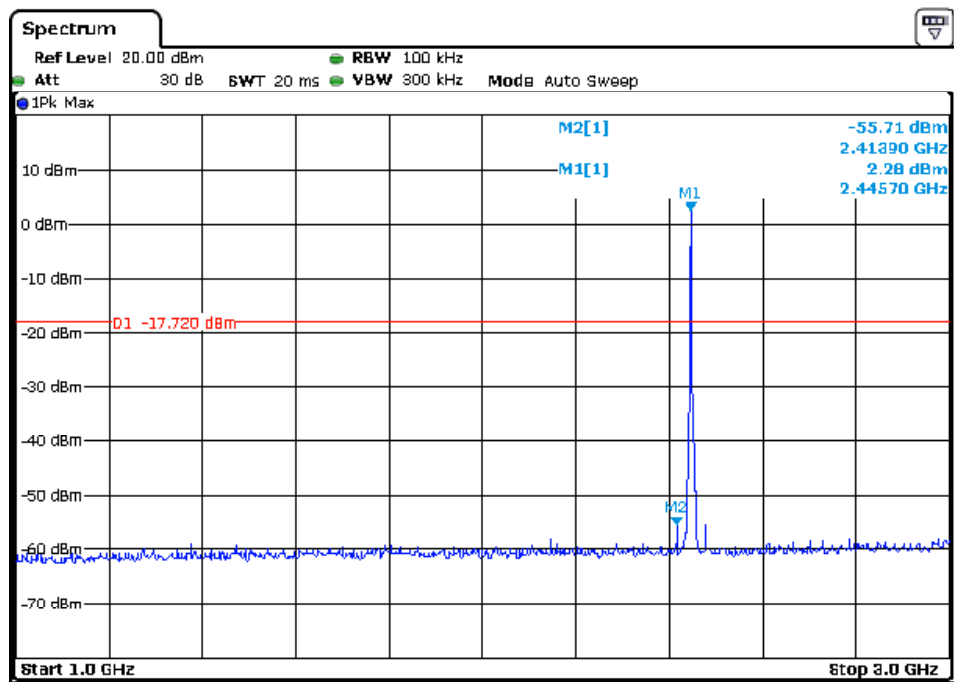

### 3 G to 13 GHz

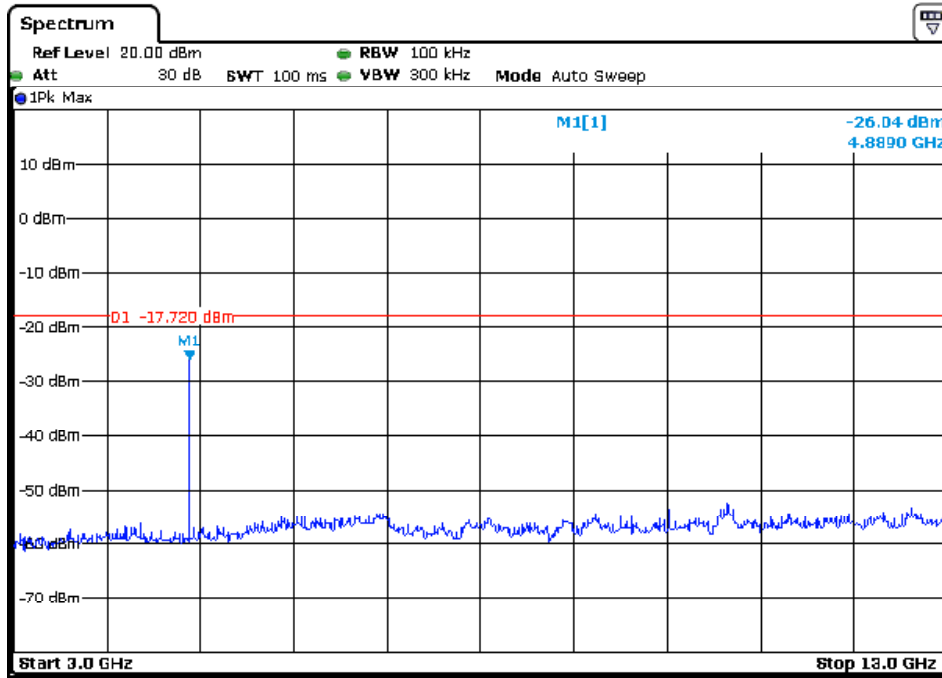


### 13 G to 25 GHz

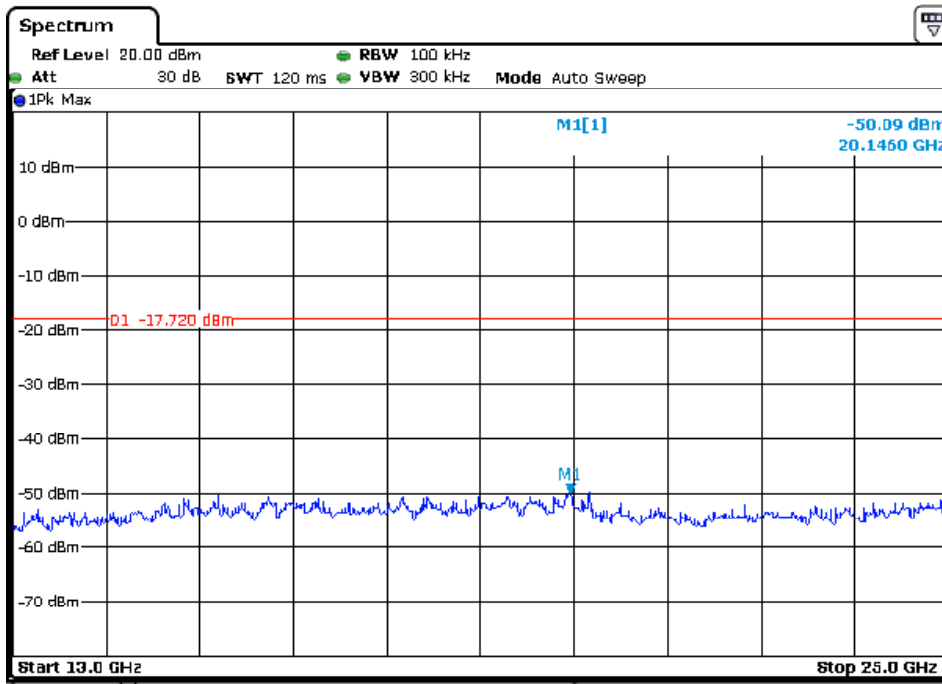


Channel 16:2.480 GHz


30 MHz to 1 GHz

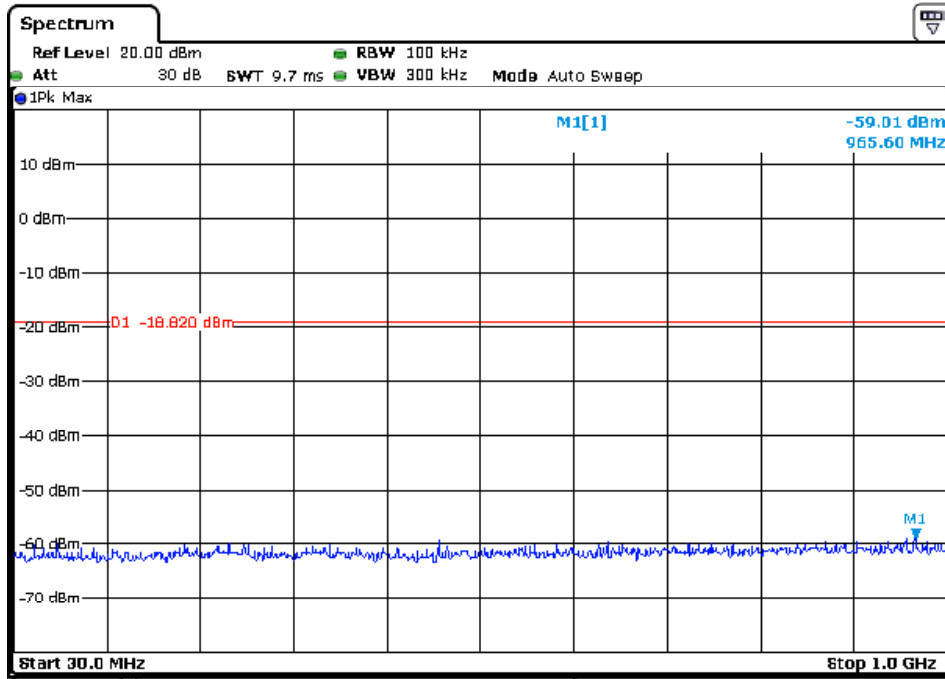


1 G to 3 GHz

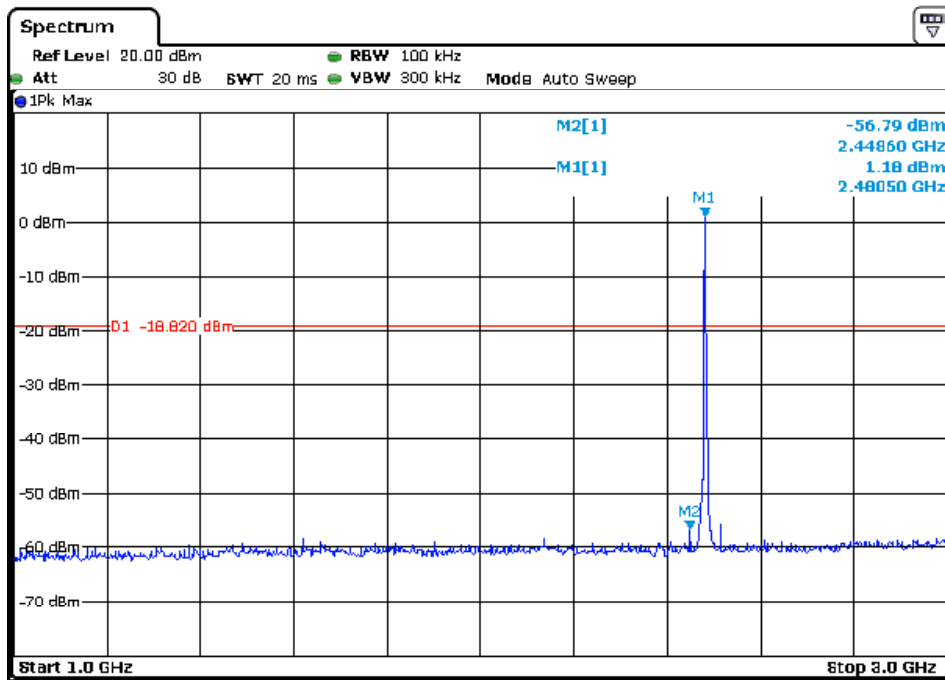

### 3 G to 13 GHz

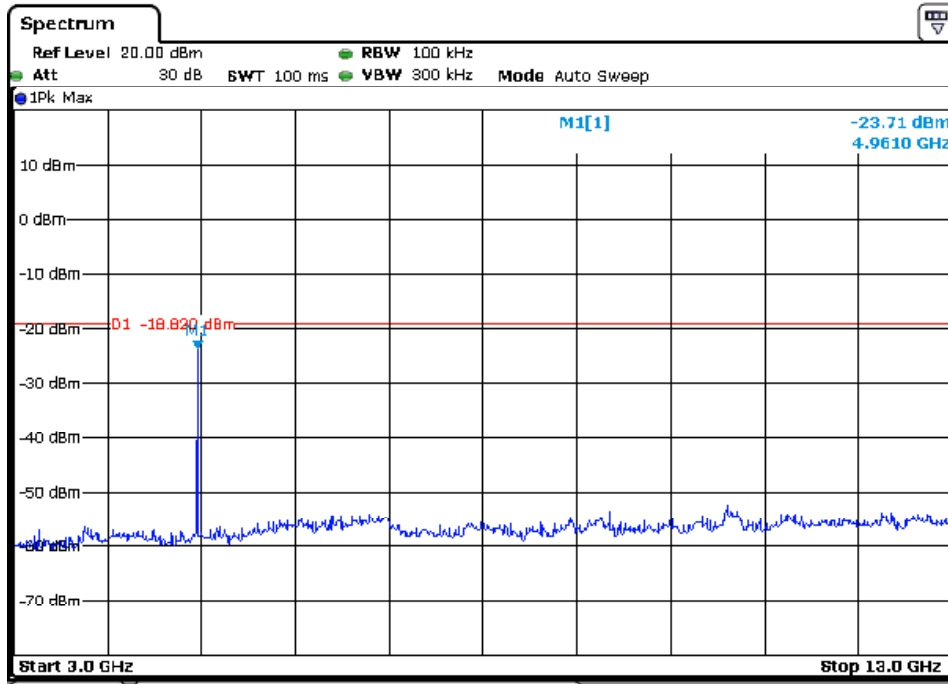

### 13 G to 25 GHz

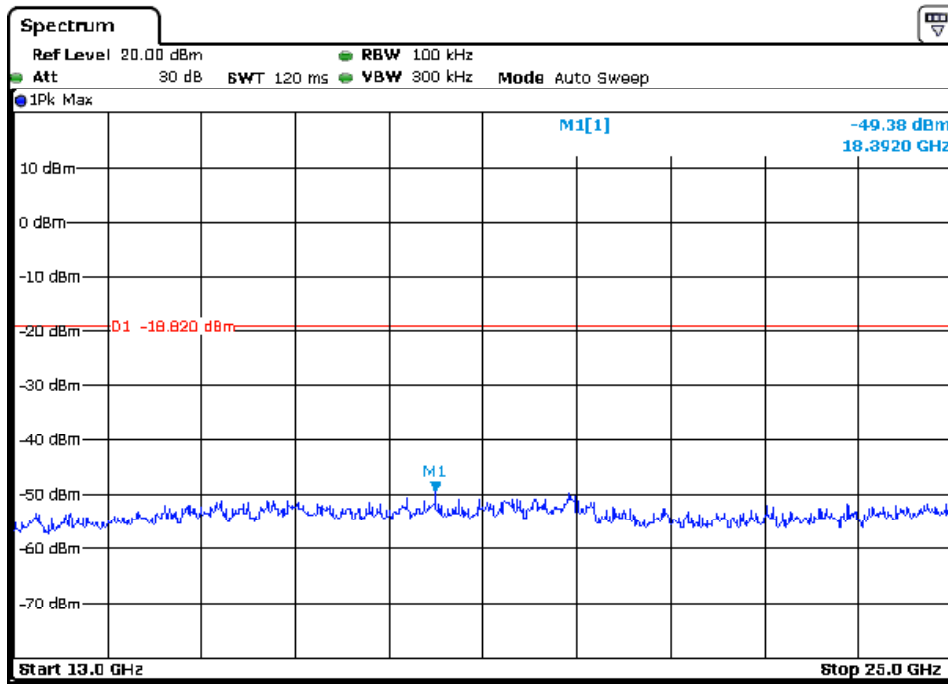


## 7.7.2 Radiated Emission Method


Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Limit: (Spurious Emissions)	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	300m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
5000		Peak			

Test setup:


Below 30MHz

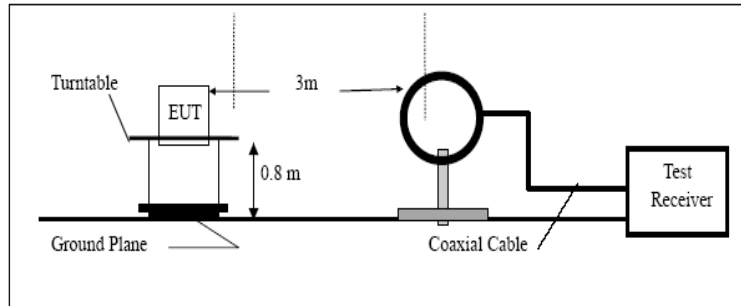

Below 1GHz

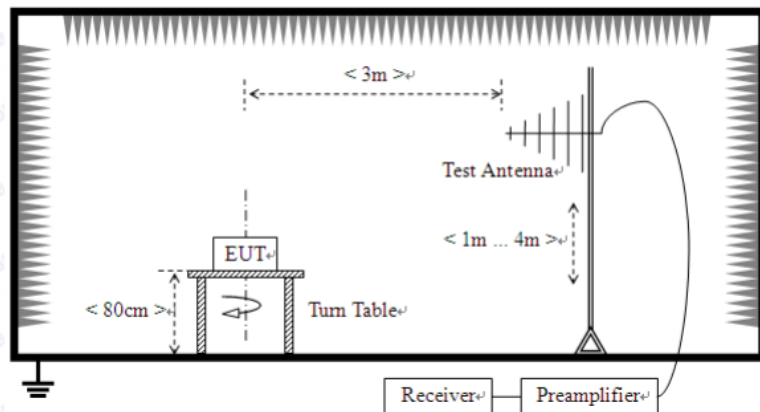

Above 1GHz

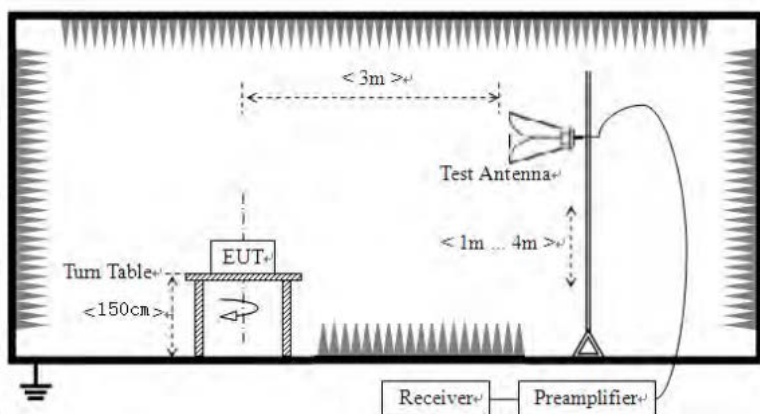



Test Procedure:	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test voltage:	AC 120V, 60Hz
Test results:	Pass

**Measurement data:**

**9 kHz ~ 30 MHz**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

*Remark:*


*Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.*

*Remark:*

All positions of the antenna are tested, only show the worst case: The antenna is perpendicular to the product.

■ Below 1GHz


<b>Mode:</b>	<b>Transmitting mode</b>	<b>Test by:</b>	<b>Jason</b>
<b>Temp./Hum.(%RH):</b>	<b>26°C/56%RH</b>	<b>Polarization:</b>	<b>Horizontal</b>

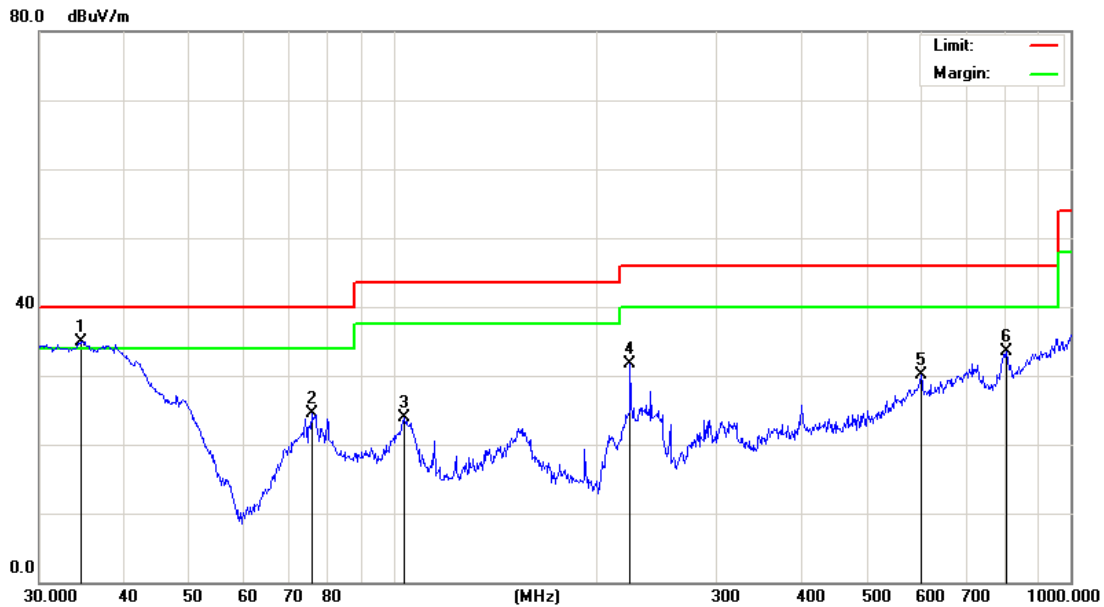

Quasi-peak measurement

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	34.5173	51.82	-16.87	34.95	40.00	-5.05	QP
2		75.7114	43.63	-19.18	24.45	40.00	-15.55	QP
3		103.8055	37.50	-13.65	23.85	43.50	-19.65	QP
4		223.7334	47.71	-15.94	31.77	46.00	-14.23	QP
5		601.4265	31.02	-0.89	30.13	46.00	-15.87	QP
6		804.6028	30.71	2.82	33.53	46.00	-12.47	QP

<b>Mode:</b>	<b>Transmitting mode</b>	<b>Test by:</b>	<b>Jason</b>
<b>Temp./Hum.(%RH):</b>	<b>26°C/56%RH</b>	<b>Polarization:</b>	<b>Vertical</b>

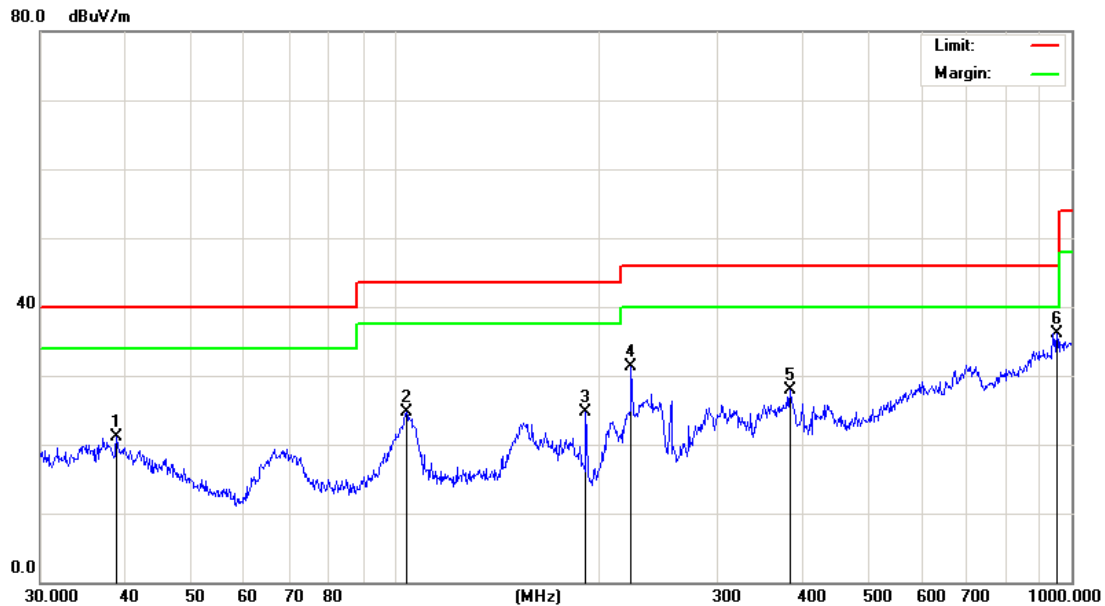

Quasi-peak measurement

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		38.8878	35.60	-14.51	21.09	40.00	-18.91	QP
2		104.1701	40.41	-15.63	24.78	43.50	-18.72	QP
3		191.7450	39.38	-14.75	24.63	43.50	-18.87	QP
4		223.7334	47.31	-15.94	31.37	46.00	-14.63	QP
5		383.9318	35.40	-7.45	27.95	46.00	-18.05	QP
6	*	952.0937	32.27	3.77	36.04	46.00	-9.96	QP

■ Above 1GHz

Test channel:	Lowest channel
---------------	----------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4810.00	49.72	31.17	8.60	37.66	51.83	74.00	-22.17	Vertical
7215.00	38.21	36.09	11.66	35.69	50.27	74.00	-23.73	Vertical
9620.00	29.43	37.84	14.14	34.91	46.50	74.00	-27.50	Vertical
12025.00	26.76	38.61	15.03	36.13	44.27	74.00	-29.73	Vertical
4810.00	48.12	31.17	8.60	37.66	50.23	74.00	-23.77	Horizontal
7215.00	41.54	36.09	11.66	35.69	53.60	74.00	-20.40	Horizontal
9620.00	27.36	37.84	14.14	34.91	44.43	74.00	-29.57	Horizontal
12025.00	26.92	38.61	15.03	36.13	44.43	74.00	-29.57	Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4810.00	43.87	31.17	8.60	37.66	45.98	54.00	-8.02	Vertical
7215.00	29.70	36.09	11.66	35.69	41.76	54.00	-12.24	Vertical
9620.00	19.44	37.84	14.14	34.91	36.51	54.00	-17.49	Vertical
12025.00	16.65	38.61	15.03	36.13	34.16	54.00	-19.84	Vertical
4810.00	42.78	31.17	8.60	37.66	44.89	54.00	-9.11	Horizontal
7215.00	30.32	36.09	11.66	35.69	42.38	54.00	-11.62	Horizontal
9620.00	17.29	37.84	14.14	34.91	34.36	54.00	-19.64	Horizontal
12025.00	16.46	38.61	15.03	36.13	33.97	54.00	-20.03	Horizontal

*Remark:*

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*
3. *“\*\*”, means this data is the too weak instrument of signal is unable to test.*

Test channel:	Middle channel
---------------	----------------

**Peak value:**

Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	polarization
4890.00	49.50	31.26	8.66	37.68	51.74	74.00	-22.26	Vertical
7335.00	39.86	36.32	11.72	35.64	52.26	74.00	-21.74	Vertical
9780.00	28.72	38.01	14.25	34.98	46.00	74.00	-28.00	Vertical
12225.00	25.58	38.64	15.14	36.26	43.10	74.00	-30.90	Vertical
4890.00	48.32	31.26	8.66	37.68	50.56	74.00	-23.44	Horizontal
7335.00	39.50	36.32	11.72	35.64	51.90	74.00	-22.10	Horizontal
9780.00	28.19	38.01	14.25	34.98	45.47	74.00	-28.53	Horizontal
12225.00	26.92	38.64	15.14	36.26	44.44	74.00	-29.56	Horizontal

**Average value:**

Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	polarization
4890.00	41.75	31.26	8.66	37.68	43.99	54.00	-10.01	Vertical
7335.00	32.13	36.32	11.72	35.64	44.53	54.00	-9.47	Vertical
9780.00	21.75	38.01	14.25	34.98	39.03	54.00	-14.97	Vertical
12225.00	15.15	38.64	15.14	36.26	32.67	54.00	-21.33	Vertical
4890.00	39.47	31.26	8.66	37.68	41.71	54.00	-12.29	Horizontal
7335.00	21.83	36.32	11.72	35.64	34.23	54.00	-19.77	Horizontal
9780.00	20.86	38.01	14.25	34.98	38.14	54.00	-15.86	Horizontal
12225.00	17.28	38.64	15.14	36.26	34.80	54.00	-19.20	Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “\*”, means this data is the too weak instrument of signal is unable to test.

Test channel:	Highest channel
---------------	-----------------

**Peak value:**

Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	polarization
4960.00	49.89	31.36	8.73	37.69	52.29	74.00	-21.71	Vertical
7440.00	39.17	36.59	11.79	35.58	51.97	74.00	-22.03	Vertical
9920.00	28.23	38.22	14.38	35.07	45.76	74.00	-28.24	Vertical
12400.00	26.42	38.68	15.27	36.43	43.94	74.00	-30.06	Vertical
4960.00	48.10	31.36	8.73	37.69	50.50	74.00	-23.50	Horizontal
7440.00	39.24	36.59	11.79	35.58	52.04	74.00	-21.96	Horizontal
9920.00	28.72	38.22	14.38	35.07	46.25	74.00	-27.75	Horizontal
12400.00	27.76	38.68	15.27	36.43	45.28	74.00	-28.72	Horizontal

**Average value:**



Frequency (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	polarization
4960.00	41.78	31.36	8.73	37.69	44.18	54.00	-9.82	Vertical
7440.00	31.01	36.59	11.79	35.58	43.81	54.00	-10.19	Vertical
9920.00	19.48	38.22	14.38	35.07	37.01	54.00	-16.99	Vertical
12400.00	16.47	38.68	15.27	36.43	33.99	54.00	-20.01	Vertical
4960.00	39.78	31.36	8.73	37.69	42.18	54.00	-11.82	Horizontal
7440.00	31.15	36.59	11.79	35.58	43.95	54.00	-10.05	Horizontal
9920.00	19.78	38.22	14.38	35.07	37.31	54.00	-16.69	Horizontal
12400.00	17.83	38.68	15.27	36.43	35.35	54.00	-18.65	Horizontal

**Remark:**

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. “\*”, means this data is the too weak instrument of signal is unable to test.

## 8 Test Setup Photo

Radiated Emission

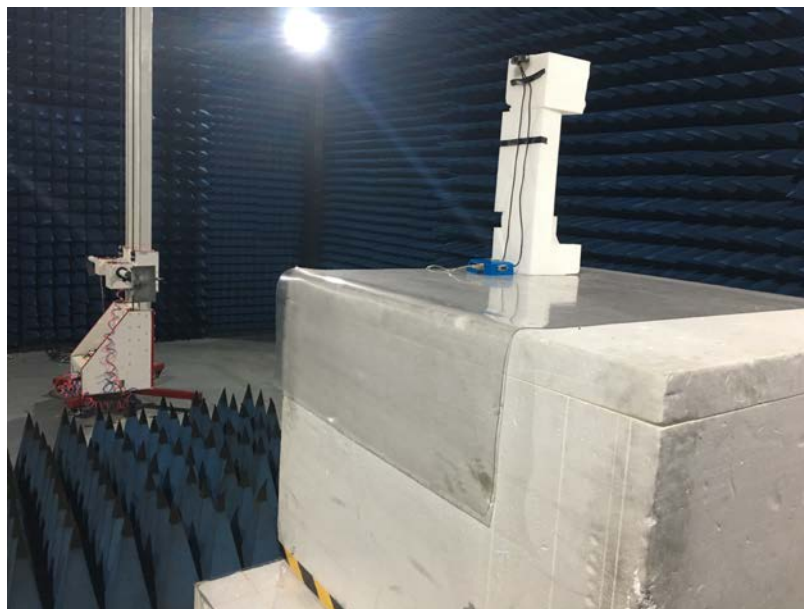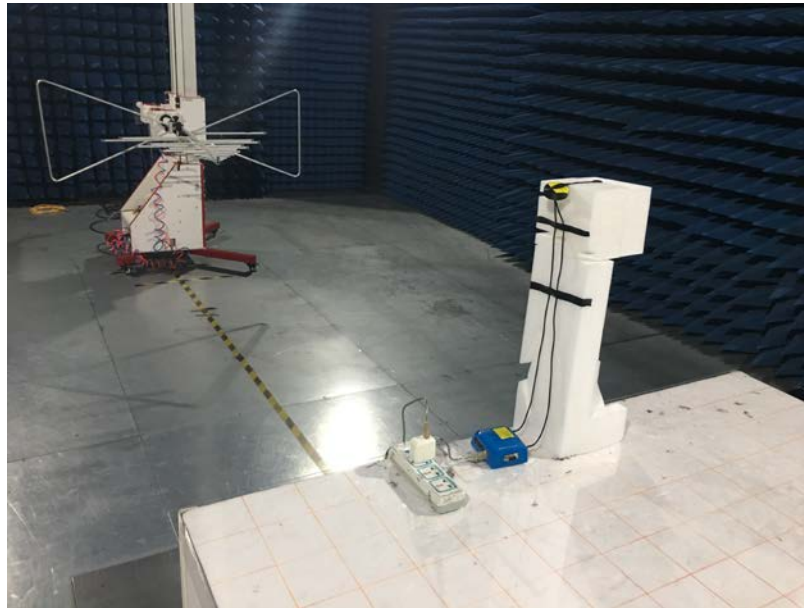

Conducted Emission



## 9 EUT Constructional Details

Reference to the test report No. GTS201812000044F03

-----End-----