

# FCC TEST REPORT

**Report No.:** ARFR-ESH-P20030602B-3

**FCC ID:** 2ANDLTY-R8813

**Product:** Smart Camera

**Test Model:** SC012-WK2

**Received:** Mar.06, 2020

**ISSUED:** Apr.14, 2020

**Applicant:** Hangzhou Tuya Information Technology Co., Ltd

**Address:** Room701, Building3, More Center, No.87 GuDun Road, Hangzhou,  
Zhejiang, China

**Issued By:** BUREAU VERITAS ADT (Shanghai) Corporation

**Lab Location:** No. 829, Xinzhuan Road, Shanghai, P.R.China (201612)

This test report consists of 22 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by A2LA, CNAS, or any government agency. The test results in the report only apply to the tested item. The test results in this report are traceable to the national or international standards.




# Contents

<b>1. TEST PROGRAM.....</b>	<b>3</b>
<b>2. Summary of Test Procedure and Test Results .....</b>	<b>4</b>
<b>3. Test Configuration of Equipment under Test .....</b>	<b>5</b>
3.1 Manufacturer information.....	5
3.2 Feature of Equipment under Test.....	5
3.3 Description of support units .....	5
3.4 Measurement Uncertainty .....	6
<b>4 Test of Conducted Emission .....</b>	<b>7</b>
4.1 Test Limit .....	7
4.2 Test Procedures .....	8
4.3 Typical Test Setup .....	8
4.4 Measurement Equipment .....	9
4.5 Test Result and Data .....	10
4.6 Test Photographs .....	14
<b>5 Test of Radiated Emission .....</b>	<b>15</b>
5.1 Test Limit .....	15
5.2 Test Procedures .....	16
5.3 Typical Test Setup .....	16
5.4 Measurement Equipment .....	17
5.5 Test Result and Data (30MHz ~ 1GHz).....	18
5.6 Test Result and Data (1GHz ~ 18GHz).....	20
5.7 Test Photographs (30MHz ~ 1000MHz).....	22
5.8 Test Photographs (1000MHz ~ 18000MHz) .....	23
<b>6 Photographs of EUT .....</b>	<b>24</b>

## 1. TEST PROGRAM

**PRODUCT:** Smart Camera  
**TEST MODEL:** SC012-WK2  
**APPLICANT:** Hangzhou Tuya Information Technology Co., Ltd  
**TESTED:** Mar.09 to Apr.13, 2020  
**STANDARDS:** 47 CFR FCC Part15, Subpart B, Class B  
ANSI C63.4:2014

We, BUREAU VERITAS ADT (Shanghai) Corporation, declare that the equipment above has been tested and found compliance with the requirement limits of applicable standards. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate under the standards herein specified.

**PREPARED BY :**  , **DATE:** Apr.14, 2020  
Will YAN  
Project Engineer

**APPROVED BY :**  , **DATE:** Apr.14, 2020  
Daniel Sun  
EMC Lab Manager





## 2. Summary of Test Procedure and Test Results

EMISSION (47 CFR FCC Part15, Subpart B)		
Test Item	Normative References	Test Result
Conducted Emission	47 CFR FCC Part15, Subpart B 15.107	Meets the Class B requirements
Radiated Emission	47 CFR FCC Part15, Subpart B 15.109	Meets the Class B requirements

Special Comment: All tests were performed on 120Vac 60Hz.



**BUREAU  
VERITAS**

### 3. Test Configuration of Equipment under Test

#### 3.1 Manufacturer information

Manufacturer : Hangzhou Tuya Information Technology Co., Ltd

Address : Room701, Building3, More Center, No.87 GuDun Road, Hangzhou, Zhejiang,  
China

#### 3.2 Feature of Equipment under Test

<b>Product Name:</b>	Smart Camera
<b>Test Model:</b>	SC012-WK2
<b>EUT Power Rating:</b>	5VDC/2A with adaptor 100-240Vac~, 50/60Hz

Note: 1. Please refer to user manual.

#### 3.3 Description of support units

<b>NO.</b>	<b>PRODUCT</b>	<b>BRAND</b>	<b>MODEL NO.</b>
1	AC adapter	--	KA1517-0502000USU
2	Mobile Phone	Vivo	--

### 3.4 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

This listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

<b>Measurement</b>		<b>Value</b>
Conducted emissions		2.55 dB
Radiated emissions	30 MHz ~ 1GHz	3.22 dB
	Above 1GHz	2.89 dB

## 4 Test of Conducted Emission

### 4.1 Test Limit

**TEST STANDARD:**

**CFR 47 FCC Part 15, Subpart B (Section: 15.107)**

FREQUENCY (MHz)	Class A (dB $\mu$ V)		Class B (dB $\mu$ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

- NOTES:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.







**BUREAU  
VERITAS**

#### 4.4 Measurement Equipment

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	E1R1001	Mar.03, 2021
LISN ROHDE & SCHWARZ	ENV216	E1L1011	Jul.17, 2020
Software ADT	ADT_Cond_V7.3.0	N/A	N/A



**BUREAU  
VERITAS**

## 4.5 Test Result and Data

### a. Conducted Emission Test Data

120Vac/60Hz

Phase : LINE

Location: Conduction 1

Date: 3/16/2020


Time: 5:14:08 PM

Phase L1

Temperature (C): 20

Humidity (%): 52

Approved by:

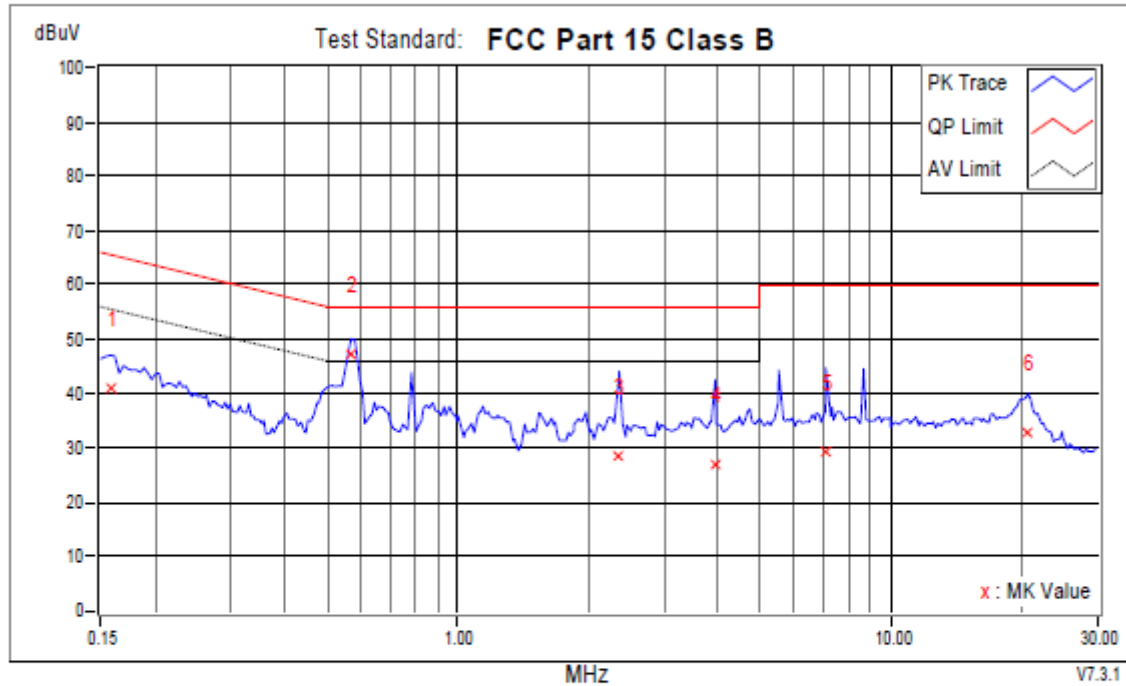

No.	Frequency MHz	Corr. Factor dB	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
			QP	AV	QP	AV	QP	AV	QP	AV	
1	0.15782	9.84	31.24	15.20	41.08	25.04	65.58	55.58	-24.49	-30.53	
+2	0.56837	9.68	37.61	28.97	47.29	38.65	56.00	46.00	-8.71	-7.35	
3	2.36068	9.81	18.75	8.84	28.56	18.65	56.00	46.00	-27.44	-27.35	
4	3.93641	9.95	17.17	5.85	27.12	15.80	56.00	46.00	-28.88	-30.20	
5	7.08787	10.19	19.05	7.84	29.24	18.03	60.00	50.00	-30.76	-31.97	
6	20.68994	10.23	22.74	10.93	32.97	21.16	60.00	50.00	-27.03	-28.84	

#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.



**BUREAU  
VERITAS**

Phase : NEUTRAL

Location: Conduction 1

Date: 3/16/2020


Time: 5:17:27 PM

Phase N

Temperatuer (C): 20

Humidity (%): 52

Approved by:

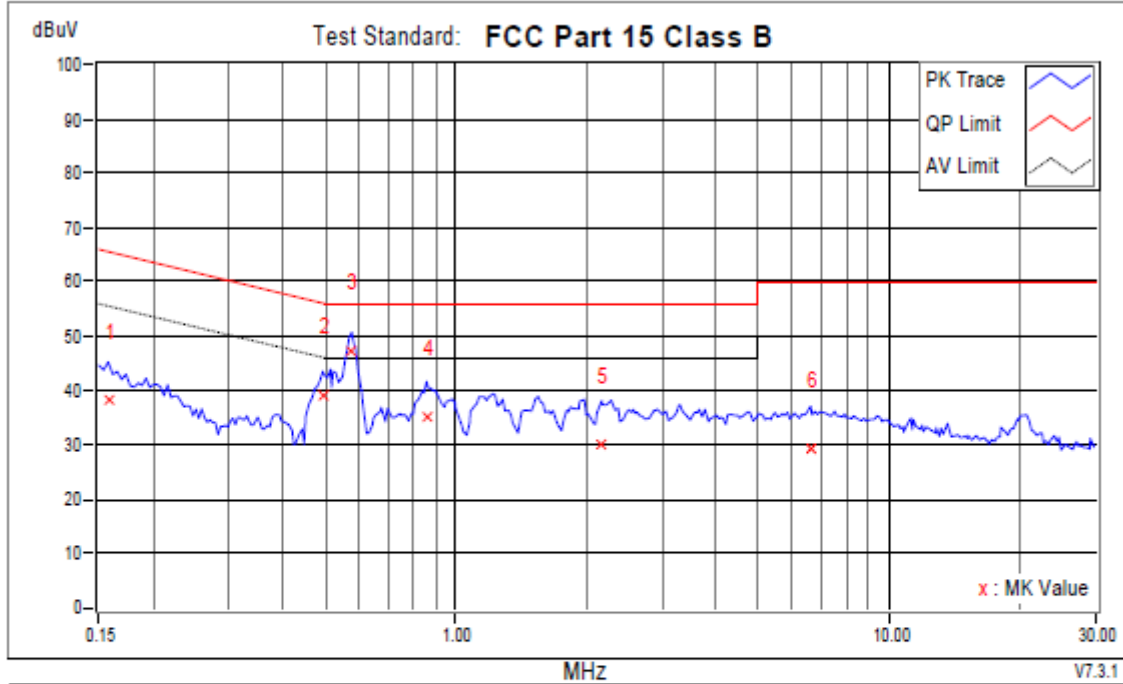

No.	Frequency MHz	Corr. Factor dB	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
			QP	AV	QP	AV	QP	AV	QP	AV	
1	0.15782	9.84	28.53	17.74	38.37	27.58	65.58	55.58	-27.21	-28.00	
2	0.49408	9.84	29.04	24.10	38.88	33.94	56.10	46.10	-17.22	-12.16	
+3	0.57619	9.83	37.35	31.24	47.18	41.07	56.00	46.00	-8.82	-4.93	
4	0.85771	9.89	25.22	20.36	35.11	30.25	56.00	46.00	-20.89	-15.75	
5	2.17691	9.95	19.96	14.53	29.91	24.48	56.00	46.00	-26.09	-21.52	
6	6.61085	10.09	19.37	13.80	29.46	23.89	60.00	50.00	-30.54	-26.11	

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.



BUREAU  
VERITAS

**240Vac/50Hz**

Phase : LINE

Location: Conduction 1

Date: 4/13/2020


Time: 11:13:18 AM

Phase L1

Temperatuer (C): 19

Humidity (%): 53

Approved by:

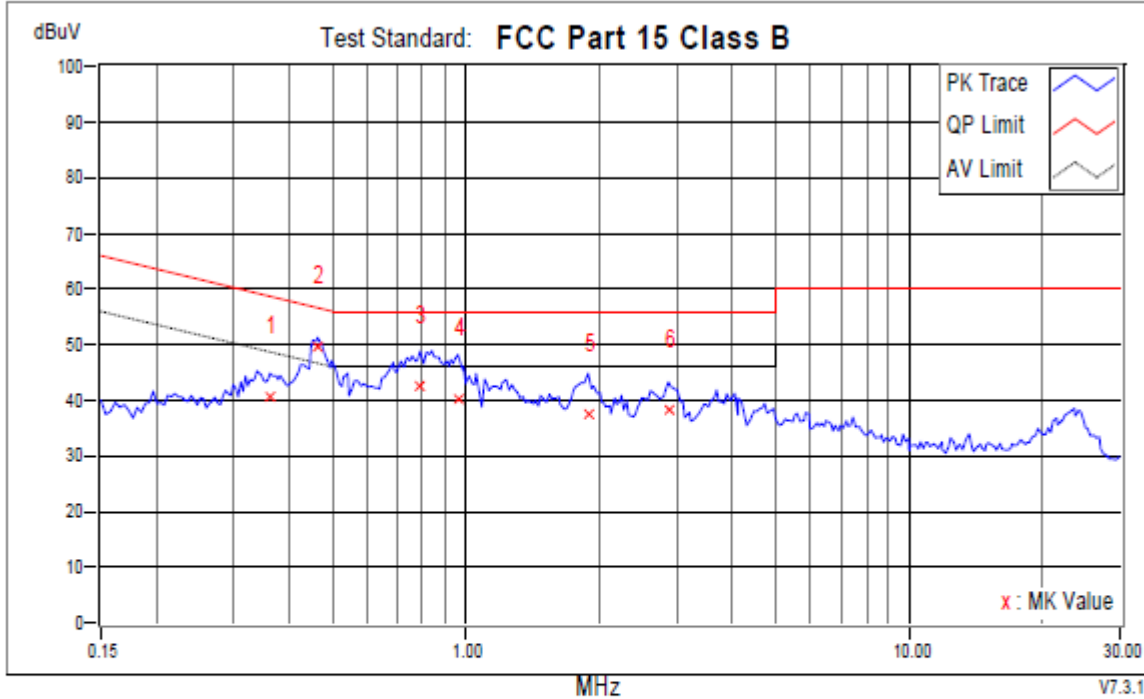

No.	Frequency MHz	Corr. Factor dB	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
			QP	AV	QP	AV	QP	AV	QP	AV	
1	0.36114	9.71	30.79	22.40	40.50	32.11	58.70	48.70	-18.20	-16.59	
+2	0.46280	9.72	39.91	31.31	49.63	41.03	56.64	46.64	-7.01	-5.61	
3	0.78733	9.59	32.92	24.17	42.51	33.76	56.00	46.00	-13.49	-12.24	
4	0.95937	9.59	30.79	15.06	40.38	24.65	56.00	46.00	-15.62	-21.35	
5	1.88757	9.76	27.73	14.85	37.49	24.61	56.00	46.00	-18.51	-21.39	
6	2.86116	9.85	28.33	15.86	38.18	25.71	56.00	46.00	-17.82	-20.29	

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.



**BUREAU  
VERITAS**

Phase : NEUTRAL

Location: Conduction 1

Date: 4/13/2020


Time: 11:08:58 AM

Phase N

Temperatuer (C): 19

Humidity (%): 53

Approved by:

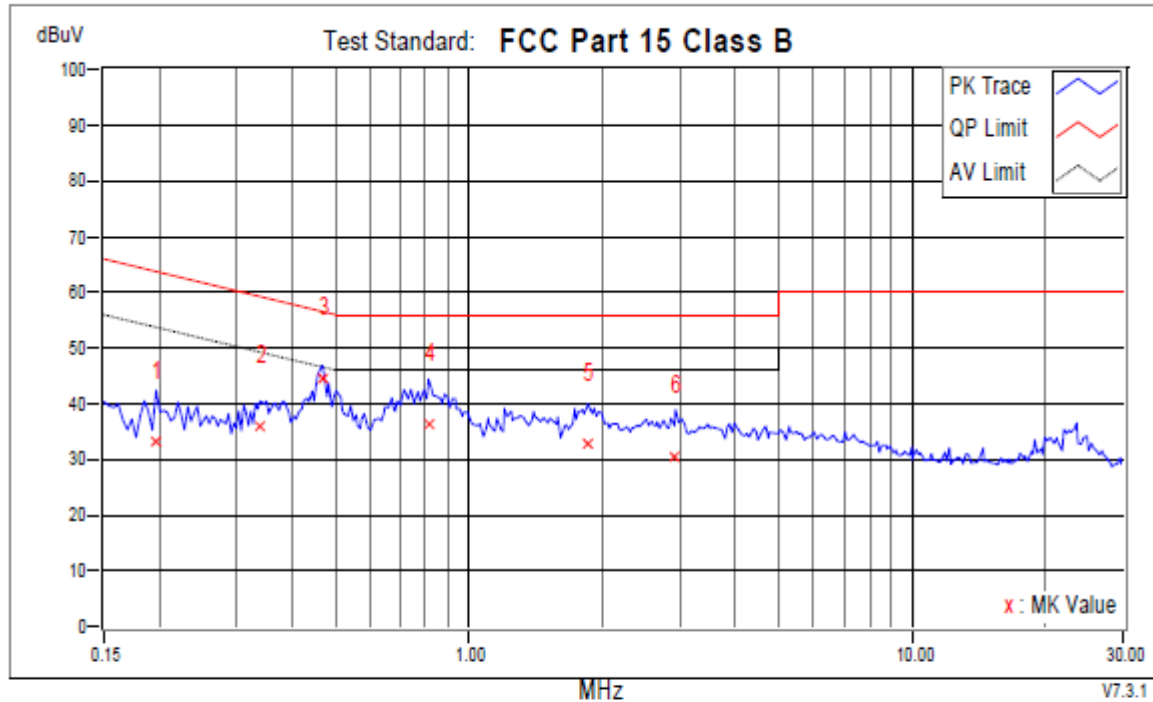

No.	Frequency MHz	Corr. Factor dB	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
			QP	AV	QP	AV	QP	AV	QP	AV	
1	0.19692	9.80	23.45	14.85	33.25	24.65	63.74	53.74	-30.49	-29.09	
2	0.33768	9.87	25.89	18.83	35.76	28.70	59.26	49.26	-23.50	-20.56	
+3	0.46671	9.85	34.71	26.25	44.56	36.10	56.57	46.57	-12.01	-10.47	
4	0.81079	9.89	26.57	16.63	36.46	26.52	56.00	46.00	-19.54	-19.48	
5	1.85629	9.93	22.84	10.24	32.77	20.17	56.00	46.00	-23.23	-25.83	
6	2.92372	10.03	20.40	13.38	30.43	23.41	56.00	46.00	-25.57	-22.59	


**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.



**BUREAU  
VERITAS**

## 4.6 Test Photographs

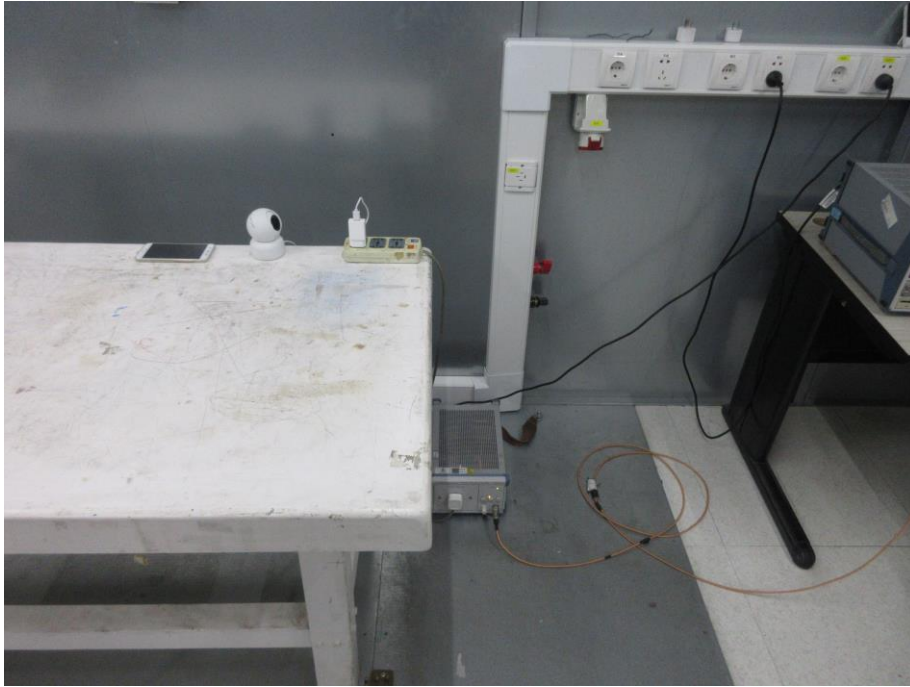

## 5 Test of Radiated Emission

### 5.1 Test Limit

**TEST STANDARD:**

**CFR 47 FCC Part 15, Subpart B (Section: 15.109)**

### FOR FREQUENCY BELOW 1000 MHz

FREQUENCY (MHz)	Class A (at 10m)		Class B (at 3m)	
	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 – 88	90	39.1	100	40.0
88 – 216	150	43.5	150	43.5
216 – 960	210	46.4	200	46.0
960 – 1000	300	49.5	500	54.0

### LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz


FREQUENCY (MHz)	Class A ( $\text{dB}\mu\text{V/m}$ ) (at 3m)		Class B ( $\text{dB}\mu\text{V/m}$ ) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

- Note:**
1. The lower limit shall apply at the transition frequencies.
  2. Emission level ( $\text{dB}\mu\text{V/m}$ ) =  $20 \log$  Emission level ( $\mu\text{V/m}$ ).
  3. All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

## 5.2 Test Procedures

1. The EUT was placed on a rotatable table top 0.8 meter above ground.
2. The EUT was set 3/10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
5. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.

## 5.3 Typical Test Setup

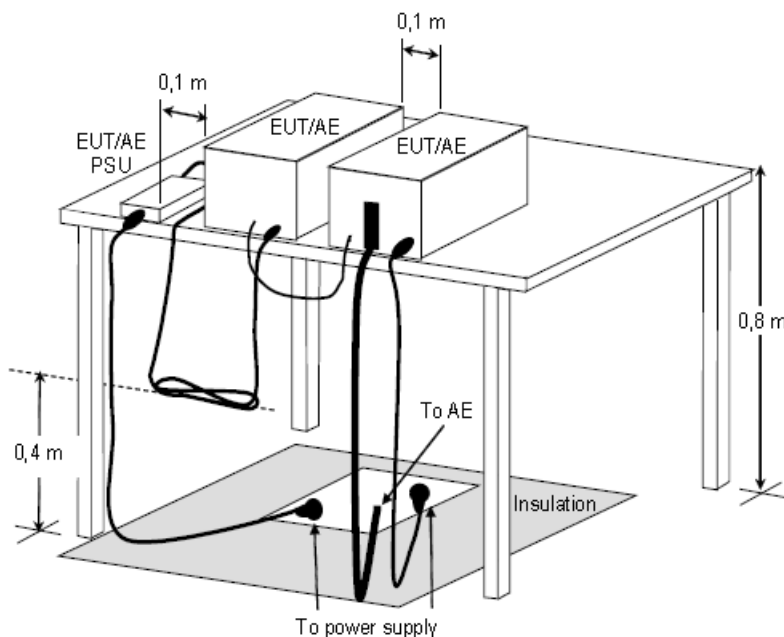

**Figure D.8 – Example measurement arrangement for table-top EUT  
(Radiated emission measurement)**





**BUREAU  
VERITAS**

## 5.4 Measurement Equipment


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
EMI Test Spectrum ROHDE & SCHWARZ	ESR7	E1R1005	Dec.02, 2020
Spectrum Analyzer Keysight	N9030B	E1S1003	Jul.22, 2020
Broad-Band Antenna Schwarzbeck	VULB9168	E1A1012	Aug.25, 2020
Double Riaged Vroadband Horn Antenna Schwarzbeck	BBHA9120D	E1A1017	Jan.25, 2021
Preamplifier Agilent	8447D	E1A2001	Oct.13, 2020
Preamplifier Agilent	EMC051845SE	E1A2009	Jul.18, 2020



### 5.5 Test Result and Data (30MHz ~ 1GHz)

Position: Horizontal

Test Graph

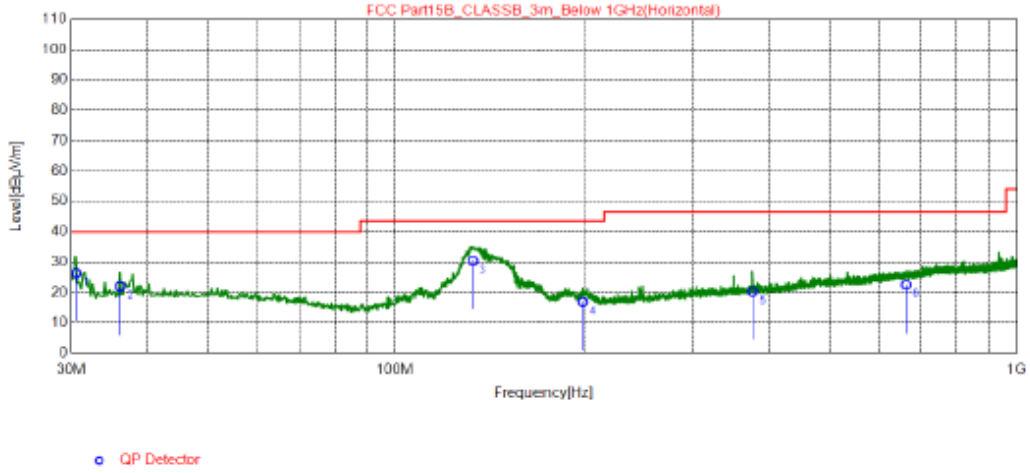

NO.	Freq. [MHz]	QP Reading [dBµV/m]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	30.58	37.01	-10.64	26.37	40.00	13.63	100	82	Horizontal
2	36.01	31.95	-9.96	21.99	40.00	18.01	100	82	Horizontal
3	133.5	40.93	-10.54	30.39	43.50	13.11	200	125	Horizontal
4	199.5	29.21	-12.34	16.87	43.50	26.63	200	258	Horizontal
5	374.9	28.35	-7.99	20.36	46.50	26.14	200	132	Horizontal
6	663.4	25.78	-3.22	22.56	46.50	23.94	100	250	Horizontal


**REMARKS:**

1. Q.P. is abbreviation of quasi-peak individually.
2. The emission levels of other frequencies were very low against the limit.
3. QP Margin value = QP Limit value – QP value.
4. Factor = Antenna Factor + Amplifier Factor + Cable loss.
5. QP value = Factor + Reading Value.



Position: Vertical

Test Graph

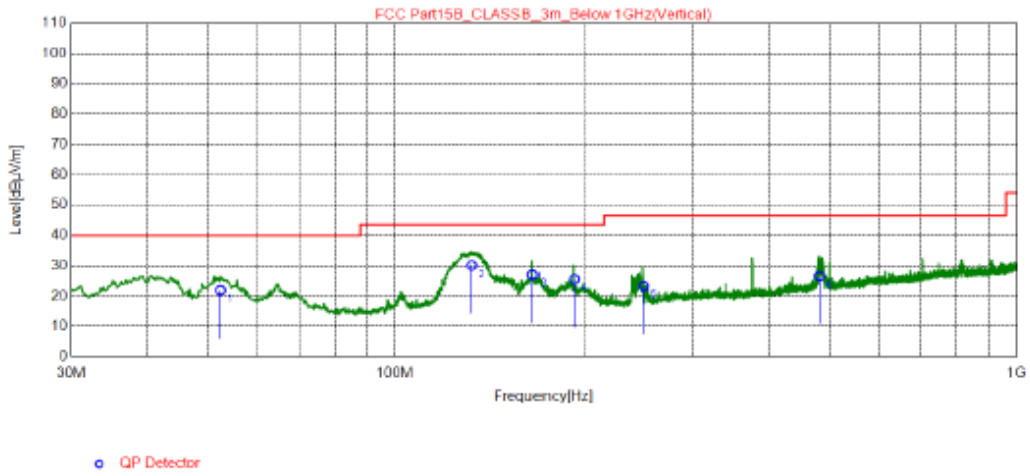

NO.	Freq. [MHz]	QP Reading [dBuV/m]	Factor [dB]	QP Value [dBuV/m]	QP Limit [dBuV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	52.31	31.82	-9.90	21.92	40.00	18.08	100	340	Vertical
2	133.0	40.67	-10.57	30.10	43.50	13.40	100	206	Vertical
3	166.5	36.27	-9.22	27.05	43.50	16.45	200	128	Vertical
4	193.3	37.7	-12.07	25.63	43.50	17.87	100	262	Vertical
5	249.9	33.78	-10.43	23.35	46.50	23.15	100	280	Vertical
6	480.4	32.27	-5.65	26.62	46.50	19.88	100	236	Vertical

REMARKS:


1. Q.P. is abbreviation of quasi-peak individually.
2. The emission levels of other frequencies were very low against the limit.
3. QP Margin value = QP Limit value – QP value
4. Factor = Antenna Factor + Amplifier Factor + Cable loss
5. QP value = Factor + Reading Value.



### 5.6 Test Result and Data (1GHz ~ 18GHz)

Position: Horizontal

#### Test Graph

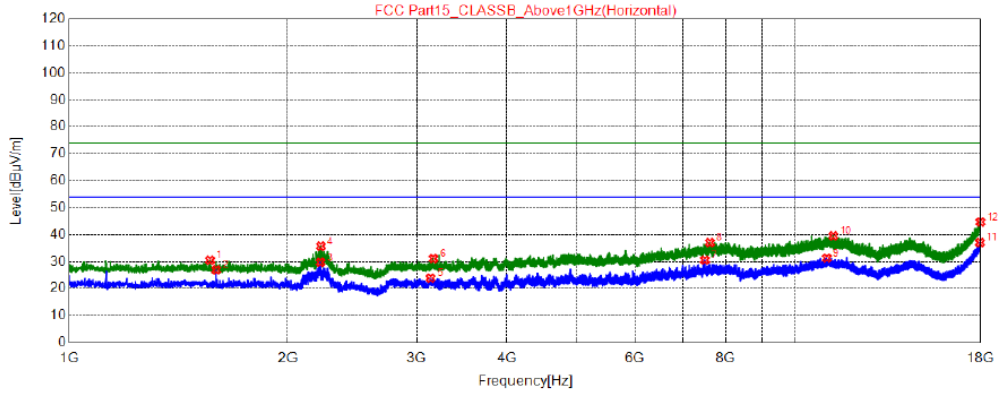

★ AV Detector

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	1563.5500	48.29	30.54	74.00	43.46	100	178	Horizontal	PK
2	1595.0000	44.66	26.99	54.00	27.01	100	305	Horizontal	AV
3	2211.2500	46.14	29.80	54.00	24.20	100	210	Horizontal	AV
4	2214.6500	52.07	35.74	74.00	38.26	100	242	Horizontal	PK
5	3137.7500	37.86	23.92	54.00	30.08	100	337	Horizontal	AV
6	3164.9500	45.02	31.16	74.00	42.84	100	210	Horizontal	PK
7	7494.0000	34.47	30.62	54.00	23.38	100	305	Horizontal	AV
8	7613.8500	40.68	37.06	74.00	36.94	100	178	Horizontal	PK
9	11035.9500	29.90	31.34	54.00	22.66	100	305	Horizontal	AV
10	11268.0000	37.88	39.55	74.00	34.45	100	242	Horizontal	PK
11	17950.7000	25.53	37.06	54.00	16.94	100	274	Horizontal	AV
12	17981.3000	33.02	44.81	74.00	29.19	100	178	Horizontal	PK

#### REMARKS:


1. The emission levels of other frequencies were very low against the limit.
2. Margin = Limit –Level



**BUREAU  
VERITAS**

Position: Vertical

**Test Graph**

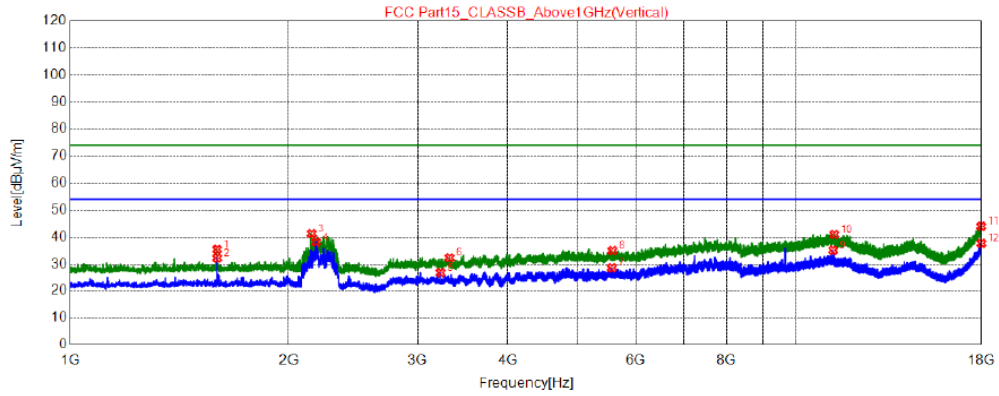

★ AV Detector

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	1595.0000	53.11	35.44	74.00	38.56	100	249	Vertical	PK
2	1595.0000	49.91	32.24	54.00	21.76	100	249	Vertical	AV
3	2144.9500	57.79	41.31	74.00	32.69	100	124	Vertical	PK
4	2174.7000	54.59	38.17	54.00	15.83	100	30	Vertical	AV
5	3230.4000	40.50	26.84	54.00	27.16	100	30	Vertical	AV
6	3323.0500	45.70	32.34	74.00	41.66	100	280	Vertical	PK
7	5563.6500	37.31	28.61	54.00	25.39	100	155	Vertical	AV
8	5573.8500	43.70	35.01	74.00	38.99	100	218	Vertical	PK
9	11228.0500	33.47	35.13	54.00	18.87	100	30	Vertical	AV
10	11273.9500	39.32	40.99	74.00	33.01	100	30	Vertical	PK
11	17974.5000	32.29	44.02	74.00	29.98	100	249	Vertical	PK
12	17988.1000	25.84	37.69	54.00	16.31	100	30	Vertical	AV


**REMARKS:**

1. The emission levels of other frequencies were very low against the limit.
2. Margin = Limit –Level



**BUREAU  
VERITAS**


## 5.7 Test Photographs (30MHz ~ 1000MHz)

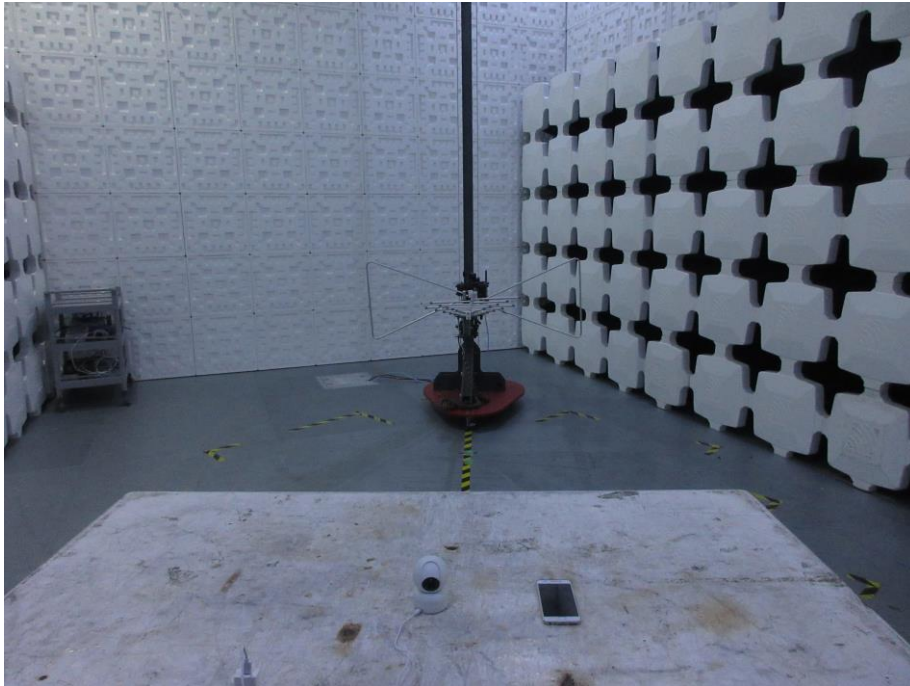



**BUREAU  
VERITAS**

## 5.8 Test Photographs (1000MHz ~ 18000MHz)

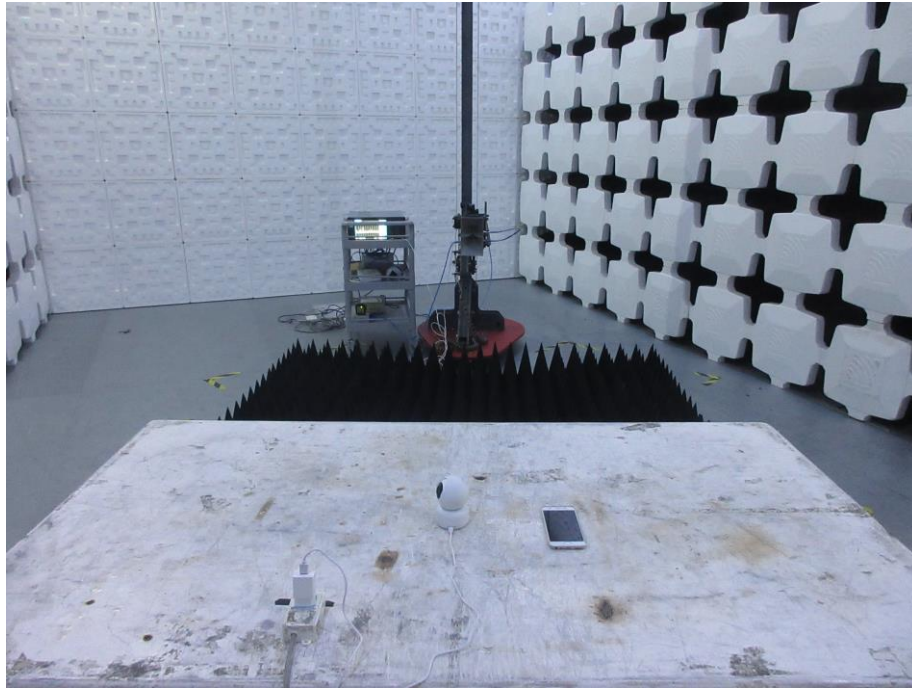



**BUREAU  
VERITAS**

## 6 Photographs of EUT



--- END ---