

FCC - TEST REPORT

Report Number	: 708881974808-00	Date of Issue: <u>June 21, 2019</u>
Model	: TYGWZW-01; TYGWZW-01N	
Product Type	: Smart Gateway	
FCC ID	: 2ANDLTYGWZW-01	
Applicant	: Hangzhou Tuya Information Technology Co.,Ltd	
Address of Applicant	: Room701,Building3,More Center,No.87 GuDun	
	: Road, Hangzhou, Zhejiang China	
Manufacturer	: Hangzhou Tuya Information Technology Co.,Ltd	
Address of Manufacturer	: Room701,Building3,More Center,No.87 GuDun	
	: Road, Hangzhou, Zhejiang China	
Factory	: Same as applicant	
Address of Factory	: Same as applicant	

Test Result	: <input checked="" type="checkbox"/> Positive	: <input type="checkbox"/> Negative
Total pages including Appendices	: <u>34</u>	

TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.



1 Table of Contents

1	Table of Contents.....	2
2	Details about the Test Laboratory	3
3	Description of the Equipment under Test.....	4
4	Summary of Test Standards.....	6
5	Summary of Test Results	7
6	General Remarks.....	8
7	Test Setups.....	9
8	Systems test configuration	12
9	Technical Requirement	13
9.1	Conducted Emission	13
9.2	Conducted peak output power.....	16
9.3	6dB bandwidth Occupied Bandwidth.....	17
9.4	Power spectral density.....	19
9.5	Conducted Band Edge and Out-of-Band Emissions	21
9.6	Spurious radiated emissions for transmitter	25
10	Test Equipment List.....	31
11	System Measurement Uncertainty	32
12	Photographs of Test Set-ups	33
13	Photographs of EUT	34



2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch
No.16 Lane, 1951 Du Hui Road,
Shanghai 201108,
P.R. China

FCC Registration No.: 820234
Telephone: +86 21 6141 0123
Fax: +86 21 6140 8600



3 Description of the Equipment under Test

Description of the Equipment Under Test

Product: Smart Gateway

Model no.: TYGWZW-01; TYGWZW-01N

FCC ID: 2ANDLTYGWZW-01

Trade Mark: NA

Options and accessories: NA

Input Rated Voltage: 100-240V~, 50/60Hz

RF Transmission Frequency: For 802.11b/g/n-HT20: 2412~2462 MHz
 For 802.11n-HT40: 2422~2452 MHz
 For 802.15.4: 2405~2480MHz

No. of Operated Channel: 2.4GHz WIFI: 11 for 802.11b/802.11g/802.11(H20)
 7 for 802.11n(H40)
 Zigbee: 16

Channel list: For 2.4GHz WIFI

Operation Frequency each of channel For 802.11b/g/n(H20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Operation Frequency each of channel For 802.11n(H40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
		4	2427MHz	7	2442MHz		
		5	2432MHz	8	2447MHz		
3	2422MHz	6	2437MHz	9	2452MHz		

For Zigbee:

Operation Frequency each of channel	
Channel	Frequency
11	2405MHz
15	2425MHz
20	2450MHz
25	2475MHz
26	2480MHz



Radio technology:	For 2.4GHz WIFI: IEEE 802.11b/802.11g/802.11(H20)/802.11n(H40) For 2.4GHz Zigbee: IEEE IEEE802.15.4
Modulation:	For 2.4GHz WIFI: Direct Sequence Spread Spectrum (DSSS) for 802.11b Orthogonal Frequency Division Multiplexing(OFDM) for 802.11g/n For 2.4GHz Zigbee: 16-ary orthogonal modulation, O-QPSK PHY
Data speed (IEEE 802.11b):	1Mbps, 2Mbps, 5.5Mbps, 11Mbps
Data speed (IEEE 802.11g):	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps,54Mbps
Data speed (IEEE 802.11n):	Up to 150Mbps
Data speed (IEEE 802.15.4):	250kbps MAX
Antenna Type:	PCB antenna
Antenna Gain:	2.5dBi
Description of the EUT:	The Equipment Under Test (EUT) is a Smart Gateway supports 2.4GHz WIFI functions and 2.4GHz zigbee function. There are 2 models in all, only difference is the appearance. We chose model TYGWZW-01 to perform all tests.



4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to KDB558074 D01 DTS Measurement Guidance v04 and ANSI C63.10 (2013).

5 Summary of Test Results

Technical Requirements						
FCC Part 15 Subpart C						
Test Condition		Pages	Test Site	Test Result		
				Pass	Fail	N/A
§15.207	Conducted emission AC power port	13-15	---	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247 (b) (1)	Conducted peak output power	16	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(a)(1)	20dB bandwidth	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1)	Carrier frequency separation	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1)(iii)	Number of hopping frequencies	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(a)(1)(iii)	Dwell Time	---	---	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
§15.247(e)	Power spectral density	22-26	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(a)(2)	6dB bandwidth and 99% Occupied Bandwidth	17-21	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d)	Spurious RF conducted emissions	27-39	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.247(d)	Spurious radiated emissions and Band edge for transmitter	40-46	Site 1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
§15.203	Antenna requirement	See note 1		<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Remark 1: N/A – Not Applicable.

Note 1: The EUT uses a permanently integral antenna, which gain is 2.5dBi. According to §15.203, it is considered sufficiently to comply with the provisions of this section.

15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.



6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: 2ANDLTYGWZW-01, complies with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C Rules.
This report is only for the 2.4GHz Zigbee test report, for the 2.4GHz WIFI test report please refer to 708881974806-00.

SUMMARY:

All tests according to the regulations cited on page 5 were

- Performed

- **Not** Performed

The Equipment under Test

- **Fulfills** the general approval requirements.

- **Does not** fulfill the general approval requirements.

Sample Received Date: June 6, 2019

Testing Start Date: June 6, 2019

Testing End Date: June 18, 2019

- TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch

Reviewed by:

Prepared by:

Tested by:


Hui TONG
EMC Section Manager

Jiayi XU
EMC Project Engineer

Wenqiang LU
EMC Test Engineer


7 Test Setups

7.1 AC Power Line Conducted Emission test setups

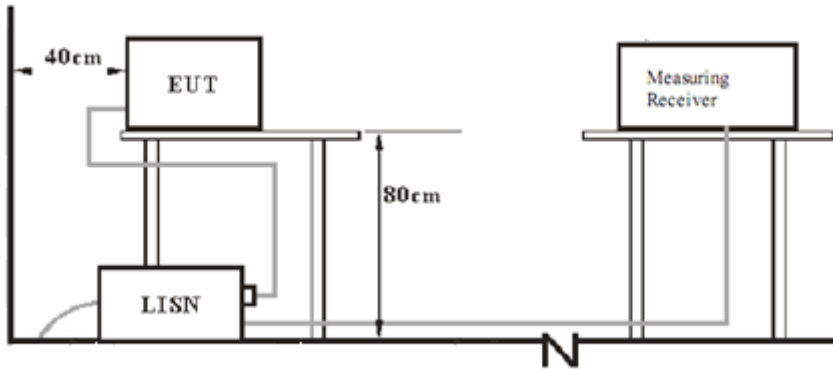


7.2 Radiated test setups


9kHz ~ 30MHz Test Setup:

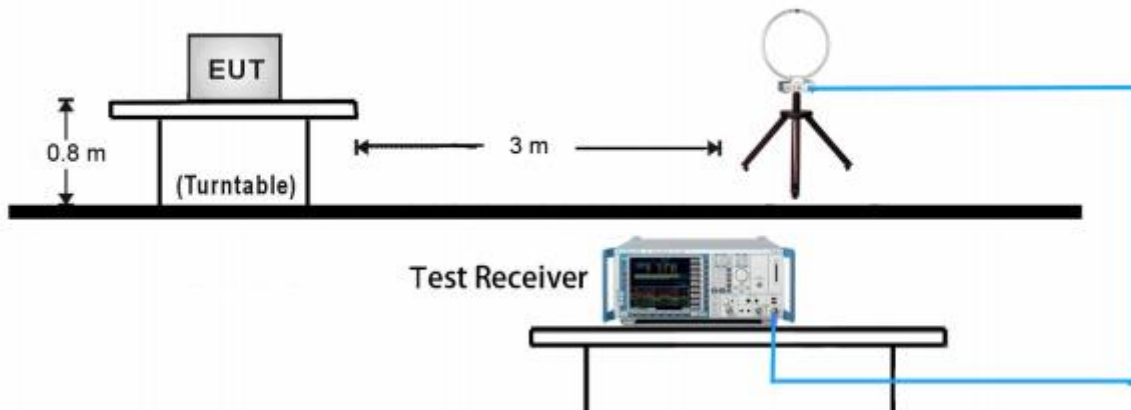


30MHz ~ 1GHz Test Setup:

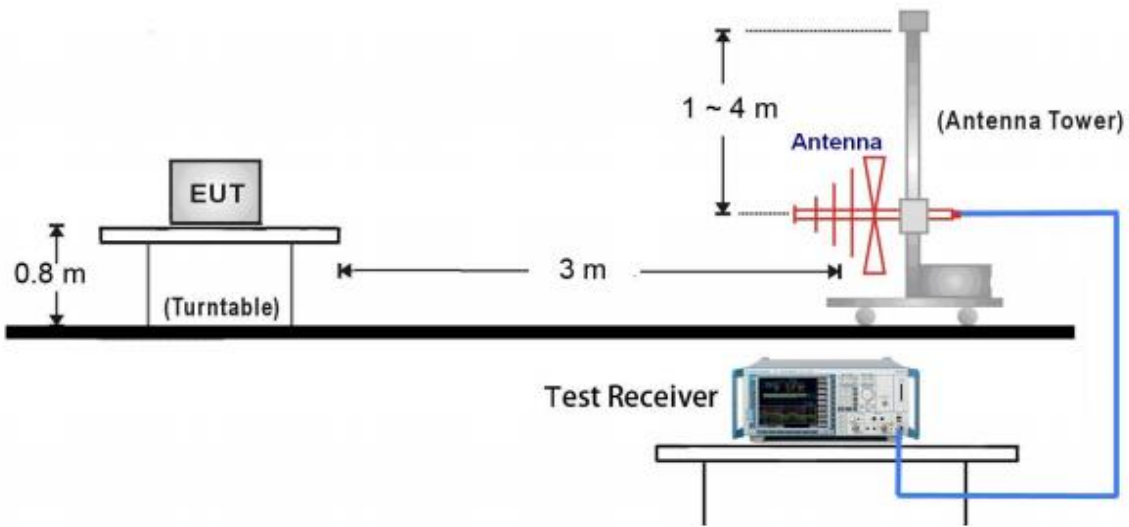


1GHz ~ 18GHz Test Setup:

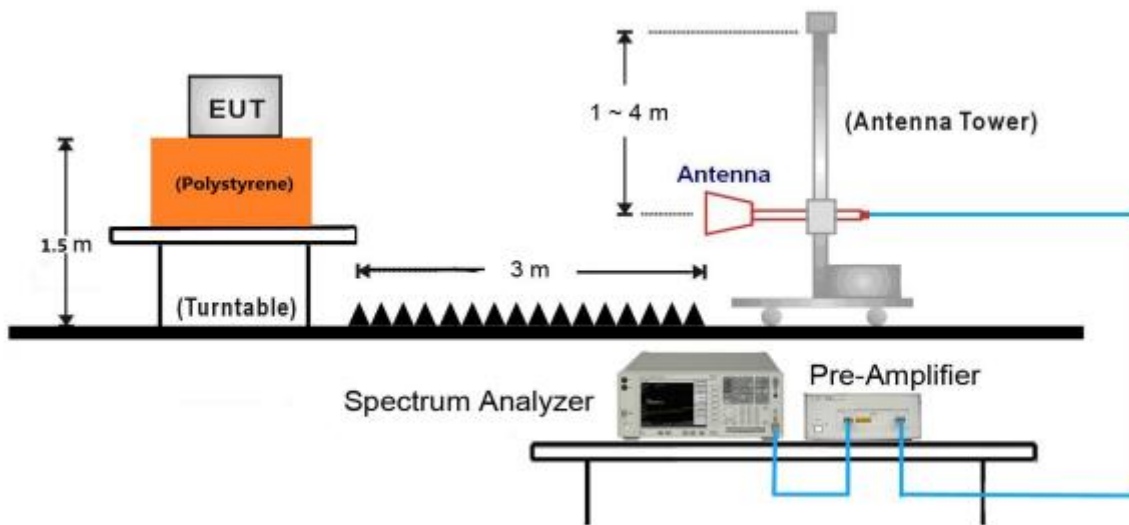

18GHz ~ 25GHz Test Setup:

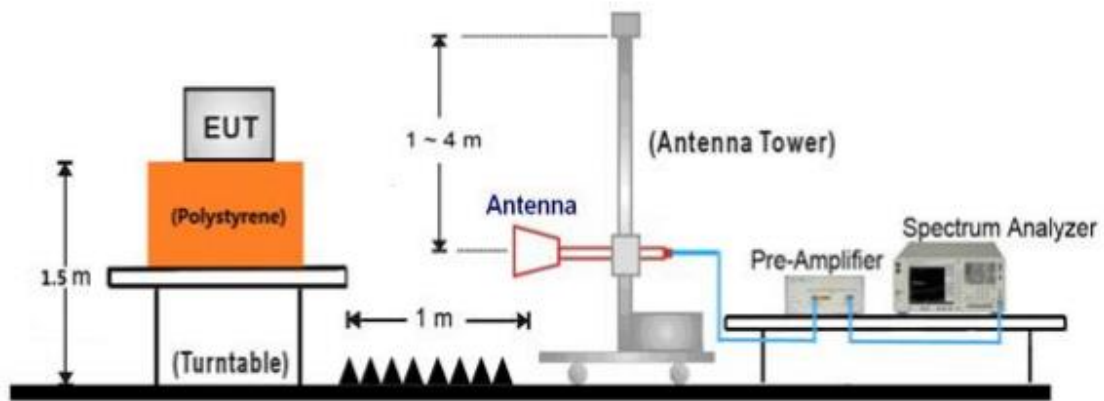

7.3 Conducted RF test setups



8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.(SHIELD)
Notebook	Lenove	X240

Test channel & mode:

The EUT configured using a proprietary communication interface provided by the client. The interface allows channel control required to support the evaluation.

Test software	SecureCRT
---------------	-----------

Test mode	Channel	Frequency (MHz)
Tx	11	2405
Tx	20	2450
Tx	26	2480

Device Capabilities

This device contains the following capabilities:

ZigBee Module Device.

Duty Cycle: 100%

9 Technical Requirement

9.1 Conducted Emission

Test Method

1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. A EMI test receiver is used to test the emissions from both sides of AC line


Limit

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

Decreasing linearly with logarithm of the frequency

Conducted Emission


Product Type : Smart Gateway
 M/N : TYGWZW-01
 Operating Condition : Mode 1: Tx_2405MHz
 Test Specification : FCC_Part15.207
 Comment : L-line, AC 120V/60Hz

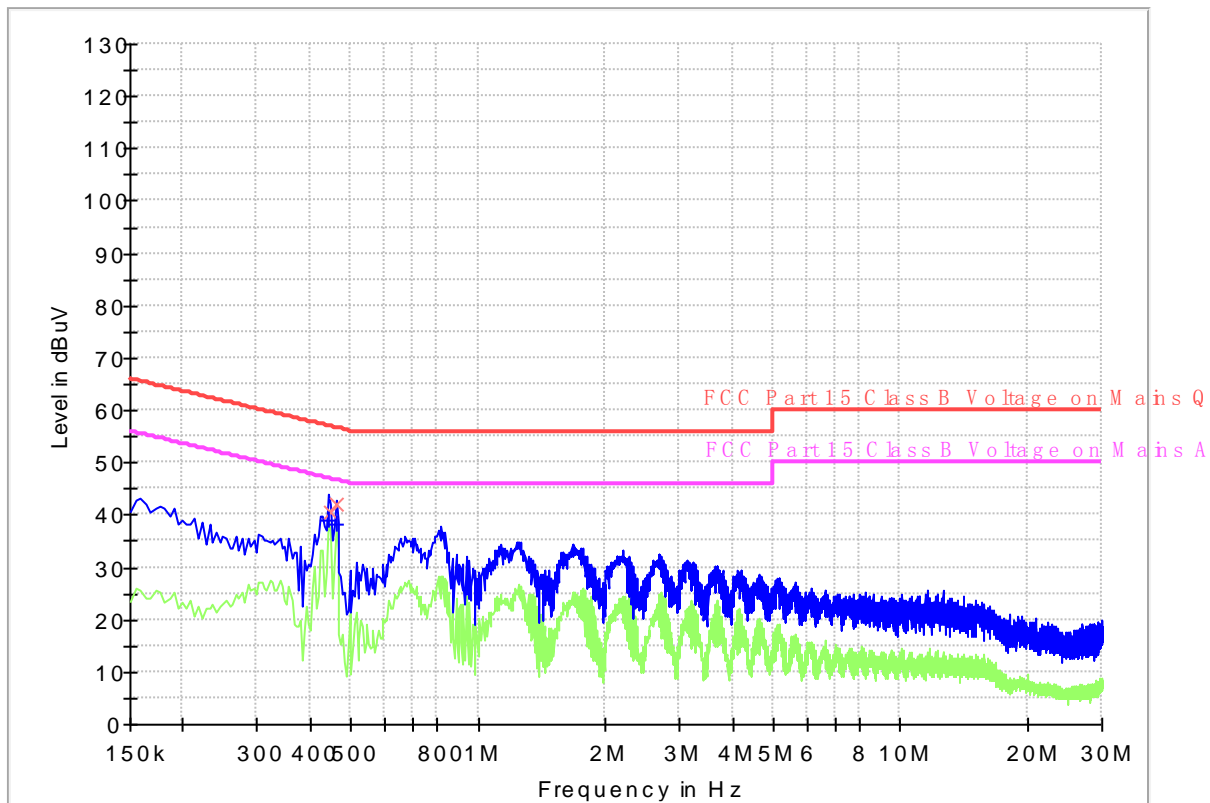

Final Result

Frequency (MHz)	Quasi Peak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.442500	---	39.04	47.01	7.97	1000.0	9.000	L1	19.5
0.447000	40.71	---	56.93	16.22	1000.0	9.000	L1	19.5
0.460500	---	38.20	46.68	8.48	1000.0	9.000	L1	19.5
0.460500	42.22	---	56.68	14.46	1000.0	9.000	L1	19.5

Product Type : Smart Gateway
 M/N : TYGWZW-01
 Operating Condition : Mode 1: Tx_2405MHz
 Test Specification : FCC_Part15.207
 Comment : N-line, AC 120V/60Hz

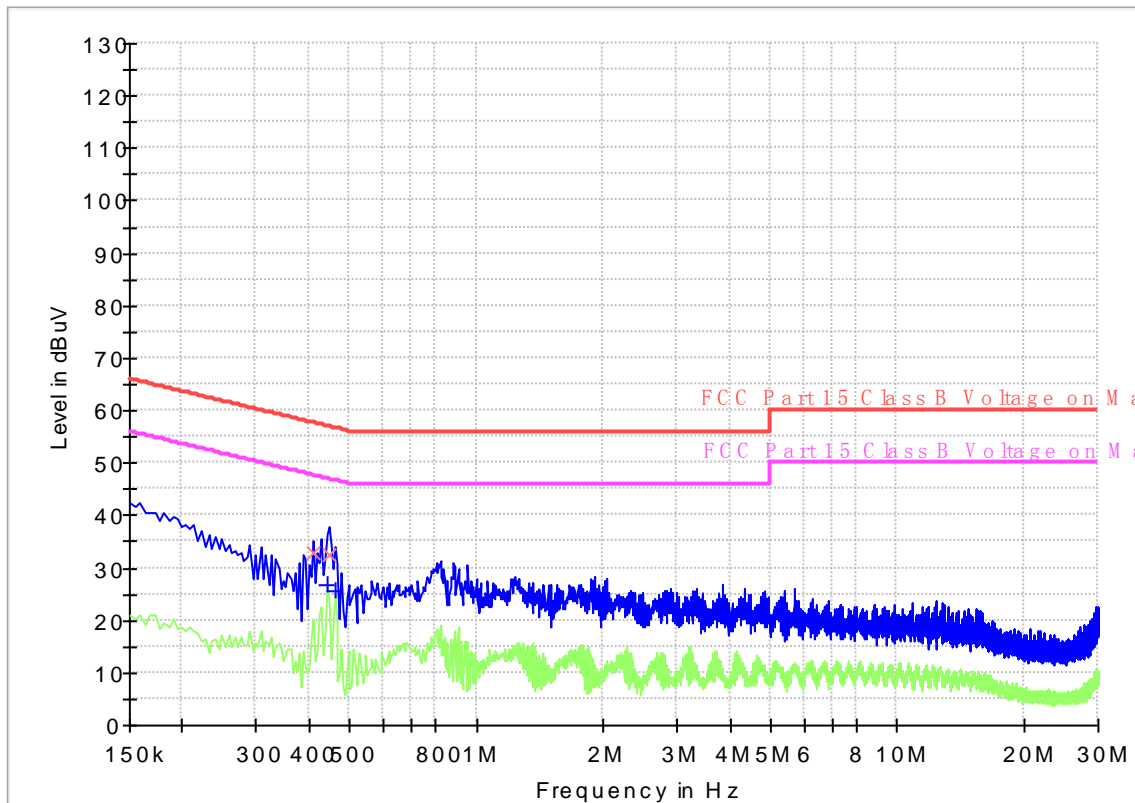

Final Result

Frequency (MHz)	Quasi Peak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.411000	32.90	---	57.63	24.73	1000.0	9.000	N	19.4
0.442500	---	26.75	47.01	20.26	1000.0	9.000	N	19.4
0.447000	32.59	---	56.93	24.34	1000.0	9.000	N	19.4
0.460500	---	25.43	46.68	21.25	1000.0	9.000	N	19.4

9.2 Conducted peak output power

Test Method

1. Connect the power meter to the EUT
 - a) The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
 - b) At all times the EUT is transmitting at its maximum power control level.
 - c) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Adjust the measurement in dBm by adding $10\log(1/x)$, where x is the duty cycle to the measurement result.

Limits

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤1	≤30

Test result as below table

Model	Ch.	Freq. (MHz)	Peak Power (dBm)	Limit (dBm)
O-QPSK	11	2405	6.88	30
	20	2450	6.76	30
	26	2480	6.73	30

9.3 6dB bandwidth Occupied Bandwidth

Test Method

1. Use the following spectrum analyzer settings:
RBW=100K, VBW \geq 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the automatic bandwidth measurement capability of an instrument, may be employed using the X dB bandwidth mode with X set to 6 dB, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be \geq 6 dB.
3. Allow the trace to stabilize, record the 6 dB Bandwidth value.

Limit

Limit [kHz]

—————
 ≥ 500


Test result

Test Mode	Channel No.	Freq. (MHz)	6db Bandwidth (MHz)	Limit (MHz)	Result
O-QPSK	11	2405	1.788	≥ 0.5	Pass
	20	2450	1.737	≥ 0.5	Pass
	26	2480	1.718	≥ 0.5	Pass




Zigbee O-QPSK 6dB Bandwidth

Channel 11 (2405MHz)

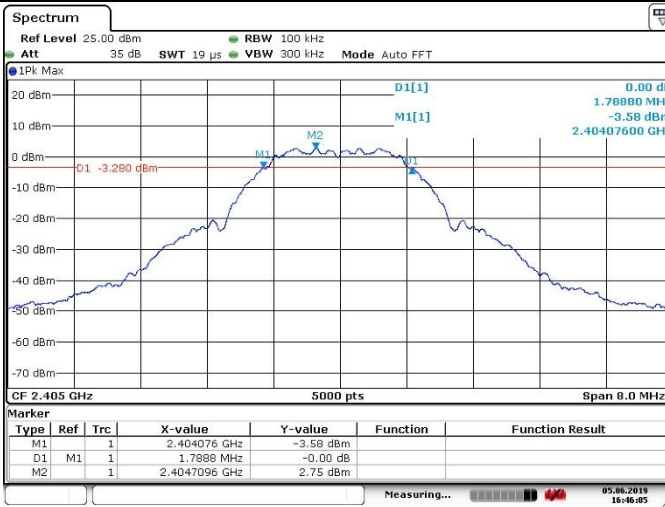


Date: 5 JUN 2019 16:46:06

Channel 20 (2450MHz)

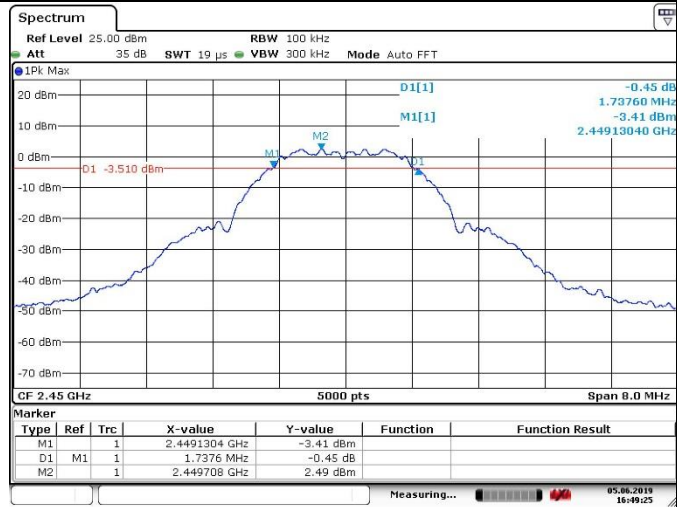

Date: 5 JUN 2019 16:49:25

Channel 26 (2480MHz)

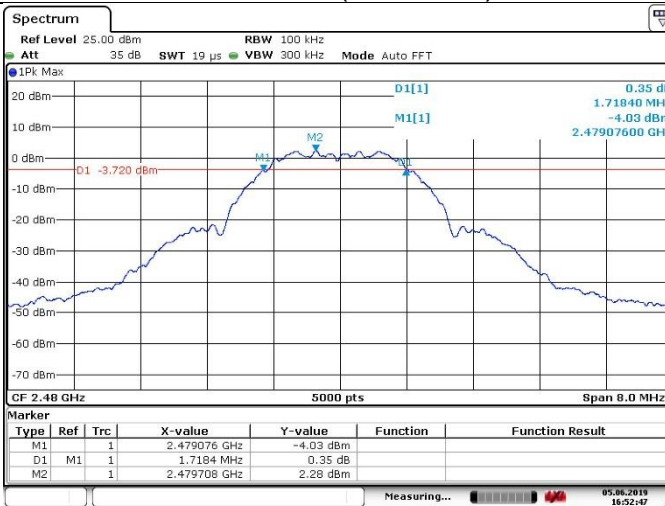

Date: 5 JUN 2019 16:52:47

9.4 Power spectral density

Test Method

This procedure shall be used if average conducted output power was used to demonstrate compliance:

1. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW \geq 3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
2. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
3. Repeat above procedures until other frequencies measured were completed.

Limit

Limit [dBm]

≤8


Test result

Test Mode	Channel No.	Freq. (MHz)	PKPSD (dBm / 10kHz)	Limit (dBm/3kHz)	Result
O-QPSK	11	2405	-8.61	≤8	Pass
	20	2450	-8.96	≤8	Pass
	26	2480	-8.88	≤8	Pass




Zigbee O-QPSK PK PSD

Channel 11 (2405MHz)

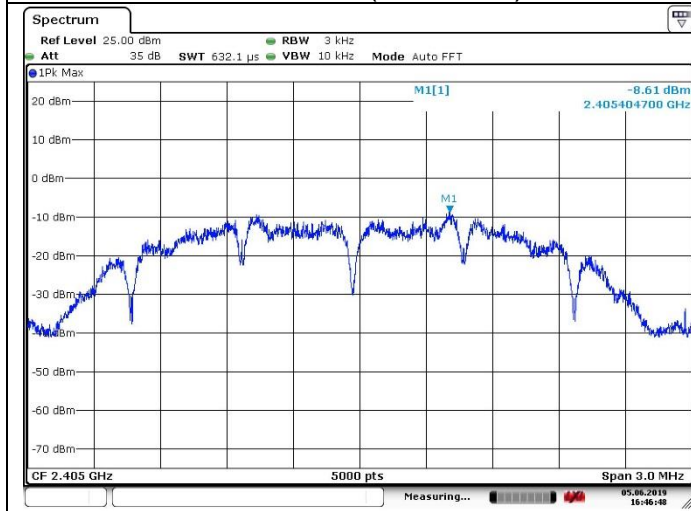


Date: 5 JUN 2019 16:46:48

Channel 20 (2450MHz)

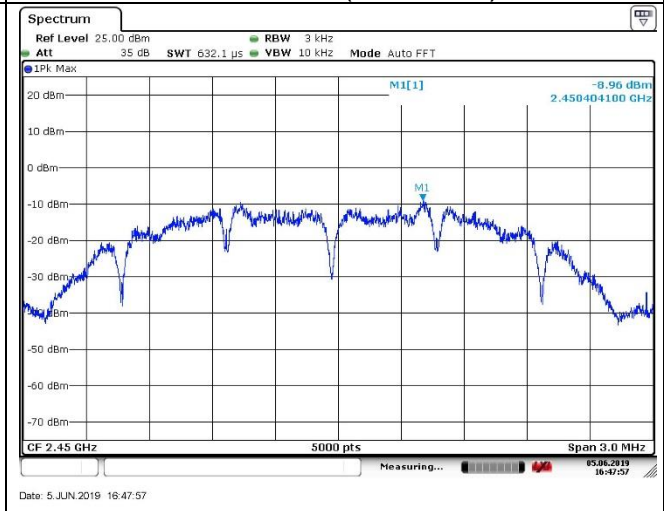

Date: 5 JUN 2019 16:47:57

Channel 26 (2480MHz)

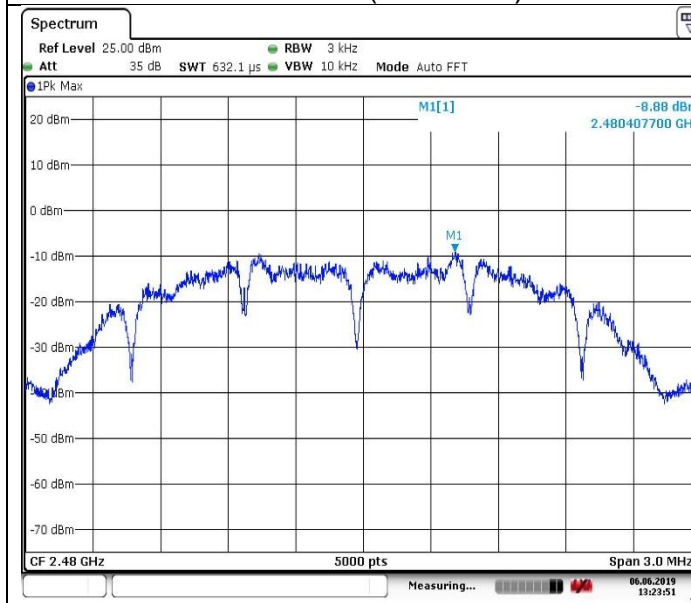

Date: 6 JUN 2019 13:23:51

9.5 Conducted Band Edge and Out-of-Band Emissions

Test Method

1. Establish a reference level by using the following procedure:
 - a. Set RBW=100 kHz. VBW \geq 3RBW. Detector =peak, Sweep time = auto couple, Trace mode = max hold.
 - b. Allow trace to fully stabilize, use the peak marker function to determine the maximum PSD level.
2. Use the maximum PSD level to establish the reference level.
 - a. Set the center frequency and span to encompass frequency range to be measured.
 - b. Use the peak marker function to determine the maximum amplitude level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements, report the three highest emissions relative to the limit.
3. Repeat above procedures until other frequencies measured were completed.

Limit

Frequency Range MHz	Limit (dBc)
30-25000	-20


Test result

Test Mode	Channel No.	Freq. (MHz)	Limit	Result
O-QPSK	11	2405	20dBc	Pass
	20	2450	20dBc	Pass
	26	2480	20dBc	Pass


Spurious RF conducted emissions

**Zigbee O-QPSK Out-of-Band Emissions
Channel 11 (2405MHz)**


Referencel point

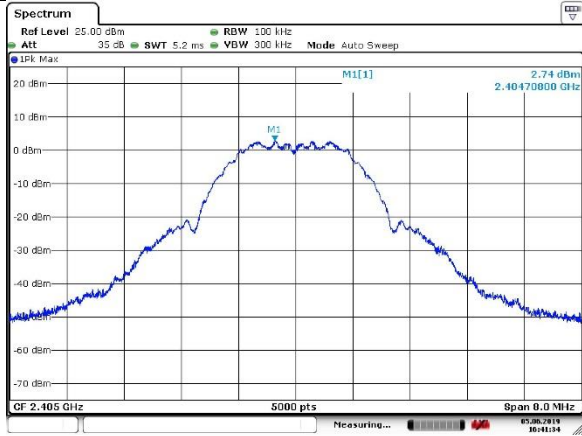


Spurious Emission (30MHz – 1GHz)

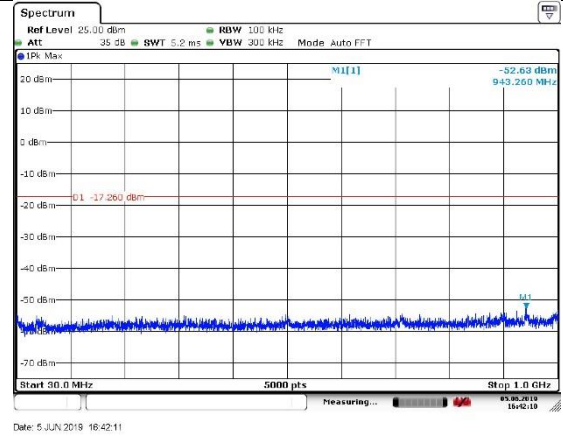


Spurious Emission (1GHz –5GHz)

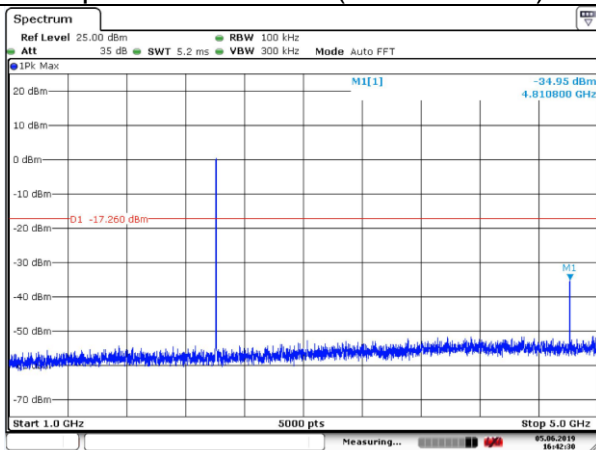

Spurious Emission (5GHz –25GHz)

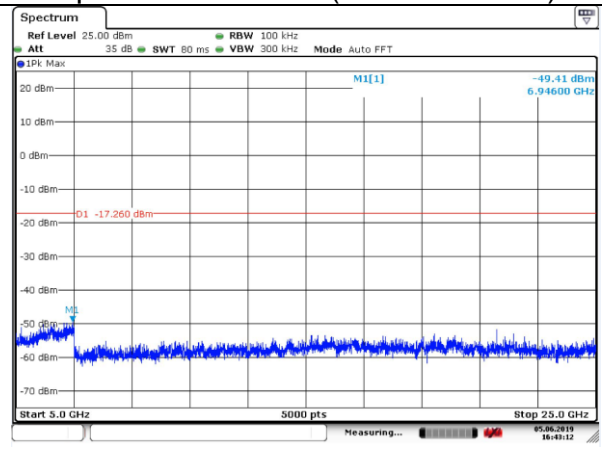


Low band edge

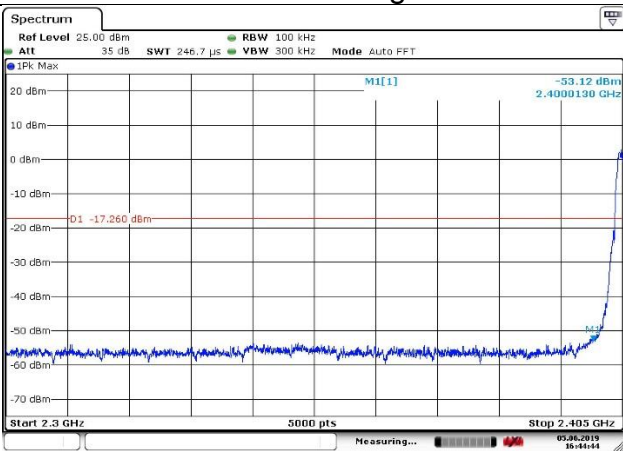




Zigbee O-QPSK Out-of-Band Emissions
Channel 20 (2450MHz)

Referencel point

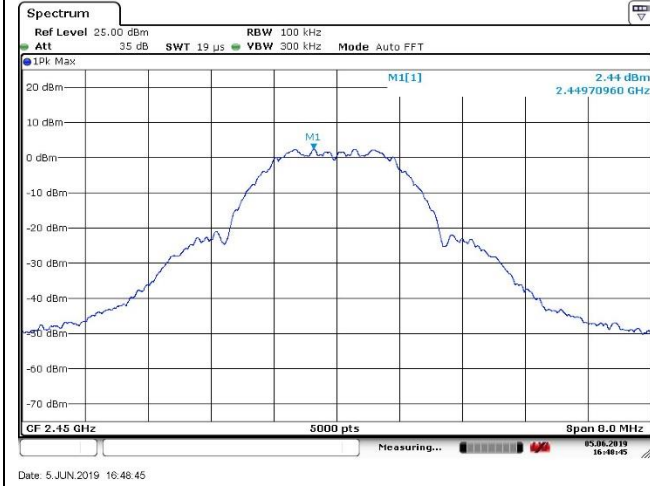


Date: 5 JUN 2019 16:48:45

Spurious Emission (30MHz – 1GHz)

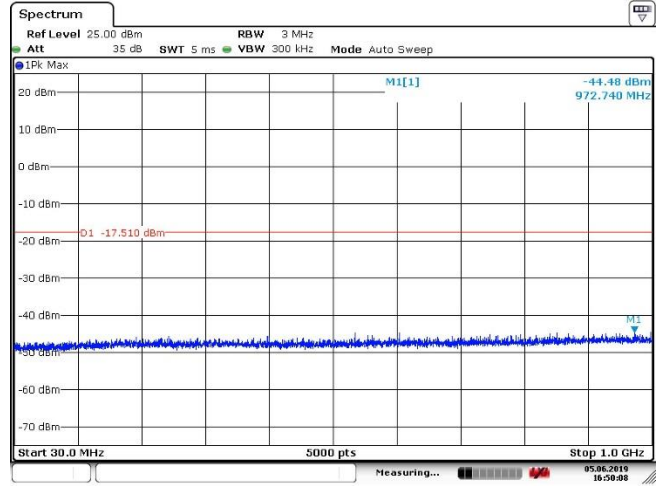


Date: 5 JUN 2019 16:50:08

Spurious Emission (1GHz – 5GHz)

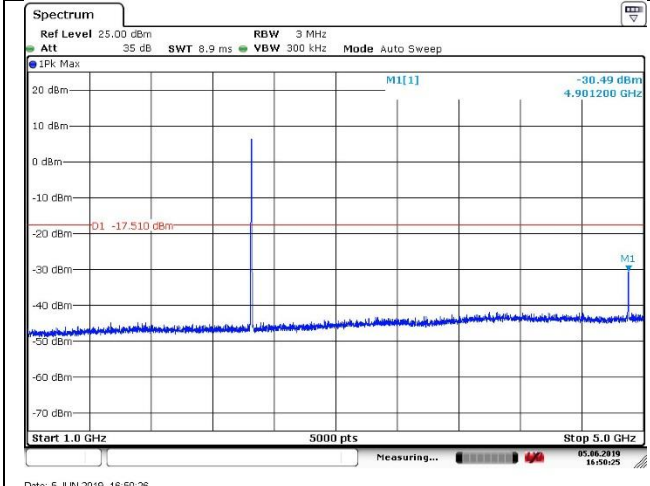

Date: 5 JUN 2019 16:50:26

Spurious Emission (5GHz – 25GHz)

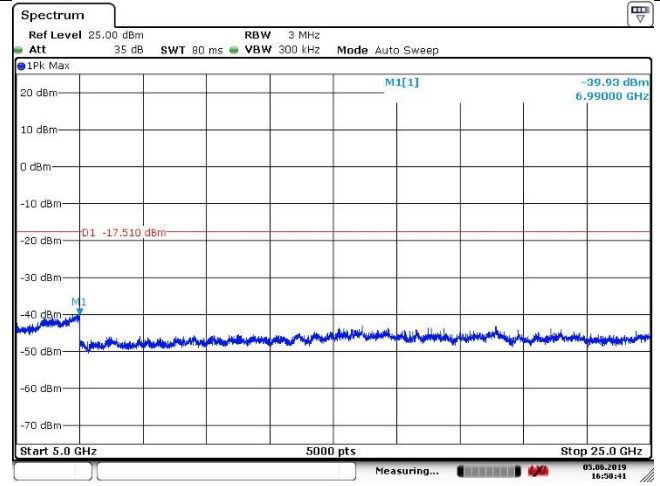


Date: 5 JUN 2019 16:50:42

Zigbee O-QPSK Out-of-Band Emissions Channel 26 (2480MHz)


Referencel point




Spurious Emission (30MHz – 1GHz)

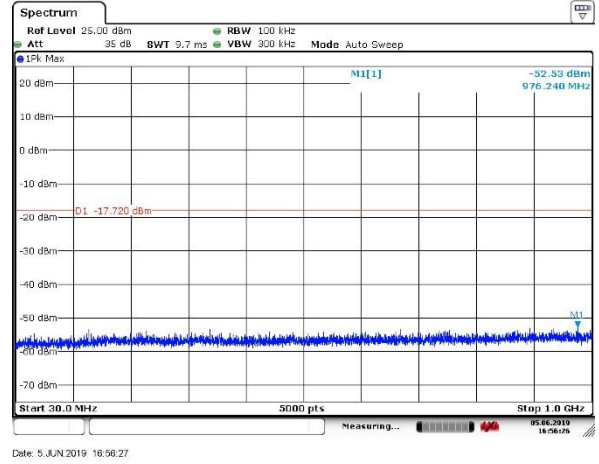


Spurious Emission (1GHz –5GHz)

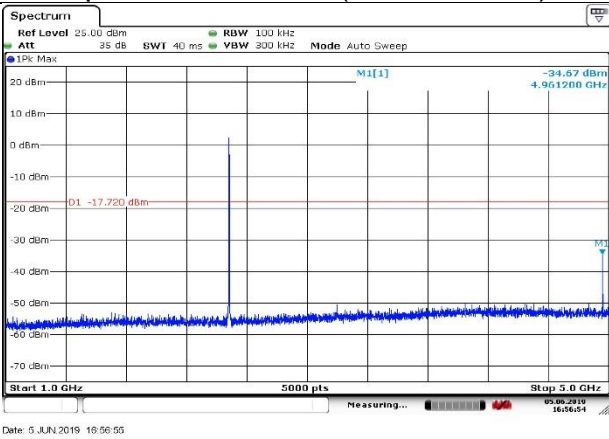

Spurious Emission (5GHz –25GHz)

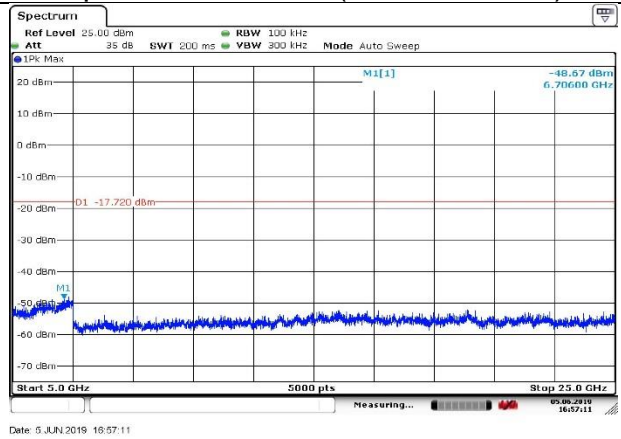

High band edge

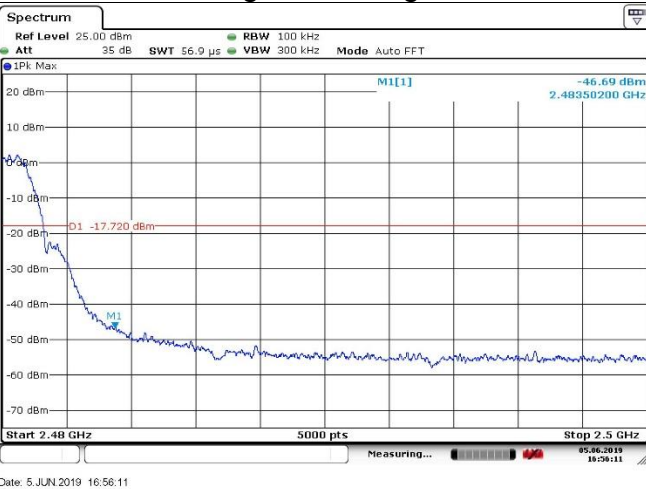

9.6 Spurious radiated emissions for transmitter

Test Method

- 1: The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3-meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2: The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
- 3: The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4: For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5: Use the following spectrum analyzer settings According to C63.10:

For Above 1GHz

Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 1MHz, VBW \geq RBW for peak measurement and VBW = 10Hz for average measurement,
Sweep = auto, Detector function = peak, Trace = max hold.

For Below 1GHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 KHz, VBW \geq RBW for peak measurement, Sweep = auto, Detector function = peak,
Trace = max hold.

Note:

- 1: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for peak detection (PK) at frequency above 1GHz.
- 3: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average ((duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor (20log(1/duty cycle)).
- 4: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.

Limit

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205, must comply with the radiated emission limits specified in section 15.209.

LIMITS OF RADIATED EMISSION MEASUREMENT (Frequency Range 9kHz-1000MHz)

Frequency MHz	Field Strength uV/m	Measured Distance Meters
0.009~0.490	2400/F (kHz)	300
0.490~1.705	24000/F (kHz)	30
1.705~30	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency MHz	Field Strength (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20logEmission level (uV/m).



Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Transmitting spurious emission test result as below:

Remark 1: There are the ambient noise within frequency range 9kHz ~ 30MHz and 18GHz ~ 25GHz, the permissible value is not show in the report.

Remark 2: Average measurement was not performed if peak level lower than average limit.

Remark 3: Other frequency was 20dB below limit line with 1-18GHz, there is not show in the report.

Test Result

Test mode: Zigbee O-QPSK					
Channel 11 (2405MHz)					
Frequency (MHz)	Measure Level (dBuV/m)	Limit (dBuV/M)	Margin (dB)	Detector	Polarization
2389.5	41.1	74.0	-32.9	Peak	Horizontal
4890.0	44.2	74.0	-29.8	Peak	Horizontal
2389.5	42.6	74.0	-31.4	Peak	Vertical
4891.3	41.2	74.0	-32.8	Peak	Vertical

Test mode: Zigbee O-QPSK					
Channel 20 (2450MHz)					
Frequency (MHz)	Measure Level (dBuV/m)	Limit (dBuV/M)	Margin (dB)	Detector	Polarization
4898.0	43.1	74.0	-30.9	Peak	Horizontal
4898.3	41.2	74.0	-32.8	Peak	Vertical

Test mode: Zigbee O-QPSK					
Channel 26 (2480MHz)					
Frequency (MHz)	Measure Level (dBuV/m)	Limit (dBuV/M)	Margin (dB)	Detector	Polarization
2483.5	41.1	74.0	-32.9	Peak	Horizontal
4958.5	40.2	74.0	-33.8	Peak	Horizontal
2483.5	42.6	74.0	-31.4	Peak	Vertical
4958.5	41.2	74.0	-32.8	Peak	Vertical


Remark:

- (1) Emission level= Original Receiver Reading + Correct Factor
- (2) Correct Factor = Antenna Factor + Cable Loss -Amplifier gain
- (3) Margin = limit – Corrected Reading

The worst case of Radiated Emission below 1GHz:

Site: 3 meter chamber	Time: 2019/06/10 - 10:14
Limit: FCC_Part15.109_RE(3m)_ClassB	Engineer: Jiayi XU
Probe: VULB9168	Polarity: Horizontal
EUT: Smart Gateway, Model no: TYGWZW-01	Power: 120VAC, 60Hz
Note: Transmit by Zigbee at channel 2405MHz.	
Note: There is the worst case within frequency range 30MHz~1GHz.	

RE_VULB9168_pre_Cont_30-1000

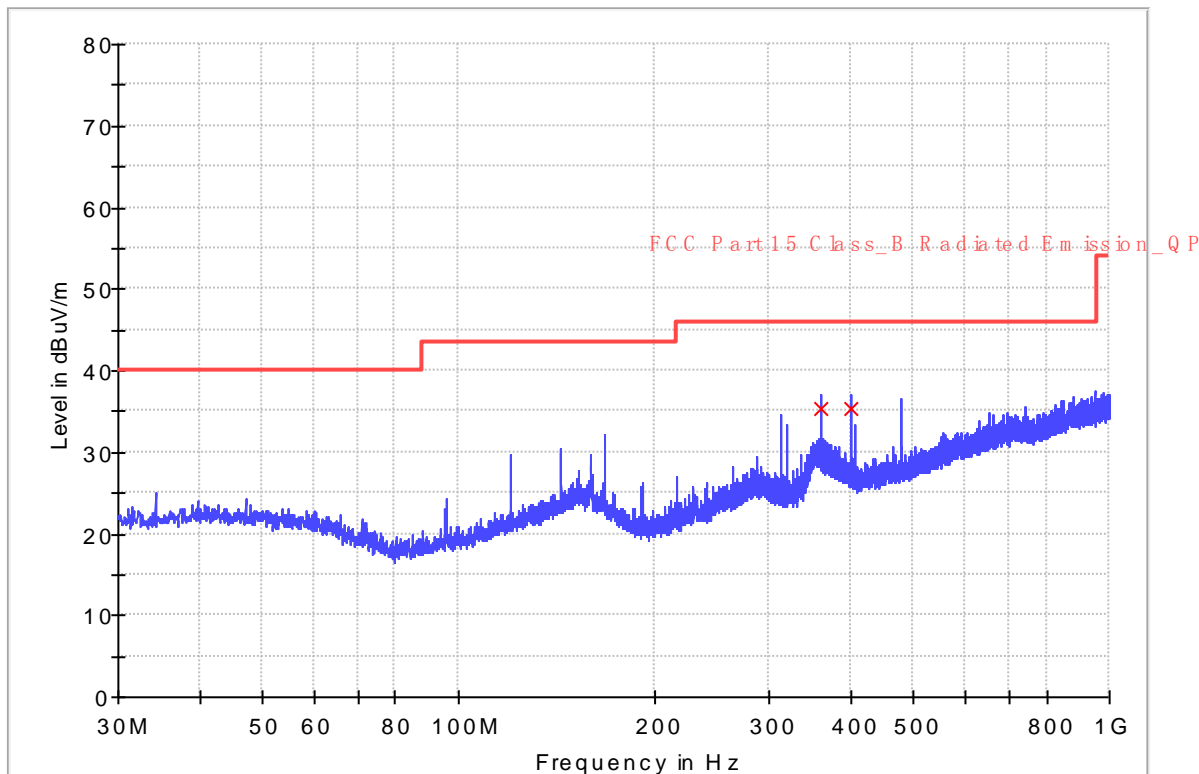

Limit and Margin

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
360.000000	35.4	1000.0	120.000	100.3	H	358.0	16.5	10.6	46.0
400.000000	35.4	1000.0	120.000	100.3	H	358.0	17.4	10.6	46.0

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)


Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.



Site: 3 meter chamber	Time: 2019/06/10 - 10:28
Limit: FCC_Part15.109_RE(3m)_ClassB	Engineer: Jiaxi XU
Probe: VULB9168	Polarity: Vertical
EUT: EUT: Smart Gateway, Model no: TYGWZW-01	Power: 120VAC, 60Hz
Note: Transmit by Zigbee at channel 2405MHz.	
Note: There is the worst case within frequency range 30MHz~1GHz.	

RE_VULB9168_pre_Cont_30-1000

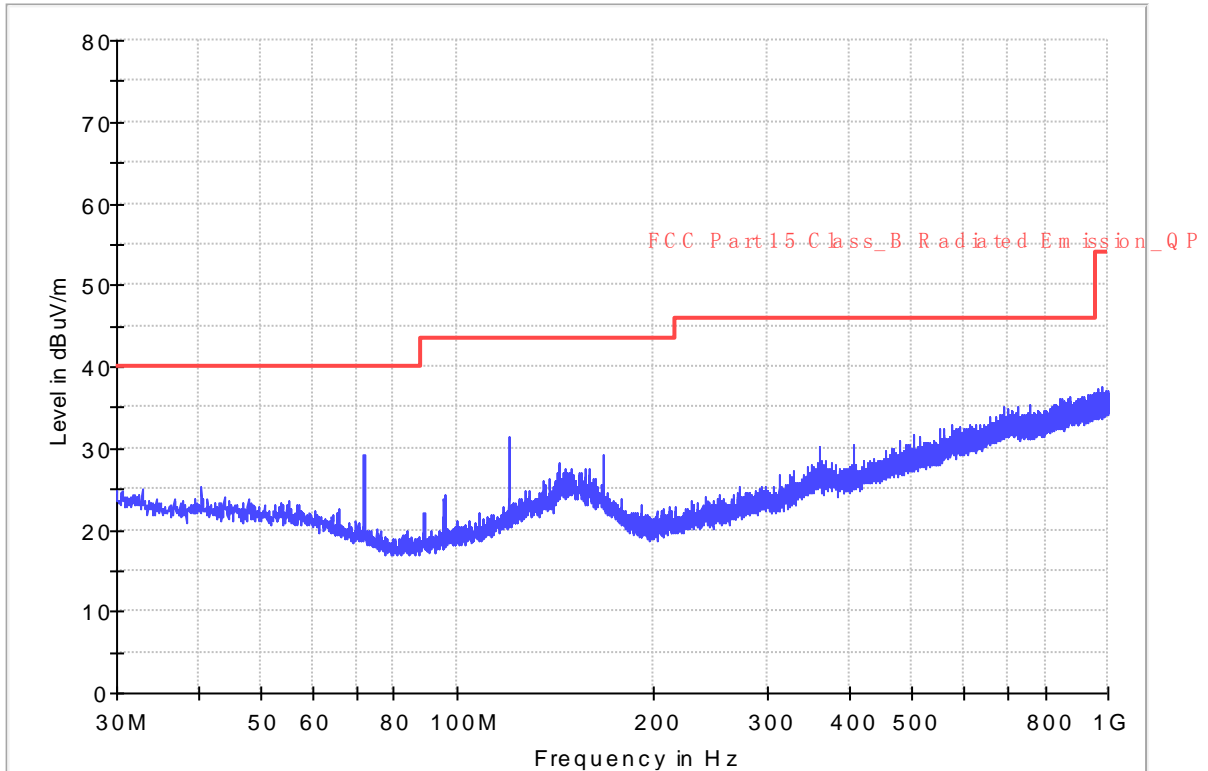

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

10 Test Equipment List

List of Test Instruments Test Site1

	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
C	Signal Analyzer	Rohde & Schwarz	FSV40	101091	2019-8-6
	Wideband power sensor	Rohde & Schwarz	NRP-Z81	103140	2019-8-6
RE	EMI Test Receiver	Rohde & Schwarz	ESR3	101906	2019-8-6
	Signal Analyzer	Rohde & Schwarz	FSV40	101091	2019-8-6
	Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	848	2021-6-10
	Horn Antenna	Rohde & Schwarz	HF907	102393	2021-4-1
	Pre-amplifier	Rohde & Schwarz	SCU-18D	19006451	2019-8-6
	Loop antenna	Rohde & Schwarz	HFH2-Z2	100443	2019-7-8
	DOUBLE-RIDGED WAVEGUIDE HORN WITH PRE-AMPLIFIER (18 GHZ - 40 GHZ)	ETS-Lindgren	3116C-PA	E326	2021-1-28
	3m Semi-anechoic chamber	TDK	9X6X6	----	2021-5-10
CE	EMI Test Receiver	Rohde & Schwarz	ESR 3	101907	2019-8-6
	LISN	Rohde & Schwarz	ENV216	101924	2019-8-6

C - Conducted RF tests

- Conducted peak output power
- 6dB Occupied Bandwidth
- Power spectral density*
- Spurious RF conducted emissions
- Conducted Band edge



11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

Test Site1

Items	Extended Uncertainty
Conducted Disturbance at Mains Terminals	150kHz to 30MHz, LISN, 3.16dB
Radiated Disturbance	30MHz to 1GHz, ± 5.03 dB (Horizontal) ± 5.12 dB (Vertical)
	1GHz to 18GHz, ± 5.15 dB (Horizontal) ± 5.12 dB (Vertical)
	18GHz to 25GHz, ± 4.76 dB



12 Photographs of Test Set-ups

Refer to the < Test Setup photos >.



13 Photographs of EUT

Refer to the < External Photos > & < Internal Photos >.

THE END