



# FCC Test Report

Report No: FCS202109030W01

Issued for

Applicant:	Shenzhen Neewer Technology Co., Ltd
Address:	ROOM 1901-1903, Block A, LU SHAN BUILDING NO.3023 CHUNFENGRD LUO HU DISTRICT, SHENZHEN, GUANGDONG, CHINA
Product Name:	Wireless electric camera slider rails
Brand Name:	N/A
Model Name:	RT-108
Series Model:	VS-60WC, VS-80WC, VS-100WC, VS-120WC,RT-109, NEEWER-ER1,ER1
FCC ID:	2ANIV-RT108
Issued By: Flux Compliance Service Laboratory Add: Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan Tel: 769-27280901 Fax:769-27280901 <a href="http://www.fcs-lab.com">http://www.fcs-lab.com</a>	

## 目录

**1 SUMMARY OF TEST RESULTS**

5

Applicant's Name.....: Shenzhen Neewer Technology Co., Ltd  
ROOM 1901-1903, Block A, LU SHAN BUILDING NO.3023  
Address.....: CHUNFENGRD LUO HU DISTRICT, SHENZHEN, GUANGDONG,  
CHINA  
Manufacture's Name.....: Shenzhen Neewer Technology Co., Ltd  
ROOM 1901-1903, Block A, LU SHAN BUILDING NO.3023  
Address.....: CHUNFENGRD LUO HU DISTRICT, SHENZHEN, GUANGDONG,  
CHINA

**Product Description**

Product Name.....: Wireless electric camera slider rails  
Brand Name .....: N/A  
Model Name.....: RT-108  
Series Model.....: VS-60WC, VS-80WC, VS-100WC, VS-120WC,RT-109,  
NEEWER-ER1,ER1  
Test Standards.....: FCC Rules and Regulations Part 15 Subpart C, Section 249  
Test Procedure.....: ANSI C63.10:2013

This device described above has been tested FCS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of FCS, this document may be altered or revised by FCS, personal only, and shall be noted in the revision of the document..

**Date of Test.....:**

Date (s) of performance of tests.: 27 Sep, 2021 ~ 08 Oct, 2021

Date of Issue.....: 08 Oct, 2021

Test Result.....: Pass

Tested by : Scott Shen  
(Scott Shen)

Reviewed by : Duke Qian  
(Duke Qian)

Approved by : Kait Chen  
(Kait Chen)

Table of Contents	Page
<b>1. SUMMARY OF TEST RESULTS.....</b>	<b>5</b>
1.1 TEST FACTORY.....	6
1.2 MEASUREMENT UNCERTAINTY.....	6
<b>2. GENERAL INFORMATION.....</b>	<b>7</b>
2.1 GENERAL DESCRIPTION OF THE EUT.....	7
2.2 DESCRIPTION OF THE TEST MODES.....	9
2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS.....	10
2.4 EQUIPMENTS LIST.....	11
<b>3. CONDUCTED EMISSION MEASUREMENT.....</b>	<b>12</b>
3.1 LIMIT.....	12
3.2 TEST PROCEDURE.....	12
3.3 TEST SETUP.....	13
3.4 TEST RESULTS.....	14
<b>4. RADIATED EMISSION MEASUREMENT.....</b>	<b>16</b>
4.1 LIMIT.....	16
4.2 TEST PROCEDURE.....	17
4.3 TEST SETUP.....	18
4.4 TEST RESULTS.....	19
<b>5. BAND EDGE TEST.....</b>	<b>26</b>
5.1 LIMIT.....	26
5.2 TEST PROCEDURE.....	26
5.3 TEST SETUP.....	27
5.4 TEST RESULTS.....	28
<b>6. 20 DB BANDWIDTH TEST.....</b>	<b>32</b>
6.1 LIMIT.....	32
6.2 TEST PROCEDURE.....	32
6.3 TEST SETUP.....	32
6.4 TEST RESULTS.....	33
<b>7. ANTENNA REQUIREMENT.....</b>	<b>35</b>
7.1 STANDARD REQUIREMENT.....	35
7.2 EUT ANTENNA.....	35

**Revision History**

Rev.	Issue Date	Effect Page	Contents
00	08 Oct, 2021	All	Initial Issue

1. SUMMARY OF TEST RESULTS

FCC Part 15.249,Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.205(a), 15.209(a), 15.249(a), 15.249(c)	Radiated Spurious Emission	PASS	--
15.209	Field strength of fundamental	PASS	
15.249(d)	Band Edge Emission	PASS	--
15.215(c)	20dB Bandwidth	PASS	--
15.203	Antenna Requirement	PASS	--

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report
- (2) All tests are according to ANSI C63.10-2013

### 1.1 TEST FACTORY

Company Name:	Flux Compliance Service Laboratory
Address:	Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan
Telephone:	+86-769-27280901
Fax:	+86-769-27280901
FCC Test Firm Registration Number: 514908 Designation number: CN0127 A2LA accreditation number: 5545.01	

### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.71$ dB
2	Unwanted Emissions, conducted	$\pm 2.98$ dB
3	Conducted Emission (9KHz-150KHz)	$\pm 4.13$ dB
4	Conducted Emission (150KHz-30MHz)	$\pm 4.74$ dB
5	All emissions,radiated(<1G) 30MHz-1000MHz	$\pm 3.2$ dB
6	All emissions,radiated (1GHz -18GHz)	$\pm 3.66$ dB
7	All emissions,radiated (18GHz -40GHz)	$\pm 4.31$ dB

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Wireless electric camera slider rails
Trade Name	N/A
Model Name	RT-108
Series Model	VS-60WC, VS-80WC, VS-100WC, VS-120WC,RT-109, NEEWER-ER1,ER1
Model Difference	The above product with same circuit, PCB layout, electrical parts, materials and wiring structures, Appearance shape, the materials of decorative accessories is same, only different color.
Channel List	Please refer to the Note 2.
BT	Frequency:2402-2480MHz Modulation: GFSK Data rate: 1Mbps Channel number: BLE 40CH
Power Supply	DC 5~7.4V
Hardware version number	V1.0
Software version number	V1.0
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

**Channel List**

2. **Operation Frequency each of channel**

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	NA	KOLD	PCB Antenna	N/A	1.0	Antenna



## 2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test software: FCC tool


The test software was used to control EUT work in continuous TX mode, and select test channel, Wireless mode as below table

No.	Test model description
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK

Note:

1. All the test modes can be supply by battery, only the result of the worst case recorded in the report. GFSK mode is worst mode.
2. For radiated emission, 3 axis were chosen for testing for each applicable mode.
3. The EUT used fully charge battery when tested.
4. During the test, the dutycycle>98%, the test voltage was tuned from 85% to 115% of the Nominal rate supply votage, and found that the worst case was the nominal rated supply condition, So the report just shows that condition's data

### Configuration and peripherals

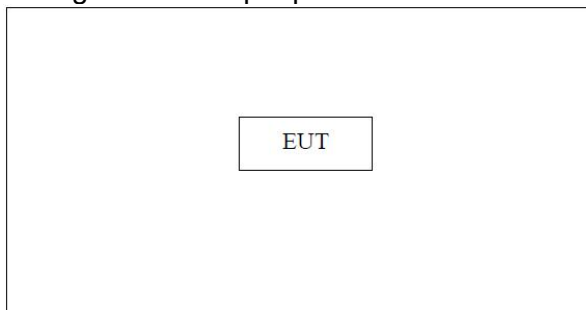

**2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

**Necessary accessories**

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
1	Adapter	HW	0789SK	N/A	This adapter is for testing only in report.

**Support units**

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note

**Note:**

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

## 2.4 EQUIPMENTS LIST

### Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESRP 3	FCS-E001	2021.05.26	2022.05.25
Signal Analyzer	R&S	FSV40-N	FCS-E012	2021.05.26	2022.05.25
Active loop Antenna	ZHINAN	ZN30900C	FCS-E013	2021.07.08	2022.07.07
Bilog Antenna	SCHWARZBECK	VULB 9168	FCS-E002	2021.08.26	2022.08.25
Horn Antenna	SCHWARZBECK	BBHA 9120D	FCS-E003	2021.08.26	2022.08.25
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	FCS-E018	2021.05.26	2022.05.25
Pre-Amplifier(0.1M-3G Hz)	EMCI	EM330N	FCS-E004	2021.05.26	2022.05.25
Pre-Amplifier (1G-18GHz)	N/A	TSAMP-0518SE	FCS-E014	2021.05.26	2022.05.25
Pre-Amplifier (18G-40GHz)	TERA-MW	TRLA-0400	FCS-E019	2021.07.08	2022.07.07
Temperature & Humidity	HTC-1	victor	FCS-E005	2021.08.26	2022.08.25

### Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESPI	FCS-E020	2021.05.26	2022.05.25
LISN	R&S	ENV216	FCS-E007	2021.07.08	2022.07.07
LISN	ETS	3810/2NM	FCS-E009	2021.05.26	2022.05.25
Temperature & Humidity	HTC-1	victor	FCS-E008	2021.07.08	2022.07.07

### RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
Spectrum Analyzer	Keysight	N9020A	FCS-E015	2021.05.26	2022.05.25
Spectrum Analyzer	Agilent	E4447A	MY50180039	2021.07.08	2022.07.07
Spectrum Analyzer	R&S	FSV-40	101499	2021.08.26	2022.08.25

### 3. CONDUCTED EMISSION MEASUREMENT

#### 3.1 LIMIT

Operating frequency band. In case the emission fall within the restricted band specified on Part 207(a) limit in the table below has to be followed.

FREQUENCY (MHz)	Conducted Emissionlimit (dBUV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


#### 3.2 TEST PROCEDURE

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- a. The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.3 TEST SETUP

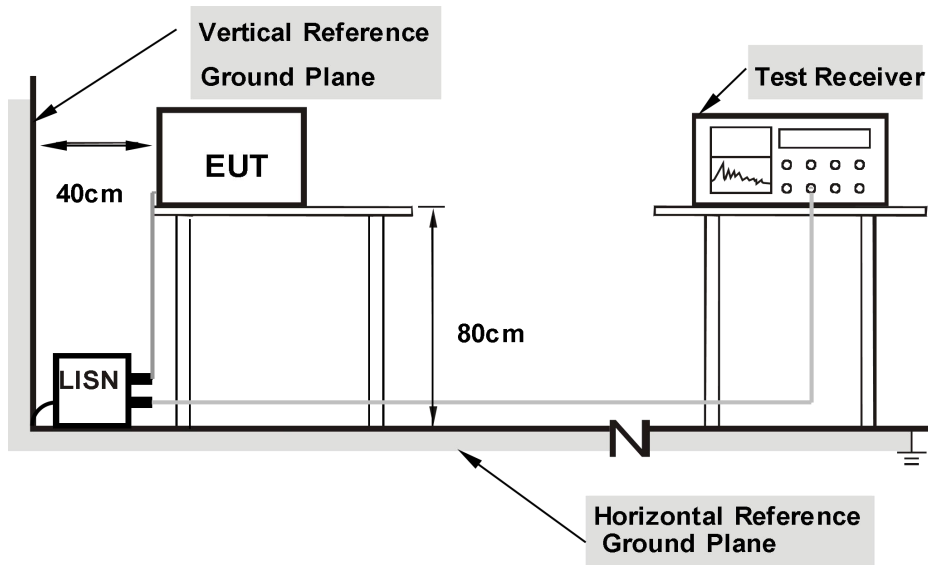


- Note:**
- 1.Support units were connected to second LISN.
  - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support. **units.**

### 3.4 TEST RESULTS


Temperature:	25°C	Relative Humidity:	50%
Test Mode:	GFSK	Test Voltage:	DC 5V
Phase:	L	Result:	Pass

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1590	39.95	9.78	49.73	65.52	15.79	QP
2	0.1590	21.46	9.78	31.24	55.52	24.28	AVG
3	0.2535	33.79	9.81	43.60	61.64	18.04	QP
4	0.2535	17.25	9.81	27.06	51.64	24.58	AVG
5	0.6090	30.73	9.88	40.61	56.00	15.39	QP
6	0.6090	17.10	9.88	26.98	46.00	19.02	AVG
7	0.9645	30.94	9.92	40.86	56.00	15.14	QP
8	0.9645	11.36	9.92	21.28	46.00	24.72	AVG
9	1.6530	22.42	9.93	32.35	56.00	23.65	QP
10	1.6530	9.84	9.93	19.77	46.00	26.23	AVG
11	5.3070	27.23	9.96	37.19	60.00	22.81	QP
12	5.3070	12.70	9.96	22.66	50.00	27.34	AVG

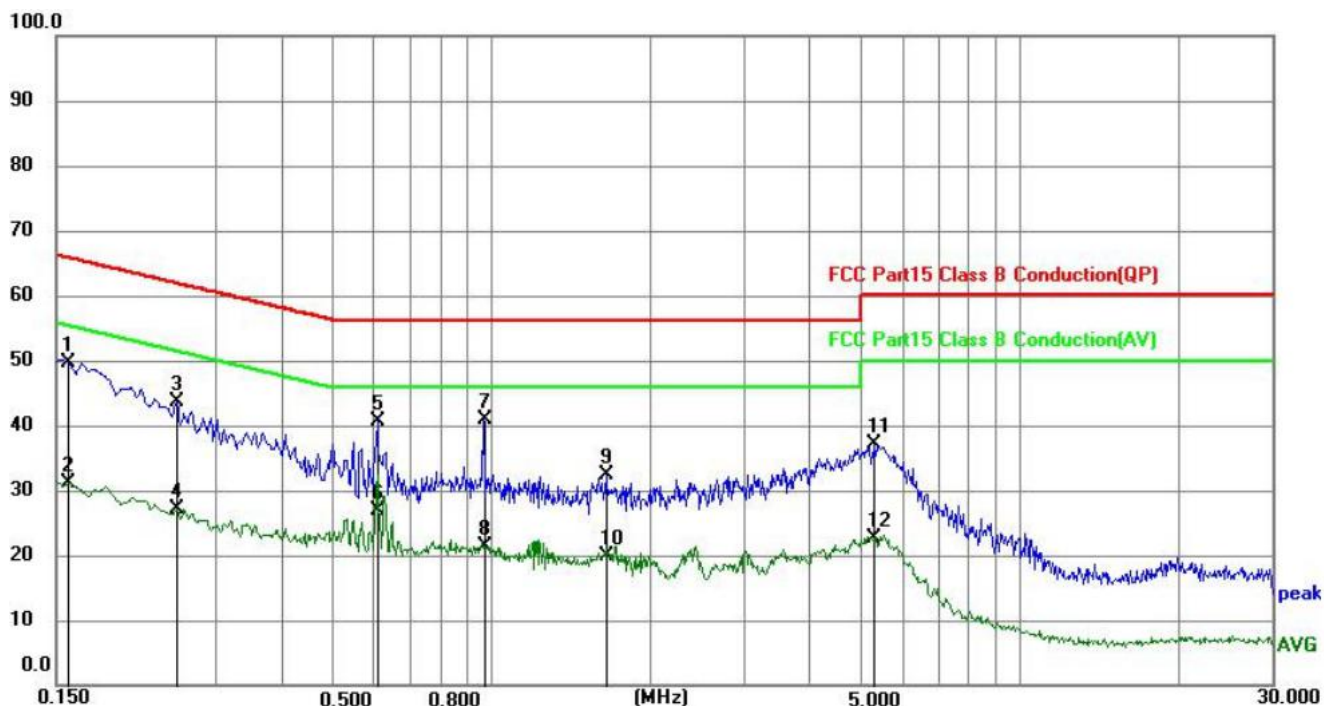

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	GFSK	Test Voltage:	DC 5V
Phase:	N	Result:	Pass

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1815	35.79	9.78	45.57	64.42	18.85	QP
2	0.1815	18.71	9.78	28.49	54.42	25.93	AVG
3	0.6090	29.35	9.88	39.23	56.00	16.77	QP
4	0.6090	23.11	9.88	32.99	46.00	13.01	AVG
5	0.9915	23.39	9.92	33.31	56.00	22.69	QP
6	0.9915	12.09	9.92	22.01	46.00	23.99	AVG
7	5.1900	23.54	10.03	33.57	60.00	26.43	QP
8	5.1900	15.09	10.03	25.12	50.00	24.88	AVG
9	9.6315	13.39	10.18	23.57	60.00	36.43	QP
10	9.6315	0.25	10.18	10.43	50.00	39.57	AVG
11	24.8325	9.06	10.27	19.33	60.00	40.67	QP
12	24.8325	-3.02	10.27	7.25	50.00	42.75	AVG

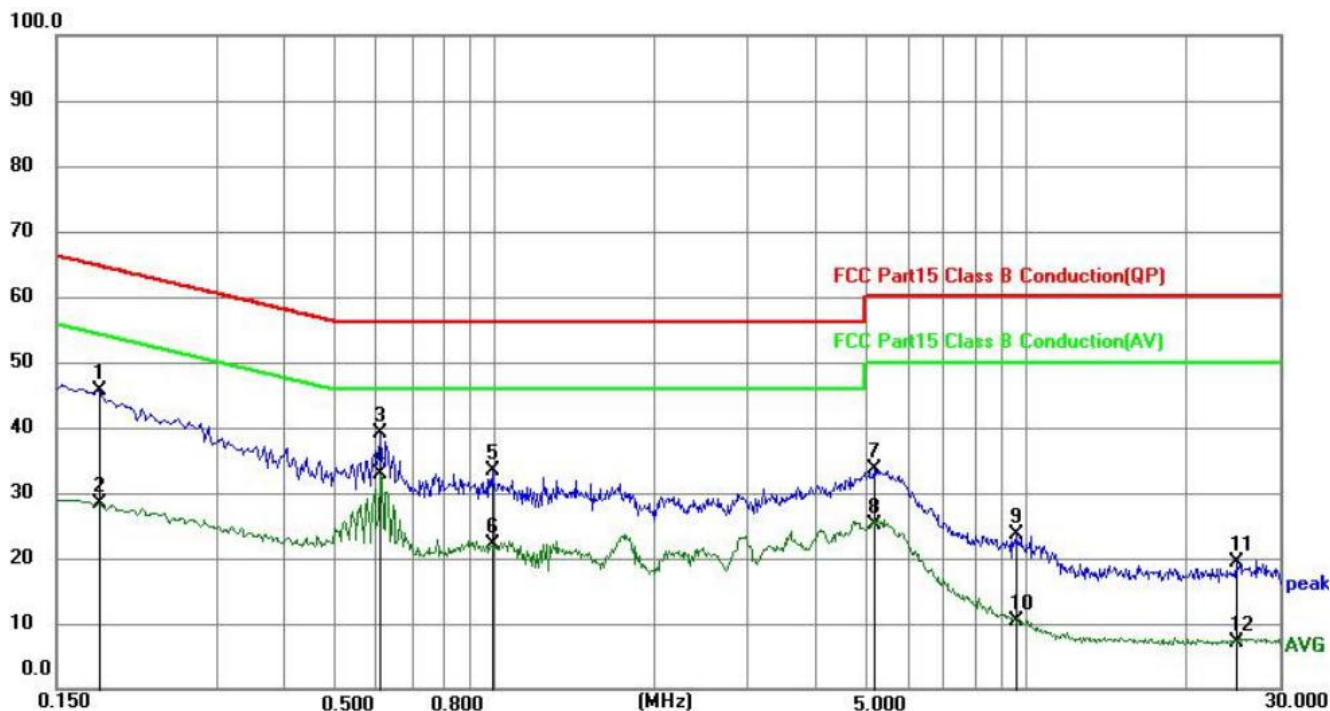

Remark:

1. All readings are Quasi-Peak and Average values.

#### 4. RADIATED EMISSION MEASUREMENT

##### 4.1 LIMIT

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed

##### LIMITS OF RADIATED EMISSION MEASUREMENT (0.009mhz - 1000mhz)

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

##### LIMITS OF RADIATED EMISSION MEASUREMENT (1GHz-25 GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

##### LIMITS OF FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
2400-2483.5	114	94

##### Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).



#### 4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	PK=1MHz / 1MHz, AV=1 MHz /10 Hz (Peak detector is for Both)


- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meters (above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

**Note:**


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported  
 For fundamental frequency ,RBW>20dB BW ,VBW>RBW,PK detector for PK value, RMS detector for AV value.

### 4.3 TEST SETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

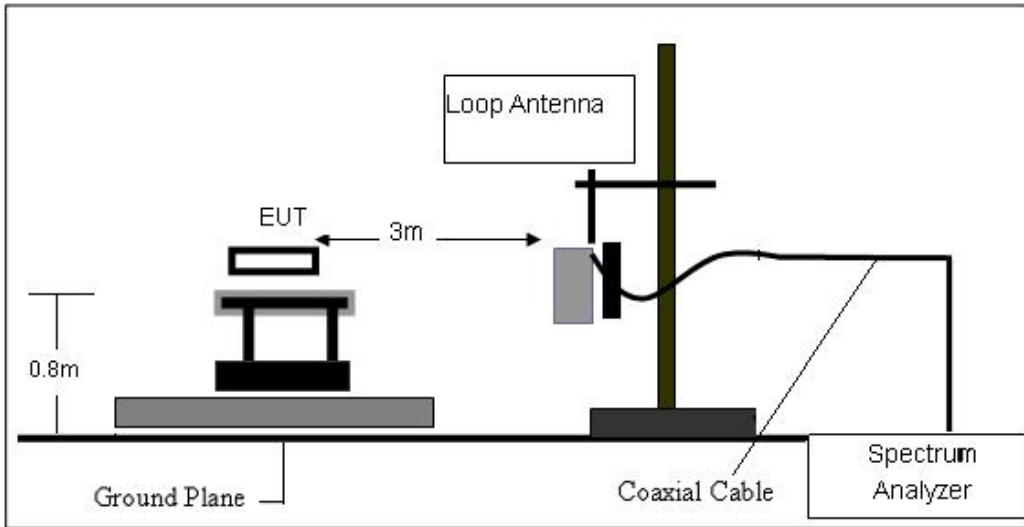

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

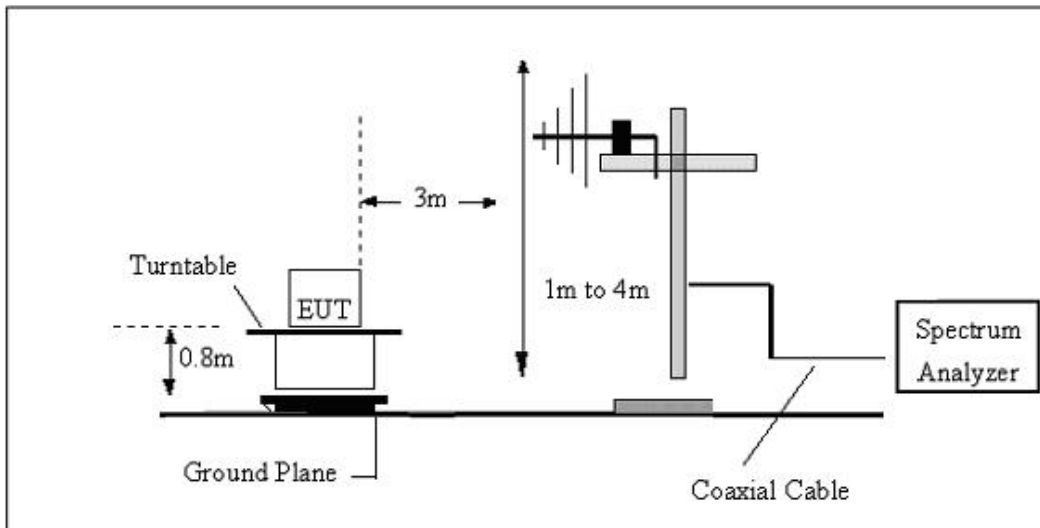

#### (C) Radiated Emission Test-Up Frequency Above 1GHz

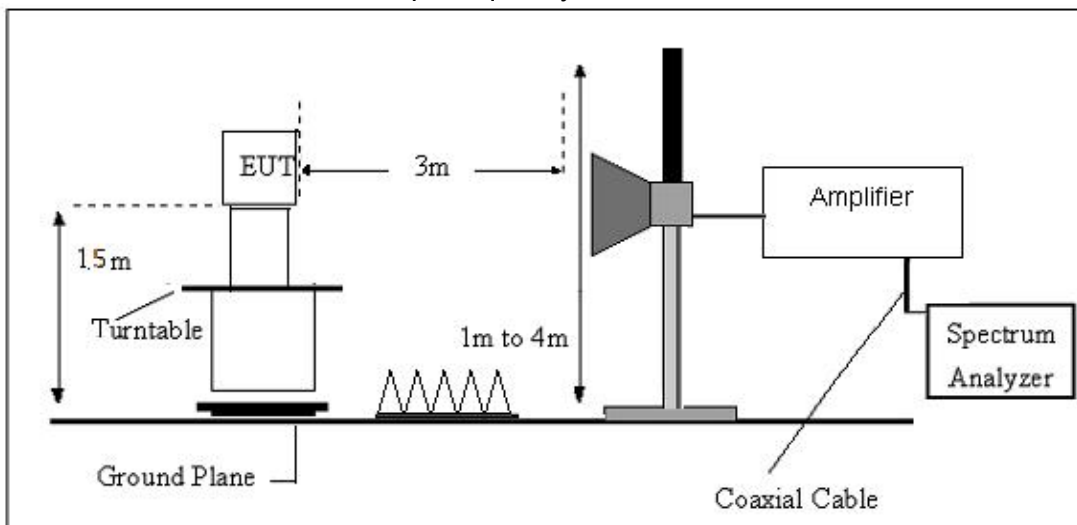

#### 4.4 TEST RESULTS

Temperature:	25°C	Relative Humidity:	60%
Test Mode:	GFSK Mode	Test Voltage:	DC 5V

For field strength of the fundamental signal

Peak value

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	86.10	10.32	96.42	114	-17.58	Horizontal
2402	85.58	10.32	95.90	114	-18.10	Vertical
2440	85.88	10.36	96.24	114	-17.76	Horizontal
2440	85.52	10.36	95.88	114	-18.12	Vertical
2480	84.55	10.41	94.96	114	-19.04	Horizontal
2480	84.32	10.41	94.73	114	-19.27	Vertical

Average value

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	78.13	10.32	88.45	94	-5.55	Horizontal
2402	77.63	10.32	87.95	94	-6.05	Vertical
2440	76.96	10.36	87.32	94	-6.68	Horizontal
2440	76.52	10.36	86.88	94	-7.12	Vertical
2480	76.55	10.41	86.96	94	-7.04	Horizontal
2480	76.05	10.41	86.46	94	-7.54	Vertical

For spurious emission

(9KHz-30MHz)

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F	Test Result
--	--	--	--	--	PASS
--	--	--	--	--	PASS

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


(30MHZ-1000MHZ)

Temperature:	23.7°C	Relative Humidity:	61%
Test Voltage:	DC 5V	Phase:	Horizontal
Test Mode:	GFSK		

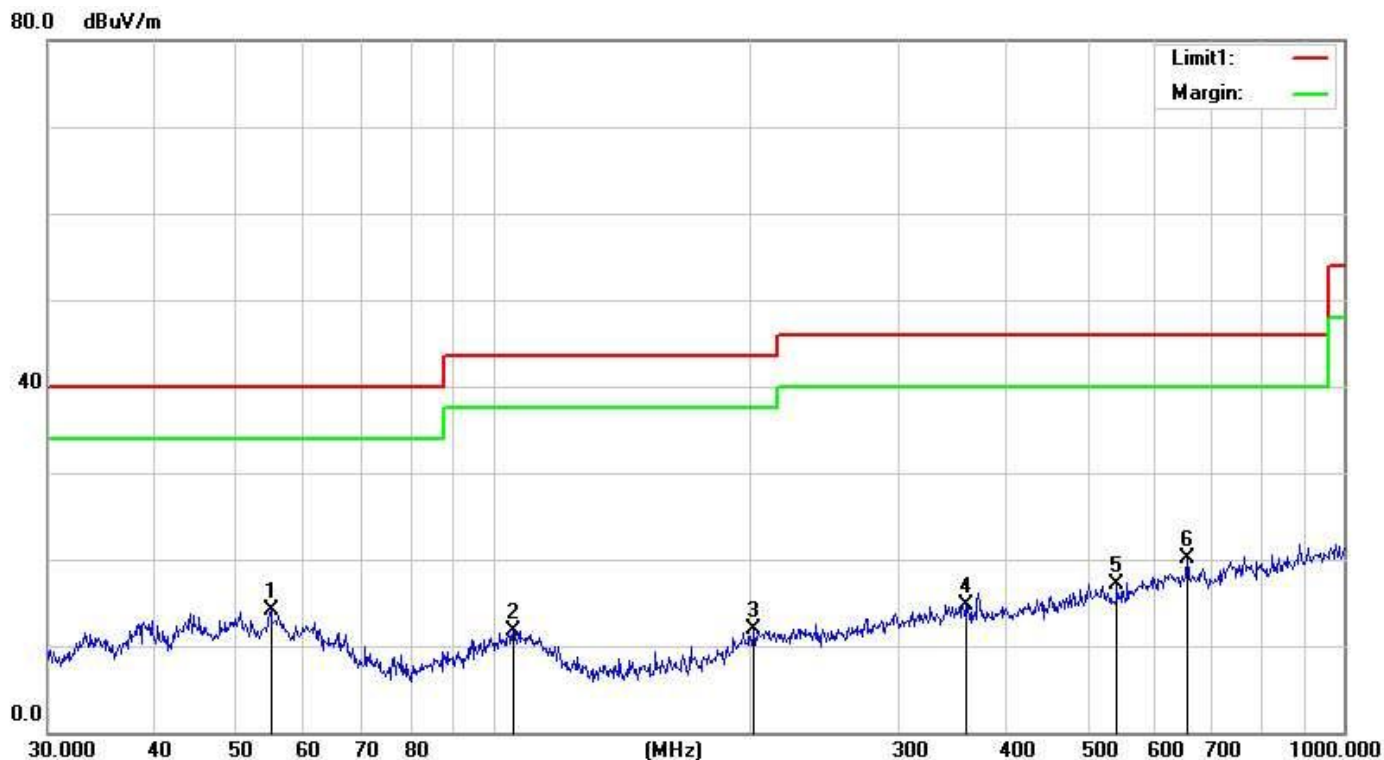

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	54.8348	30.75	-16.63	14.12	40.00	-25.88	QP
2	105.6415	29.74	-17.98	11.76	43.50	-31.74	QP
3	202.8104	29.80	-17.93	11.87	43.50	-31.63	QP
4	360.4476	29.73	-14.94	14.79	46.00	-31.21	QP
5	541.3725	30.21	-13.14	17.07	46.00	-28.93	QP
6	654.2318	30.61	-10.55	20.06	46.00	-25.94	QP

Temperature:	22.7°C	Relative Humidity:	61%
Test Voltage:	DC 5V	Phase:	Vertical
Test Mode:	GFSK		

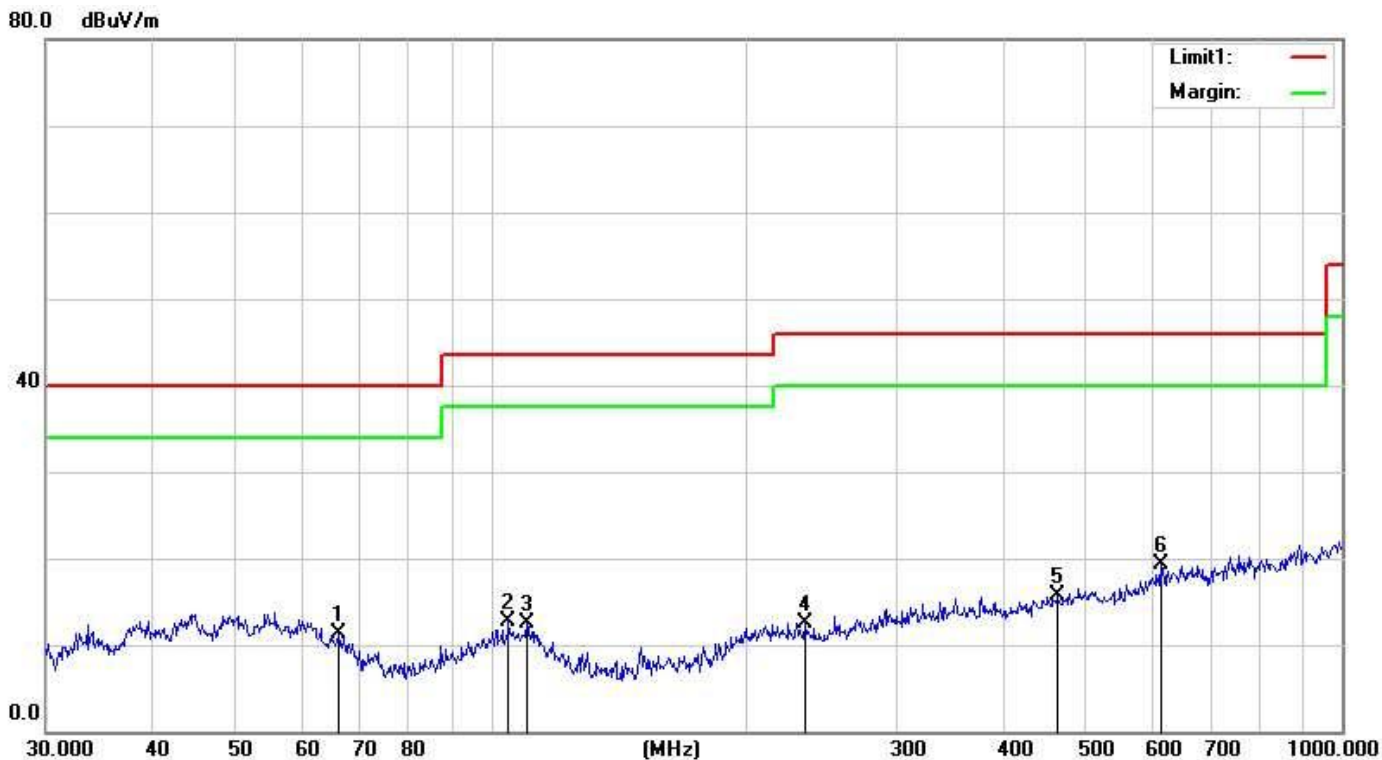

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	66.2662	51.54	-40.24	11.30	40.00	-28.70	QP
2	104.9033	52.89	-40.24	12.65	43.50	-30.85	QP
3	110.1816	52.83	-40.24	12.59	43.50	-30.91	QP
4	234.1684	52.76	-40.24	12.52	46.00	-33.48	QP
5	463.9696	55.96	-40.24	15.72	46.00	-30.28	QP
6	612.0642	59.59	-40.24	19.35	46.00	-26.65	QP

Remarks:

1. Margin = Result (Result =Reading + Factor ) - Limit

(1GHZ~25GHZ)

LOW CH(GFSK)

Peak value

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	41.69	31.78	8.60	32.09	49.98	74.00	-24.02	Vertical
7206.00	33.97	36.15	11.65	32.00	49.77	74.00	-24.23	Vertical
9608.00	31.55	37.95	14.14	31.62	52.02	74.00	-21.98	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	45.45	31.78	8.60	32.09	53.74	74.00	-20.26	Horizontal
7206.00	37.57	36.15	11.65	32.00	53.37	74.00	-20.63	Horizontal
9608.00	34.11	37.95	14.14	31.62	54.58	74.00	-19.42	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal

AV value

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	28.65	31.78	8.60	32.09	36.94	54.00	-17.06	Vertical
7206.00	23.01	36.15	11.65	32.00	38.81	54.00	-15.19	Vertical
9608.00	23.71	37.95	14.14	31.62	44.18	54.00	-9.82	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	32.42	31.78	8.60	32.09	40.71	54.00	-13.29	Horizontal
7206.00	23.57	36.15	11.65	32.00	39.37	54.00	-14.63	Horizontal
9608.00	23.28	37.95	14.14	31.62	43.75	54.00	-10.25	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

MIDDLE CH(GFSK)

Peak value

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4880	41.21	31.85	8.67	32.12	49.61	74	-24.39	Vertical
7320	40.36	36.37	11.72	31.89	56.56	74	-17.44	Vertical
9760	41.21	38.35	14.25	31.62	62.15	74	-11.85	Vertical
12200	*					74		Vertical
14640	*					74		Vertical
4880	42.21	31.85	8.67	32.12	50.61	74	-23.39	Horizontal
7320	40.43	36.37	11.72	31.89	56.63	74	-17.37	Horizontal
9760	41.41	38.35	14.25	31.62	62.35	74	-11.65	Horizontal
12200	*					74		Horizontal
14640	*					74		Horizontal

AV value

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4880	26.02	31.85	8.67	32.12	34.42	54	-19.58	Vertical
7320	21.88	36.37	11.72	31.89	38.08	54	-15.92	Vertical
9760	20.57	38.35	14.25	31.62	41.55	54	-12.45	Vertical
12200	*					54		Vertical
14640	*					54		Vertical
4880	32.23	31.85	8.67	32.12	40.63	54	-13.37	Horizontal
7320	24.10	36.37	11.72	31.89	40.30	54	-13.70	Horizontal
9760	20.52	38.35	14.25	31.62	41.50	54	-12.50	Horizontal
12200	*					54		Horizontal
14640	*					54		Horizontal



HIGH CH(GFSK)

Peak value

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	37.62	31.93	8.73	32.16	46.12	74.00	-27.88	Vertical
7440.00	33.98	36.59	11.79	31.78	50.58	74.00	-23.42	Vertical
9920.00	30.57	38.81	14.38	31.88	51.88	74.00	-22.12	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	39.21	31.93	8.73	32.16	47.71	74.00	-26.29	Horizontal
7440.00	31.84	36.59	11.79	31.78	48.44	74.00	-25.56	Horizontal
9920.00	31.46	38.81	14.38	31.88	52.77	74.00	-21.23	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

AV value

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	30.04	31.93	8.73	32.16	38.54	54.00	-15.46	Vertical
7440.00	24.48	36.59	11.79	31.78	41.08	54.00	-12.92	Vertical
9920.00	22.50	38.81	14.38	31.88	43.81	54.00	-10.19	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	32.62	31.93	8.73	32.16	41.12	54.00	-12.88	Horizontal
7440.00	24.36	36.59	11.79	31.78	40.96	54.00	-13.04	Horizontal
9920.00	24.06	38.81	14.38	31.88	45.37	54.00	-8.63	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

## 5. BAND EDGE TEST

### 5.1 LIMIT

According to §15.249(d), Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

### 5.2 TEST PROCEDURE


- a. The EUT is placed on a turntable, which is 1.5m above ground plane.
- b. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.  
Use the following spectrum analyzer settings:
- c. Span = wide enough to fully capture the emission being measured, RBW = 1 MHz, VBW  $\geq$  RBW, Sweep = auto, Detector function = peak, Trace = max hold  
Follow the guidelines in ANSI C63.4 with respect to maximizing the emission by rotating the EUT, adjusting the measurement antenna height and polarization, etc.
- d. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, submit this data. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. Set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the duty cycle per channel of the hopping signal is less than 100 ms, then the reading obtained with
- e. the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from  $20\log(\text{duty cycle}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

#### Note:

For fundamental frequency ,RBW>20dB BW ,VBW>RBW,PK detector for PK value, RMS detector for AV value.

### 5.3 TEST SETUP

#### Radiated Emission Test-Up Frequency Above 1GHz

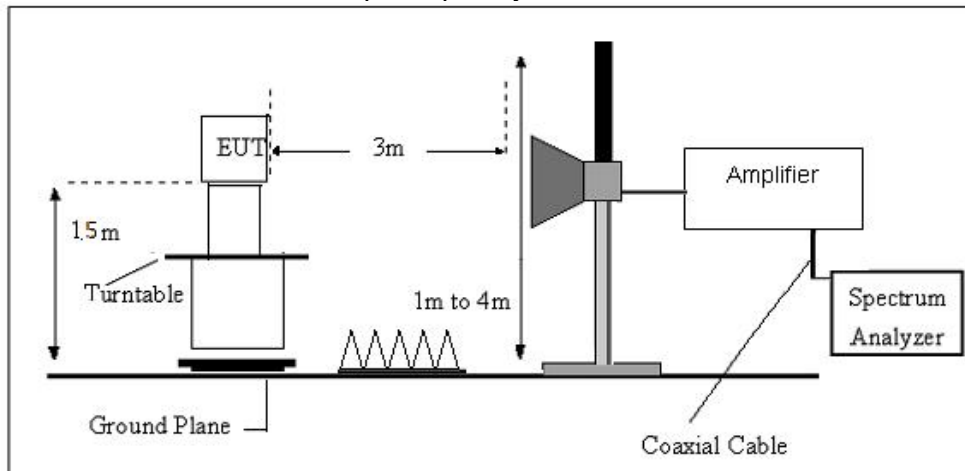

### 5.4 TEST RESULTS

Low CH (GFSK)

Horizontal


116.0 dBuV/m



No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2331.883	32.68	10.24	42.92	74.00	-31.08	peak	
2		2390.000	32.00	10.31	42.31	74.00	-31.69	peak	
3		2400.000	42.47	10.32	52.79	74.00	-21.21	peak	
4	*	2402.000	86.10	10.32	96.42	74.00	22.42	peak	
5	X	2402.000	78.13	10.32	88.45	74.00	14.45	AVG	

Vertical

116.0 dBuV/m

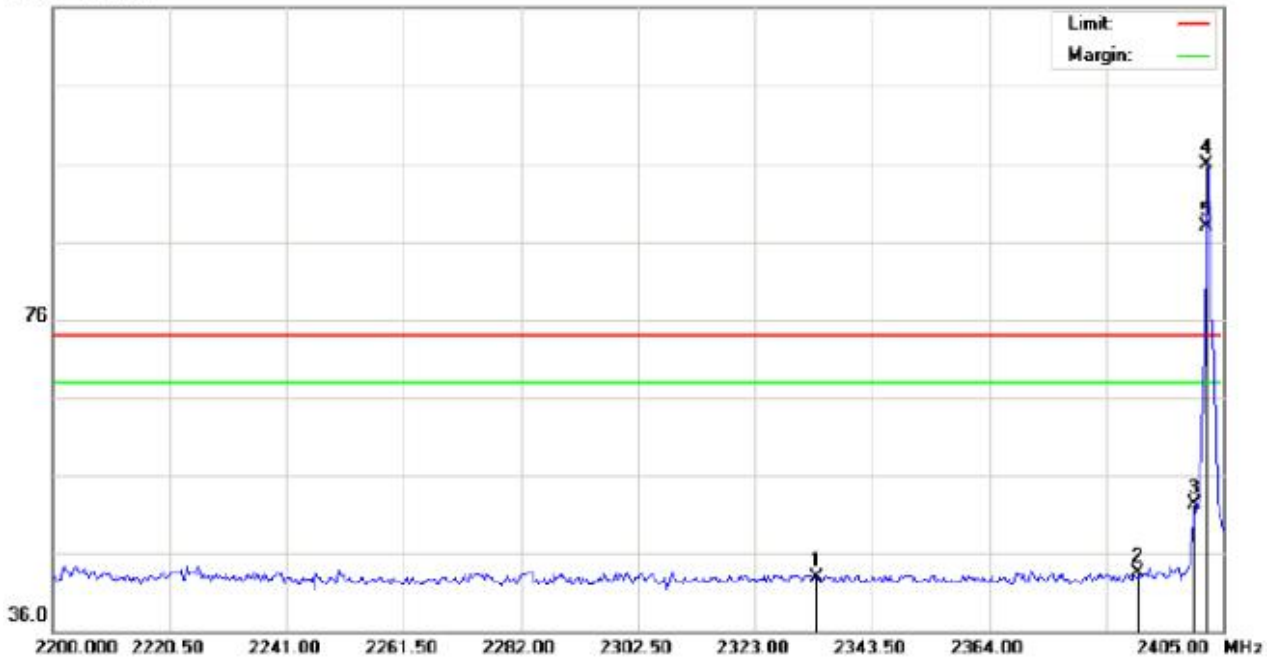

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2333.933	32.58	10.25	42.83	74.00	-31.17	peak	
2		2390.000	33.21	10.31	43.52	74.00	-30.48	peak	
3		2400.000	42.06	10.32	52.38	74.00	-21.62	peak	
4	*	2402.000	85.58	10.32	95.90	74.00	21.90	peak	
5	X	2402.000	77.63	10.32	87.95	74.00	13.95	AVG	


High CH(GFSK)

Horizontal  
116.0 dBuV/m



No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	*	2480.000	84.55	10.41	94.96	74.00	20.96	peak	
2	X	2480.000	76.55	10.41	86.96	74.00	12.96	AVG	
3		2483.500	34.19	10.41	44.60	74.00	-29.40	peak	
4		2493.289	35.35	10.42	45.77	74.00	-28.23	peak	

Vertical

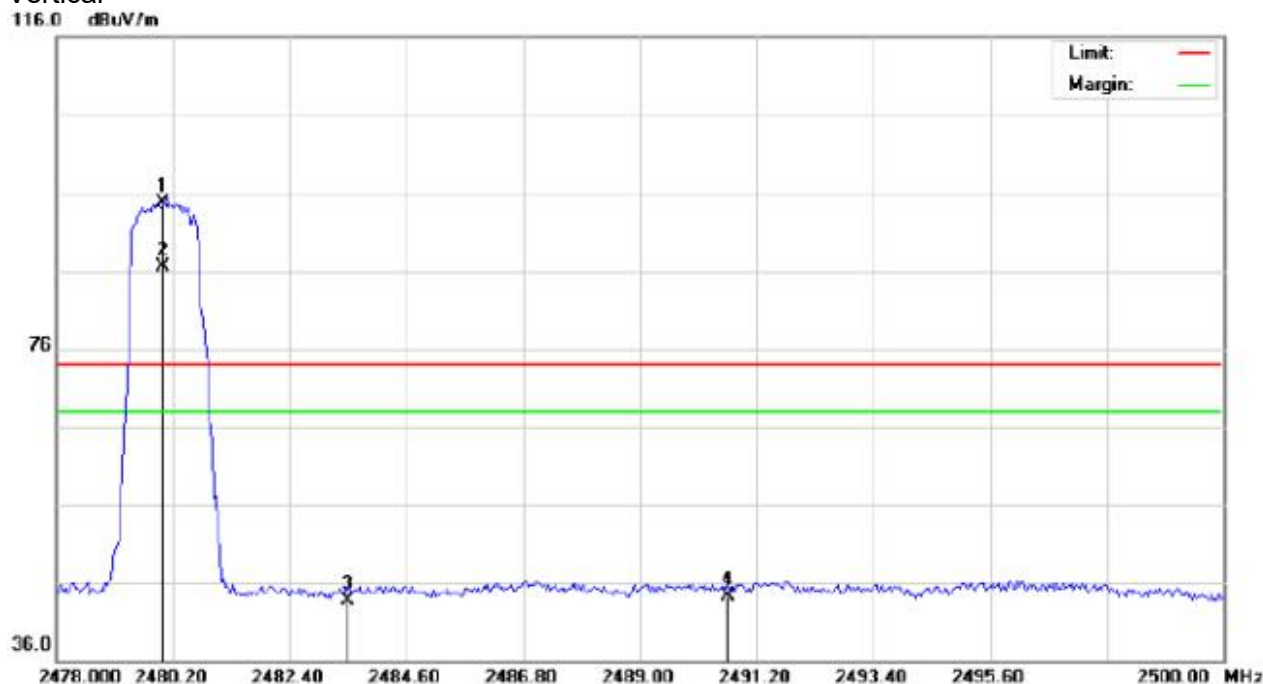

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	*	2480.000	84.32	10.41	94.73	74.00	20.73	peak	
2	X	2480.000	76.05	10.41	86.46	74.00	12.46	AVG	
3		2483.500	33.26	10.41	43.67	74.00	-30.33	peak	
4		2490.650	33.87	10.42	44.29	74.00	-29.71	peak	

**Note:** The other modes radiation emission have enough 20dB margin.

Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Hopping on mode and Hopping off mode have been tested, but only worst case reported.

## 6. 20 DB BANDWIDTH TEST


### 6.1 LIMIT

According to 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation

### 6.2 TEST PROCEDURE

- Check the calibration of the measuring instrument using either an internal calibrator or a
- a. known signal from an external generator
  - b. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
  - c. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.

### 6.3 TEST SETUP

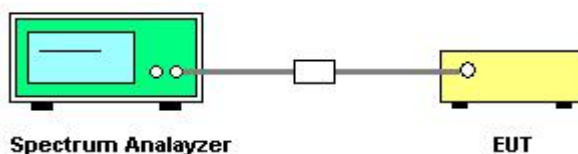




### 6.4 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	GFSK	Test Voltage:	DC 5V

Frequency	20dB Bandwidth (MHz)	Result
2402 MHz	1.270	PASS
2440 MHz	1.272	PASS
2480 MHz	1.270	PASS



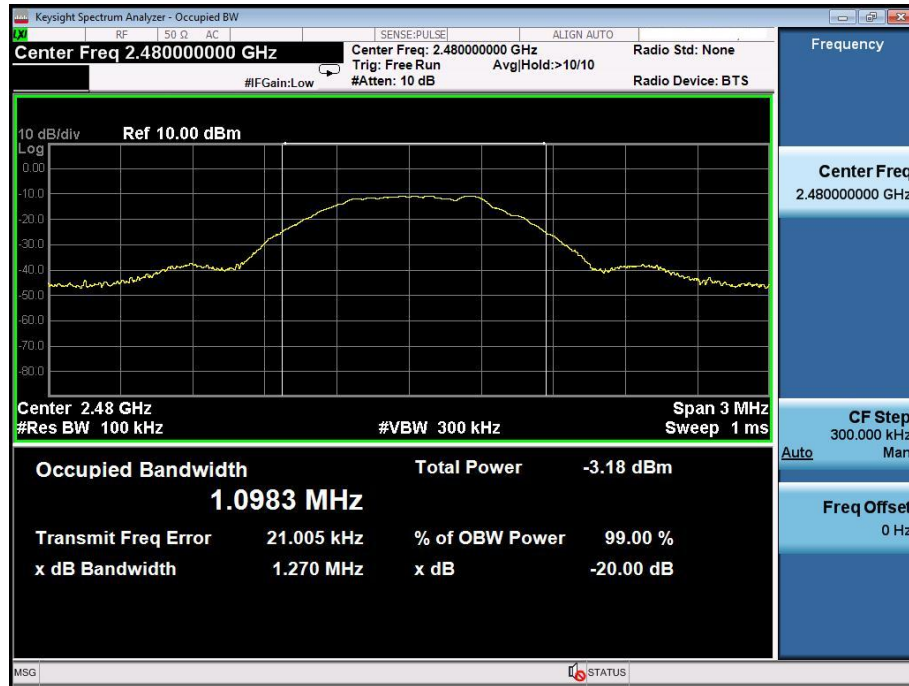

## 7. ANTENNA REQUIREMENT

### 7.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 7.2 EUT ANTENNA

The antennas used for this product are PCB antenna and other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 1.0dBi.

\*\*\*\*\*END OF THE REPORT\*\*\*\*\*