

VARIANT FCC TEST REPORT

(PART 22)


Applicant:	Shanghai Tricheer Technology Co.,Ltd.
Address:	Rm 907,Building 1,Lane 399,Shengxia Road,China (shanghai) Pilot Free Trade Zone,Shanghai

Manufacturer or Supplier:	Shanghai Tricheer Technology Co.,Ltd.
Address:	Rm 907,Building 1,Lane 399,Shengxia Road,China (shanghai) Pilot Free Trade Zone,Shanghai
Product:	LTE USB Modem
Brand Name:	+F
Model Name:	FS040U
FCC ID:	2ANKMFS040U
Date of tests:	Aug. 29, 2023 ~ Sep. 07, 2023

The tests have been carried out according to the requirements of the following standard:

- ☒ **FCC PART 22, Subpart H** ☒ **FCC Part 2**
☒ **ANSI/TIA/EIA-603-D** ☒ **ANSI C63.26-2015**
☒ **ANSI/TIA/EIA-603-E**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
	
Date: Sep. 07, 2023	Date: Sep. 07, 2023

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1 SUMMARY OF TEST RESULTS.....	4
1.1 MEASUREMENT UNCERTAINTY	5
1.2 TEST SITE AND INSTRUMENTS	6
2 GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 CONFIGURATION OF SYSTEM UNDER TEST	9
2.3 DESCRIPTION OF SUPPORT UNITS	10
2.4 TEST ITEM AND TEST CONFIGURATION.....	10
2.5 EUT OPERATING CONDITIONS.....	12
2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS	13
3 TEST TYPES AND RESULTS.....	14
3.1 OUTPUT POWER MEASUREMENT	14
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	14
3.1.2 TEST PROCEDURES	14
3.1.3 TEST SETUP	15
3.1.4 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	19
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	19
3.2.2 TEST PROCEDURES	19
3.2.3 DEVIATION FROM TEST STANDARD	19
3.2.4 TEST SETUP	20
3.2.5 TEST RESULTS	22
4 PHOTOGRAPHS OF THE TEST CONFIGURATION	26
5 INFORMATION ON THE TESTING LABORATORIES	27
6 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	28



**BUREAU
VERITAS**

Test Report No.: W7L-P23080026RF01

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF170802W002-1	Original release	Aug. 31, 2017
W7L-P23080026RF01	Base on the original report change component, address and update standard, this report verifies power and RSE worse case data. The verified power data is lower than the original power data. So this report only updates conducted power and RSE worse case data.	Sep. 07, 2023

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 22 & Part 2		
STANDARD SECTION	TEST TYPE	RESULT
§2.1046	Conducted Output Power	Compliance
§22.913 (a)(5)	Effective Radiated Power	See note
§2.1055 §22.355	Frequency Stability	See note
§2.1049	Occupied Bandwidth	See note
§22.913 (d)	Peak to average ratio*	See note
§22.917(a)	Band Edge Measurements	See note
§2.1051 §22.917(a)	Conducted Spurious Emissions	See note
§2.1053 §22.917(a)	Radiated Spurious Emissions	Compliance

* Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01.

Note; please refer to the original report RF170802W002-1/RF170810C05A

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Maximum Peak Output Power	$\pm 2.06\text{dB}$
Radiated emissions (9KHz~30MHz)	$\pm 2.68\text{dB}$
Radiated emissions (30MHz~1GHz)	$\pm 4.98\text{dB}$
Radiated emissions (1GHz ~6GHz)	$\pm 4.70\text{dB}$
Radiated emissions (6GHz ~18GHz)	$\pm 4.60\text{dB}$
Radiated emissions (18GHz ~40GHz)	$\pm 4.12\text{dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 28,23	Mar. 27,24
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	May.10,23	May.09,24
Loop Antenna	Schwarzbeck	FMZB 1519B	00173	Sep.03,22	Sep.02,23
Loop Antenna	Schwarzbeck	FMZB 1519B	00173	Sep.02,23	Sep.01,24
Bilog Antenna	ETS-LINDGRE N	3143B	00161965	Feb. 18,23	Feb. 17,24
Horn Antenna	ETS-LINDGRE N	3117	00168692	Feb. 18,23	Feb. 17,24
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K- SG/QMS-00361	15433	Sep.04, 22	Sep.03, 23
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K- SG/QMS-00361	15433	Sep.03, 23	Sep.02, 24
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 14,23	Feb. 13,24
Signal Pre-Amplifier	EMSI	EMC 9135	980249	May. 06,23	May. 05,24
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	May.10,23	May.09,24
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Feb. 17,23	Feb.16,24
3m Semi-anechoic Chamber	ETS-LINDGRE N	9m*6m*6m	Euroshieldpn- CT0001143-121 6	May. 22, 23	May. 21,26
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	JS1120	3.1.36	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	50HF-010-SMA	May. 06,23	May. 05,24
Power Meter	Anritsu	ML2495A	1506002	Feb. 14,23	Feb. 13,24
Power Sensor	Anritsu	MA2411B	1339352	Feb. 14,23	Feb. 13,24
Temperature Chamber	ESPEC	SH-242	93000855	May. 06,23	May. 05,24
MXG Analog Microwave Signal Generator	KEYSIGHT	N5183A	MY50143024	Feb. 14,23	Feb. 13,24
Base station R&S CMW500	Rohde&Schwa rz	CMW500	153085	May.10,23	May.09,24
DC Source	Kikusui/JP	PMX18-5A	N/A	Aug. 11,23	Aug. 10,24
Test Software	ADT	ADT_Radiated_V 7.6.15.9.2	N/A	N/A	N/A

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
 3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	LTE USB Modem	
MODEL NAME	FS040U	
NOMINAL VOLTAGE	DC 5V (host equipment)	
MODULATION TYPE	WCDMA	BPSK, QPSK
	LTE	QPSK, 16QAM
FREQUENCY RANGE	WCDMA V	826.4MHz ~ 846.6MHz
	LTE Band 26 (Channel Bandwidth: 1.4MHz)	824.7MHz ~ 848.3MHz
	LTE Band 26 (Channel Bandwidth: 3MHz)	825.5MHz ~ 847.5MHz
	LTE Band 26 (Channel Bandwidth: 5MHz)	826.5MHz ~ 846.5MHz
	LTE Band 26 (Channel Bandwidth: 10MHz)	829MHz ~ 844MHz
	LTE Band 26 (Channel Bandwidth: 15MHz)	831.5MHz ~ 841.5MHz
MAX. ERP POWER	WCDMA V	104mW
	LTE Band 26 (Channel Bandwidth: 1.4MHz)	77.62mW
	LTE Band 26 (Channel Bandwidth: 3MHz)	77.98mW
	LTE Band 26 (Channel Bandwidth: 5MHz)	76.00mW
	LTE Band 26 (Channel Bandwidth: 10MHz)	74.10mW
	LTE Band 26 (Channel Bandwidth: 15MHz)	80.32mW
EMISSION DESIGNATOR GGN	WCDMA V	4M14F9W
	LTE Band 26 (Channel Bandwidth: 1.4MHz)	QPSK: 1M09G7D 16QAM: 1M09W7D
	LTE Band 26 (Channel Bandwidth: 3MHz)	QPSK: 2M70G7D 16QAM: 2M70W7D



	LTE Band 26 (Channel Bandwidth: 5MHz)	QPSK: 4M49G7D 16QAM: 4M49W7D
	LTE Band 26 (Channel Bandwidth: 10MHz)	QPSK: 8M96G7D 16QAM: 8M96W7D
	LTE Band 26 (Channel Bandwidth: 15MHz)	QPSK: 13M4G7D 16QAM: 13M4W7D
ANTENNA TYPE	Fixed Internal antenna with 1dBi gain	
HW VERSION	LWDM132A	
SW VERSION	LWDJC02.1.0_M132	
I/O PORTS	Refer to user's manual	
CABLE SUPPLIED	N/A	


NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
WCDMA	1TX/1RX
LTE	1TX/1RX

3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

2.2 CONFIGURATION OF SYSTEM UNDER TEST FOR RADIATION EMISSION

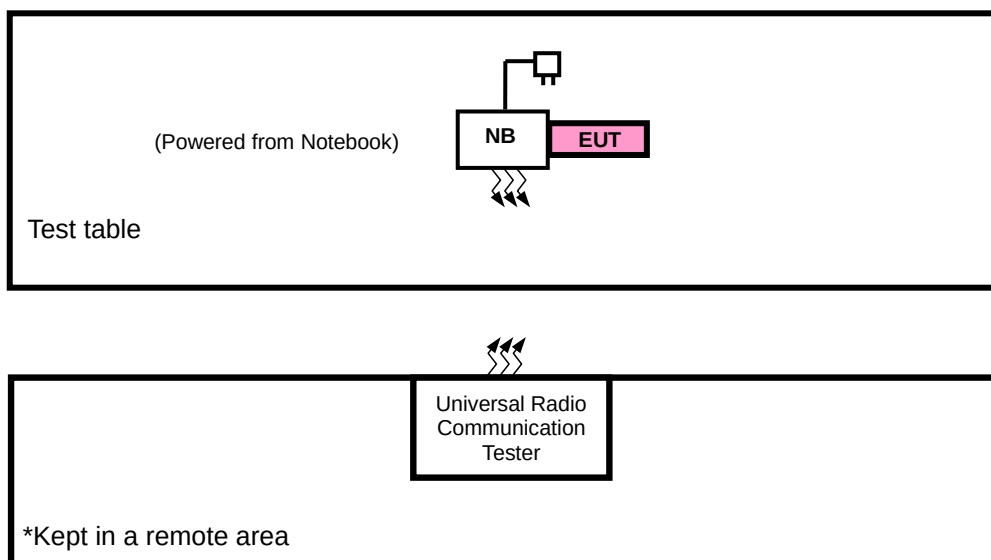

2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook	DELL	E6420	9H12FS1	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case in ERP and radiated emission was found when positioned on X-plane for WCDMA/LTE. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	WCDMA or LTE link (Powered By Notebook)

WCDMA MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	MODE
A	ERP	4132 to 4233	4132, 4182, 4233	WCDMA

LTE BAND 26 MODE

EUT CONFIGURE MODE	TEST ITEM	Available Channel	Tested Channel	Channel bandwidth	modulation	mode
A	ERP	26797 to 27033	26797, 26915, 27033	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26805 to 27025	26805, 26915, 27025	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26815 to 27015	26815, 26915, 27015	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26840 to 26990	26840, 26915, 26990	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26865 to 26965	26865, 26915, 26965	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	26865 to 26965	26915	15MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP	23deg. C, 70%RH	DC 5V By Adapter	Jace Hu
RADIATED EMISSION	23deg. C, 70%RH	DC5V By Adapter	Jace Hu

2.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.

2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile / Portable station are limited to 7 watts e.r.p.

3.1.2 TEST PROCEDURES

EIRP / ERP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively

(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB.


CONDUCTED POWER MEASUREMENT:

The EUT was set up for the maximum power with WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

3.1.3 TEST SETUP

EIRP / ERP Measurement:

CONDUCTED POWER MEASUREMENT:



3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

Band	WCDMA V		
TX Channel	4132	4182	4233
Rx Channel	4357	4407	4458
Frequency (MHz)	826.4	836.4	846.6
HSDPA Subtest-1	20.58	20.66	20.64
HSDPA Subtest-2	20.52	20.60	20.50
HSDPA Subtest-3	20.07	20.23	20.22
HSDPA Subtest-4	20.17	20.25	20.21
HSUPA Subtest-1	20.11	20.20	20.15
HSUPA Subtest-2	19.48	19.52	19.44
HSUPA Subtest-3	18.76	18.80	18.83
HSUPA Subtest-4	20.16	20.21	20.21
HSUPA Subtest-5	20.47	20.48	20.46



LTE BAND 26

Band/BW	Modulation	RB Size	RB Offset	Low CH 26797	Mid CH 26915	High CH 27033
				Frequency 824.7 MHz	Frequency 836.5 MHz	Frequency 848.3 MHz
26/ 1.4	QPSK	1	0	21.00	20.98	20.67
		1	2	21.15	21.17	21.02
		1	5	20.96	21.00	20.68
		3	0	20.80	20.76	20.55
		3	1	20.84	20.72	20.57
		3	3	20.93	20.83	20.60
		6	0	19.92	19.78	19.63
	16QAM	1	0	19.84	19.80	19.59
		1	2	19.89	19.84	19.63
		1	5	19.73	19.70	19.41
		3	0	19.94	19.90	19.68
		3	1	19.78	19.84	19.60
		3	3	20.10	20.07	19.71
		6	0	18.96	19.00	18.76

Band/BW	Modulation	RB Size	RB Offset	Low CH 26805	Mid CH 26915	High CH 27025
				Frequency 825.5 MHz	Frequency 836.5 MHz	Frequency 847.5 MHz
26/ 3	QPSK	1	0	21.00	21.02	20.76
		1	7	21.09	21.20	20.92
		1	14	20.95	20.90	20.77
		8	0	19.88	19.84	19.50
		8	3	19.76	19.78	19.62
		8	7	19.86	19.85	19.56
		15	0	19.83	19.81	19.61
	16QAM	1	0	19.87	19.86	19.50
		1	7	19.95	19.89	19.61
		1	14	19.65	19.68	19.42
		8	0	19.04	19.00	18.77
		8	3	18.81	18.84	18.59
		8	7	19.06	18.99	18.76
		15	0	19.04	18.95	18.78

Band/BW	Modulation	RB Size	RB Offset	Low CH 26815	Mid CH 26915	High CH 27015
				Frequency 826.5 MHz	Frequency 836.5 MHz	Frequency 846.5 MHz
26/ 5	QPSK	1	0	21.09	21.09	20.78
		1	12	21.17	21.16	21.01
		1	24	20.92	20.88	20.74
		12	0	19.80	19.84	19.50
		12	6	19.76	19.70	19.50
		12	13	19.94	19.90	19.65
		25	0	19.88	19.82	19.67
	16QAM	1	0	19.89	19.77	19.46
		1	12	19.86	19.80	19.66
		1	24	19.72	19.66	19.37
		12	0	19.02	18.96	18.73
		12	6	18.84	18.82	18.63
		12	13	19.03	19.02	18.65
		25	0	19.04	18.96	18.79

Band/BW	Modulation	RB Size	RB Offset	Low CH 26840	Mid CH 26915	High CH 26990
				Frequency 829 MHz	Frequency 836.5 MHz	Frequency 844 MHz
26/10	QPSK	1	0	21.08	21.06	20.78
		1	24	21.11	21.14	20.96
		1	49	20.96	20.93	20.72
		25	0	19.83	19.81	19.41
		25	12	19.80	19.81	19.50
		25	25	19.90	19.86	19.65
		50	0	19.83	19.82	19.62
	16QAM	1	0	19.80	19.88	19.53
		1	24	19.88	19.90	19.57
		1	49	19.74	19.72	19.36
		25	0	18.98	19.02	18.65
		25	12	18.86	18.75	18.64
		25	25	19.00	18.99	18.69
		50	0	18.92	19.02	18.71

Band/BW	Modulation	RB Size	RB Offset	Low CH 26865	Mid CH 26915	High CH 26965
				Frequency 831.5 MHz	Frequency 836.5 MHz	Frequency 841.5 MHz
26/ 15	QPSK	1	0	21.13	21.10	20.82
		1	37	21.24	21.21	21.03
		1	74	21.06	21.03	20.82
		36	0	19.91	19.88	19.56
		36	19	19.86	19.83	19.63
		36	39	19.97	19.94	19.69
		75	0	19.96	19.93	19.72
	16QAM	1	0	19.95	19.92	19.61
		1	37	19.97	19.94	19.69
		1	74	19.77	19.74	19.49
		36	0	19.06	19.03	18.80
		36	19	18.92	18.89	18.71
		36	39	19.14	19.11	18.77
		75	0	19.07	19.04	18.85

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.2.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,
 $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi}.$


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


< Frequency Range below 30MHz >

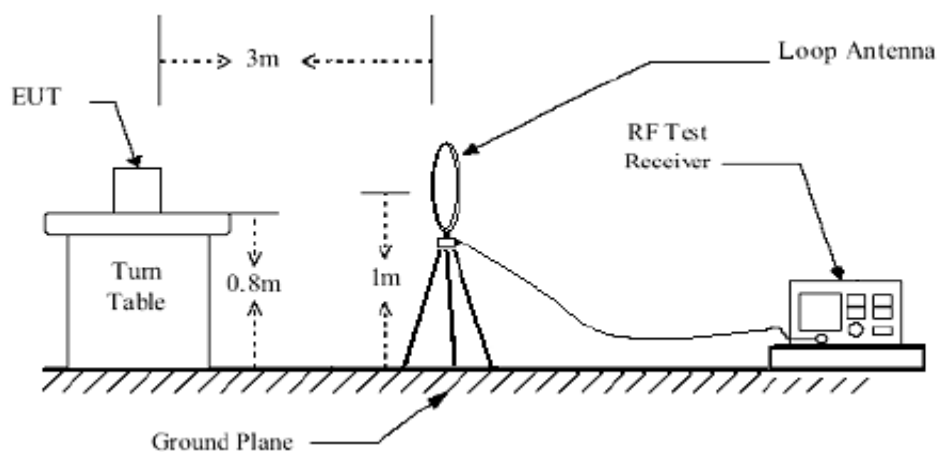

< Frequency Range 30MHz~1GHz >

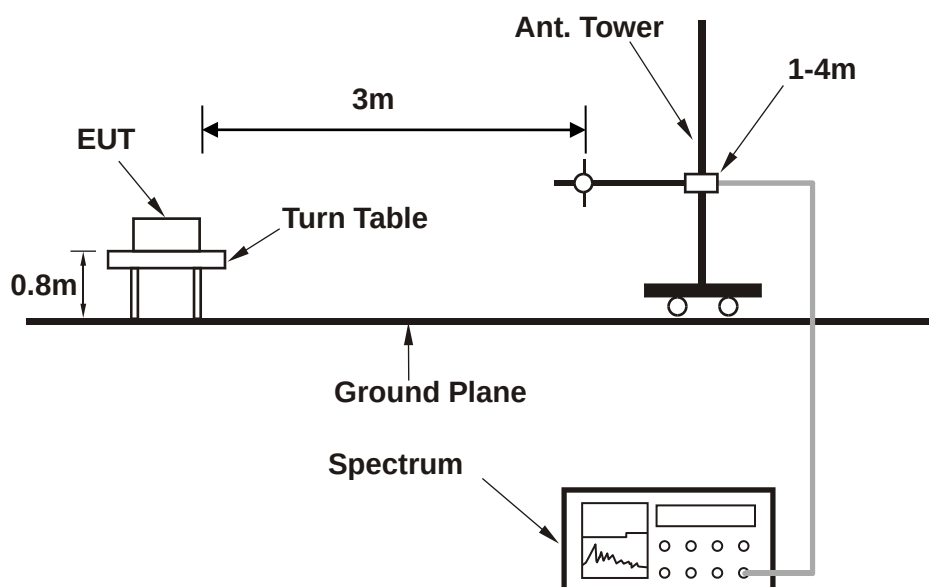

<Frequency Range above 1GHz>

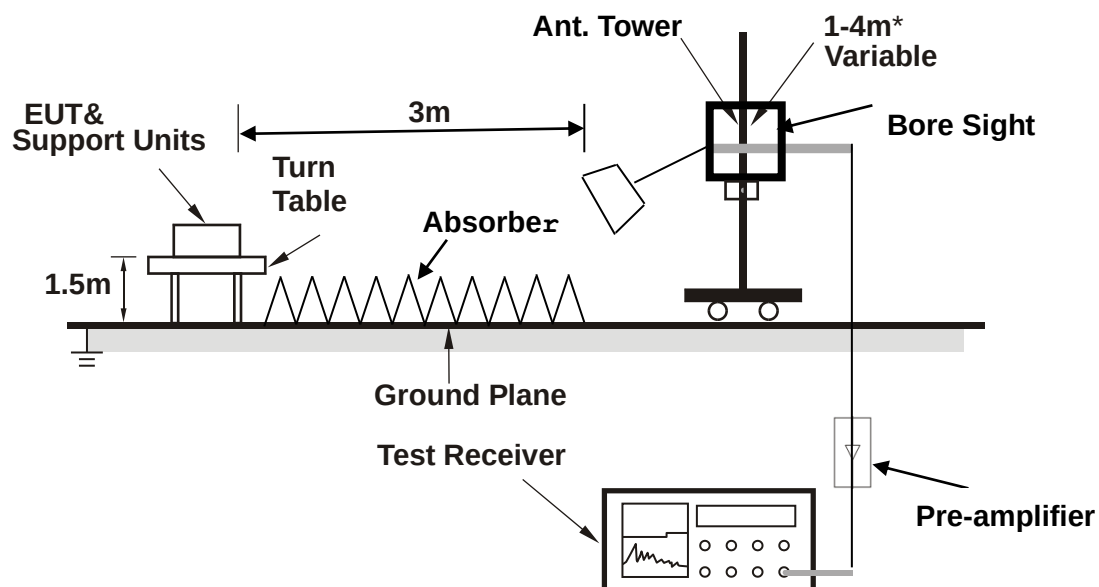

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.2.5 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

LTE BAND 26:

CHANNEL BANDWIDTH: 15M/ QPSK


MODE	TX channel 26915	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

No.	Frequency MHz	Factor dB	Reading dBm	Emission dBm	Limit dBm	Margin dB	Tower / Table	
							cm	deg
1	30.48	0.23	-46.34	-46.11	-13.00	-33.11	100	0
2	44.05	-9.22	-37.08	-46.30	-13.00	-33.30	100	0
3	68.28	-12.16	-47.25	-59.41	-13.00	-46.41	100	0
4	104.13	-9.12	-46.47	-55.59	-13.00	-42.59	100	0
5	170.02	-8.42	-54.70	-63.12	-13.00	-50.12	100	0
6	203.94	-7.24	-57.52	-64.76	-13.00	-51.76	100	0

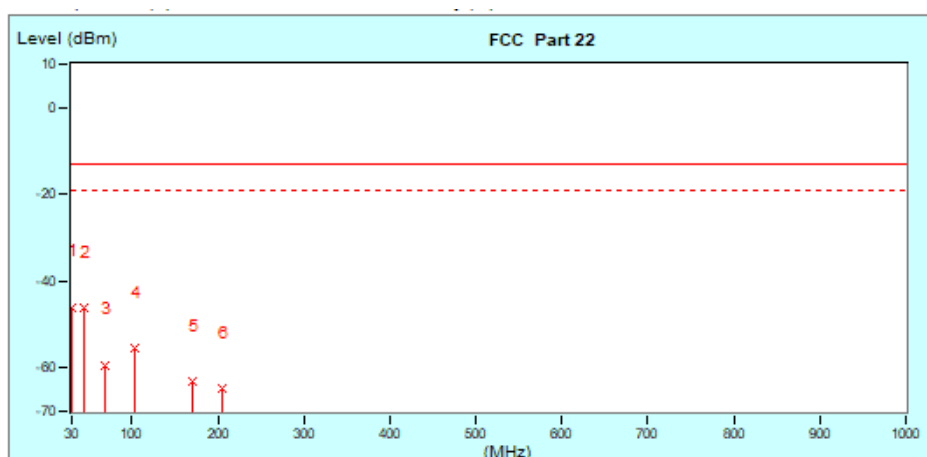

MODE	TX channel 26915	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

No.	Frequency MHz	Factor dB	Reading dBm	Emission dBm	Limit dBm	Margin dB	Tower / Table cm deg	
* 1	30.48	0.23	-45.27	-45.04	-13.00	-32.04	100	0
2	106.07	-8.63	-44.60	-53.23	-13.00	-40.23	100	0
3	164.21	-8.21	-56.46	-64.67	-13.00	-51.67	100	0
4	204.91	-7.26	-57.42	-64.68	-13.00	-51.68	100	0
5	280.49	-7.12	-59.69	-66.81	-13.00	-53.81	100	0
6	353.17	-5.32	-49.17	-54.49	-13.00	-41.49	100	0

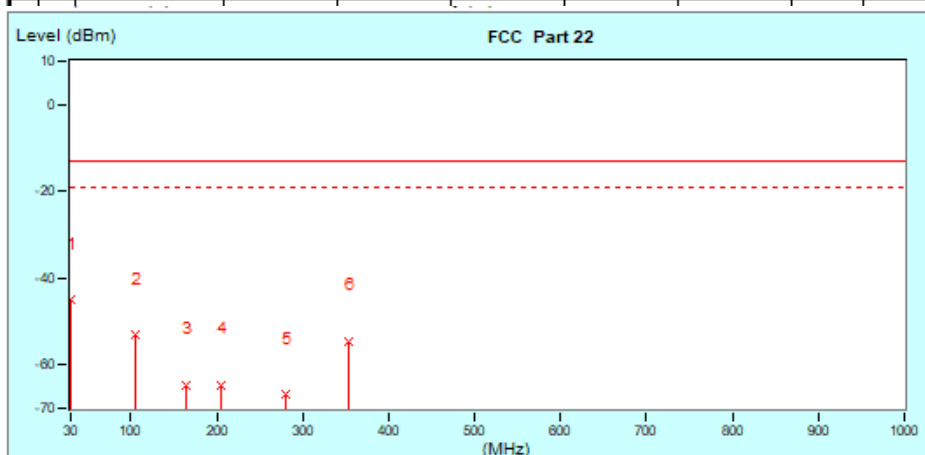



ABOVE 1GHz DATA

Note: For higher frequency, the emission is too low to be detected.


LTE Band 26

CHANNEL BANDWIDTH: 15MHz / QPSK

CH26915


MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

No.	Frequency MHz	Factor dB	Reading dBm	Emission dBm	Limit dBm	Margin dB	Tower / Table	
1	1673.00 (PK)	-48.30	-3.55	-51.85	-13.00	-38.85	100	0
* 2	2509.50 (PK)	-49.00	-2.72	-51.72	-13.00	-38.72	100	0

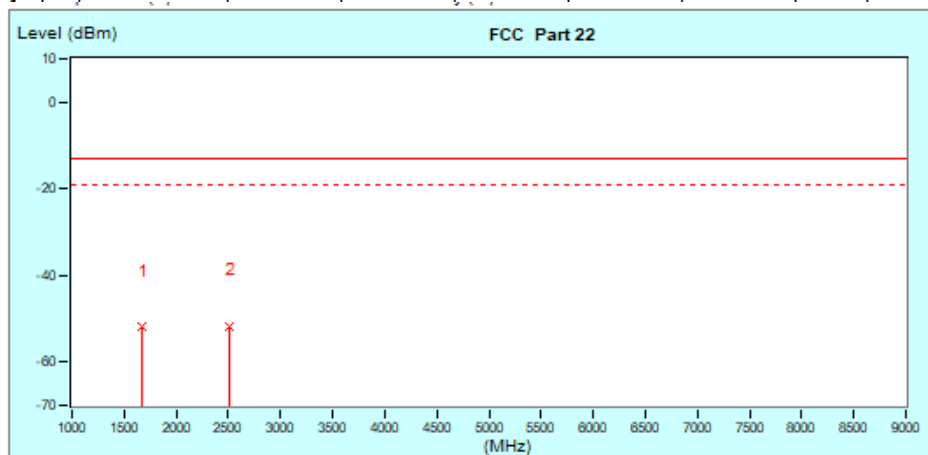

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

No.	Frequency MHz	Factor dB	Reading dBm	Emission dBm	Limit dBm	Margin dB	Tower / Table	
1	1673.00 (PK)	-48.30	-3.36	-51.66	-13.00	-38.66	100	0
* 2	2509.50 (PK)	-49.00	-2.57	-51.57	-13.00	-38.57	100	0

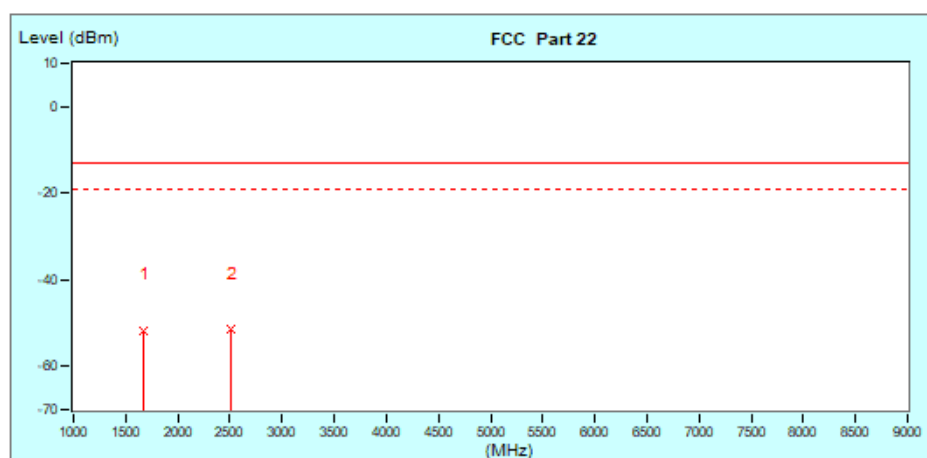



Test Report No.: W7L-P23080026RF01

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: W7L-P23080026RF01

5 INFORMATION ON THE TESTING LABORATORIES

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Shenzhen EMC/RF Lab:

Tel: +86-755-88696566

Fax: +86-755-88696577

Email: customerservice.sw@bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

6 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--END--