

TEST REPORT

Reference No..... : WTS18S11129706-1W
FCC ID : 2ANMU-W3
Applicant..... : SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO.,LTD
Address..... : A2 2F BUILDING ENET NEW INDUSTRIAL PARK, DAFU
INDUSTRIAL ZONE, GUANLAN, LONGHUA, Shenzhen, China
Manufacturer : Dongguan Woertai Electronic Technology Co., Ltd
Address..... : Elevator No. 2, Building A, Yayao Jutai Technology Park, Humen
Town, Dongguan City, China
Product..... : smart watch
Model(s)..... : W3
Brand Name..... : OUKITEL
Standards..... : FCC CFR47 Part 15.247: 2017
Date of Receipt sample : 2018-11-21
Date of Test : 2018-11-22 to 2018-12-23
Date of Issue..... : 2018-12-24
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District,
Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

Ford Wang

Ford Wang / Project Engineer

Approved by:



Philo Zhong

Philo Zhong / Manager

2 Laboratories Introduction

Waltek Services (Shenzhen) Co., Ltd is a professional third-party testing and certification laboratory with multi-year product testing and certification experience, established strictly in accordance with ISO/IEC 17025 requirements, and accredited by ILAC (International Laboratory Accreditation Cooperation) member. A2LA (American Association for Laboratory Accreditation, the certification number is 4243.01) of USA, CNAS (China National Accreditation Service for Conformity Assessment, the registration number is L3110) of China. Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC (The Federal Communications Commission), CEC (California energy efficiency), ISED (Innovation, Science and Economic Development Canada). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as Intertek (ETL-SEMKO), TÜV Rheinland, TÜV SÜD, etc.



Waltek Services (Shenzhen) Co., Ltd is one of the largest and the most comprehensive third party testing laboratory in China. Our test capability covered four large fields: safety test. Electro Magnetic Compatibility (EMC), and energy performance, wireless radio. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

Test Facility:**A. Accreditations for Conformity Assessment (International)**

Country/Region	Scope Covered By	Scope	Note
USA	ISO/IEC 17025	FCC ID \ DOC \ VOC	1
Canada		IC ID \ VOC	2
Japan		MIC-T \ MIC-R	-
Europe		EMCD \ RED	-
Taiwan		NCC	-
Hong Kong		OFCA	-
Australia		RCM	-
India		WPC	-
Thailand		NTC	-
Singapore		IDA	-
Note: 1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476. 2. ISED Canada Registration No.: 7760A			

B. TCBs and Notify Bodies Recognized Testing Laboratory.

Recognized Testing Laboratory of ...	Notify body number
TUV Rheinland	Optional.
Intertek	
TUV SUD	
SGS	
Phoenix Testlab GmbH	0700
Element Materials Technology Warwick Ltd	0891
Timco Engineering, Inc.	1177
Eurofins Product Service GmbH	0681

2 Contents

	Page
1 COVER PAGE.....	1
2 LABORATORIES INTRODUCTION.....	2
2 CONTENTS	4
3 REVISION HISTORY	5
4 GENERAL INFORMATION.....	6
4.1 GENERAL DESCRIPTION OF E.U.T.	6
4.2 DETAILS OF E.U.T.	6
4.3 CHANNEL LIST	7
4.4 TEST MODE	8
5 TEST SUMMARY	9
6 EQUIPMENT USED DURING TEST	10
6.1 EQUIPMENTS LIST	10
6.2 DESCRIPTION OF SUPPORT UNITS	11
6.3 MEASUREMENT UNCERTAINTY	11
6.4 TEST EQUIPMENT CALIBRATION	11
6.5 CONDUCTED EMISSION TEST RESULT	12
7 RADIATED EMISSIONS.....	14
7.1 EUT OPERATION.....	14
7.2 TEST SETUP	15
7.3 SPECTRUM ANALYZER SETUP	16
7.4 TEST PROCEDURE	17
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	17
7.6 SUMMARY OF TEST RESULTS	18
8 CONDUCTED SPURIOUS EMISSIONS.....	21
8.1 TEST PROCEDURE	21
8.2 TEST RESULT	22
9 BAND EDGE MEASUREMENT	26
9.1 TEST PROCEDURE.....	26
9.2 TEST RESULT	27
10 6 DB BANDWIDTH MEASUREMENT	28
10.1 TEST PROCEDURE:.....	28
10.2 TEST RESULT:	28
11 MAXIMUM PEAK OUTPUT POWER	31
11.1 TEST PROCEDURE:.....	31
11.2 TEST RESULT:	32
12 POWER SPECTRAL DENSITY	35
12.1 TEST PROCEDURE:.....	35
12.2 TEST RESULT:	35
13 ANTENNA REQUIREMENT	38
14 RF EXPOSURE.....	39
15 PHOTOGRAPHS OF TEST SETUP AND EUT.....	40

3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS18S11129 706-1W	2018-11-21	2018-11-22 to 2018-12- 23	2018-12-24	original	-	Valid

4 General Information

4.1 General Description of E.U.T.

Product:	smart watch
Model(s):	W3
Model Description:	N/A
Bluetooth Version:	Bluetooth v4.0
Hardware Version:	C98_Main_V1.0
Software Version:	C98_1.00.40_180925

4.2 Details of E.U.T.

Operation Frequency:	2402~2480MHz
Max. RF output power:	-3.88dBm
Type of Modulation:	GFSK
Antenna installation:	internal permanent antenna
Antenna Gain:	0dBi
Ratings:	DC 3.7V, 230mAh from battery

4.3 Channel List

BT BLE

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

4.4 Test Mode

Table 2 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	BT BLE	1 Mbps	0/19/39	TX
Power Spectral Density	BT BLE	1 Mbps	0/19/39	TX
6dB Bandwidth	BT BLE	1 Mbps	0/19/39	TX
Band Edge	BT BLE	1 Mbps	0/19/39	TX
Transmitter Spurious Emissions	BT BLE	1 Mbps	0/19/39	TX

Note :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

5 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	2.1091	PASS

6 Equipment Used during Test

6.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2018-09-12	2019-09-11
2.	LISN	R&S	ENV216	101215	2018-09-12	2019-09-11
3.	Cable	Top	TYPE16(3.5M)	-	2018-09-12	2019-09-11
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2018-09-12	2019-09-11
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	2018-09-12	2019-09-11
3.	Limiter	York	MTS-IMP-136	261115-001-0024	2018-09-12	2019-09-11
4.	Cable	LARGE	RF300	-	2018-09-12	2019-09-11
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	2018-04-29	2019-04-28
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	2018-04-09	2019-04-08
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2018-04-09	2019-04-08
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2018-09-12	2019-09-11
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2018-04-09	2019-04-08
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2018-04-09	2019-04-08
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2018-04-13	2019-04-12
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	2018-04-13	2019-04-12
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2018-04-13	2019-04-12
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2018-04-09	2019-04-08
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	2018-04-13	2019-04-12
4	Cable	HUBER+SUHNER	CBL2	525178	2018-04-13	2019-04-12

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2018-09-12	2019-09-11
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2018-09-12	2019-09-11
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2018-09-12	2019-09-11

6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

6.3 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	± 3.64 dB(AC mains 150KHz~30MHz)
Radiated Spurious Emissions	± 5.08 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Radio Frequency	± 1 x 10 ⁻⁷ Hz
RF Power	± 0.42 dB
RF Power Density	± 0.7dB
Conducted Spurious Emissions	± 2.76 dB (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor:k=2	

6.4 Test Equipment Calibration


All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6.5 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Worst Mode: BLE mode (low channel)

Live line:

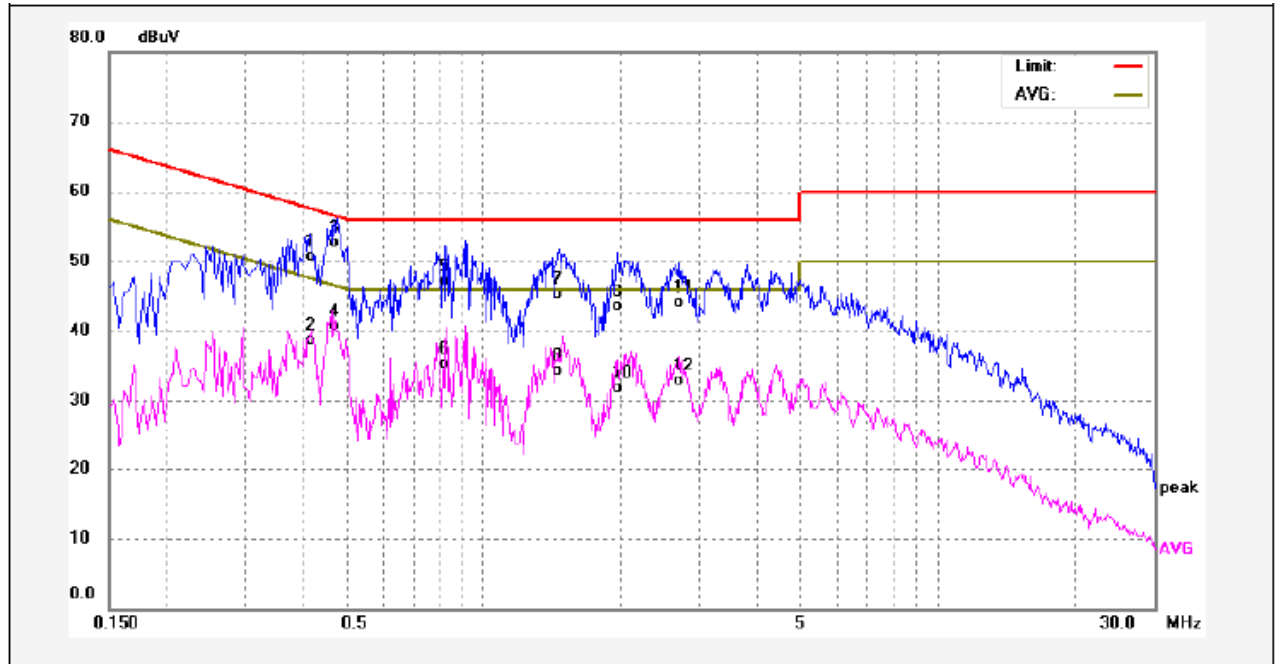

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.4140	50.78	0.00	50.78	57.57	-6.79	QP	
2	0.4140	38.77	0.00	38.77	47.57	-8.80	AVG	
3	0.4700	52.61	0.00	52.61	56.51	-3.90	QP	
4	0.4700	40.62	0.00	40.62	46.51	-5.89	AVG	
5	0.8220	47.08	0.00	47.08	56.00	-8.92	QP	
6	0.8220	35.25	0.00	35.25	46.00	-10.75	AVG	
7	1.4700	45.39	0.00	45.39	56.00	-10.61	QP	
8	1.4700	34.29	0.00	34.29	46.00	-11.71	AVG	
9	1.9780	43.59	0.00	43.59	56.00	-12.41	QP	
10	1.9780	31.94	0.00	31.94	46.00	-14.06	AVG	
11	2.7060	44.20	0.00	44.20	56.00	-11.80	QP	
12	2.7060	32.91	0.00	32.91	46.00	-13.09	AVG	

Neutral line:

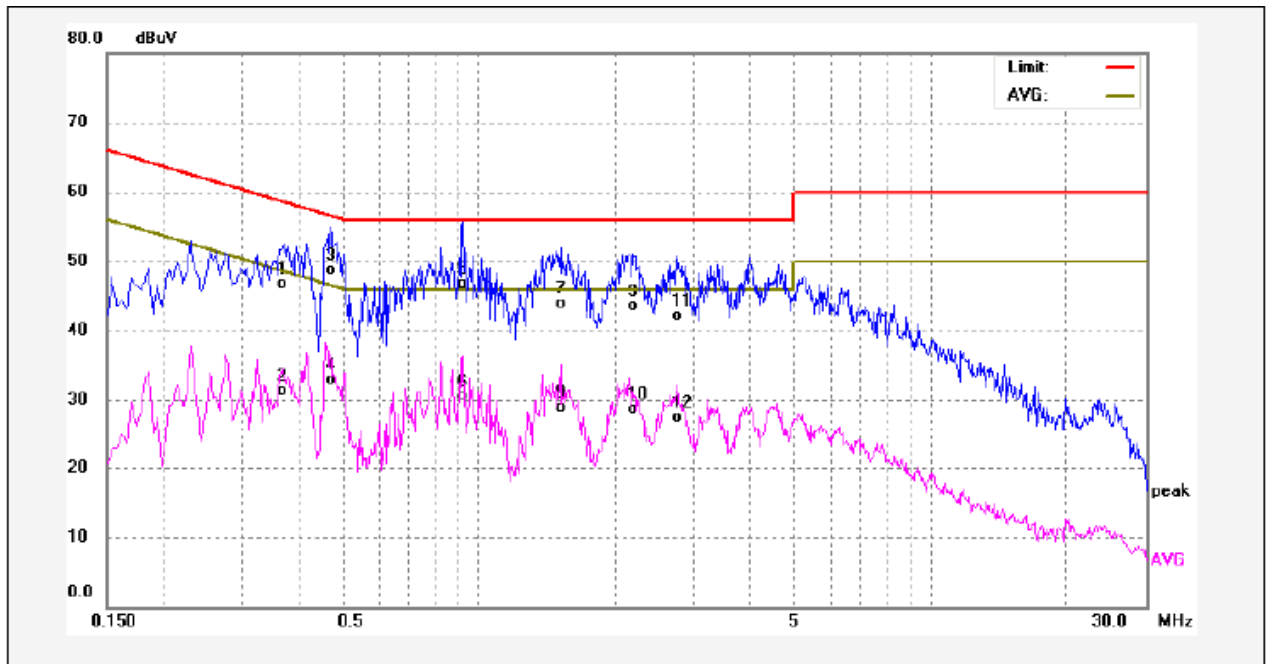

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.3700	46.61	0.00	46.61	58.50	-11.89	QP	
2	0.3700	31.32	0.00	31.32	48.50	-17.18	AVG	
3	0.4700	48.64	0.00	48.64	56.51	-7.87	QP	
4	0.4700	32.97	0.00	32.97	46.51	-13.54	AVG	
5	0.9220	46.67	0.00	46.67	56.00	-9.33	QP	
6	0.9220	30.49	0.00	30.49	46.00	-15.51	AVG	
7	1.5180	43.94	0.00	43.94	56.00	-12.06	QP	
8	1.5180	28.93	0.00	28.93	46.00	-17.07	AVG	
9	2.1980	43.47	0.00	43.47	56.00	-12.53	QP	
10	2.1980	28.80	0.00	28.80	46.00	-17.20	AVG	
11	2.7260	42.07	0.00	42.07	56.00	-13.93	QP	
12	2.7260	27.59	0.00	27.59	46.00	-18.41	AVG	

7 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log ^{(2400/F(kHz))} + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log ^{(24000/F(kHz))} + 40
1.705 ~ 30	30	30	100 * 30	20log ⁽³⁰⁾ + 40
30 ~ 88	100	3	100	20log ⁽¹⁰⁰⁾
88 ~ 216	150	3	150	20log ⁽¹⁵⁰⁾
216 ~ 960	200	3	200	20log ⁽²⁰⁰⁾
Above 960	500	3	500	20log ⁽⁵⁰⁰⁾

7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in TX transmitting mode, the test data were shown in the report.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

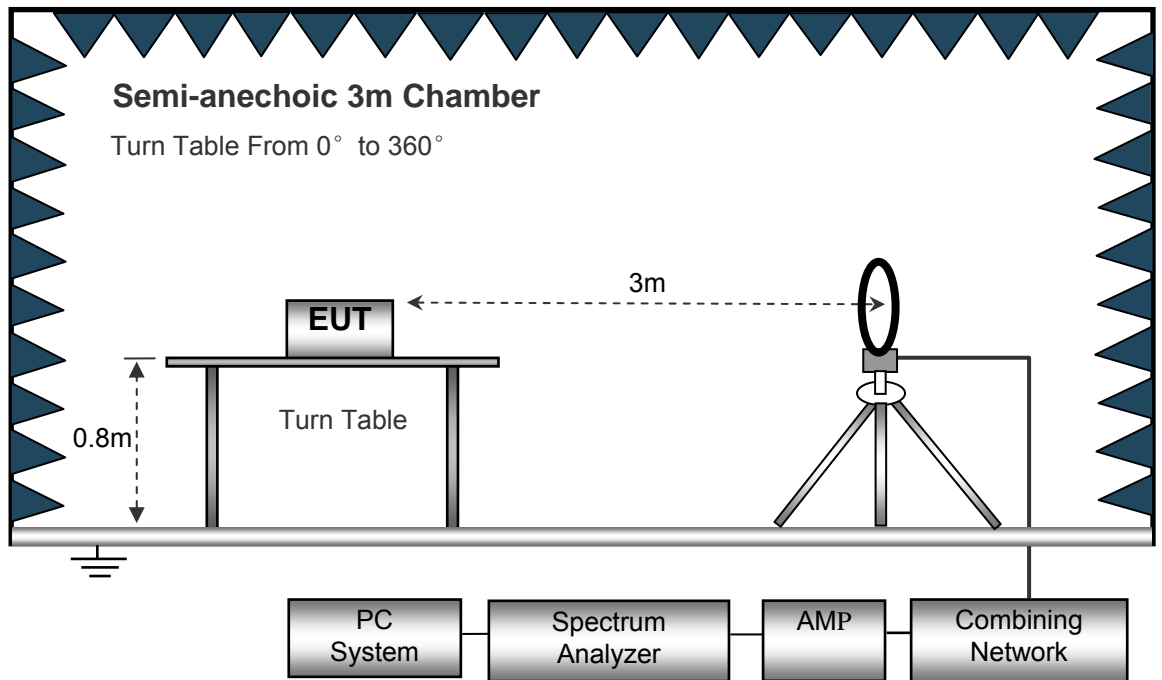

The test setup for emission measurement from 30 MHz to 1 GHz.

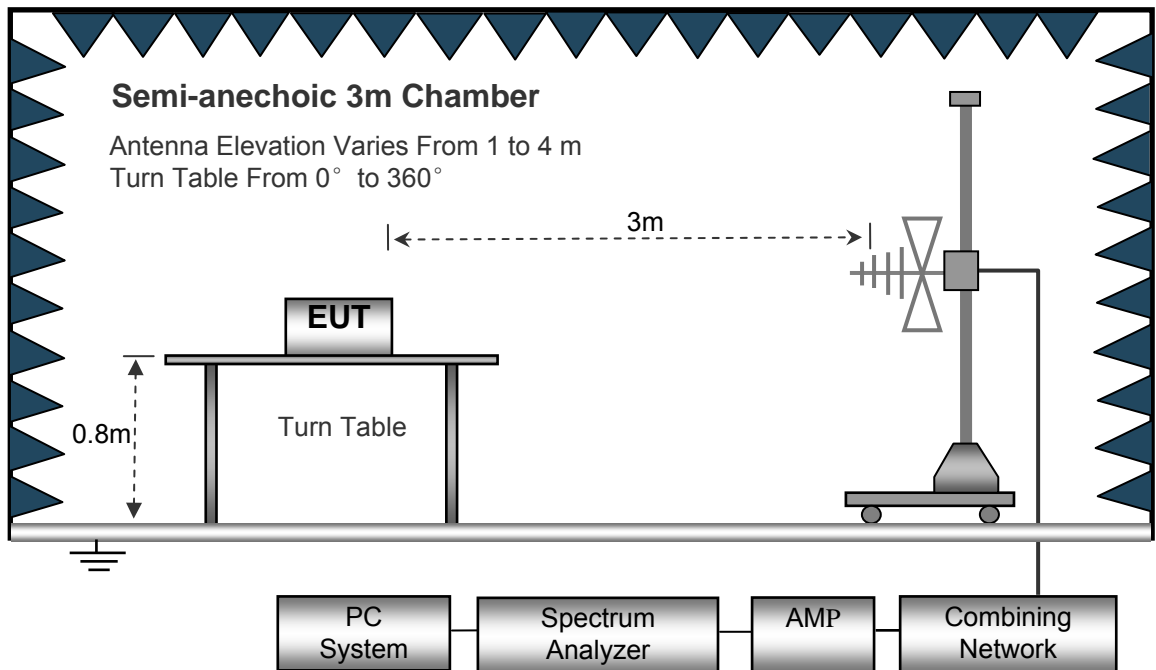

The test setup for emission measurement above 1 GHz.

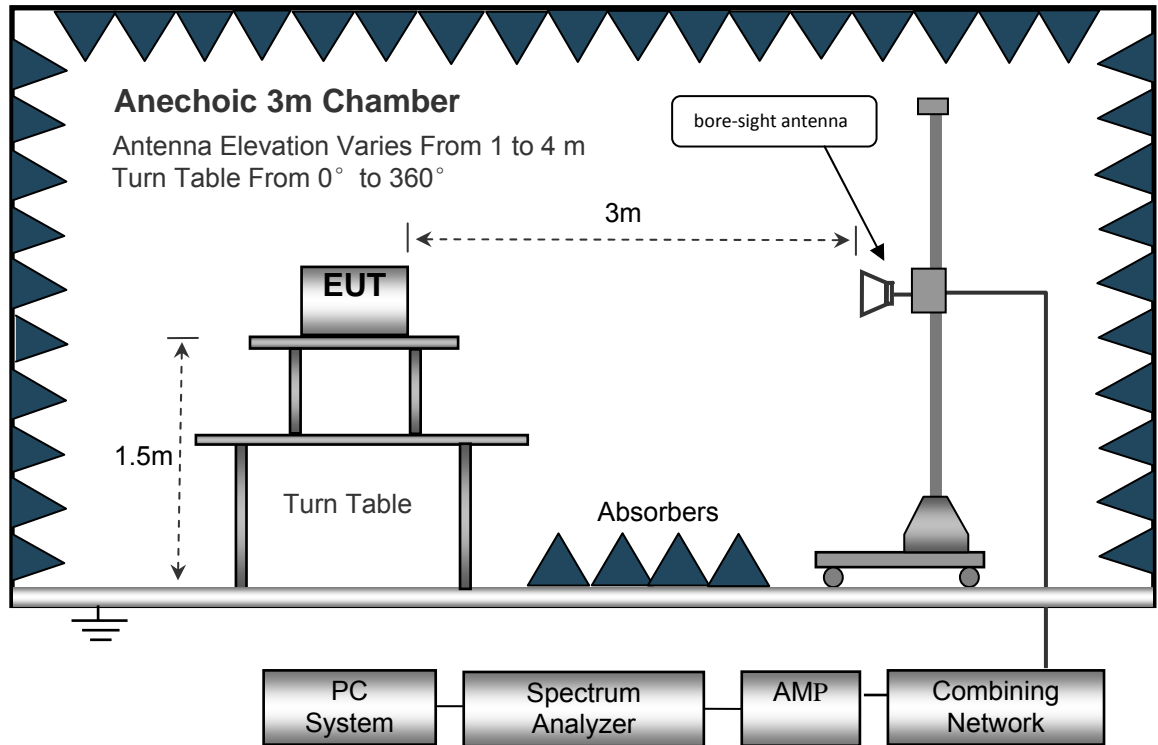

7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 10Hz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used druing radiated emissions above 1GHz measurement.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results

BT BLE:

Test Frequency: 9KHz~26MHz

Remark: only the worst data (GFSK modulation Low channel mode) were recorded.

Frequency	Measurement results dB μ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB μ V/m @30m	Limits dB μ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
6.021	25.17	QP	21.84	40.00	7.01	29.54	-22.53
15.730	25.40	QP	21.35	40.00	6.75	29.54	-22.79
25.680	25.33	QP	20.67	40.00	6.00	29.54	-23.54

Test Frequency : 26MHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Low Channel 2402MHz									
269.33	33.59	QP	87	1.6	H	-13.35	20.24	46.00	-25.76
269.33	40.91	QP	225	1.9	V	-13.35	27.56	46.00	-18.44
4804.00	45.42	PK	136	1.8	V	-1.06	44.36	74.00	-29.64
4804.00	42.72	Ave	136	1.8	V	-1.06	41.66	54.00	-12.34
7206.00	46.01	PK	150	1.2	H	1.33	47.34	74.00	-26.66
7206.00	36.24	Ave	150	1.2	H	1.33	37.57	54.00	-16.43
2327.52	45.41	PK	65	1.0	V	-13.19	32.22	74.00	-41.78
2327.52	38.57	Ave	65	1.0	V	-13.19	25.38	54.00	-28.62
2380.08	42.35	PK	13	1.8	H	-13.14	29.21	74.00	-44.79
2380.08	36.48	Ave	13	1.8	H	-13.14	23.34	54.00	-30.66
2493.48	44.43	PK	185	1.8	V	-13.08	31.35	74.00	-42.65
2493.48	36.43	Ave	185	1.8	V	-13.08	23.35	54.00	-30.65

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Middle Channel 2440MHz									
269.33	32.27	QP	301	1.9	H	-13.35	18.92	46.00	-27.08
269.33	40.95	QP	139	1.4	V	-13.35	27.60	46.00	-18.40
4880.00	43.46	PK	206	1.3	V	-0.62	42.84	74.00	-31.16
4880.00	42.75	Ave	206	1.3	V	-0.62	42.13	54.00	-11.87
7320.00	45.69	PK	69	1.9	H	2.21	47.90	74.00	-26.10
7320.00	37.20	Ave	69	1.9	H	2.21	39.41	54.00	-14.59
2338.29	46.01	PK	340	1.4	V	-13.19	32.82	74.00	-41.18
2338.29	39.80	Ave	340	1.4	V	-13.19	26.61	54.00	-27.39
2368.35	44.70	PK	254	1.7	H	-13.14	31.56	74.00	-42.44
2368.35	37.11	Ave	254	1.7	H	-13.14	23.97	54.00	-30.03
2490.79	42.73	PK	204	1.7	V	-13.08	29.65	74.00	-44.35
2490.79	38.91	Ave	204	1.7	V	-13.08	25.83	54.00	-28.17

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK High Channel 2480MHz									
269.33	32.81	QP	20	1.0	H	-13.35	19.46	46.00	-26.54
269.33	38.46	QP	75	1.1	V	-13.35	25.11	46.00	-20.89
4960.00	42.33	PK	158	2.0	V	-0.24	42.09	74.00	-31.91
4960.00	43.55	Ave	158	2.0	V	-0.24	43.31	54.00	-10.69
7440.00	45.09	PK	3	1.8	H	2.84	47.93	74.00	-26.07
7440.00	36.29	Ave	3	1.8	H	2.84	39.13	54.00	-14.87
2313.29	45.08	PK	16	1.1	V	-13.19	31.89	74.00	-42.11
2313.29	38.49	Ave	16	1.1	V	-13.19	25.30	54.00	-28.70
2361.99	42.24	PK	41	1.3	H	-13.14	29.10	74.00	-44.90
2361.99	38.29	Ave	41	1.3	H	-13.14	25.15	54.00	-28.85
2498.83	42.82	PK	297	1.2	V	-13.08	29.74	74.00	-44.26
2498.83	36.81	Ave	297	1.2	V	-13.08	23.73	54.00	-30.27

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

8 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247
Test Method: KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016
Test Result: PASS
Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

8.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
Blow 30MHz:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold
Above 30MHz:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

8.2 Test Result


9KHz – 30MHz


BLE

Low Channel

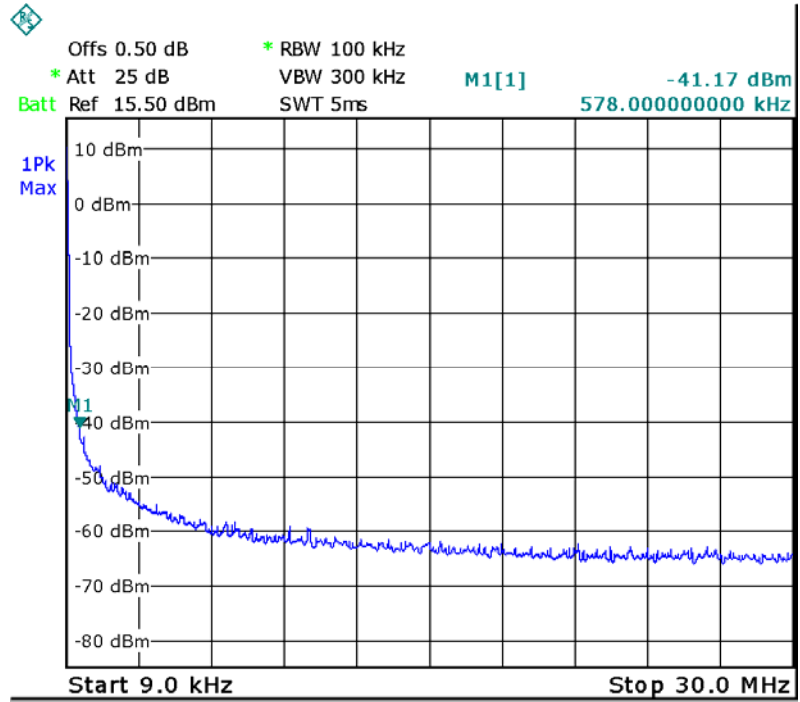

Middle Channel

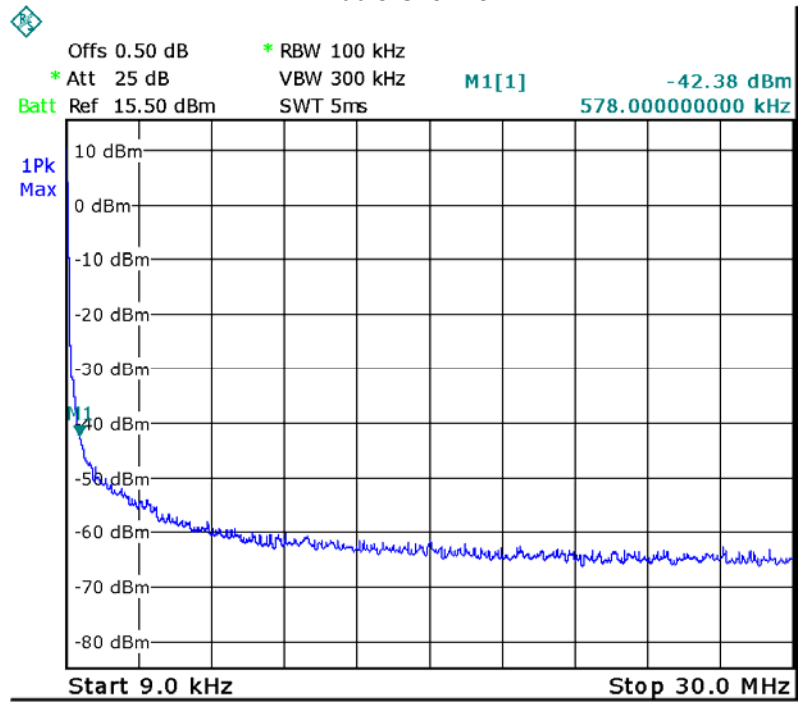

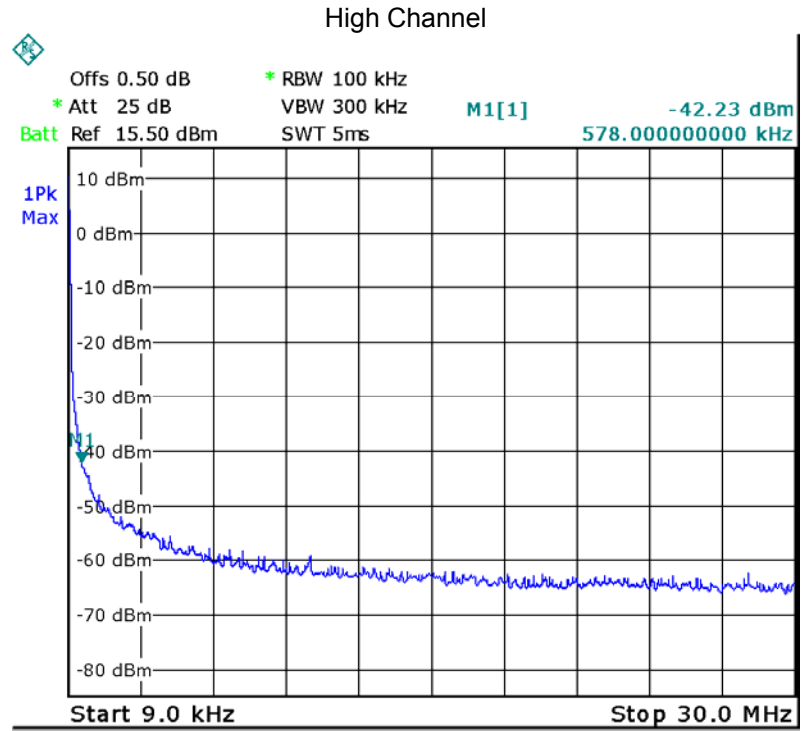


Above 30MHz

BLE


Low Channel

Fundamental

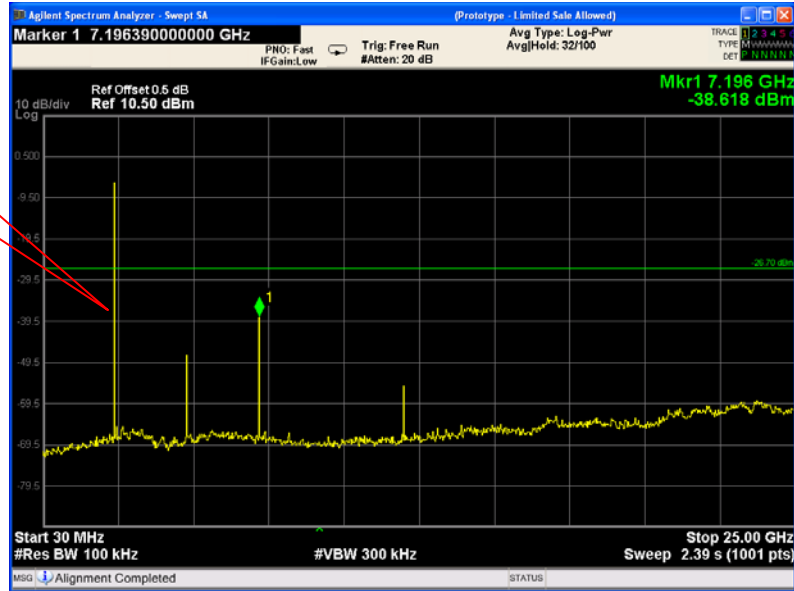


Middle Channel

Fundamental

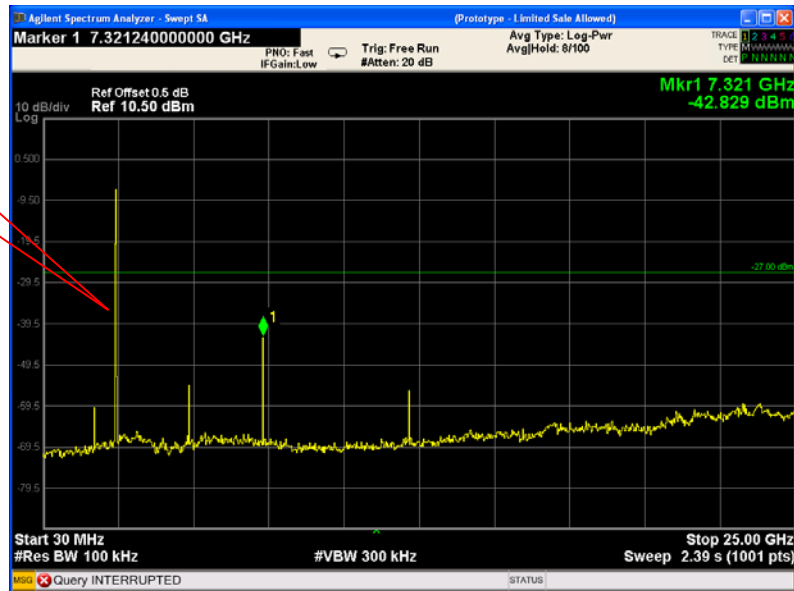

High Channel

Fundamental

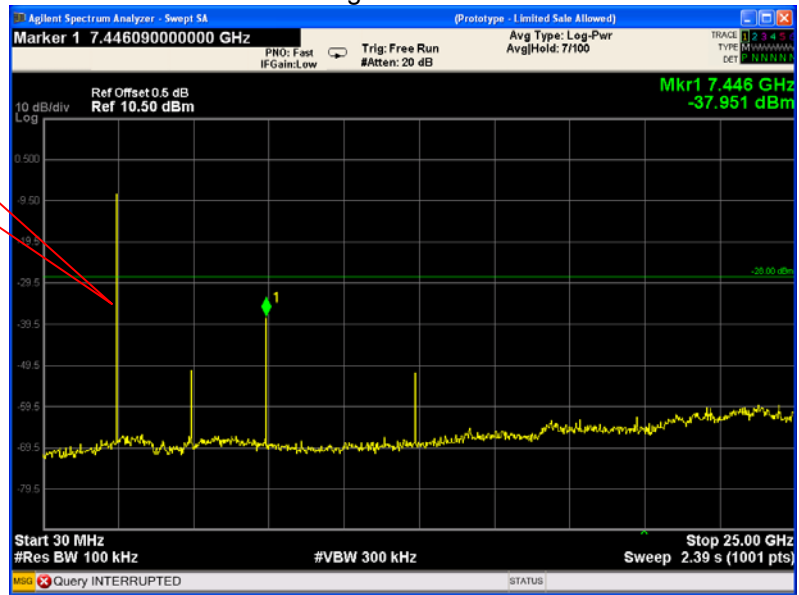

9 Band Edge Measurement



Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting

9.1 Test Produce

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

9.2 Test Result

Test result plots shown as follows:

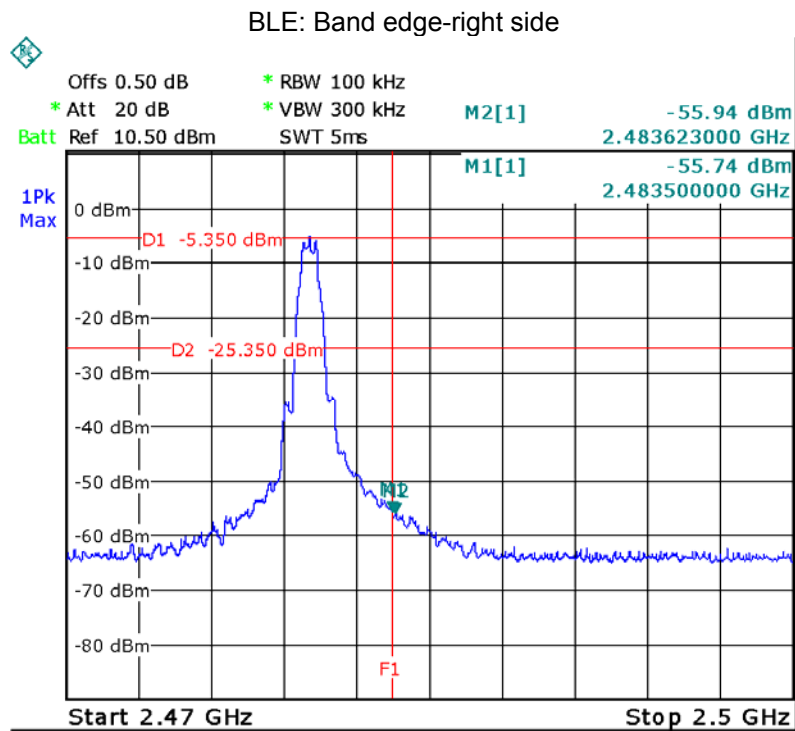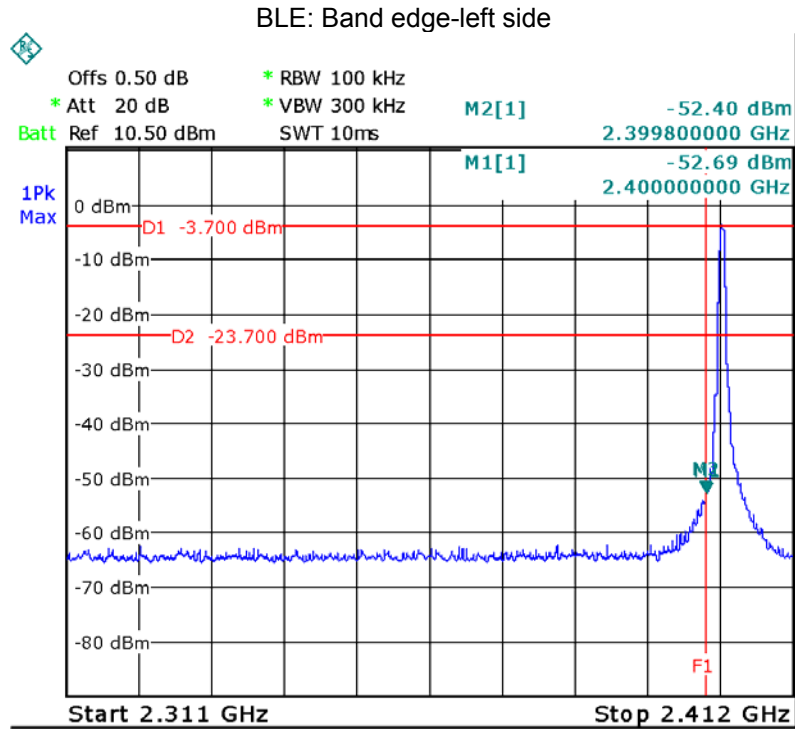

10 6 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016



10.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz


10.2 Test Result:

Operation mode	Test Channel	Bandwidth (MHz)	Limit (kHz)
BLE	Channel 0	0.713	500
	Channel 19	0.689	500
	Channel 39	0.701	500

Test result plot:

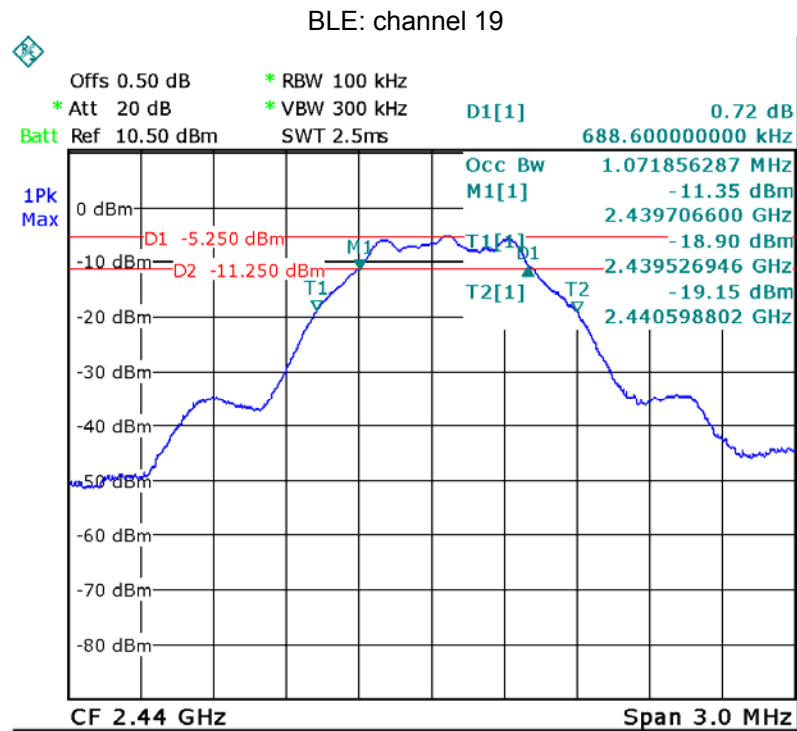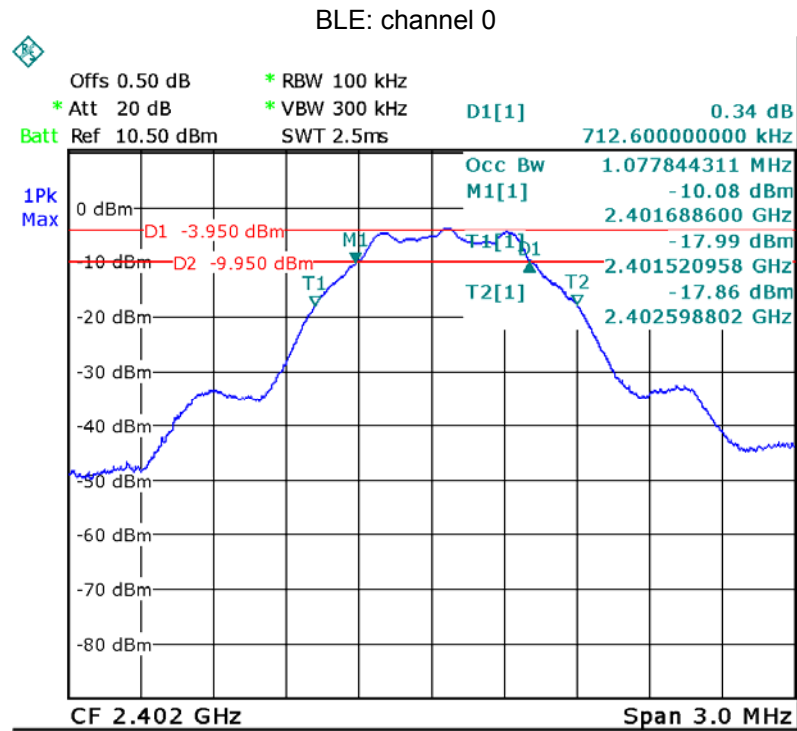

BLE: channel 39

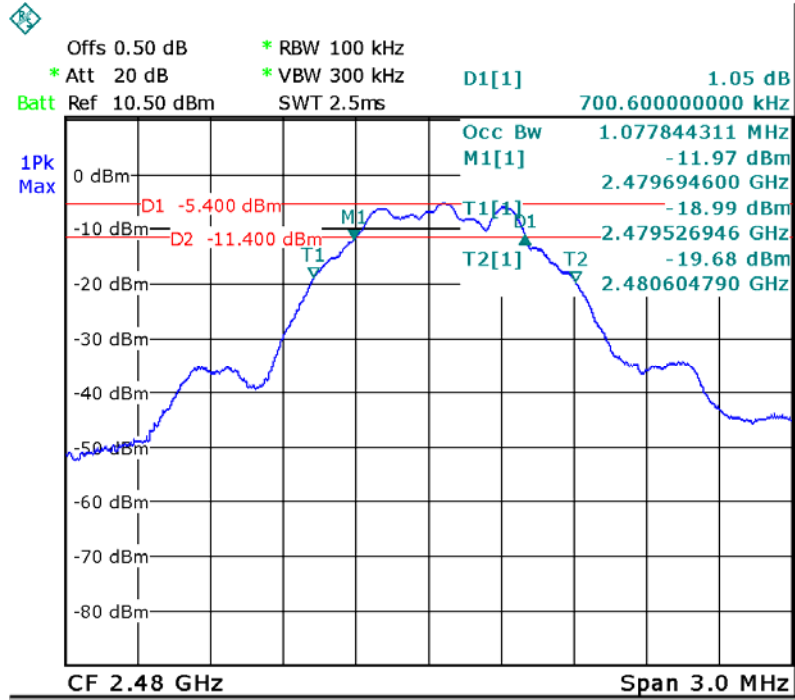

11 Maximum Peak Output Power

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016

11.1 Test Procedure:

KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016

section 9.1.1 (For BLE)

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the $RBW \geq$ DTS bandwidth.
- b) Set $VBW \geq 3 \times RBW$.
- c) Set $span \geq 3 \times RBW$
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

section 9.1.2 (For WIFI)

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.


- a) Set the $RBW = 1$ MHz.
- b) Set the $VBW \geq 3 \times RBW$
- c) Set the $span \geq 1.5 \times$ DTS bandwidth.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

11.2 Test Result:


Operation mode	Channel Frequency (MHz)	Maximum Peak Output Power (dBm)	Limit
BLE	Low-2402	-3.88	1W/30dBm
	Middle-2440	-5.21	1W/30dBm
	High-2480	-5.38	1W/30dBm

Test Plot


BLE: channel 0

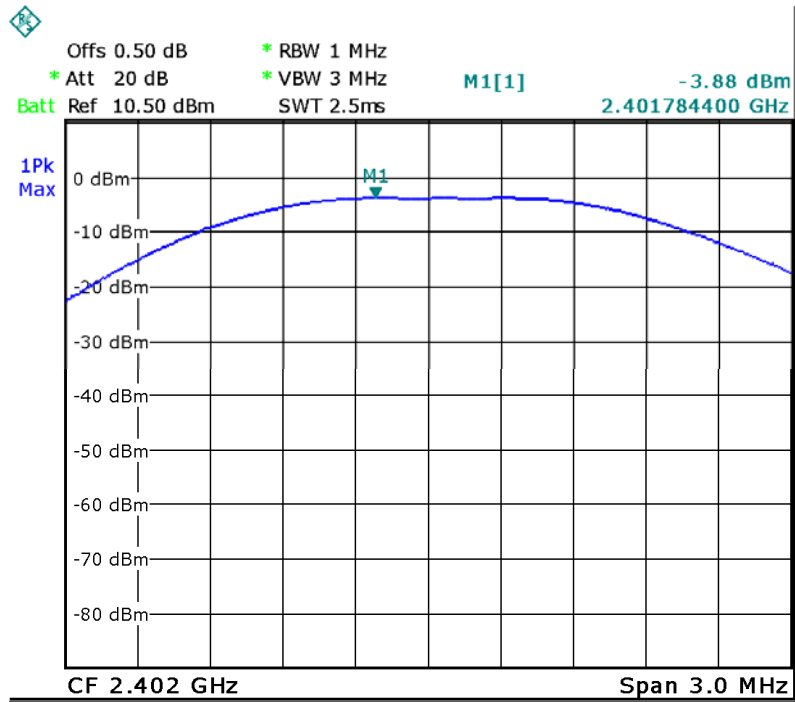

BLE: channel 19

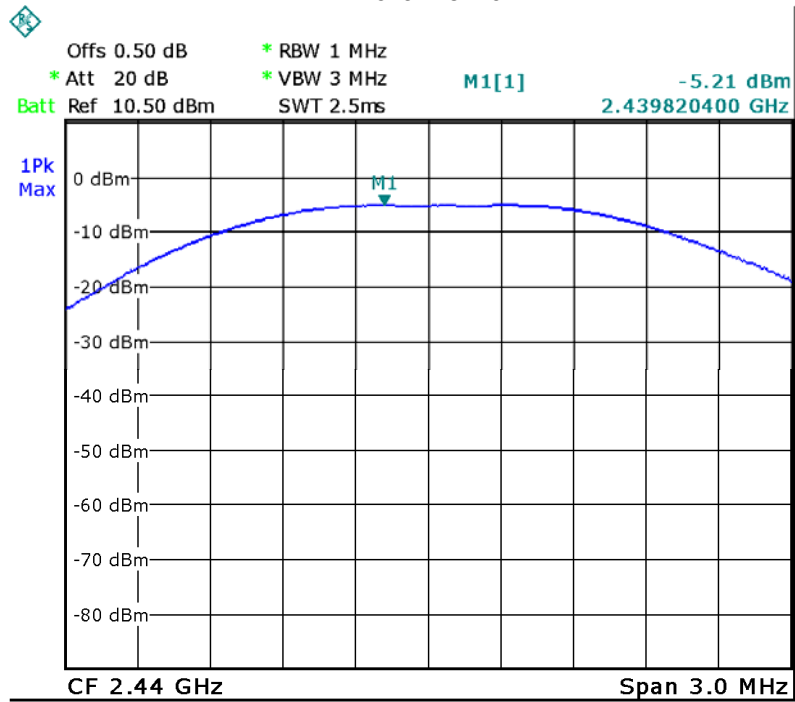

BLE: channel 39

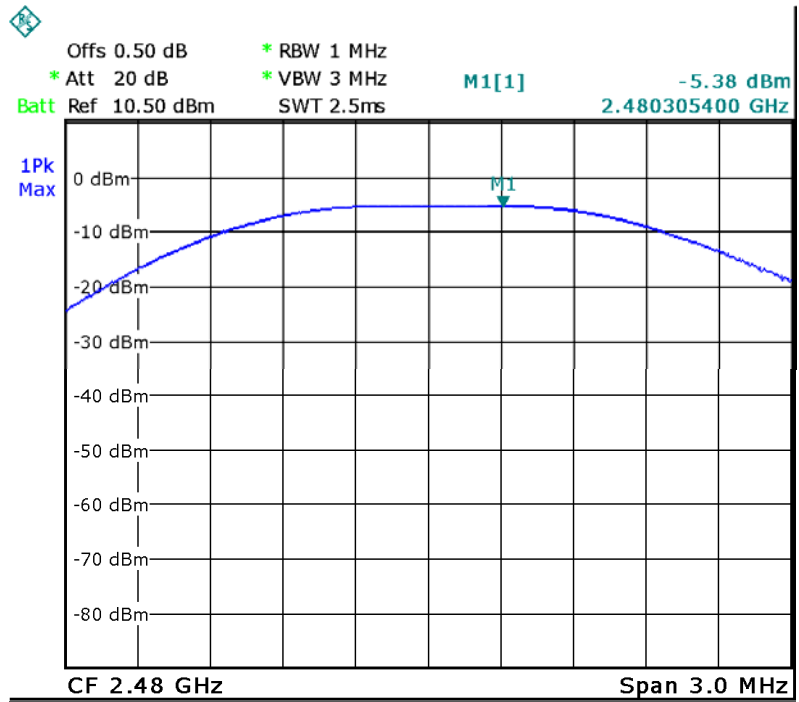

12 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016

12.1 Test Procedure:

KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016 section 10.2


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.

12.2 Test Result:


Operation mode	Channel Frequency (MHz)	Power Spectral (dBm per 3kHz)	Limit
BLE	Low-2402	-19.44	8dBm per 3kHz
	Middle-2440	-21.17	8dBm per 3kHz
	High-2480	-21.30	8dBm per 3kHz

Test Plot


BLE: channel 0

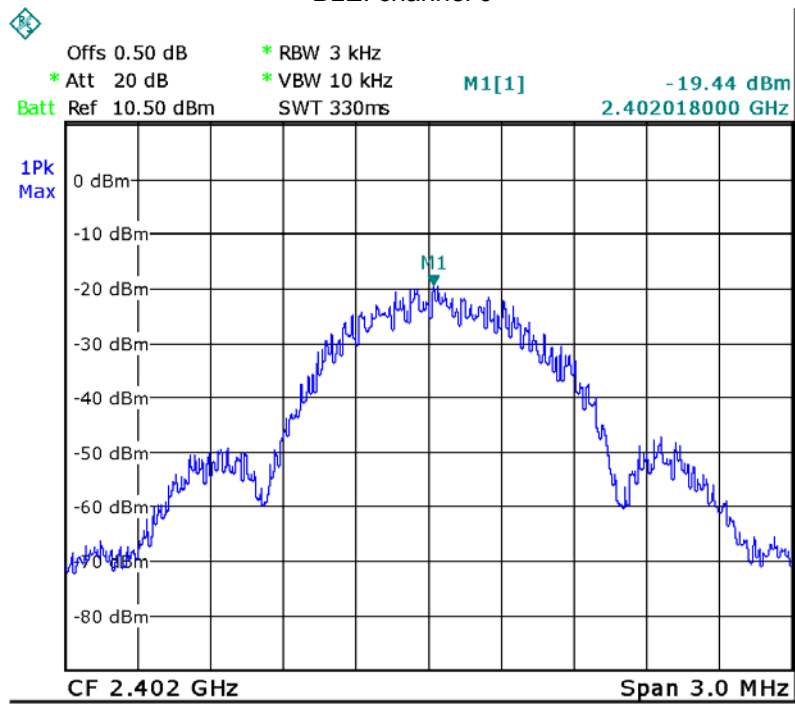

BLE: channel 19

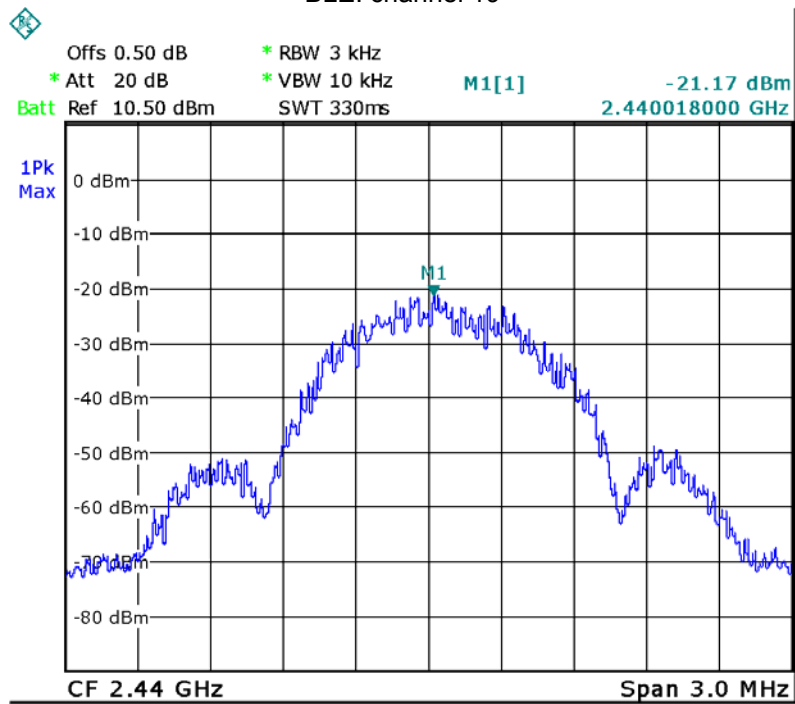

BLE: channel 39

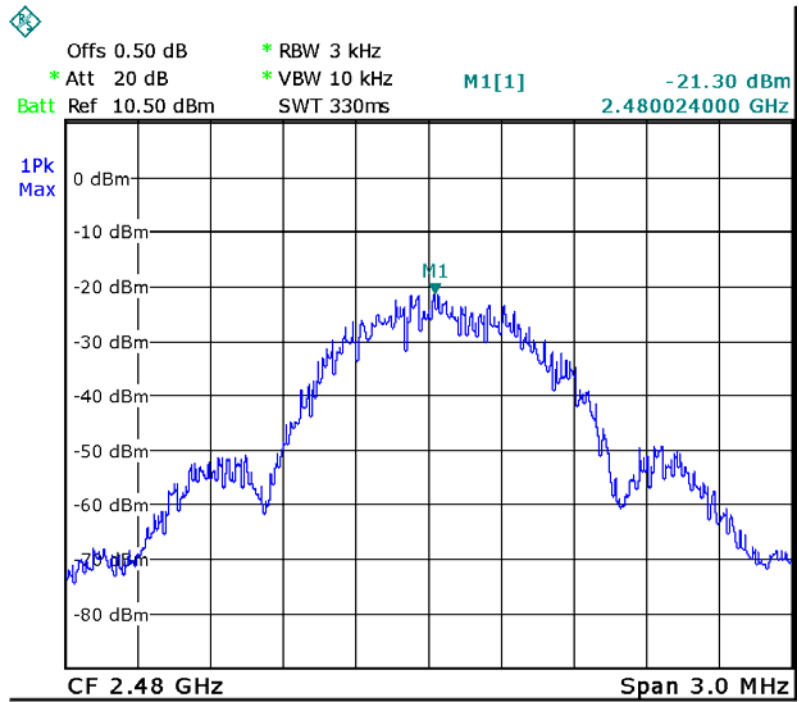

13 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.

14 RF Exposure

Remark: refer to MPE test report: WTS18S11129706-2W.

15 Photographs of test setup and EUT.

Note: Please refer to appendix: WTS18S11129706W_Photo.

=====**End of Report**=====