



B.Test Plot:



(Channel 36, 5180MHz, 802.11ac (VHT20))



(Channel 44, 5220MHz, 802.11ac (VHT20))



(Channel 48, 5240MHz, 802.11ac (VHT20))



(Channel 52, 5260MHz, 802.11ac (VHT20))



(Channel 60, 5300MHz, 802.11ac (VHT20))



(Channel 64, 5320MHz, 802.11ac (VHT20))



(Channel 100, 5500MHz, 802.11ac (VHT20))



(Channel 120, 5600MHz, 802.11ac (VHT20))



(Channel 144, 5720MHz, 802.11ac (VHT20))



(Channel 144, 5720MHz, 802.11ac(VHT20))



(Channel 149, 5745MHz, 802.11ac (VHT20))



(Channel 157, 5785MHz, 802.11ac (VHT20))



(Channel 165, 5825MHz, 802.11ac (VHT20))




802.11ac (VHT40) Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured PPSD (dBm/MHz)	Duty Factor	Corrected PPSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
38	5190	-6.16	0.07	-6.09	11	PASS
46	5230	-3.11		-3.04		
54	5270	-1.47		-1.40		
62	5310	-1.08		-1.01		
102	5510	-2.62		-2.55		
126	5630	-1.61		-1.54		
142	5710	-2.23		-2.16		
Channel	Frequency (MHz)	Measured PPSD (dBm/500KHz)	Duty Factor	Corrected (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
142	5710	-4.97	0.07	-4.90	30	PASS
151	5755	-6.06		-5.99		
155	5795	-6.37		-6.30		

B. Test Plot:

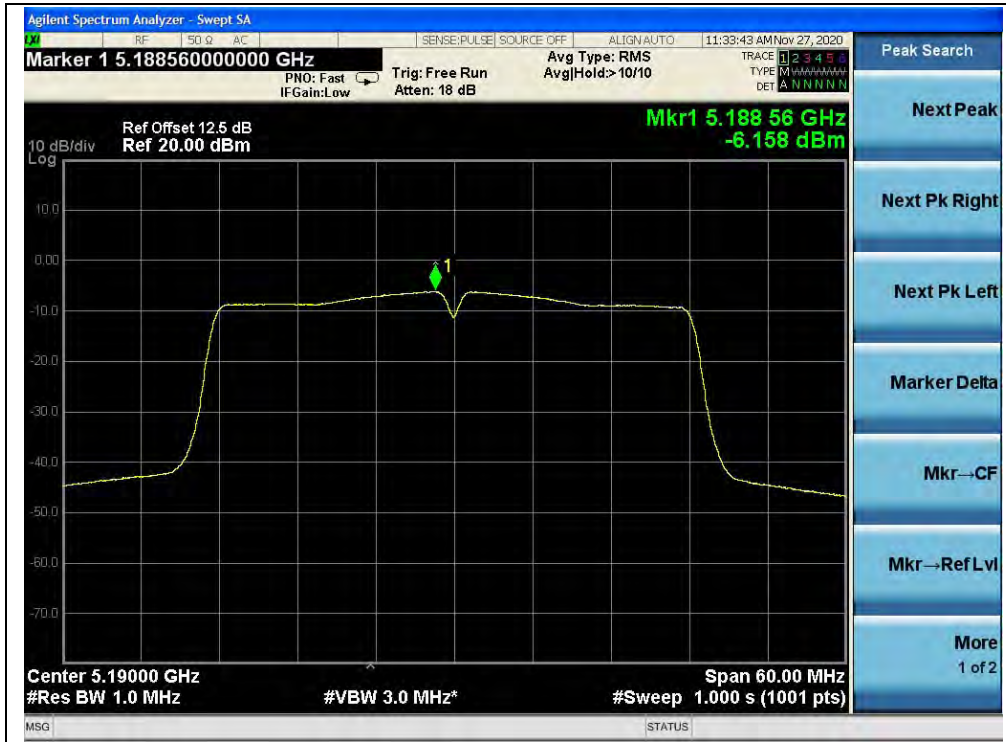

(Channel 38, 5190MHz, 802.11ac (VHT40))



(Channel 46, 5230MHz, 802.11ac (VHT40))



(Channel 54, 5270MHz, 802.11ac (VHT40))



(Channel 62, 5310MHz, 802.11ac (VHT40))



(Channel 102, 5510MHz, 802.11ac (VHT40))



(Channel 126, 5630MHz, 802.11ac (VHT40))



(Channel 142, 5710MHz, 802.11ac (VHT40))



(Channel 142, 5710MHz, 802.11ac (VHT40))



(Channel 151, 5755MHz, 802.11ac (VHT40))



(Channel 159, 5795MHz, 802.11ac (VHT40))




802.11ac (VHT80) Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured PSD (dBm/MHz)	Duty Factor	Corrected PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
42	5210	-13.07	0.13	-12.94	11	PASS
58	5290	-8.89		-8.76		
106	5530	-5.55		-5.42		
122	5610	-4.95		-4.82		
138	5690	-4.94		-4.81		
Channel	Frequency (MHz)	Measured PSD (dBm/500KHz)	Duty Factor	Corrected PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
138	5690	-7.81	0.13	-7.68	30	PASS
155	5775	-8.16		-8.03		

B. Test Plot:

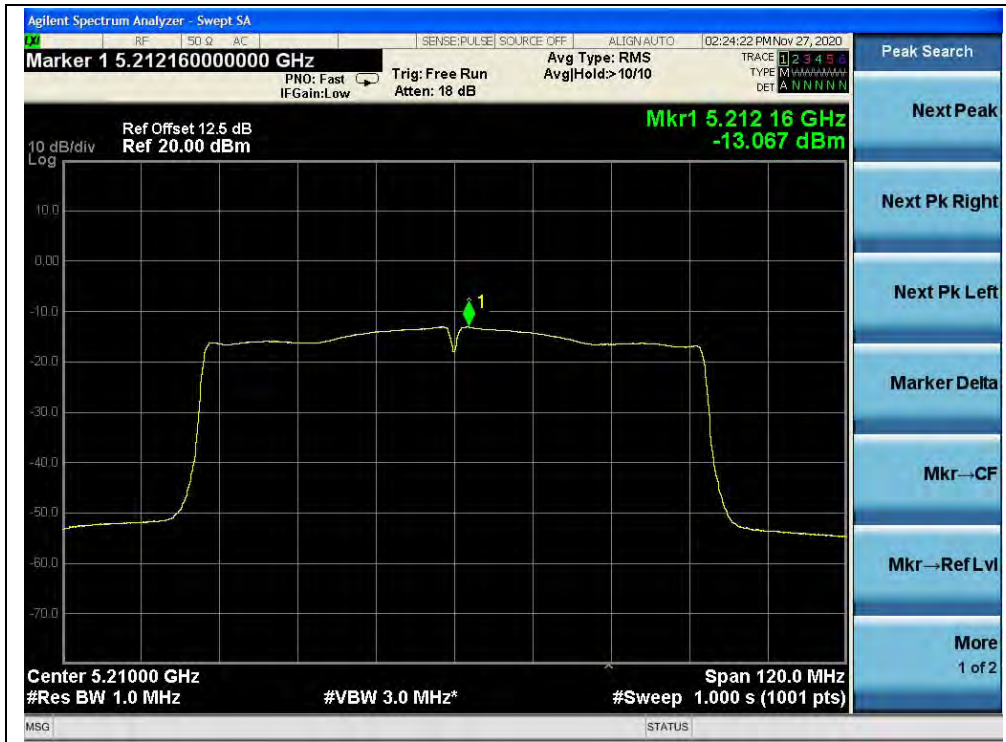

(Channel 42, 5210MHz, 802.11ac (VHT80))



(Channel 58, 5290MHz, 802.11ac (VHT80))



(Channel 106, 5530MHz, 802.11ac (VHT80))



(Channel 122, 5610MHz, 802.11ac (VHT80))



(Channel 138, 5690MHz, 802.11ac (VHT80))



(Channel 138, 5690MHz, 802.11ac (VHT80))



(Channel 155, 5775MHz, 802.11ac (VHT80))



2.6. Frequency Stability

2.6.1. Requirement

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user’s manual.

2.6.2. Test Procedure

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between 5°C to 40°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel’s center frequency was recorded. Data for the worst case channel is shown below.

2.6.3. Test Result

U-NII-1 (Ch. 36) 5180MHz				
VOLTAGE (%)	POWER (VDC)	TEMP (°C)	Fre. Dev. (kHz)	Deviation (ppm)
100%	5.00	+20(Ref)	23	4.440
100%		-30	31	5.985
100%		-20	29	5.598
100%		-10	26	5.019
100%		0	25	4.826
100%		+10	22	4.247
100%		+20	20	3.861
100%		+30	23	4.440
100%		+40	26	5.019
100%		+50	23	4.440
85%		4.25	+20	30
115%	5.50	+20	28	5.405



U-NII-2A (Ch. 52)				
5260MHz				
VOLTAGE (%)	POWER (VDC)	TEMP (°C)	Fre. Dev. (kHz)	Deviation (ppm)
100%	5.00	+20(Ref)	18	3.422
100%		-30	22	4.183
100%		-20	25	4.753
100%		-10	27	5.133
100%		0	19	3.612
100%		+10	17	3.232
100%		+20	21	3.992
100%		+30	26	4.943
100%		+40	30	5.703
100%		+50	25	4.753
85%	4.25	+20	21	3.992
115%	5.50	+20	19	3.612

U-NII-2C (Ch. 100)				
5500MHz				
VOLTAGE (%)	POWER (VDC)	TEMP (°C)	Fre. Dev. (kHz)	Deviation (ppm)
100%	5.00	+20(Ref)	21	3.818
100%		-30	25	4.545
100%		-20	30	5.455
100%		-10	29	5.273
100%		0	22	4.000
100%		+10	19	3.455
100%		+20	23	4.182
100%		+30	32	5.818
100%		+40	35	6.364
100%		+50	25	4.545
85%	4.25	+20	30	5.455
115%	5.50	+20	27	4.909



U-NII-3 (Ch. 149)				
5745MHz				
VOLTAGE (%)	POWER (VDC)	TEMP (°C)	Fre. Dev. (kHz)	Deviation (ppm)
100%	5.00	+20(Ref)	22	3.829
100%		-30	26	4.526
100%		-20	27	4.700
100%		-10	21	3.655
100%		0	30	5.222
100%		+10	25	4.352
100%		+20	26	4.526
100%		+30	26	4.526
100%		+40	28	4.874
100%		+50	28	4.874
85%		4.25	+20	29
115%	5.50	+20	31	5.396

2.7. Conducted Emission

2.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.7.2. Test Description

Test Setup:

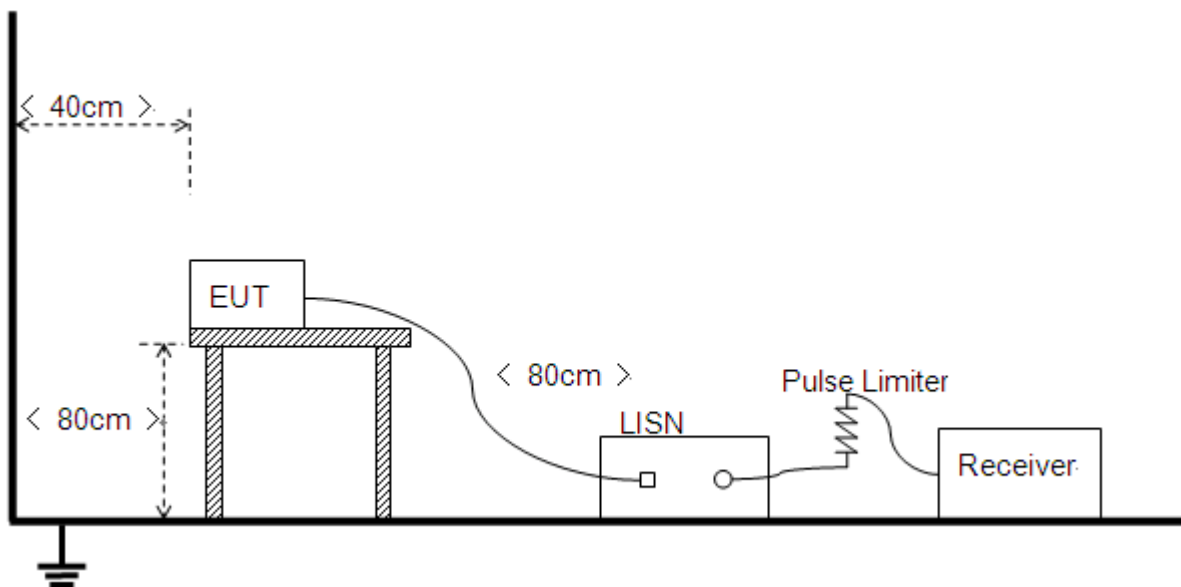

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.



2.7.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and Plot below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT+PC+PC ADAPTER+WIFI TX

Test Voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B.Test Plot:

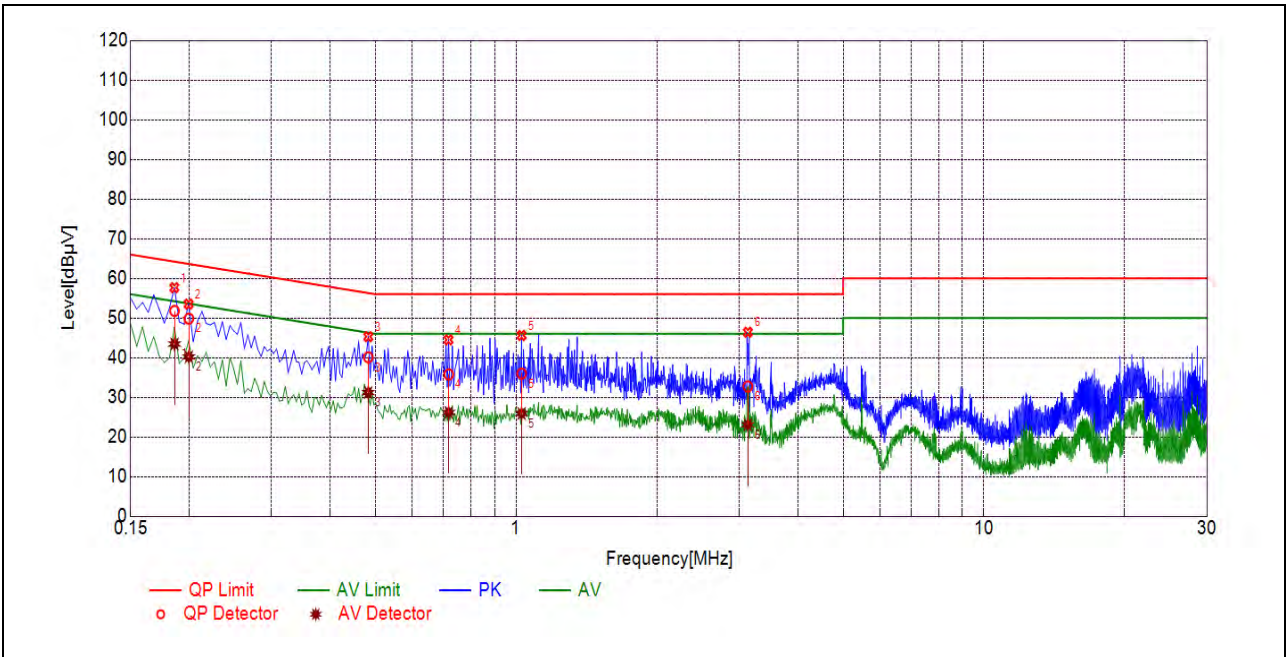

(L Phase)

No.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1861	51.79	43.43	64.21	54.21	Line	PASS
2	0.1997	49.86	40.18	63.63	53.63		PASS
3	0.4829	40.09	31.21	56.29	46.29		PASS
4	0.7175	35.79	26.17	56.00	46.00		PASS
5	1.0274	35.99	25.92	56.00	46.00		PASS
6	3.1281	32.74	23.07	56.00	46.00		PASS

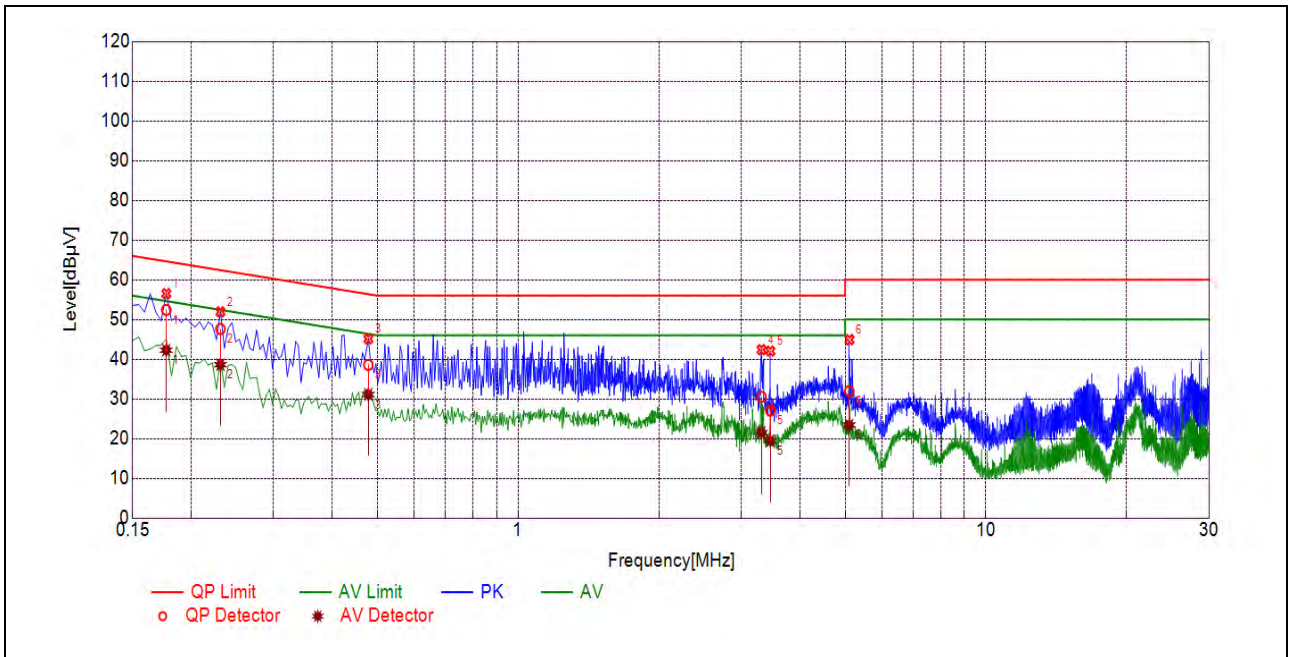

(N Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1769	52.40	42.28	64.63	54.63	Neutral	PASS
2	0.2310	47.61	38.61	62.41	52.41		PASS
3	0.4783	38.57	31.12	56.37	46.37		PASS
4	3.3131	30.52	21.52	56.00	46.00		PASS
5	3.4598	27.08	19.46	56.00	46.00		PASS
6	5.1040	31.98	23.43	60.00	50.00		PASS



2.8. Restricted Frequency Bands

2.8.1. Requirement

The peak emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (3) For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

The following formula is used to convert the equipment isotropic radiated power(e.i.r.p.) to field strength (dBμV/m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz = 68.23 dBuV/m


Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).

2.8.2. Test Description

Test Setup

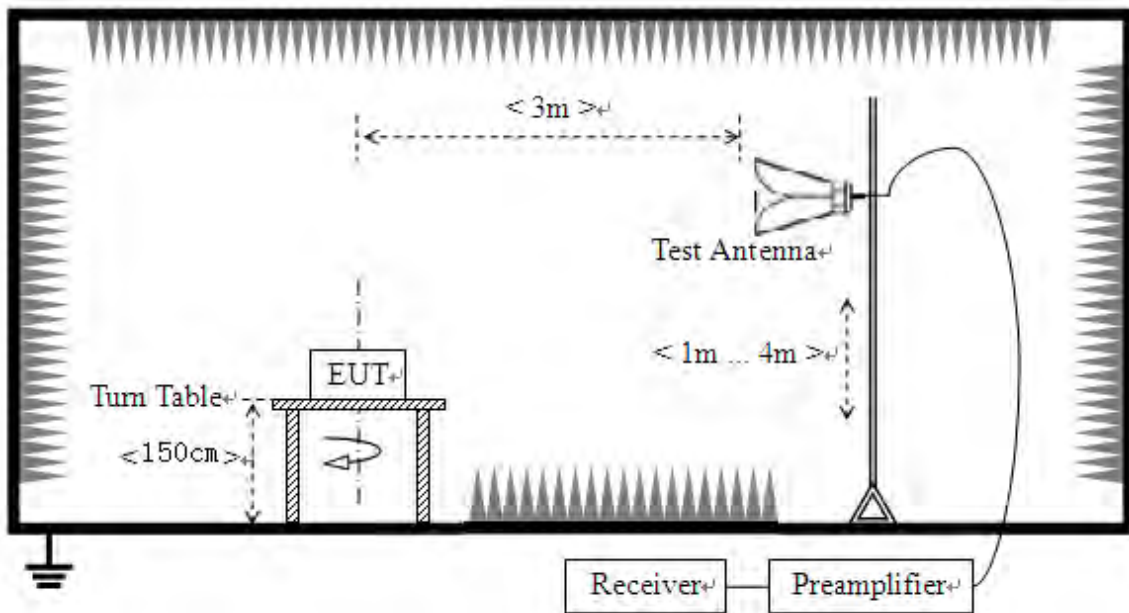



The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

KDB 789033 Section H) 3)5)6(d)) was used in order to prove compliance

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

2.8.3. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna; U_R : Receiver Reading

G_{preamp} : Preamplifier Gain; A_{Factor} : Antenna Factor at 3m

Note 1: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

Note 2: All test modes and bandwidth were considered and evaluated respectively by performing full test, only the worst data were recorded for each bandwidth.


802.11a Mode

A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV	U_R (dB μ V)					
36	5082.08	PK	44.46	-16.92	32.20	59.74	74	PASS
36	5150.00	AV	33.61	-16.92	32.20	48.89	54	PASS
64	5351.18	PK	44.27	-16.80	32.20	59.67	74	PASS
64	5350.00	AV	32.41	-16.80	32.20	47.81	54	PASS
100	5468.00	PK	41.47	-16.64	32.20	57.03	68.23	PASS
100	5470.00	AV	31.33	-16.64	32.20	46.89	54	PASS
144	5725.00	PK	45.79	-16.64	32.20	61.35	68.23	PASS
144	5725.00	AV	33.21	-16.64	32.20	48.77	54	PASS
149	5725.00	PK	45.47	-16.23	32.20	61.44	122.23	PASS
165	5855.00	PK	41.23	-16.23	32.20	57.20	110.83	PASS




B.Test Plot:

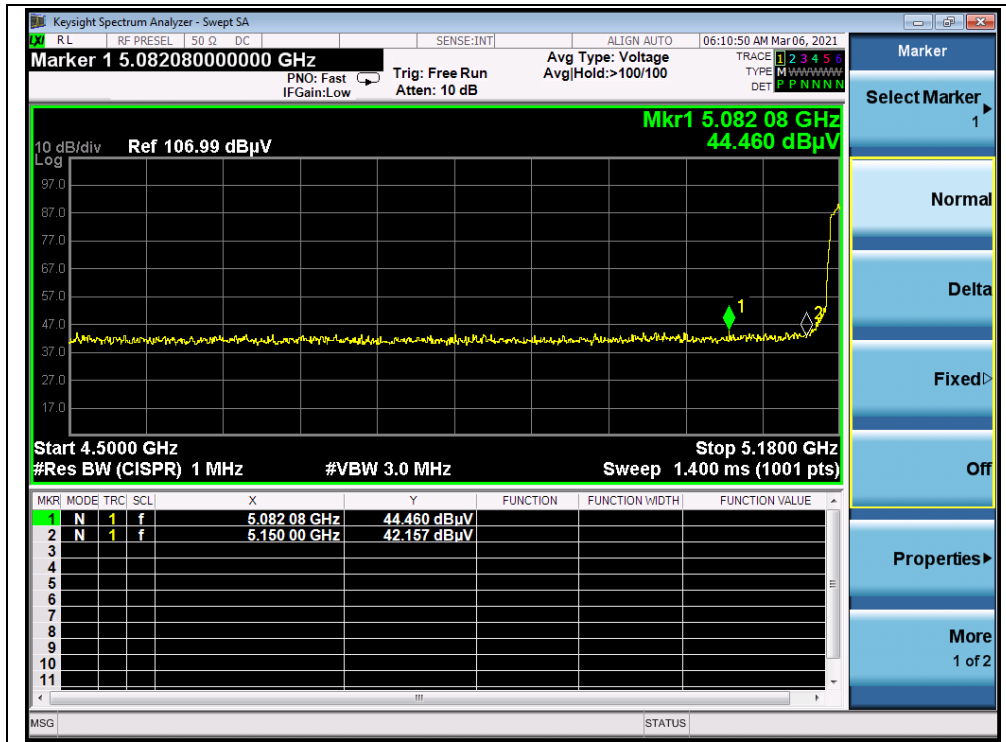

(PEAK, Channel 36, 802.11a)

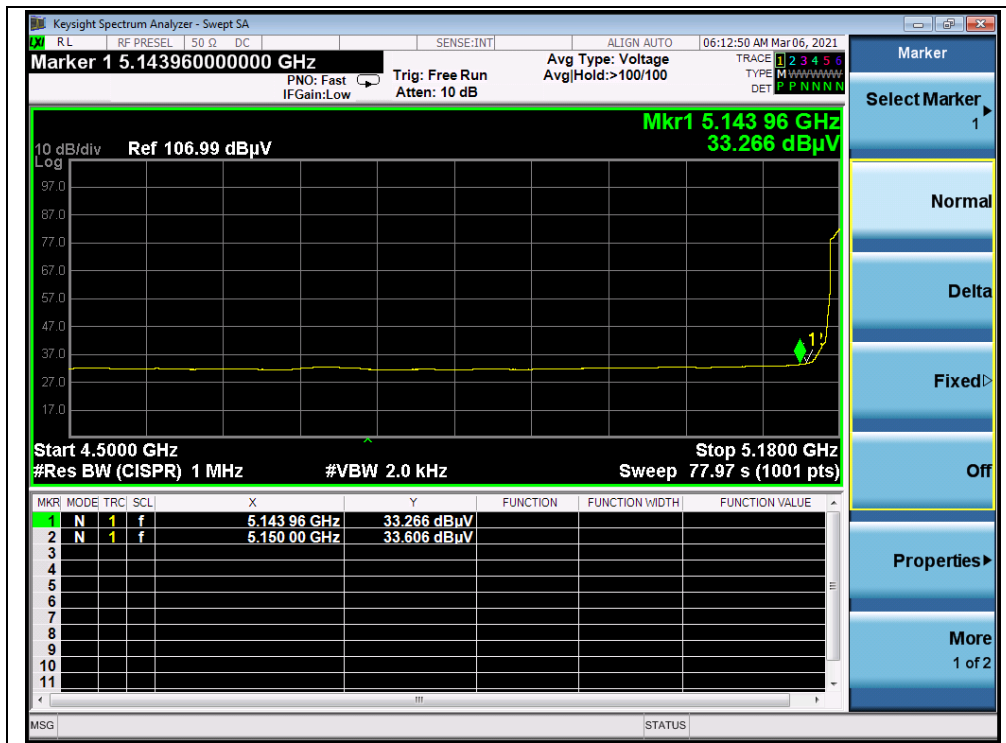


(AVERAGE, Channel 36, 802.11a)

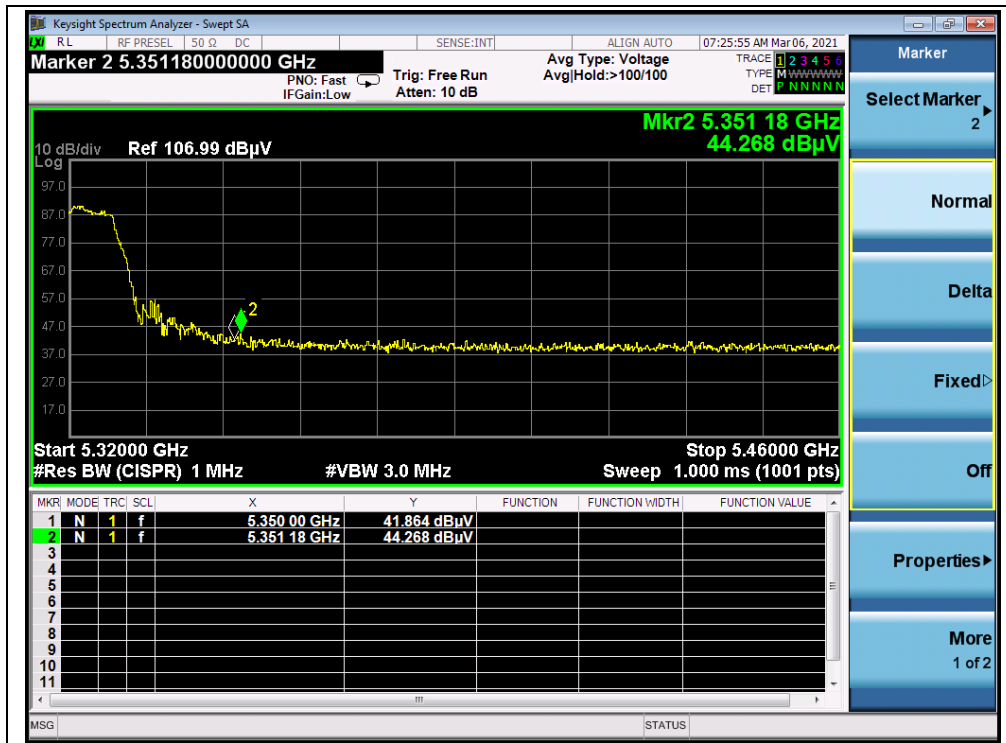


(PEAK, Channel 64, 802.11a)




(AVERAGE, Channel 64, 802.11a)

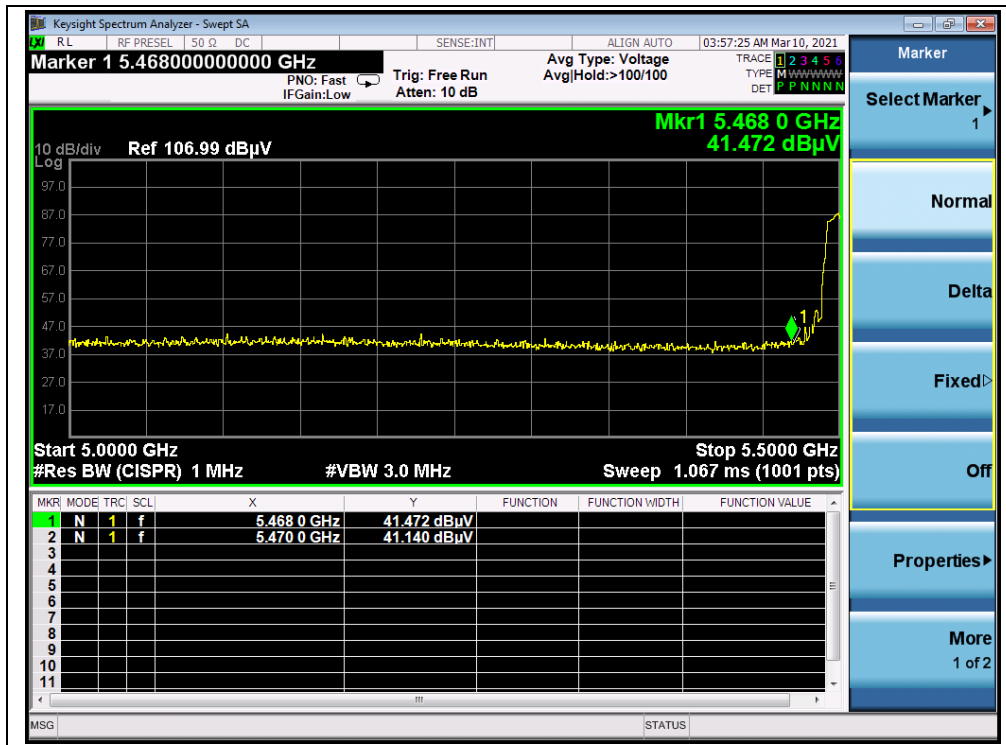


(PEAK, Channel100, 802.11a)

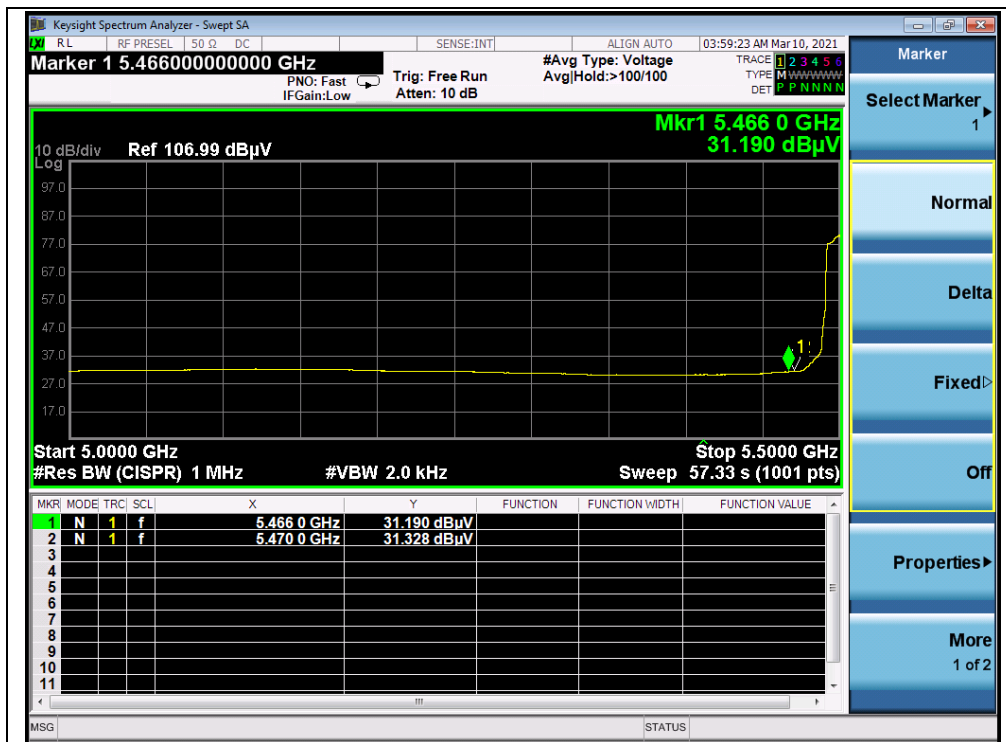


(AVERAGE, Channel 100, 802.11a)

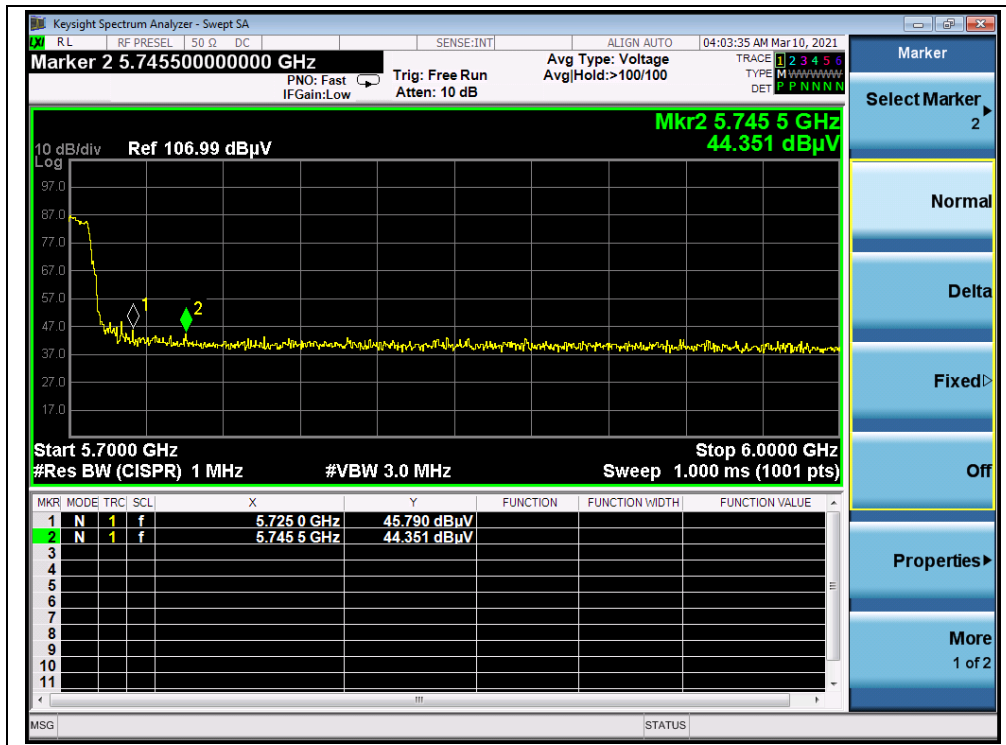


(PEAK, Channel 144, 802.11a)

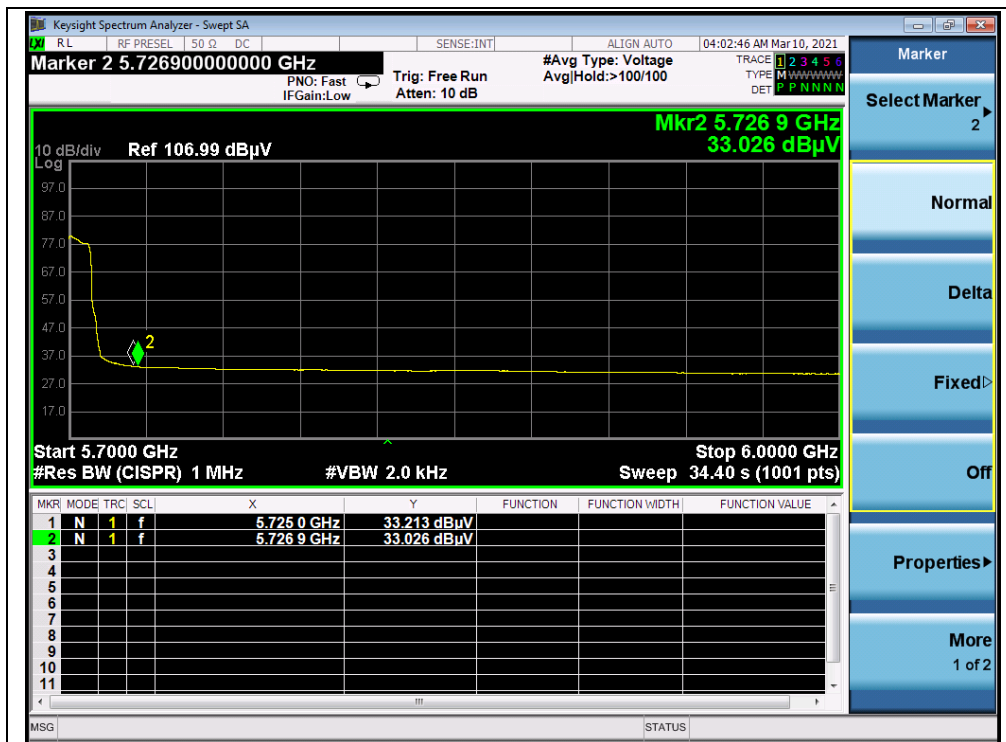

(AVERAGE, Channel 144, 802.11a)

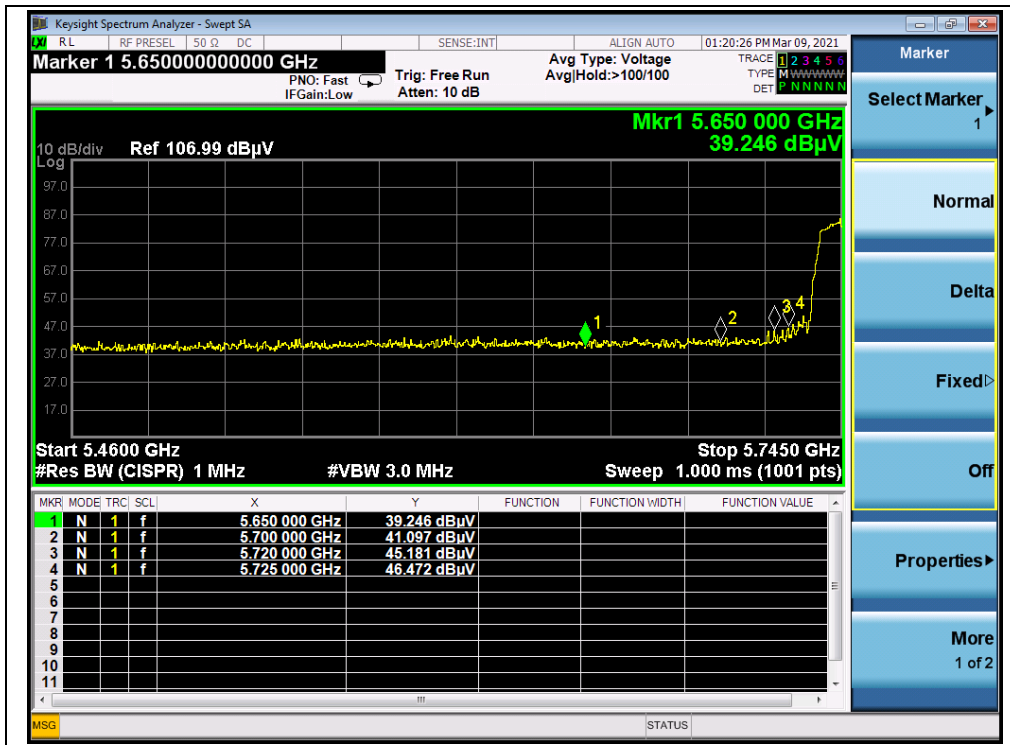

(PEAK, Channel 149, 802.11a)

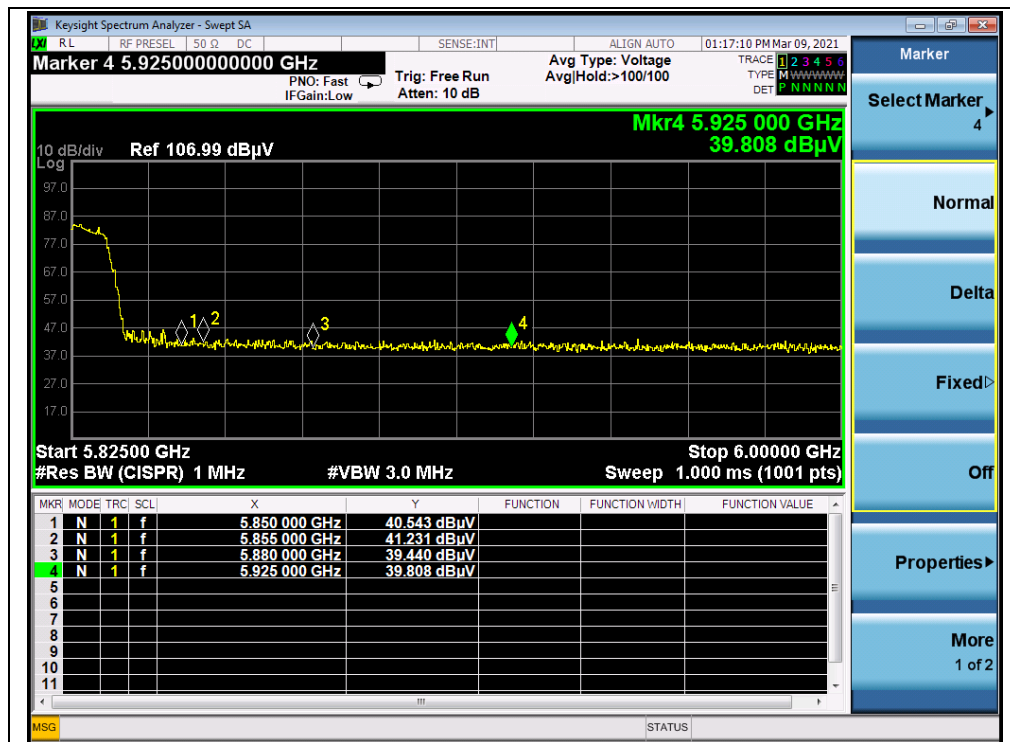


(PEAK, Channel 165, 802.11a)

**802.11n (HT40) Mode****A.Test Verdict:**


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
38	5150.00	PK	43.66	-16.92	32.20	58.94	74	PASS
38	5150.00	AV	34.50	-16.92	32.20	49.78	54	PASS
62	5351.70	PK	45.73	-16.80	32.20	61.13	74	PASS
62	5350.00	AV	34.61	-16.80	32.20	50.01	54	PASS
102	5470.00	PK	44.04	-16.64	32.20	59.60	68.23	PASS
102	5470.00	AV	34.01	-16.64	32.20	49.57	54	PASS
142	5740.19	PK	42.94	-16.64	32.20	58.50	68.23	PASS
142	5727.32	AV	32.36	-16.64	32.20	47.92	54	PASS
151	5720.00	PK	43.94	-16.23	32.20	59.91	110.83	PASS
159	5880.00	PK	42.68	-16.23	32.20	58.65	101.53	PASS




B.Test Plot:

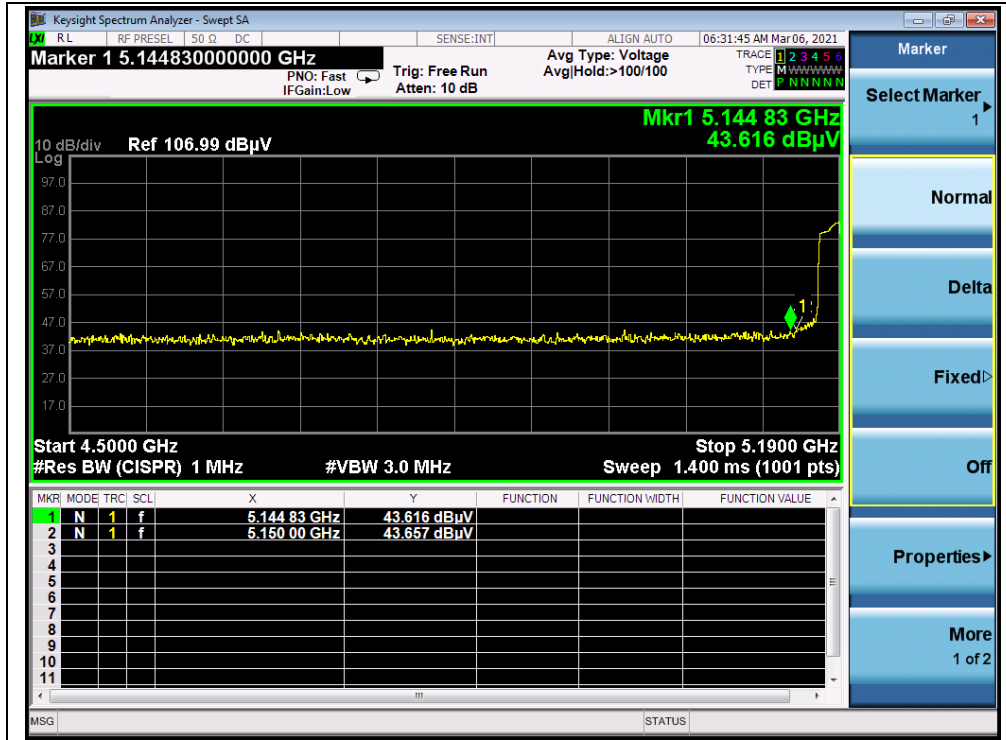

(PEAK, Channel 38, 802.11n (HT40))

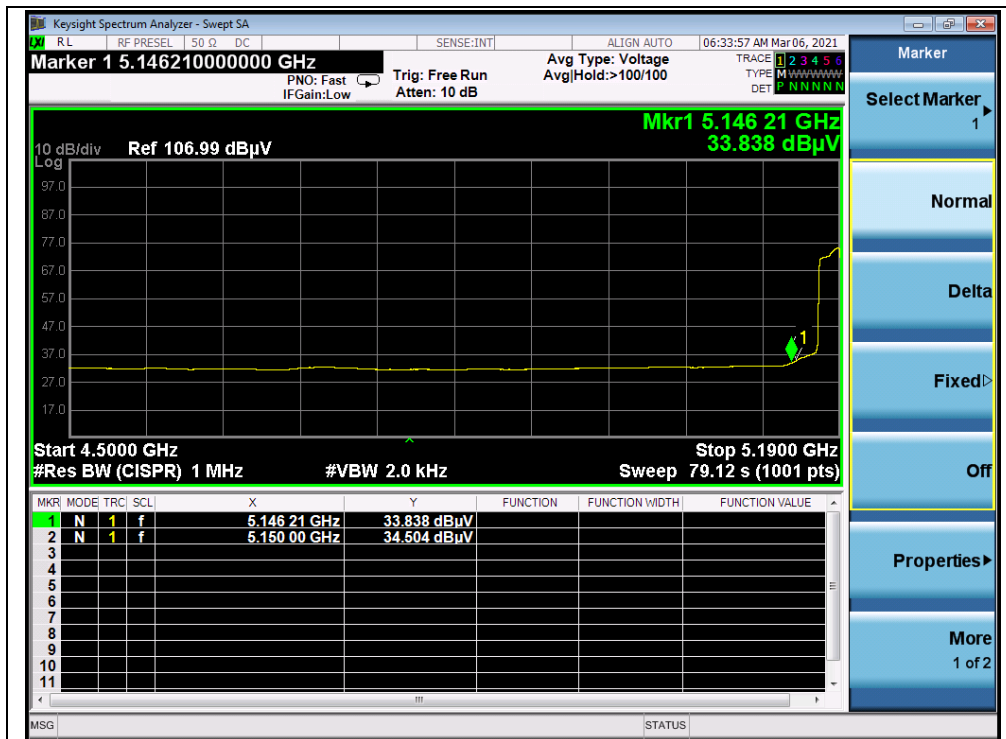


(AVERAGE, Channel 38, 802.11n (HT40))

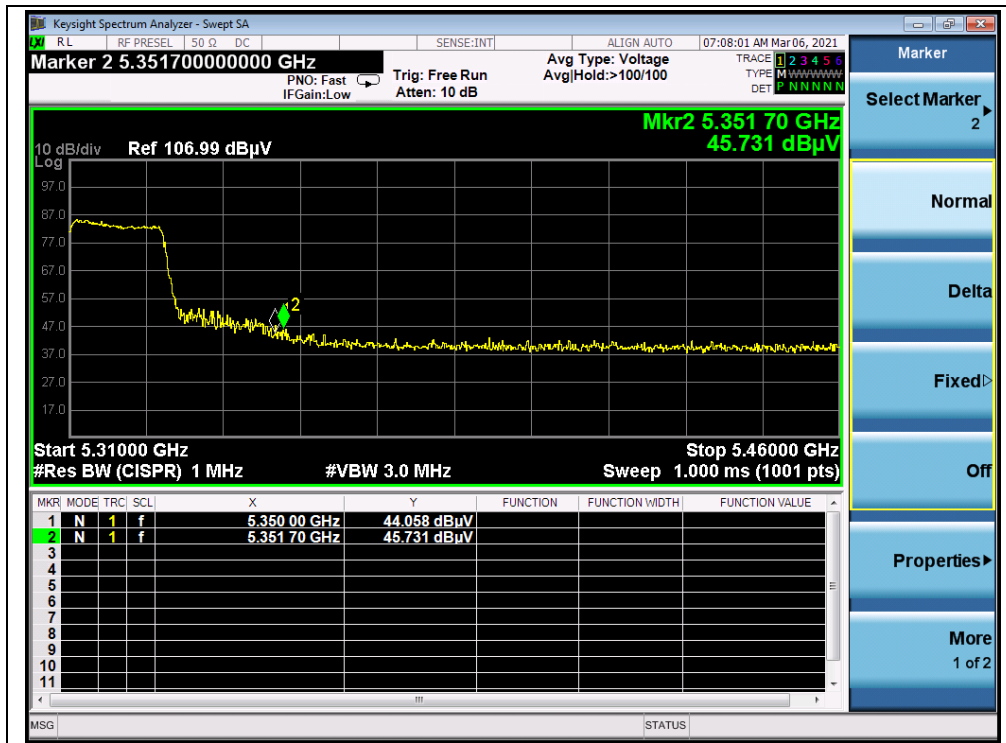


(PEAK, Channel 62, 802.11n (HT40))




(AVERAGE, Channel 62, 802.11n (HT40))

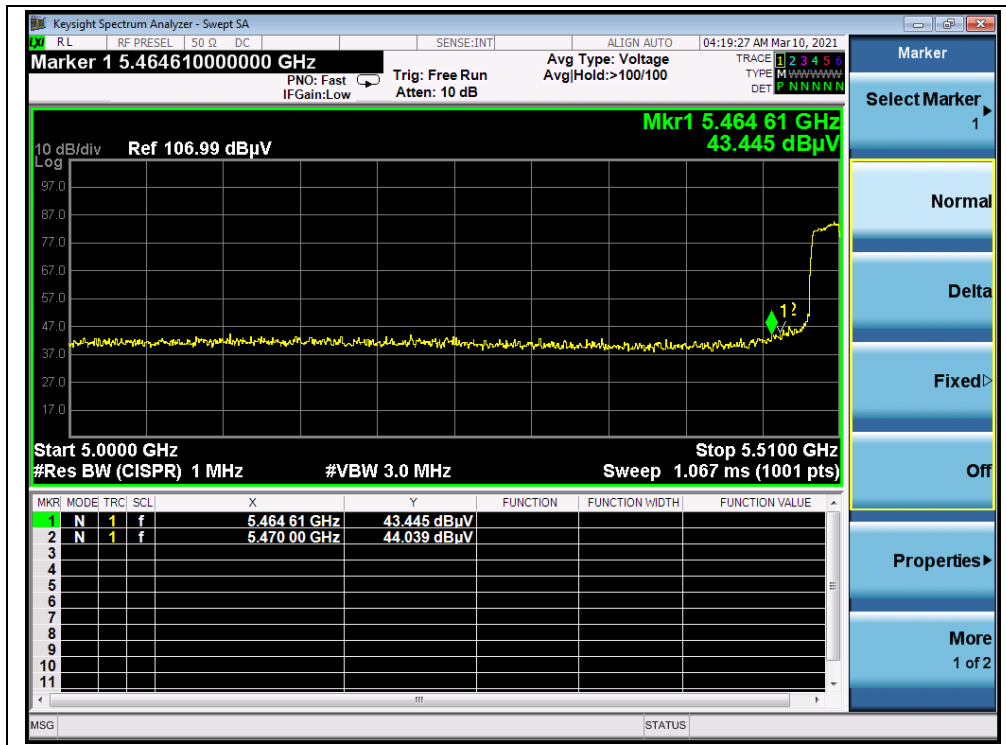


(PEAK, Channel 102, 802.11n (HT40))

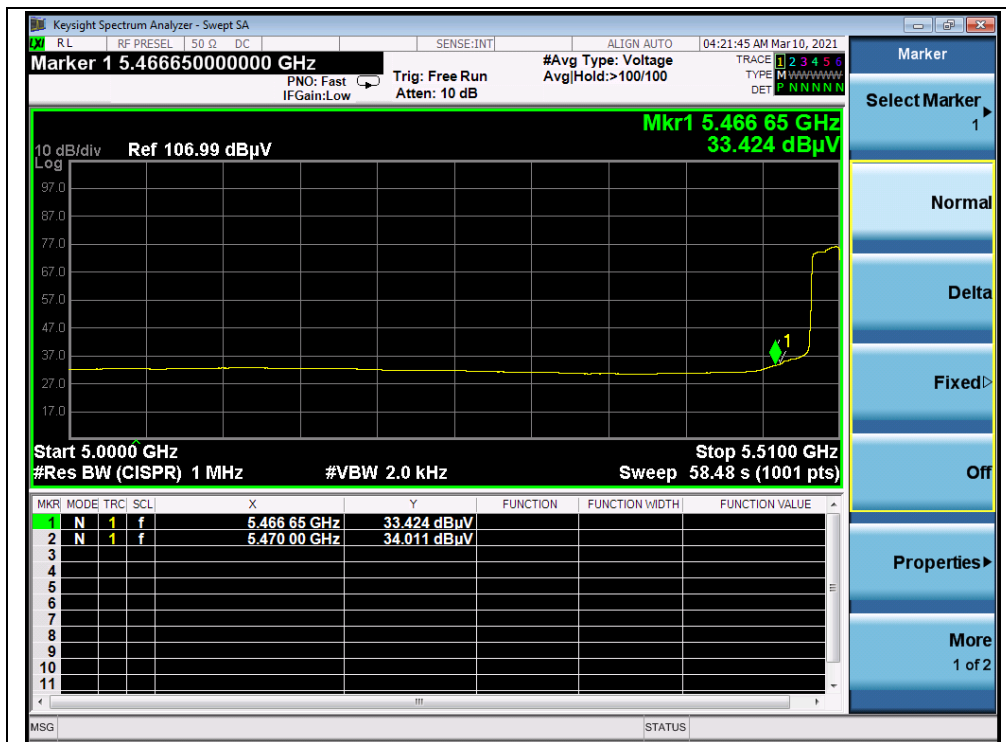


(AVERAGE, Channel 102, 802.11n (HT40))

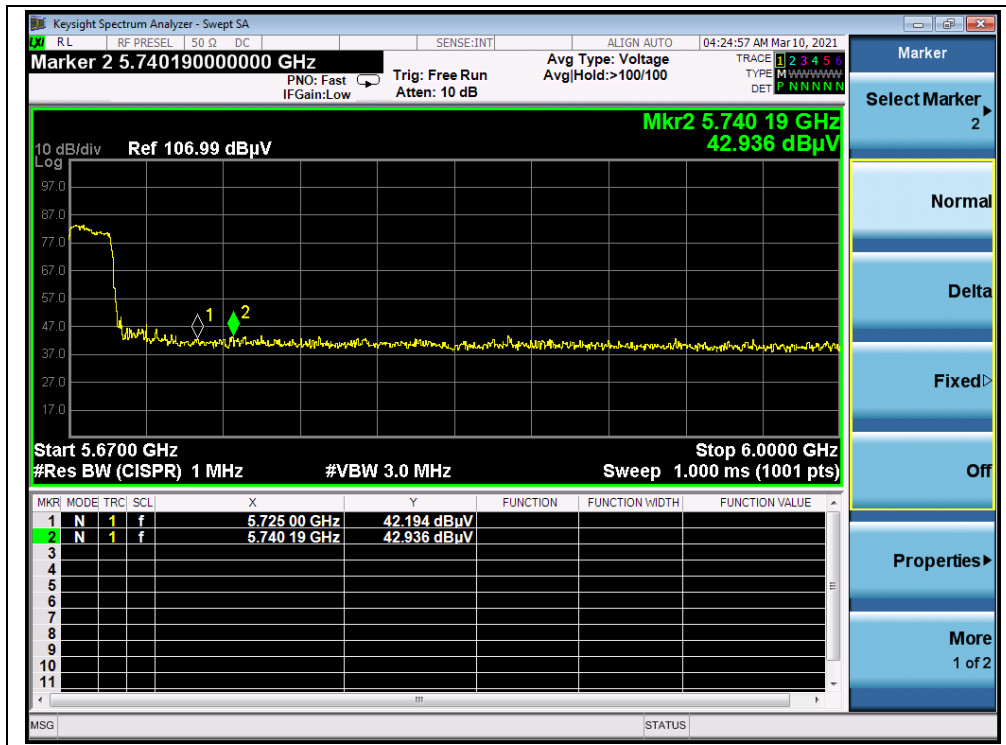


(PEAK, Channel 142, 802.11n (HT40))

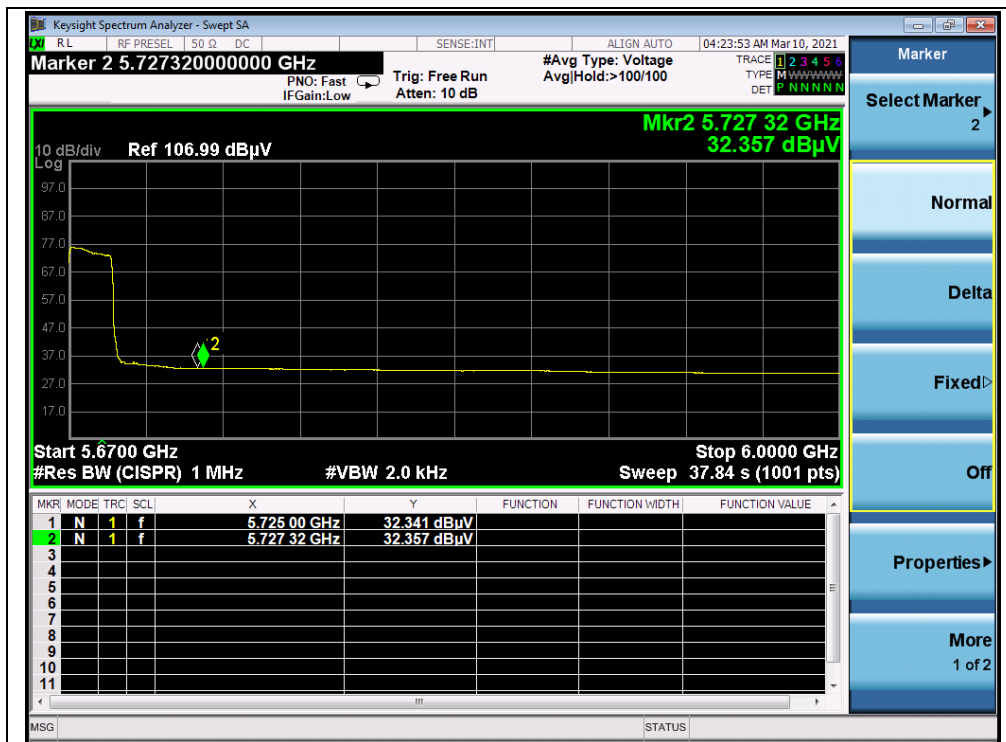

(AVERAGE, Channel 142, 802.11n (HT40))

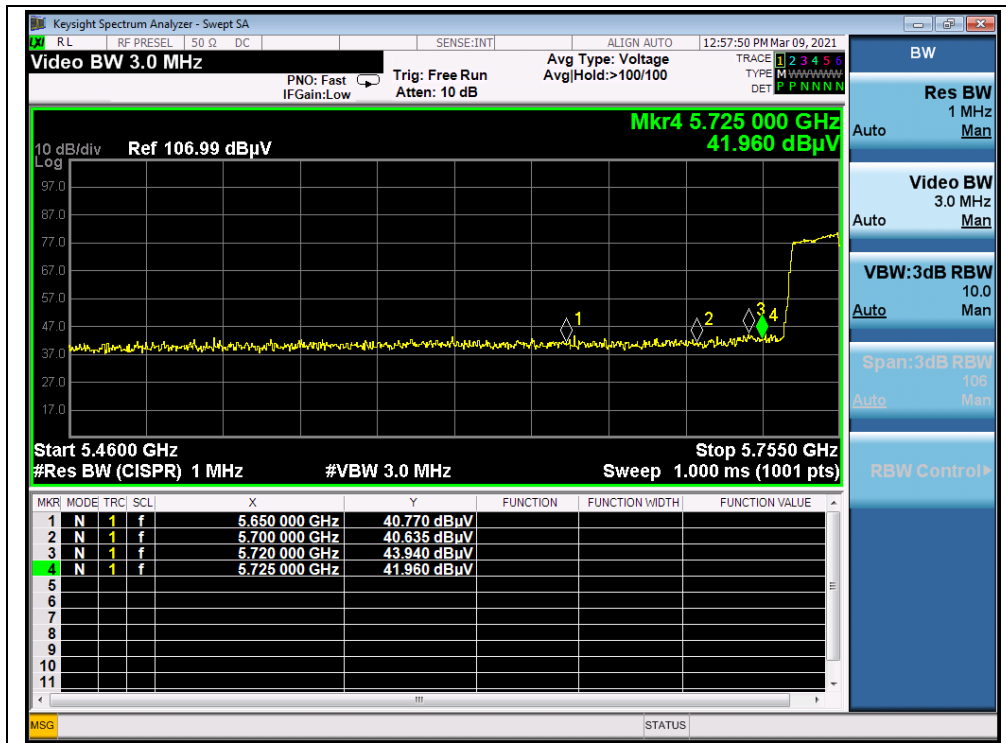

(PEAK, Channel 151, 802.11n (HT40))

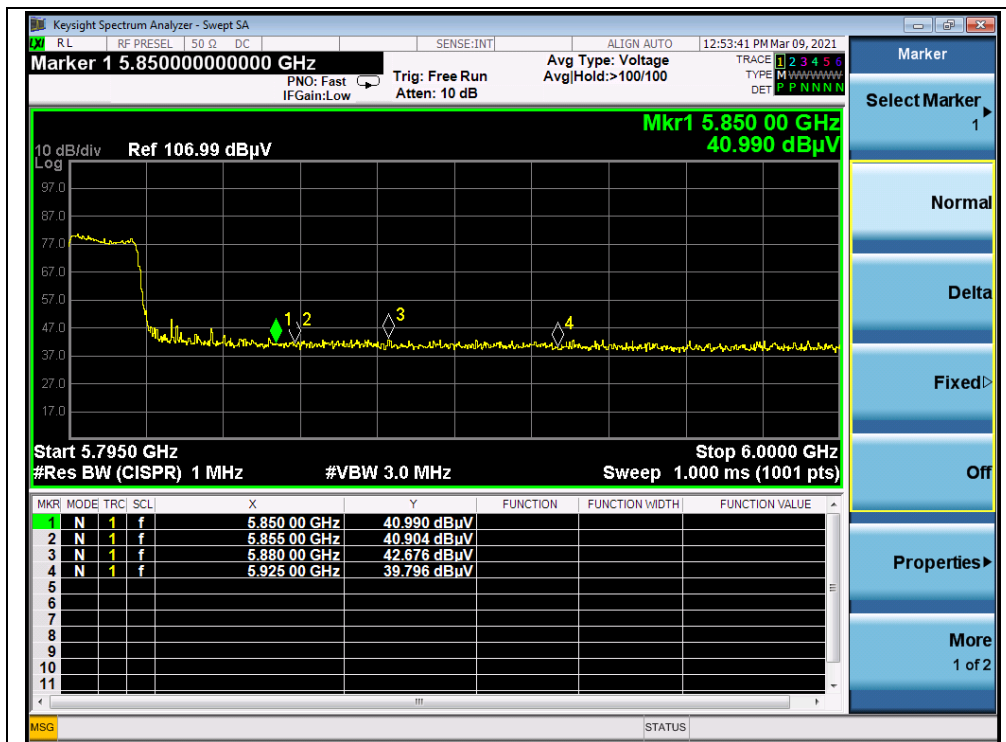


(PEAK, Channel 159, 802.11n (HT40))

**802.11ac (VHT80) Mode****A.Test Verdict:**


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
42	5125.40	PK	43.49	-16.92	32.20	58.77	74	PASS
42	5150.00	AV	33.11	-16.92	32.20	48.39	54	PASS
58	5359.40	PK	42.11	-16.80	32.20	57.51	74	PASS
58	5350.00	AV	32.13	-16.80	32.20	47.53	54	PASS
106	5466.29	PK	43.79	-16.64	32.20	59.35	68.23	PASS
106	5470.00	AV	33.96	-16.64	32.20	49.52	54	PASS
138	5734.97	PK	42.89	-16.64	32.20	58.45	68.23	PASS
138	5741.60	AV	32.60	-16.64	32.20	48.16	54	PASS
155	5715.60	PK	44.94	-16.23	32.20	60.91	109.60	PASS
155	5869.80	PK	44.04	-16.23	32.20	60.01	69.39	PASS




B.Test Plot:

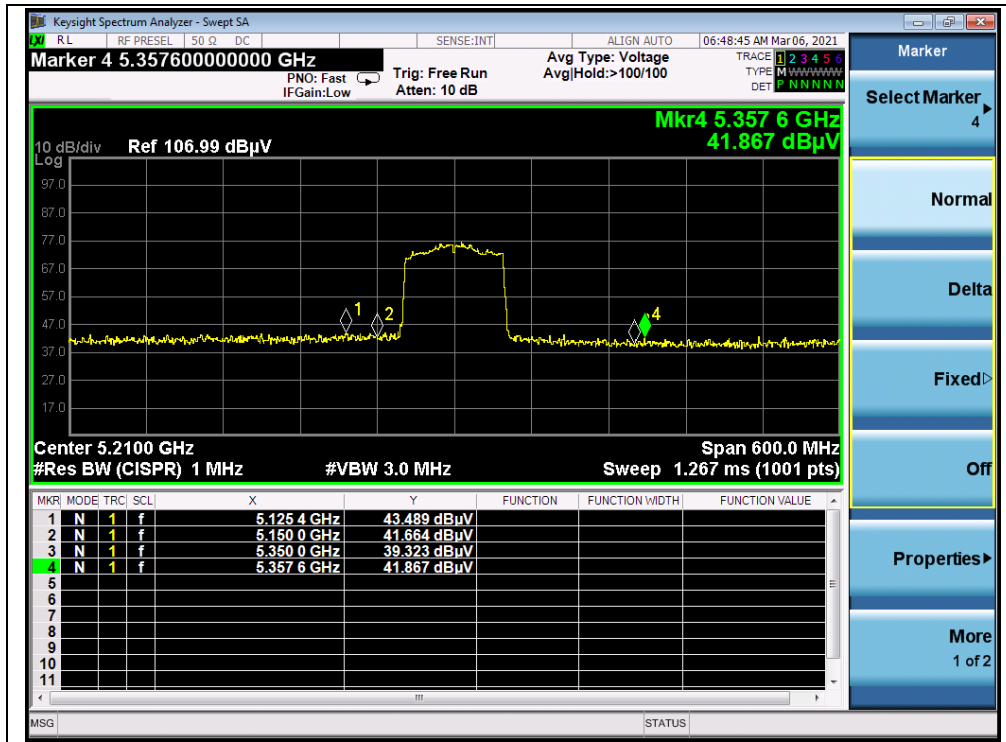


(PEAK, Channel 42, 802.11ac (VHT80))

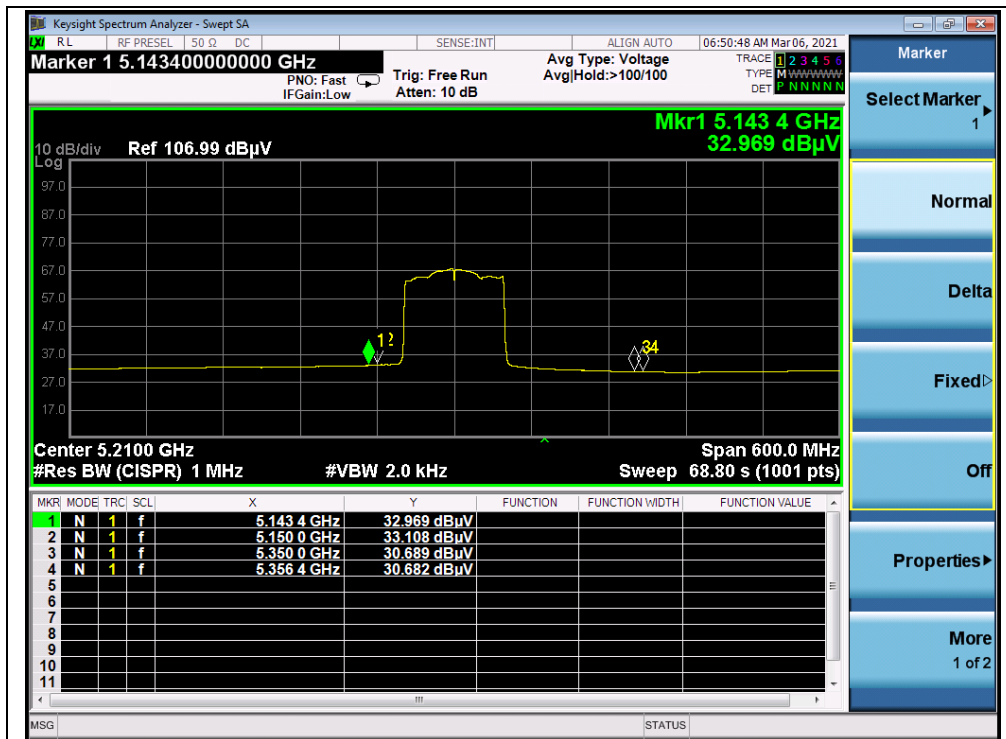


(AVERAGE, Channel 42, 802.11ac (VHT80))

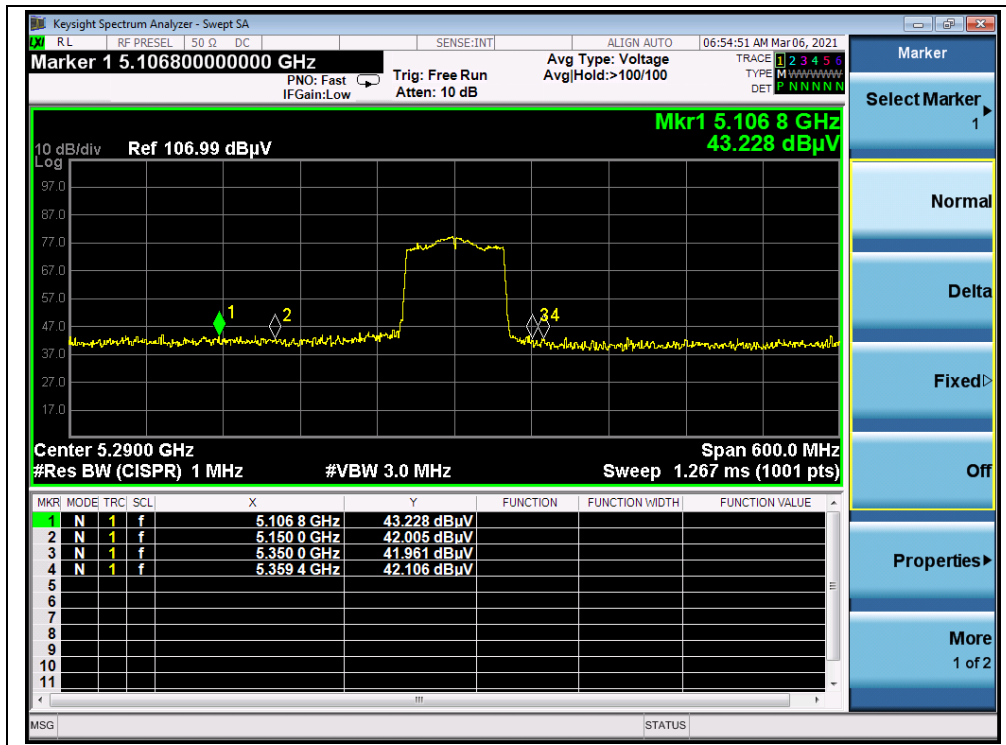


(PEAK, Channel 58, 802.11ac (VHT80))

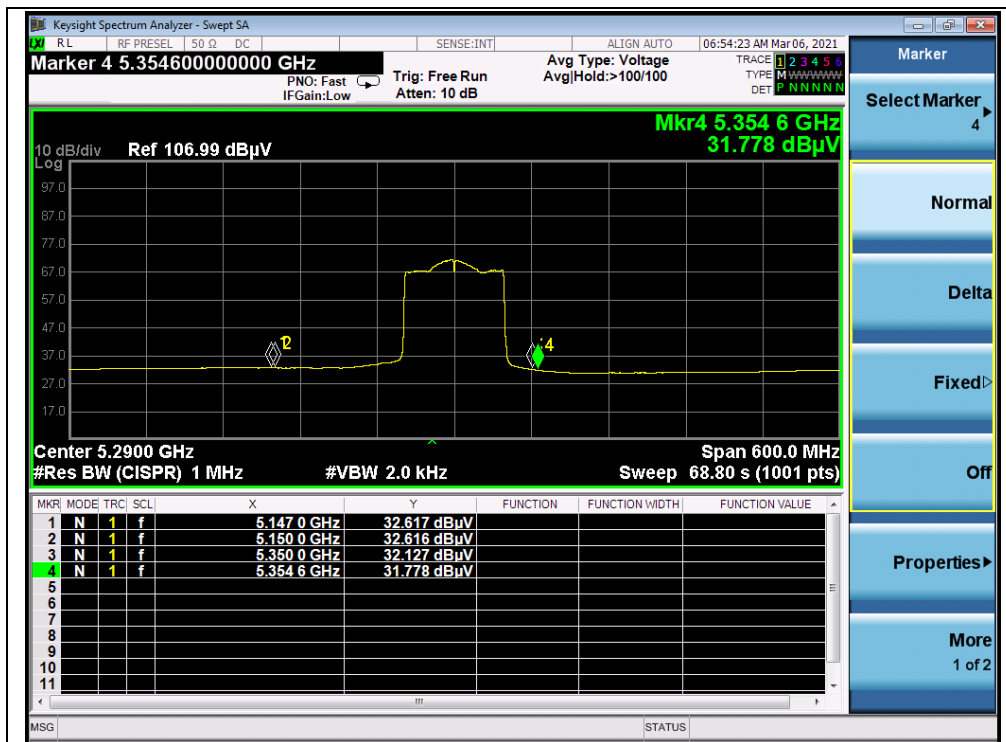


(AVERAGE, Channel 58, 802.11ac (VHT80))

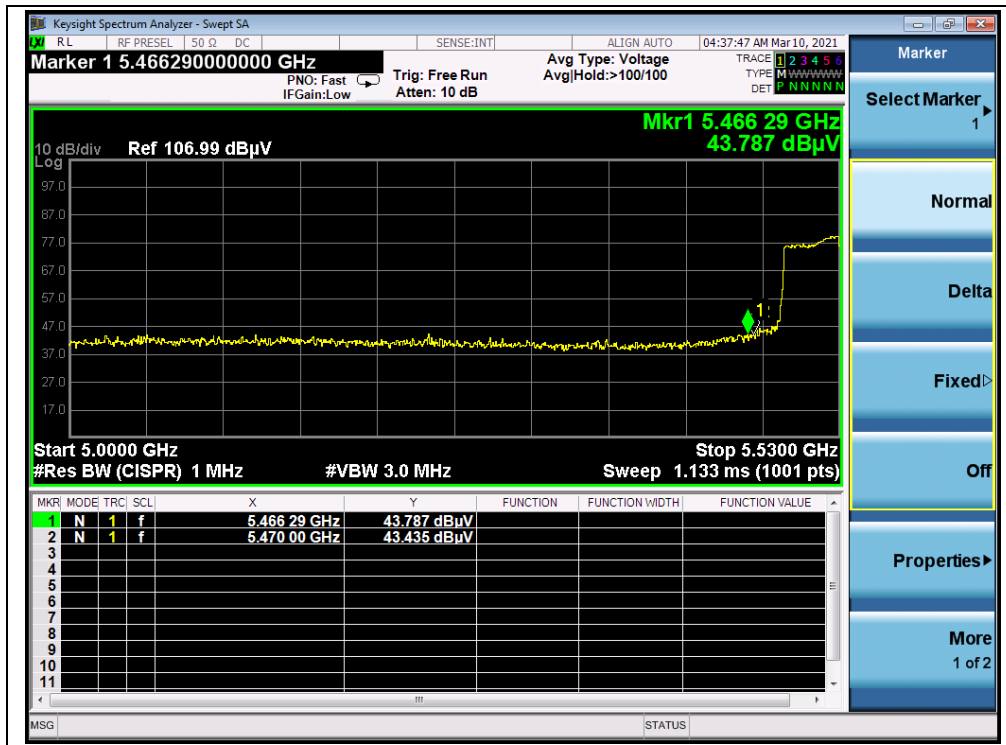


(PEAK, Channel 106, 802.11ac (VHT80))

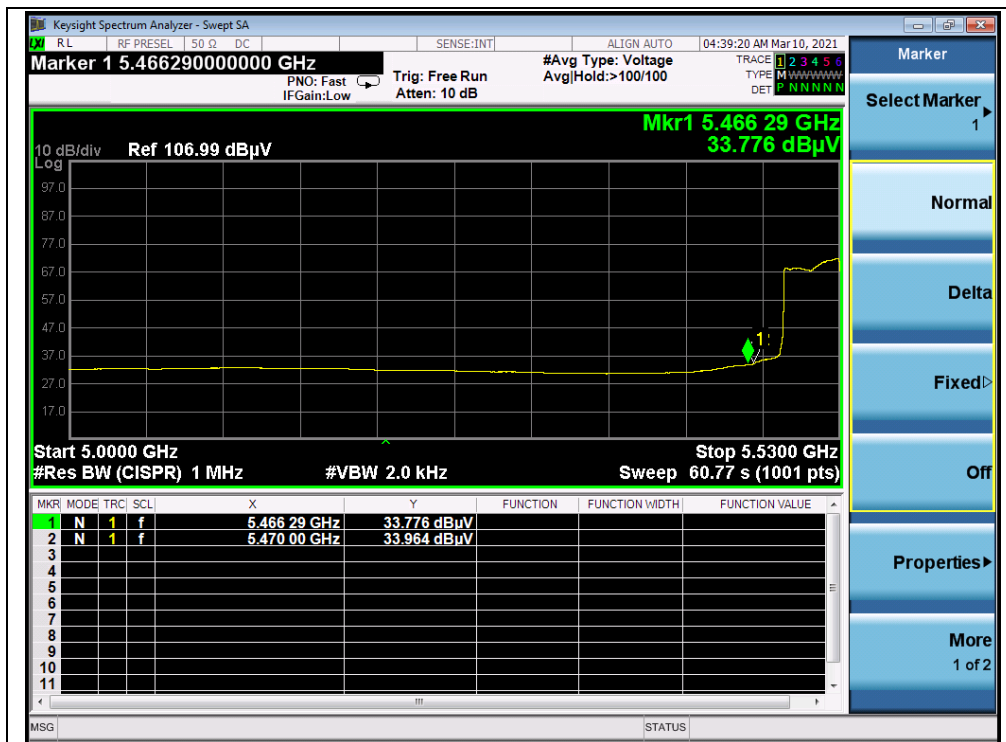


(AVERAGE, Channel 106, 802.11ac (VHT80))

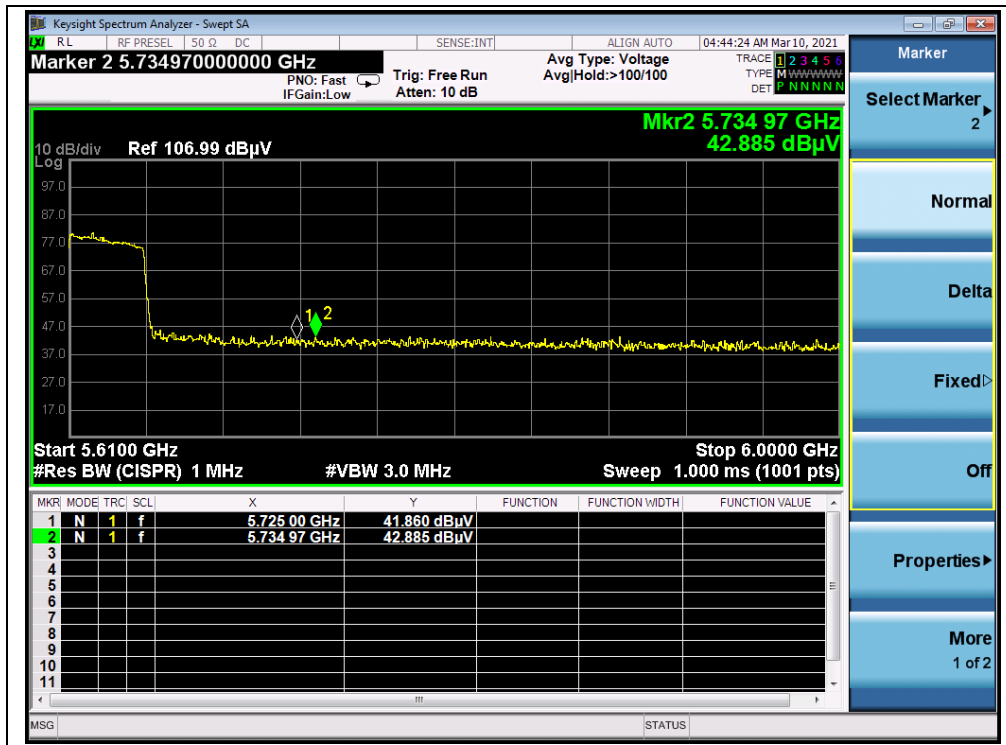

(PEAK, Channel 138, 802.11ac (VHT80))

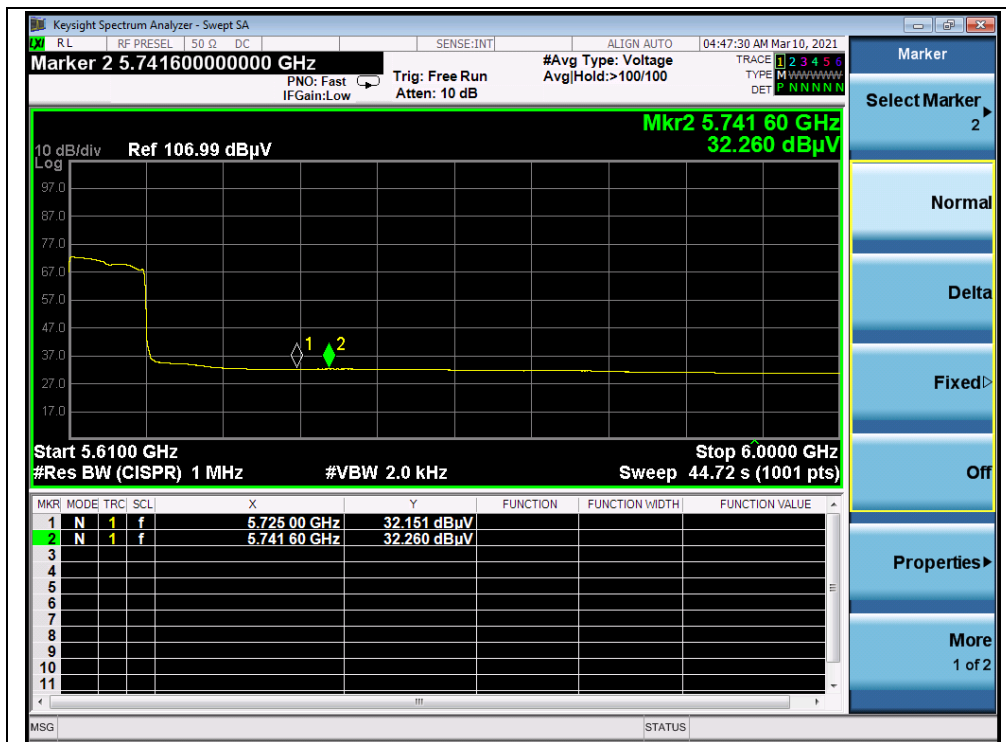

(AVERAGE, Channel 138, 802.11ac (VHT80))

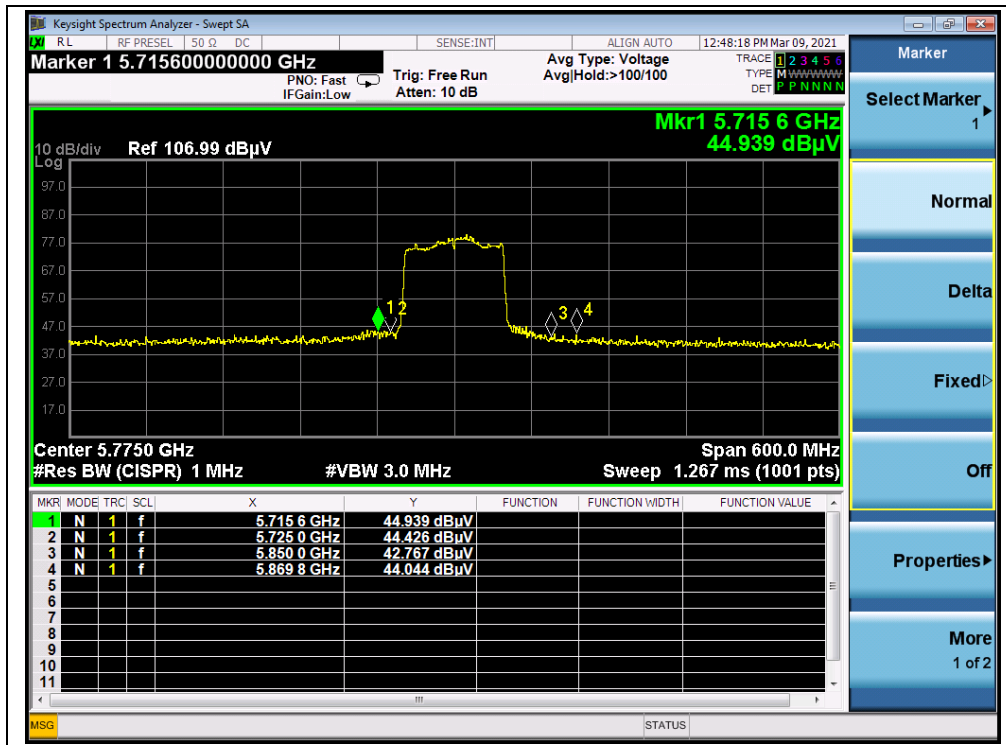

(PEAK, Channel 155, 802.11ac (VHT80))



2.9. Radiated Emission

2.9.1. Requirement

The peak emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (3) For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

The following formula is used to convert the equipment isotropic radiated power(e.i.r.p.) to field strength (dBμV/m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz = 68.23 dBuV/m

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:


Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).


2.9.2. Test Description

Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

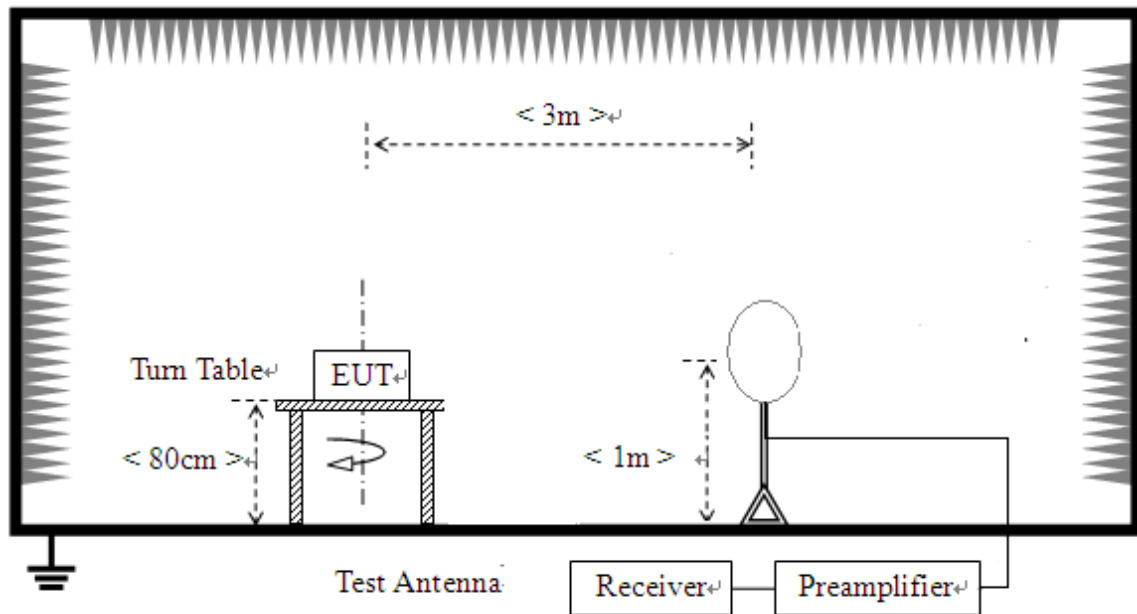

2) For radiated emissions from 30MHz to1GHz

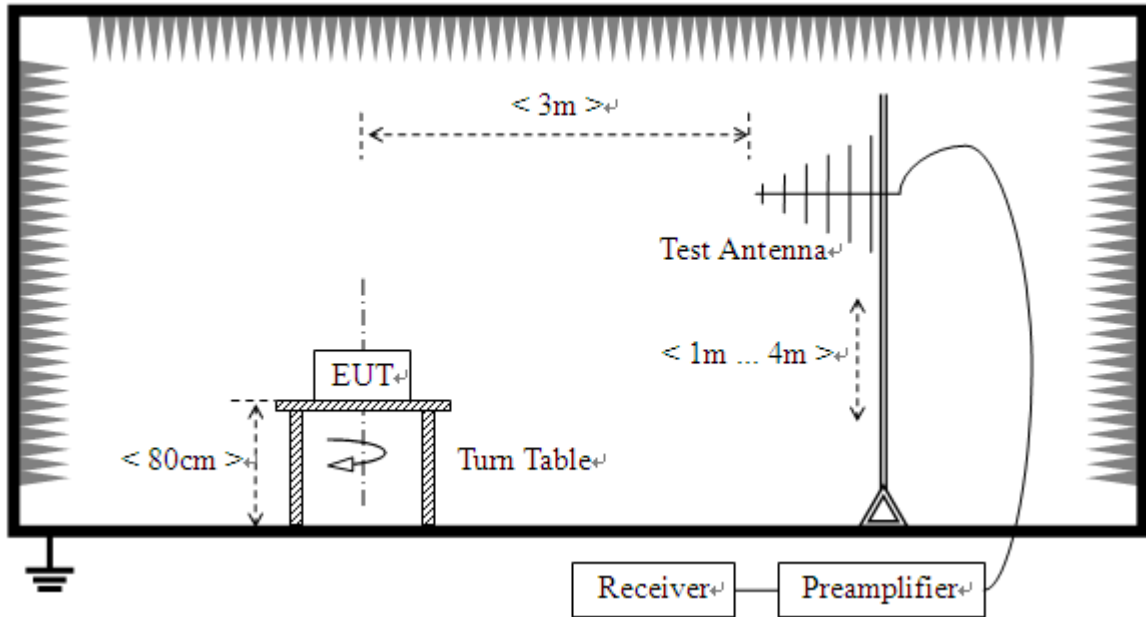

3) For radiated emissions above 1GHz

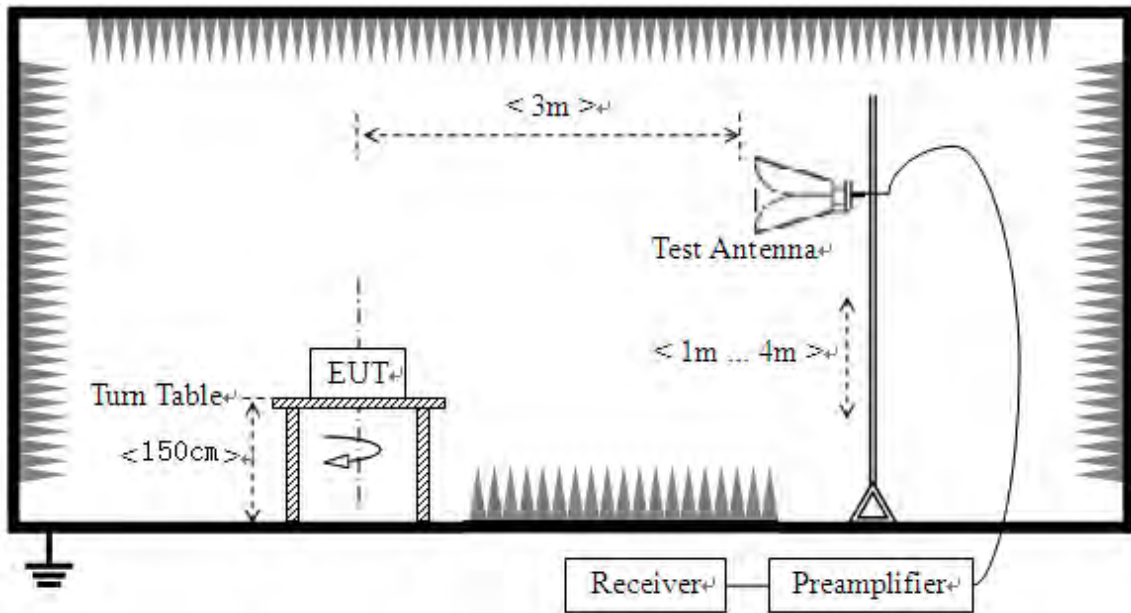

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.



For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

2.9.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform a quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note 1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note 2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


Note 3: For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note 4: All test modes and bandwidth were considered and evaluated respectively by performing full test, only the worst data were recorded for each bandwidth.




802.11a Mode

Plot for Channel 36

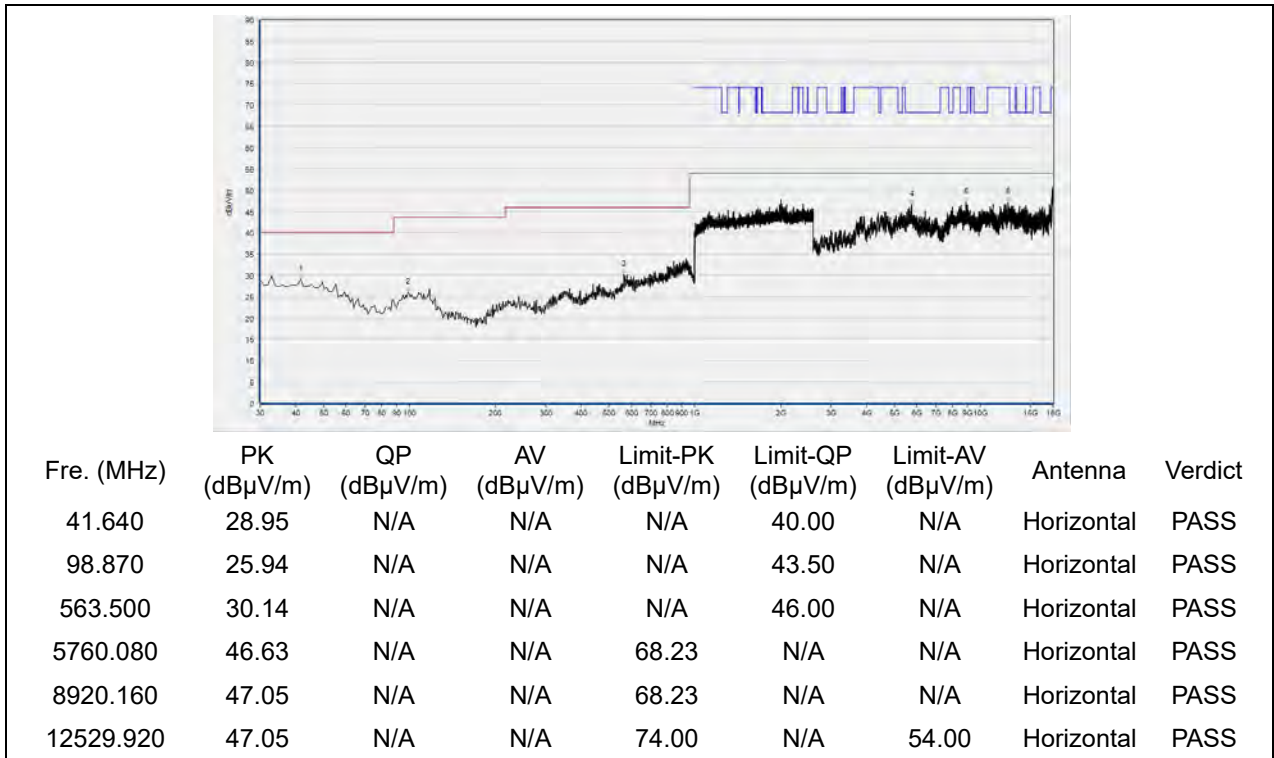


(Antenna Horizontal, 30MHz to 18GHz)

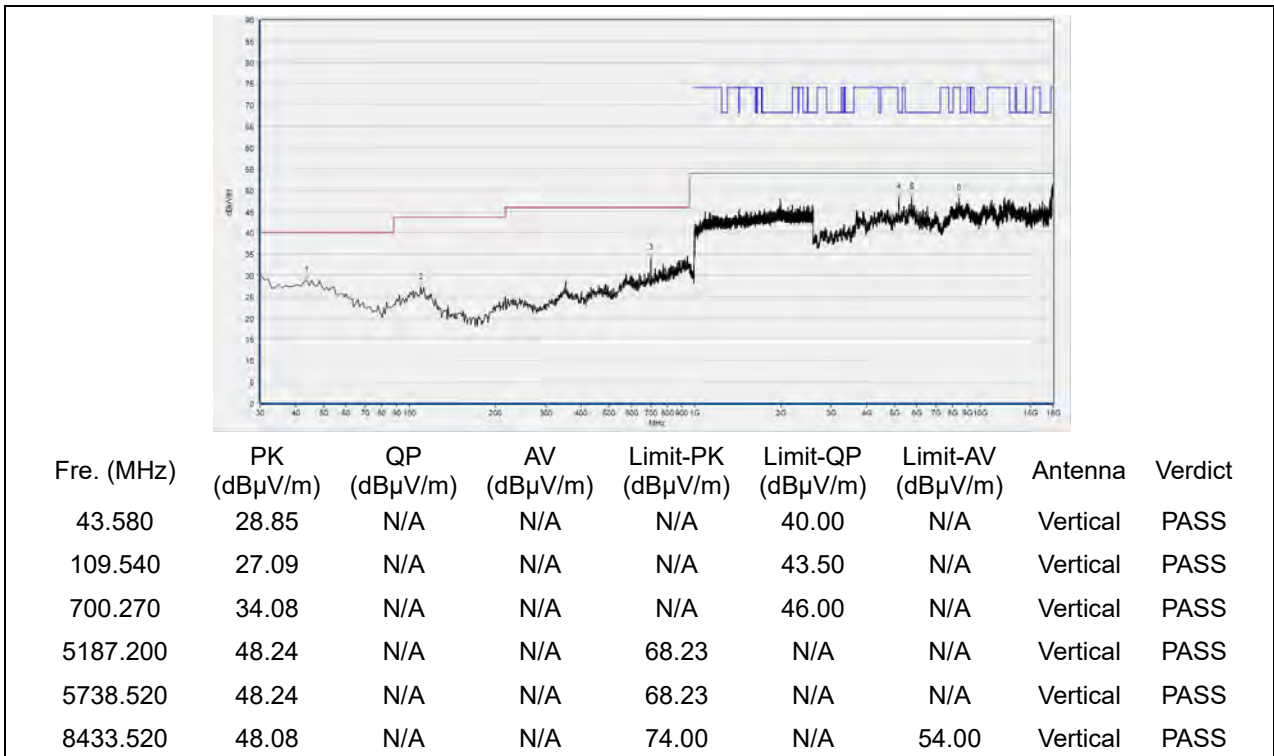


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 44

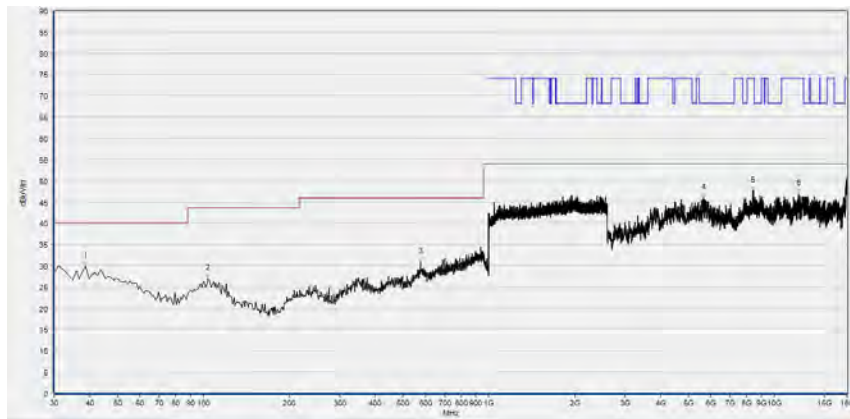

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
38.730	29.89	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
103.720	27.05	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
576.110	30.86	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
5646.120	45.90	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
8411.960	47.67	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12144.920	46.86	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

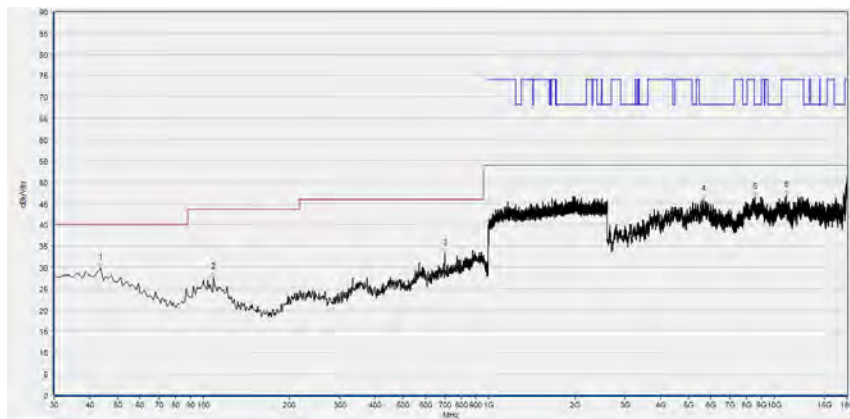

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
43.580	29.88	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
108.570	27.64	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
700.270	33.38	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
5636.880	45.88	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
8544.400	46.39	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11008.400	46.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 48

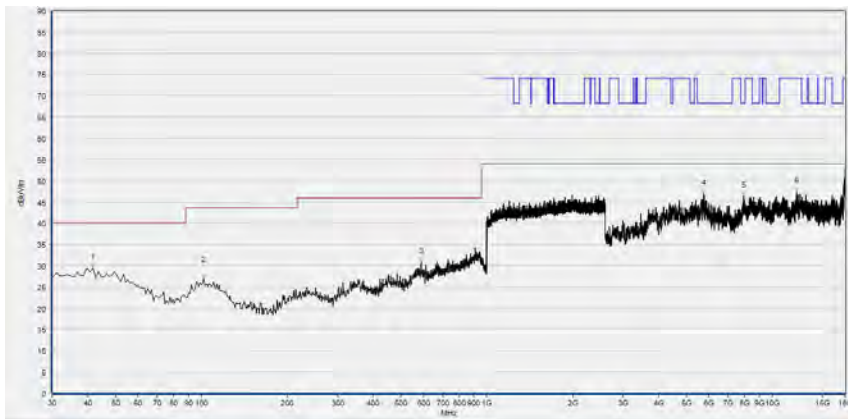

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
41.640	29.56	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
101.780	26.97	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
588.720	30.87	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
5744.680	46.92	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
7943.800	46.44	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12160.320	47.40	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

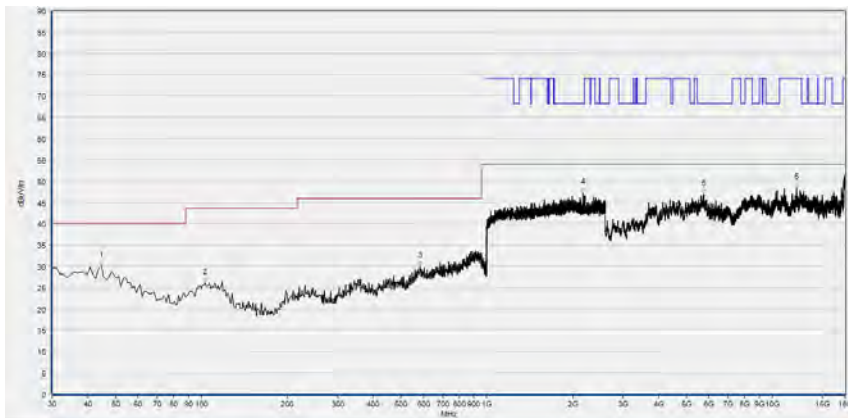


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
44.550	30.21	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
102.750	26.12	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
581.930	30.00	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2170.133	47.25	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5753.920	46.86	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12151.080	48.39	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 52

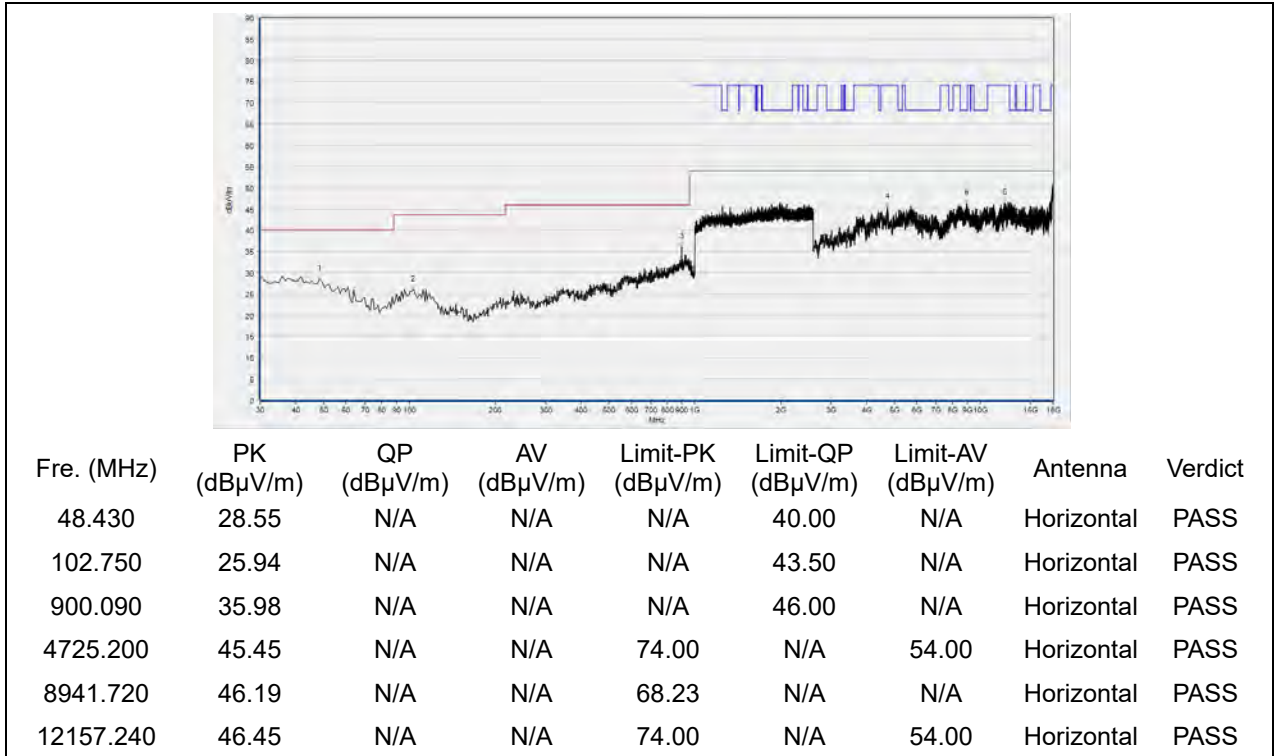


(Antenna Horizontal, 30MHz to 18GHz)

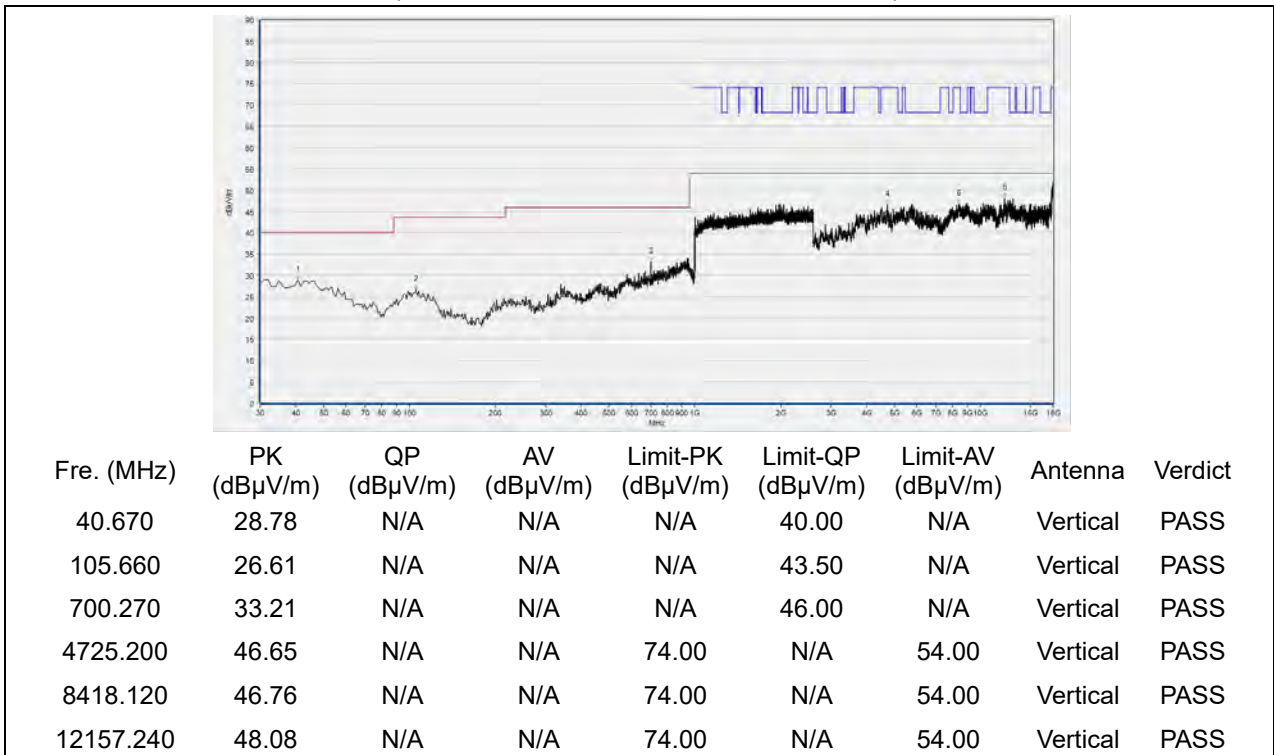


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 60

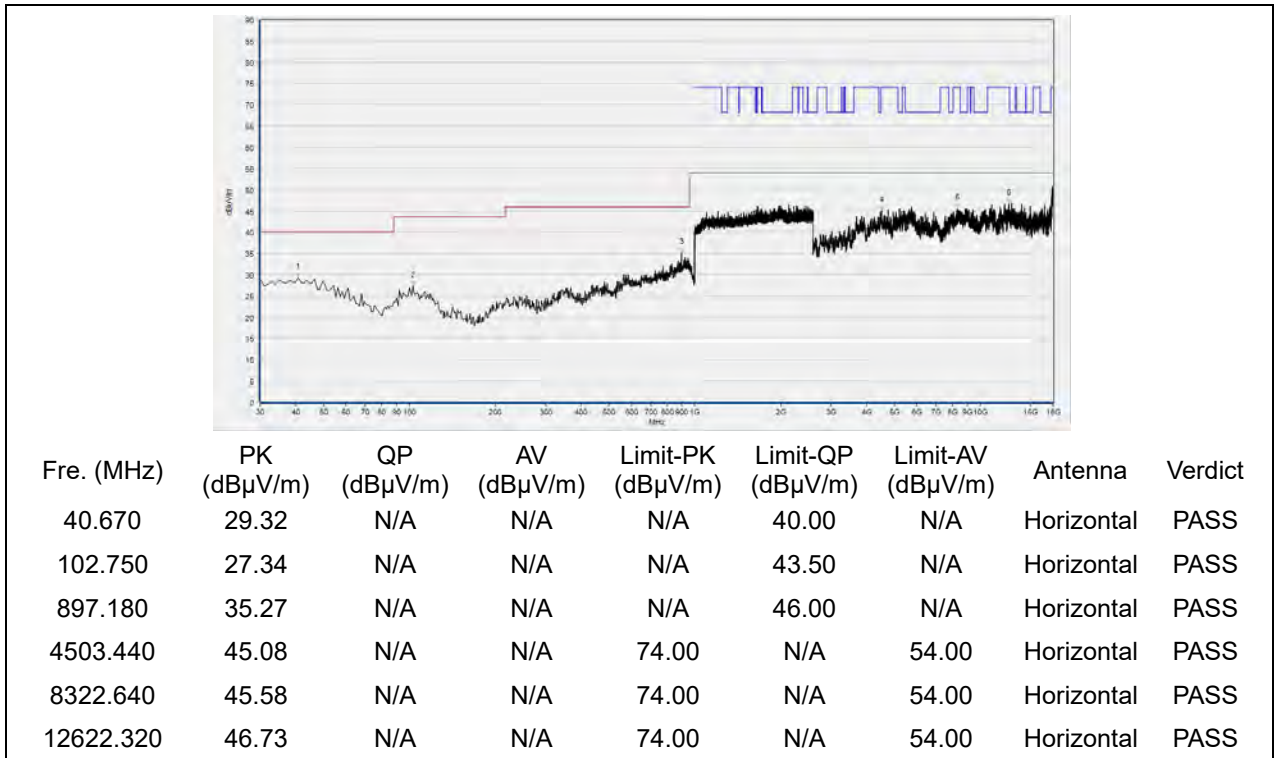


(Antenna Horizontal, 30MHz to 18GHz)

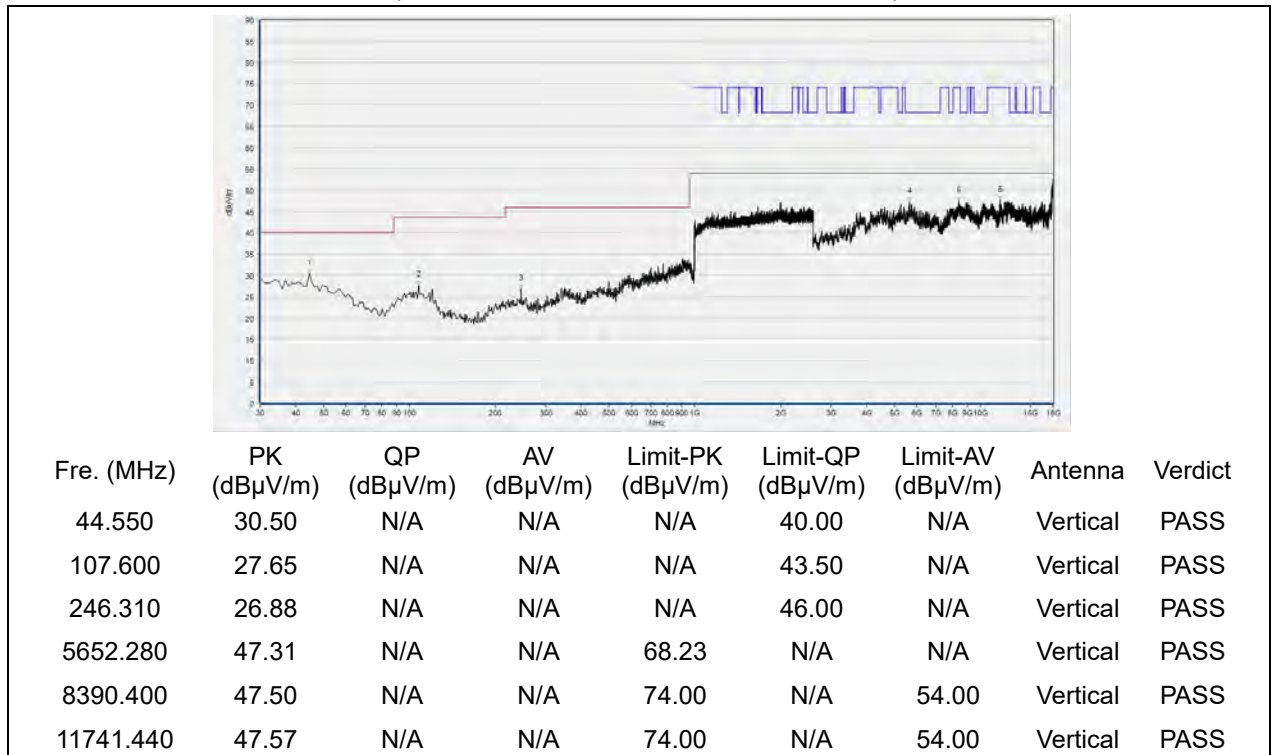


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 64

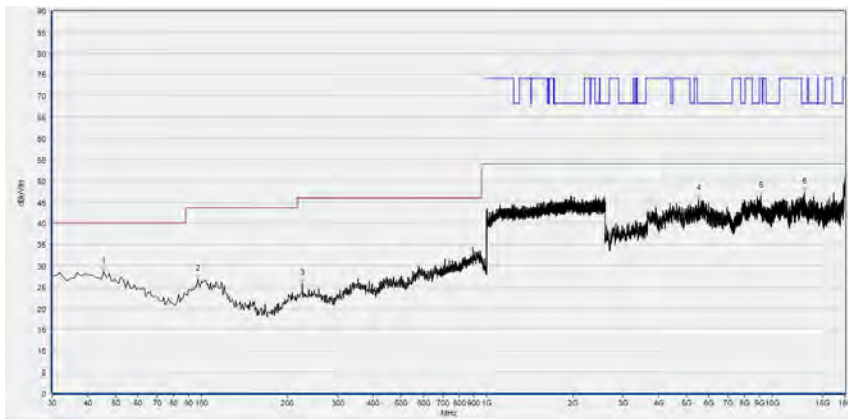

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
45.520	28.64	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
96.930	26.79	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
225.940	25.84	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
5519.840	45.68	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
9101.880	46.38	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12930.320	47.23	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

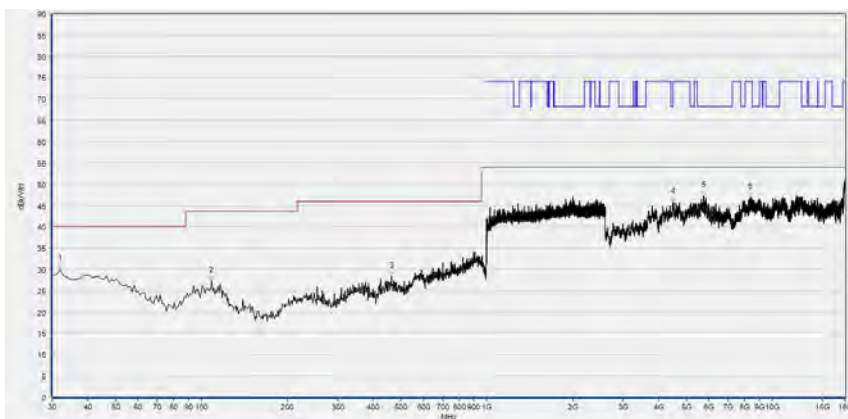


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
31.940	29.98	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
108.570	27.25	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
463.590	28.39	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
4491.120	45.73	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5763.160	47.18	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
8365.760	46.89	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 100

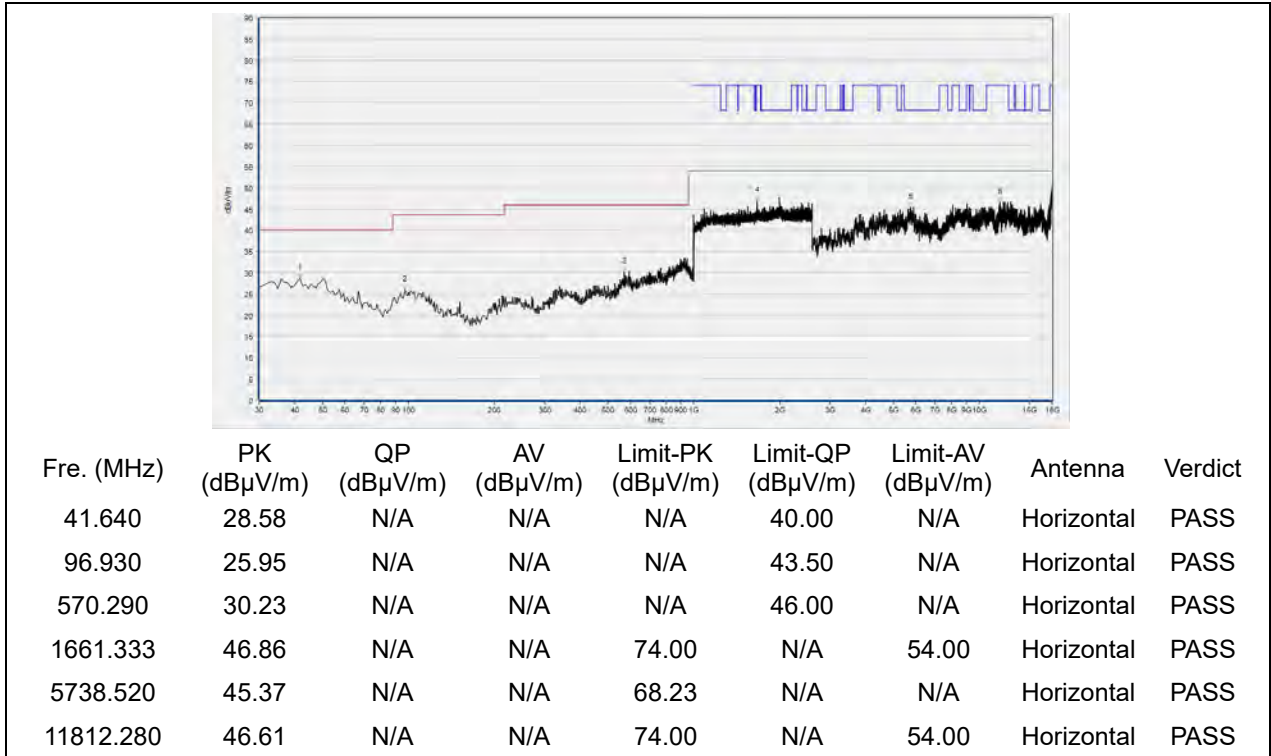


(Antenna Horizontal, 30MHz to 18GHz)

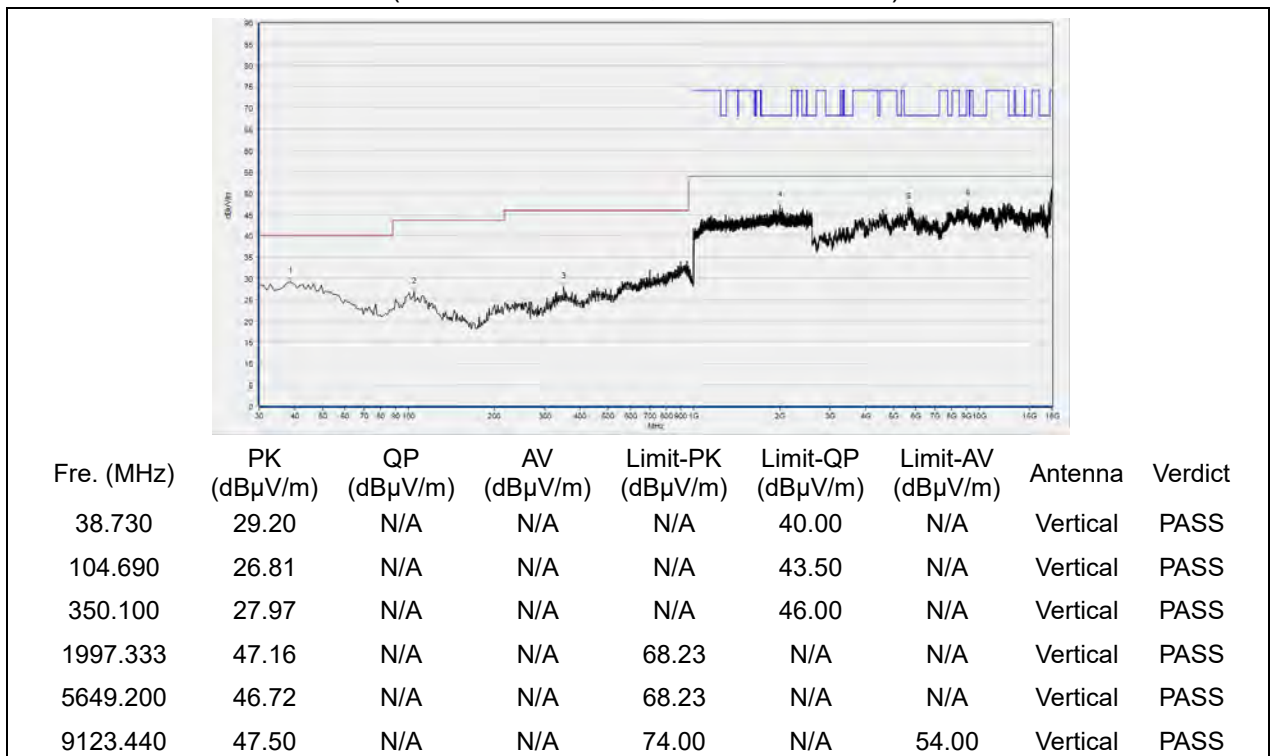


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 120

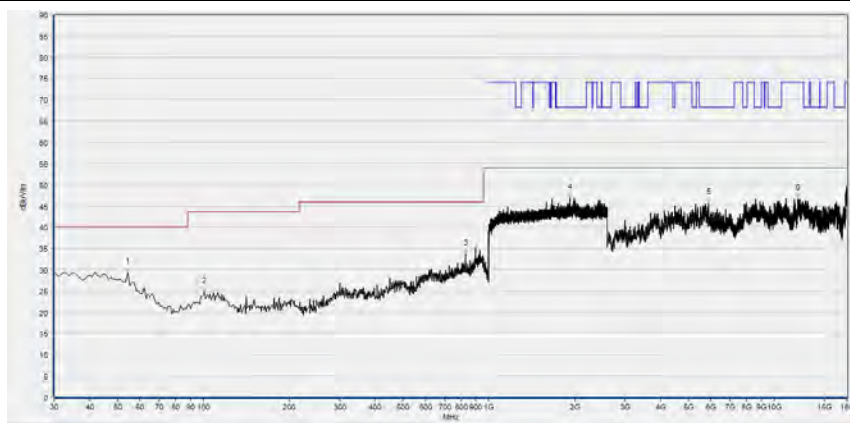

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
54.250	29.28	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
100.810	24.80	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
827.340	33.72	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1920.000	46.93	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5870.960	45.82	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12120.280	46.68	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

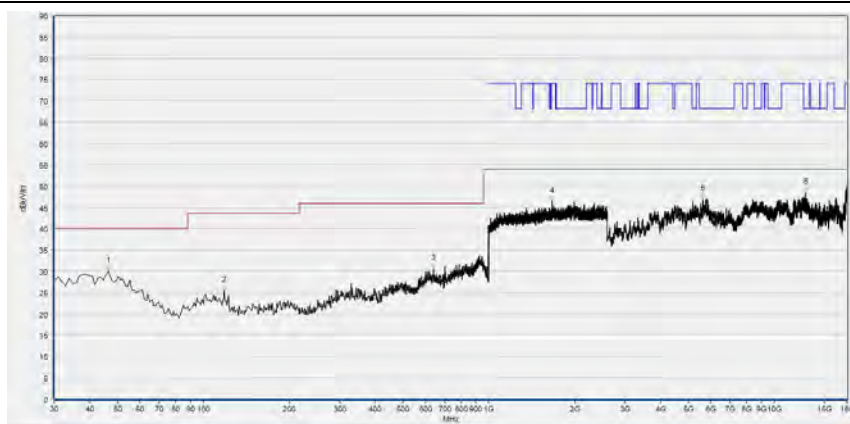


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
46.490	29.98	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
118.270	25.47	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
639.160	30.47	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1662.400	46.39	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5633.800	46.99	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12887.200	48.44	N/A	N/A	68.23	N/A	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 144

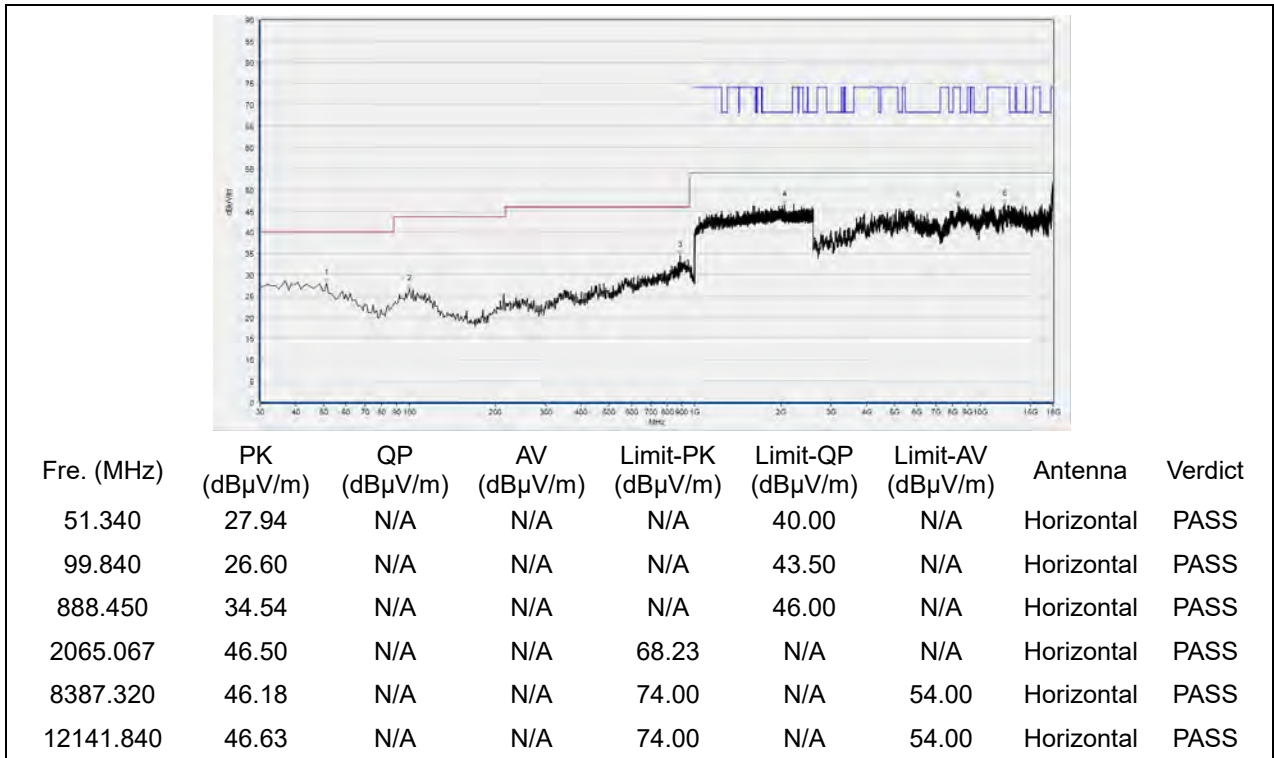


(Antenna Horizontal, 30MHz to 18GHz)

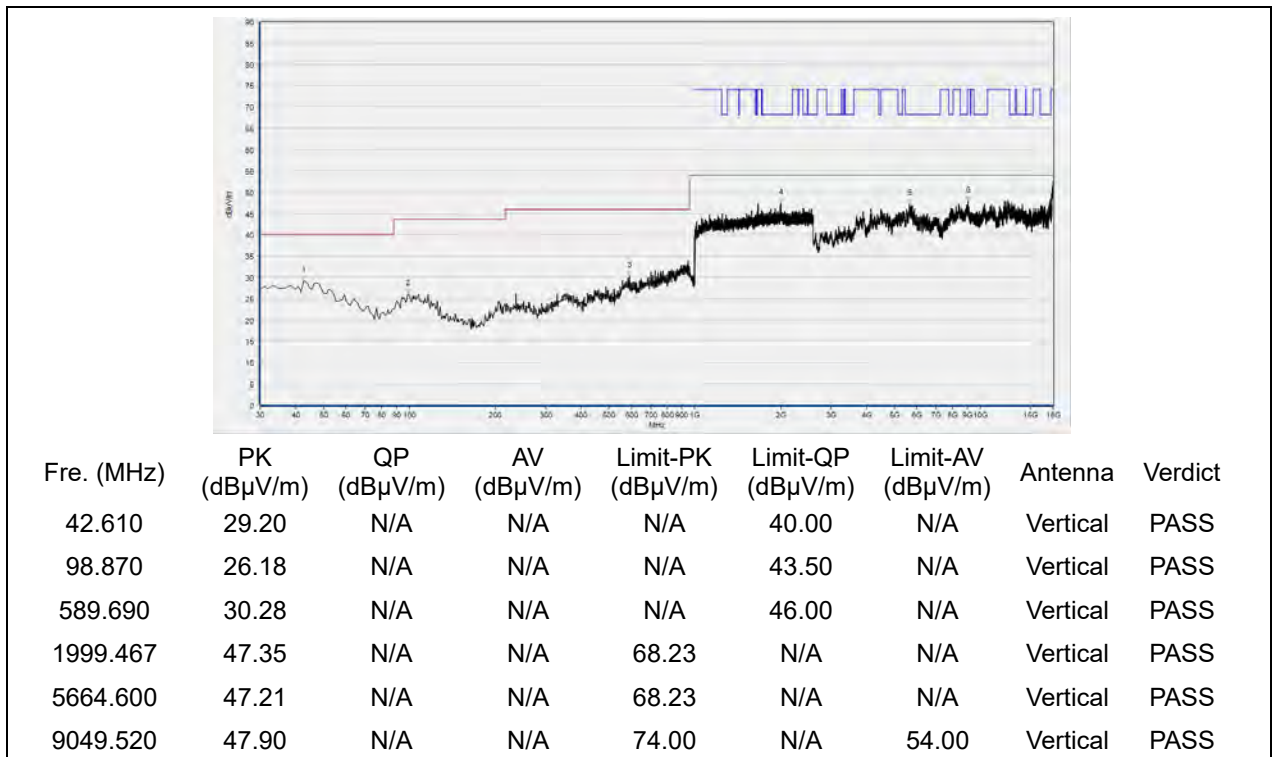


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 149

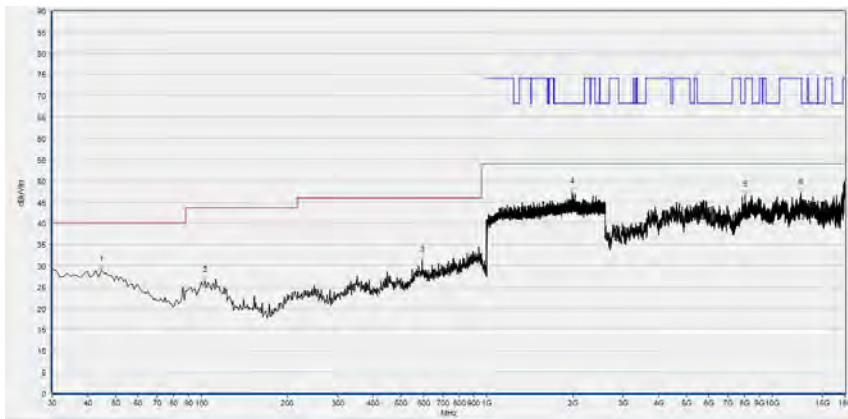

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
44.550	28.99	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
102.750	26.41	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
592.600	31.13	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1995.200	47.31	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
8051.600	46.56	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12603.840	47.10	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

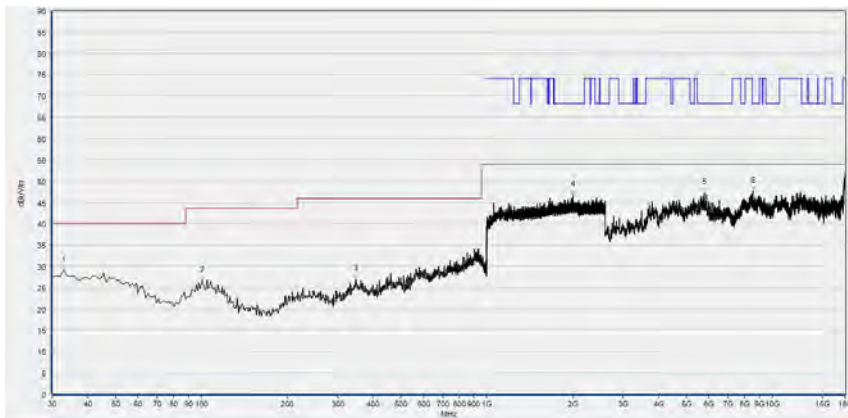


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
32.910	28.96	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
100.810	26.60	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
347.190	27.00	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1997.867	46.80	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5772.400	47.28	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
8553.640	47.52	N/A	N/A	68.23	N/A	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 157

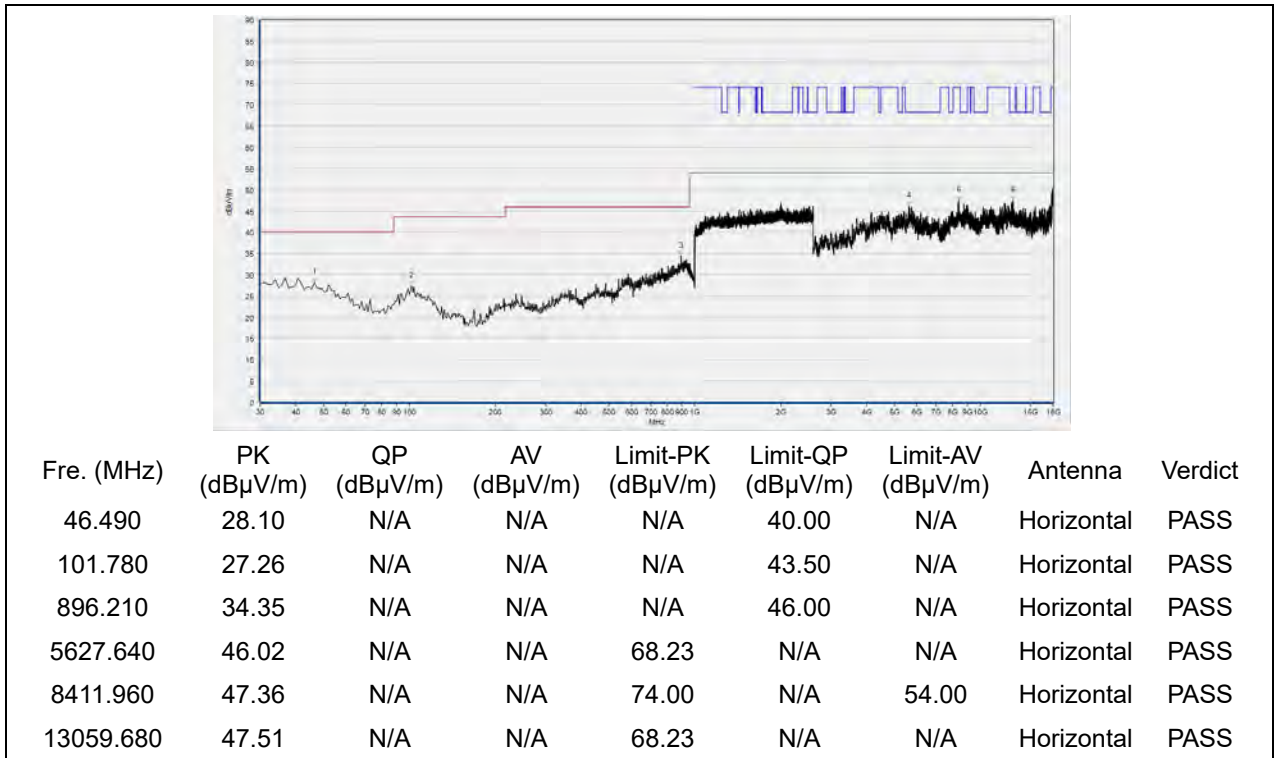


(Antenna Horizontal, 30MHz to 18GHz)

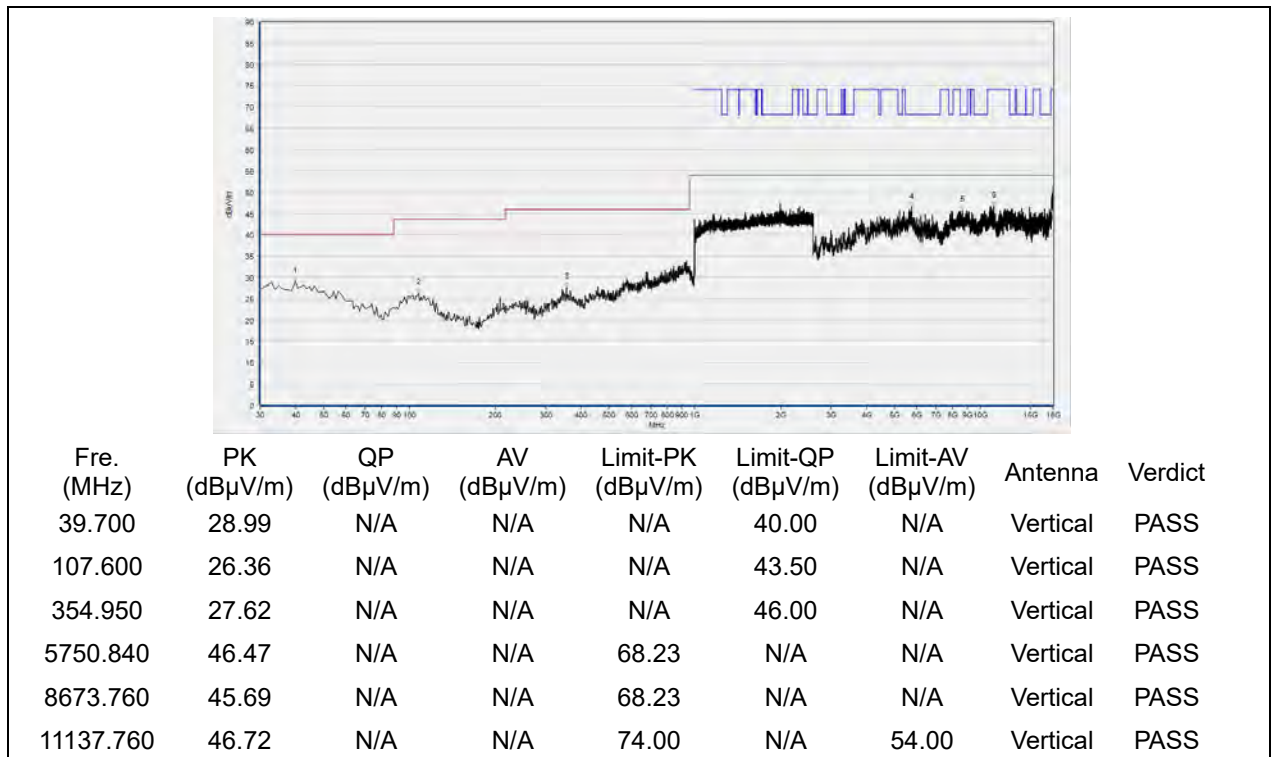


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 165

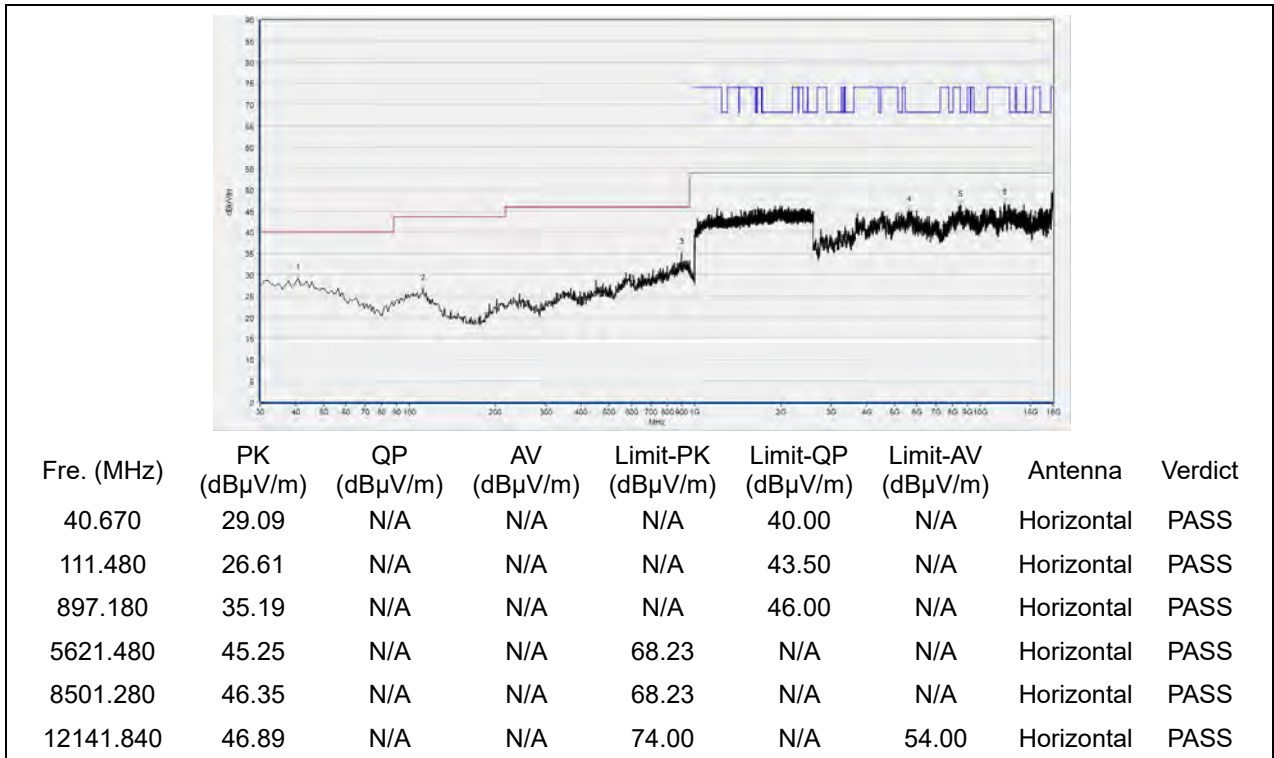

(Antenna Horizontal, 30MHz to 18GHz)

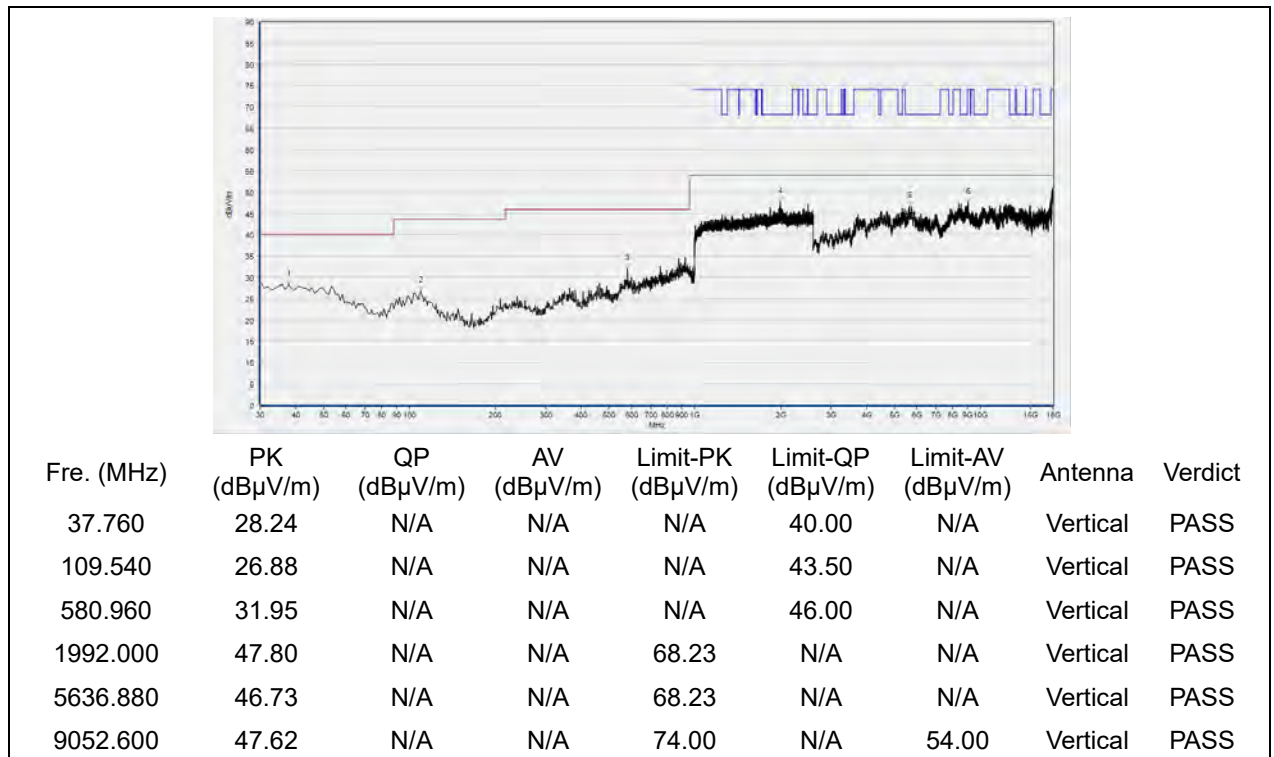


(Antenna Vertical, 30MHz to 18GHz)




802.11n (HT40) mode

Plot for Channel 38

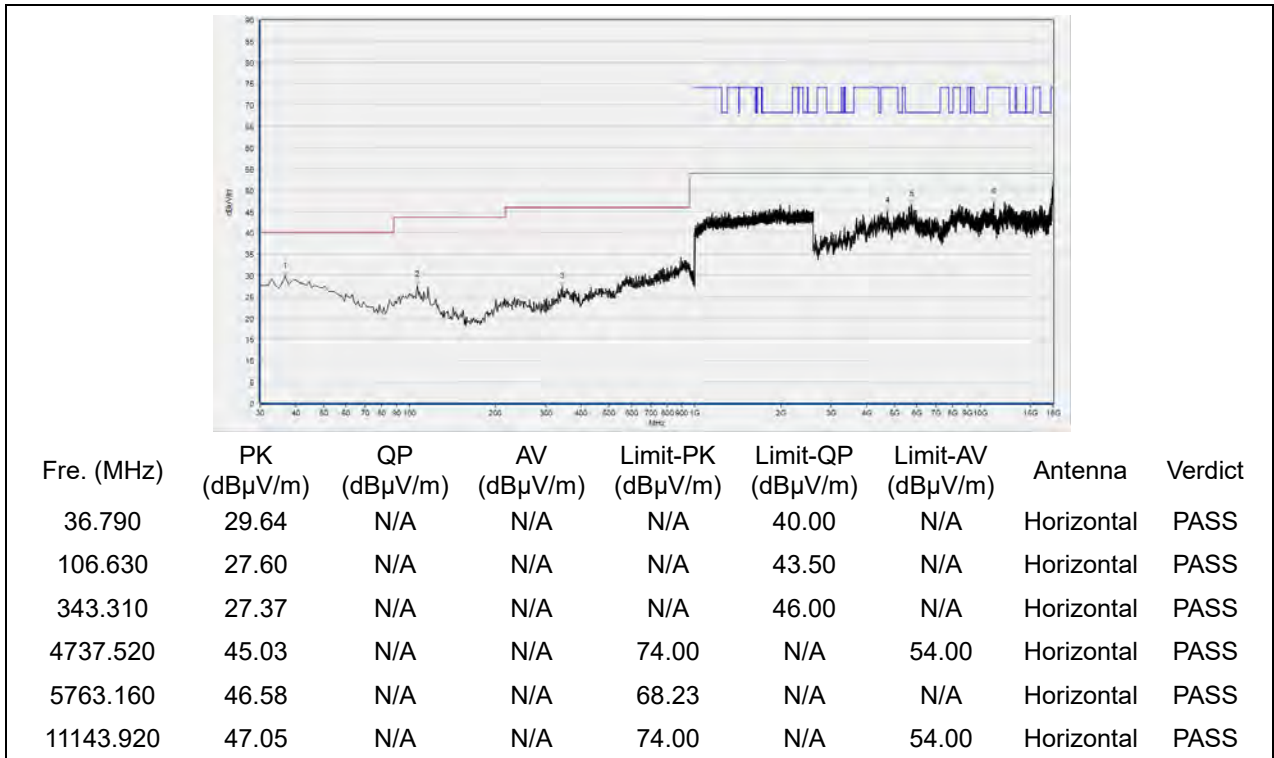


(Antenna Horizontal, 30MHz to 18GHz)

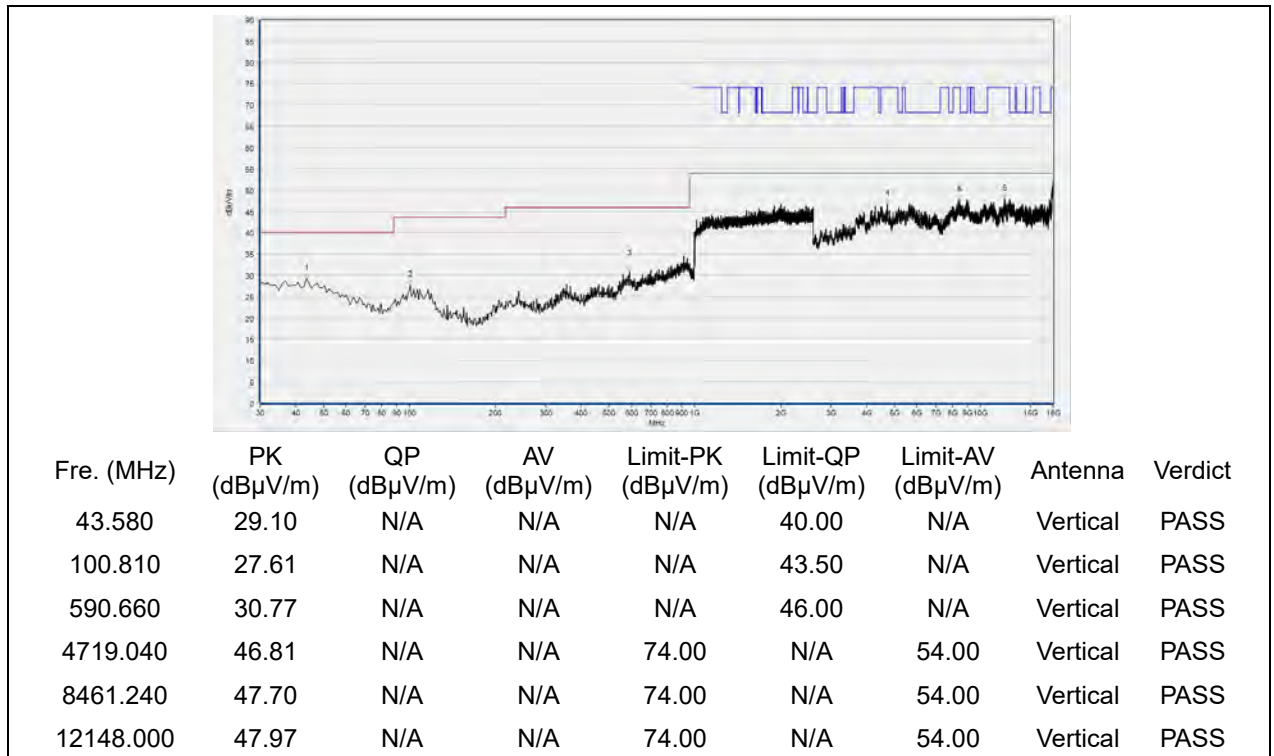


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 46

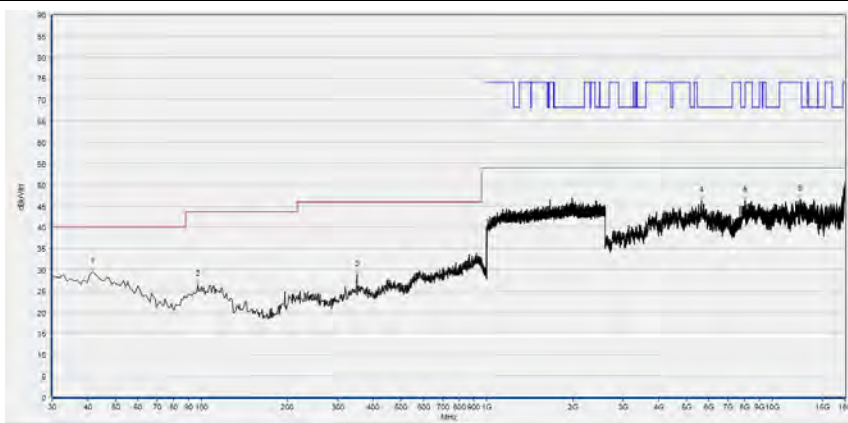

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
41.640	29.54	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
96.930	26.44	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
351.070	28.81	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
5646.120	46.32	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
8011.560	46.30	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12514.520	46.53	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

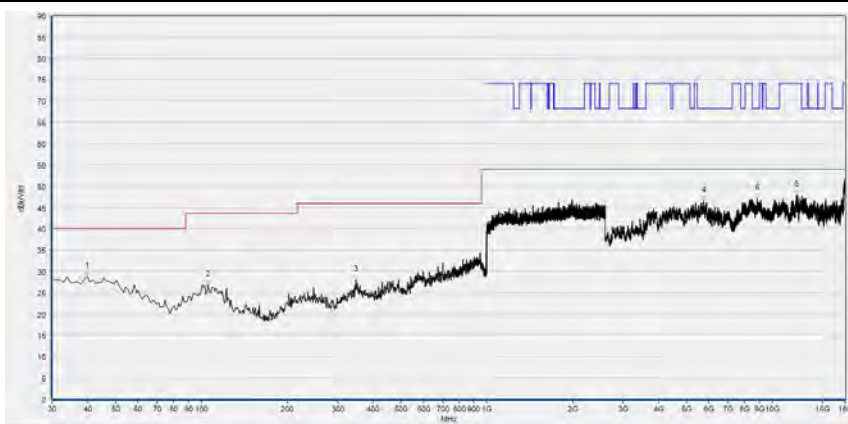


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
39.700	28.90	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
105.660	26.75	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
348.160	27.98	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
5741.600	46.57	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
8849.320	47.18	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12191.120	47.90	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 54

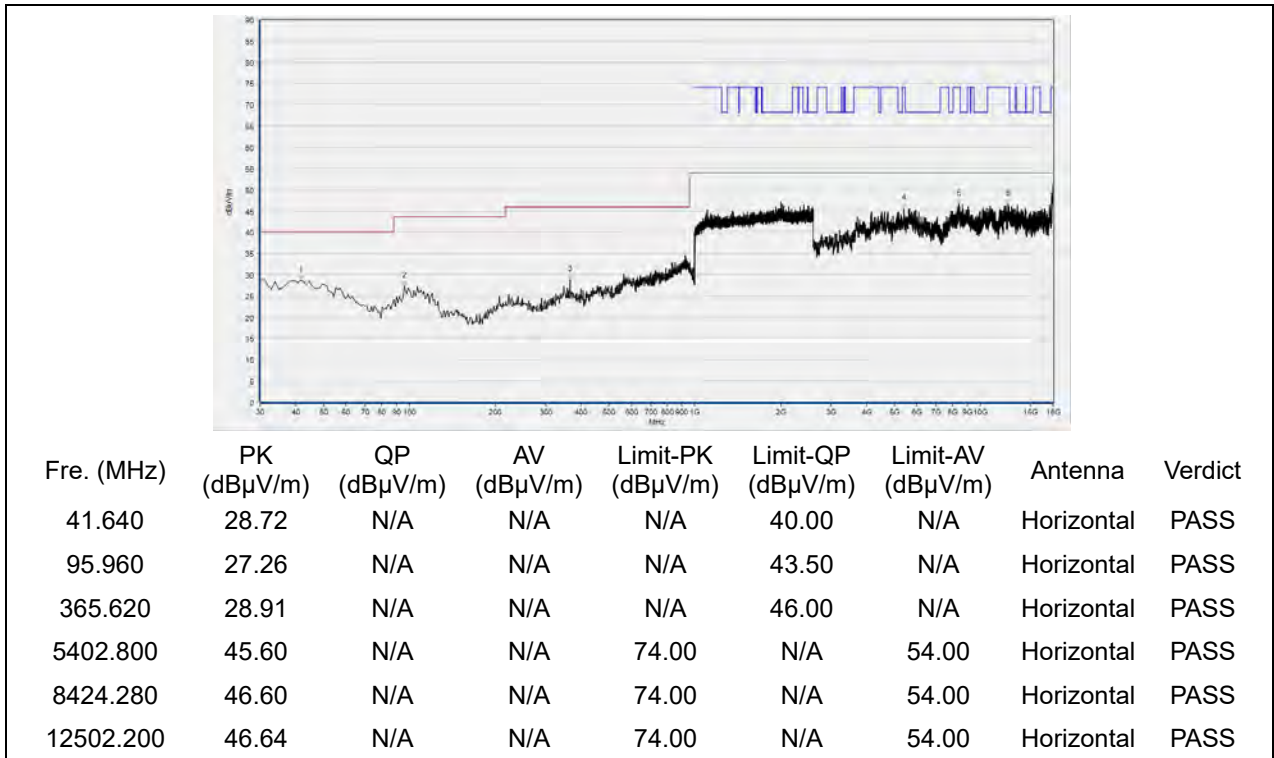


(Antenna Horizontal, 30MHz to 18GHz)

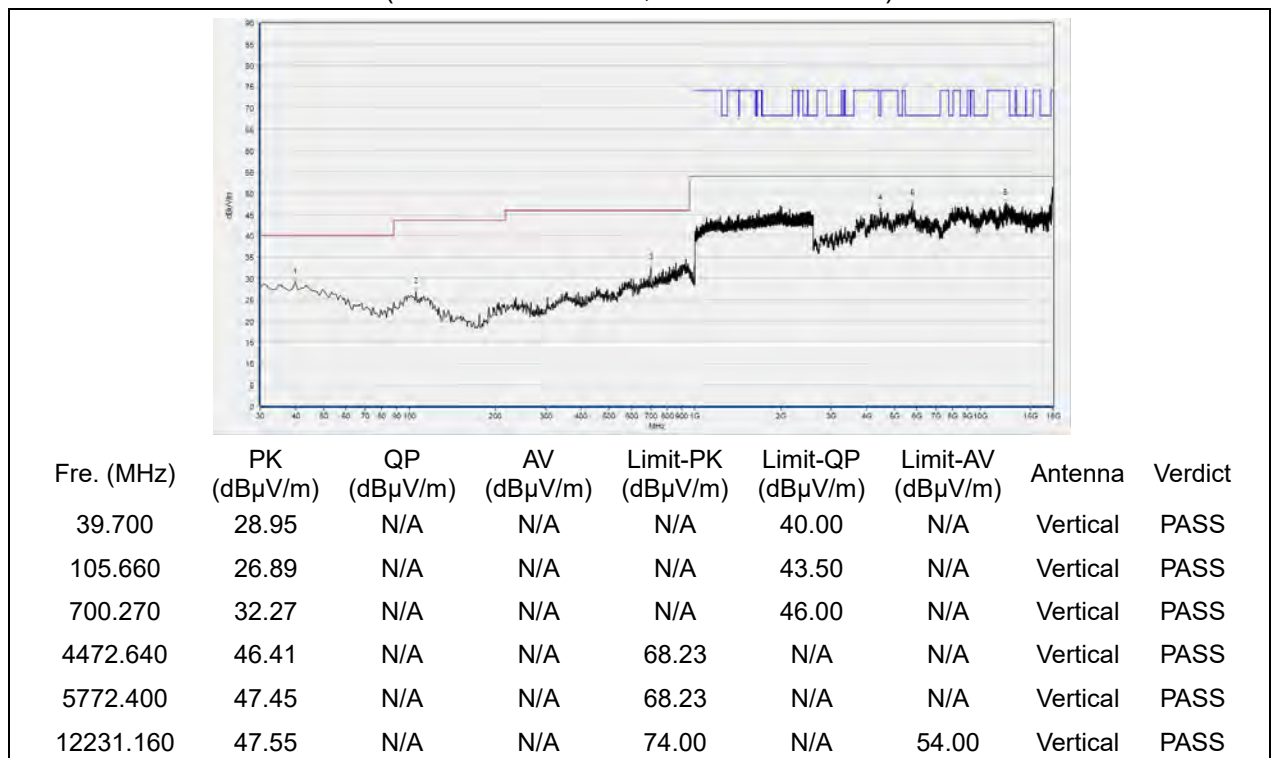


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 62

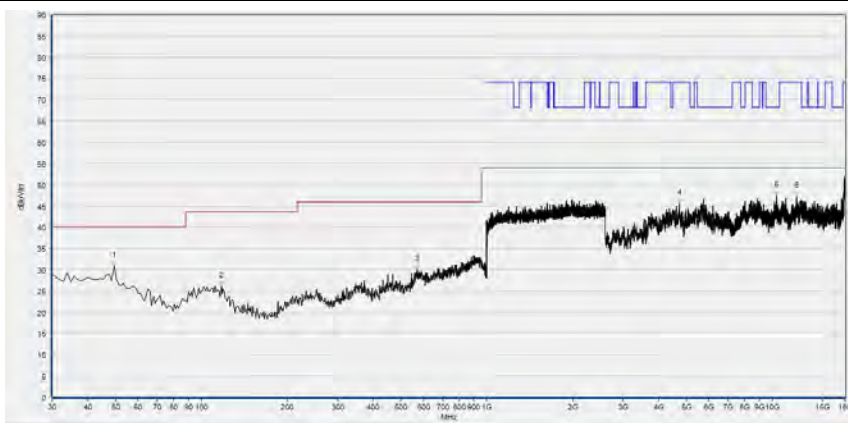

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
49.400	30.78	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
117.300	26.08	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
569.320	30.08	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
4725.200	45.57	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10370.840	47.43	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12166.480	47.30	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

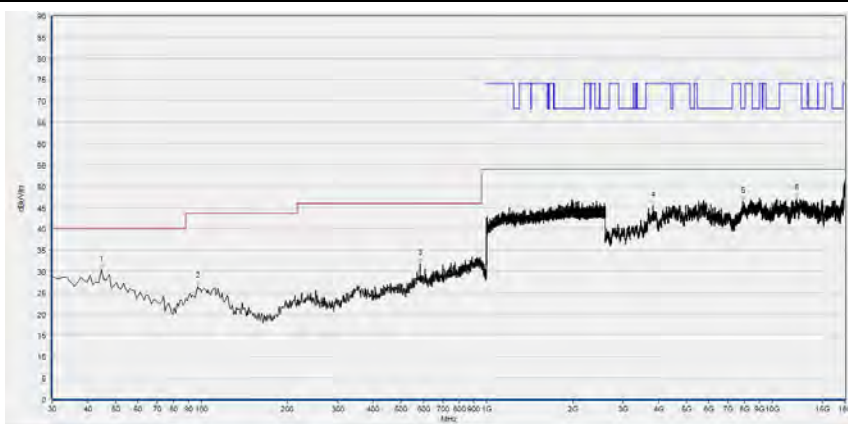


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
44.550	30.35	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
96.930	26.46	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
583.870	31.77	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
3822.760	45.42	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7872.960	46.37	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12175.720	47.13	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 102

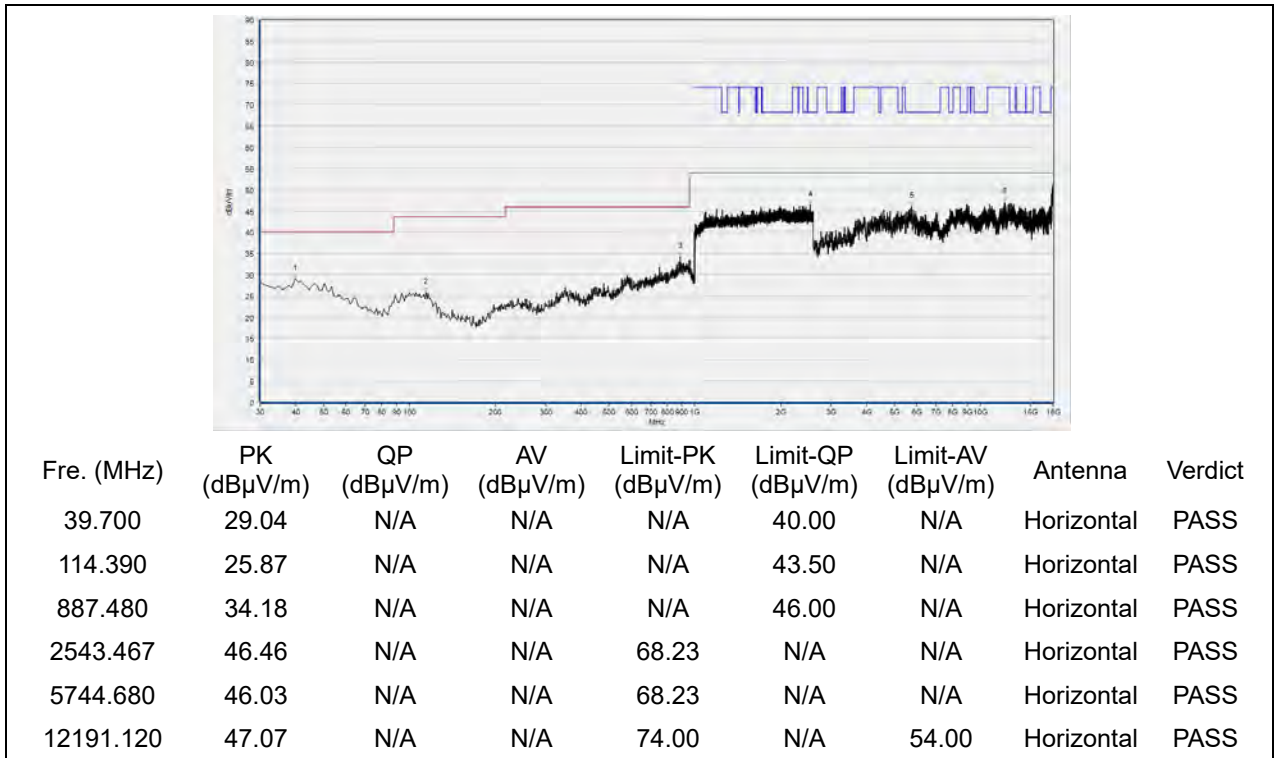


(Antenna Horizontal, 30MHz to 18GHz)

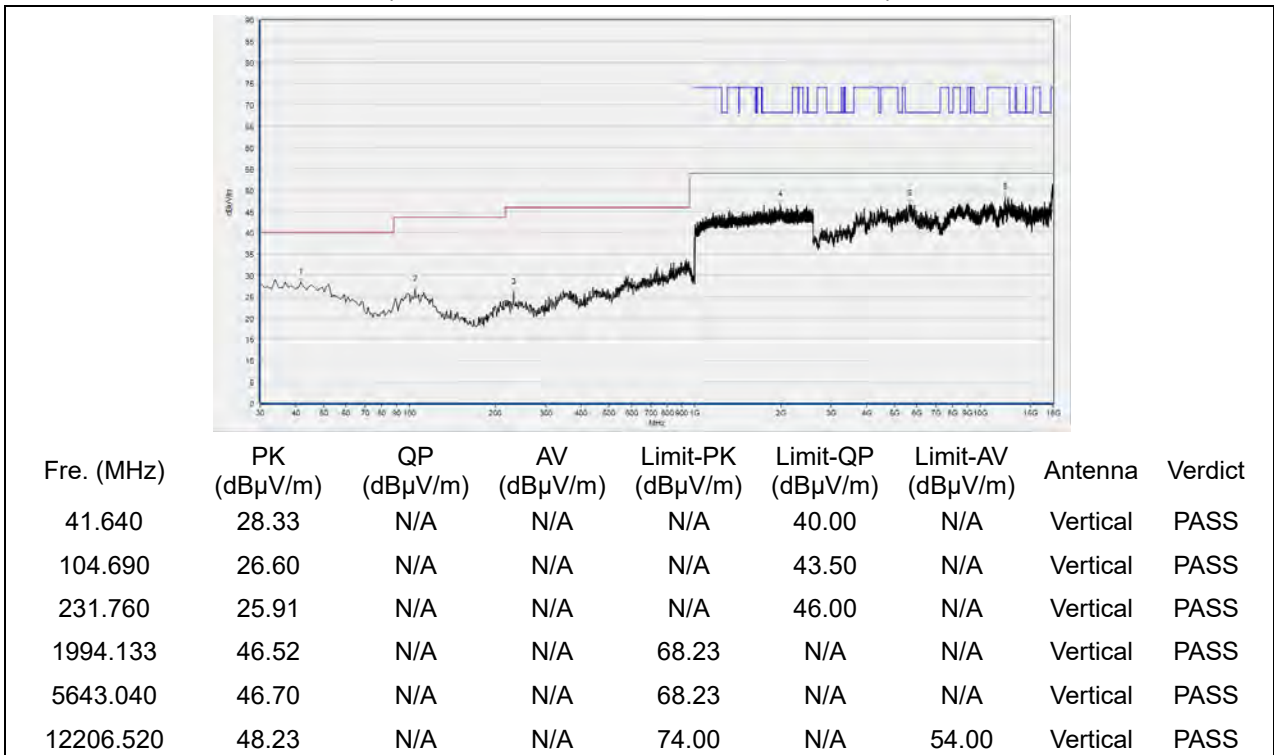


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 126

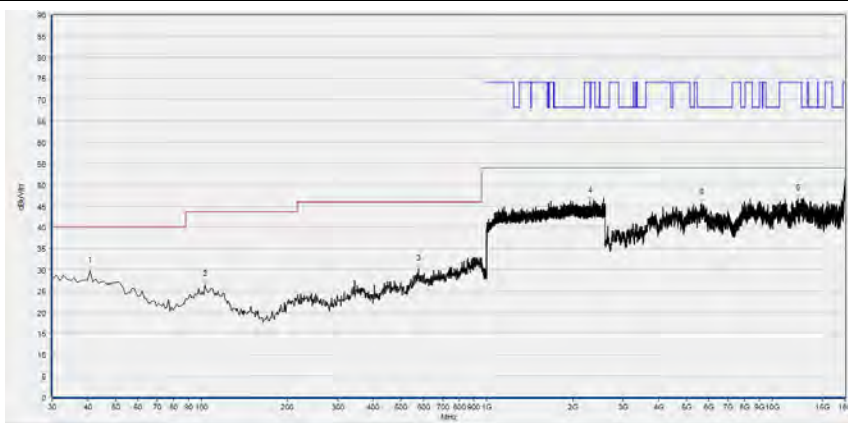

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
40.670	29.74	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
102.750	26.42	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
576.110	30.20	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2302.933	46.11	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5652.280	45.62	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12298.920	46.73	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

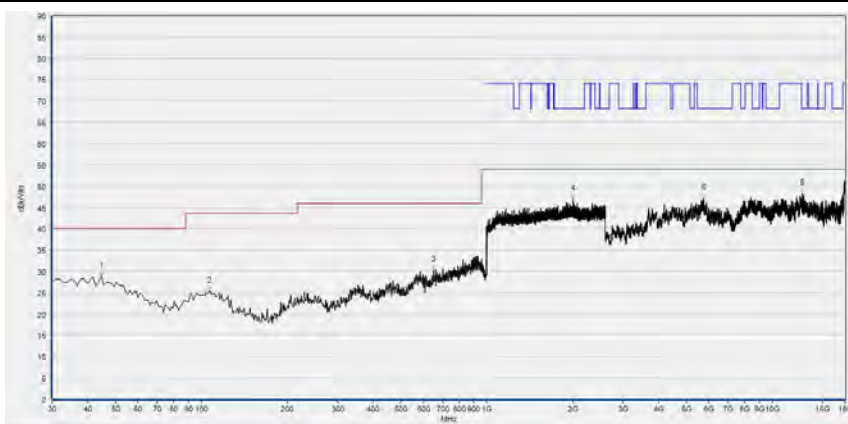

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
44.550	28.87	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
106.630	25.38	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
650.800	30.39	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1999.467	46.89	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5757.000	47.09	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12730.120	48.33	N/A	N/A	68.23	N/A	N/A	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 142

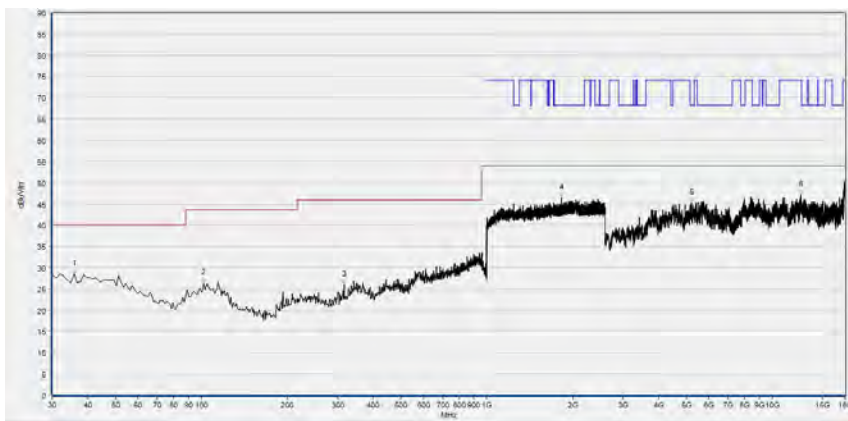

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
35.820	28.44	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
101.780	26.37	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
316.150	25.96	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1830.400	46.37	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5211.840	45.20	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12588.440	47.07	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

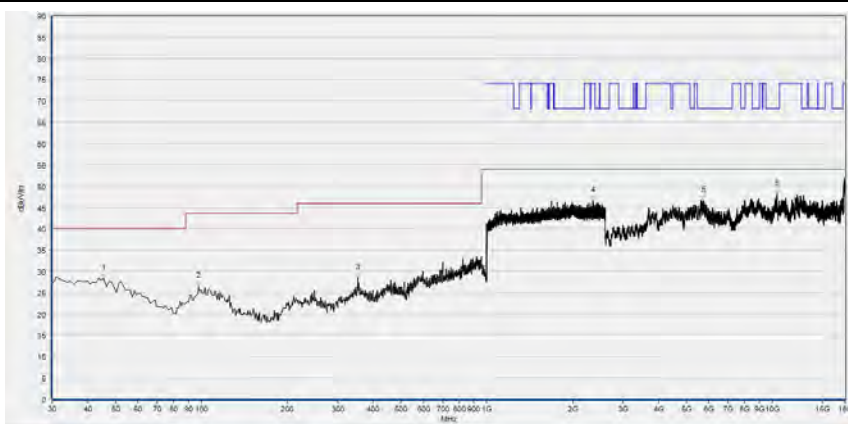

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
45.520	28.34	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
97.900	26.51	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
353.010	28.44	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2360.000	46.67	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5744.680	46.59	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
10383.160	48.12	N/A	N/A	68.23	N/A	N/A	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 151

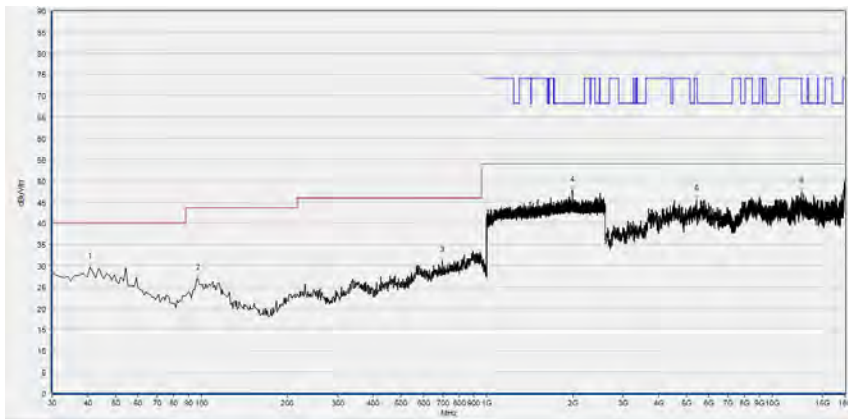

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
40.670	29.62	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
96.930	26.95	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
699.300	31.19	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1995.733	47.71	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5436.680	45.67	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12683.920	47.37	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

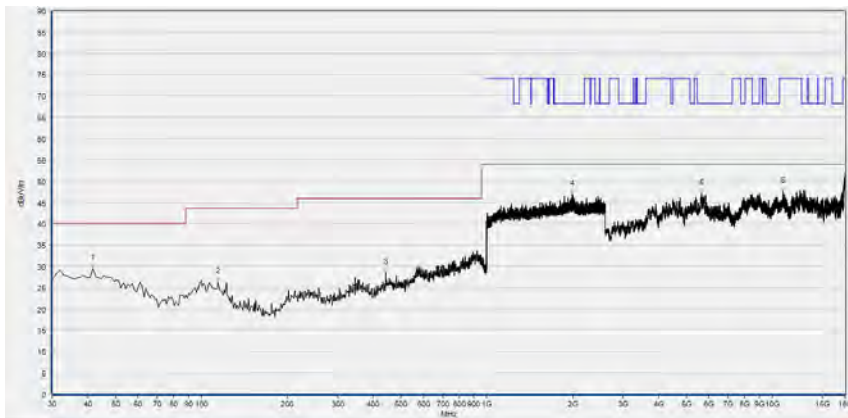


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
41.640	29.57	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
114.390	26.31	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
442.250	28.56	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1996.267	46.84	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5652.280	47.13	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
10909.840	47.54	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 159

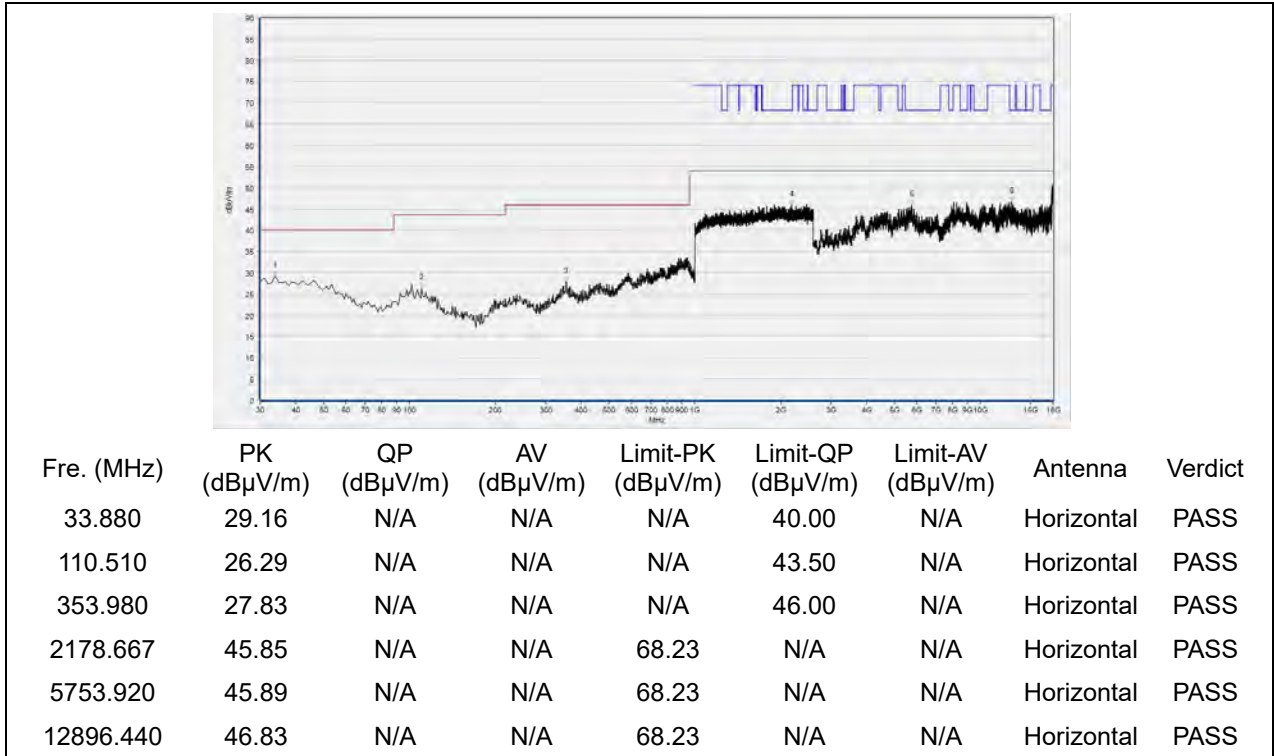

(Antenna Horizontal, 30MHz to 18GHz)

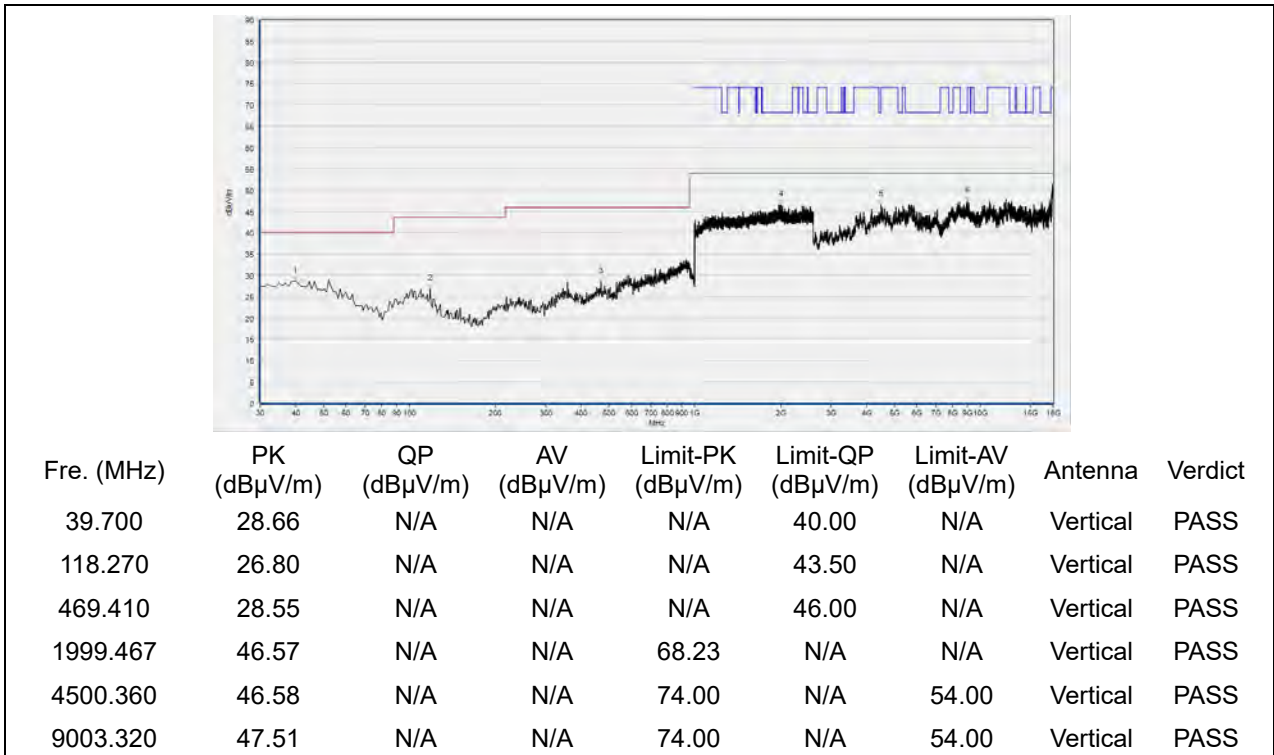


(Antenna Vertical, 30MHz to 18GHz)




802.11ac (VHT80) Mode

Plot for Channel 42

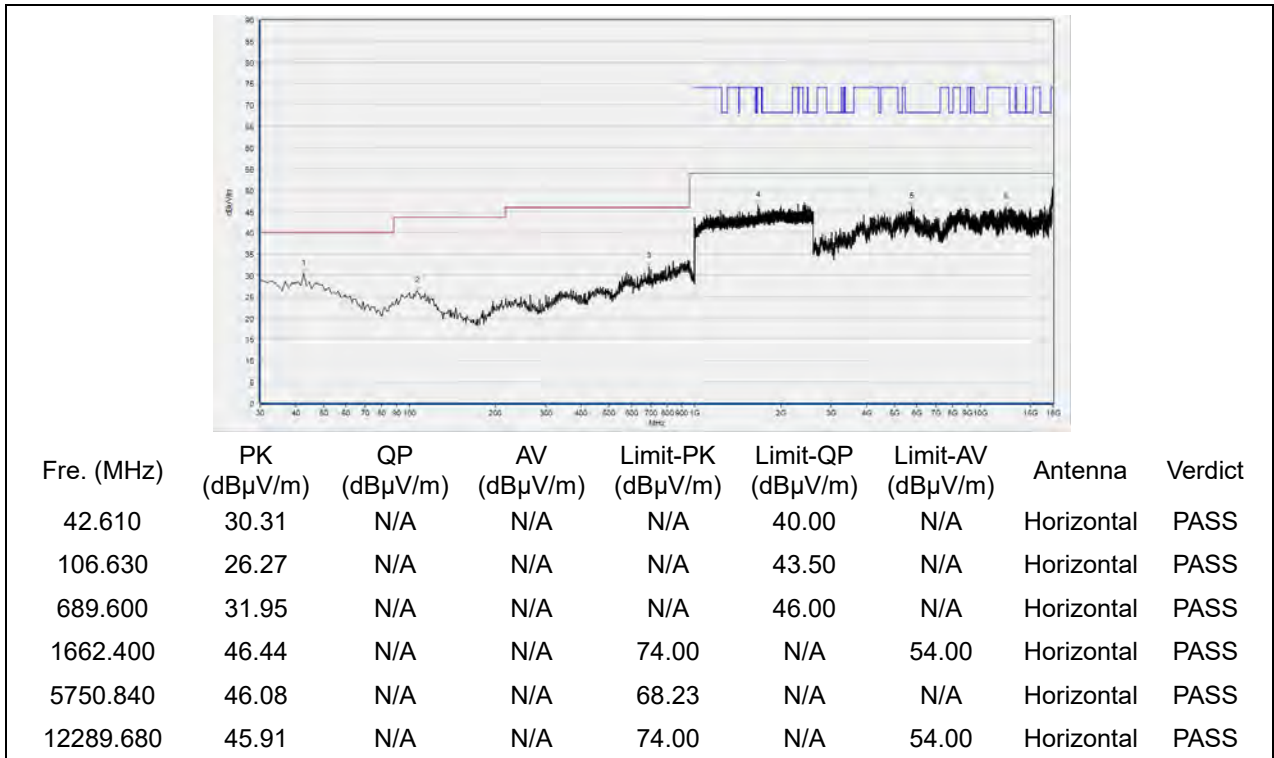


(Antenna Horizontal, 30MHz to 18GHz)

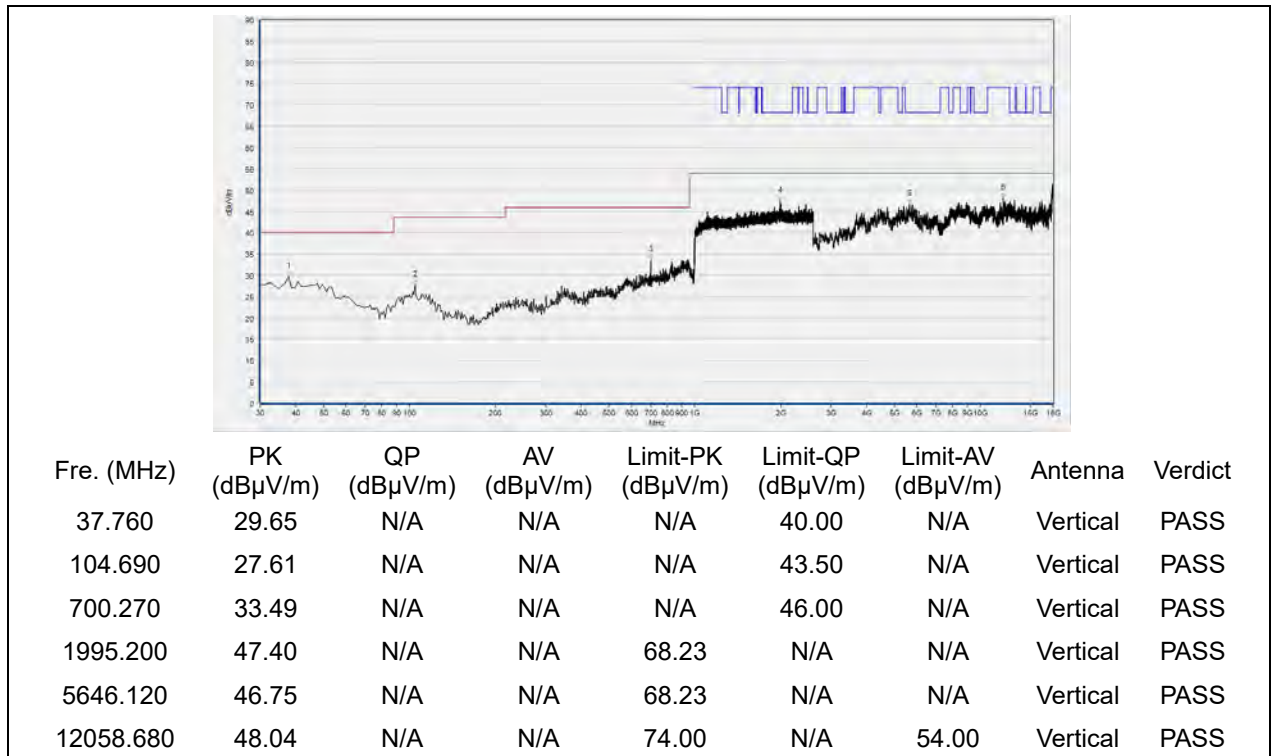


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 58

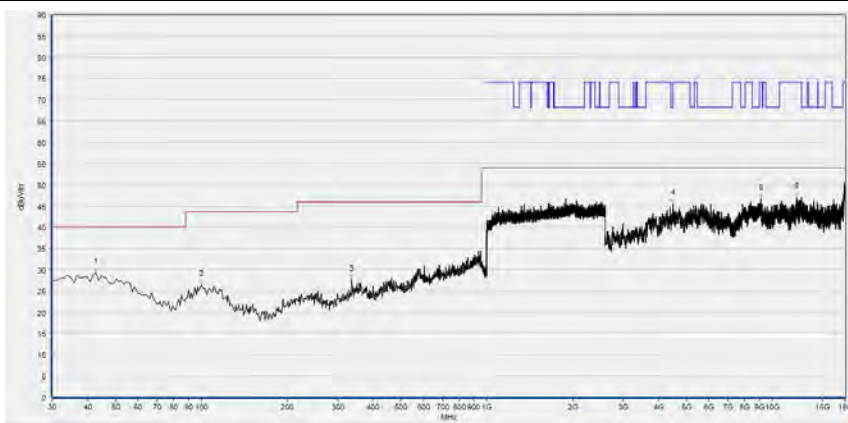

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
42.610	29.34	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
99.840	26.53	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
336.520	27.65	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
4484.960	45.59	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
9098.800	46.78	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12148.000	47.04	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

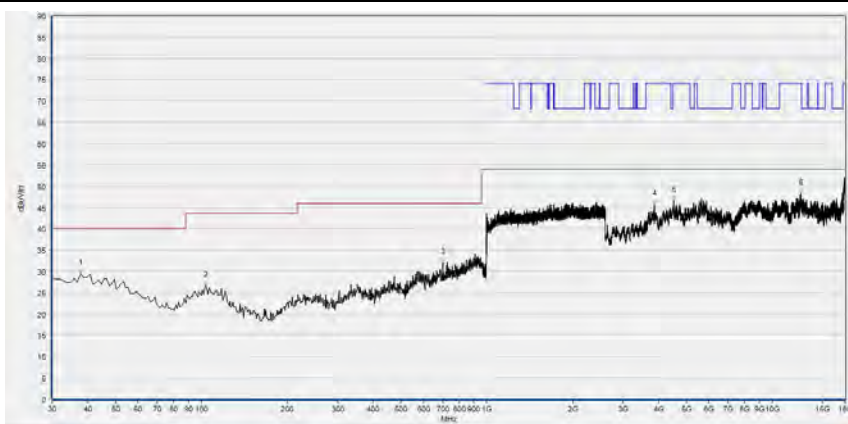


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
37.760	29.46	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
103.720	26.73	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
700.270	31.94	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
3868.960	45.78	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4512.680	46.58	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12610.000	48.28	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 106

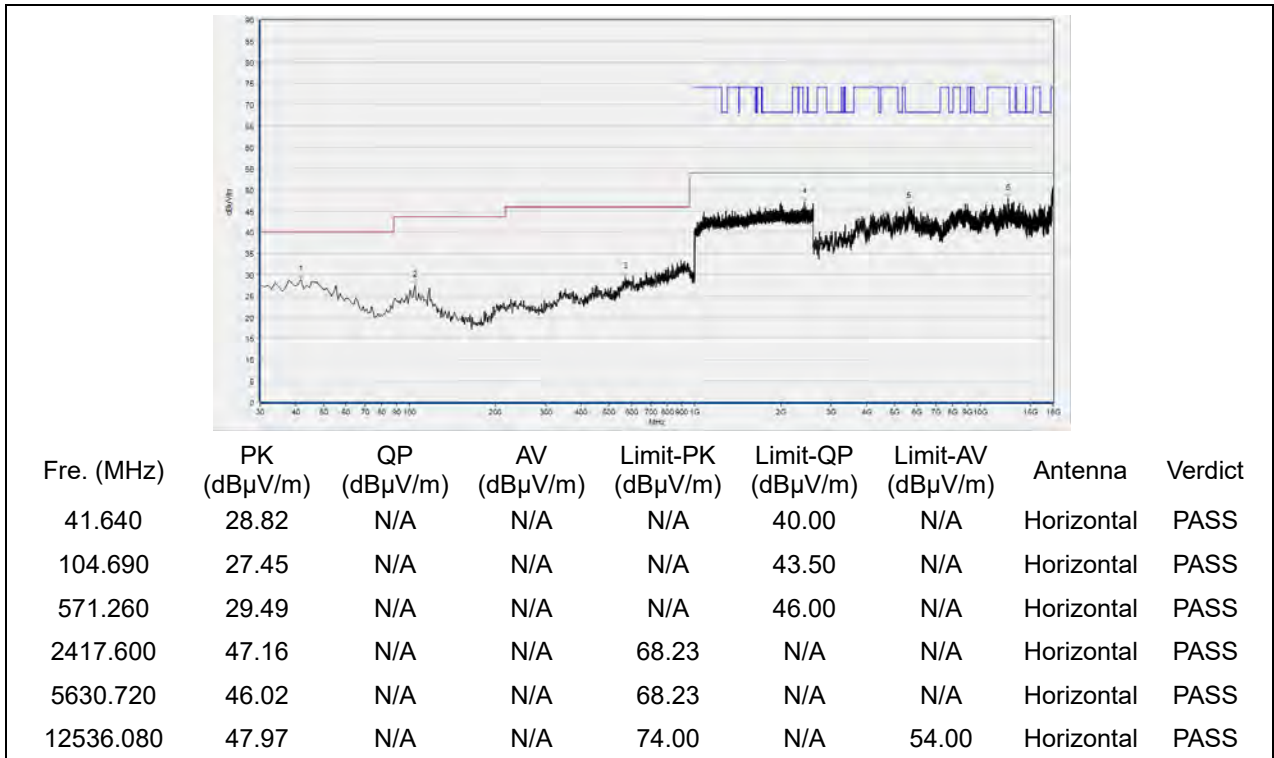


(Antenna Horizontal, 30MHz to 18GHz)

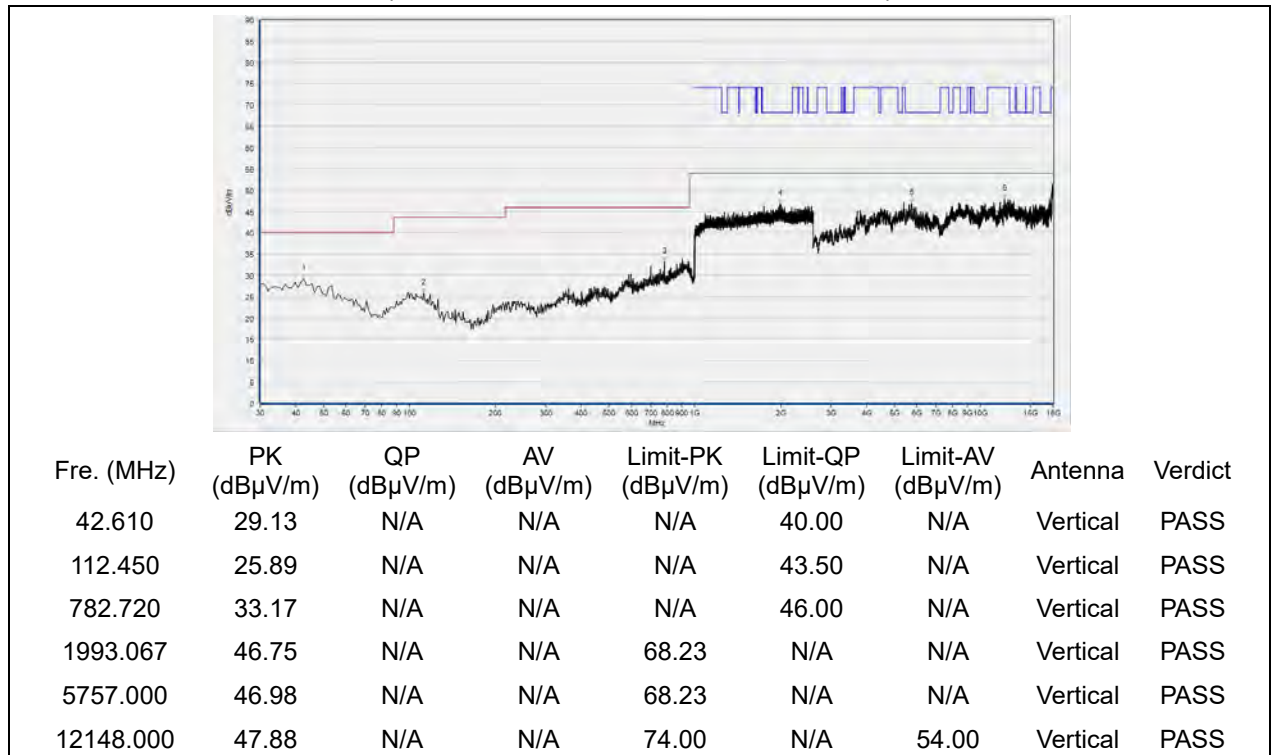

(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 122

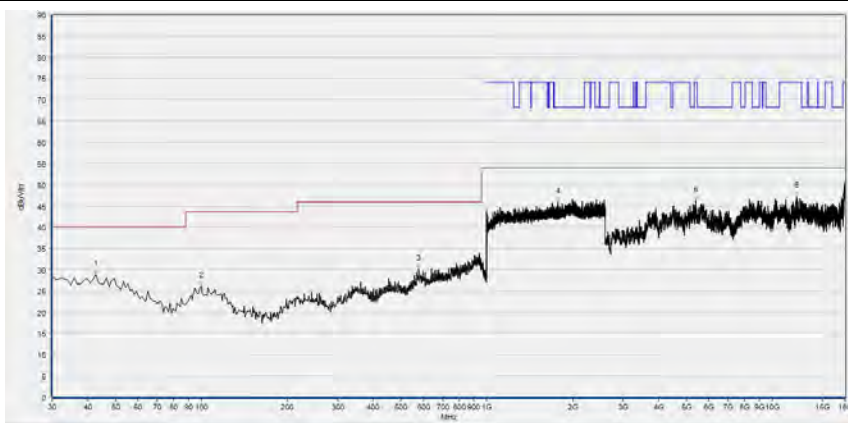

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
42.610	28.82	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
99.840	26.09	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
578.050	30.13	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1771.733	45.84	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5399.720	46.29	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12166.480	47.30	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)



Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
39.700	28.58	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
104.690	26.53	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
447.100	28.38	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1841.067	47.52	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5772.400	47.28	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12151.080	47.90	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 138

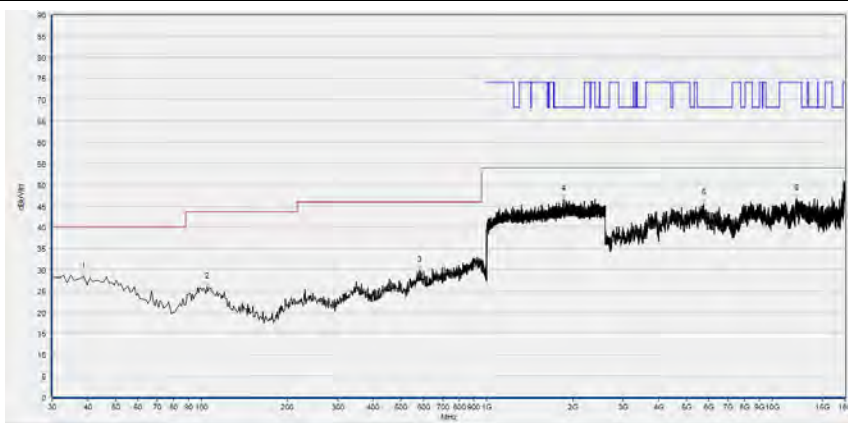

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
38.730	28.44	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
104.690	25.95	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
579.020	29.82	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1859.200	46.54	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5738.520	45.60	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12184.960	46.75	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

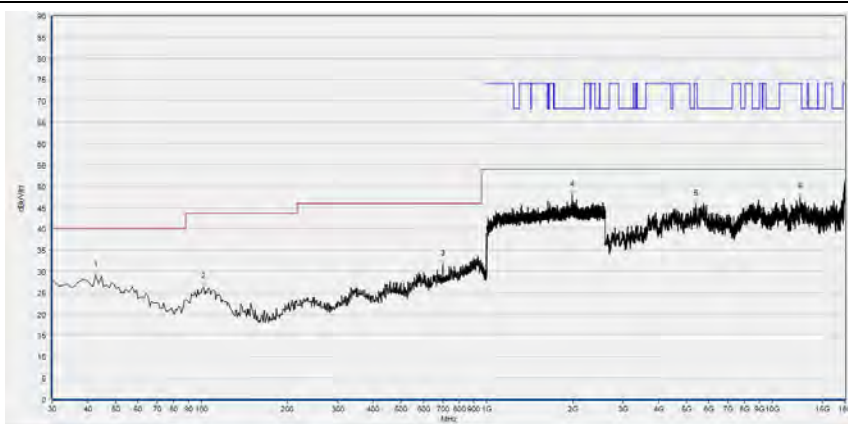

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
42.610	28.93	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
101.780	26.33	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
700.270	31.60	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1994.133	47.87	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5405.880	45.70	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12514.520	47.41	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 155

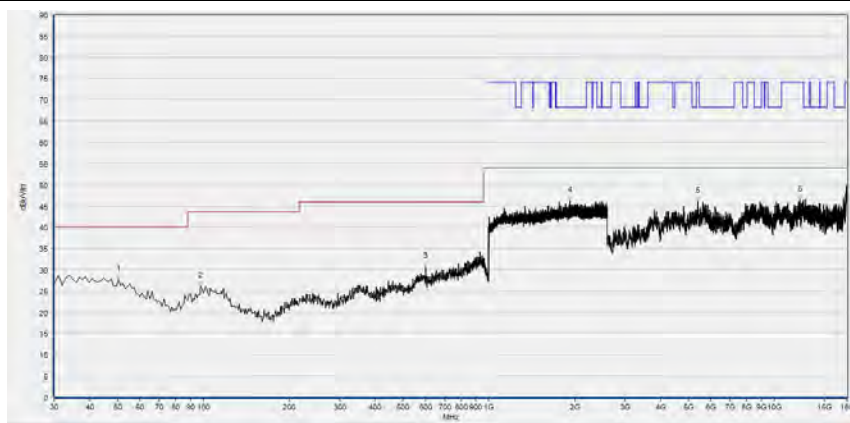

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
50.370	27.65	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
97.900	26.11	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
600.360	30.64	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1922.667	46.27	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5402.800	46.07	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12292.760	46.41	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

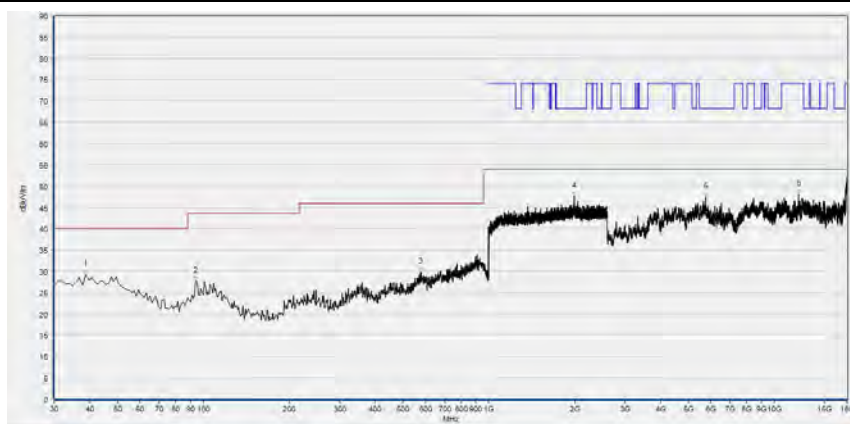

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
38.730	29.12	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
94.020	27.59	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
577.080	29.84	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1995.200	47.58	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5747.760	47.41	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12151.080	48.13	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)



Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Peak Output Power	±2.22dB
Power spectral density (PSD)	±2.22dB
Bandwidth	±5%
Restricted Frequency Bands	±5%
Radiated Emission	±2.95dB
Conducted Emission	±2.44dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Attenuator 1	N/A	10dB	Resnet	N/A	N/A
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2020.04.01	2021.03.31
USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2020.04.01	2021.03.31
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Temperature Chamber	12108015	DTL-003S101	YOMA	2020.10.26	2021.10.25

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2020.03.26	2021.03.25
LISN	812744	NSLK 8127	Schwarzbeck	2020.03.26	2021.03.25
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2020.07.24	2021.07.23
Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A
Computer	DF2DR A01 DPC	VOSTRO 5370	DELL	N/A	N/A
PC Adapter	N/A	LA45NM1 40	LITEON	N/A	N/A

4.3 List of Software Used

Description	Manufacturer	Software Version
Test System	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V1.0
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**4.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2020.07.21	2021.07.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2019.05.24	2022.05.23
Test Antenna - Horn	BBHA9170 #774	BBHA 9170	Schwarzbeck	2019.07.26	2022.07.25
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2019.02.14	2022.02.13
Test Antenna - Horn	01774	BBHA 9120D	Schwarzbeck	2019.07.26	2022.07.25
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-40GHz)	CB05	EMC05	Morlab	N/A	N/A
1-18GHz pre-Amplifier	61171/61172	S020180L32 03	Tonscend	2020.07.21	2021.07.20
18-26.5GHz pre-Amplifier	46732	S10M100L38 02	Tonscend	2020.07.21	2021.07.20
26-40GHz pre-Amplifier	56774	S40M400L40 02	Tonscend	2020.07.21	2021.07.20
Notch Filter	N/A	WRCG-5150-5350	Wainwright	2020.07.21	2021.07.20
Notch Filter	N/A	WRCG-5470-5725	Wainwright	2020.07.21	2021.07.20
Notch Filter	N/A	WRCG-5725-5850	Wainwright	2020.07.21	2021.07.20



REPORT No.: SZ21020081W04

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Anechoic Chamber	N/A	9m*6m*6m	CRT	2020.01.06	2023.01.05

_____ END OF REPORT _____