

FCC Test Report

Report No.: AGC06662240604FR02

FCC ID	:	2ANTC-C688
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Wireless IP Camera
BRAND NAME	:	N/A
MODEL NAME	:	C688, C680, C681, C690, C691
APPLICANT	:	Ansjer Electronics Co., Ltd
DATE OF ISSUE	:	Aug. 06, 2024
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
REPORT VERSION	:	V1.0







Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug. 06, 2024	Valid	Initial Release



Table of Contents

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Table of Carrier Frequency	7
2.3 IEEE 802.11n Modulation Scheme	
2.4 Related Submittal(S) / Grant (S)	9
2.5 Test Methodology	9
2.6 Special Accessories	9
2.7 Equipment Modifications	9
2.8 Antenna Requirement	9
2.10 Description of Test Software	
3. Test Environment	11
3.1 Address of The Test Laboratory	11
3.2 Test Facility	11
3.3 Environmental Conditions	
3.4 Measurement Uncertainty	
3.5 List of Equipment Used	
4.System Test Configuration	
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	15
4.4 Equipment Used in Tested System	15
4.5 Summary of Test Results	
5. Description of Test Modes	
6. Duty Cycle Measurement	
7. RF Output Power Measurement	
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Result	
8. 6dB Bandwidth Measurement	
8.1 Provisions Applicable	
8.2 Measurement Procedure	
8.3 Measurement Setup (Block Diagram of Configuration)	
8.4 Measurement Result	
9. Power Spectral Density Measurement	



Report No.: AGC06662240604FR02 Page 4 of 88

9.1 Provisions Applicable	
9.2 Measurement Procedure	
9.3 Measurement Setup (Block Diagram of Configuration)	
9.4 Measurement Result	
10. Conducted Band Edge and Out-of-Band Emissions	
10.1 Provisions Applicable	
10.2 Measurement Procedure	
10.3 Measurement Setup (Block Diagram of Configuration)	
10.4 Measurement Result	
11. Radiated Spurious Emission	59
11.1 Measurement Limits	59
11.2 Measurement Procedure	59
11.3 Measurement Setup (Block Diagram of Configuration)	
11.4 Measurement Result	63
12. AC Power Line Conducted Emission	
12.1 Measurement Limits	
12.2 Block Diagram of Line Conducted Emission Test	
12.3 Preliminary Procedure of Line Conducted Emission Test	
12.4 Final Procedure of Line Conducted Emission Test	
12.5 Test Result of Line Conducted Emission Test	
Appendix I: Photographs of Test Setup	
Appendix II: Photographs of Test EUT	



1. General Information

Applicant	Ansjer Electronics Co., Ltd
Address	301, 1st Building, No.21 Yongtian Road, Xiangzhou, Zhuhai, Guangdong, China
Manufacturer	Zhuhai Ansjer Electronics Co., Ltd. Zhongshan Branch
Address	Building C(2nd to 5th Floor), BuildingB(Section A, 2nd Floor; 4rd to 5th Floors), No. 5 Wanli Road, Sanxiang Town, Zhongshan, Guangdong, China
Factory	Zhuhai Ansjer Electronics Co., Ltd. Zhongshan Branch
Address	Building C(2nd to 5th Floor), BuildingB(Section A, 2nd Floor; 4rd to 5th Floors), No. 5 Wanli Road, Sanxiang Town, Zhongshan, Guangdong, China
Product Designation	Wireless IP Camera
Brand Name	N/A
Test Model	C688
Series Model(s)	C680, C681, C690, C691
Difference Description	All the same except for the model names.
Date of receipt of test item	Jul. 04, 2024
Date of Test	Jul. 04, 2024~Aug. 06, 2024
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-2.4GWLAN-V1

Note: The test results of this report relate only to the tested sample identified in this report.

ACT Li Prepared By Cici Li Aug. 06, 2024 (Project Engineer) **Reviewed By** Calvin Liu Aug. 06, 2024 (Reviewer) Max Zhan Approved By Max Zhang Aug. 06, 2024 Authorized Officer



2. Product Information

2.1 Product Technical Description

Equipment Type	WLAN 2.4G
Frequency Band	2400MHz ~ 2483.5MHz
Operation Frequency	2412MHz ~ 2462MHz
Output Power (Average)	IEEE 802.11b:13.80dBm; IEEE 802.11g:11.33dBm;
	IEEE 802.11n(HT20):11.45dBm; IEEE 802.11n(HT40):9.99dBm
Output Power (Peak)	IEEE 802.11b:16.51dBm; IEEE 802.11g:19.39dBm;
	IEEE 802.11n(HT20):19.48dBm; IEEE 802.11n(HT40):18.13dBm
Modulation	802.11b:(DQPSK, DBPSK, CCK) DSSS
	802.11g/n:(64-QAM,16-QAM, QPSK, BPSK) OFDM
	802.11b:1/2/5.5/11Mbps
Data Rate	802.11g: 6/9/12/18/24/36/48/54Mbps
	802.11n: up to 300Mbps
Number of channels	11
Hardware Version	ATBM 6012B-X
Software Version	V4.2.4.72V201250BA
Antenna Designation	FPC Antenna
Antenna Gain	3.31dBi
Power Supply	DC 5 V by adapter



2.2 Table of Carrier Frequency

For 2412-2462MHz:

11 channels are provided for 802.11b/g/n(HT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz		

7 channels are provided for 802.11n(HT40):

Channel	Frequency	Channel	Frequency	Channel	Frequency
01		02		03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10		11			



2.3 IEEE 802.11n Modulation Scheme

				Data Rat	N _{CBPS}			te(Mbps)		
MCS Index	Nss	Modulation	R	N _{BPSC}			IN _{CBPS}		N _{DBPS}	
Index					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	Guard interval



2.4 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2ANTC-C688**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.5 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title	
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations	
2	FCC 47 CFR Part 15	Radio Frequency Devices	
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices	

2.6 Special Accessories

Refer to section 4.4.

2.7 Equipment Modifications

Not available for this EUT intended for grant.

2.8 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 3.31dBi.



2.10 Description of Test Software

For IEEE 802.11 mode:

The test utility software used during testing was "SecureCRT".

Software Setting Diagram

👿 Serial-COM2 - SecureCRT	- 0 X
文件(17) 病理(11) 言葉(17) 信葉(17) 副本(5) 工具(1) 尾助(14)	
VERTICATE AND A VICED	(
Malata d'a d'a d'a d'a d'a d'a d'a d'a d'a d'	
Cal_terme.commeter_resturf(o	
WET LE TRANSMITTER TEST OFF SUPPER	
HCL_LE_TRANSMITTER_TEST_OCF_SUCCEED /data # ./atbmc_l1btsHell dtm=tx stop mmc_l1ne: UtsHell dtm=tx stop	
NOT LE TARE FOR ENCIPER	
Malaka Miller Mata # /.ztwc_11 btshell dtm-tx chan=39 lem=27 payloadsi phyModesi md_11me: btshell dtm-tx chan=39 lem=27 payloadsi phyModesi Cz_LEuRnhonced ramamitter_restubu[0] = 27, buf[3] = 1, buf[3] = 1	
<pre>CI_LE_Enhanced_transmitter_test:buf[0] = 27, buf[1] = 1b, buf[2] = 1, buf[3] = 1</pre>	
HCI_LE_TRANSMITTER_TEST_OCF SUCCEED	
/data # ./atbm_c11 btshell dtm-tx stop cm_llne: btshell dtm-tx stop	
HET LE TART END SUFFER	
<pre>Wint = Wint = Wint</pre>	
HCI_LE_Enhanced_Transmitter_Test:buf[0] = 27, buf[1] = 1b, buf[2] = 1, buf[3] = 2	
HCI_LE_TRANSMITTER_TEST_OCF_SUCCEED	
/data # ./atbm_c11 btshell dtm-tx stop md_lne: btshell dtm-tx stop	
HCILLTB:Ind SUCCESD GMG1 + /stmc:// toshell dtm-tx chan-19 len-27 psyload-1 phytode-2 cmd1 + is bsthell dtm-tx chan-19 len-27 psyload-1 phytode-2 ff.LLEnchanderd:montter_testInd(f) = 13, bdf[] = 1b, bdf[] = 1, bdf[] = 2	
HCI_LE_Enhanced_Transmitter_Test:buf[0] = 13, buf[1] = 1b, buf[2] = 1, buf[3] = 2	
HCI_LE_TRANSMITTER_TEST_OCF SUCCEED	
/data # ./atbm_c11 btshell dtm-tx stop	
HCT_LE_Test_End_SUCCEED	
/data # ./atom_f1 brshell dtm-tx chan=0 len=27 payload=1 phyMode=2 cmd_line: btshell dtm-tx chan=0 len=27 payload=1 phyMode=2 uc_lnnare_transmitter_rest:buf[0] = 0.buf[1] = 10.buf[2] = 1.buf[3] = 2	
HCI_LE_Enhanced_Transmitter_Test:but[0] = 0, but[1] = 1b, but[2] = 1, but[3] = 2	
HCI_LE_TRANSMITTER_TEST_OCF SUCCEED	
/datā # ./atbm_c11 btshē11 dtm=tx stop cm_l1ne: btshē1 dtm=tx stop	
HCI_LE_Test_End_SUCCEED	
/data # /atbm_c1 brshell tone-tx chan-0 power-0 cm_lne: brshell tone-tx chan-0 power-0	
ble_tone_tx_start, ch:0, pwr:0 ble_tone_tx_start succeso	
Diel. Long. LX Start Sociato /data #	
Default = Q1 Q2 Q3 Q4 Q5 Q6 Q7 Q reset Q show Q reboot	
83 S	Serial: COM2, 115200 57, 9 57行,237列 VT100 大写 数

Test Mode	Channel	Power Index
802.11b	L/M/H	-4
802.11g	L/M/H	-4
802.11n-HT20	L/M/H	-4
802.11n-HT40	L/M/H	-4



3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106

3.4 Measurement Uncertainty

The reported uncertainty of measurement $y\pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty	
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$	
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$	
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$	
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$	
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$	
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$	
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$	



3.5 List of Equipment Used

• R	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\square	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23	
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31	
\boxtimes	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31	
\boxtimes	AGC-ER-A001	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-09-21	2025-09-20	
\boxtimes	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22	
	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A	
\boxtimes	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\square	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31	
	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23	
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27	
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
\boxtimes	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30	
\boxtimes	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03	
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23	
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22	
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	

• A	AC Power Line Conducted Emission							
Used Faunment No. Lest Faunment Manufacturer Model No. Serial No. Lest Faunment Model No. Serial No. Serial No. Lest Faunment Model No. Serial No. Lest Faunment Model No. Serial No. Serial No. Lest Faunment Model No. Serial No. Serial No. Lest Faunment Model No. Serial No. S						Next Cal. Date (YY-MM-DD)		
\boxtimes	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27	
\boxtimes	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08	
\boxtimes	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27	



• Te	Test Software						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information		
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71		
	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A		
	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6		
\boxtimes	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0		



4.System Test Configuration


4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

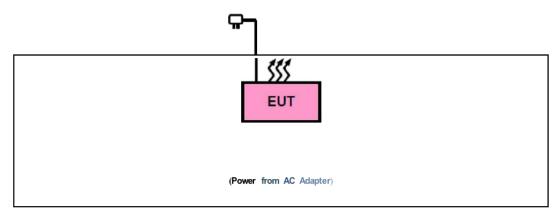

4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

Test Accessories Come From The Laboratory

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Control Box		USB-TTL		

☑ Test Accessories Come From The Manufacturer

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Adapter	Zhongshan Vzzon Energy Tech Co., Ltd.	VZ-0051000U	Input: 100-240V~50/60Hz 0.5A Output: 5.0V1.0A 5W	1.95m unshielded



4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(1)	RF Output Power	Pass
3	§15.247 (a)(1)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
5	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
6	§15.247 (d)&15.209	Radiated Spurious Emission	Pass
7	§15.207	AC Power Line Conducted Emission	Pass



5. Description of Test Modes

	Summary table of Test Cases					
Test Item	Data Rate / Modulation					
rest item	2.4G WLAN – 802.11b/g/n (DSSS/OFDM)					
	Mode 1: 802.11b_TX CH01_2412 MHz_1 Mbps					
	Mode 2: 802.11b_TX CH06_2437 MHz_1 Mbps					
	Mode 3: 802.11b_TX CH11_2462 MHz_1 Mbps					
	Mode 4: 802.11g_TX CH01_2412 MHz_6 Mbps					
	Mode 5: 802.11g_TX CH06_2437 MHz_6 Mbps					
Radiated & Conducted	Mode 6: 802.11g_TX CH11_2462 MHz_6 Mbps					
Test Cases	Mode 7: 802.11n-HT20_TX CH01_2412 MHz_MCS0 Mbps					
	Mode 8: 802.11n-HT20_TX CH06_2437 MHz_ MCS0 Mbps					
	Mode 9: 802.11n-HT20_TX CH11_2462 MHz_ MCS0 Mbps					
	Mode 10: 802.11n-HT40_TX CH03_2422 MHz_MCS0 Mbps					
	Mode 11: 802.11n-HT40_TX CH06_2437 MHz_ MCS0 Mbps					
	Mode 12: 802.11n-HT40_TX CH09_2452 MHz_ MCS0 Mbps					
AC Conducted Emission	Mode 1: 2.4G WLAN Link + USB Cable (Charging from AC Adapter)					
Note:						
-						
2. For Radiated Emissio	on, 3axis were chosen for testing for each applicable mode.					

3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.



6. Duty Cycle Measurement

2.4GHz WLAN (DTS) operation is possible in 20MHz, and 40MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Average. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:


Operating mode	Data rates (Mbps)	Duty Cycle (%)	Duty Cycle Factor (dB)
IEEE 802.11b	1	98.47	0.07
IEEE 802.11g	6	97.18	0.12
IEEE 802.11n-HT20	MCS0	96.99	0.13
IEEE 802.11n-HT40	MCS0	93.97	0.27

Remark:

- 1. Duty Cycle factor = 10 * log (1/ Duty cycle)
- 2. The duty cycle of each frequency band mode reflects the determination requirements of the Middle channel measurement value.



The test plots as follows:

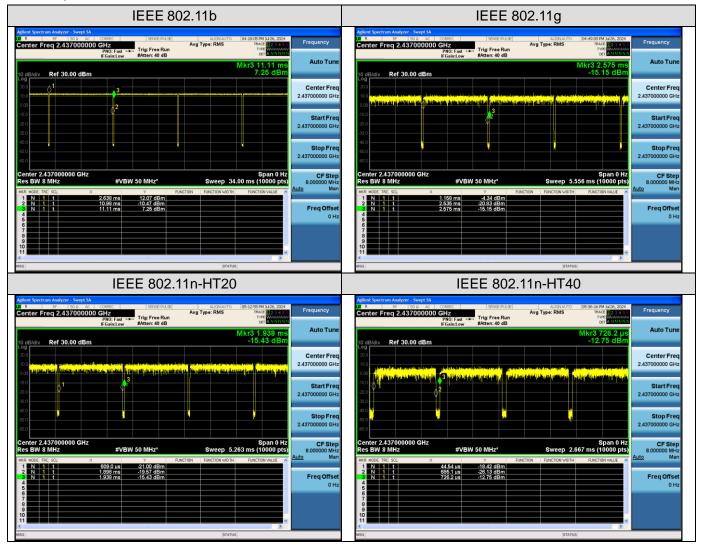



7. RF Output Power Measurement

7.1 Provisions Applicable

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.

7.2 Measurement Procedure


Method PM is Measurement using an RF Peak power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 11.9.1.3
- 2. The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 11.9.2.3
- 2. Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
- 3. The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 4. At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 5. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- 6. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 7. Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- 8. Adjust the measurement in dBm by adding [10 log (1 / D)], where D is the duty cycle {e.g., [10 log (1 / 0.25)], if the duty cycle is 25%}.
- 9. Record the test results in the report.

7.3 Measurement Setup (Block Diagram of Configuration)

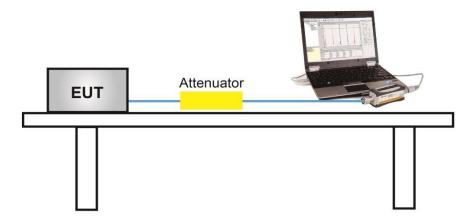



7.4 Measurement Result

Test Data of Conducted Output Power							
Test Mode	Test Frequency (MHz)	Average Power (dBm)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
802.11b	2412	13.52	16.24	≤30	Pass		
	2437	13.57	16.29	≤30	Pass		
	2462	13.80	16.51	≤30	Pass		
802.11g	2412	10.92	18.87	≤30	Pass		
	2437	11.24	19.22	≤30	Pass		
	2462	11.33	19.39	≤30	Pass		
802.11n20	2412	10.80	18.82	≤30	Pass		
	2437	10.96	18.97	≤30	Pass		
	2462	11.45	19.48	≤30	Pass		
802.11n40	2422	9.92	18.05	≤30	Pass		
	2437	9.99	18.13	≤30	Pass		
	2452	9.94	18.06	≤30	Pass		



8. 6dB Bandwidth Measurement

8.1 Provisions Applicable


The minimum 6dB bandwidth shall be 500 kHz.

8.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).

- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- 3. For 6dB Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 5. Detector = peak
- 6. Trace mode = max hold.
- 7. Sweep = auto couple.
- 8. Allow the trace to stabilize.
- 9. Measure and record the results in the test report.

8.3 Measurement Setup (Block Diagram of Configuration)

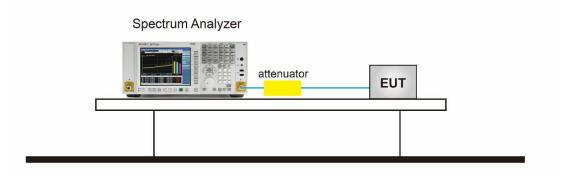




8.4 Measurement Result

Test Data of Occupied Bandwidth and DTS Bandwidth								
Test Mode	Test Frequency (MHz)	99% Occupied Bandwidth (MHz)	DTS Bandwidth (MHz)	DTS Bandwidth Limits (MHz)	Pass or Fail			
802.11b	2412	14.969	10.076	≥0.5	Pass			
	2437	14.976	10.083	≥0.5	Pass			
	2462	14.980	10.074	≥0.5	Pass			
802.11g	2412	16.548	16.375	≥0.5	Pass			
	2437	16.562	16.385	≥0.5	Pass			
	2462	16.545	16.404	≥0.5	Pass			
802.11n20	2412	17.508	17.312	≥0.5	Pass			
	2437	17.504	17.147	≥0.5	Pass			
	2462	17.512	17.312	≥0.5	Pass			
802.11n40	2422	35.957	36.006	≥0.5	Pass			
	2437	35.968	35.796	≥0.5	Pass			
	2452	35.972	35.811	≥0.5	Pass			



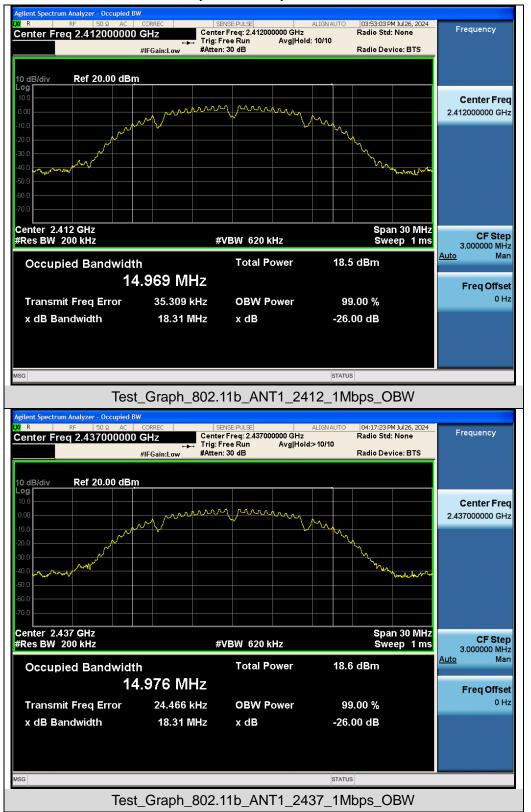

Test Graphs of Occupied Bandwidth





Test_Graph_802.11g_ANT1_2412_6Mbps_OBW

#VBW 620 kHz

x dB

Total Power

OBW Power

Span 30 MHz Sweep 1 ms

17.5 dBm

99.00 %

-26.00 dB

CF Step

Man

3.000000 MHz

Freq Offset 0 Hz

Auto

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Center 2.412 GHz #Res BW 200 kHz

Occupied Bandwidth


Transmit Freq Error x dB Bandwidth

16.548 MHz

17.539 kHz


19.35 MHz



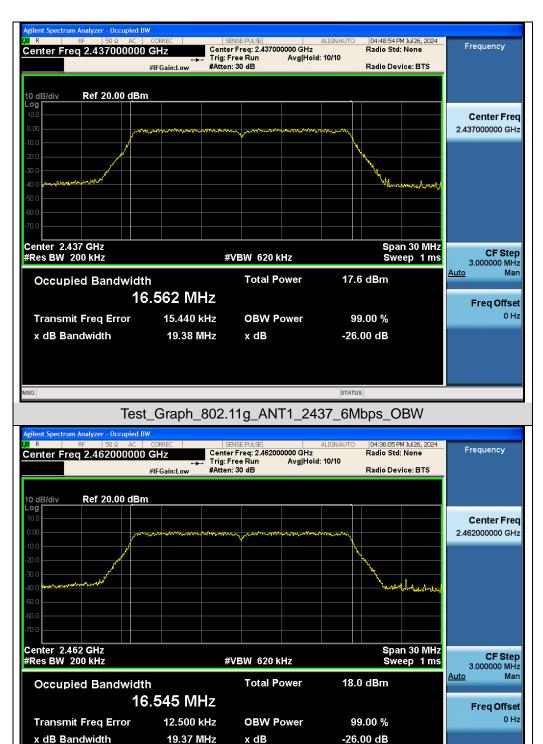


Test_Graph_802.11g_ANT1_2462_6Mbps_OBW




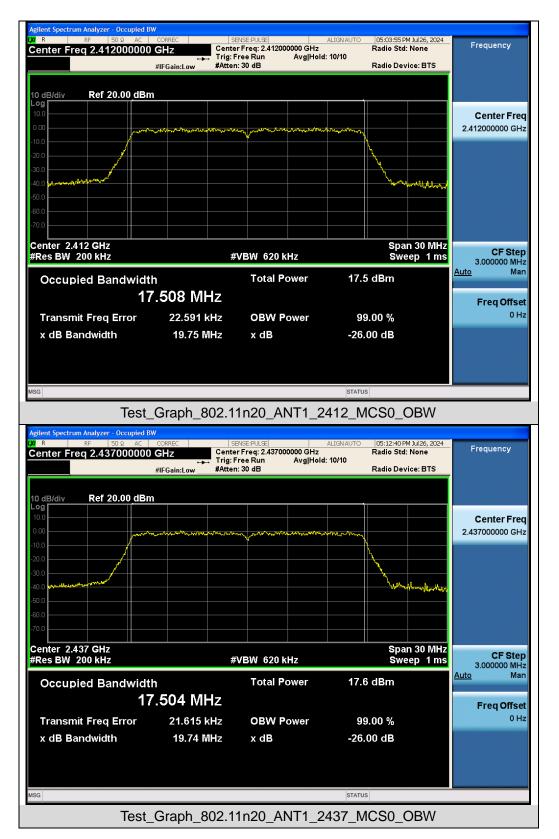




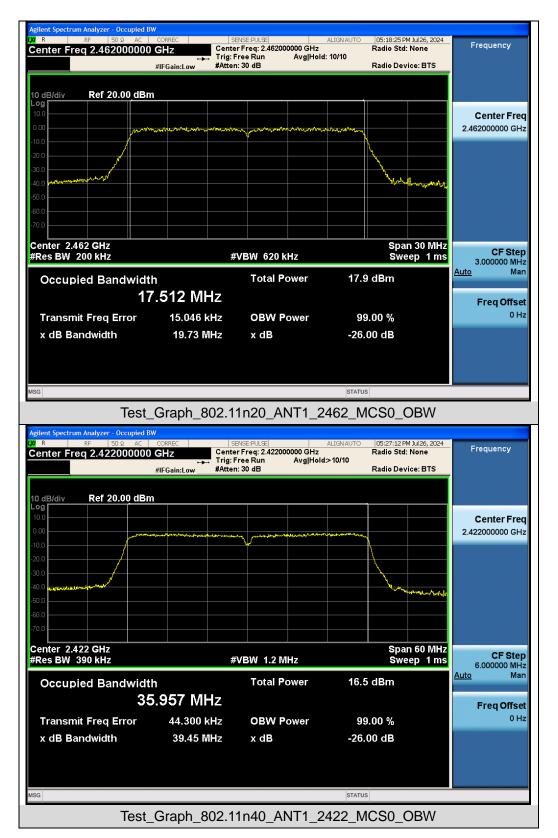



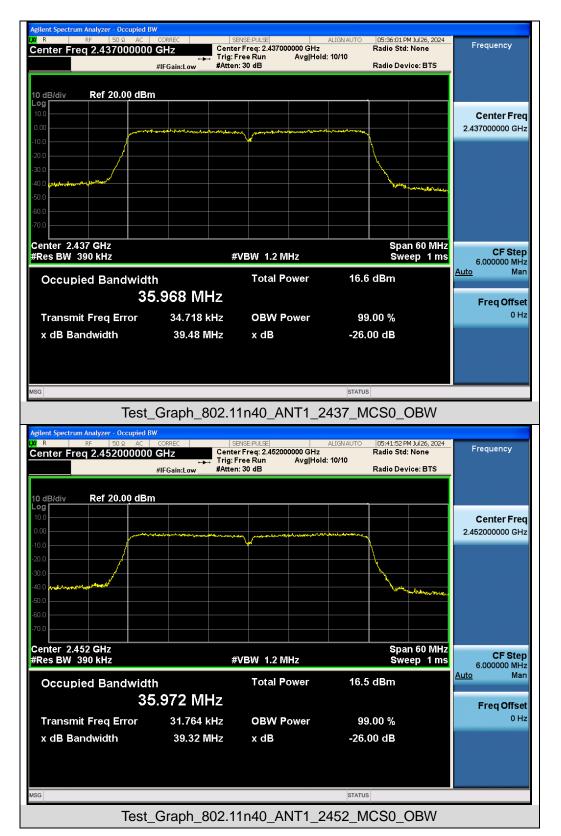



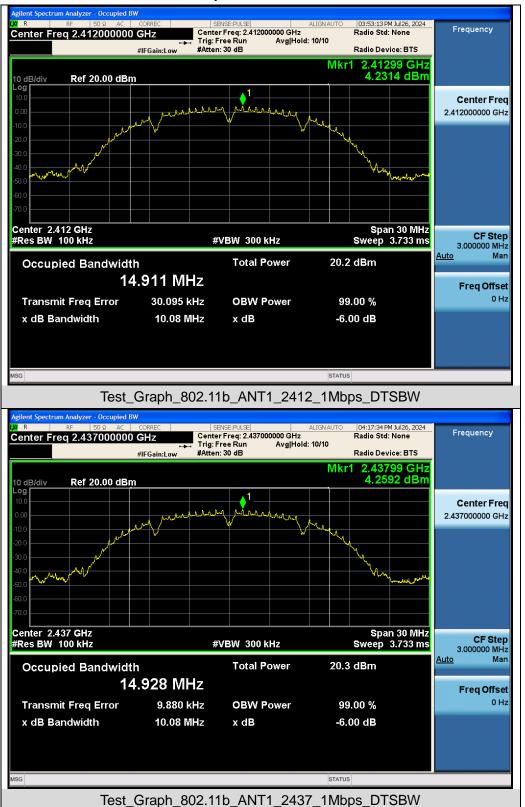

Test Graphs of DTS Bandwidth





Test_Graph_802.11g_ANT1_2412_6Mbps_DTSBW

#VBW 300 kHz

x dB

Total Power

OBW Power

Span 30 MHz Sweep 3.733 ms

17.0 dBm

99.00 %

-6.00 dB

CF Step

Man

3.000000 MHz

Freq Offset 0 Hz

Auto

Center 2.412 GHz #Res BW 100 kHz

Occupied Bandwidth

Transmit Freq Error x dB Bandwidth

16.419 MHz

-6.312 kHz

16.37 MHz

CF Step


Man

3.000000 MHz

Freq Offset 0 Hz

Auto



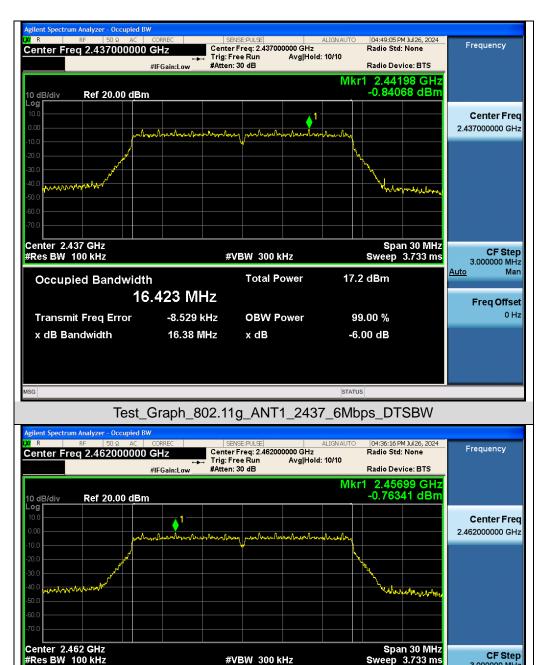

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11g_ANT1_2462_6Mbps_DTSBW

#VBW 300 kHz

x dB

Total Power

OBW Power

17.5 dBm

99.00 %

-6.00 dB

Occupied Bandwidth


Transmit Freq Error x dB Bandwidth

16.421 MHz


-10.509 kHz

16.40 MHz




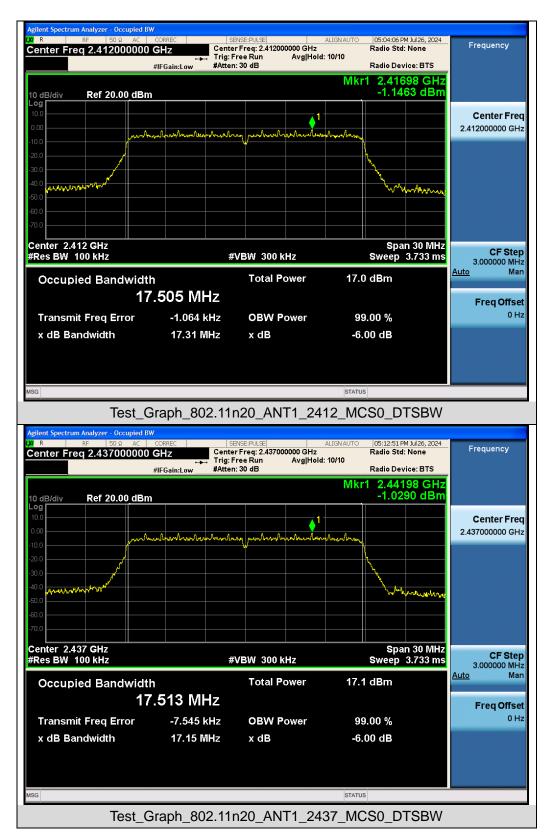



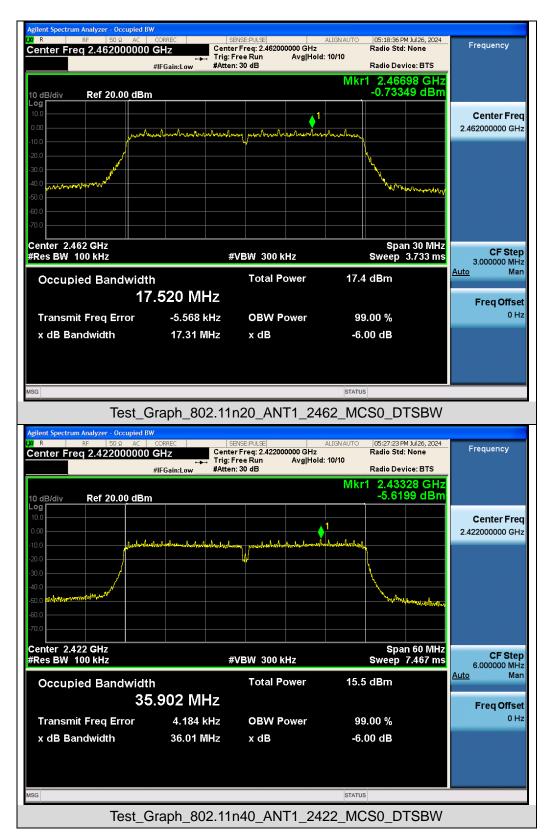



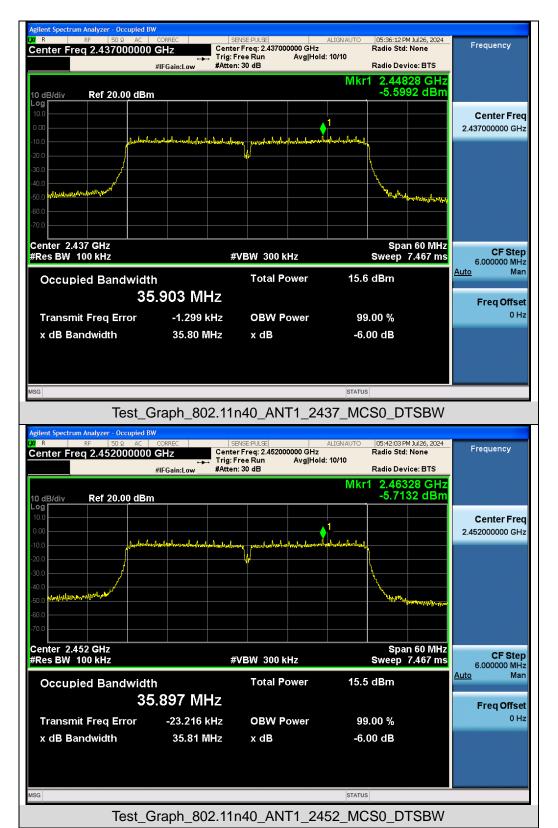



9. Power Spectral Density Measurement

9.1 Provisions Applicable

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than

8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.2 Measurement Procedure

SFor Peak power spectral density test:


- 1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3. Set the RBW = 20 kHz.
- 4. Set the VBW \geq [3 × RBW].
- 5. Set the Span \geq [1.5 × DTS bandwidth].
- 6. Sweep time=Auto couple.
- 7. Detector function=Peak.
- 8. Trace Mode=Max hold.
- When the measurement bandwidth of Maximum PSD is specified in 3 kHz, add a constant factor 10*log(3kHz/20kHz) = -8.23 dB to the measured result.
- 10. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission.
- 11. The indicated level is the peak output power, after any corrections for external attenuators and cables.

For Average power spectral density test:

- 1. The testing follows the ANSI C63.10 Section 11.10.5 Method AVPSD.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
- 3. Set Span to at least 1.5 times the OBW.
- 4. Set RBW to:3 kHz \leq RBW \leq 100 kHz.
- 5. Set VBW≥[3×RBW].
- 6. Sweep Time=Auto couple.
- 7. Detector function=RMS (i.e., power averaging).
- 8. Trace average at least 100 traces in power averaging (rms) mode.
- 9. When the measurement bandwidth of Maximum PSD is specified in 3 kHz, add a constant factor 10*log(3kHz/20kHz) = -8.23 dB to the measured result.
- 10. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 11. Add [10 log (1 / D)], where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is 25%.
- 12. Record the test results in the report.




9.3 Measurement Setup (Block Diagram of Configuration)

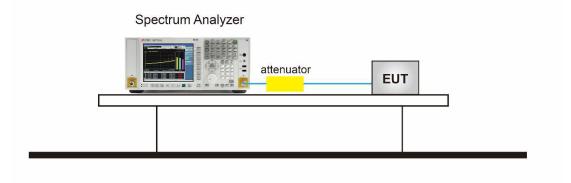


9.4 Measurement Result

	Test Data of Conducted Output Power Spectral Density									
Test Mode	Test Frequency (MHz)	Power Spectral density (dBm/20kHz)	Power Spectral density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail					
	2412	-0.191	-8.43	≤8	Pass					
802.11b	2437	0.383	-7.856	≪8	Pass					
	2462	2.288	-5.951	≪8	Pass					
	2412	-5.612	-13.851	≪8	Pass					
802.11g	2437	-5.652	-13.891	≪8	Pass					
	2462	-4.764	-13.003	≪8	Pass					
	2412	-5.940	-14.179	≪8	Pass					
802.11n20	2437	-5.628	-13.867	≪8	Pass					
	2462	-5.400	-13.639	≪8	Pass					
	2422	-9.804	-18.043	≪8	Pass					
802.11n40	2437	-9.597	-17.836	≪8	Pass					
	2452	-9.854	-18.093	≪8	Pass					






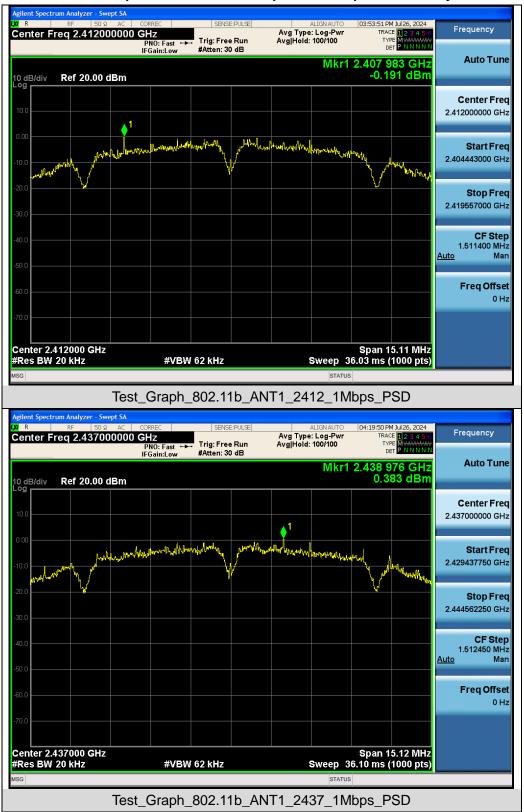


Test Graphs of Conducted Output Power Spectral Density




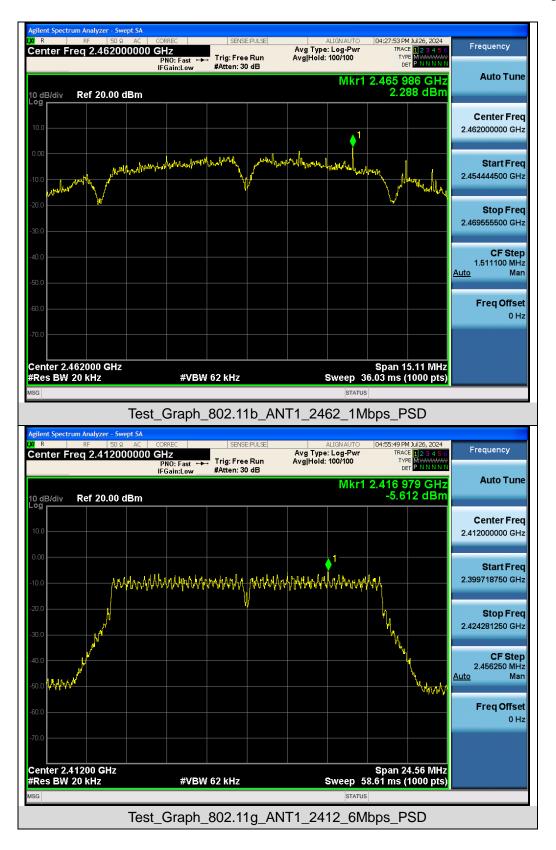




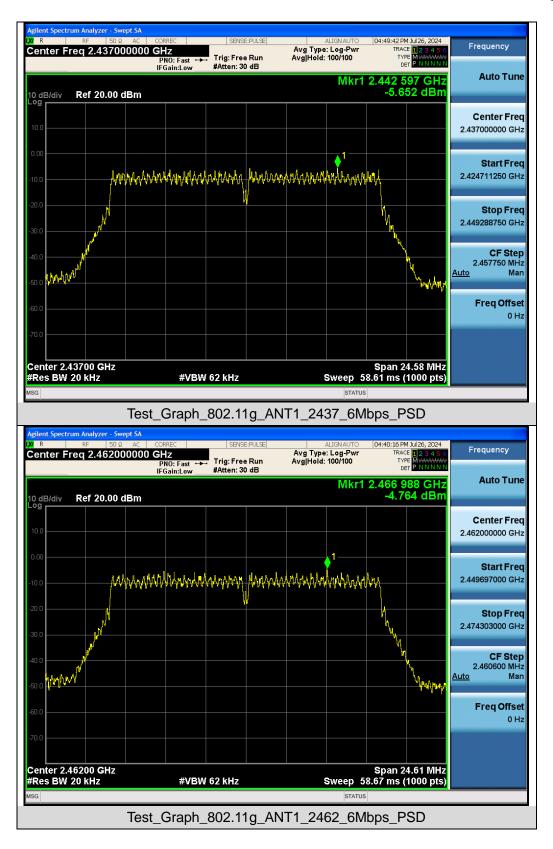




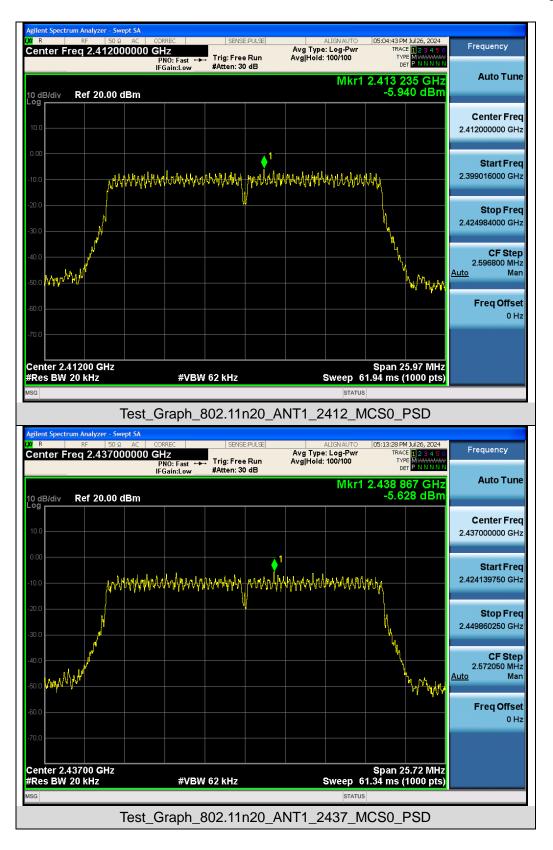



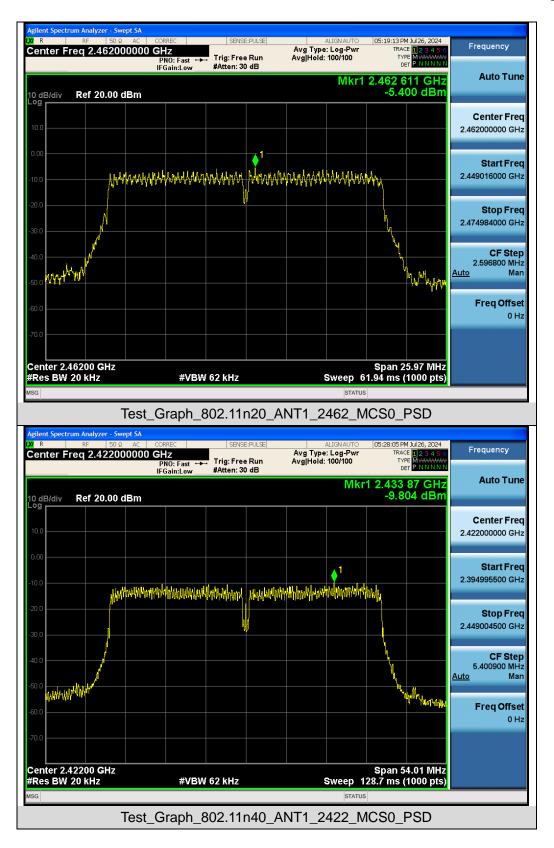



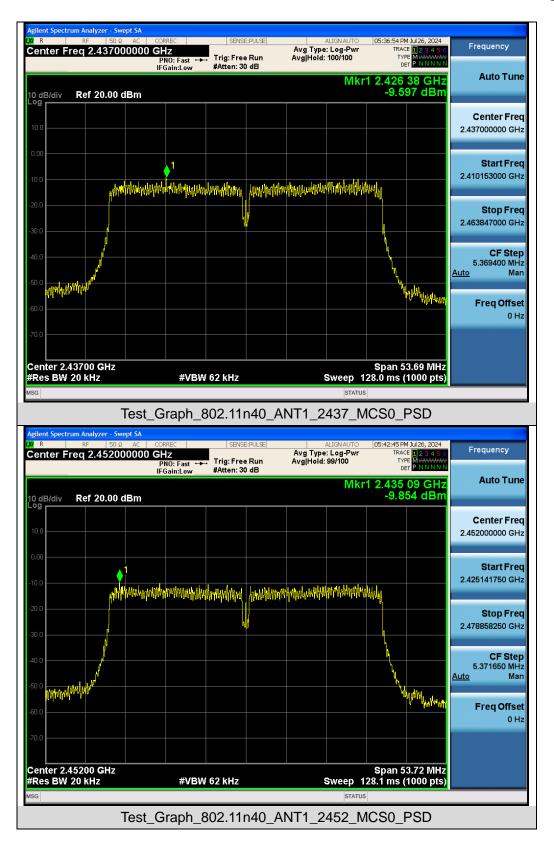



10. Conducted Band Edge and Out-of-Band Emissions

10.1 Provisions Applicable

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

10.2 Measurement Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- Step 1: Measurement Procedure In-Band Reference Level
 - 1. Set instrument center frequency to DTS channel center frequency.
 - 2. Set the span to \geq 1.5 times the DTS bandwidth.
 - 3. Set the RBW = 100 kHz.
 - 4. Set the VBW \ge 3 x RBW.
 - 5. Detector = peak.
 - 6. Sweep time = auto couple.
 - 7. Trace mode = max hold.
 - 8. Allow trace to fully stabilize.
 - 9. Use the peak marker function to determine the maximum PSD level.
 - 10. Note that the channel found to contain the maximum PSD level can be used to establish the reference level.
 - 11. For reference level values, please refer to DTS bandwidth test.
- Step 2: Measurement Procedure Out of Band Emission
 - 1. Set RBW = 100 kHz.
 - 2. Set VBW ≥ 300 kHz.
 - Detector = peak.
 - 4. Sweep = auto couple.
 - 5. Trace Mode = max hold.
 - 6. Allow trace to fully stabilize.
 - 7. Use the peak marker function to determine the maximum amplitude level.


Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

10.3 Measurement Setup (Block Diagram of Configuration)

Spectrum Analyzer		
	attenuator	EUT




10.4 Measurement Result

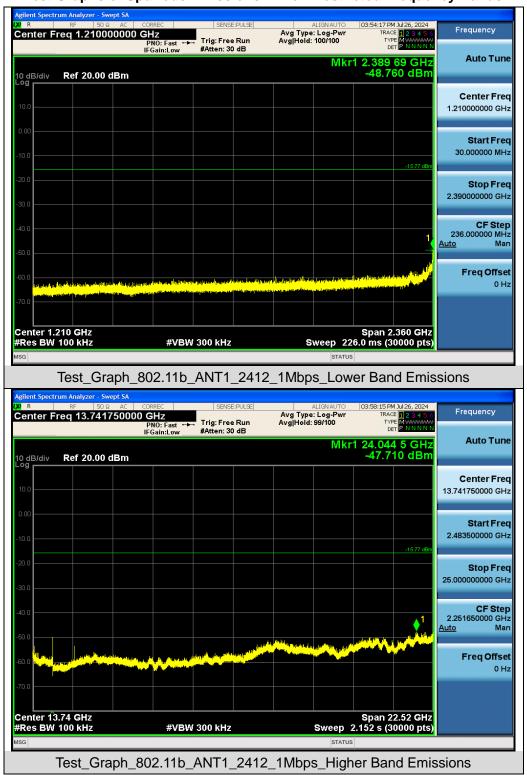


Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands




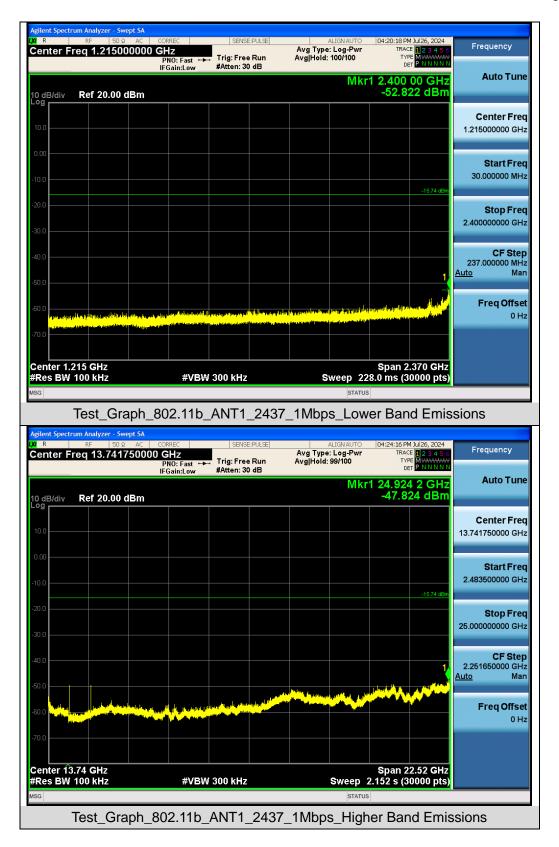




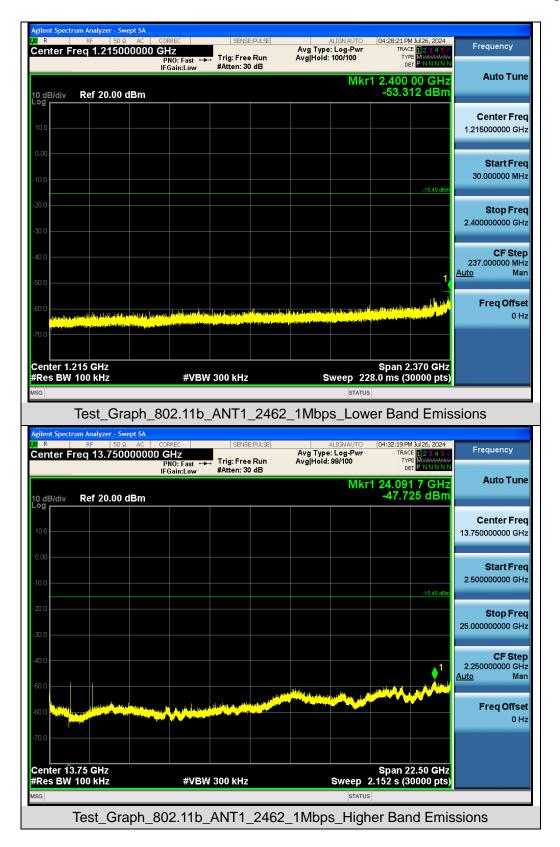




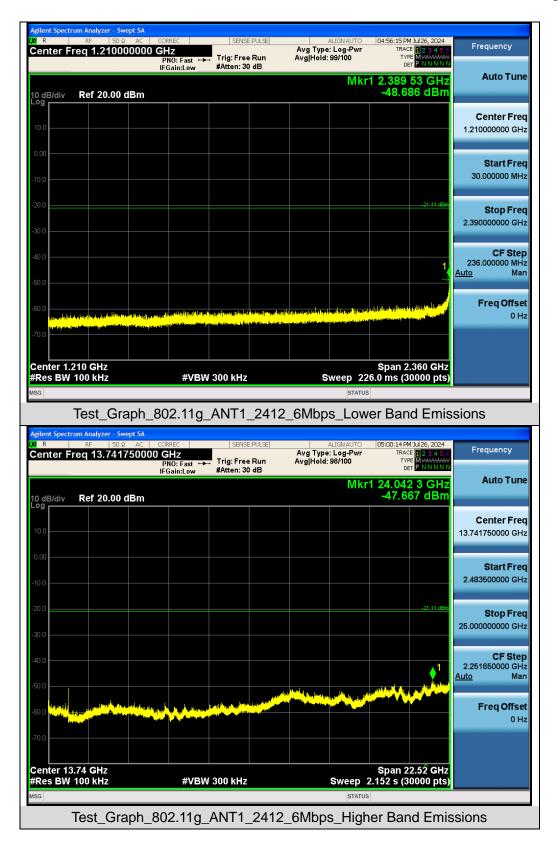




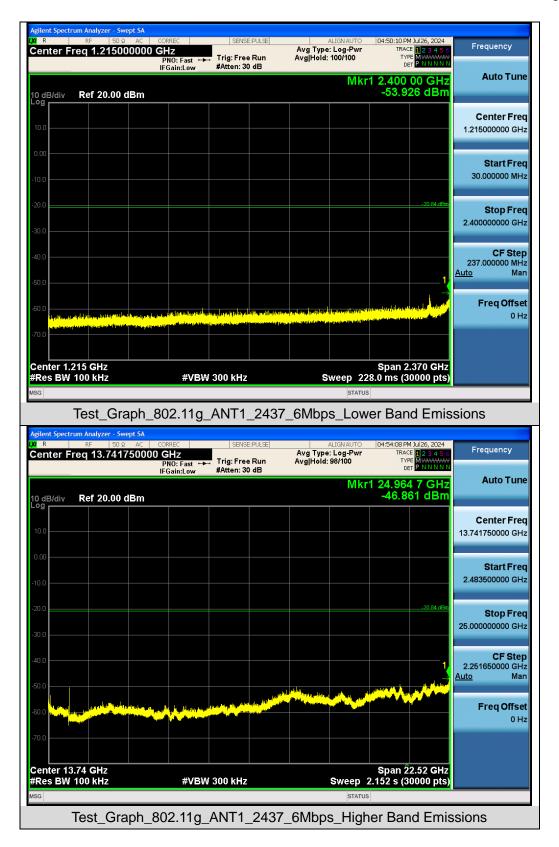




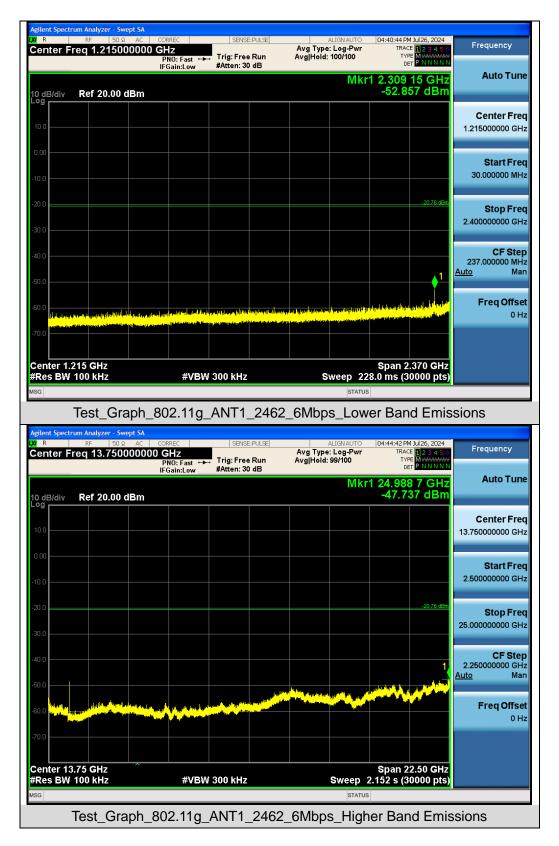




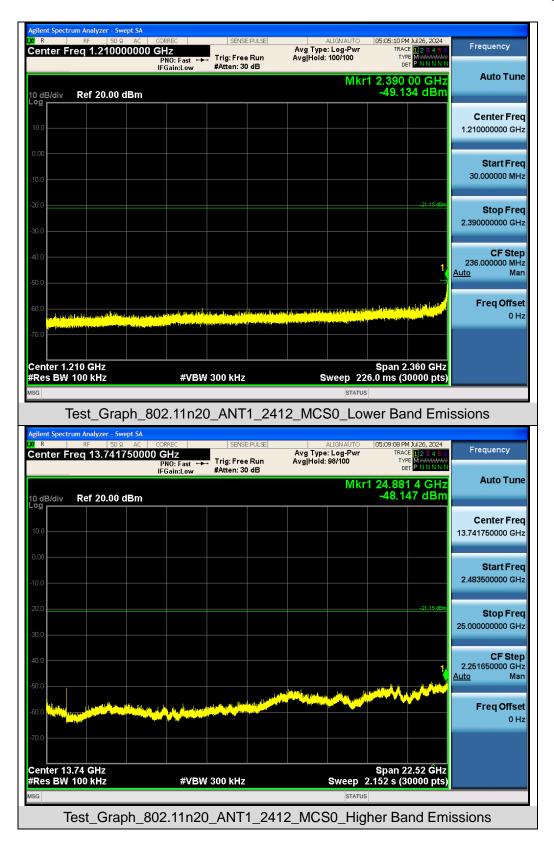




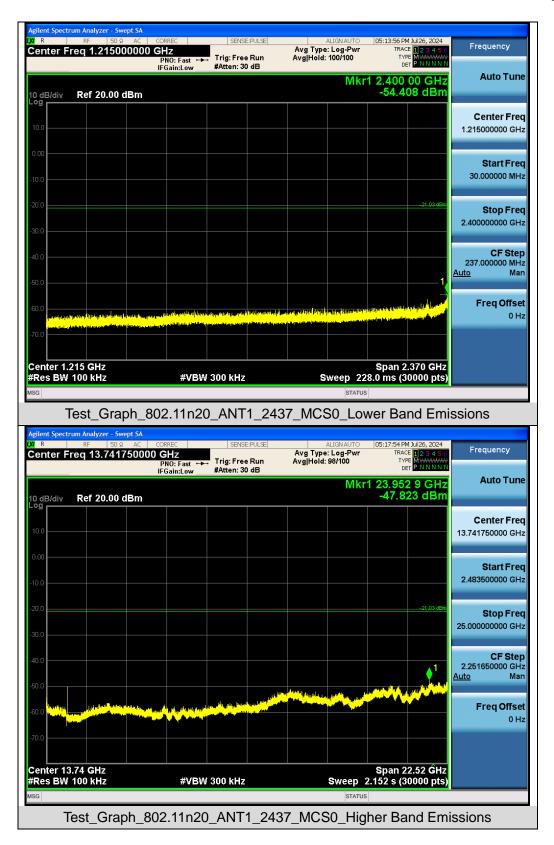




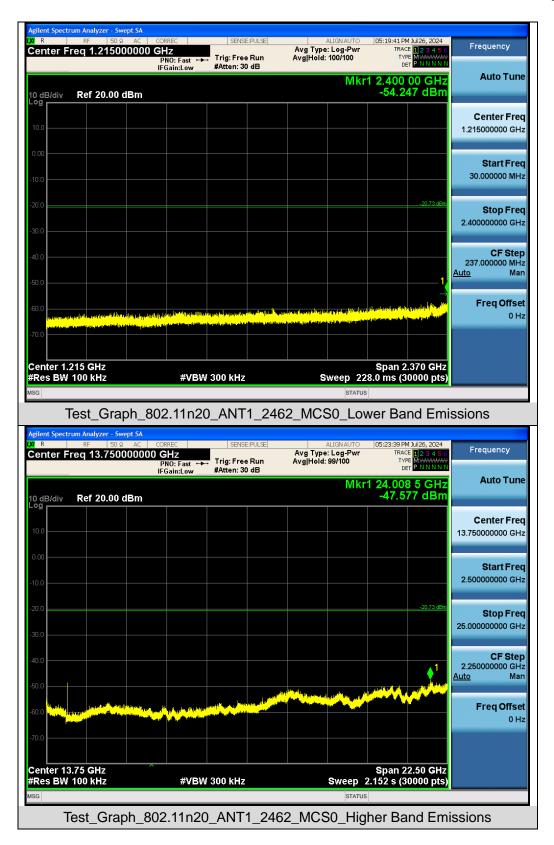




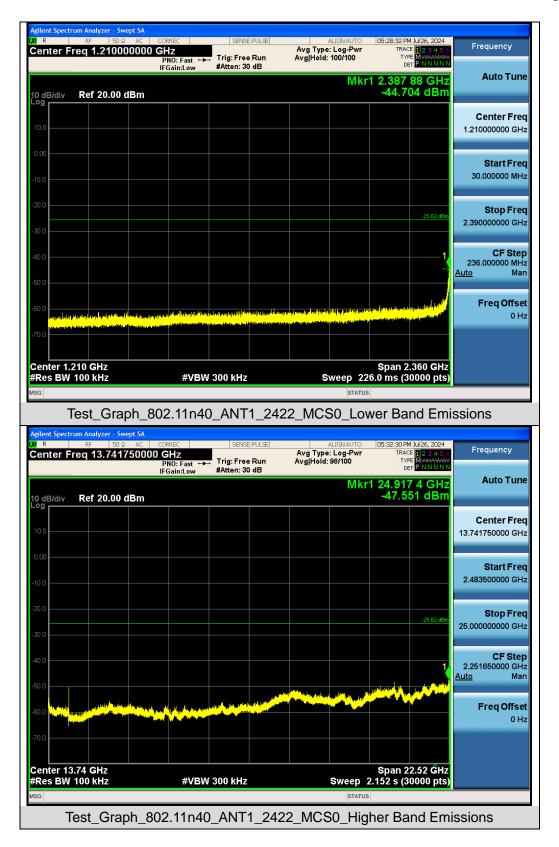



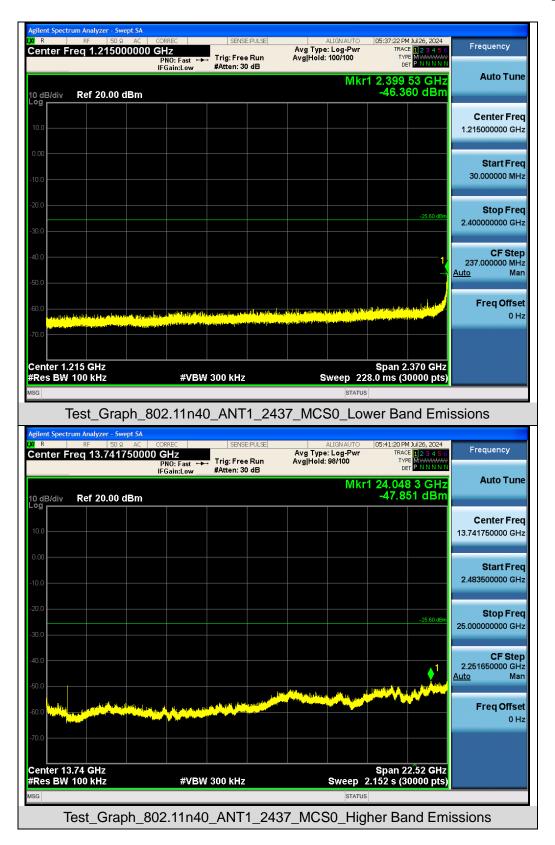



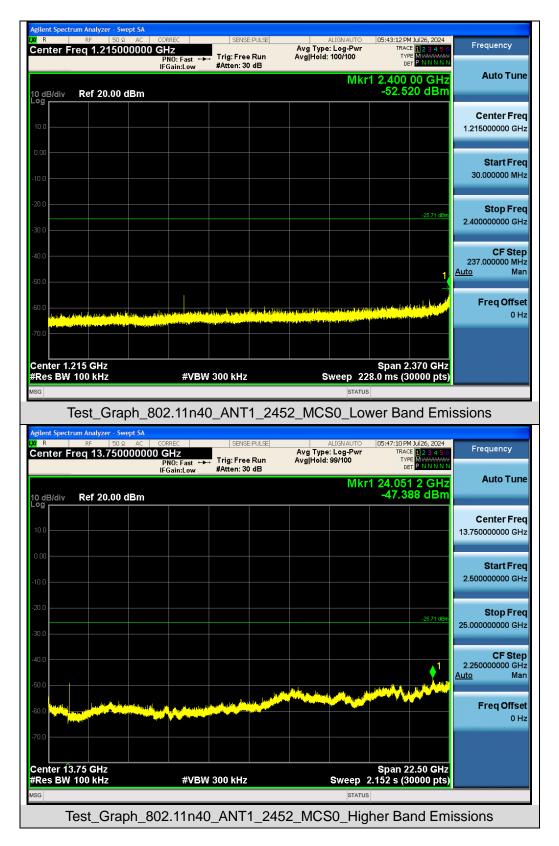






Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



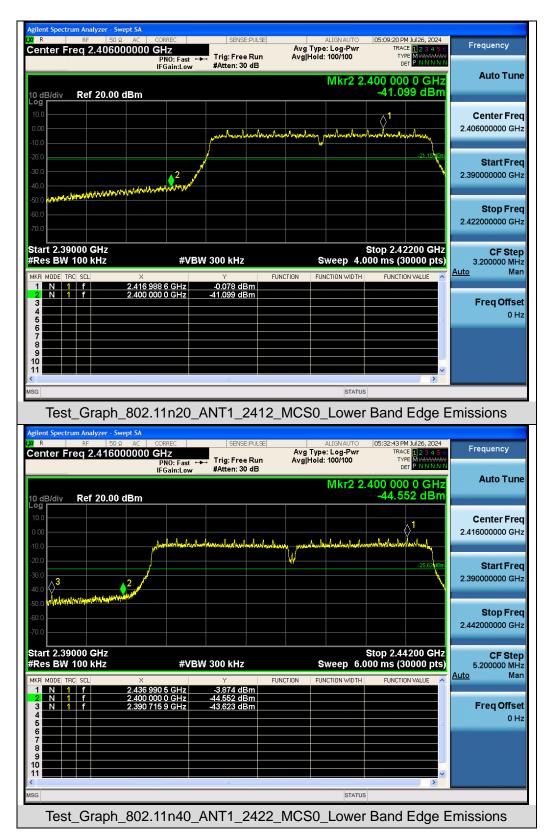



11. Radiated Spurious Emission

11.1 Measurement Limits

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.



As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9kHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP
Start ~Stop Frequency	1GHz~26.5GHz
	1MHz/3MHz for Peak, 1MHz/3MHz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9kHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP



• Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

• Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize


• Average Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW ≥ [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




11.3 Measurement Setup (Block Diagram of Configuration)




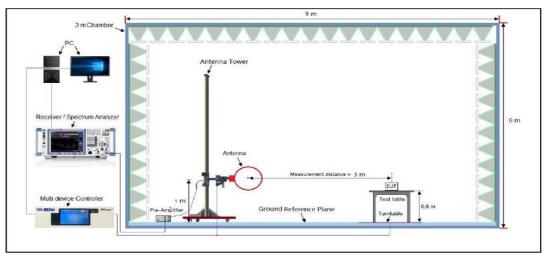

Radiated Emission Test Setup 30MHz-1000MHz

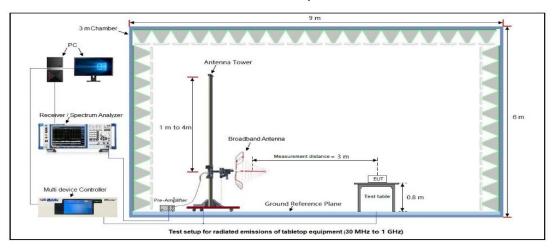

Radiated Emission Test Setup Above 1000MHz

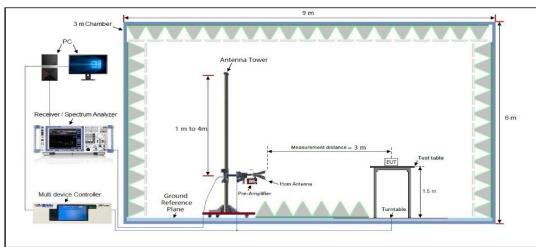

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



11.4 Measurement Result

Radiated Emission at 9kHz-30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

				Ra	diat	ed E	missi	on Te	st Re	sults	at 30	0Mł	Hz-1	GHz	Z					
EUT Name		Wire	eless l	IP Ca	amei	ra				N	lodel	I Na	ıme			Ce	688			
Temperature	•	22.4	l℃							R	elati	ve	Hum	idit	у	56	6.8 %			
Pressure		960	hPa							Т	est V	/olta	age			DC 5V by ada			dapter	
Test Mode		Мос	le 9							Α	nten	na	Pola	arity	,	Но	Horizontal			
72.0	dBul																			
/2.0	aBuv	· /m														Limit:	imit: —			
_																Margi	n: •			
_																				
_						┛												6		
32						┛						X		X	ļ	5	لمملى	140		
52						1 X				2 X			highly	γŢ,	Jonhall	Mariana di Angelanda di Angelanda Angelanda di Angelanda	V.M			
_	4.1	Martin	te dupular at	hanthalter	merel	M	www.Maywaya	harrow	nent	m 144	Anna and	and the second								
**	aber were	r			and their			- 1	a frage a											
-																				
_																				
-8																				
30 . 	000	40	50	60	70 80				Hz)			00	40	0	500 (500 70	00 1	000.000)	
	No	. Mł	<	Freq		Rea: Lev	-	Cor	rect ctor		asure nent	e-	Lin	nit	٥	/er				
-				MHz	·	dBi		d			JV/m		dBu			в	Dete	ector		
-	1			589		11.		14			1.31		43.5		-17			ak		
-	2		217			14.		14			1.44		46.0		-17		-	ak		
-	- 3		350.			18.			.36		i.11		46.0		-9.			ak		
-																				
-	4		457.				77	24			1.26		46.0			.74		ak		
_	5		603.				04	25			2.16		46.0		-13			ak		
	6	*	900.	.147	4	7.	26	31	78	39	1.04		46.0)0	-6.	96	pe	ak		
-																				



Radiated Emission Test Results at 30MHz-1GHz																		
EUT Name		Wire	eless	IP C	ame	ra				Mode	el N	lame	•		С	688		
Temperature		22.4	ŀ℃							Relat	tive	Hur	nidi	ity	5	6.8 '	%	
Pressure		960	hPa							Test	Vol	tage			D	DC 5V by adapter		dapter
Test Mode		Мос	le 9							Ante	nna	a Pol	arit	у	V	Vertical		
72.0	dBu	√/m									Limit	imit: —						
															Marg	jin:		
						2									F			
32						-M	~		3				4		J Jun	hugh	an the	
		MARINA	Window		لمرا	JĽ	M.		rŀ	Wmudu	ant w	hendry	14	hanne	M.W			
h	Walterto	"W	IN Deal WINE	white	WM.A			Where the water of the second states of the second				r						
-8	000	40	50	60	70 8	30		(MHz)		3	300	40		500	600 7	'00	1000.00)
-						Rea	ding	Correct	M	easur	re-							
	No	. MI	K.	Fre	q .	Le	-	Factor		ment		Lir	nit	С)ver			
-				MHz	:	dB	IuV	dB	0	iBuV/m)	dBu	V/m	1	dB	De	etector	
_	1	*	87	.417	'6	19	.07	15.90		34.97		40.	00	-5	5.03	(QP	
-	2	2	90	.537	'4	22	.50	15.48		37.98		43.	50	-5	5.52	p	eak	
-	3		214	.514	2	15	.78	16.81		32.59		43.	50	-1	0.91	ŗ	eak	
-	4	-	446	.414	1	8	.79	25.81		34.60		46.	00	-1	1.40	p	eak	
-	5	i	651	.941	6	9	.31	26.98		36.29		46.	00	-9	9.71	p	eak	
-	6	i	942	.130)4	6	.01	30.91		36.92		46.	00	-9	8.08	p	eak	
-																		

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.



EUT Name		Wireless IF	P Camera		Mode	I Name	C688			
Temperature		22.4 ℃			Relati	ive Humidity	56.8 %			
Pressure		960hPa			Test \	/oltage	DC 5V by	adapter		
Test Mode		Mode 7			Anter	nna Polarity	Horizonta			
		I								
Frequency	Met	er Reading	Factor	Emissio	sion Level Limits		Margin	Value Trees		
(MHz)		(dBµV)	(dB)	(dBµ\	//m)	(dBµV/m)	(dB)	Value Type		
4824.000		46.33	0.08	46.4	41	74	-27.59	peak		
4824.000		37.69	0.08	37.7	77	54	-16.23	AVG		
7236.000		41.71	2.21	43.9	92	74	-30.08	peak		
7236.000		32.05	2.21	34.2	26	54	-19.74	AVG		
Remark:										
Factor = Anten	na Fa	actor + Cabl	e Loss – Pre-	amplifier.						
EUT Name		Wireless IF	^o Camera		Mode	l Name	C688			
Temperature		22.4 ℃			Relati	ative Humidity 56.8 %				
Pressure		960hPa			Test \	/oltage	DC 5V by	DC 5V by adapter		
Test Mode		Mode 7			Anter	nna Polarity	Vertical			
Frequency	Met	er Reading	Factor	Emissio	n Level	Limits	Margin			
Frequency (MHz)	Met	er Reading (dBµV)	Factor (dB)	Emissio (dBµ\		Limits (dBµV/m)	Margin (dB)	Value Type		
	Met				//m)			Value Type		
(MHz)	Met	(dBµV)	(dB)	(dBµ\	//m) 78	(dBµV/m)	(dB)			
(MHz) 4824.000	Met	(dBµV) 46.70	(dB) 0.08	(dBµ\ 46.7	//m) 78 33	(dBµV/m) 74	(dB) -27.22	peak		
(MHz) 4824.000 4824.000	Met	(dBµV) 46.70 37.25	(dB) 0.08 0.08	(dBµ\ 46.7 37.3	//m) 78 33 03	(dBµV/m) 74 54	(dB) -27.22 -16.67	peak AVG		
(MHz) 4824.000 4824.000 7236.000		(dBµV) 46.70 37.25 41.82	(dB) 0.08 0.08 2.21	(dBµ\ 46.7 37.3 44.0	//m) 78 33 03	(dBµV/m) 74 54 74	(dB) -27.22 -16.67 -29.97	peak AVG peak		
(MHz) 4824.000 4824.000 7236.000		(dBµV) 46.70 37.25 41.82	(dB) 0.08 0.08 2.21	(dBµ\ 46.7 37.3 44.0	//m) 78 33 03	(dBµV/m) 74 54 74	(dB) -27.22 -16.67 -29.97	peak AVG peak		

Radiated Emissions Test Results above 1 GHz

RESULT: Pass



EUT Name		Wireless IP	Camera		Model	Namo	C688			
			Camera							
Temperature		22.4 ℃			Relativ	ve Humidity	56.8 %	56.8 %		
Pressure		960hPa			Test V	oltage	DC 5V by adapter			
Test Mode		Mode 8			Anten	na Polarity	Horizontal			
		I								
Frequency	Met	er Reading	Factor	Emissio	n Level	Limits	Margin			
(MHz)		(dBµV)	(dB)	(dBµ'	V/m)	(dBµV/m)	(dB)	Value Type		
4874.000		46.93	0.08	47.	01	74	-26.99	peak		
4874.000		37.98	0.08	38.	06	54	-15.94	AVG		
7311.000		41.15	2.21	43.	36	74	-30.64	peak		
7311.000		32.89	2.21	35.	10	54	-18.90	AVG		
Remark: Factor = Anter	na Fa	actor + Cable	e Loss – Pre-	amplifier.						
EUT Name		Wireless IP	Camera		Model	Name	C688			
Temperature		22.4 ℃			Relativ	ve Humidity	56.8 %	56.8 %		
Pressure		960hPa			Test V	oltage	DC 5V by a	DC 5V by adapter		
Test Mode		Mode 8			Anten	na Polarity	Vertical			
Frequency	Met	er Reading	Factor	Emissio		Limits	Margin	Value Type		
(MHz)	Met	(dBµV)	(dB)	(dBµ'	V/m)	(dBµV/m)	(dB)	Value Type		
(MHz) 4874.000	Met	(dBµV) 46.20	(dB) 0.08	(dBµ' 46.	V/m) 28	(dBµV/m) 74	(dB) -27.72	peak		
(MHz) 4874.000 4874.000	Met	(dBµV) 46.20 37.12	(dB) 0.08 0.08	(dBµ) 46. 37.	V/m) 28 20	(dBµV/m) 74 54	(dB) -27.72 -16.80	peak AVG		
(MHz) 4874.000 4874.000 7311.000	Met	(dBµV) 46.20 37.12 41.89	(dB) 0.08 0.08 2.21	(dBµ) 46. 37. 44.	V/m) 28 20 10	(dBµV/m) 74 54 74	(dB) -27.72 -16.80 -29.90	peak AVG peak		
(MHz) 4874.000 4874.000	Met	(dBµV) 46.20 37.12	(dB) 0.08 0.08	(dBµ) 46. 37.	V/m) 28 20 10	(dBµV/m) 74 54	(dB) -27.72 -16.80	peak AVG		
(MHz) 4874.000 4874.000 7311.000 7311.000	Met	(dBµV) 46.20 37.12 41.89	(dB) 0.08 0.08 2.21	(dBµ) 46. 37. 44.	V/m) 28 20 10	(dBµV/m) 74 54 74	(dB) -27.72 -16.80 -29.90	peak AVG peak		
(MHz) 4874.000 4874.000 7311.000		(dBµV) 46.20 37.12 41.89 32.97	(dB) 0.08 0.08 2.21 2.21	(dBµ) 46. 37. 44. 35.	V/m) 28 20 10	(dBµV/m) 74 54 74	(dB) -27.72 -16.80 -29.90	peak AVG peak		

Radiated Emissions Test Results above 1GHz

RESULT: Pass



EUT Name		Wireless IP	Camera		Model	Name	C688			
Temperature		22.4 ℃			Relativ	e Humidity	56.8 %			
Pressure		960hPa			Test Vo	oltage	DC 5V by	y adapter		
Test Mode		Mode 9			Antenr	na Polarity	Horizonta	al		
		I								
Frequency	Me	ter Reading	Factor	Emissi	on Level	Limits	Margin			
(MHz)		(dBµV)	(dB)	(dB	uV/m)	(dBµV/m)	(dB)	Value Type		
4924.000		46.05	0.08	46	6.13	74	-27.87	peak		
4924.000		37.51	0.08	37	7.59	54	-16.41	AVG		
7386.000		41.08	2.21	43	3.29 74		-30.71	peak		
7386.000		32.65	2.21	34	1.86	54	-19.14	AVG		
Remark:										
Factor = Anten	na Fa	actor + Cabl	e Loss – Pre-	amplifier.						
EUT Name		Wireless IP	Camera		Model	Name	C688			
Temperature		22.4 ℃			Relativ	e Humidity	56.8 %	56.8 %		
Pressure		960hPa			Test Vo	oltage	DC 5V by	y adapter		
Test Mode		Mode 9			Antenr	na Polarity	Vertical			
Frequency		Meter Reading	Factor	Emissio	on Level	Limits	Margin	Value Type		
(MHz)		(dBµV)	(dB)	· ·	V/m)	(dBµV/m)	(dB)			
4924.000		46.61	0.08		.69	74	-27.31	peak		
4924.000		37.18	0.08		.26	54	-16.74	AVG		
7386.000		41.16	2.21		.37	74	-30.63	peak		
7386.000		32.99	2.21	35	.20	54	-18.80	AVG		
								<u> </u>		
Davisari										
Remark:		F () A								
Factor = An	tenna	+actor + Cal	ole Loss – Pre-	amplifier.						

Radiated Emissions Test Results above 1GHz

RESULT: Pass

Note:

- The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB 1. below the permissible value need not be reported.
- Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit. 2.
- 3. The "Factor" value can be calculated automatically by software of measurement system.




EUT Name	Wireless IP Camera	Model Name	C688
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 5V by adapter
Test Mode	Mode 1	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

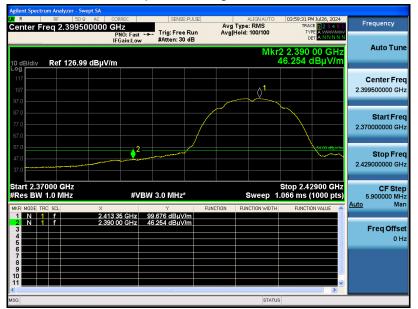

RESULT: Pass