



**Shenzhen Global Test Service Co.,Ltd.**

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

## FCC PART 15 SUBPART C TEST REPORT

### FCC PART 15.247

**Report Reference No.**.....: **GTS20210517015-1-1**

**FCC ID**.....: **2ANXIS10BT418**

Compiled by  
( position+printed name+signature)..: File administrators Jimmy Wang

Supervised by  
( position+printed name+signature)..: Test Engineer Aaron Tan



Approved by  
( position+printed name+signature)..: Manager Jason Hu

Date of issue.....: May 18, 2021

**Representative Laboratory Name .:** **Shenzhen Global Test Service Co., Ltd.**

Address.....: No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

**Applicant's name**.....: **Comson (Shenzhen) Electronic Technology Co.,Ltd.**

Address .....: 3rd Floor, Building 22#, No. 6 Xingye 1st road, Fenghuang Community, Fuyong, Bao'an District, Shenzhen, 518103, China

**Test specification** .....

Standard.....: **FCC Part 15.247**

TRF Originator.....: Shenzhen Global Test Service Co.,Ltd.

Master TRF.....: Dated 2014-12

**Shenzhen Global Test Service Co.,Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description** .....

Trade Mark.....: **COMSON<sup>®</sup>**

**Manufacturer**.....: **Comson (Shenzhen) Electronic Technology Co.,Ltd.**

Model/Type reference.....: S10

Listed Models .....: S10X, BT-418, BT10, BT10X, BT-416

Ratings .....: DC 7.4V by Rechargeable Li-ion Battery  
Charging power input: 5V $\overline{=}$ 2A

Modulation .....: GFSK,  $\Pi$ /4DQPSK, 8DPSK

Hardware version .....: REV:0.1

Software version .....: V1.0

Frequency.....: From 2402MHz to 2480MHz

Result.....: **PASS**

# TEST REPORT

|                          |                           |               |
|--------------------------|---------------------------|---------------|
| <b>Test Report No. :</b> | <b>GTS20210517015-1-1</b> | May 18, 2021  |
|                          |                           | Date of issue |

Equipment under Test : Soundbar Bluetooth Speaker

Model /Type : S10

Listed Models : S10X, BT-418, BT10, BT10X, BT-416

**Applicant** : **Comson (Shenzhen) Electronic Technology Co.,Ltd.**

Address : 3rd Floor, Building 22#, No. 6 Xingye 1st road, Fenghuang Community, Fuyong, Bao'an District, Shenzhen, 518103, China

**Manufacturer** : **Comson (Shenzhen) Electronic Technology Co.,Ltd.**

Address : 3rd Floor, Building 22#, No. 6 Xingye 1st road, Fenghuang Community, Fuyong, Bao'an District, Shenzhen, 518103, China

|                     |             |
|---------------------|-------------|
| <b>Test Result:</b> | <b>PASS</b> |
|---------------------|-------------|

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

|                 |   |                  |
|-----------------|---|------------------|
| <b><u>1</u></b> | <b><u>TEST STANDARDS .....</u></b>                  | <b><u>4</u></b>  |
| <b><u>2</u></b> | <b><u>SUMMARY .....</u></b>                         | <b><u>5</u></b>  |
| 2.1             | General Remarks                                     | 5                |
| 2.2             | Product Description                                 | 5                |
| 2.3             | Test Sample   | 5                |
| 2.4             | Equipment Under Test                                | 5                |
| 2.5             | Short description of the Equipment under Test (EUT) | 6                |
| 2.6             | EUT operation mode                                  | 6                |
| 2.7             | Block Diagram of Test Setup                         | 6                |
| 2.8             | Special Accessories                                 | 6                |
| 2.9             | Related Submittal(s) / Grant (s)                    | 6                |
| 2.10            | Modifications                                       | 6                |
| <b><u>3</u></b> | <b><u>TEST ENVIRONMENT .....</u></b>                | <b><u>7</u></b>  |
| 3.1             | Address of the test laboratory                      | 7                |
| 3.2             | Test Facility                                       | 7                |
| 3.3             | Environmental conditions                            | 7                |
| 3.4             | Summary of measurement results                      | 8                |
| 3.5             | Statement of the measurement uncertainty            | 8                |
| 3.6             | Equipments Used during the Test                     | 9                |
| <b><u>4</u></b> | <b><u>TEST CONDITIONS AND RESULTS.....</u></b>      | <b><u>10</u></b> |
| 4.1             | AC Power Conducted Emission                         | 10               |
| 4.2             | Radiated Emission                                   | 13               |
| 4.3             | Maximum Peak Output Power                           | 19               |
| 4.4             | 20dB Bandwidth                                      | 20               |
| 4.5             | Frequency Separation                                | 24               |
| 4.6             | Number of hopping frequency                         | 26               |
| 4.7             | Time of Occupancy (Dwell Time)                      | 28               |
| 4.8             | Out-of-band Emissions                               | 32               |
| 4.9             | Pseudorandom Frequency Hopping Sequence             | 40               |
| 4.10            | Antenna Requirement                                 | 41               |
| <b><u>5</u></b> | <b><u>TEST SETUP PHOTOS OF THE EUT .....</u></b>    | <b><u>42</u></b> |
| <b><u>6</u></b> | <b><u>PHOTOS OF THE EUT .....</u></b>               | <b><u>43</u></b> |

# **1 TEST STANDARDS**

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

## 2 SUMMARY

### 2.1 General Remarks

|                                |   |               |
|--------------------------------|---|---------------|
| Date of receipt of test sample | : | Apr. 22, 2021 |
|                                |   |               |
| Testing commenced on           | : | Apr. 23, 2021 |
|                                |   |               |
| Testing concluded on           | : | May 06, 2021  |

### 2.2 Product Description

|                       |   |
|-----------------------|---|
| Product Description:  | Soundbar Bluetooth Speaker  |
| Model/Type reference: | S10   |
| Listed Models:        | S10X, BT-418, BT10, BT10X, BT-416   |
| Model Difference:     | PCB board, circuit, structure and internal of these model(s) are the same, Only color and model number is different for these models. |
| Power supply:         | DC 7.4V by Rechargeable Li-ion Battery<br>Charging power input: 5V $\overline{=}$ 2A  |
| Sample ID:            | GTS20210517015-1-1#/ GTS20210517015-1-2#  |
| <b>Bluetooth :</b>    |   |
| Supported Type:       | Bluetooth BR/EDR  |
| Modulation:           | GFSK, $\pi/4$ DQPSK, 8DPSK  |
| Operation frequency:  | 2402MHz~2480MHz   |
| Channel number:       | 79  |
| Channel separation:   | 1MHz  |
| Antenna type:         | PCB antenna   |
| Antenna gain:         | 0 dBi   |

### 2.3 Test Sample

The application provides 2 samples to meet requirement.

| Sample Number       | Description                           |
|---------------------|---------------------------------------|
| GTS20210517015-1-1# | Engineer sample – continuous transmit |
| GTS20210517015-1-2# | Normal sample – Intermittent transmit |

### 2.4 Equipment Under Test

#### Power supply system utilised

|                      |   |   |                                   |
|----------------------|---|---|-----------------------------------|
| Power supply voltage | : | <input type="radio"/> 230V / 50 Hz                                | <input type="radio"/> 120V / 60Hz |
|                      |   | <input type="radio"/> 12 V DC                                     | <input type="radio"/> 24 V DC     |
|                      |   | <input checked="" type="radio"/> Other (specified in blank below) |                                   |

DC 7.4V from battery

### 2.5 Short description of the Equipment under Test (EUT)

This is a Soundbar Bluetooth Speaker.

For more details, refer to the user’s manual of the EUT.


### 2.6 EUT operation mode

The Applicant provides communication tools software(FrequencyTool\_v0.3.0.exe) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 79 channels provided to the EUT and Channel 00/39/78 were selected to test.

#### Operation Frequency:

| Channel | Frequency (MHz) |
|---------|-----------------|
| 00      | 2402            |
| 01      | 2403            |
| ⋮       | ⋮               |
| 38      | 2440            |
| 39      | 2441            |
| 40      | 2442            |
| ⋮       | ⋮               |
| 77      | 2479            |
| 78      | 2480            |

### 2.7 Block Diagram of Test Setup

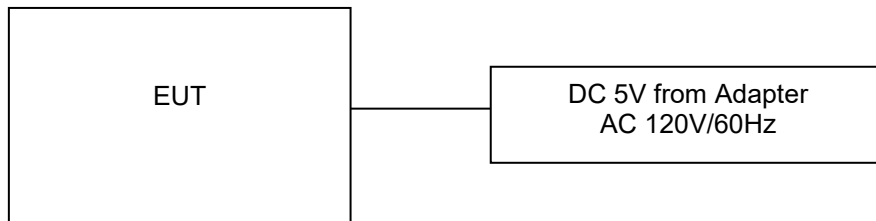

### 2.8 Special Accessories

Follow auxiliary equipment(s) test with EUT that provided by the manufacturer or laboratory is listed as follow:

| Description   | Manufacturer | Model      | Technical Parameters                              | Certificate | Provided by |
|---------------|--------------|------------|---|-------------|-------------|
| AC-DC Adapter | MOSO         | EP-TA10CBC | Input:AC100-240V-50/60Hz, 0.5A<br>Output:DC 5V,1A | FCC         | Laboratory  |
| /             | /            | /          | /   | /           | /           |
| /             | /            | /          | /   | /           | /           |
| /             | /            | /          | /   | /           | /           |

### 2.9 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for the device filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

### 2.10 Modifications

No modifications were implemented to meet testing criteria.

### **3 TEST ENVIRONMENT**

#### **3.1 Address of the test laboratory**

**Shenzhen Global Test Service Co.,Ltd.**

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

#### **3.2 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

**FCC-Registration No.: 165725**

Shenzhen Global Test Service Co.,Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

**A2LA-Lab Cert. No.: 4758.01**

Shenzhen Global Test Service Co.,Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

**CNAS-Lab Code: L8169**

Shenzhen Global Test Service Co.,Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories. Date of Registration: Dec. 11, 2015. Valid time is until Dec. 10, 2024.

#### **3.3 Environmental conditions**

During the measurement the environmental conditions were within the listed ranges:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 15-35 ° C    |
| Humidity:             | 30-60 %      |
| Atmospheric pressure: | 950-1050mbar |

### 3.4 Summary of measurement results

| Test Specification clause | Test case  | Test Sample          | Test Mode                 | Test Channel  | Recorded In Report        |   | Test result |
|---------------------------|--|----------------------|---------------------------|---|---------------------------|---|-------------|
| §15.247(a)(1)             | Carrier Frequency separation                       | GTS20210517 015-1-1# | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Middle  | Compliant   |
| §15.247(a)(1)             | Number of Hopping channels                         | GTS20210517 015-1-1# | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Full  | GFSK<br>8DPSK             | <input checked="" type="checkbox"/> Full  | Compliant   |
| §15.247(a)(1)             | Time of Occupancy (dwell time)                     | GTS20210517 015-1-1# | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Middle  | Compliant   |
| §15.247(a)(1)             | Spectrum bandwidth of a FHSS system 20dB bandwidth | GTS20210517 015-1-1# | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | Compliant   |
| §15.247(b)(1)             | Maximum output power                               | GTS20210517 015-1-1# | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | Compliant   |
| §15.247(d)                | Band edge compliance conducted                     | GTS20210517 015-1-1# | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Highest   | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Highest   | Compliant   |
| §15.205                   | Band edge compliance radiated                      | GTS20210517 015-1-1# | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Highest   | GFSK                      | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Highest   | Compliant   |
| §15.247(d)                | TX spurious emissions conducted                    | GTS20210517 015-1-1# | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | Compliant   |
| §15.247(d)<br>§15.209(a)  | TX spurious emissions Radiated Above 1GHz          | GTS20210517 015-1-1# | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK                      | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | Compliant   |
| §15.209(a)                | TX spurious Emissions radiated Below 1GHz          | GTS20210517 015-1-2# | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK                      | <input checked="" type="checkbox"/> Middle  | Compliant   |
| §15.107(a)<br>§15.207     | Conducted Emissions 9KHz-30 MHz                    | GTS20210517 015-1-2# | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK                      | <input checked="" type="checkbox"/> Middle  | Compliant   |

Remark:

1. The measurement uncertainty is not included in the test result.
2. We tested all test mode and recorded worst case in report

### 3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Global Test Service Co.,Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GTS laboratory is reported:

| Test                  | Range      | Measurement Uncertainty | Notes |
|-----------------------|------------|-------------------------|-------|
| Radiated Emission     | 30~1000MHz | 4.10 dB                 | (1)   |
| Radiated Emission     | 1~18GHz    | 4.32 dB                 | (1)   |
| Radiated Emission     | 18-40GHz   | 5.54 dB                 | (1)   |
| Conducted Disturbance | 0.15~30MHz | 3.12 dB                 | (1)   |

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



### 3.6 Equipments Used during the Test


| Test Equipment             | Manufacturer                      | Model No.             | Serial No.      | Calibration Date | Calibration Due Date |
|----------------------------|-----------------------------------|-----------------------|-----------------|------------------|----------------------|
| LISN                       | R&S                               | ENV216                | 3560.6550.08    | 2020/09/19       | 2021/09/18           |
| LISN                       | R&S                               | ESH2-Z5               | 893606/008      | 2020/09/19       | 2021/09/18           |
| EMI Test Receiver          | R&S                               | ESPI3                 | 101841-cd       | 2020/09/19       | 2021/09/18           |
| EMI Test Receiver          | R&S                               | ESCI7                 | 101102          | 2020/09/19       | 2021/09/18           |
| Spectrum Analyzer          | Agilent                           | N9020A                | MY48010425      | 2020/09/19       | 2021/09/18           |
| Spectrum Analyzer          | R&S                               | FSV40                 | 100019          | 2020/09/19       | 2021/09/18           |
| Vector Signal generator    | Agilent                           | N5181A                | MY49060502      | 2020/09/19       | 2021/09/18           |
| Spectrum Analyzer          | Agilent                           | E4421B                | 3610AO1069      | 2020/09/19       | 2021/09/18           |
| Climate Chamber            | ESPEC                             | EL-10KA               | A20120523       | 2020/09/19       | 2021/09/18           |
| Controller                 | EM Electronics                    | Controller EM 1000    | N/A             | N/A              | N/A                  |
| Horn Antenna               | Schwarzbeck                       | BBHA 9120D            | 01622           | 2020/09/19       | 2021/09/18           |
| Active Loop Antenna        | Beijing Da Ze Technology Co.,Ltd. | ZN30900C              | 15006           | 2020/10/11       | 2021/10/10           |
| Bilog Antenna              | Schwarzbeck                       | VULB9163              | 000976          | 2020/05/26       | 2021/05/25           |
| Broadband Horn Antenna     | SCHWARZBECK                       | BBHA 9170             | 791             | 2020/09/19       | 2021/09/18           |
| Amplifier                  | Schwarzbeck                       | BBV 9743              | #202            | 2020/09/19       | 2021/09/18           |
| Amplifier                  | Schwarzbeck                       | BBV9179               | 9719-025        | 2020/09/19       | 2021/09/18           |
| Amplifier                  | EMCI                              | EMC051845B            | 980355          | 2020/09/19       | 2021/09/18           |
| Temperature/Humidity Meter | Gangxing                          | CTH-608               | 02              | 2020/09/19       | 2021/09/18           |
| High-Pass Filter           | K&L                               | 9SH10-2700/X12750-O/O | KL142031        | 2020/09/19       | 2021/09/18           |
| High-Pass Filter           | K&L                               | 41H10-1375/U12750-O/O | KL142032        | 2020/09/19       | 2021/09/18           |
| RF Cable(below 1GHz)       | HUBER+SUHNER                      | RG214                 | RE01            | 2020/09/19       | 2021/09/18           |
| RF Cable(above 1GHz)       | HUBER+SUHNER                      | RG214                 | RE02            | 2020/09/19       | 2021/09/18           |
| Data acquisition card      | Agilent                           | U2531A                | TW53323507      | 2020/09/19       | 2021/09/18           |
| Power Sensor               | Agilent                           | U2021XA               | MY5365004       | 2020/09/19       | 2021/09/18           |
| Test Control Unit          | Tonscend                          | JS0806-1              | 178060067       | 2020/06/19       | 2021/06/18           |
| Automated filter bank      | Tonscend                          | JS0806-F              | 19F8060177      | 2020/06/19       | 2021/06/18           |
| EMI Test Software          | Tonscend                          | JS1120-1              | Ver 2.6.8.0518  | /                | /                    |
| EMI Test Software          | Tonscend                          | JS1120-3              | Ver 2.5.77.0418 | /                | /                    |
| EMI Test Software          | Tonscend                          | JS32-CE               | Ver 2.5         | /                | /                    |
| EMI Test Software          | Tonscend                          | JS32-RE               | Ver 2.5.1.8     | /                | /                    |

Note: The Cal.Interval was one year.

## 4 TEST CONDITIONS AND RESULTS

### 4.1 AC Power Conducted Emission

#### TEST CONFIGURATION

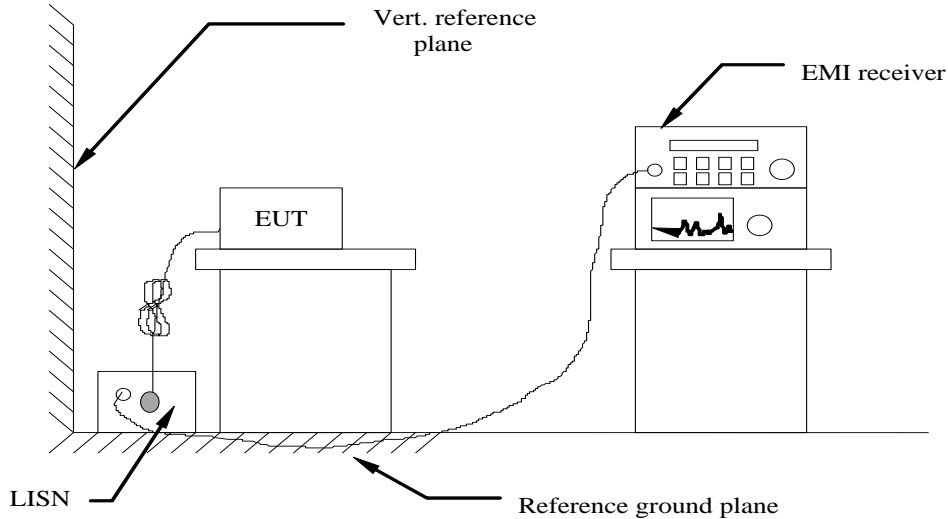

#### TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC 5V power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

#### AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

| Frequency range (MHz) | Limit (dBuV) |           |
|-----------------------|--------------|-----------|
|                       | Quasi-peak   | Average   |
| 0.15-0.5              | 66 to 56*    | 56 to 46* |
| 0.5-5                 | 56           | 46        |
| 5-30                  | 60           | 50        |

\* Decreases with the logarithm of the frequency.

**TEST RESULTS**


|               |          |                |     |
|---------------|----------|----------------|-----|
| Temperature   | 22.8°C   | Humidity       | 56% |
| Test Engineer | Moon Tan | Configurations | BT  |

Remark:

1. All modes of GFSK, Pi/4 DQPSK, and 8DPSK were test at Low, Middle, and High channel; only the worst result of GFSK Middle Channel was reported as below:
2. Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:

|               |                          |              |   |
|---------------|--------------------------|--------------|---|
| Power supply: | AC<br>120V/60Hz(adapter) | Polarization | L |
|---------------|--------------------------|--------------|---|

**Test Graph**

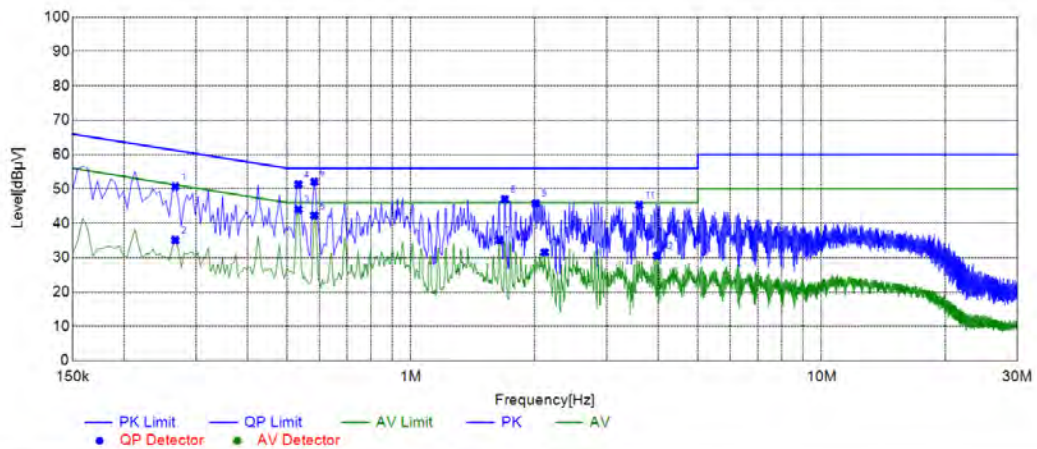

**Suspected List**


| NO. | Frequency [MHz] | Reading [dBµV] | Factor [dB] | Result [dBµV] | Limit [dBµV] | Margin [dB] | Detector | Line | Remark |
|-----|-----------------|----------------|-------------|---------------|--------------|-------------|----------|------|--------|
| 1   | 0.2670          | 40.71          | 10.00       | 50.71         | 61.21        | 10.50       | PK       | L1   | PASS   |
| 2   | 0.2670          | 25.09          | 10.00       | 35.09         | 51.21        | 16.12       | AV       | L1   | PASS   |
| 3   | 0.5325          | 33.97          | 10.06       | 44.03         | 46.00        | 1.97        | AV       | L1   | PASS   |
| 4   | 0.5325          | 41.32          | 10.06       | 51.38         | 56.00        | 4.62        | PK       | L1   | PASS   |
| 5   | 0.5820          | 32.16          | 10.06       | 42.22         | 46.00        | 3.78        | AV       | L1   | PASS   |
| 6   | 0.5820          | 42.03          | 10.06       | 52.09         | 56.00        | 3.91        | PK       | L1   | PASS   |
| 7   | 1.6440          | 25.00          | 10.12       | 35.12         | 46.00        | 10.88       | AV       | L1   | PASS   |
| 8   | 1.6935          | 36.92          | 10.13       | 47.05         | 56.00        | 8.95        | PK       | L1   | PASS   |
| 9   | 2.0130          | 35.71          | 10.15       | 45.86         | 56.00        | 10.14       | PK       | L1   | PASS   |
| 10  | 2.1165          | 21.39          | 10.17       | 31.56         | 46.00        | 14.44       | AV       | L1   | PASS   |
| 11  | 3.5970          | 34.91          | 10.37       | 45.28         | 56.00        | 10.72       | PK       | L1   | PASS   |
| 12  | 3.9750          | 20.17          | 10.41       | 30.58         | 46.00        | 15.42       | AV       | L1   | PASS   |

Note:1. Result (dBµV) = Reading (dBµV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

|               |                          |              |   |
|---------------|--------------------------|--------------|---|
| Power supply: | AC<br>120V/60Hz(adapter) | Polarization | N |
|---------------|--------------------------|--------------|---|

Test Graph

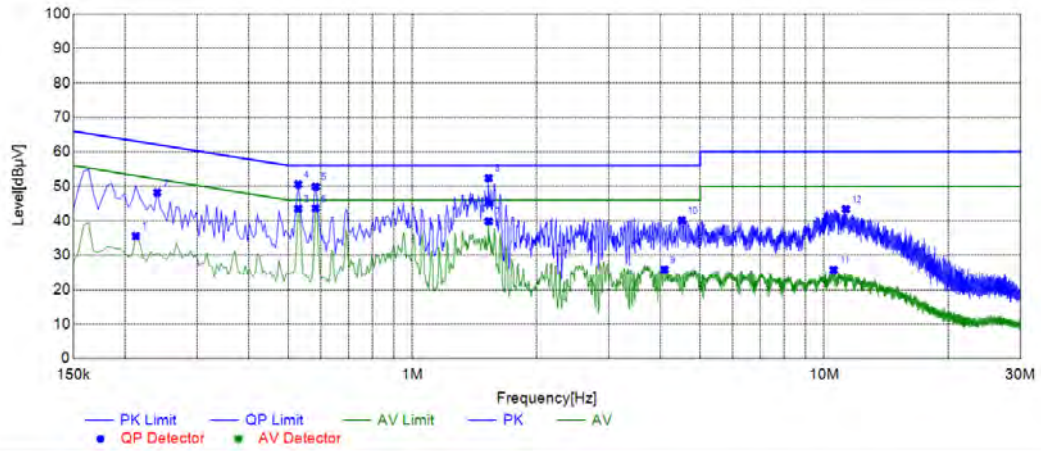


| Suspected List |                 |                |             |               |              |             |          |      |        |
|----------------|-----------------|----------------|-------------|---------------|--------------|-------------|----------|------|--------|
| NO.            | Frequency [MHz] | Reading [dBµV] | Factor [dB] | Result [dBµV] | Limit [dBµV] | Margin [dB] | Detector | Line | Remark |
| 1              | 0.2130          | 25.47          | 10.05       | 35.52         | 53.09        | 17.57       | AV       | N    | PASS   |
| 2              | 0.2400          | 38.18          | 10.03       | 48.21         | 62.10        | 13.89       | PK       | N    | PASS   |
| 3              | 0.5280          | 33.44          | 10.06       | 43.50         | 46.00        | 2.50        | AV       | N    | PASS   |
| 4              | 0.5280          | 40.52          | 10.06       | 50.58         | 56.00        | 5.42        | PK       | N    | PASS   |
| 5              | 0.5820          | 39.80          | 10.06       | 49.86         | 56.00        | 6.14        | PK       | N    | PASS   |
| 6              | 0.5820          | 33.59          | 10.06       | 43.65         | 46.00        | 2.35        | AV       | N    | PASS   |
| 7              | 1.5315          | 29.66          | 10.11       | 39.77         | 46.00        | 6.23        | AV       | N    | PASS   |
| 8              | 1.5315          | 42.33          | 10.11       | 52.44         | 56.00        | 3.56        | PK       | N    | PASS   |
| 9              | 4.0965          | 15.40          | 10.41       | 25.81         | 46.00        | 20.19       | AV       | N    | PASS   |
| 10             | 4.5105          | 29.70          | 10.45       | 40.15         | 56.00        | 15.85       | PK       | N    | PASS   |
| 11             | 10.5495         | 14.91          | 10.73       | 25.64         | 50.00        | 24.36       | AV       | N    | PASS   |
| 12             | 11.2920         | 32.60          | 10.78       | 43.38         | 60.00        | 16.62       | PK       | N    | PASS   |

Note:1. Result (dBµV) = Reading (dBµV) + Factor (dB).  
 2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).


### 4.2 Radiated Emission

#### TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

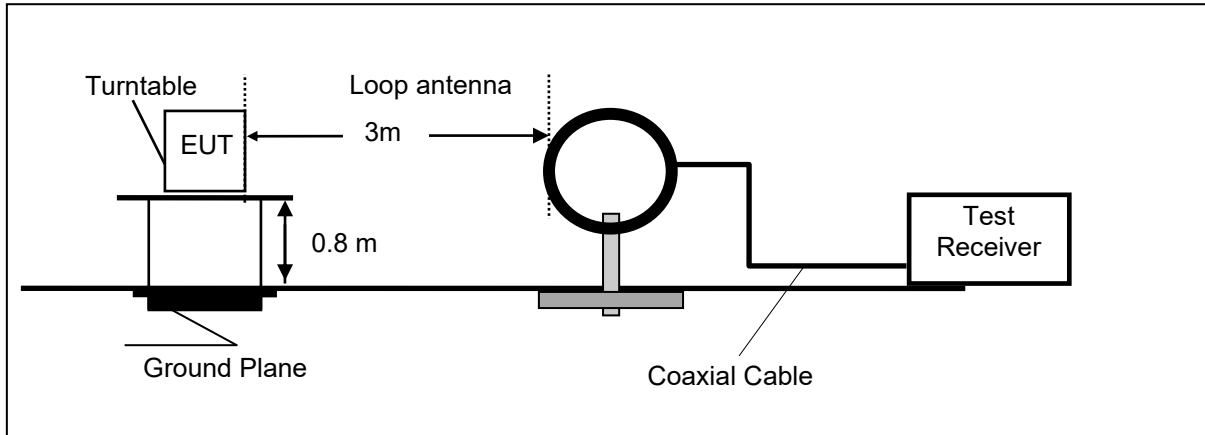

Frequency range 30MHz – 1000MHz

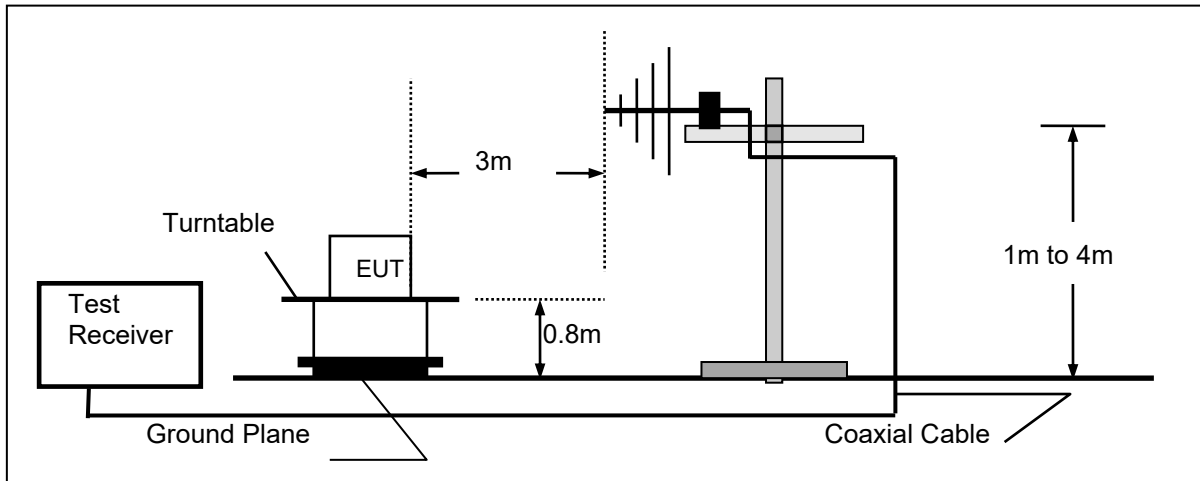

Frequency range above 1GHz-25GHz

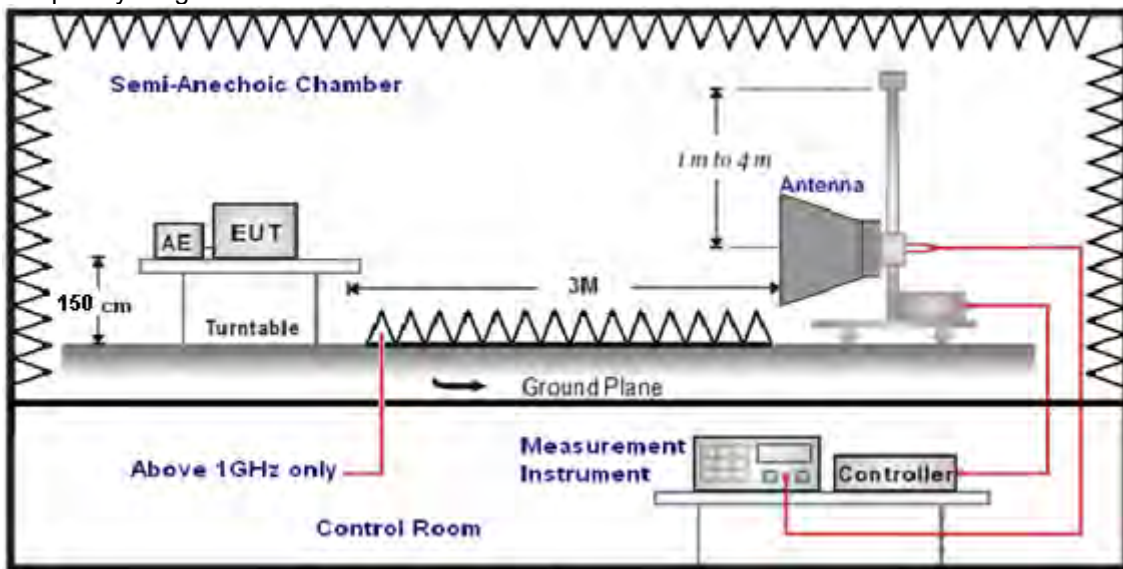

**TEST PROCEDURE**

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

| Test Frequency range | Test Antenna Type          | Test Distance |
|----------------------|----------------------------|---------------|
| 9KHz-30MHz           | Active Loop Antenna        | 3             |
| 30MHz-1GHz           | Ultra-Broadband Antenna    | 3             |
| 1GHz-18GHz           | Double Ridged Horn Antenna | 3             |
| 18GHz-25GHz          | Horn Antenna               | 1             |

7. Setting test receiver/spectrum as following table states:

| Test Frequency range | Test Receiver/Spectrum Setting  | Detector |
|----------------------|---|----------|
| 9KHz-150KHz          | RBW=200Hz/VBW=3KHz,Sweep time=Auto  | QP       |
| 150KHz-30MHz         | RBW=9KHz/VBW=100KHz,Sweep time=Auto   | QP       |
| 30MHz-1GHz           | RBW=120KHz/VBW=1000KHz,Sweep time=Auto  | QP       |
| 1GHz-40GHz           | Peak Value: RBW=1MHz/VBW=3MHz,<br>Sweep time=Auto<br>Average Value: RBW=1MHz/VBW=10Hz,<br>Sweep time=Auto | Peak     |

**Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

**FS = RA + AF + CL - AG**

|                           |  |
|---------------------------|--|
| Where FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| RA = Reading Amplitude    | AG = Amplifier Gain                        |
| AF = Antenna Factor       |  |

Transd=AF +CL-AG

**RADIATION LIMIT**

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

| Frequency (MHz) | Distance (Meters) | Radiated (dBµV/m)                | Radiated (µV/m) |
|-----------------|-------------------|----------------------------------|-----------------|
| 0.009-0.49      | 3                 | 20log(2400/F(KHz))+40log(300/3)  | 2400/F(KHz)     |
| 0.49-1.705      | 3                 | 20log(24000/F(KHz))+ 40log(30/3) | 24000/F(KHz)    |
| 1.705-30        | 3                 | 20log(30)+ 40log(30/3)           | 30              |
| 30-88           | 3                 | 40.0                             | 100             |
| 88-216          | 3                 | 43.5                             | 150             |
| 216-960         | 3                 | 46.0                             | 200             |
| Above 960       | 3                 | 54.0                             | 500             |

**TEST RESULTS**

|               |          |                |     |
|---------------|----------|----------------|-----|
| Temperature   | 22.8°C   | Humidity       | 56% |
| Test Engineer | Moon Tan | Configurations | BT  |

Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. We measured Radiated Emission at GFSK, π/4 DQPSK and 8DPSK mode from 9 KHz to 25GHz and recorded worst case at GFSK DH5 mode.
3. For below 1GHz testing recorded worst at GFSK DH5 middle channel.
4. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

**For 30MHz-1GHz**


Horizontal

**Test Graph**

| NO. | Frequency [MHz] | Reading [dBµV/m] | Factor [dB] | Result [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Height [cm] | Angle [°] | Detector | Polarity  | Remark |
|-----|-----------------|------------------|-------------|-----------------|----------------|-------------|-------------|-----------|----------|-----------|--------|
| 1   | 69.7700         | 43.97            | -10.30      | 33.67           | 40.00          | 6.33        | 100         | 353       | PK       | Horizonta | PASS   |
| 2   | 149.3100        | 50.19            | -12.81      | 37.38           | 43.50          | 6.12        | 100         | 255       | PK       | Horizonta | PASS   |
| 3   | 215.7550        | 38.13            | -9.46       | 28.67           | 43.50          | 14.83       | 100         | 98        | PK       | Horizonta | PASS   |
| 4   | 320.0300        | 39.86            | -6.92       | 32.94           | 46.00          | 13.06       | 100         | 235       | PK       | Horizonta | PASS   |
| 5   | 406.3600        | 38.17            | -4.90       | 33.27           | 46.00          | 12.73       | 100         | 24        | PK       | Horizonta | PASS   |
| 6   | 488.3250        | 37.80            | -3.70       | 34.10           | 46.00          | 11.90       | 100         | 219       | PK       | Horizonta | PASS   |

Note:1. Result (dBµV/m) = Reading(dBµV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

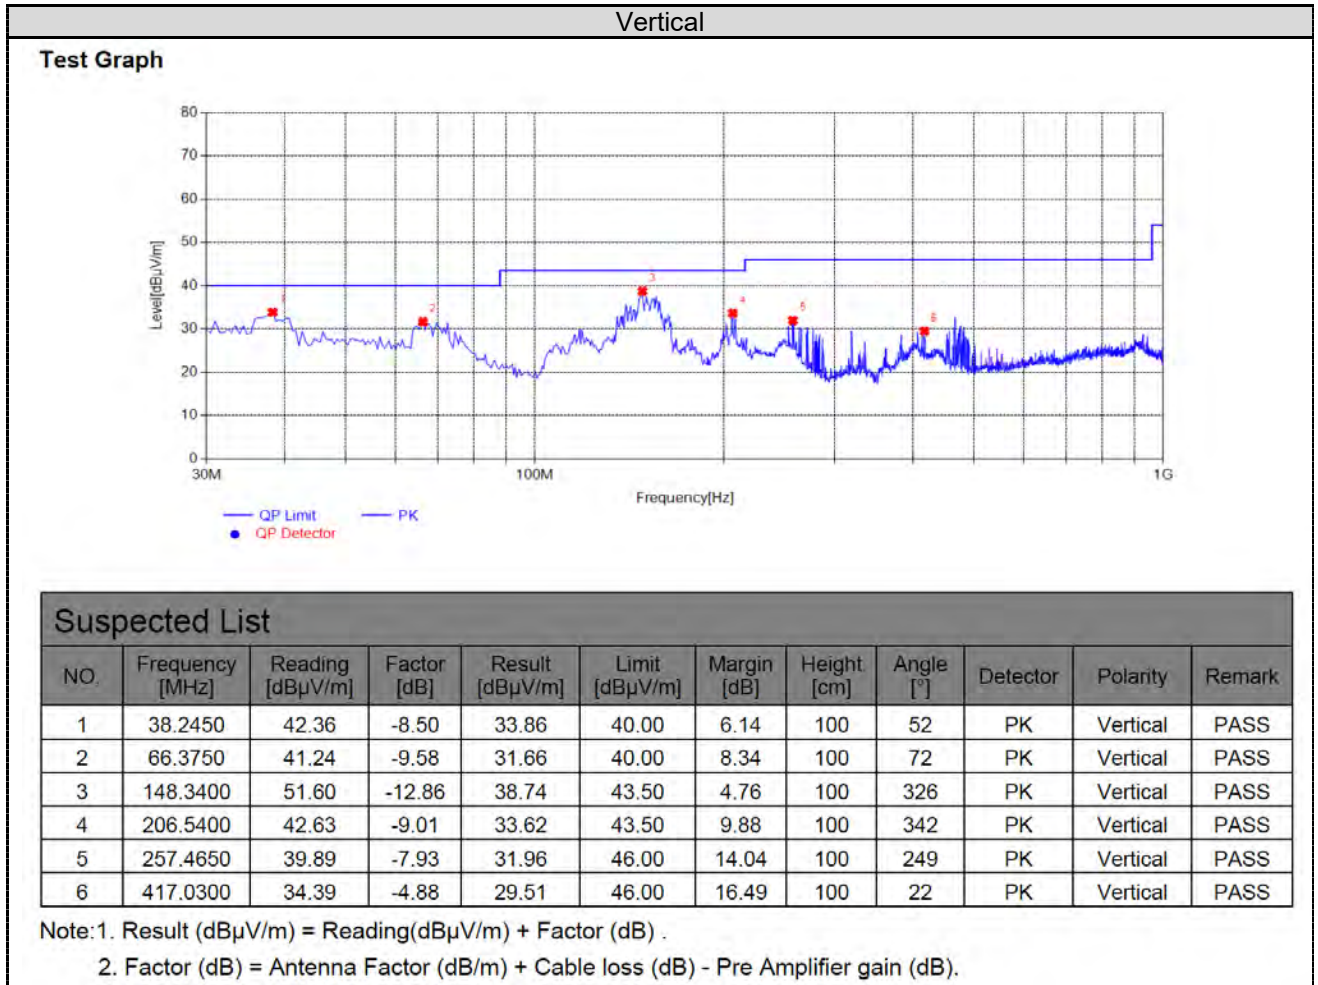



**For 1GHz to 25GHz**

Note: GFSK, Pi/4 DQPSK and 8DPSK all have been tested, only worse case GFSK is reported.

**GFSK (above 1GHz)**

| Frequency(MHz): |                         |    | 2402           |             | Polarity:        |                       | HORIZONTAL        |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4804.00         | 47.69                   | PK | 74             | 26.31       | 45.79            | 31.42                 | 6.98              | 36.50              | 1.90                     |
| 4804.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |
| 7206.00         | 45.98                   | PK | 74             | 28.02       | 35.38            | 37.03                 | 8.87              | 35.30              | 10.60                    |
| 7206.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |

| Frequency(MHz): |                         |    | 2402           |             | Polarity:        |                       | VERTICAL          |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4804.00         | 48.39                   | PK | 74             | 25.61       | 46.49            | 31.42                 | 6.98              | 36.50              | 1.90                     |
| 4804.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |
| 7206.00         | 47.18                   | PK | 74             | 26.82       | 36.58            | 37.03                 | 8.87              | 35.30              | 10.60                    |
| 7206.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |

| Frequency(MHz): |                         |    | 2441           |             | Polarity:        |                       | HORIZONTAL        |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4882.00         | 47.83                   | PK | 74             | 26.17       | 45.77            | 30.98                 | 7.58              | 36.50              | 2.06                     |
| 4882.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |
| 7323.00         | 45.50                   | PK | 74             | 28.50       | 34.58            | 37.66                 | 8.56              | 35.30              | 10.92                    |
| 7323.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |

| Frequency(MHz): |                         |    | 2441           |             | Polarity:        |                       | VERTICAL          |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4882.00         | 48.53                   | PK | 74             | 25.47       | 46.47            | 30.98                 | 7.58              | 36.50              | 2.06                     |
| 4882.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |
| 7323.00         | 46.10                   | PK | 74             | 27.90       | 35.18            | 37.66                 | 8.56              | 35.30              | 10.92                    |
| 7323.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |

| Frequency(MHz): |                         |    | 2480           |             | Polarity:        |                       | HORIZONTAL        |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4960.00         | 48.32                   | PK | 74             | 25.68       | 45.25            | 31.47                 | 7.80              | 36.20              | 3.07                     |
| 4960.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |
| 7440.00         | 47.47                   | PK | 74             | 26.53       | 35.73            | 38.32                 | 8.72              | 35.30              | 11.74                    |
| 7440.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |

| Frequency(MHz): |                         |    | 2480           |             | Polarity:        |                       | VERTICAL          |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 4960.00         | 49.22                   | PK | 74             | 24.78       | 46.15            | 31.47                 | 7.80              | 36.20              | 3.07                     |
| 4960.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |
| 7440.00         | 48.27                   | PK | 74             | 25.73       | 36.53            | 38.32                 | 8.72              | 35.30              | 11.74                    |
| 7440.00         | --                      | AV | 54             | --          | --               | --                    | --                | --                 | --                       |

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier

- 3. Margin value = Limit value- Emission level.
- 4. -- Mean the PK detector measured value is below average limit.
- 5. The other emission levels were very low against the limit.

**Results of Band Edges Test (Radiated)**

Note: GFSK, Pi/4 DQPSK and 8DPSK all have been tested, only worse case GFSK is reported.

**GFSK**

| Frequency(MHz): |                         |    | 2402           |             | Polarity:        |                       | HORIZONTAL        |                    |                          |
|-----------------|-------------------------|----|----------------|-------------|------------------|-----------------------|-------------------|--------------------|--------------------------|
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2390.00         | 49.25                   | PK | 74.00          | 24.75       | 54.66            | 27.49                 | 3.32              | 36.22              | -5.41                    |
| 2390.00         | --                      | AV | 54.00          | --          | --               | --                    | --                | --                 | --                       |
| Frequency(MHz): |                         |    | 2402           |             | Polarity:        |                       | VERTICAL          |                    |                          |
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2390.00         | 50.65                   | PK | 74.00          | 23.35       | 56.06            | 27.49                 | 3.32              | 36.22              | -5.41                    |
| 2390.00         | --                      | AV | 54.00          | --          | --               | --                    | --                | --                 | --                       |
| Frequency(MHz): |                         |    | 2480           |             | Polarity:        |                       | HORIZONTAL        |                    |                          |
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2483.50         | 47.38                   | PK | 74.00          | 26.62       | 52.89            | 27.45                 | 3.38              | 36.34              | -5.51                    |
| 2483.50         | --                      | AV | 54.00          | --          | --               | --                    | --                | --                 | --                       |
| Frequency(MHz): |                         |    | 2480           |             | Polarity:        |                       | VERTICAL          |                    |                          |
| Frequency (MHz) | Emission Level (dBuV/m) |    | Limit (dBuV/m) | Margin (dB) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-amplifier (dB) | Correction Factor (dB/m) |
| 2483.50         | 49.68                   | PK | 74.00          | 24.32       | 55.19            | 27.45                 | 3.38              | 36.34              | -5.51                    |
| 2483.50         | --                      | AV | 54.00          | --          | --               | --                    | --                | --                 | --                       |

REMARKS:

- 1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
- 2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)- Pre-amplifier
- 3. Margin value = Limit value- Emission level.
- 4. -- Mean the PK detector measured value is below average limit.

### 4.3 Maximum Peak Output Power


#### Limit

The Maximum Peak Output Power Measurement is 125mW (20.97).

#### Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

#### Test Configuration



#### Test Results

|               |          |                |     |
|---------------|----------|----------------|-----|
| Temperature   | 22.8°C   | Humidity       | 56% |
| Test Engineer | Moon Tan | Configurations | BT  |

| Type     | Channel | Output power (dBm) | Limit (dBm) | Result |
|----------|---------|--------------------|-------------|--------|
| GFSK     | 00      | -2.72              | 20.97       | Pass   |
|          | 39      | -1.22              |             |        |
|          | 78      | -0.90              |             |        |
| π/4DQPSK | 00      | -2.83              | 20.97       | Pass   |
|          | 39      | -1.31              |             |        |
|          | 78      | -0.98              |             |        |
| 8DPSK    | 00      | 3.03               | 20.97       | Pass   |
|          | 39      | 2.85               |             |        |
|          | 78      | 2.66               |             |        |

Note: 1.The test results including the cable lose.

Test plot as follows:

#### 4.4 20dB Bandwidth

**Limit**


For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

**Test Procedure**

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

**Test Configuration**



**Test Results**

|               |          |                |     |
|---------------|----------|----------------|-----|
| Temperature   | 22.8°C   | Humidity       | 56% |
| Test Engineer | Moon Tan | Configurations | BT  |

| Modulation | Channel | 20dB bandwidth (MHz) | Result |
|------------|---------|----------------------|--------|
| GFSK       | CH00    | 0.987                | Pass   |
|            | CH39    | 0.984                |        |
|            | CH78    | 0.993                |        |
| π/4DQPSK   | CH00    | 1.314                |        |
|            | CH39    | 1.314                |        |
|            | CH78    | 1.317                |        |
| 8DPSK      | CH00    | 1.302                |        |
|            | CH39    | 1.302                |        |
|            | CH78    | 1.302                |        |

Test plot as follows:

### GFSK Modulation



### CH00



### CH39



### CH78

$\pi/4$ DQPSK Modulation



CH00



CH39



CH78

### 8DPSK Modulation



### CH00



### CH39



### CH78

### 4.5 Frequency Separation


**LIMIT**

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the  $2/3 * 20\text{dB}$  bandwidth of the hopping channel, whichever is greater.

**TEST PROCEDURE**

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW.

**TEST CONFIGURATION**



**TEST RESULTS**

|               |          |                |     |
|---------------|----------|----------------|-----|
| Temperature   | 22.8°C   | Humidity       | 56% |
| Test Engineer | Moon Tan | Configurations | BT  |

| Modulation          | Channel | Channel Separation (MHz) | Limit(MHz)                             | Result |
|---------------------|---------|--------------------------|--|--------|
| GFSK                | CH39    | 1.000                    | 25KHz or $2/3 * 20\text{dB}$ bandwidth | Pass   |
|                     | CH40    |                          |  |        |
| $\pi/4\text{DQPSK}$ | CH39    | 1.002                    | 25KHz or $2/3 * 20\text{dB}$ bandwidth | Pass   |
|                     | CH40    |                          |  |        |
| 8DPSK               | CH39    | 1.004                    | 25KHz or $2/3 * 20\text{dB}$ bandwidth | Pass   |
|                     | CH40    |                          |  |        |

Note:

We have tested all mode at high, middle and low channel, and recorded worst case at middle

**Test plot as follows:**





GFSK



8DPSK



$\pi/4$ DQPSK

### 4.6 Number of hopping frequency


**Limit**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

**Test Procedure**

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with 100 KHz RBW and 300 KHz VBW.

**Test Configuration**



**Test Results**

|               |          |                |     |
|---------------|----------|----------------|-----|
| Temperature   | 22.8°C   | Humidity       | 56% |
| Test Engineer | Moon Tan | Configurations | BT  |


  

| Modulation | Number of Hopping Channel | Limit | Result |
|------------|---------------------------|-------|--------|
| GFSK       | 79                        | ≥15   | Pass   |
| π/4DQPSK   | 79                        |       |        |
| 8DPSK      | 79                        |       |        |

**Test plot as follows:**



GFSK Modulation

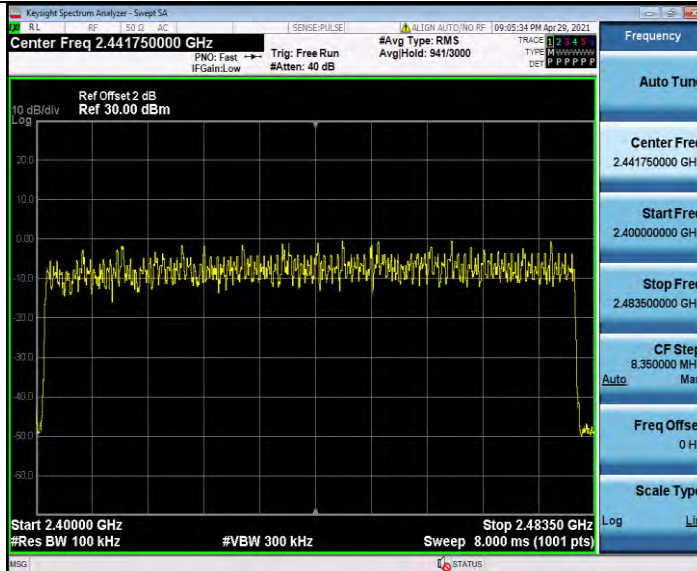

$\pi/4$ DQPSK Modulation



8DPSK Modulation

### 4.7 Time of Occupancy (Dwell Time)


**Limit**

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

**Test Procedure**

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with 1MHz RBW and 1MHz VBW, Span 0Hz.

**Test Configuration**





**Test Results**

|               |          |                |     |
|---------------|----------|----------------|-----|
| Temperature   | 22.8°C   | Humidity       | 56% |
| Test Engineer | Moon Tan | Configurations | BT  |



| Modulation | Packet | BurstWidth [ms] | TotalHops [Num] | Result[s] | Limit (s) | Result |
|------------|--------|-----------------|-----------------|-----------|-----------|--------|
| GFSK       | DH1    | 0.38            | 330             | 0.125     | 0.40      | Pass   |
|            | DH3    | 1.64            | 180             | 0.296     |           |        |
|            | DH5    | 2.89            | 110             | 0.318     |           |        |
| π/4DQPSK   | 2-DH1  | 0.39            | 330             | 0.127     | 0.40      | Pass   |
|            | 2-DH3  | 1.64            | 130             | 0.213     |           |        |
|            | 2-DH5  | 2.89            | 100             | 0.289     |           |        |
| 8DPSK      | 3-DH1  | 0.39            | 330             | 0.127     | 0.40      | Pass   |
|            | 3-DH3  | 1.64            | 150             | 0.245     |           |        |
|            | 3-DH5  | 2.89            | 110             | 0.318     |           |        |

**Test plot as follows:**



### DH1 Ant1 Hop

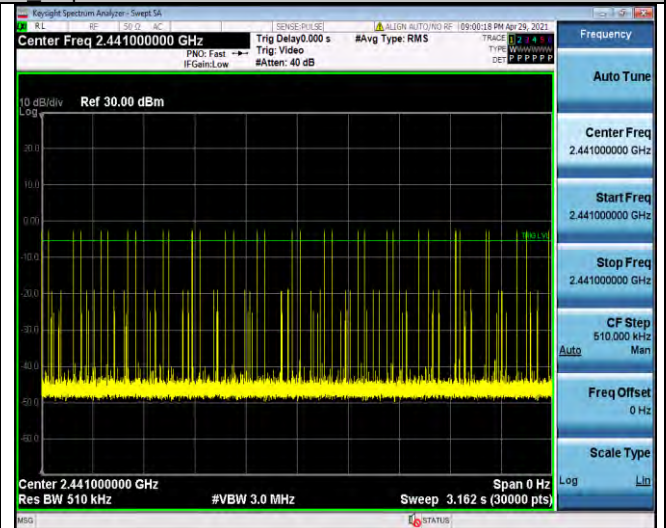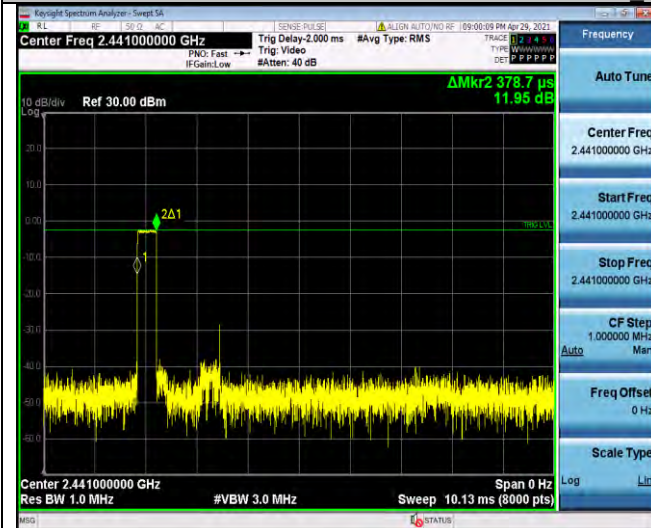



### DH3 Ant1 Hop

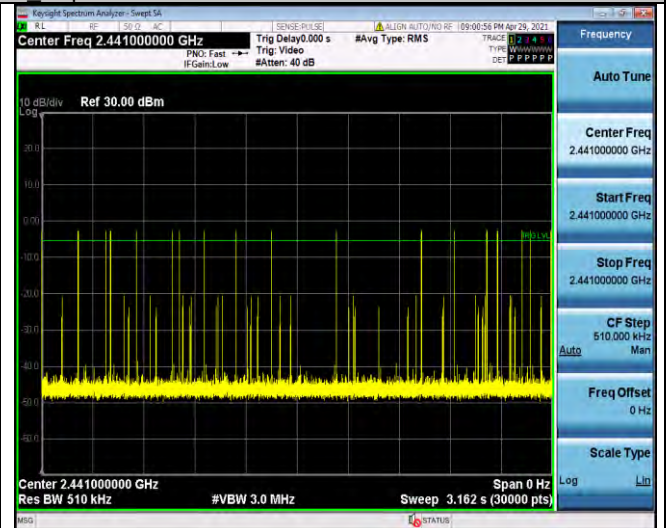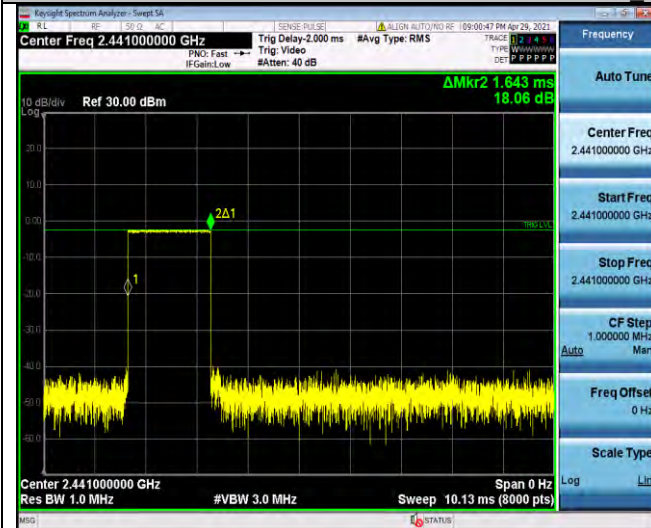



### DH5 Ant1 Hop

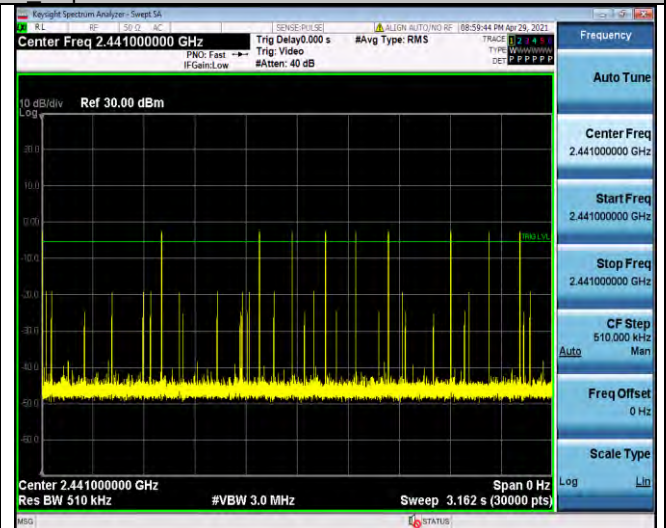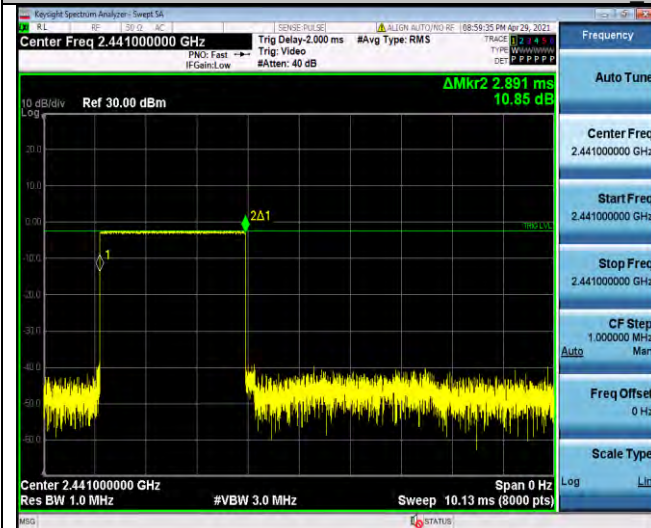



### 2DH1\_Ant1\_Hop

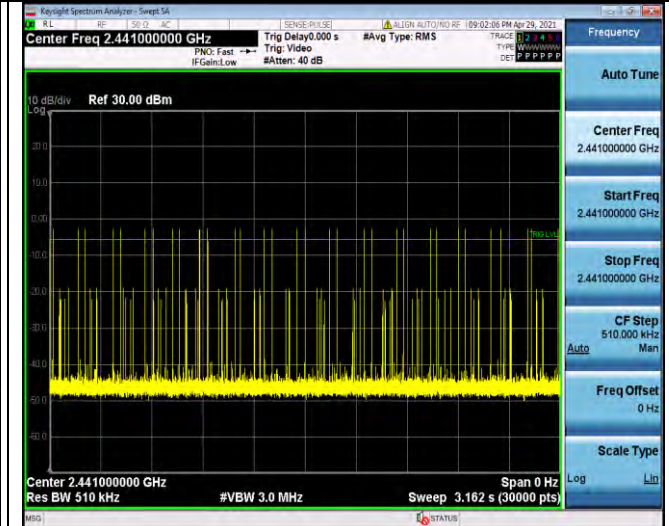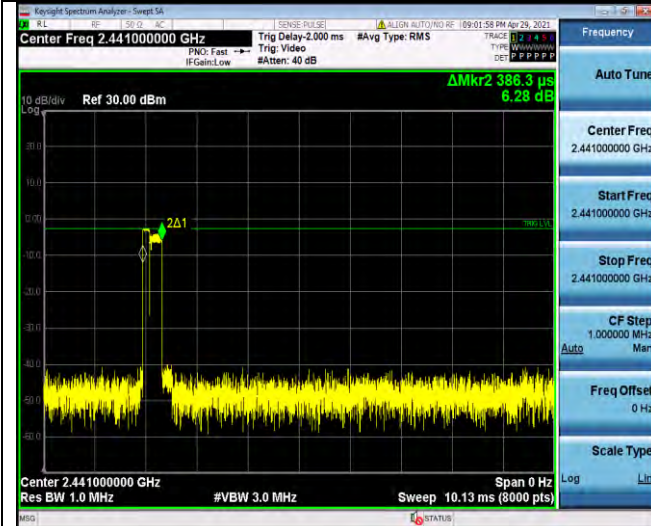



### 2DH3\_Ant1\_Hop

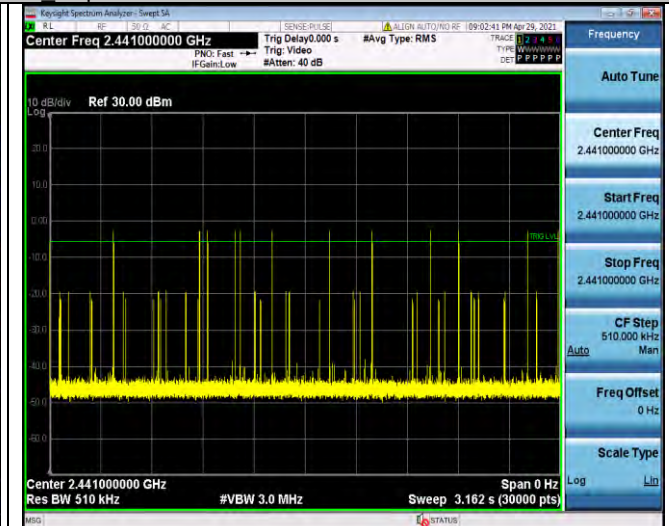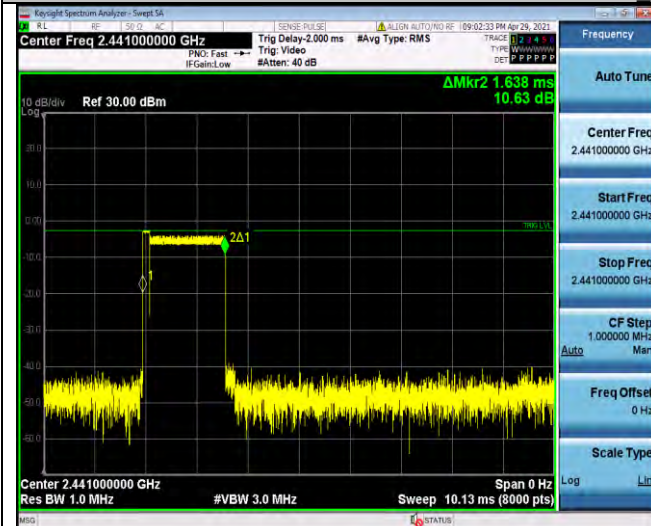



### 2DH5\_Ant1\_Hop

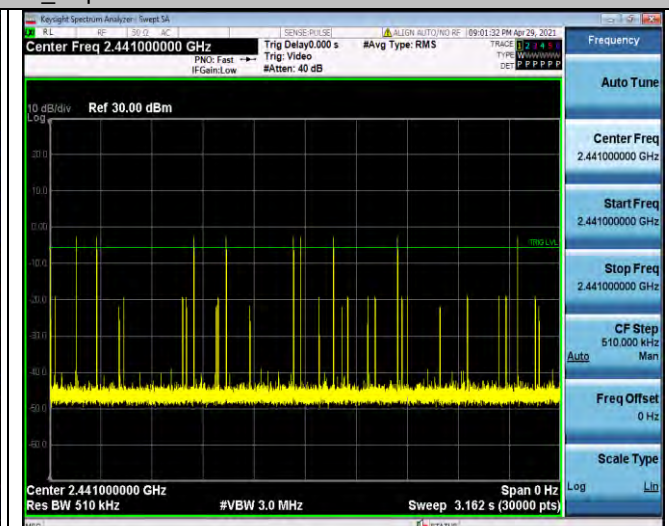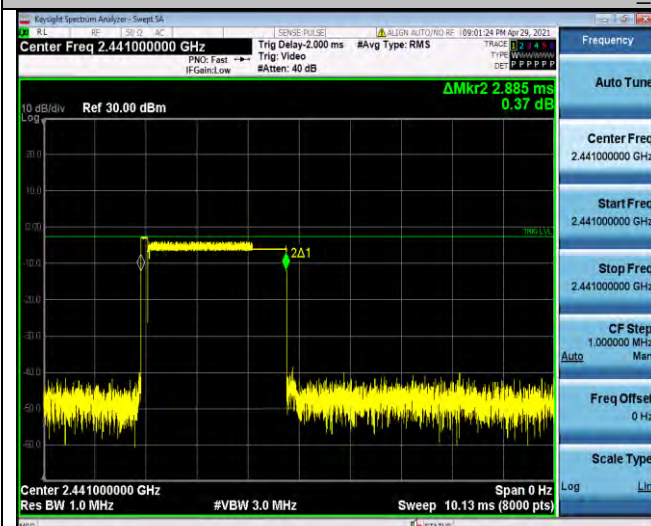



### 3DH1 Ant1 Hop

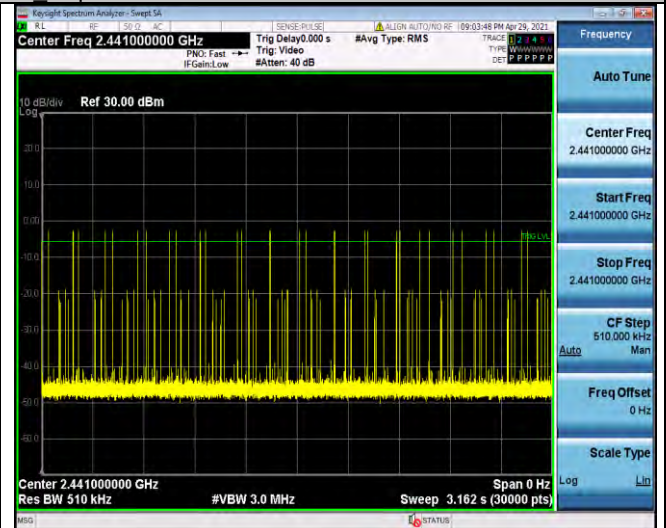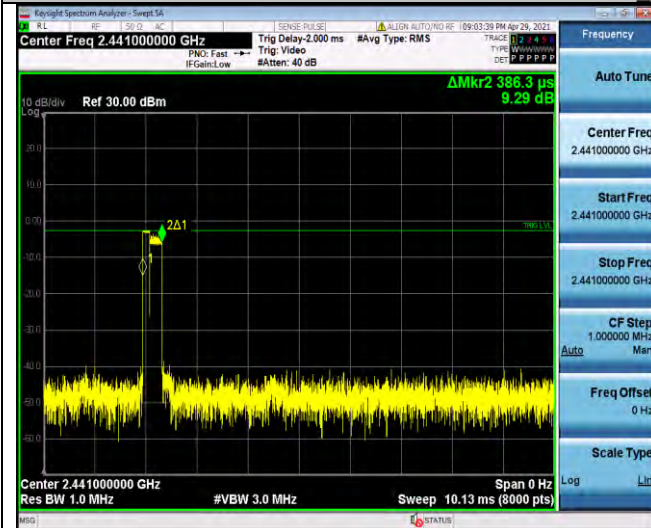

### 3DH3 Ant1 Hop

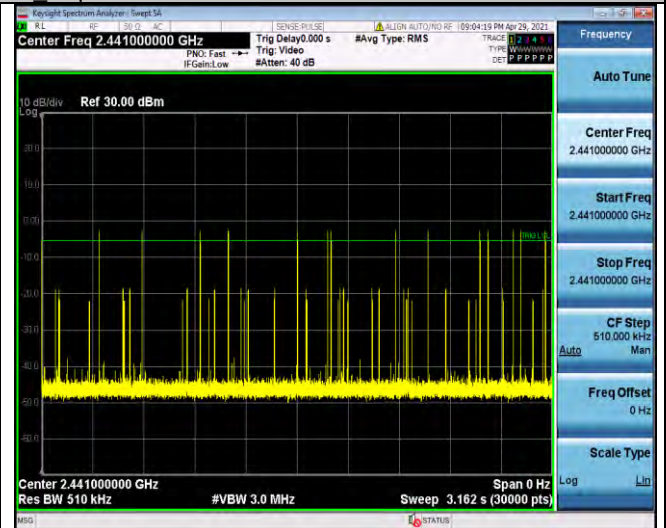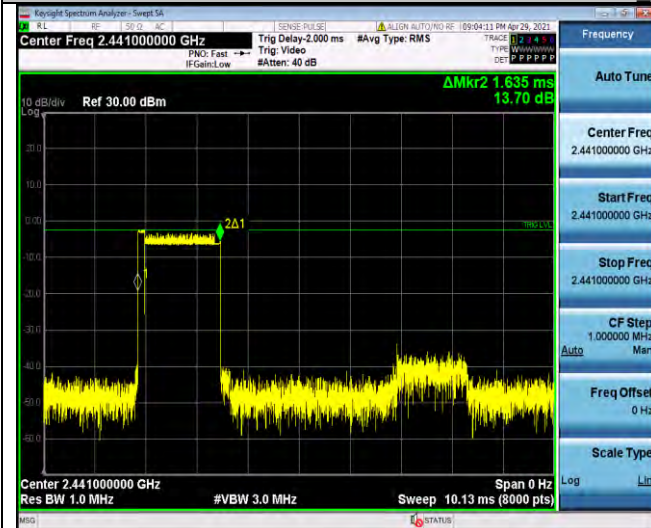

### 3DH5 Ant1 Hop

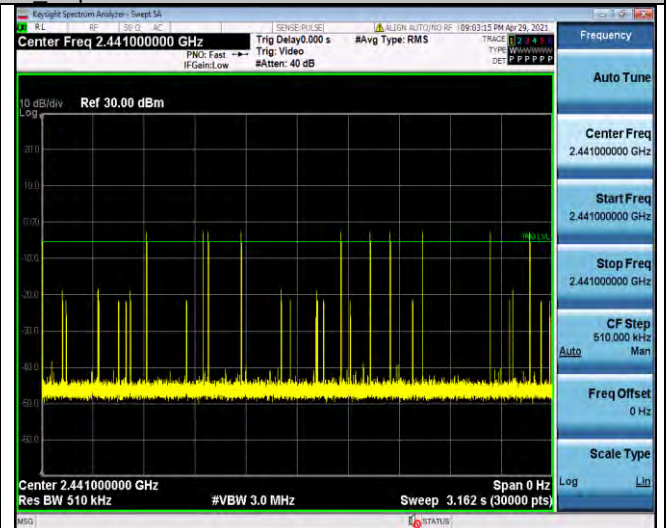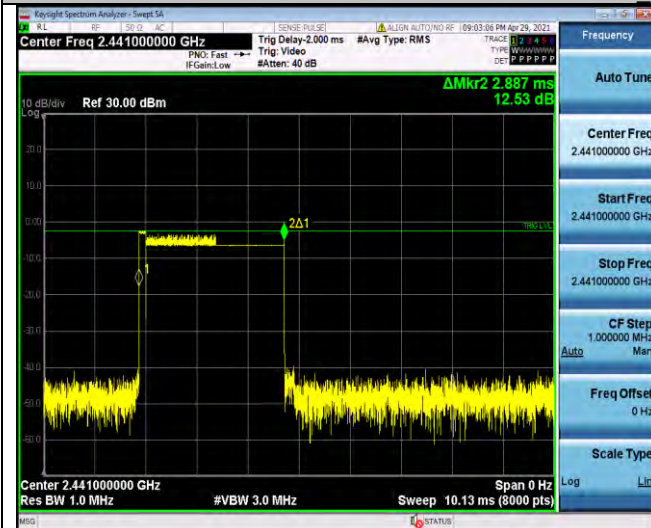

### 4.8 Out-of-band Emissions


**Limit**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

**Test Procedure**

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector , and max hold. Measurements utilizing these setting are made of the in-band reference level, bandedge and out-of-band emissions.

**Test Configuration**



**Test Results**

|               |          |                |     |
|---------------|----------|----------------|-----|
| Temperature   | 22.8°C   | Humidity       | 56% |
| Test Engineer | Moon Tan | Configurations | BT  |

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandage measurement data.

We measured all conditions (DH1, DH3, DH5) and recorded worst case at DH5

Test plot as follows:



**GFSK CH00**



Reference


**GFSK CH39**



Reference



30MHz-3GHz

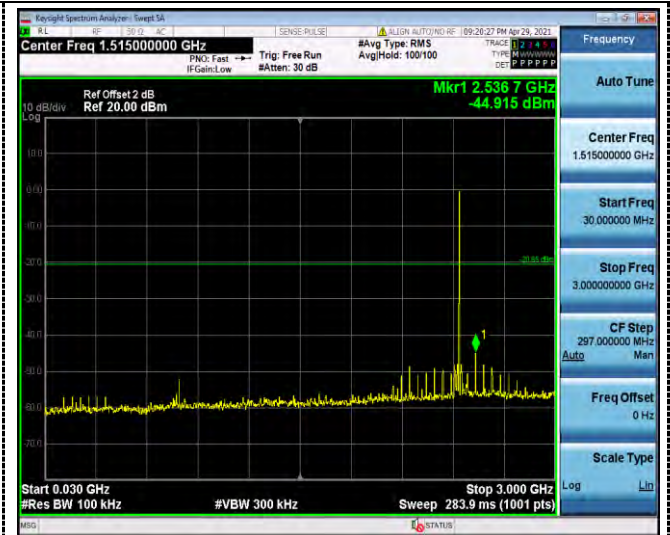

30MHz-3GHz



3GHz-25GHz



3GHz-25GHz


**GFSK CH78**

**$\pi/4$ QPSK CH00**



Reference

Reference

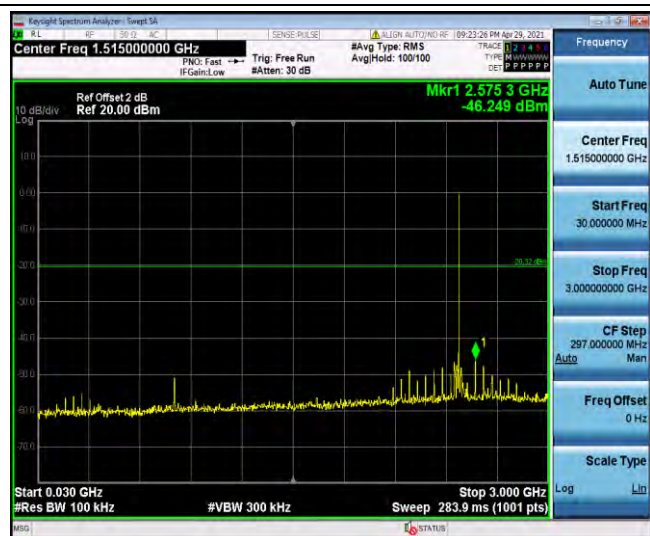

30MHz-3GHz

30MHz-3GHz



3GHz-25GHz

3GHz-25GHz



$\pi/4$ DQPSK CH39

$\pi/4$ DQPSK CH78



Reference

Reference

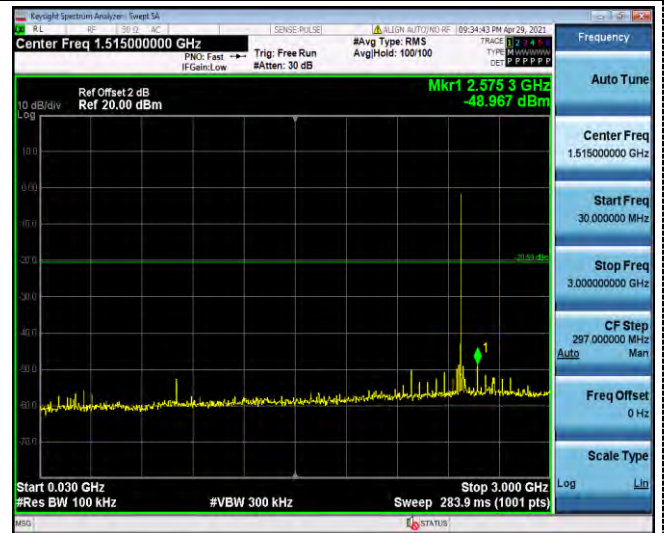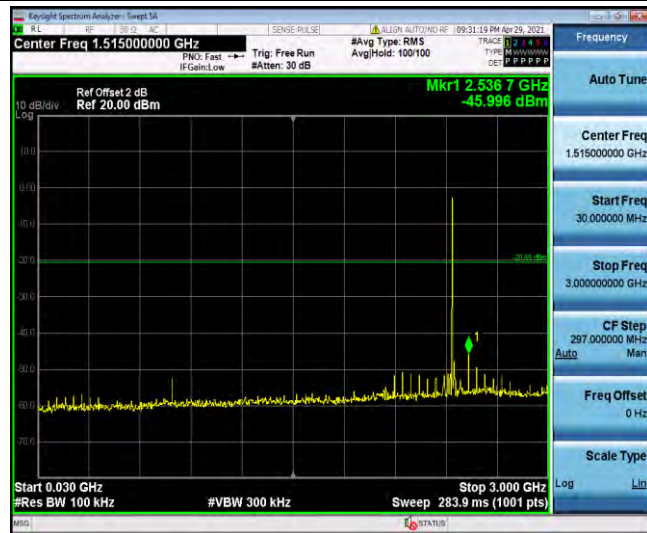

30MHz-3GHz

30MHz-3GHz



3GHz-25GHz

3GHz-25GHz

**8DPSK CH00**




Reference

**8DPSK CH39**



Reference

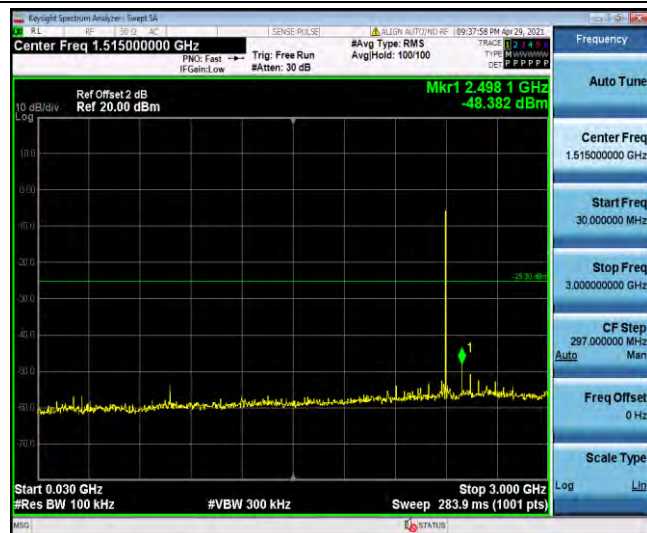

30MHz-3GHz



30MHz-3GHz



3GHz-25GHz




3GHz-25GHz

### 8DPSK CH78



Reference

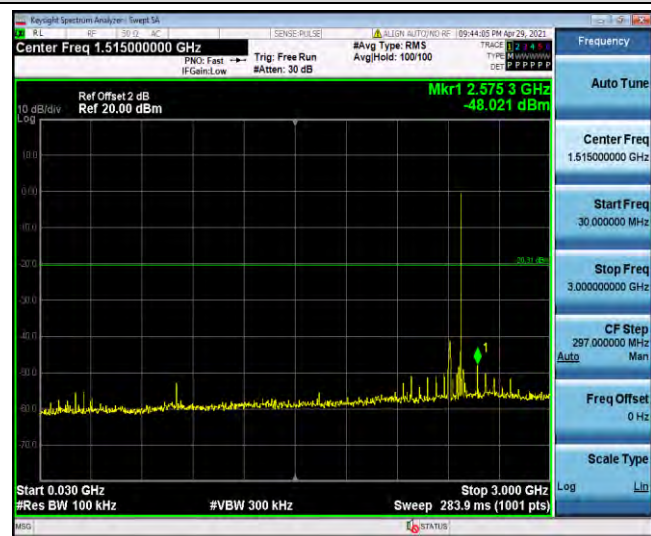


30MHz-3GHz




3GHz-25GHz

Band-edge Measurements for RF Conducted Emissions:


GFSK

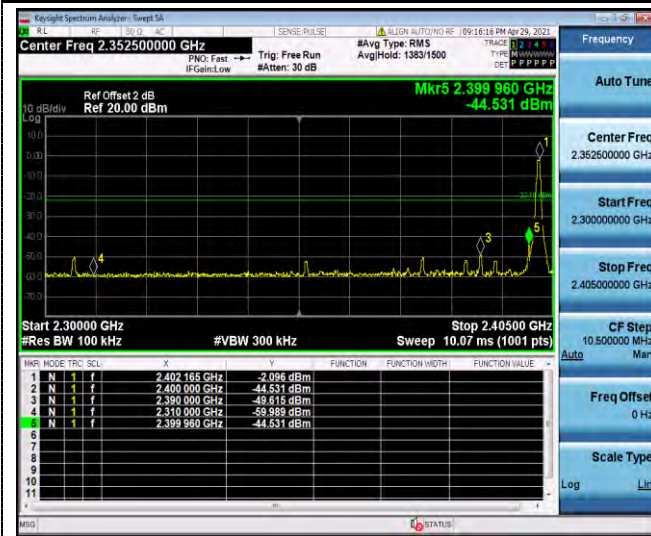


Left Band edge hopping off

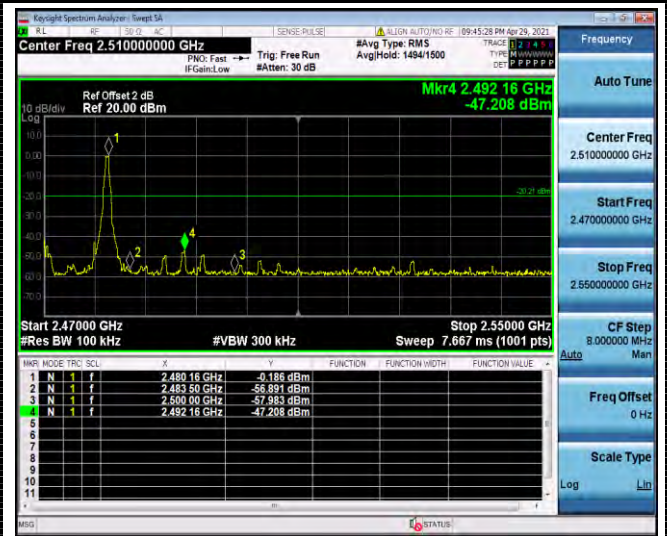

RightBand edge hopping off

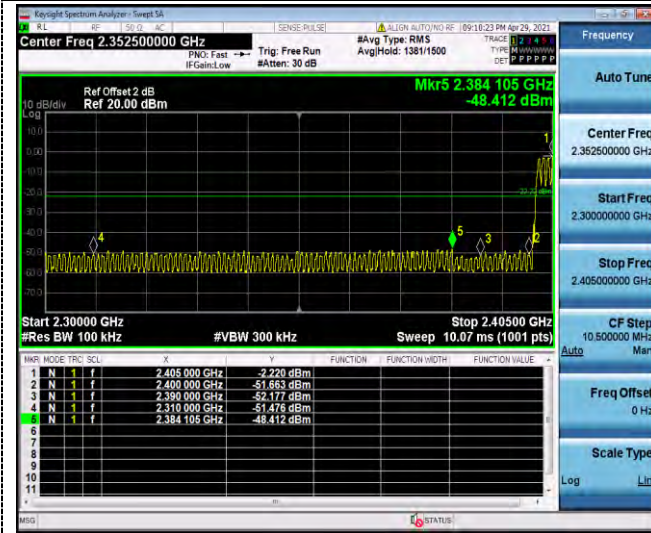


Left Band edge hopping on

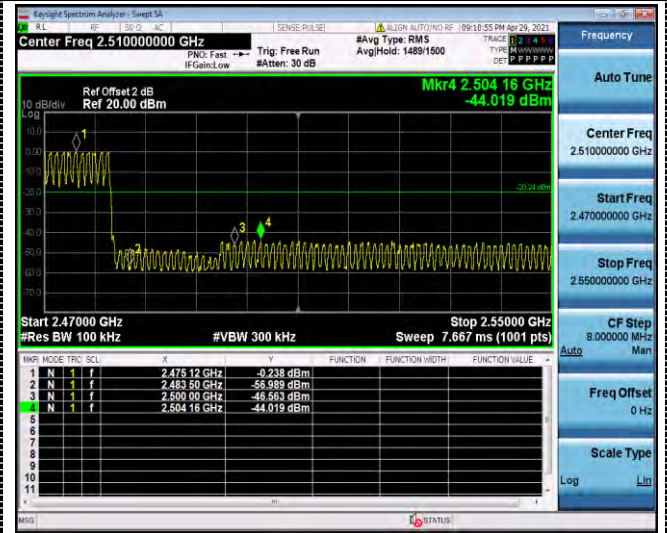


RightBand edge hopping on


$\pi/4$ DQPSK

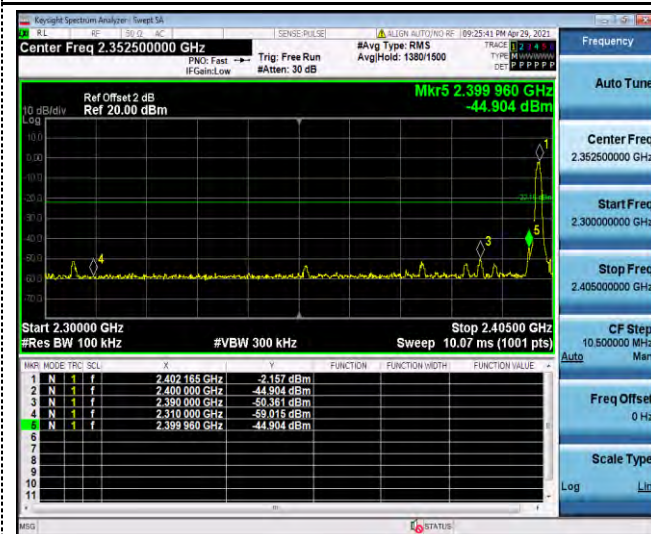


Left Band edge hopping off

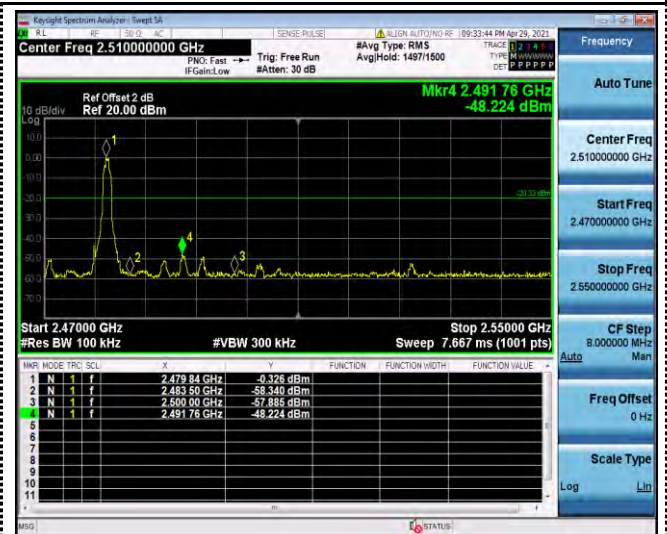

RightBand edge hopping off

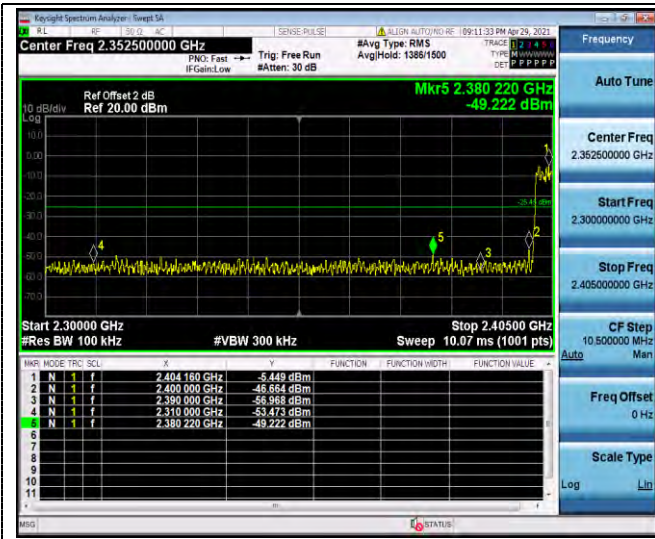


Left Band edge hopping on

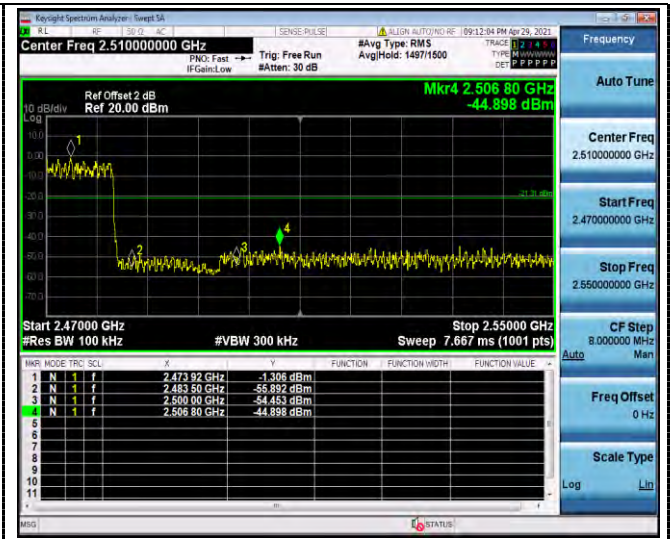


RightBand edge hopping on


8DPSK

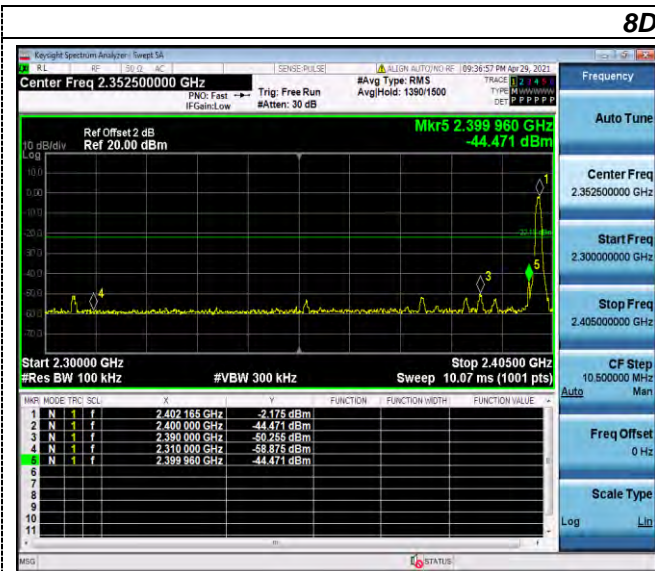


Left Band edge hopping off

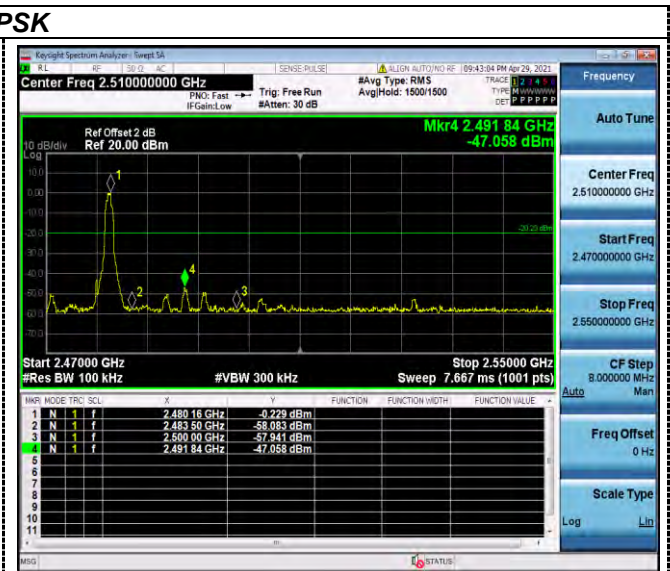

RightBand edge hopping off

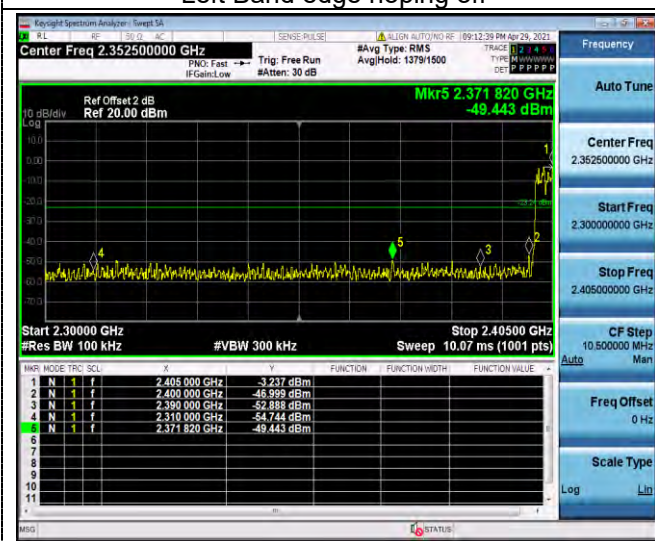

Left Band edge hopping on

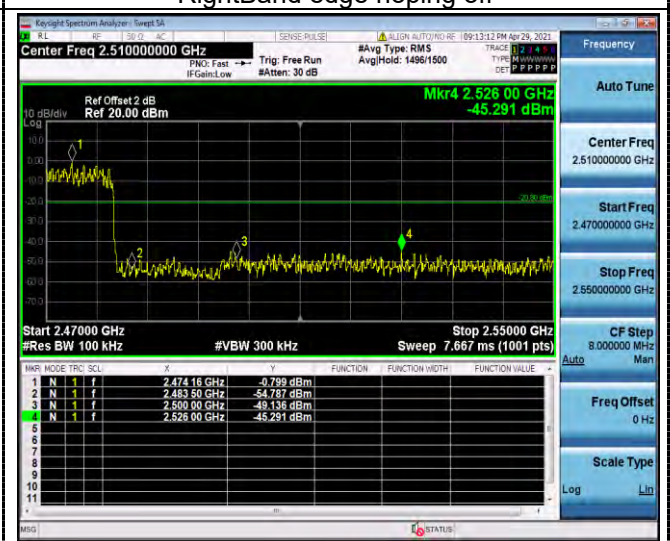

RightBand edge hopping on

### 4.9 Pseudorandom Frequency Hopping Sequence

#### TEST APPLICABLE


#### **For 47 CFR Part 15C section 15.247 (a) (1) requirement:**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

#### **EUT Pseudorandom Frequency Hopping Sequence Requirement**


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5<sup>th</sup> and 9<sup>th</sup> stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence:2<sup>9</sup>-1=511 bits
- Longest sequence of zeros:8(non-inverted signal)

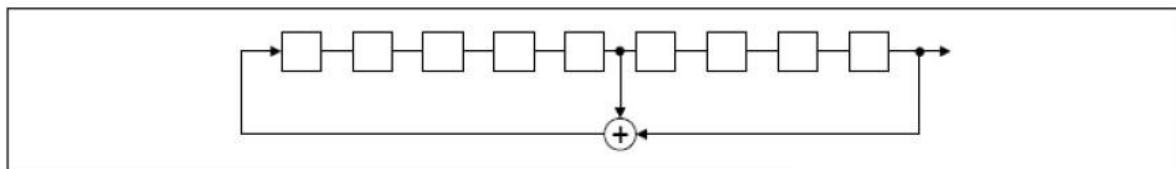

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of pseudorandom frequency hopping sequence as follows:

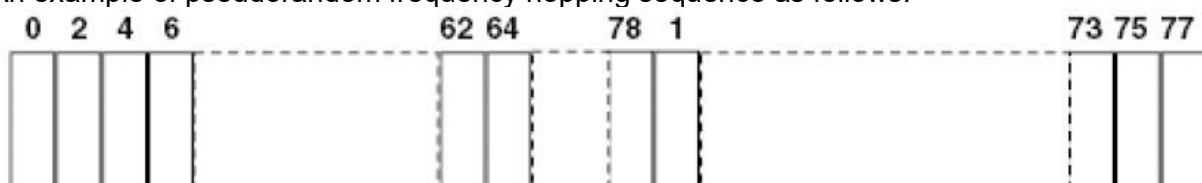

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.



## **4.10 Antenna Requirement**

### **Standard Applicable**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


### **Refer to statement below for compliance**

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### **Antenna Connected Construction**

The maximum gain of antenna was 0dBi.


## 5 Test Setup Photos of the EUT

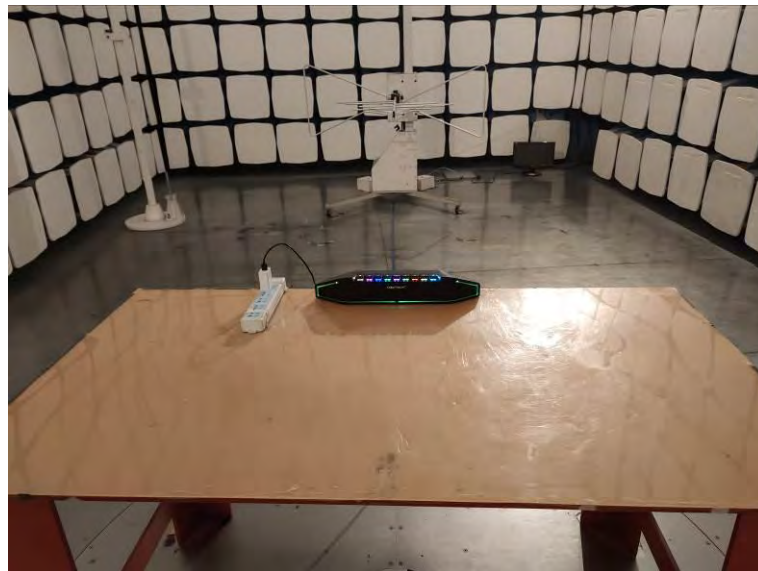

## 6 Photos of the EUT




### External photos





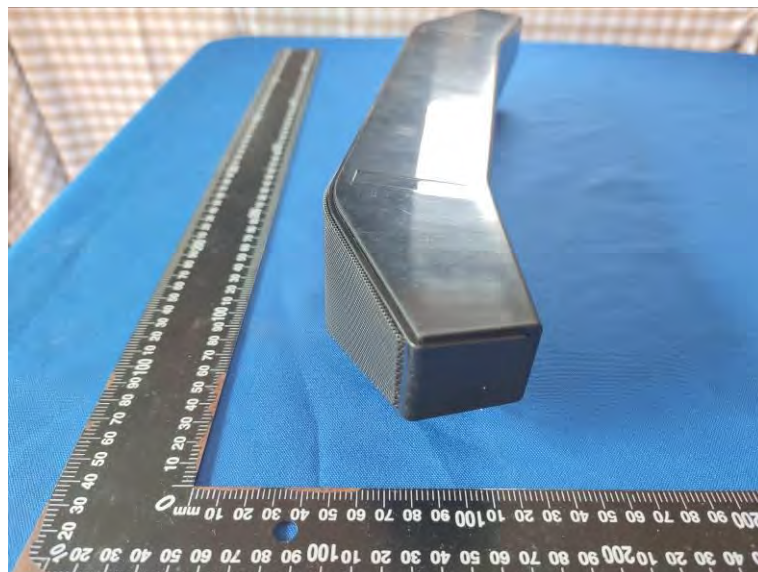



Internal photos

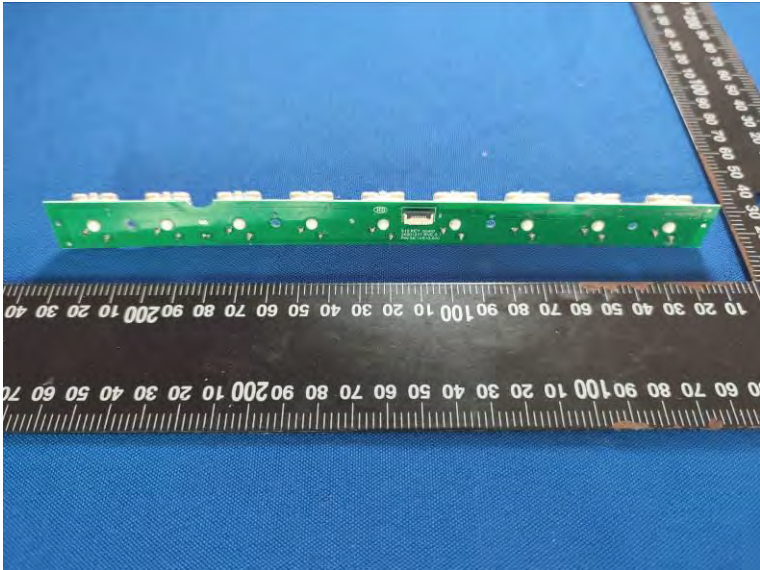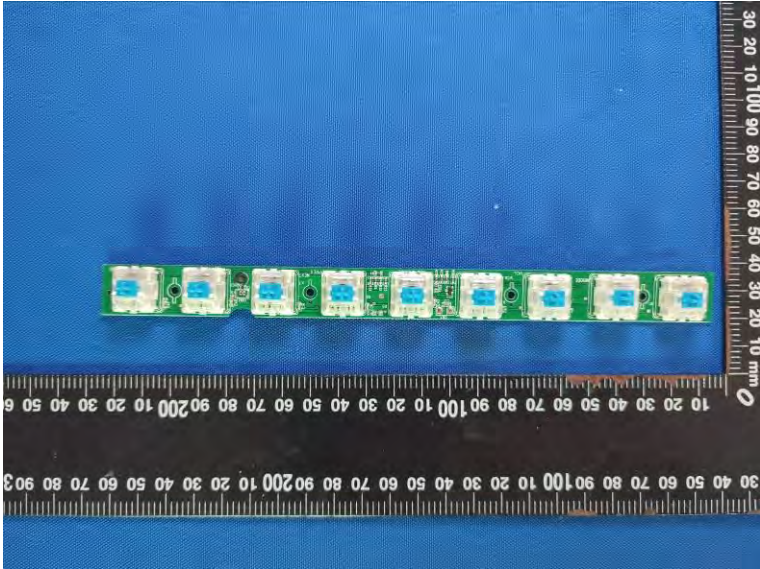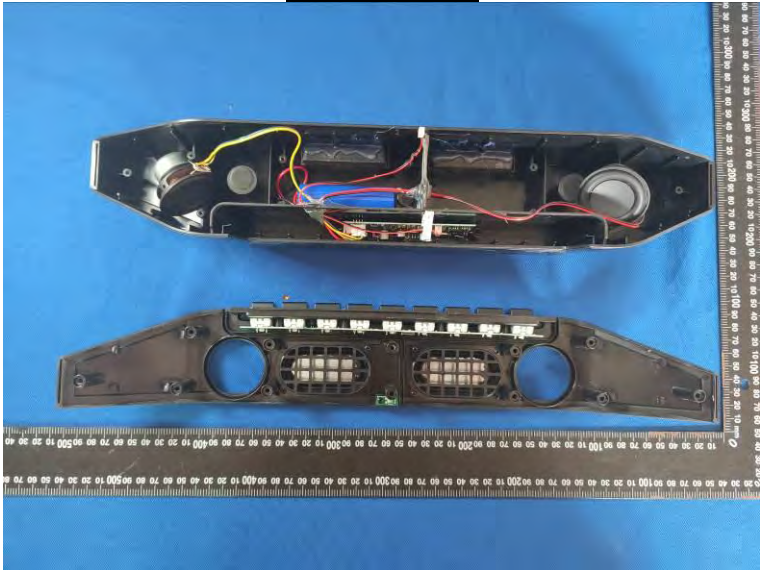

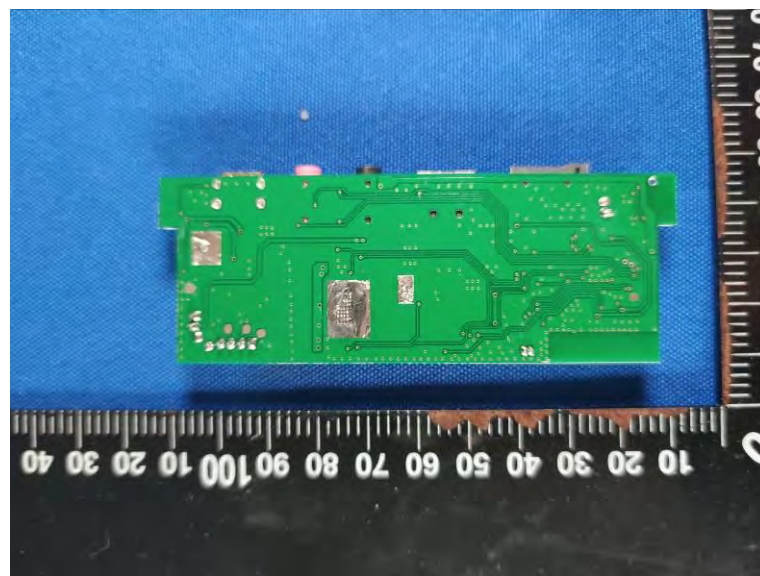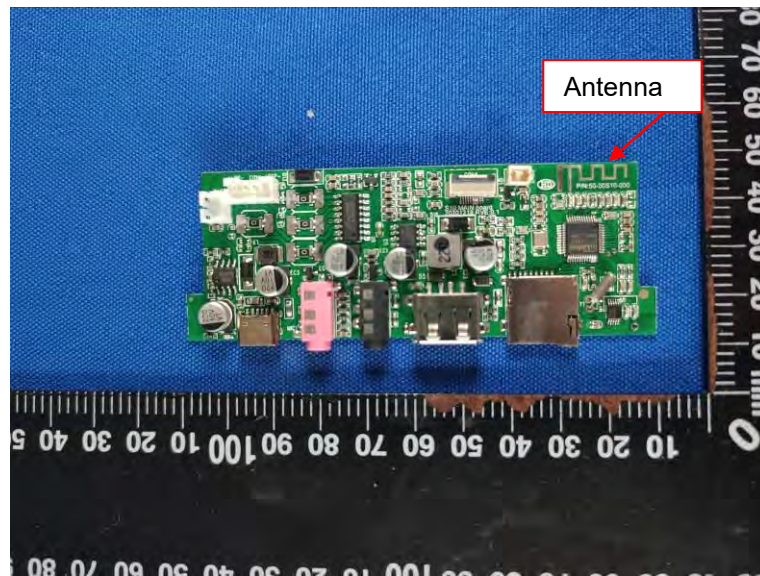

\*\*\*\*\* End of Report \*\*\*\*\*