

# TEST REPORT

Reference No..... : WTS19S02008915-3W V1  
FCC ID ..... : 2ANY6-TE580P  
Applicant..... : Telo Systems Ltd.  
Address..... : Room 408, Chuangye Building, Seven-Star Park, Chuangye 2nd Road, Bao'an 28th District, Xin'an Bao'an District, Shenzhen, China  
Manufacturer ..... : The same as above  
Address..... : The same as above  
Product..... : Smart Phone  
Model(s) ..... : TE580P  
Brand Name ..... : Telo Systems  
Standards..... : FCC CFR47 Part 15.247:2018  
Date of Receipt sample .... : 2019-02-22  
Date of Test ..... : 2019-02-23 to 2019-03-08  
Date of Issue..... : 2019-03-29  
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

*Ford Wang*

Ford Wang / Project Engineer

Approved by:



*Philo Zhong*

Philo Zhong / Manager

## 2 Laboratories Introduction

**Waltek Services (Shenzhen) Co., Ltd** is a professional third-party testing and certification laboratory with multi-year product testing and certification experience, established strictly in accordance with ISO/IEC 17025 requirements, and accredited by ILAC (International Laboratory Accreditation Cooperation) member. A2LA (American Association for Laboratory Accreditation, the certification number is 4243.01) of USA, CNAS (China National Accreditation Service for Conformity Assessment, the registration number is L3110) of China. Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC (The Federal Communications Commission), CEC (California energy efficiency), ISED (Innovation, Science and Economic Development Canada). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as Intertek (ETL-SEMKO), TÜV Rheinland, TÜV SÜD, etc.



Waltek Services (Shenzhen) Co., Ltd is one of the largest and the most comprehensive third party testing laboratory in China. Our test capability covered four large fields: safety test. Electro Magnetic Compatibility (EMC), and energy performance, wireless radio. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

**Test Facility:****A. Accreditations for Conformity Assessment (International)**

Country/Region	Scope Covered By	Scope	Note
USA	ISO/IEC 17025	FCC ID \ DOC \ VOC	1
Canada		IC ID \ VOC	2
Japan		MIC-T \ MIC-R	-
Europe		EMCD \ RED	-
Taiwan		NCC	-
Hong Kong		OFCA	-
Australia		RCM	-
India		WPC	-
Thailand		NTC	-
Singapore		IDA	-
Note: 1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476. 2. ISED CAB identifier: CN0013			

**B. TCBs and Notify Bodies Recognized Testing Laboratory.**

Recognized Testing Laboratory of ...	Notify body number
TUV Rheinland	Optional.
Intertek	
TUV SUD	
SGS	
Phoenix Testlab GmbH	0700
Element Materials Technology Warwick Ltd	0891
Timco Engineering, Inc.	1177
Eurofins Product Service GmbH	0681

### 3 Contents

	<b>Page</b>
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 LABORATORIES INTRODUCTION.....</b>	<b>2</b>
<b>3 CONTENTS .....</b>	<b>4</b>
<b>4 REVISION HISTORY .....</b>	<b>6</b>
<b>5 GENERAL INFORMATION.....</b>	<b>7</b>
5.1 GENERAL DESCRIPTION OF E.U.T. ....	7
5.2 DETAILS OF E.U.T. ....	7
5.3 CHANNEL LIST.....	9
5.4 TEST MODE .....	10
<b>6 TEST SUMMARY .....</b>	<b>11</b>
<b>7 EQUIPMENT USED DURING TEST .....</b>	<b>12</b>
7.1 EQUIPMENTS LIST .....	12
7.2 DESCRIPTION OF SUPPORT UNITS .....	13
7.3 MEASUREMENT UNCERTAINTY .....	13
7.4 TEST EQUIPMENT CALIBRATION .....	13
<b>8 CONDUCTED EMISSION .....</b>	<b>14</b>
8.1 E.U.T. OPERATION .....	14
8.2 EUT SETUP.....	14
8.3 MEASUREMENT DESCRIPTION .....	14
8.4 CONDUCTED EMISSION TEST RESULT .....	15
<b>9 RADIATED EMISSIONS.....</b>	<b>19</b>
9.1 EUT OPERATION.....	19
9.2 TEST SETUP .....	20
9.3 SPECTRUM ANALYZER SETUP .....	21
9.4 TEST PROCEDURE .....	22
9.5 CORRECTED AMPLITUDE & MARGIN CALCULATION .....	22
9.6 SUMMARY OF TEST RESULTS .....	23
<b>10 CONDUCTED SPURIOUS EMISSIONS.....</b>	<b>39</b>
10.1 TEST PROCEDURE.....	39
10.2 TEST RESULT .....	40
<b>11 BAND EDGE MEASUREMENT .....</b>	<b>56</b>
11.1 TEST PROCEDURE .....	56
11.2 TEST RESULT .....	57
<b>12 6 DB BANDWIDTH AND 99% BANDWIDTH MEASUREMENT .....</b>	<b>62</b>
12.1 TEST PROCEDURE:.....	62
12.2 TEST RESULT: .....	62
<b>13 MAXIMUM PEAK CONDUCTED OUTPUT POWER.....</b>	<b>71</b>
13.1 TEST PROCEDURE:.....	71
13.2 TEST RESULT: .....	72
<b>14 DUTY CYCLE.....</b>	<b>81</b>
<b>15 POWER SPECTRAL DENSITY .....</b>	<b>82</b>
15.1 TEST PROCEDURE:.....	82
15.2 TEST RESULT: .....	82
<b>16 ANTENNA REQUIREMENT .....</b>	<b>91</b>
<b>17 RF EXPOSURE.....</b>	<b>92</b>

**18 PHOTOGRAPHS OF TEST SETUP AND EUT..... 93**

#### 4 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS19S02008 915-3W	2019-02-22	2019-02-23 to 2019-03-08	2019-03-11	original	-	Replaced
WTS19S02008 915-3W V1	2019-02-22	2019-02-23 to 2019-03-08	2019-03-29	Version 1	Updated	Valid

## 5 General Information

### 5.1 General Description of E.U.T.

Product:	Smart Phone
Model(s):	TE580P
Model Description:	N/A
GSM Band(s):	GSM 850/900/1800/1900MHz
GPRS/EGPRS Class:	12
WCDMA Band(s):	FDD Band II/IV/V
LTE Band(s):	FDD Band 2/4/5/7/12/13/17
Wi-Fi Specification:	2.4G-802.11b/g/n HT20/n HT40 5G-802.11a/n HT20/n HT40
Bluetooth Version:	Bluetooth v4.0 with BLE
GPS:	Support
NFC:	N/A
Hardware Version:	R887L_MB_V1.0_201800705
Software Version:	TE580P_US_V1P_20190118
Highest frequency (Exclude Radio):	1.25GHz
Storage Location:	Internal Storage
Note:	N/A

### 5.2 Details of E.U.T.

Operation Frequency:	WiFi: 802.11b/g/n HT20: 2412~2462MHz 802.11n HT40: 2422~2452MHz BLE:2402-2480MHz
Max. RF output power:	WiFi(2.4G): 9.37dBm BLE: 4.58dBm
Type of Modulation:	WiFi: CCK, OFDM BLE:GFSK
Antenna installation:	WiFi: internal permanent antenna BLE: internal permanent antenna
Antenna Gain:	WiFi(2.4G): 1.2dBi BLE: 1.2dBi
Ratings:	Battery DC 3.8V, 3600mAh DC 5V, 2.0A, charging from adapter (Adapter Input: 100-240V~50/60Hz 0.3A)

Adapter:

Manufacturer: Shen zhen Mao Two Power Co.,Ltd.

Model No.: MR-0502000US



### 5.3 Channel List

#### WIFI

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

#### BT BLE

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

## 5.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Power Spectral Density	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
6dB Bandwidth	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Band Edge	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Transmitter Spurious Emissions	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX

Table 2 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	BT BLE	1 Mbps	0/19/39	TX
Power Spectral Density	BT BLE	1 Mbps	0/19/39	TX
6dB Bandwidth	BT BLE	1 Mbps	0/19/39	TX
Band Edge	BT BLE	1 Mbps	0/19/39	TX
Transmitter Spurious Emissions	BT BLE	1 Mbps	0/19/39	TX

**Note** :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

## 6 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

## 7 Equipment Used during Test

### 7.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2018-09-12	2019-09-11
2.	LISN	R&S	ENV216	101215	2018-09-12	2019-09-11
3.	Cable	Top	TYPE16(3.5M)	-	2018-09-12	2019-09-11
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2018-09-12	2019-09-11
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	2018-09-12	2019-09-11
3.	Limiter	York	MTS-IMP-136	261115-001-0024	2018-09-12	2019-09-11
4.	Cable	LARGE	RF300	-	2018-09-12	2019-09-11
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	2018-04-29	2019-04-28
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	2018-04-09	2019-04-08
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2018-04-09	2019-04-08
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2018-09-12	2019-09-11
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2018-04-09	2019-04-08
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2018-04-09	2019-04-08
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2018-04-13	2019-04-12
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	2018-04-13	2019-04-12
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2018-04-13	2019-04-12
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2018-04-09	2019-04-08
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	2018-04-13	2019-04-12
4	Cable	HUBER+SUHNER	CBL2	525178	2018-04-13	2019-04-12

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2018-09-12	2019-09-11
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2018-09-12	2019-09-11
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2018-09-12	2019-09-11

## 7.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

## 7.3 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	± 3.64 dB(AC mains 150KHz~30MHz)
Radiated Spurious Emissions	± 5.08 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Radio Frequency	± 1 x 10 <sup>-7</sup> Hz
RF Power	± 0.42 dB
RF Power Density	± 0.7dB
Conducted Spurious Emissions	± 2.76 dB (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor:k=2	

## 7.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

## 8 Conducted Emission

Test Requirement: FCC CFR 47 Part 15 Section 15.207

Test Method: ANSI C63.10:2013

Test Result: PASS

Frequency Range: 150kHz to 30MHz

Class/Severity: Class B

Limit:

Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

### 8.1 E.U.T. Operation

Operating Environment :

Temperature: 21.5 °C

Humidity: 51.9 % RH


Atmospheric Pressure: 101.2kPa

EUT Operation :

The test was performed in TX transmitting mode, the worst data were shown in the report.

### 8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10.

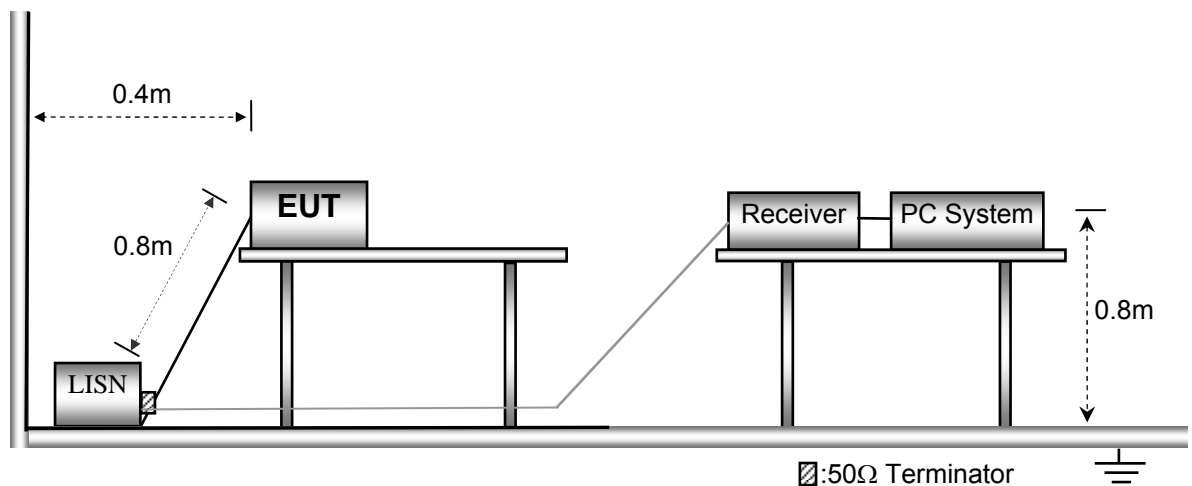

### 8.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

## 8.4 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Worst Mode: WIFI mode ( 802.11b mode low channel )

Live line:

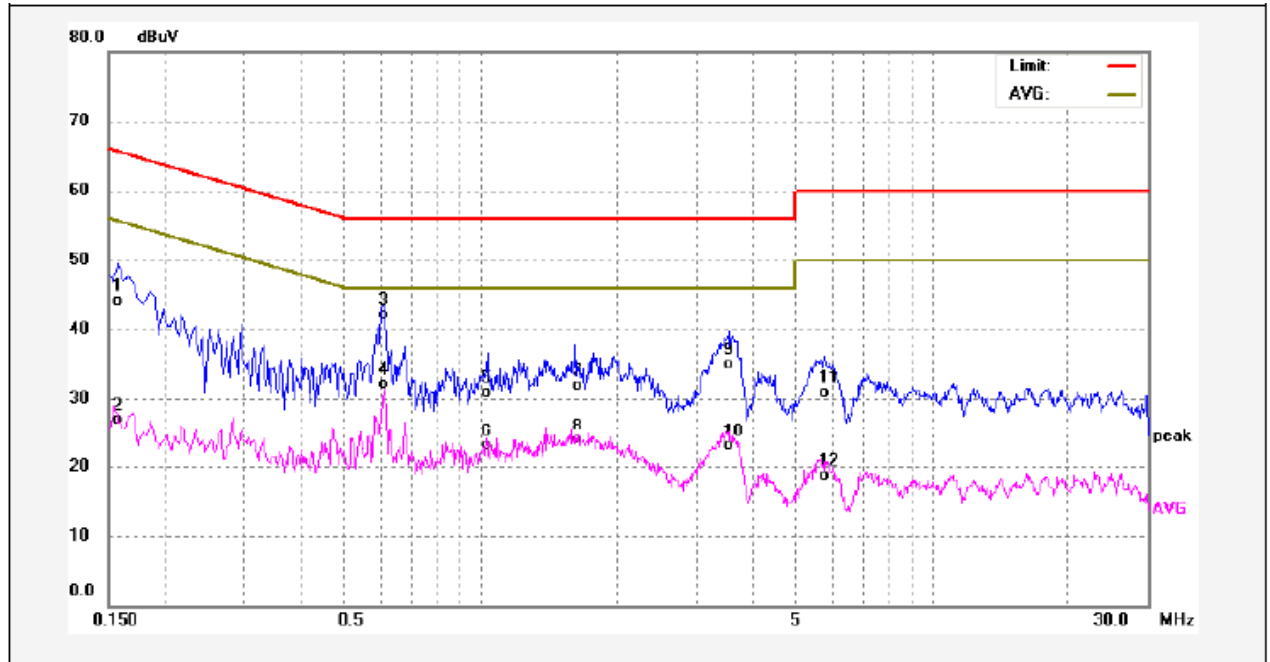

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1580	33.77	10.27	44.04	65.56	-21.52	QP	
2	0.1580	16.54	10.27	26.81	55.56	-28.75	AVG	
3	0.6100	31.67	10.48	42.15	56.00	-13.85	QP	
4	0.6100	21.69	10.48	32.17	46.00	-13.83	AVG	
5	1.0339	20.46	10.44	30.90	56.00	-25.10	QP	
6	1.0339	12.70	10.44	23.14	46.00	-22.86	AVG	
7	1.6220	21.36	10.50	31.86	56.00	-24.14	QP	
8	1.6220	13.39	10.50	23.89	46.00	-22.11	AVG	
9	3.5300	24.15	10.74	34.89	56.00	-21.11	QP	
10	3.5300	12.40	10.74	23.14	46.00	-22.86	AVG	
11	5.7460	20.12	10.88	31.00	60.00	-29.00	QP	
12	5.7460	7.86	10.88	18.74	50.00	-31.26	AVG	

Neutral line:

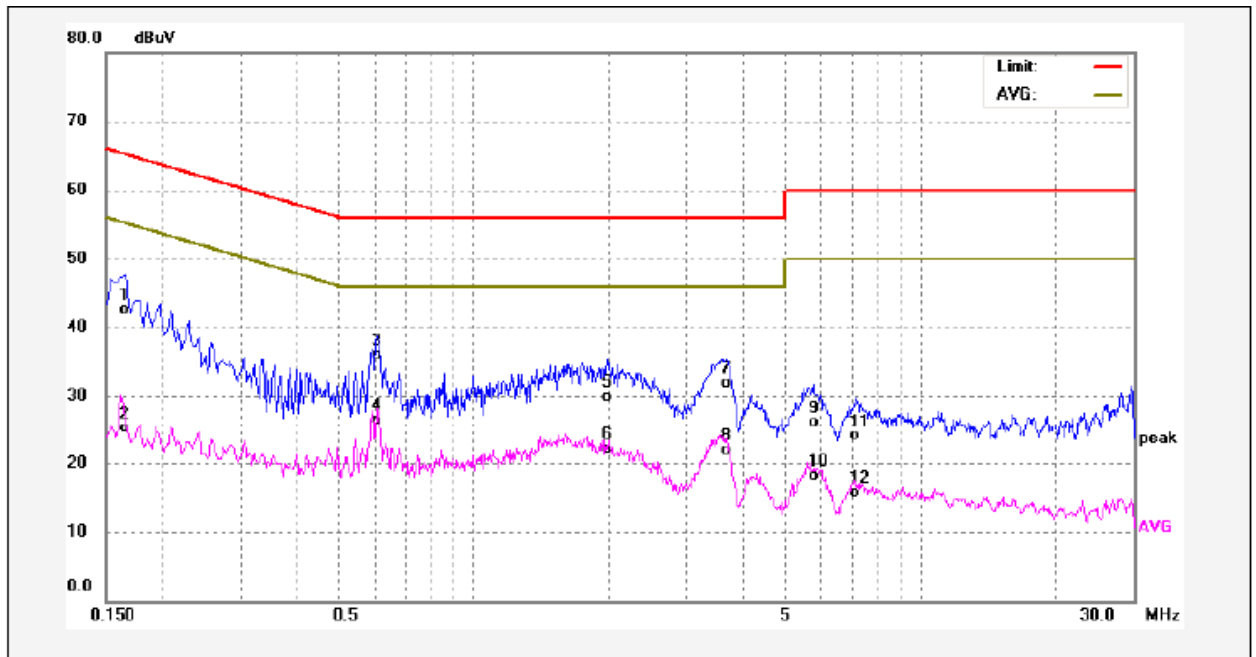


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1660	32.25	10.28	42.53	65.15	-22.62	QP	
2	0.1660	15.10	10.28	25.38	55.15	-29.77	AVG	
3	0.6060	25.32	10.49	35.81	56.00	-20.19	QP	
4	0.6060	15.94	10.49	26.43	46.00	-19.57	AVG	
5	1.9860	19.34	10.56	29.90	56.00	-26.10	QP	
6	1.9860	11.51	10.56	22.07	46.00	-23.93	AVG	
7	3.6700	21.22	10.75	31.97	56.00	-24.03	QP	
8	3.6700	11.24	10.75	21.99	46.00	-24.01	AVG	
9	5.7700	15.21	10.89	26.10	60.00	-33.90	QP	
10	5.7700	7.17	10.89	18.06	50.00	-31.94	AVG	
11	7.1940	13.05	11.02	24.07	60.00	-35.93	QP	
12	7.1940	4.73	11.02	15.75	50.00	-34.25	AVG	




Worst Mode: BLE mode (low channel )

Live line:

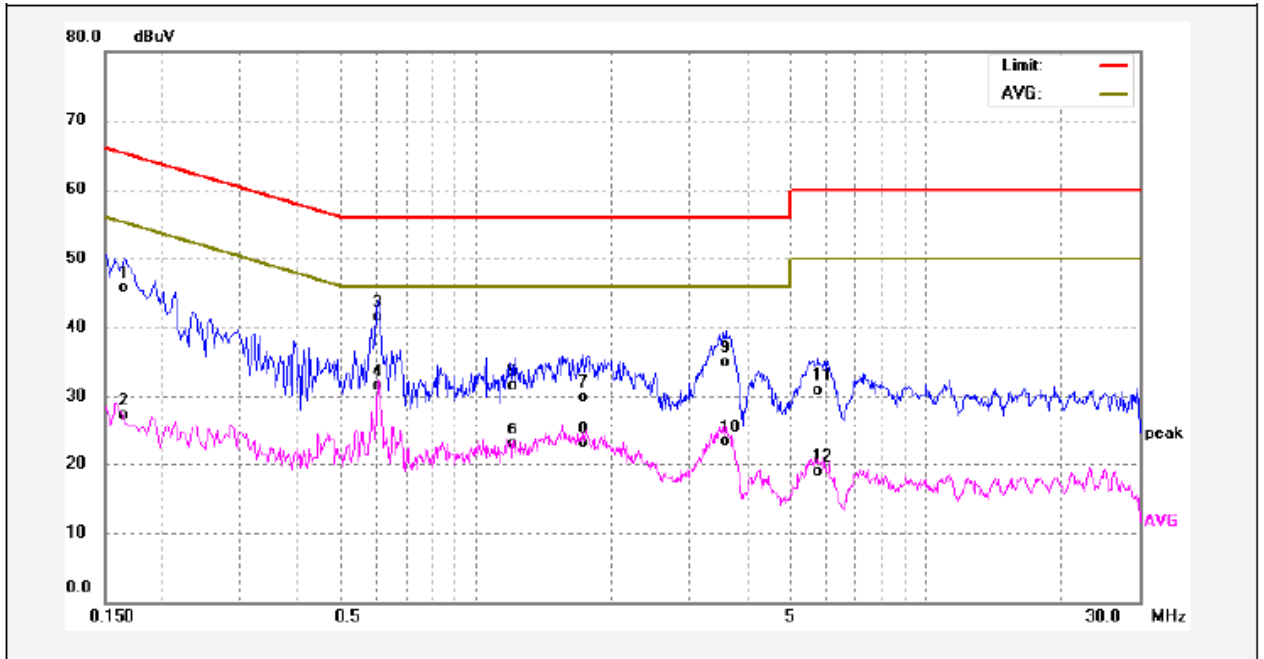

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1660	35.37	10.28	45.65	65.15	-19.50	QP	
2	0.1660	17.10	10.28	27.38	55.15	-27.77	AVG	
3	0.6060	31.09	10.49	41.58	56.00	-14.42	QP	
4	0.6060	21.03	10.49	31.52	46.00	-14.48	AVG	
5	1.2180	21.13	10.44	31.57	56.00	-24.43	QP	
6	1.2180	12.55	10.44	22.99	46.00	-23.01	AVG	
7	1.7220	19.30	10.52	29.82	56.00	-26.18	QP	
8	1.7220	12.52	10.52	23.04	46.00	-22.96	AVG	
9	3.6180	24.18	10.75	34.93	56.00	-21.07	QP	
10	3.6180	12.55	10.75	23.30	46.00	-22.70	AVG	
11	5.8020	20.07	10.89	30.96	60.00	-29.04	QP	
12	5.8020	7.94	10.89	18.83	50.00	-31.17	AVG	

Neutral line:

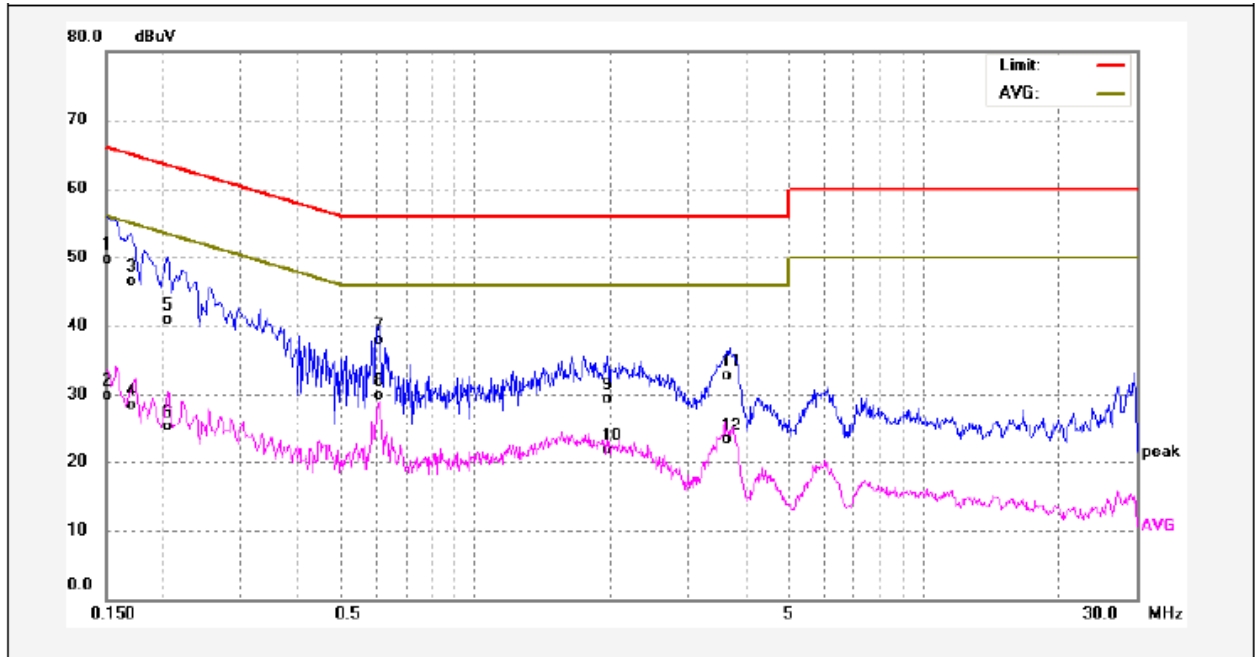

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	39.41	10.26	49.67	65.99	-16.32	QP	
2	0.1500	19.55	10.26	29.81	55.99	-26.18	AVG	
3	0.1700	36.23	10.29	46.52	64.96	-18.44	QP	
4	0.1700	18.20	10.29	28.49	54.96	-26.47	AVG	
5	0.2060	30.58	10.33	40.91	63.36	-22.45	QP	
6	0.2060	15.03	10.33	25.36	53.36	-28.00	AVG	
7	0.6100	27.47	10.48	37.95	56.00	-18.05	QP	
8	0.6100	19.35	10.48	29.83	46.00	-16.17	AVG	
9	1.9740	18.67	10.56	29.23	56.00	-26.77	QP	
10	1.9740	11.11	10.56	21.67	46.00	-24.33	AVG	
11	3.6980	21.95	10.75	32.70	56.00	-23.30	QP	
12	3.6980	12.58	10.75	23.33	46.00	-22.67	AVG	

## 9 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;  
ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### 9.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in TX transmitting mode, the test data were shown in the report.


## 9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

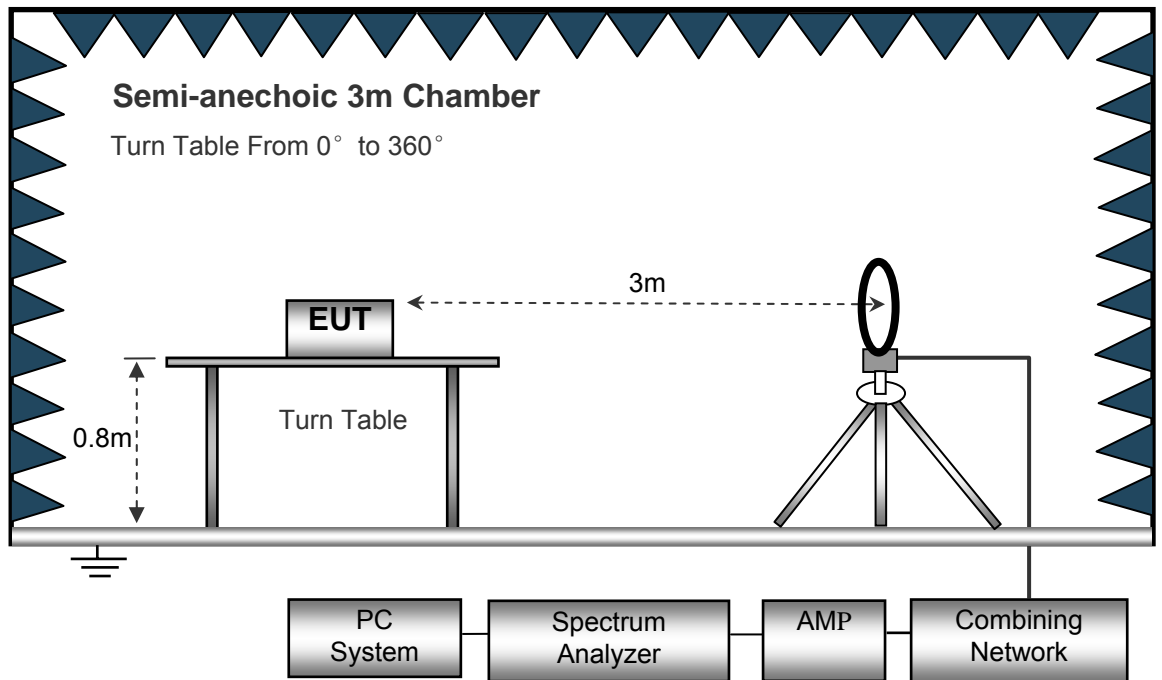

The test setup for emission measurement from 30 MHz to 1 GHz.

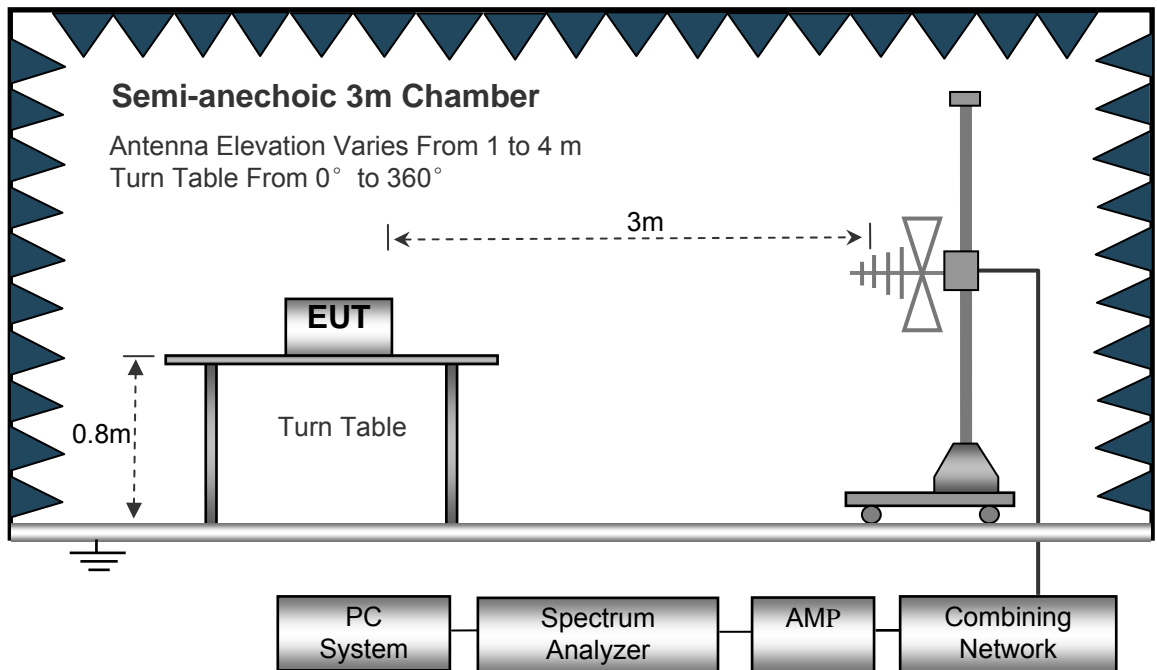

The test setup for emission measurement above 1 GHz.

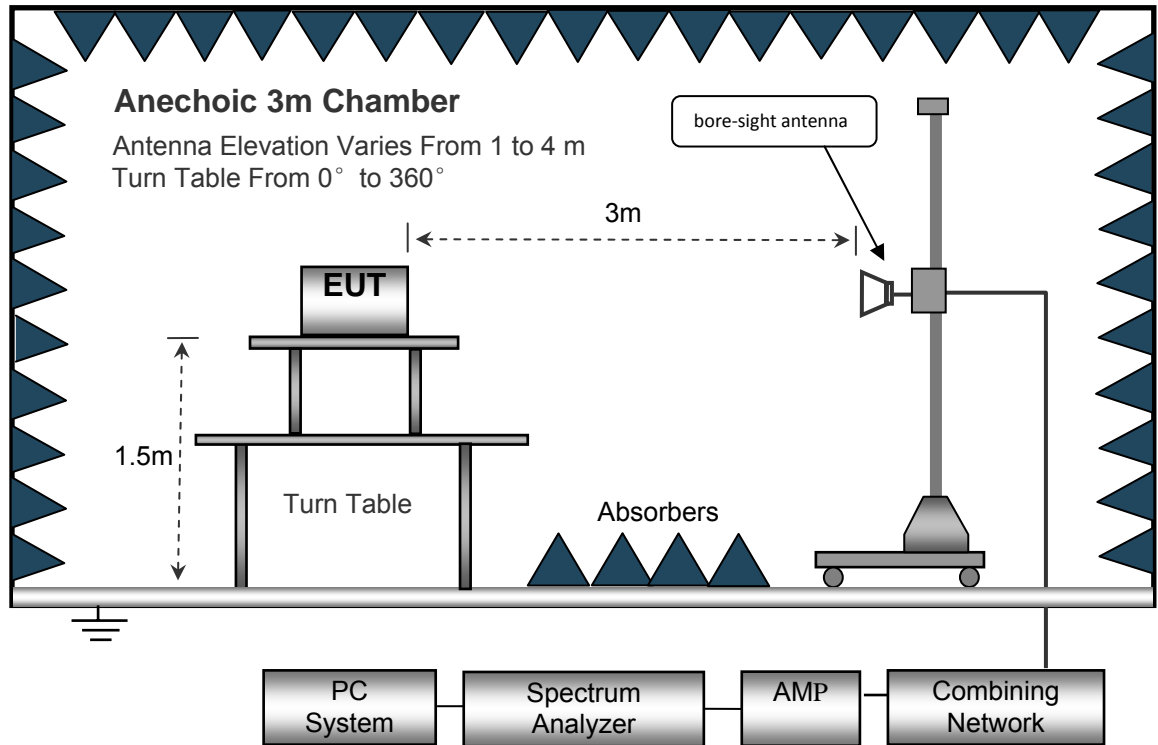

### 9.3 Spectrum Analyzer Setup

Below 30MHz

- Sweep Speed ..... Auto
- IF Bandwidth..... 10kHz
- Video Bandwidth..... 10kHz
- Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

- Sweep Speed ..... Auto
- Detector ..... PK
- Resolution Bandwidth..... 100kHz
- Video Bandwidth..... 300kHz

Above 1GHz

- Sweep Speed ..... Auto
- Detector ..... PK
- Resolution Bandwidth..... 1MHz
- Video Bandwidth..... 3MHz
- Detector ..... Ave.
- Resolution Bandwidth..... 1MHz
- Video Bandwidth..... 10Hz

## 9.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high -pass filter is used during radiated emissions above 1GHz measurement.

## 9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

## 9.6 Summary of Test Results

**Wifi:**

**Test Frequency: 9KHz~30MHz**

Remark: only the worst data (802.11b/g/n Low channel mode) were recorded.

Frequency	Measurement results dB $\mu$ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB $\mu$ V/m @30m	Limits dB $\mu$ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
802.11b							
6.021	25.10	QP	21.84	40.00	6.94	29.54	-22.60
15.730	25.23	QP	21.35	40.00	6.58	29.54	-22.96
25.680	25.47	QP	20.67	40.00	6.14	29.54	-23.40
802.11g							
6.021	25.06	QP	21.84	40.00	6.90	29.54	-22.64
15.730	25.19	QP	21.35	40.00	6.54	29.54	-23.00
25.680	25.45	QP	20.67	40.00	6.12	29.54	-23.42
802.11n(HT20)							
6.021	25.30	QP	21.84	40.00	7.14	29.54	-22.40
15.730	25.46	QP	21.35	40.00	6.81	29.54	-22.73
25.680	25.93	QP	20.67	40.00	6.60	29.54	-22.94
802.11n(HT40)							
6.021	25.82	QP	21.84	40.00	7.66	29.54	-21.88
15.730	25.49	QP	21.35	40.00	6.84	29.54	-22.70
25.680	25.18	QP	20.67	40.00	5.85	29.54	-23.69

**Test Frequency : 30MHz ~ 18GHz**

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11b: Low Channel 2412MHz									
223.45	40.41	QP	25	1.3	H	-11.62	28.79	46.00	-17.21
223.45	36.38	QP	44	1.9	V	-11.62	24.76	46.00	-21.24
4824.00	48.64	PK	229	1.2	V	-1.06	47.58	74.00	-26.42
4824.00	45.15	Ave	229	1.2	V	-1.06	44.09	54.00	-9.91
7236.00	41.81	PK	97	1.6	H	1.33	43.14	74.00	-30.86
7236.00	41.96	Ave	97	1.6	H	1.33	43.29	54.00	-10.71
2349.91	46.53	PK	121	1.4	V	-13.19	33.34	74.00	-40.66
2349.91	38.07	Ave	121	1.4	V	-13.19	24.88	54.00	-29.12
2369.61	44.26	PK	111	1.5	H	-13.14	31.12	74.00	-42.88
2369.61	37.57	Ave	111	1.5	H	-13.14	24.43	54.00	-29.57
2484.00	44.45	PK	303	1.8	V	-13.08	31.37	74.00	-42.63
2484.00	36.16	Ave	303	1.8	V	-13.08	23.08	54.00	-30.92



Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11b: Middle Channel 2437MHz									
223.45	40.77	QP	23	1.7	H	-11.62	29.15	46.00	-16.85
223.45	37.30	QP	321	1.5	V	-11.62	25.68	46.00	-20.32
4874.00	49.58	PK	67	1.0	V	-0.62	48.96	74.00	-25.04
4874.00	45.04	Ave	67	1.0	V	-0.62	44.42	54.00	-9.58
7311.00	42.33	PK	304	1.2	H	2.21	44.54	74.00	-29.46
7311.00	40.95	Ave	304	1.2	H	2.21	43.16	54.00	-10.84
2325.03	45.19	PK	148	1.4	V	-13.19	32.00	74.00	-42.00
2325.03	37.09	Ave	148	1.4	V	-13.19	23.90	54.00	-30.10
2385.49	43.60	PK	130	1.0	H	-13.14	30.46	74.00	-43.54
2385.49	36.60	Ave	130	1.0	H	-13.14	23.46	54.00	-30.54
2492.54	42.58	PK	358	1.3	V	-13.08	29.50	74.00	-44.50
2492.54	37.31	Ave	358	1.3	V	-13.08	24.23	54.00	-29.77

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11b: High Channel 2462MHz									
223.45	42.05	QP	270	1.4	H	-11.62	30.43	46.00	-15.57
223.45	36.48	QP	25	1.1	V	-11.62	24.86	46.00	-21.14
4924.00	49.52	PK	348	1.5	V	-0.24	49.28	74.00	-24.72
4924.00	45.68	Ave	348	1.5	V	-0.24	45.44	54.00	-8.56
7386.00	41.09	PK	263	1.2	H	2.84	43.93	74.00	-30.07
7386.00	41.97	Ave	263	1.2	H	2.84	44.81	54.00	-9.19
2348.77	46.95	PK	225	1.3	V	-13.19	33.76	74.00	-40.24
2348.77	39.82	Ave	225	1.3	V	-13.19	26.63	54.00	-27.37
2376.75	43.00	PK	305	1.3	H	-13.14	29.86	74.00	-44.14
2376.75	37.55	Ave	305	1.3	H	-13.14	24.41	54.00	-29.59
2484.86	42.36	PK	34	1.8	V	-13.08	29.28	74.00	-44.72
2484.86	37.90	Ave	34	1.8	V	-13.08	24.82	54.00	-29.18

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11g: Low Channel 2412MHz									
223.45	41.58	QP	238	1.3	H	-11.62	29.96	46.00	-16.04
223.45	35.64	QP	192	1.4	V	-11.62	24.02	46.00	-21.98
4824.00	48.67	PK	223	1.5	V	-1.06	47.61	74.00	-26.39
4824.00	45.90	Ave	223	1.5	V	-1.06	44.84	54.00	-9.16
7236.00	41.53	PK	69	1.5	H	1.33	42.86	74.00	-31.14
7236.00	42.69	Ave	69	1.5	H	1.33	44.02	54.00	-9.98
2310.43	45.48	PK	351	1.5	V	-13.19	32.29	74.00	-41.71
2310.43	37.89	Ave	351	1.5	V	-13.19	24.70	54.00	-29.30
2368.08	43.31	PK	40	1.6	H	-13.14	30.17	74.00	-43.83
2368.08	37.30	Ave	40	1.6	H	-13.14	24.16	54.00	-29.84
2492.17	43.28	PK	35	1.9	V	-13.08	30.20	74.00	-43.80
2492.17	38.49	Ave	35	1.9	V	-13.08	25.41	54.00	-28.59

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11g: Middle Channel 2437MHz									
223.45	42.95	QP	66	1.9	H	-11.62	31.33	46.00	-14.67
223.45	34.41	QP	266	1.1	V	-11.62	22.79	46.00	-23.21
4874.00	49.07	PK	256	1.6	V	-0.62	48.45	74.00	-25.55
4874.00	44.93	Ave	256	1.6	V	-0.62	44.31	54.00	-9.69
7311.00	40.99	PK	65	1.6	H	2.21	43.20	74.00	-30.80
7311.00	41.69	Ave	65	1.6	H	2.21	43.90	54.00	-10.10
2330.19	45.46	PK	74	1.9	V	-13.19	32.27	74.00	-41.73
2330.19	37.94	Ave	74	1.9	V	-13.19	24.75	54.00	-29.25
2352.11	44.13	PK	199	2.0	H	-13.14	30.99	74.00	-43.01
2352.11	38.00	Ave	199	2.0	H	-13.14	24.86	54.00	-29.14
2499.89	43.95	PK	328	1.7	V	-13.08	30.87	74.00	-43.13
2499.89	38.42	Ave	328	1.7	V	-13.08	25.34	54.00	-28.66

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11g: High Channel 2462MHz									
223.45	42.73	QP	268	1.6	H	-11.62	31.11	46.00	-14.89
223.45	35.88	QP	135	1.9	V	-11.62	24.26	46.00	-21.74
4924.00	49.44	PK	168	2.0	V	-0.24	49.20	74.00	-24.80
4924.00	46.25	Ave	168	2.0	V	-0.24	46.01	54.00	-7.99
7386.00	41.21	PK	331	1.1	H	2.84	44.05	74.00	-29.95
7386.00	41.45	Ave	331	1.1	H	2.84	44.29	54.00	-9.71
2331.61	45.51	PK	257	1.2	V	-13.19	32.32	74.00	-41.68
2331.61	39.94	Ave	257	1.2	V	-13.19	26.75	54.00	-27.25
2363.52	43.87	PK	273	1.7	H	-13.14	30.73	74.00	-43.27
2363.52	38.36	Ave	273	1.7	H	-13.14	25.22	54.00	-28.78
2488.19	43.05	PK	189	1.9	V	-13.08	29.97	74.00	-44.03
2488.19	37.94	Ave	189	1.9	V	-13.08	24.86	54.00	-29.14

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n20: Low Channel 2412MHz									
223.45	42.18	QP	230	1.3	H	-11.62	30.56	46.00	-15.44
223.45	34.41	QP	200	1.8	V	-11.62	22.79	46.00	-23.21
4824.00	49.38	PK	316	1.1	V	-1.06	48.32	74.00	-25.68
4824.00	46.19	Ave	316	1.1	V	-1.06	45.13	54.00	-8.87
7236.00	41.28	PK	323	1.5	H	1.33	42.61	74.00	-31.39
7236.00	42.52	Ave	323	1.5	H	1.33	43.85	54.00	-10.15
2318.10	46.08	PK	322	1.2	V	-13.19	32.89	74.00	-41.11
2318.10	38.70	Ave	322	1.2	V	-13.19	25.51	54.00	-28.49
2372.13	42.40	PK	184	1.9	H	-13.14	29.26	74.00	-44.74
2372.13	37.07	Ave	184	1.9	H	-13.14	23.93	54.00	-30.07
2488.62	44.00	PK	3	1.8	V	-13.08	30.92	74.00	-43.08
2488.62	38.85	Ave	3	1.8	V	-13.08	25.77	54.00	-28.23

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n20: Middle Channel 2437MHz									
223.45	43.41	QP	273	1.3	H	-11.62	31.79	46.00	-14.21
223.45	34.55	QP	52	1.3	V	-11.62	22.93	46.00	-23.07
4874.00	47.90	PK	273	1.9	V	-0.62	47.28	74.00	-26.72
4874.00	45.66	Ave	273	1.9	V	-0.62	45.04	54.00	-8.96
7311.00	40.59	PK	162	1.8	H	2.21	42.80	74.00	-31.20
7311.00	43.29	Ave	162	1.8	H	2.21	45.50	54.00	-8.50
2323.47	46.73	PK	69	1.8	V	-13.19	33.54	74.00	-40.46
2323.47	38.96	Ave	69	1.8	V	-13.19	25.77	54.00	-28.23
2387.70	42.96	PK	105	1.8	H	-13.14	29.82	74.00	-44.18
2387.70	36.03	Ave	105	1.8	H	-13.14	22.89	54.00	-31.11
2490.83	44.45	PK	136	1.2	V	-13.08	31.37	74.00	-42.63
2490.83	36.49	Ave	136	1.2	V	-13.08	23.41	54.00	-30.59

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n20: High Channel 2462MHz									
223.45	44.36	QP	296	1.7	H	-11.62	32.74	46.00	-13.26
223.45	35.75	QP	129	1.5	V	-11.62	24.13	46.00	-21.87
4924.00	46.69	PK	242	1.0	V	-0.24	46.45	74.00	-27.55
4924.00	46.18	Ave	242	1.0	V	-0.24	45.94	54.00	-8.06
7386.00	39.25	PK	106	1.9	H	2.84	42.09	74.00	-31.91
7386.00	41.90	Ave	106	1.9	H	2.84	44.74	54.00	-9.26
2347.20	45.32	PK	262	1.8	V	-13.19	32.13	74.00	-41.87
2347.20	39.43	Ave	262	1.8	V	-13.19	26.24	54.00	-27.76
2388.73	42.76	PK	191	1.9	H	-13.14	29.62	74.00	-44.38
2388.73	38.60	Ave	191	1.9	H	-13.14	25.46	54.00	-28.54
2489.28	43.44	PK	346	1.6	V	-13.08	30.36	74.00	-43.64
2489.28	37.67	Ave	346	1.6	V	-13.08	24.59	54.00	-29.41



Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n40: Low Channel 2422MHz									
223.45	44.61	QP	331	1.2	H	-11.62	32.99	46.00	-13.01
223.45	35.65	QP	127	1.1	V	-11.62	24.03	46.00	-21.97
4844.00	43.71	PK	256	1.6	V	-1.06	42.65	74.00	-31.35
4844.00	43.63	Ave	256	1.6	V	-1.06	42.57	54.00	-11.43
7266.00	37.15	PK	107	1.3	H	1.33	38.48	74.00	-35.52
7266.00	39.09	Ave	107	1.3	H	1.33	40.42	54.00	-13.58
2318.48	45.03	PK	238	1.8	V	-13.19	31.84	74.00	-42.16
2318.48	37.71	Ave	238	1.8	V	-13.19	24.52	54.00	-29.48
2366.17	42.59	PK	238	1.4	H	-13.14	29.45	74.00	-44.55
2366.17	38.16	Ave	238	1.4	H	-13.14	25.02	54.00	-28.98
2490.47	44.21	PK	294	1.5	V	-13.08	31.13	74.00	-42.87
2490.47	38.42	Ave	294	1.5	V	-13.08	25.34	54.00	-28.66

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n40: Middle Channel 2437MHz									
223.45	45.30	QP	59	1.6	H	-11.62	33.68	46.00	-12.32
223.45	35.44	QP	38	2.0	V	-11.62	23.82	46.00	-22.18
4874.00	43.85	PK	198	1.5	V	-0.62	43.23	74.00	-30.77
4874.00	42.80	Ave	198	1.5	V	-0.62	42.18	54.00	-11.82
7311.00	36.55	PK	51	1.6	H	2.21	38.76	74.00	-35.24
7311.00	39.97	Ave	51	1.6	H	2.21	42.18	54.00	-11.82
2310.21	46.75	PK	335	1.6	V	-13.19	33.56	74.00	-40.44
2310.21	39.22	Ave	335	1.6	V	-13.19	26.03	54.00	-27.97
2378.52	43.81	PK	19	1.7	H	-13.14	30.67	74.00	-43.33
2378.52	38.18	Ave	19	1.7	H	-13.14	25.04	54.00	-28.96
2492.16	42.25	PK	36	1.8	V	-13.08	29.17	74.00	-44.83
2492.16	38.60	Ave	36	1.8	V	-13.08	25.52	54.00	-28.48

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n40: High Channel 2452MHz									
223.45	44.67	QP	30	1.8	H	-11.62	33.05	46.00	-12.95
223.45	35.79	QP	90	1.8	V	-11.62	24.17	46.00	-21.83
4904.00	44.32	PK	133	1.9	V	-0.24	44.08	74.00	-29.92
4904.00	42.86	Ave	133	1.9	V	-0.24	42.62	54.00	-11.38
7356.00	36.65	PK	44	1.6	H	2.84	39.49	74.00	-34.51
7356.00	39.66	Ave	44	1.6	H	2.84	42.50	54.00	-11.50
2312.58	46.49	PK	342	1.5	V	-13.19	33.30	74.00	-40.70
2312.58	38.26	Ave	342	1.5	V	-13.19	25.07	54.00	-28.93
2382.80	44.36	PK	2	1.6	H	-13.14	31.22	74.00	-42.78
2382.80	38.91	Ave	2	1.6	H	-13.14	25.77	54.00	-28.23
2497.48	43.72	PK	53	1.3	V	-13.08	30.64	74.00	-43.36
2497.48	38.18	Ave	53	1.3	V	-13.08	25.10	54.00	-28.90

**Test Frequency: 18GHz~25GHz**

The measurements were more than 20 dB below the limit and not reported.

**BT BLE:****Test Frequency: 9KHz~26MHz**

Remark: only the worst data (GFSK modulation Low channel mode) were recorded.

Frequency	Measurement results dB $\mu$ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB $\mu$ V/m @30m	Limits dB $\mu$ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
6.021	25.43	QP	21.84	40.00	7.27	29.54	-22.27
15.730	25.11	QP	21.35	40.00	6.46	29.54	-23.08
25.680	24.89	QP	20.67	40.00	5.56	29.54	-23.98

**Test Frequency : 26MHz ~ 30MHz**

The measurements were more than 20 dB below the limit and not reported.

**Test Frequency : 30MHz ~ 18GHz**

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK Low Channel 2402MHz									
269.33	33.74	QP	158	1.8	H	-13.35	20.39	46.00	-25.61
269.33	41.13	QP	17	1.1	V	-13.35	27.78	46.00	-18.22
4804.00	45.54	PK	230	1.2	V	-1.06	44.48	74.00	-29.52
4804.00	42.30	Ave	230	1.2	V	-1.06	41.24	54.00	-12.76
7206.00	45.25	PK	179	1.7	H	1.33	46.58	74.00	-27.42
7206.00	37.18	Ave	179	1.7	H	1.33	38.51	54.00	-15.49
2314.50	46.40	PK	13	1.2	V	-13.19	33.21	74.00	-40.79
2314.50	39.12	Ave	13	1.2	V	-13.19	25.93	54.00	-28.07
2381.03	43.37	PK	175	1.9	H	-13.14	30.23	74.00	-43.77
2381.03	38.21	Ave	175	1.9	H	-13.14	25.07	54.00	-28.93
2493.71	42.10	PK	182	1.7	V	-13.08	29.02	74.00	-44.98
2493.71	37.87	Ave	182	1.7	V	-13.08	24.79	54.00	-29.21

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK Middle Channel 2440MHz									
269.33	33.64	QP	87	1.9	H	-13.35	20.29	46.00	-25.71
269.33	40.44	QP	191	1.5	V	-13.35	27.09	46.00	-18.91
4880.00	43.46	PK	223	1.7	V	-0.62	42.84	74.00	-31.16
4880.00	42.99	Ave	223	1.7	V	-0.62	42.37	54.00	-11.63
7320.00	45.39	PK	64	1.6	H	2.21	47.60	74.00	-26.40
7320.00	38.59	Ave	64	1.6	H	2.21	40.80	54.00	-13.20
2326.27	46.84	PK	92	1.5	V	-13.19	33.65	74.00	-40.35
2326.27	37.16	Ave	92	1.5	V	-13.19	23.97	54.00	-30.03
2382.45	42.98	PK	213	1.5	H	-13.14	29.84	74.00	-44.16
2382.45	38.55	Ave	213	1.5	H	-13.14	25.41	54.00	-28.59
2488.77	43.80	PK	211	1.4	V	-13.08	30.72	74.00	-43.28
2488.77	37.10	Ave	211	1.4	V	-13.08	24.02	54.00	-29.98

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK High Channel 2480MHz									
269.33	33.89	QP	23	2.0	H	-13.35	20.54	46.00	-25.46
269.33	38.46	QP	158	1.1	V	-13.35	25.11	46.00	-20.89
4960.00	43.99	PK	11	1.4	V	-0.24	43.75	74.00	-30.25
4960.00	41.58	Ave	11	1.4	V	-0.24	41.34	54.00	-12.66
7440.00	45.06	PK	309	1.0	H	2.84	47.90	74.00	-26.10
7440.00	36.29	Ave	309	1.0	H	2.84	39.13	54.00	-14.87
2342.38	45.01	PK	10	1.2	V	-13.19	31.82	74.00	-42.18
2342.38	37.85	Ave	10	1.2	V	-13.19	24.66	54.00	-29.34
2351.06	43.62	PK	91	1.6	H	-13.14	30.48	74.00	-43.52
2351.06	38.84	Ave	91	1.6	H	-13.14	25.70	54.00	-28.30
2489.84	43.87	PK	247	1.1	V	-13.08	30.79	74.00	-43.21
2489.84	38.33	Ave	247	1.1	V	-13.08	25.25	54.00	-28.75

**Test Frequency: 18GHz~25GHz**

The measurements were more than 20 dB below the limit and not reported.

## 10 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;  
ANSI C63.10:2013

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
  - a) Set instrument center frequency to DTS channel center frequency.
  - b) Set the span to  $\approx 1.5$  times the DTS bandwidth.
  - c) Set the RBW = 100 kHz.
  - d) Set the VBW  $\approx [3 \times \text{RBW}]$ .
  - e) Detector = peak.
  - f) Sweep time = auto couple.
  - g) Trace mode = max hold.
  - h) Allow trace to fully stabilize.
  - i) Use the peak marker function to determine the maximum PSD level.


Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

### 10.2 Test Result


9KHz – 30MHz

802.11b

Low Channel

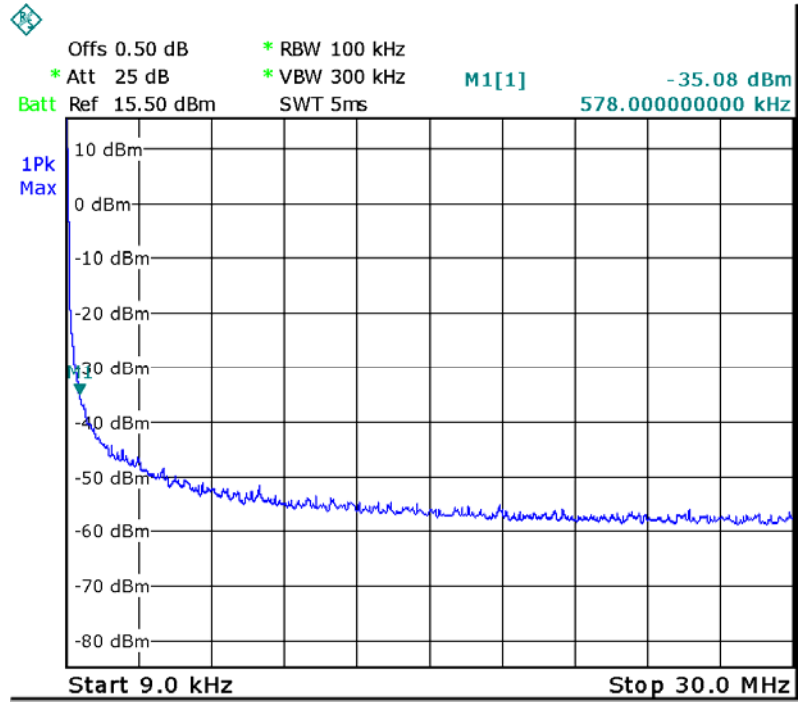


Middle Channel

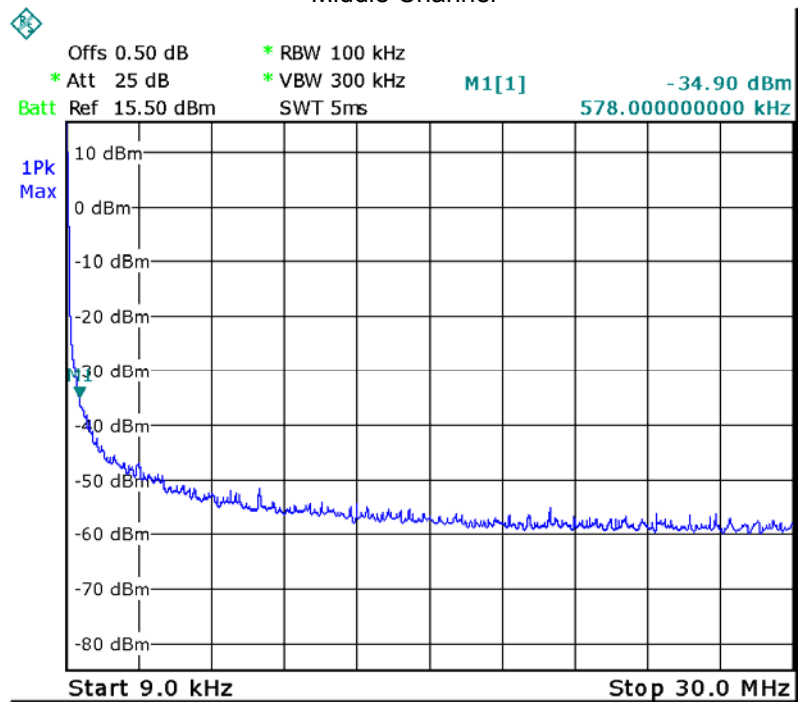






### High Channel

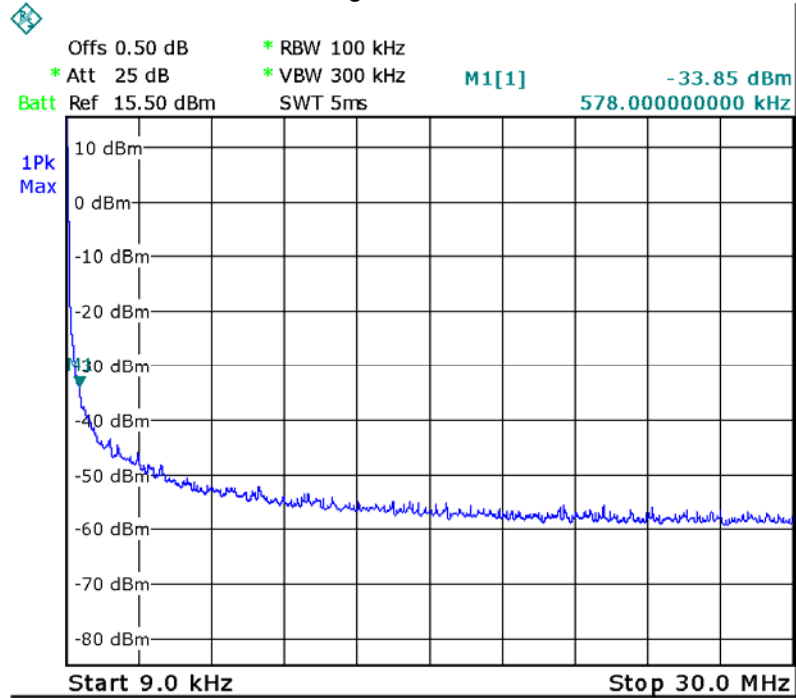

### 802.11g


### Low Channel

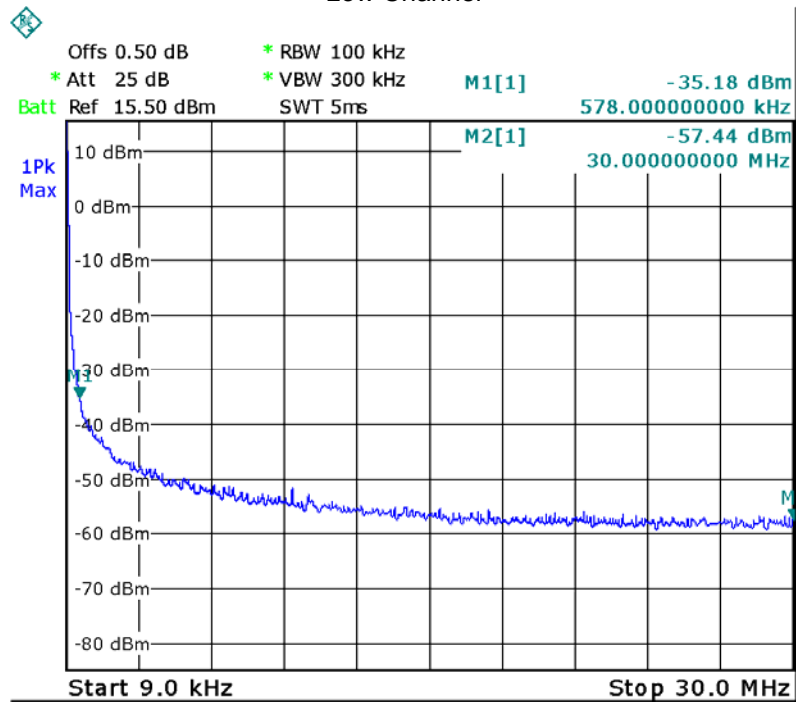

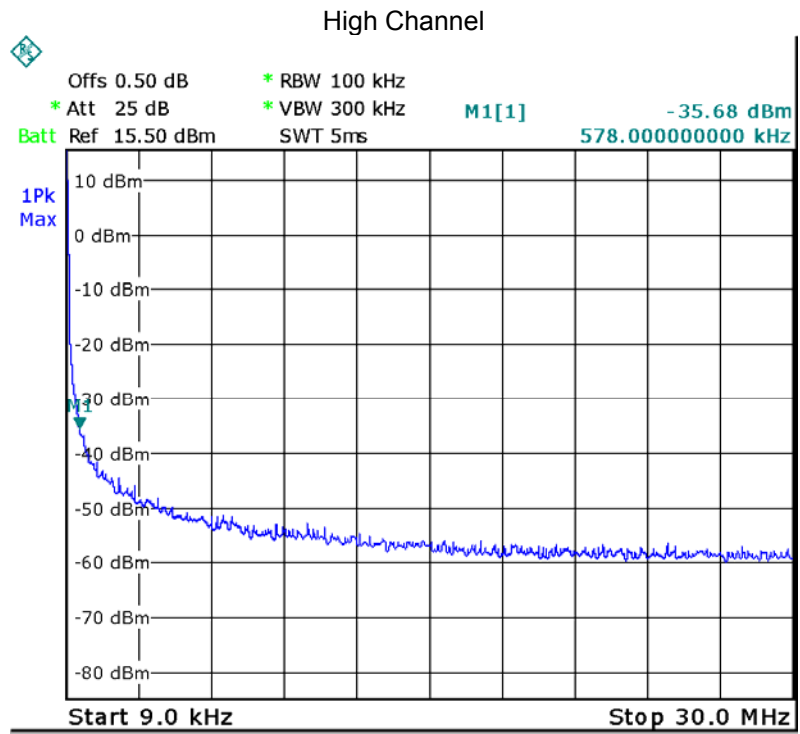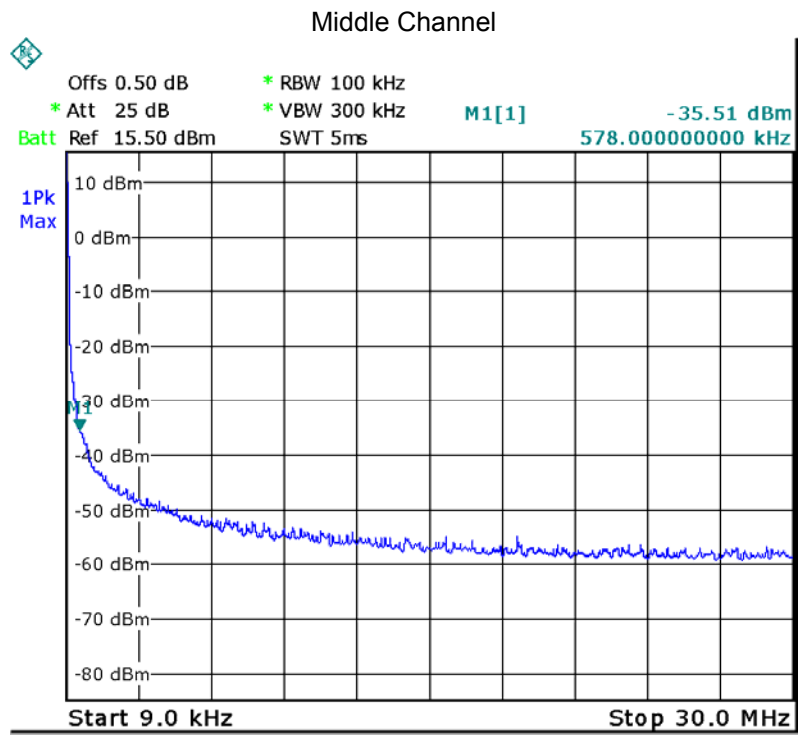


### 802.11n HT20


#### Low Channel

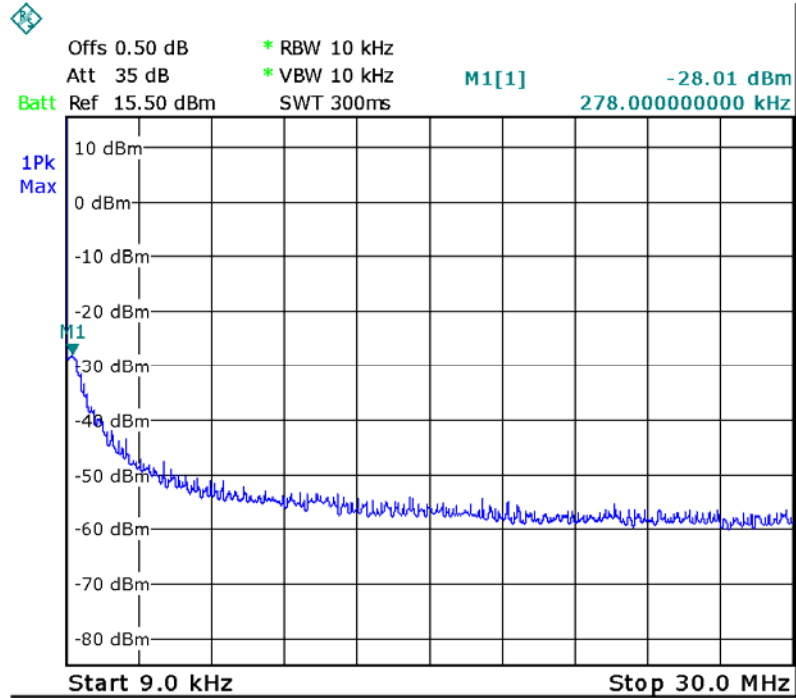

#### Middle Channel

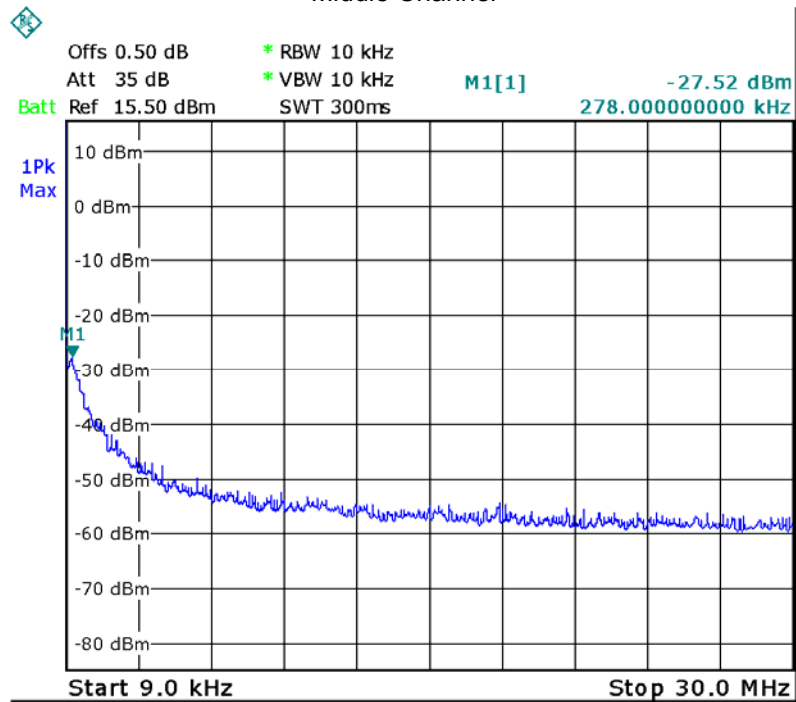


### High Channel

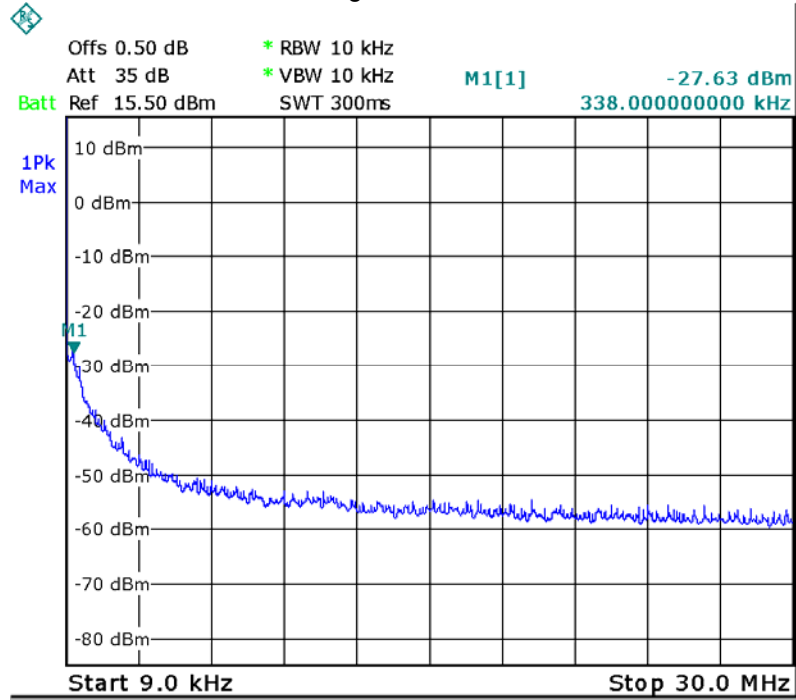


### 802.11n HT40


#### Low Channel

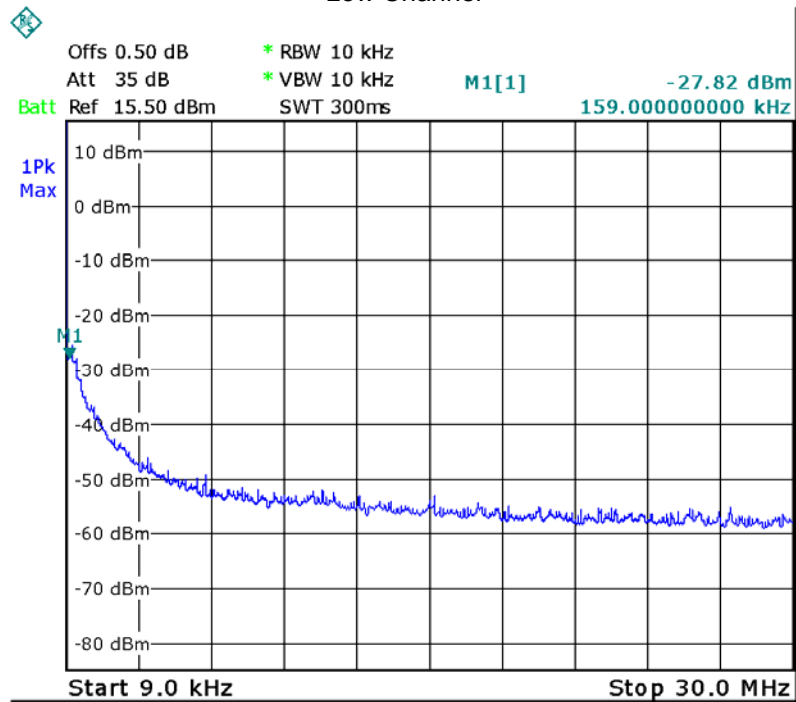


### Middle Channel

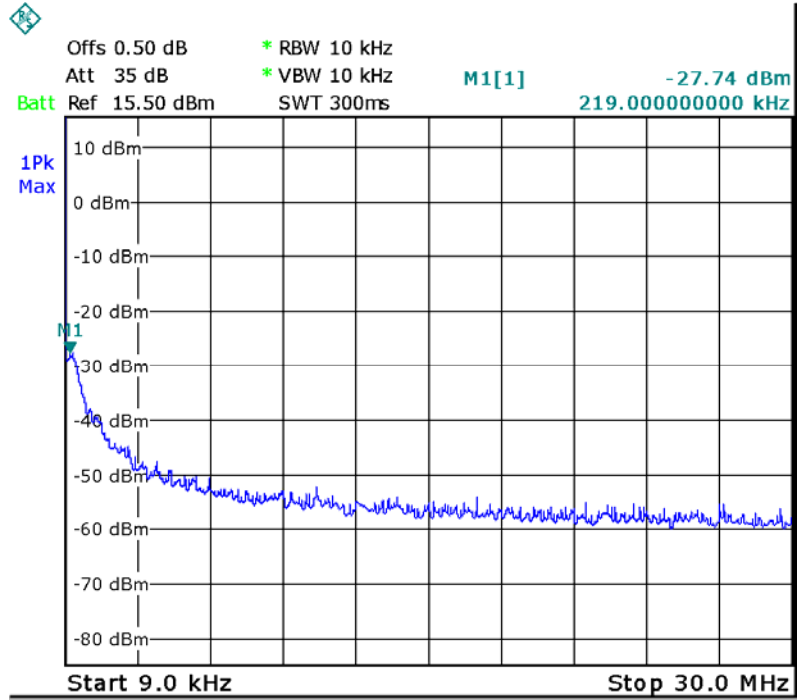


### High Channel

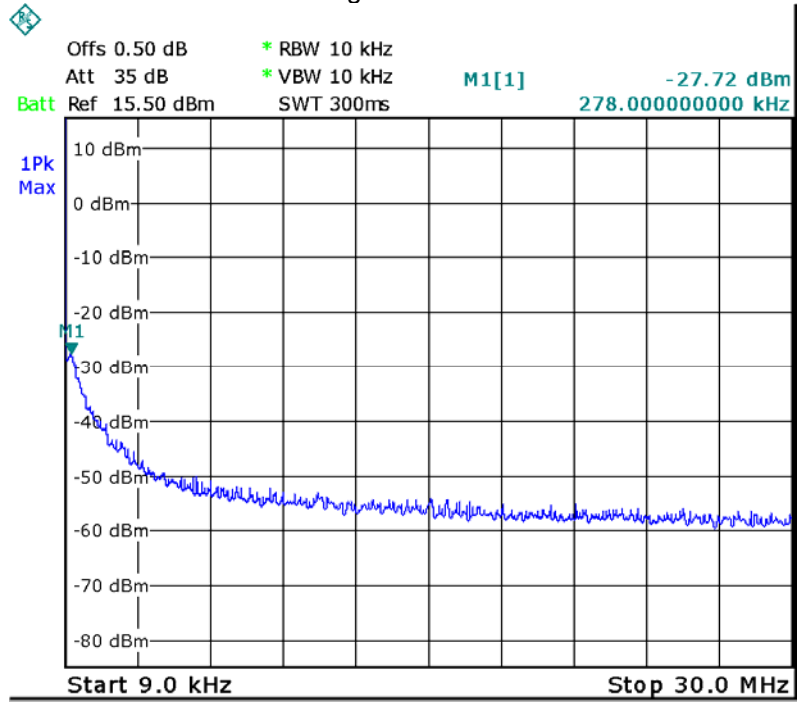


### BLE Low Channel

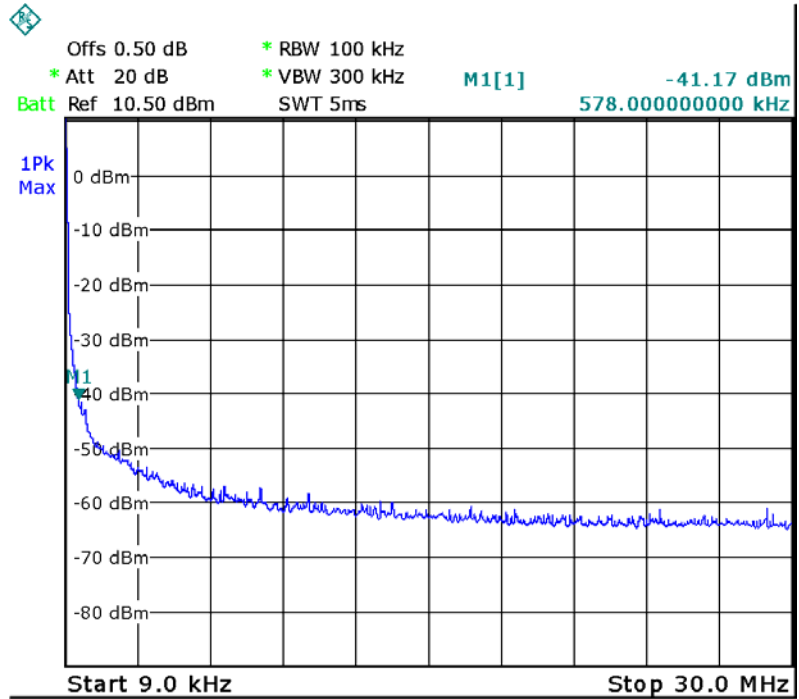

### Middle Channel

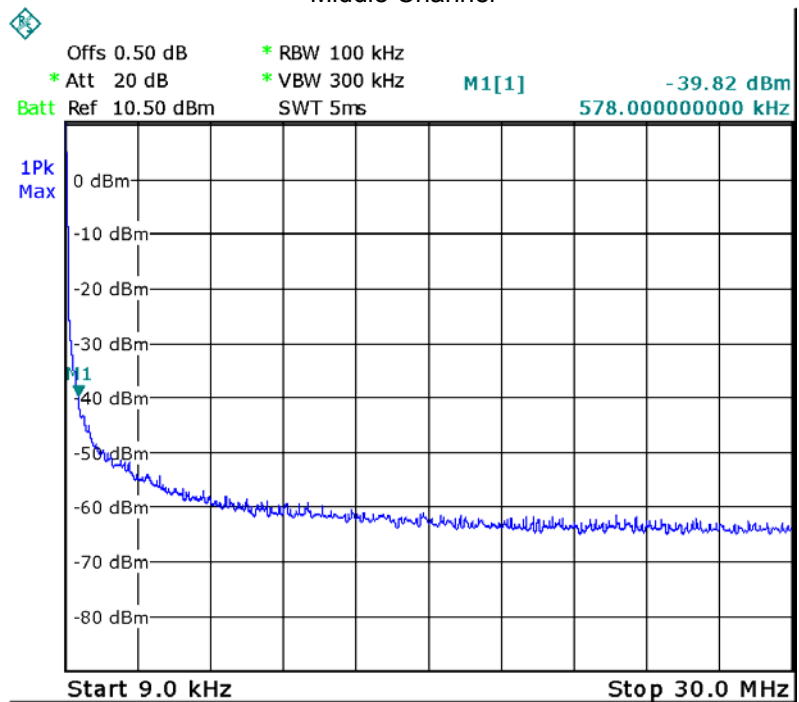

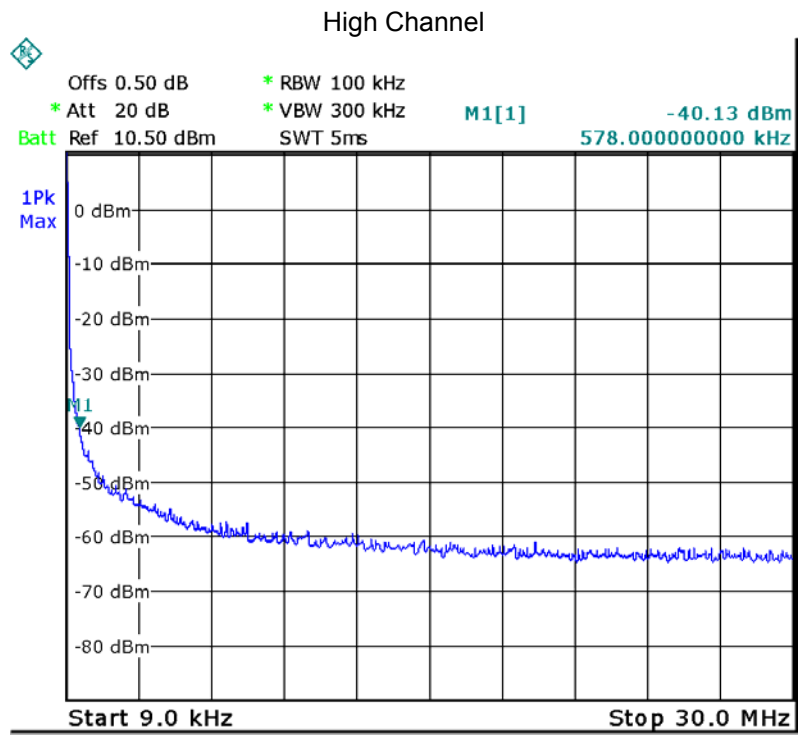


Above 30MHz

802.11b


Low Channel

Fundamental

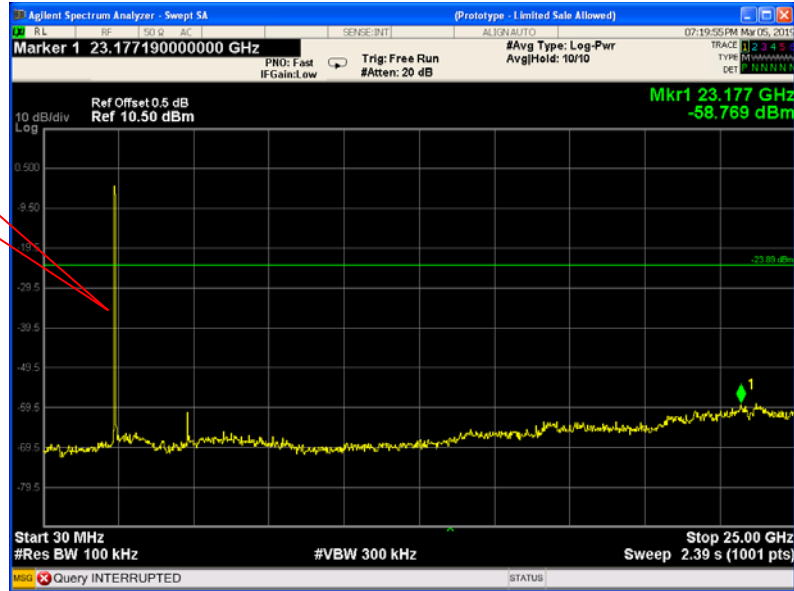

Middle Channel

Fundamental

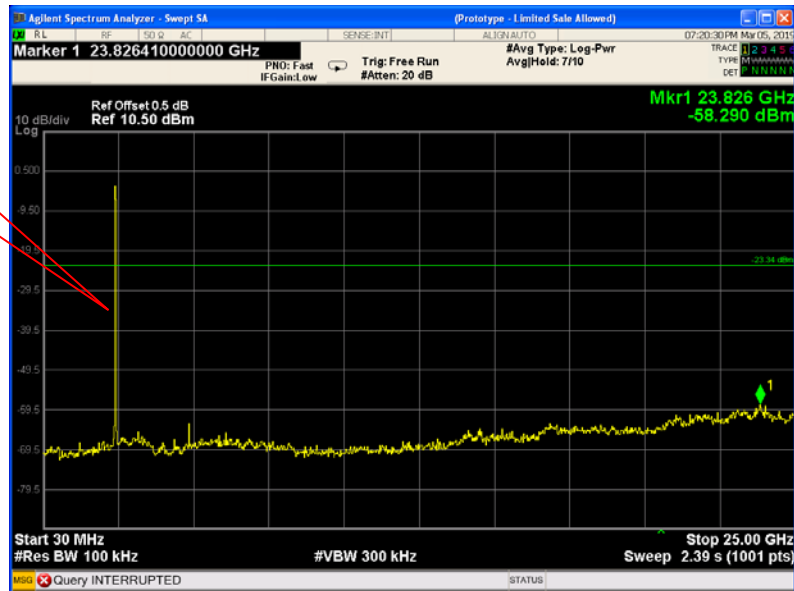



### High Channel

Fundamental



### 802.11g

### Low Channel

Fundamental



### Middle Channel

Fundamental



### High Channel

Fundamental



802.11n HT20

Low Channel

Fundamental



Middle Channel

Fundamental



### High Channel


Fundamental



### 802.11n HT40

### Low Channel

Fundamental

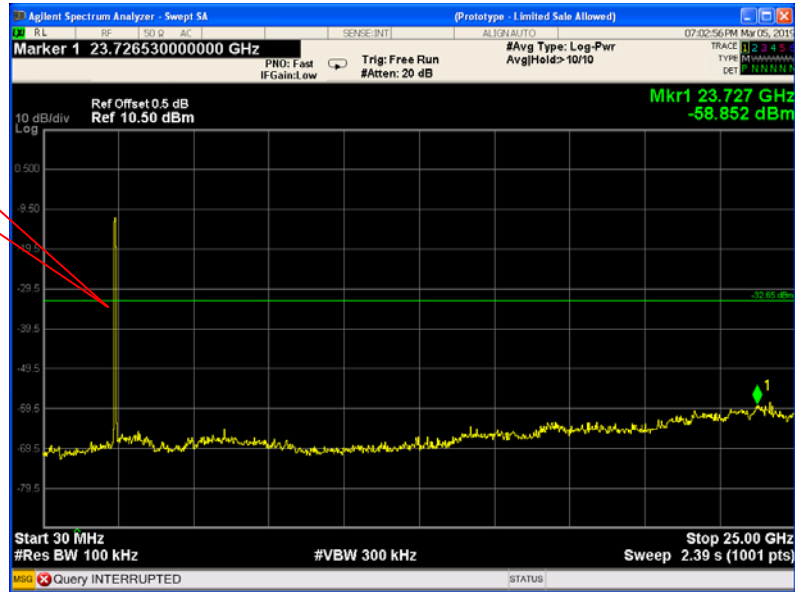

### Middle Channel

Fundamental



### High Channel

Fundamental




### BLE Low Channel

Fundamental



### Middle Channel

Fundamental

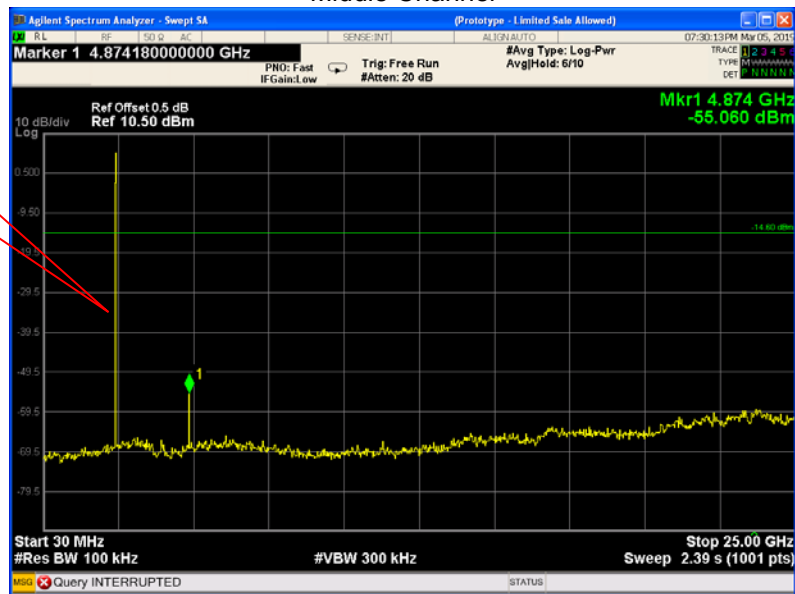

### High Channel

Fundamental



## 11 Band Edge Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;  
ANSI C63.10:2013

Test Limit: Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Mode: Transmitting

### 11.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.




### 11.2 Test Result

Test result plots shown as follows:


TX 11b: Band edge-left side

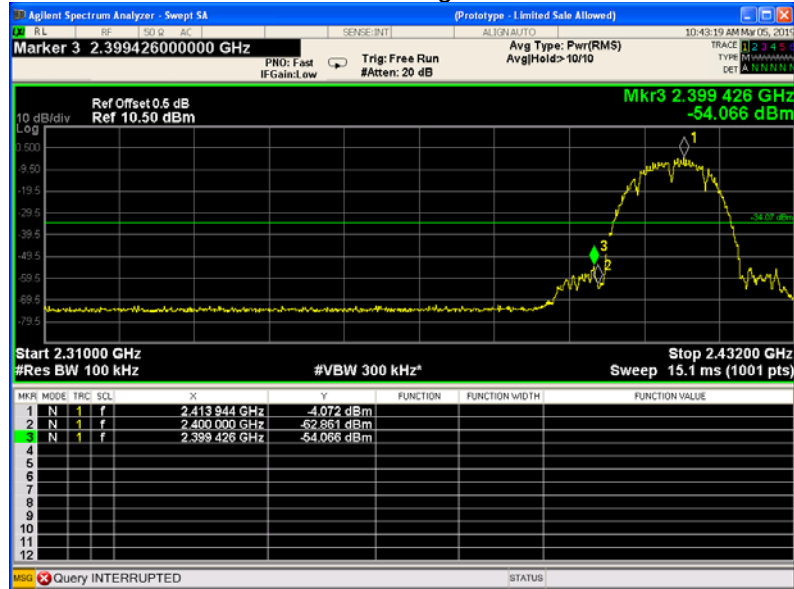


TX 11b: Band edge-right side

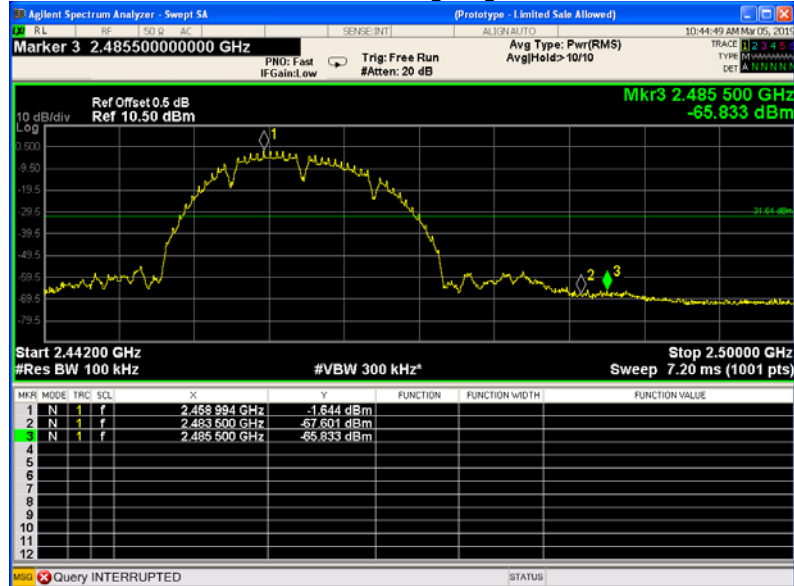


TX 11g: Band edge-left side

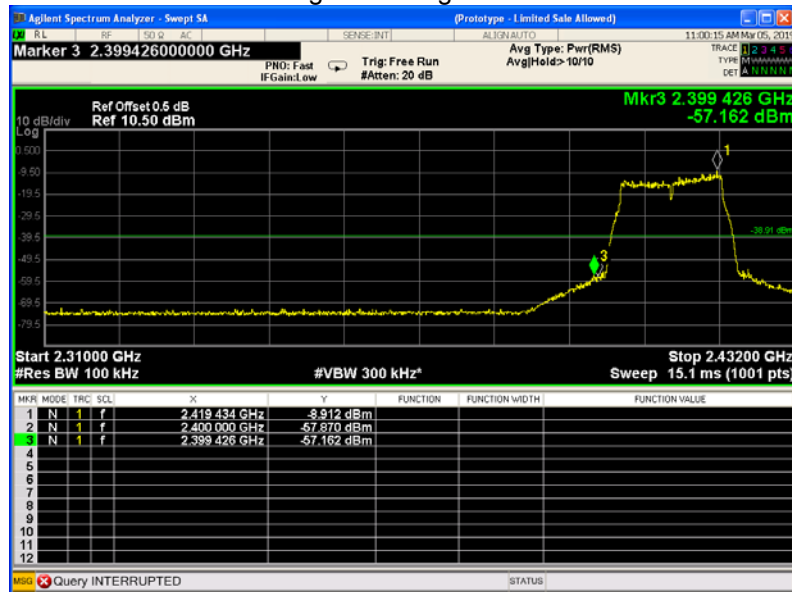


TX 11g: Band edge-right side

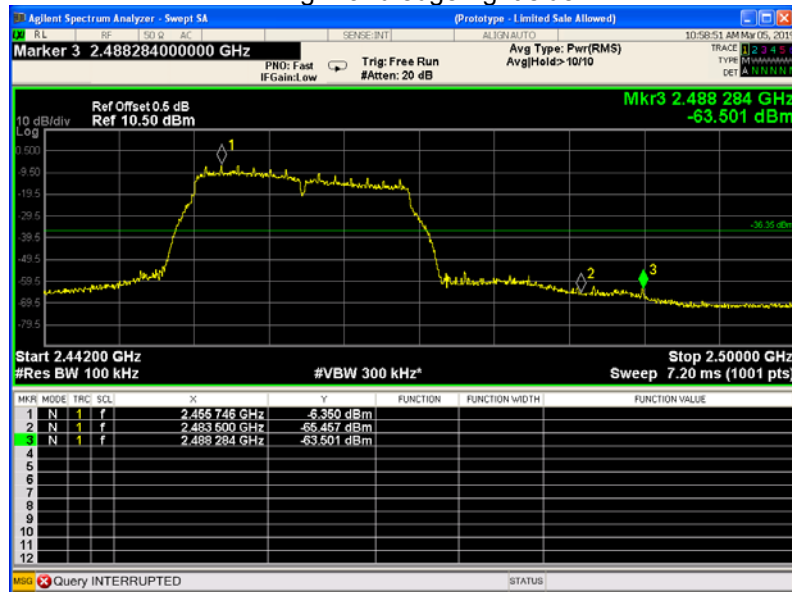


TX 11n HT20: Band edge-left side

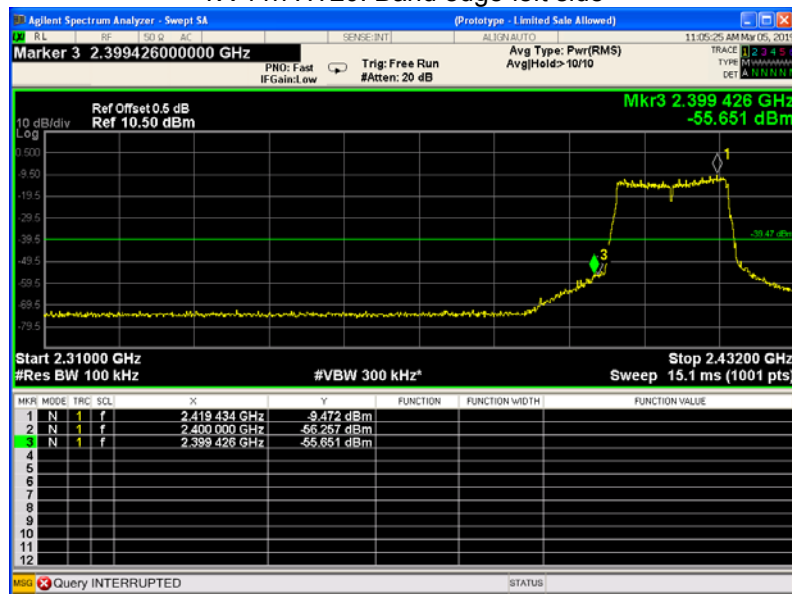

TX 11n HT20: Band edge-right side

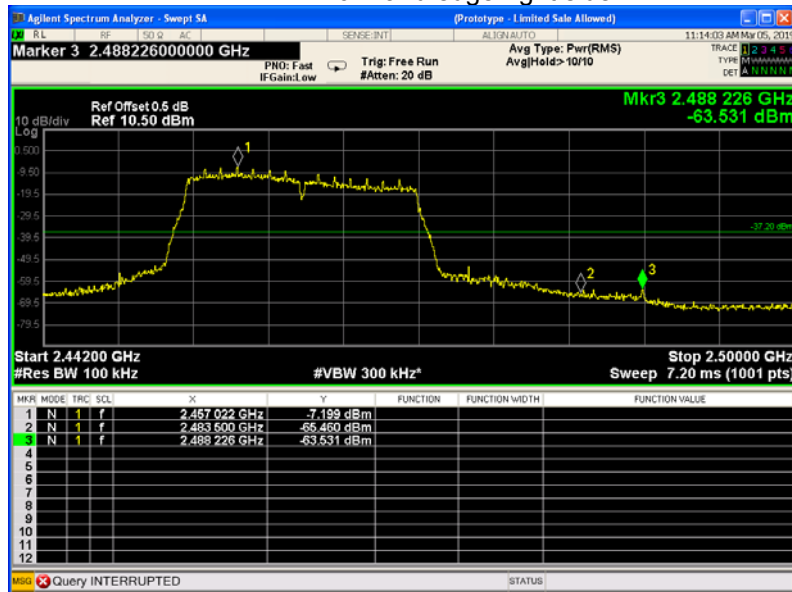


TX 11n HT40: Band edge-left side

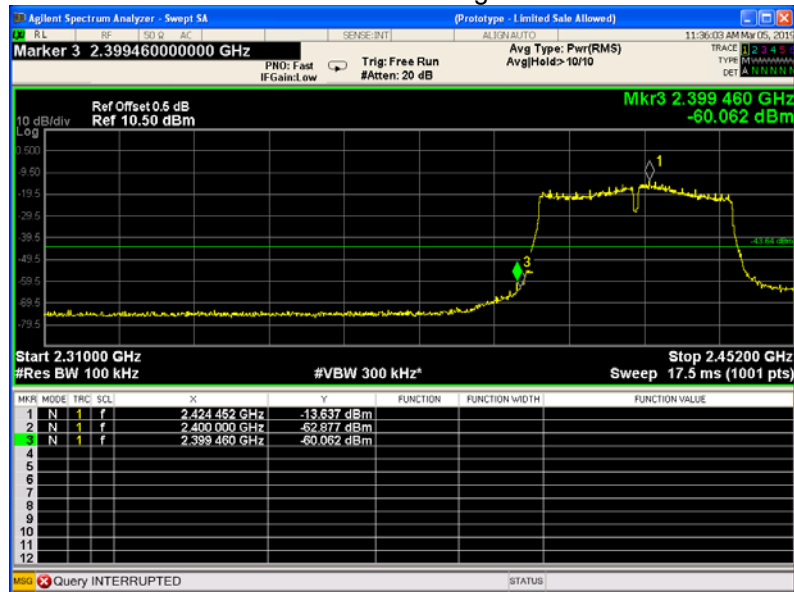


TX 11n HT40: Band edge-right side



BLE: Band edge-left side

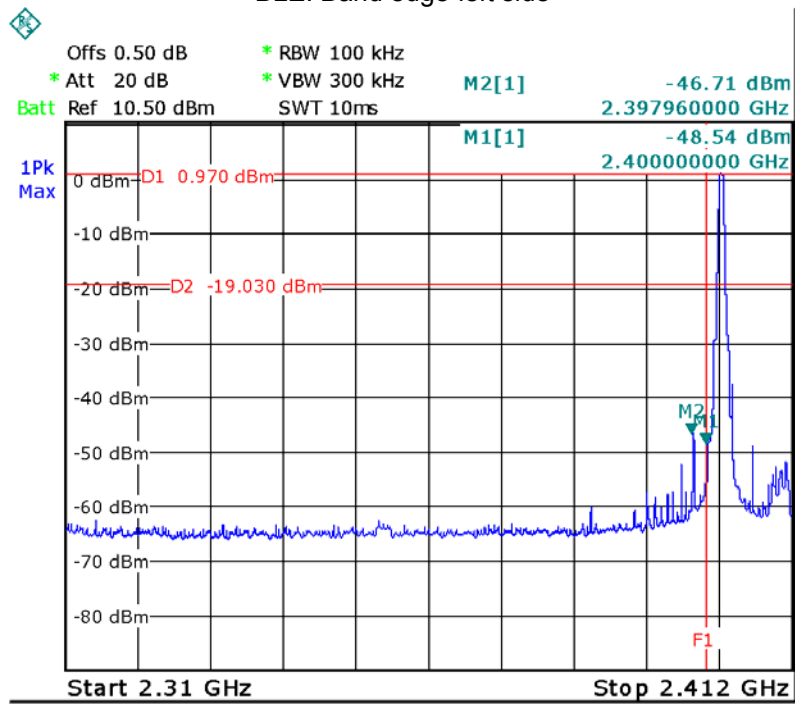

BLE: Band edge-right side

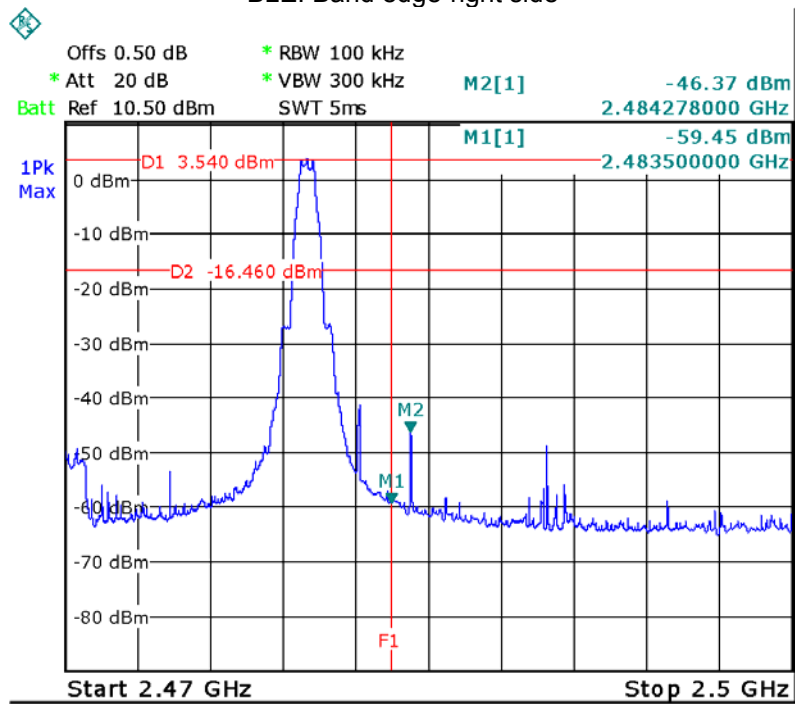

## 12 6 dB Bandwidth and 99% Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;

ANSI C63.10:2013

### 12.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

### 12.2 Test Result:


Operation mode	Test Channel	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
TX 11b	Channel 1	11.050	14.615
	Channel 6	11.040	14.476
	Channel 11	9.528	13.796
TX 11g	Channel 1	15.790	16.713
	Channel 6	16.000	16.612
	Channel 11	13.180	16.363
TX 11n HT20	Channel 1	16.370	17.719
	Channel 6	17.590	17.709
	Channel 11	13.790	17.523
TX 11n HT40	Channel 3	35.050	35.750
	Channel 6	36.050	36.211
	Channel 9	32.50	35.694
BLE	Channel 0	0.707	1.060
	Channel 19	0.713	1.066
	Channel 39	0.713	1.054

Test result plot:


Mode: TX 11b channel 1

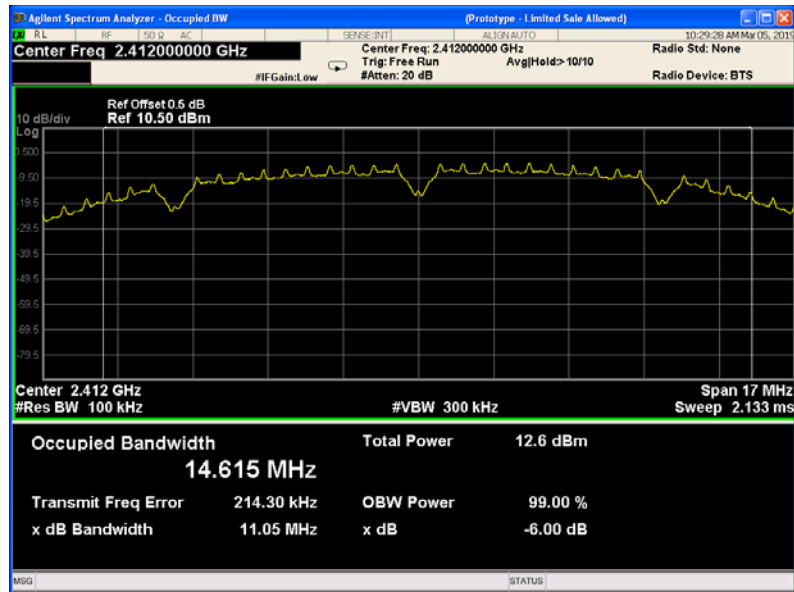


Mode: TX 11b channel 6

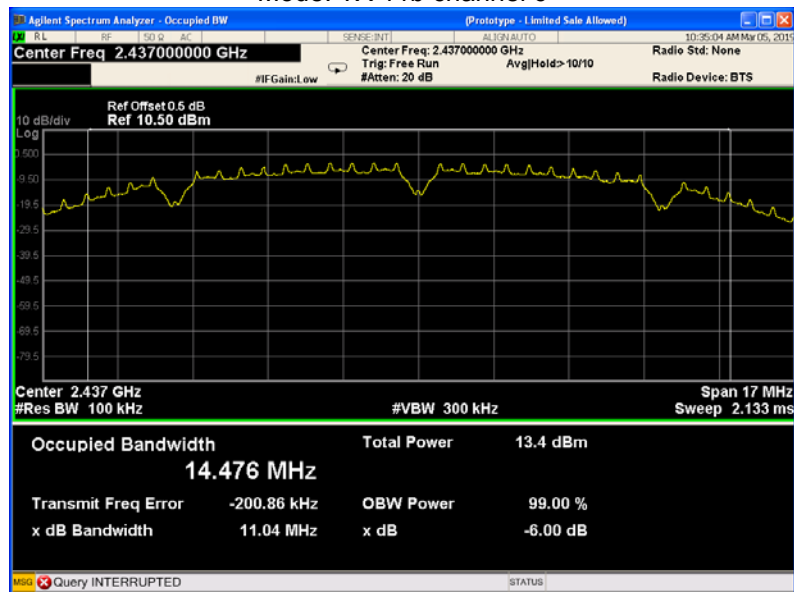

Mode: TX 11b channel 11

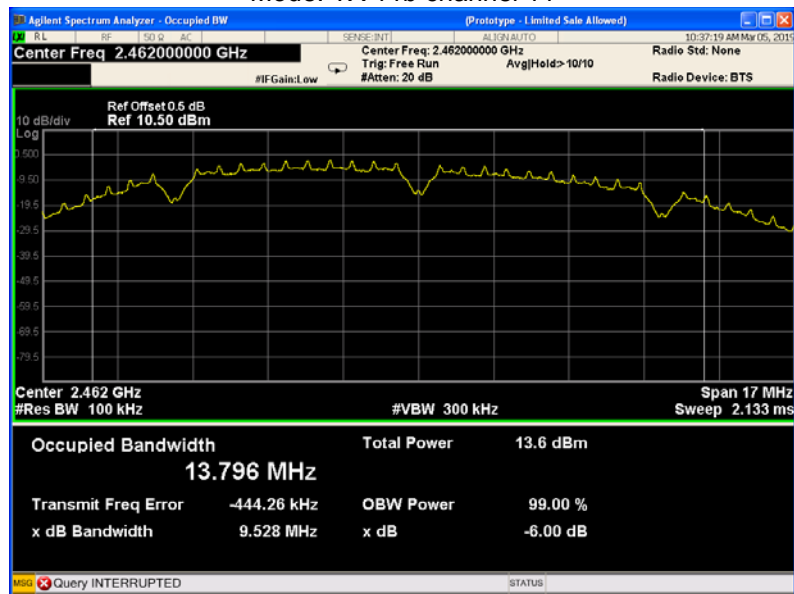


Mode: TX 11g channel 1

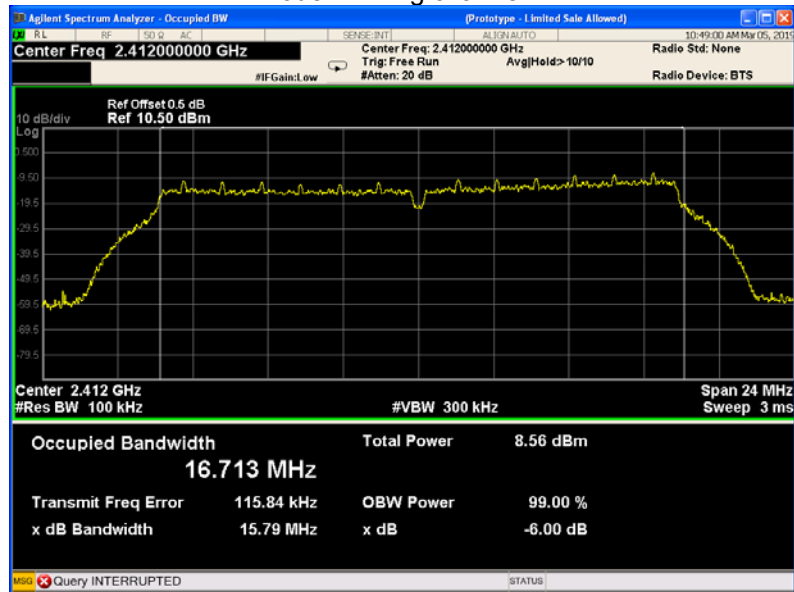





Mode: TX 11g channel 6

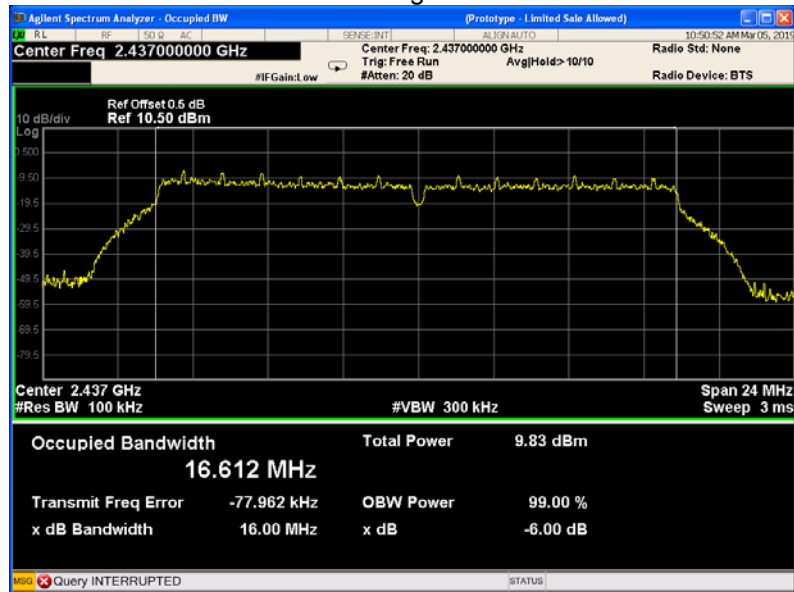


Mode: TX 11g channel 11

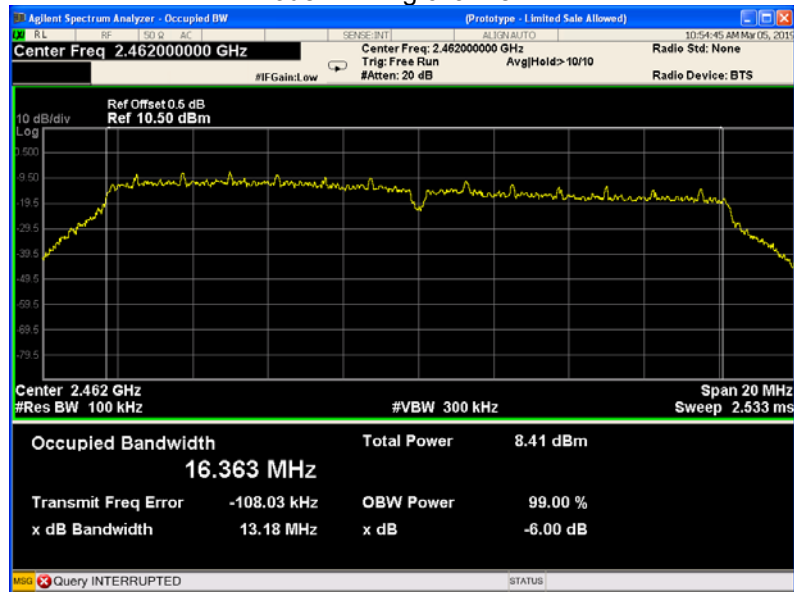


Mode: TX 11n HT20 channel 1

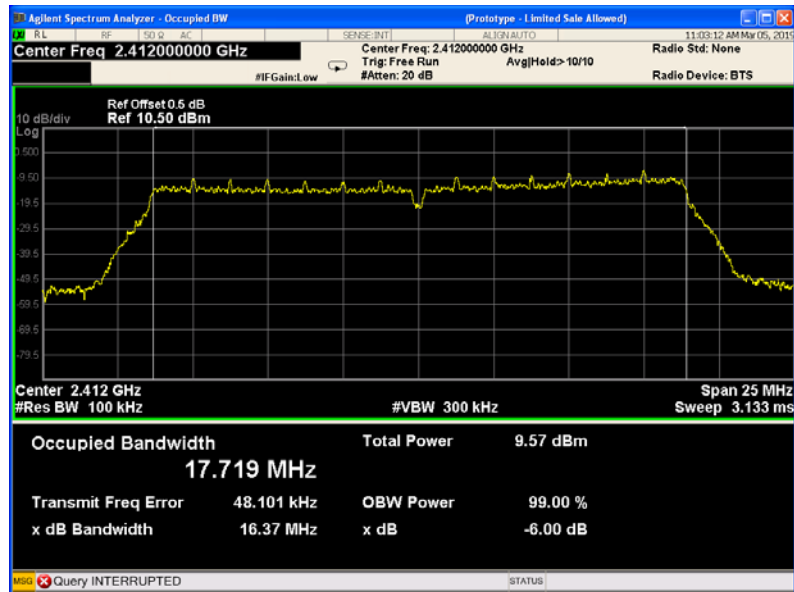


Mode: TX 11n HT20 channel 6

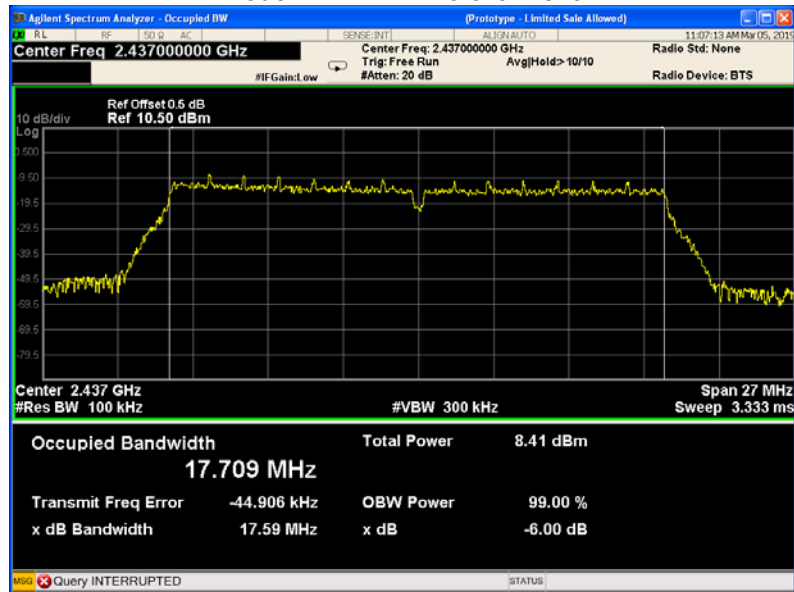


Mode: TX 11n HT20 channel 11

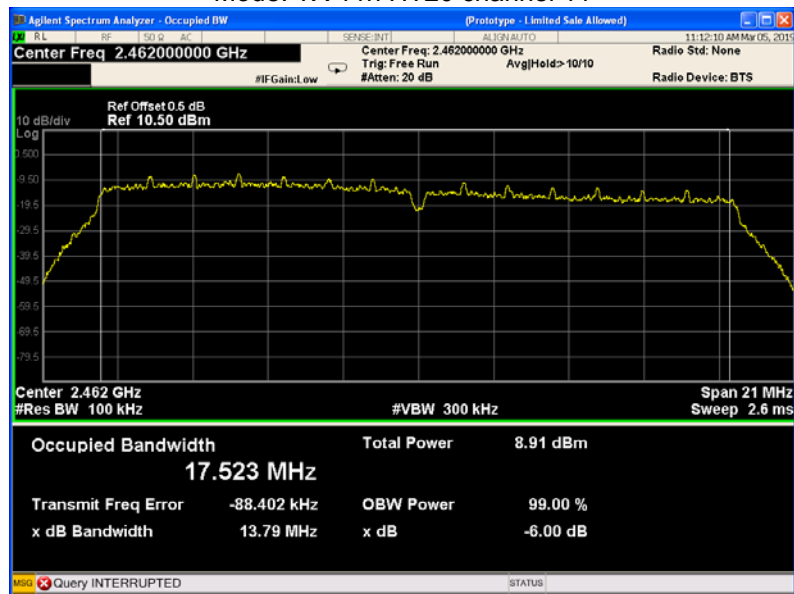


Mode: TX 11n HT40 channel 3

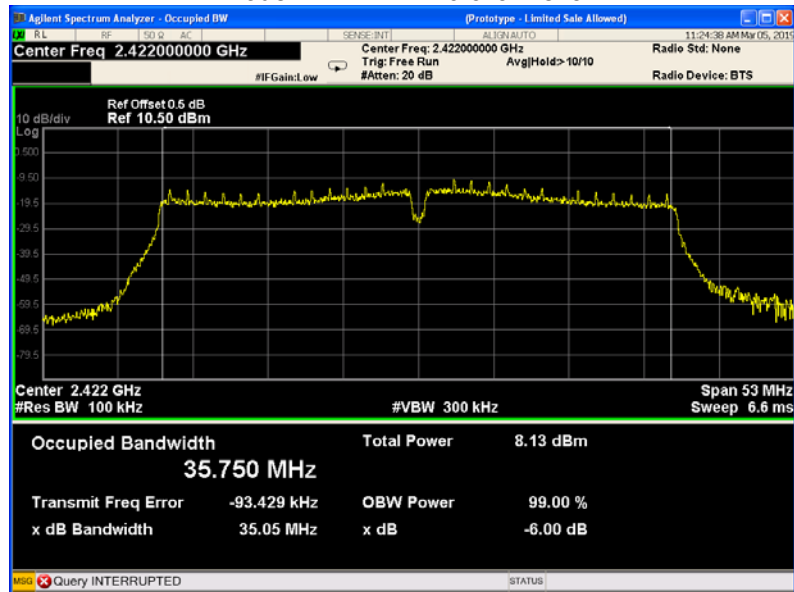


Mode: TX 11n HT40 channel 6

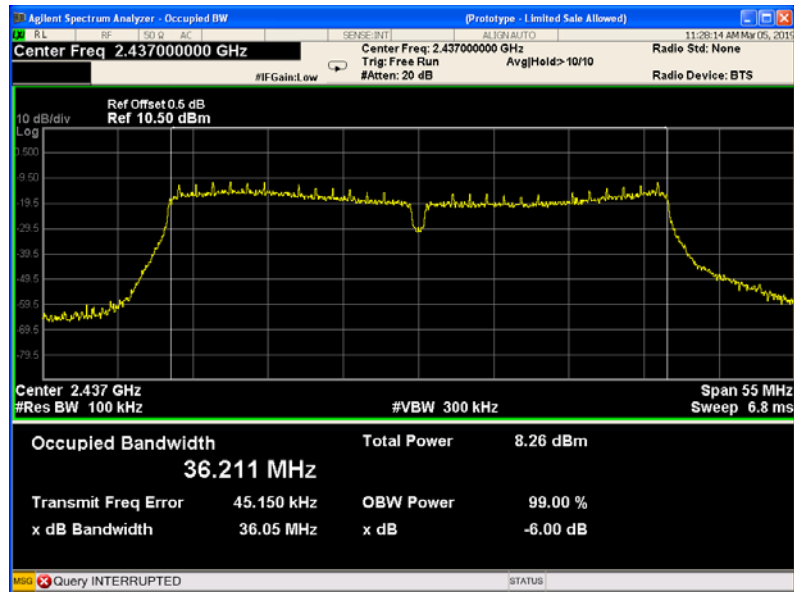


Mode: TX 11n HT40 channel 9

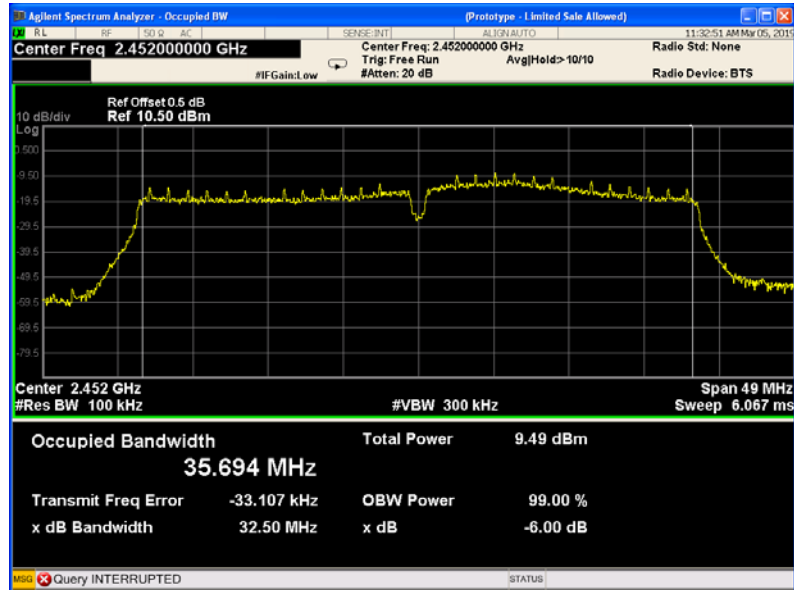


BLE: channel 0

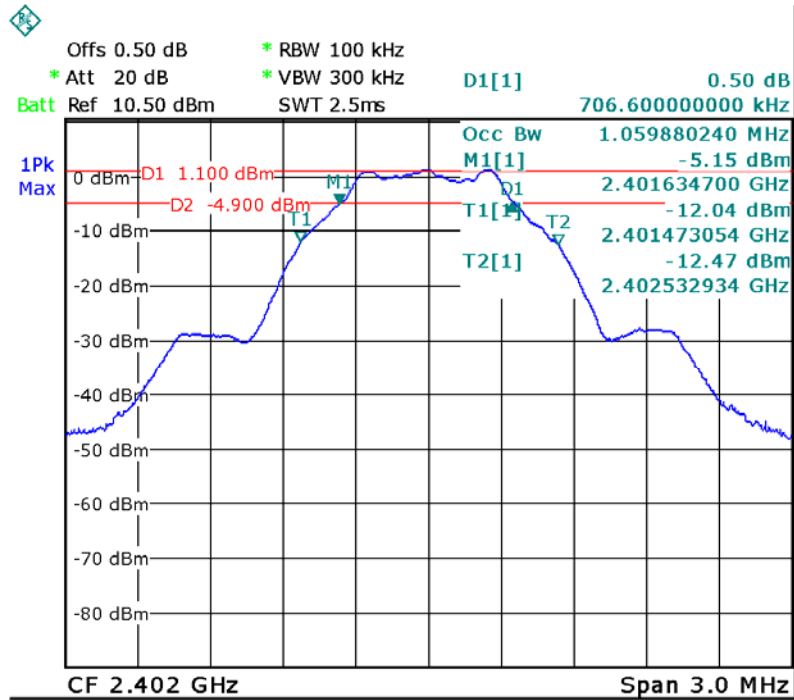

BLE: channel 19

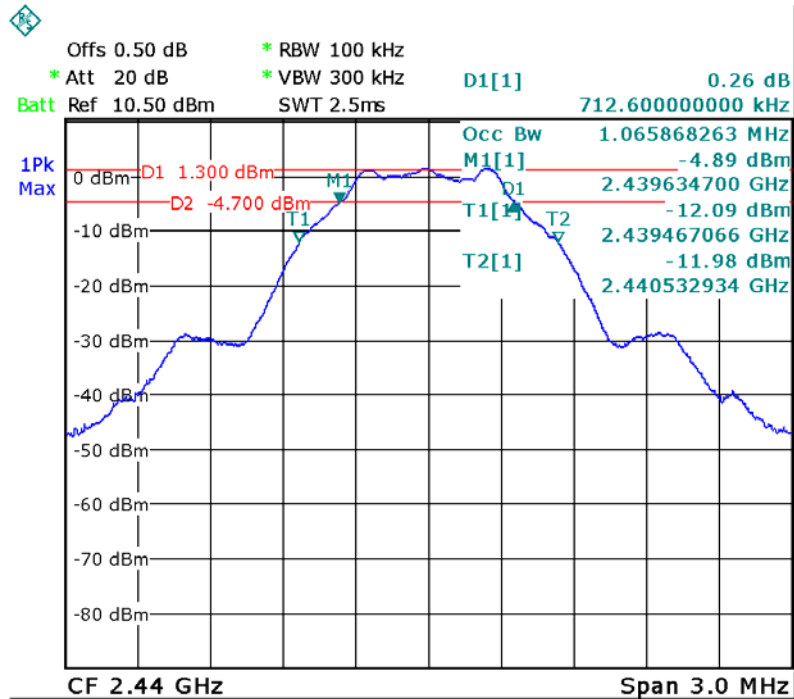

BLE: channel 39

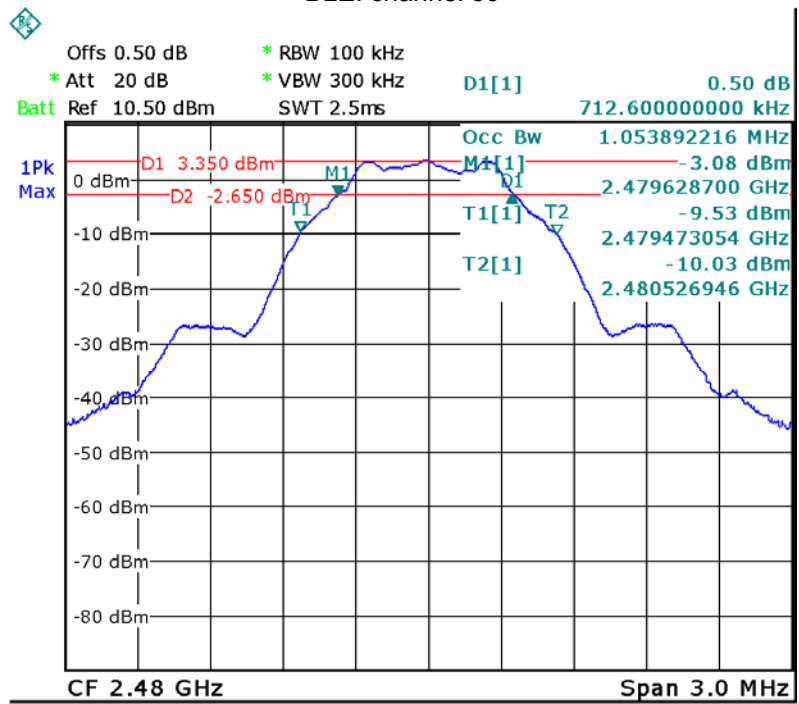

## 13 Maximum Peak conducted Output Power

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;  
ANSI C63.10:2013

### 13.1 Test Procedure:

KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018

section 8.3.1.1 (For BLE)

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW  $\geq$  DTS bandwidth.
- b) Set VBW  $\geq 3$  RBW.
- c) Set span  $\geq 3 \times$  RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

section 8.3.1.2 (For WIFI)

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.

- a) Set the RBW = 1% to 5% of the OBW, not to exceed 1 MHz..
- b) Set the VBW  $\geq 3 \times$  RBW
- c) Set the span  $\geq 1.5 \times$  OBW.
- d) Detector = RMS.
- e) Sweep time = auto couple.
- f) trigger = free run..
- g) Number of points in sweep  $\geq [2 \times \text{span} / \text{RBW}]$ . (This gives bin-to-bin spacing  $\geq \text{RBW} / 2$ , so that narrowband signals are not lost between frequency bins.)
- h) Trace average at least 100 traces in power averaging (rms) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum..


**13.2 Test Result:**

Operation mode	Channel Frequency (MHz)	Maximum Peak Output Power (dBm)	Limit
TX 11b	Low-2412	9.01	1W/30dBm
	Middle-2437	9.27	1W/30dBm
	High-2462	9.14	1W/30dBm
TX 11g	Low-2412	9.23	1W/30dBm
	Middle-2437	9.28	1W/30dBm
	High-2462	9.11	1W/30dBm
TX 11n HT20	Low-2412	9.12	1W/30dBm
	Middle-2437	9.37	1W/30dBm
	High-2462	9.02	1W/30dBm
TX 11n HT40	Low-2422	9.06	1W/30dBm
	Middle-2437	9.35	1W/30dBm
	High-2452	9.23	1W/30dBm
BLE	Low-2402	3.04	1W/30dBm
	Middle-2440	2.82	1W/30dBm
	High-2480	4.58	1W/30dBm




### Test Plot


Mode: TX 11b channel 1

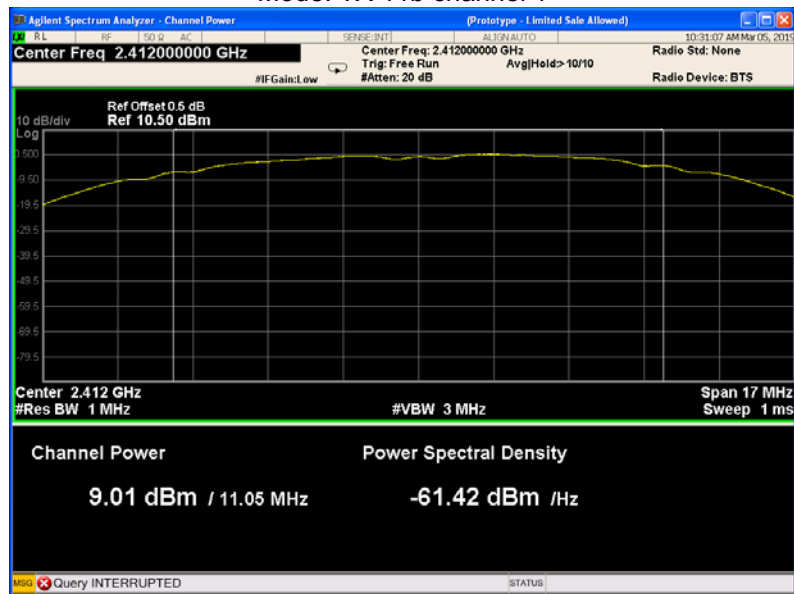


Mode: TX 11b channel 6

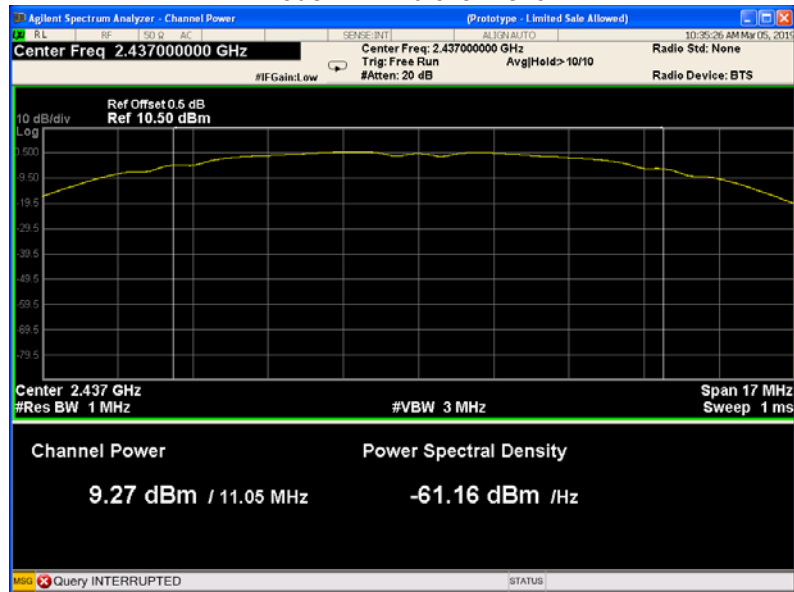


Mode: TX 11b channel 11

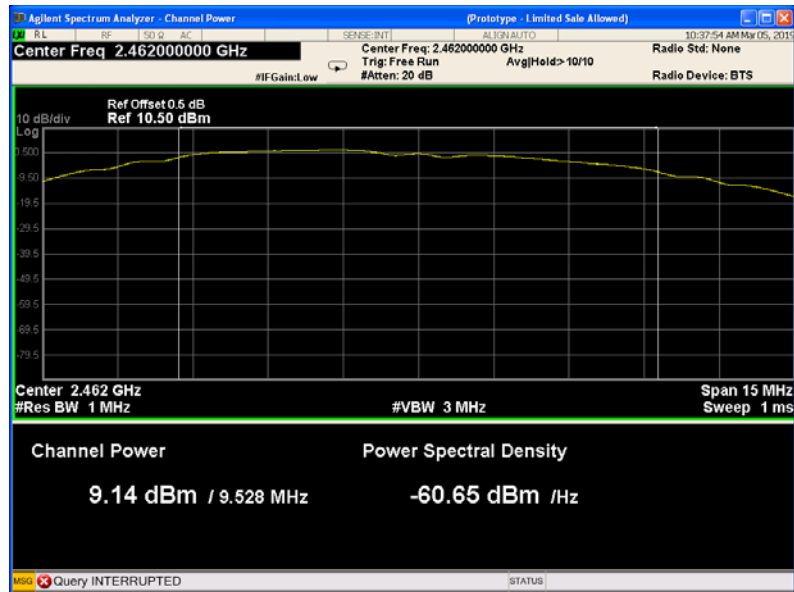


Mode: TX 11g channel 1

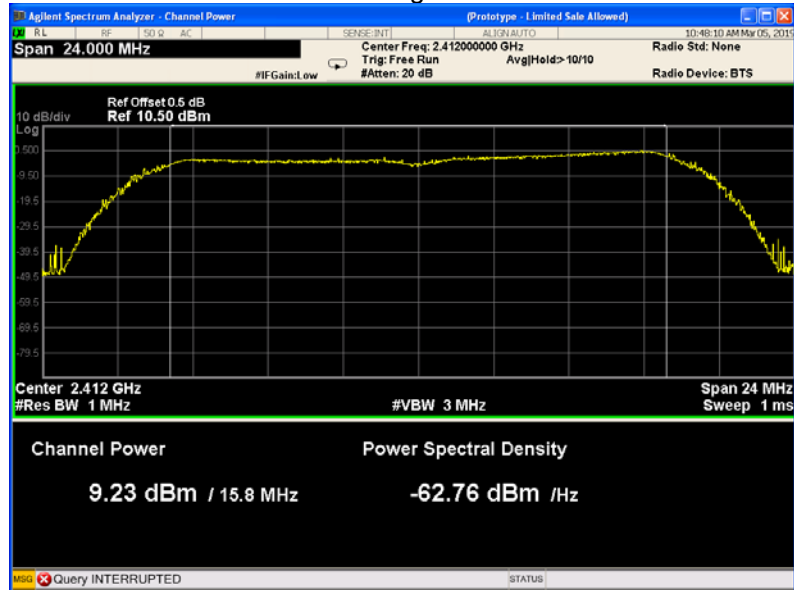


Mode :TX 11g channel 6

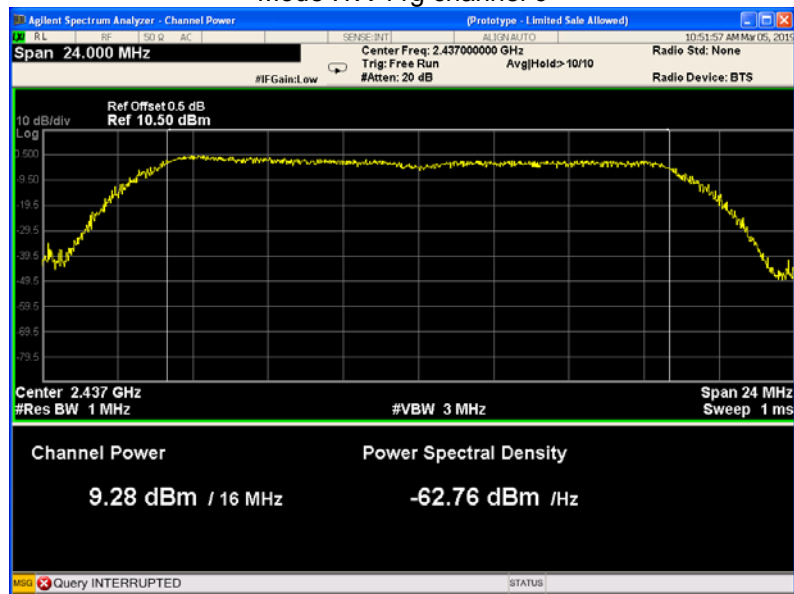


Mode :TX 11g channel 11

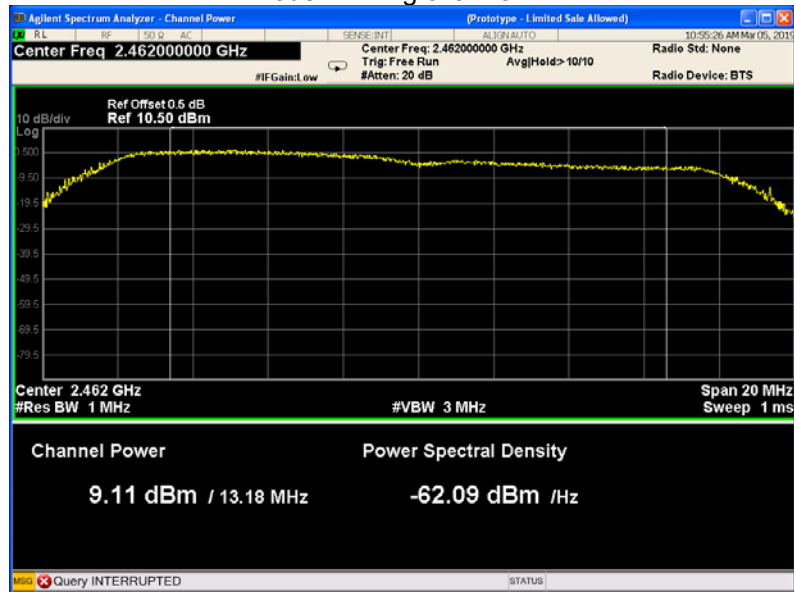


Mode: TX 11n HT20 channel 1

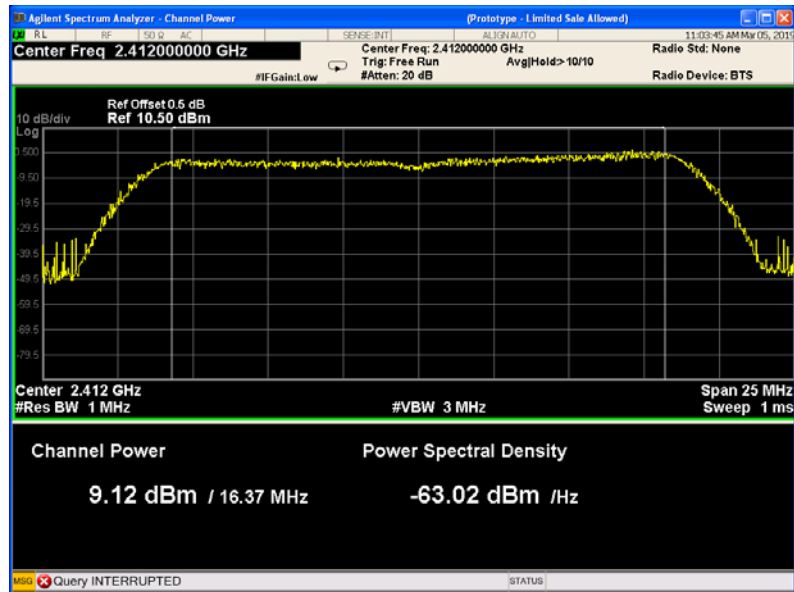


Mode: TX 11n HT20 channel 6

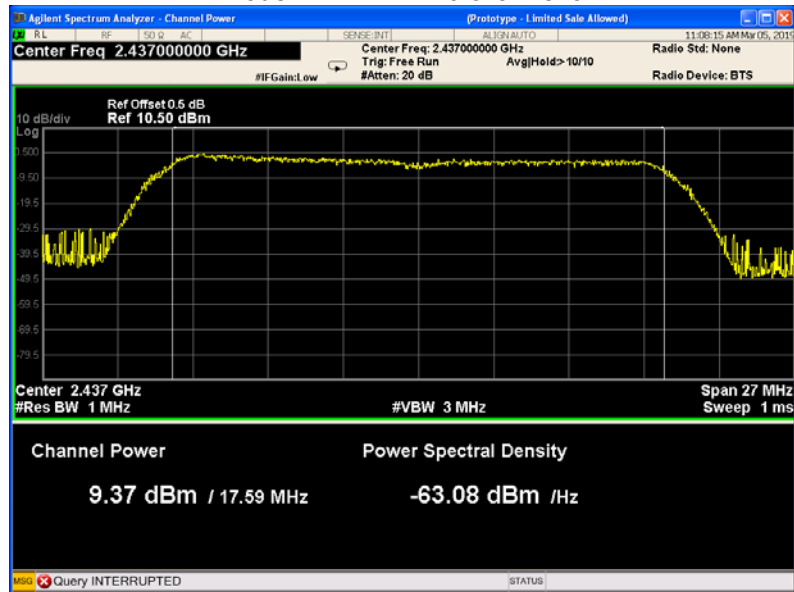


Mode: TX 11n HT20 channel 11

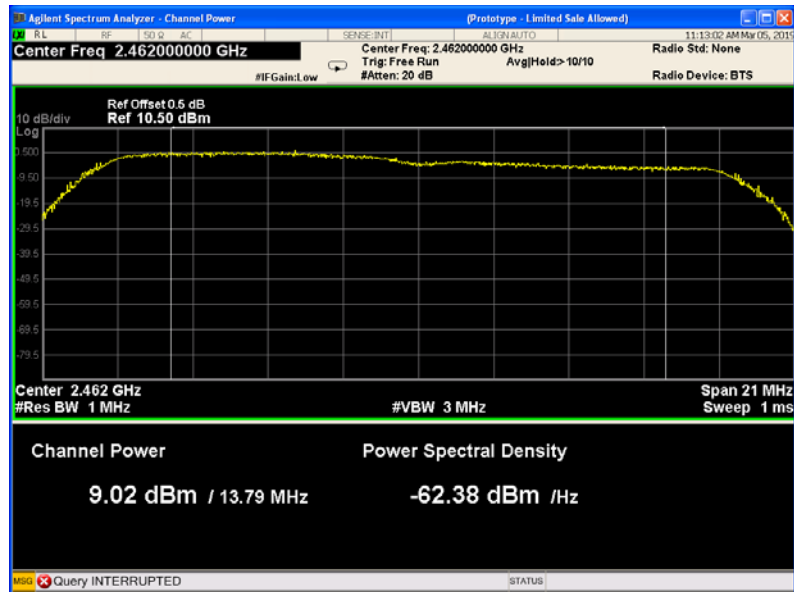


Mode: TX 11n HT40 channel 3

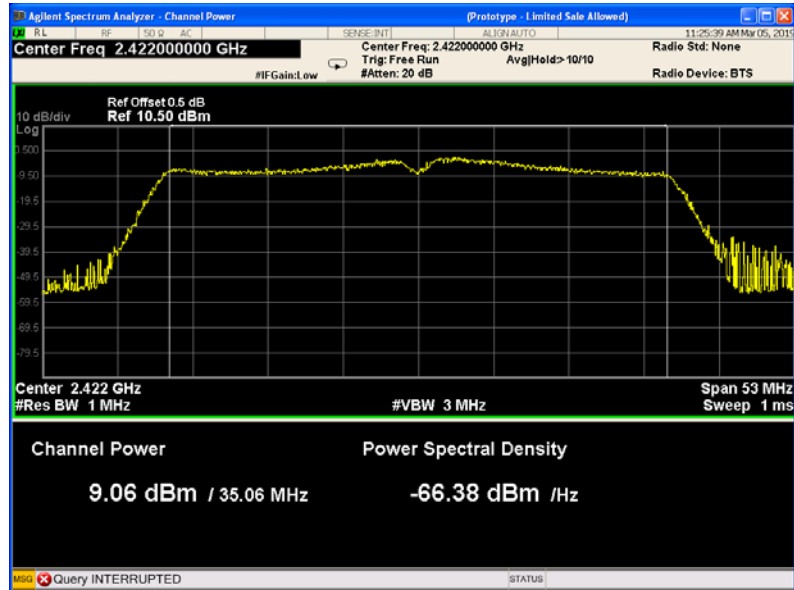


Mode: TX 11n HT40 channel 6

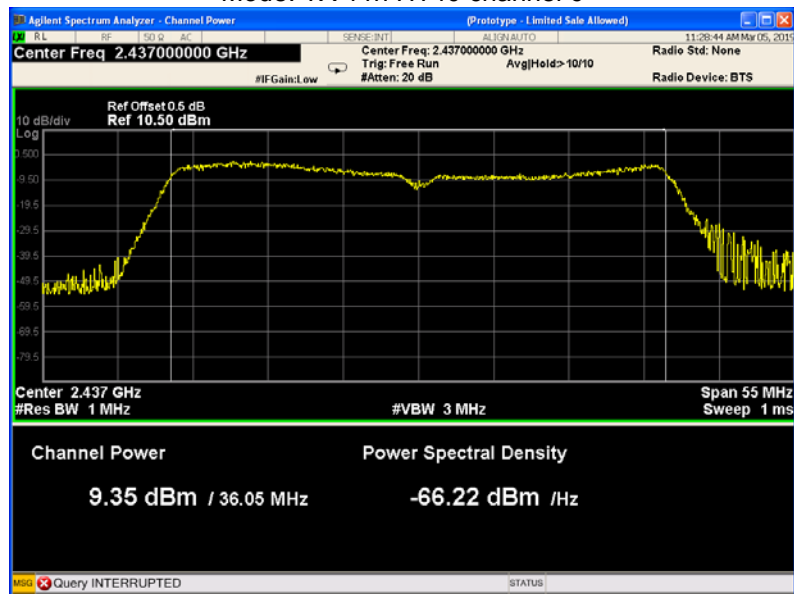


Mode: TX 11n HT40 channel 9

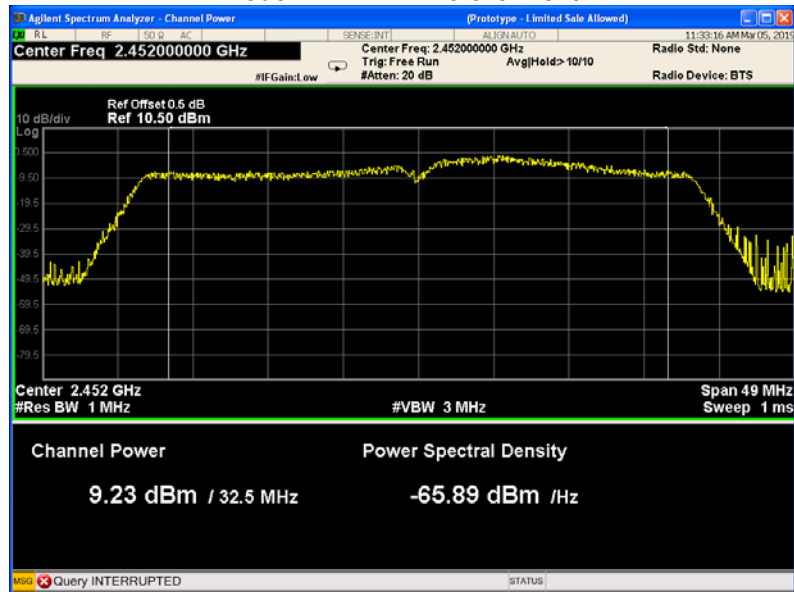


BLE: channel 0

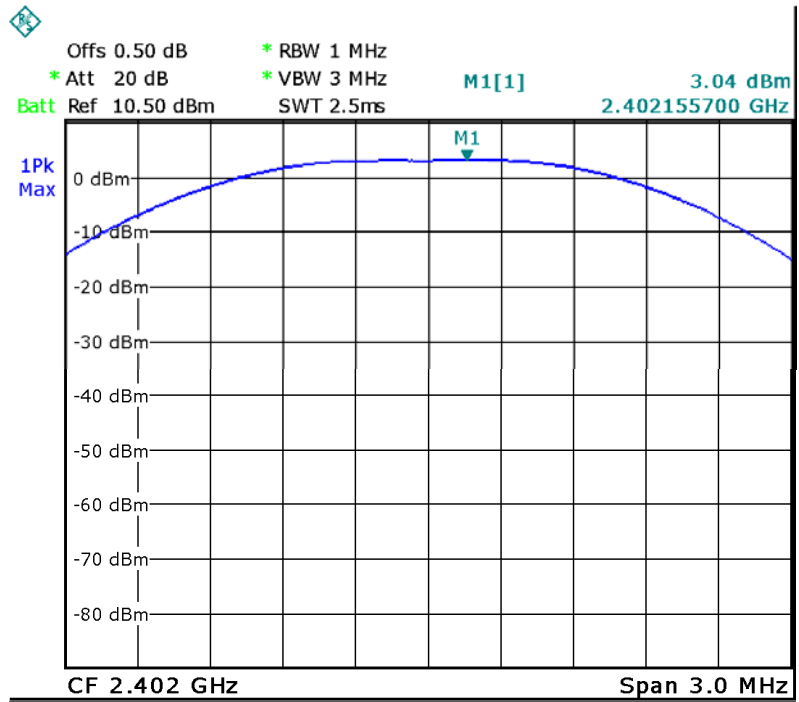

BLE: channel 19

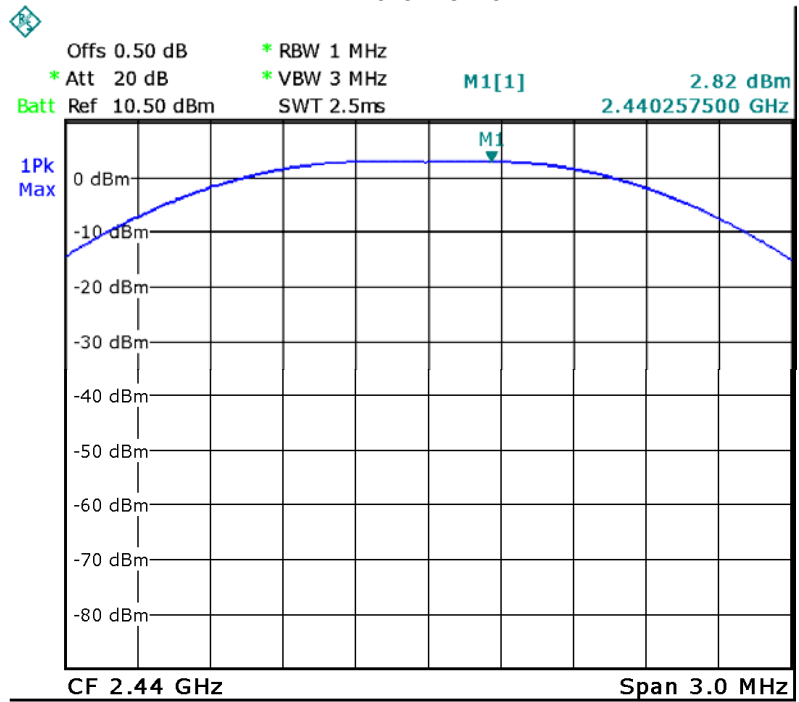

BLE: channel 39

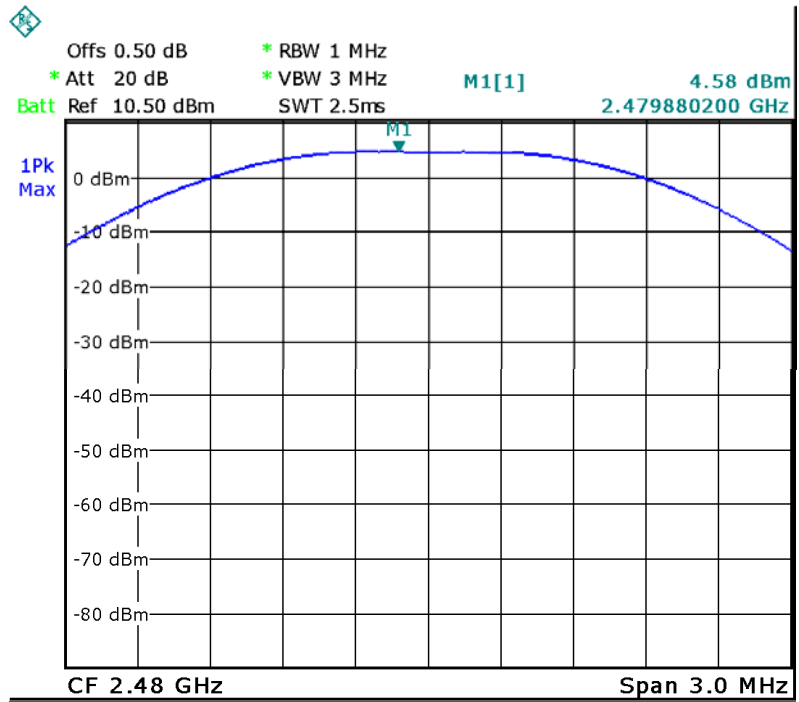



## 14 Duty cycle

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10: 2013
Test Limit:	N/A
Test Result:	PASS
Remark:	EUT transmitting continuously

## 15 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;  
ANSI C63.10:2013

### 15.1 Test Procedure:


KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018 section 10.2

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.


### 15.2 Test Result:

Operation mode	Channel Frequency (MHz)	Power Spectral (dBm per 3kHz)	Limit
TX 11b	Low-2412	-15.217	8dBm per 3kHz
	Middle-2437	-6.339	8dBm per 3kHz
	High-2462	-15.833	8dBm per 3kHz
TX 11g	Low-2412	-21.633	8dBm per 3kHz
	Middle-2437	-22.172	8dBm per 3kHz
	High-2462	-19.974	8dBm per 3kHz
TX 11n HT20	Low-2412	-20.693	8dBm per 3kHz
	Middle-2437	-19.439	8dBm per 3kHz
	High-2462	-21.153	8dBm per 3kHz
TX 11n HT40	Low-2422	-25.747	8dBm per 3kHz
	Middle-2437	-24.247	8dBm per 3kHz
	High-2452	-23.565	8dBm per 3kHz
BLE	Low-2402	-12.01	8dBm per 3kHz
	Middle-2440	-12.47	8dBm per 3kHz
	High-2480	-10.64	8dBm per 3kHz

### Test Plot Mode: TX 11b channel 1

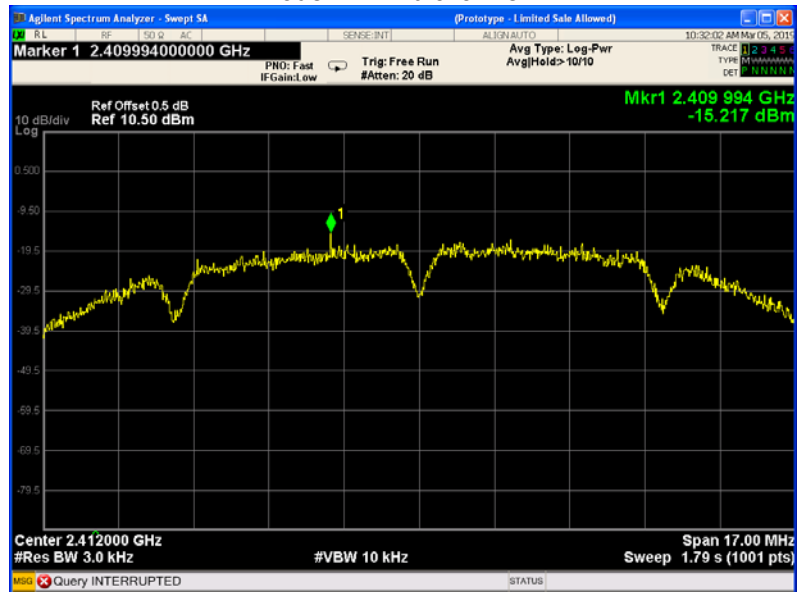


### Mode: TX 11b channel 6

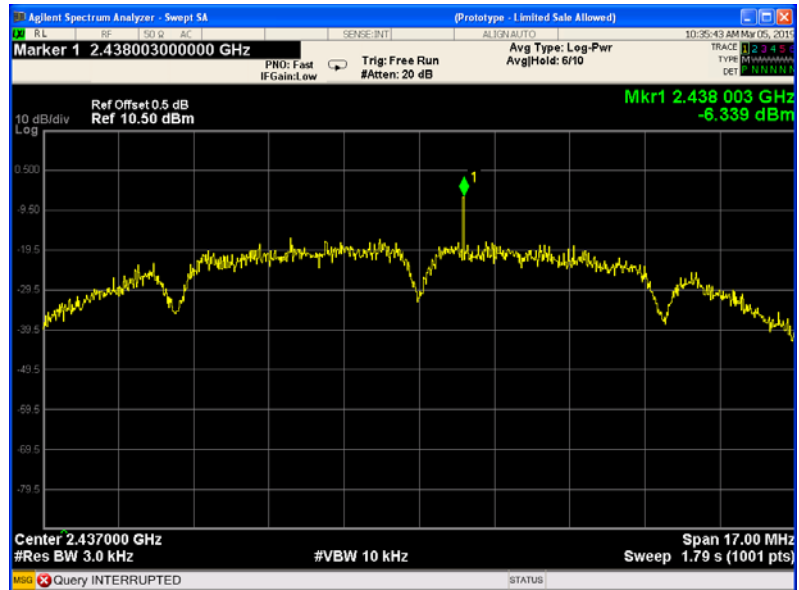


Mode: TX 11b channel 11




Mode :TX 11g channel 1

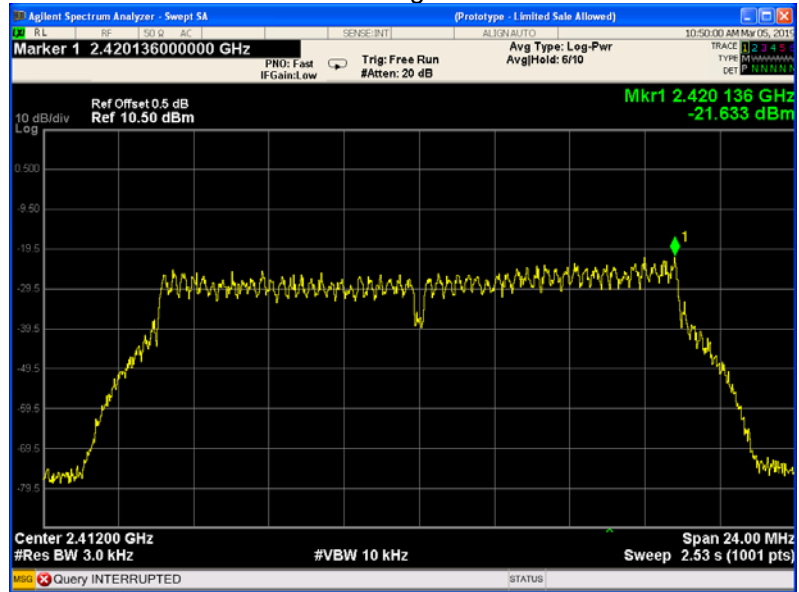


Mode :TX 11g channel 6

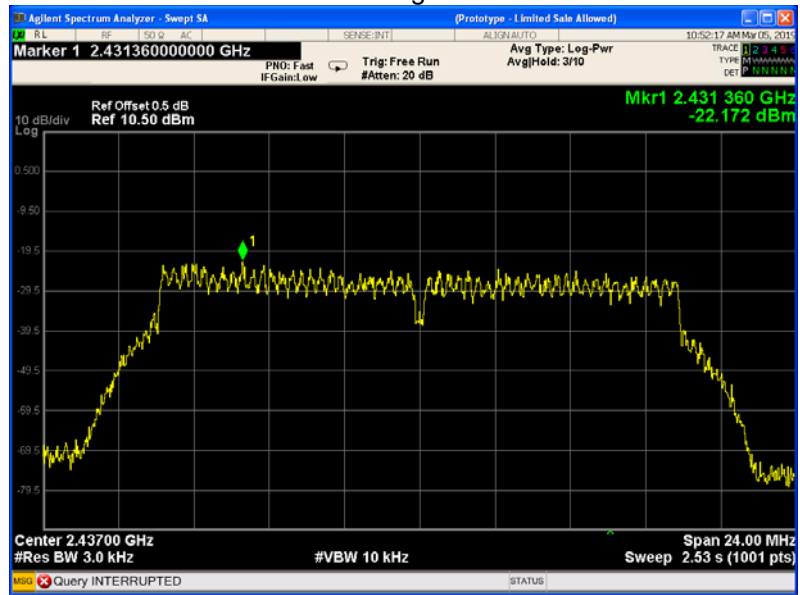


Mode :TX 11g channel 11

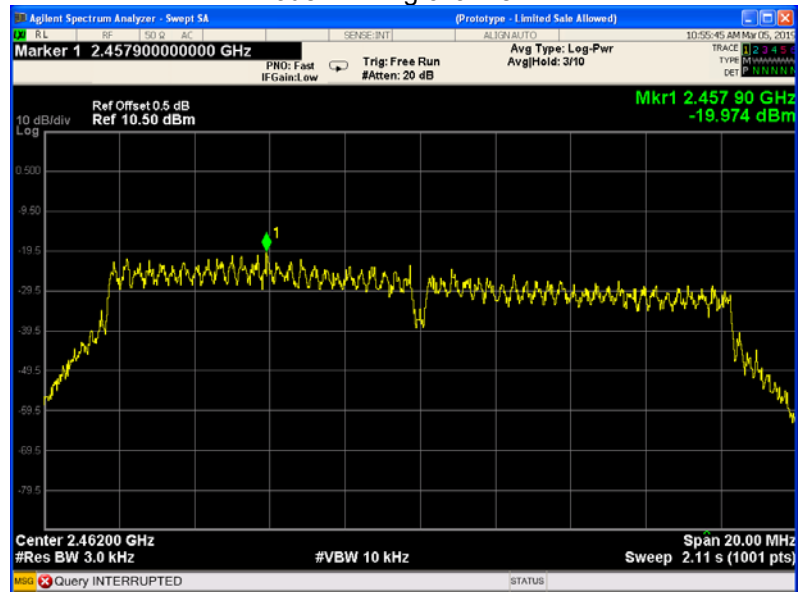


Mode: TX 11n HT20 channel 1

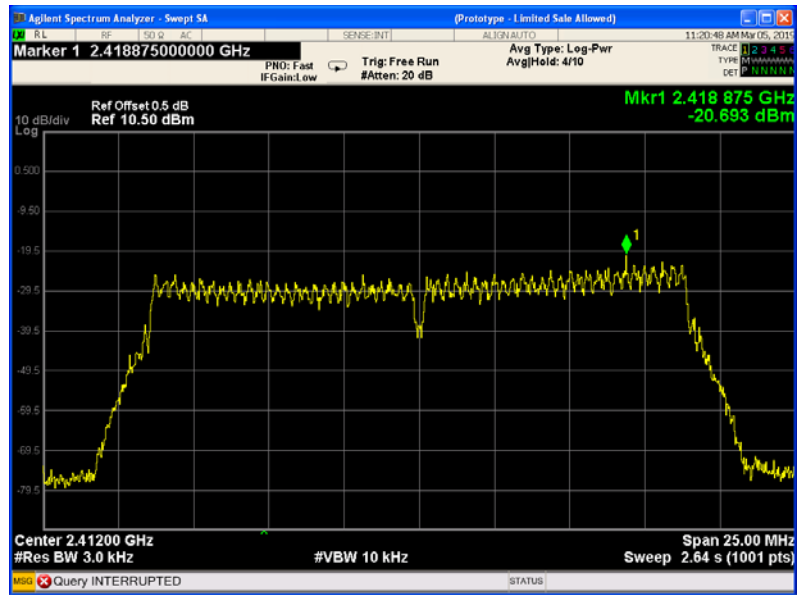


Mode: TX 11n HT20 channel 6

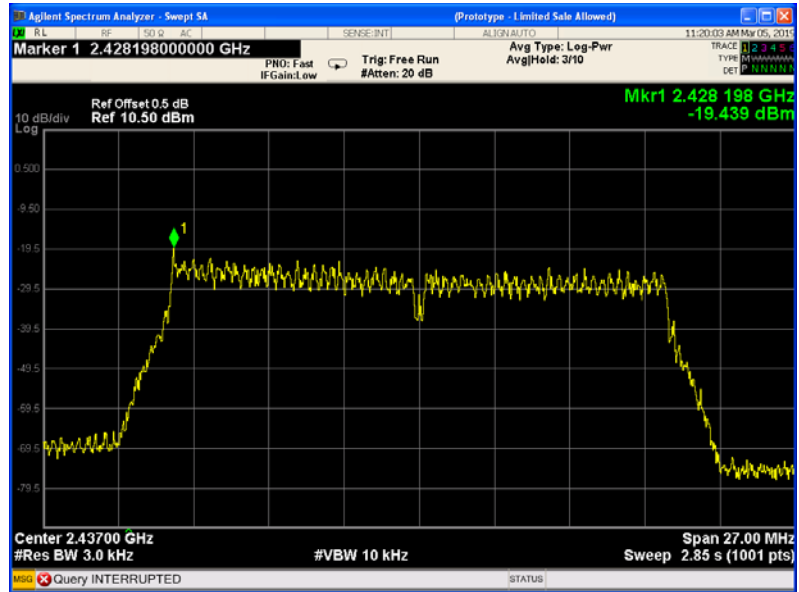


Mode: TX 11n HT20 channel 11

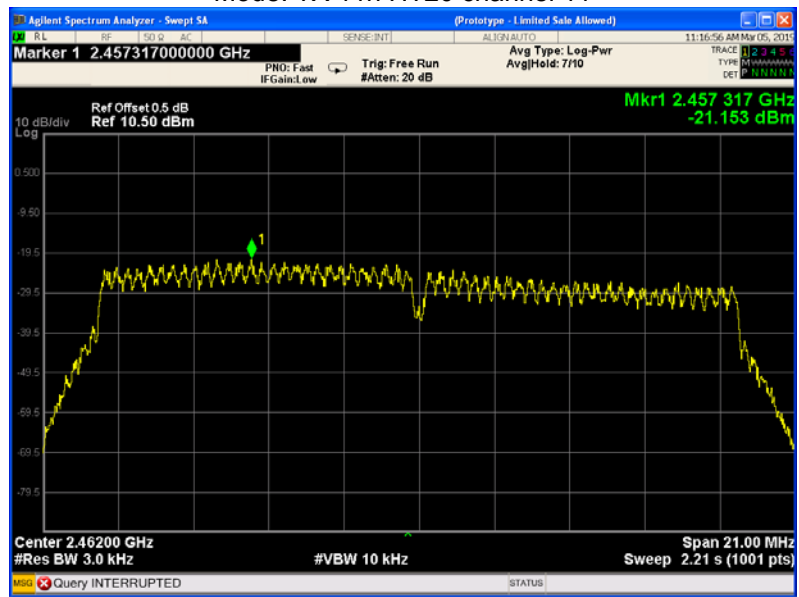


Mode: TX 11n HT40 channel 3

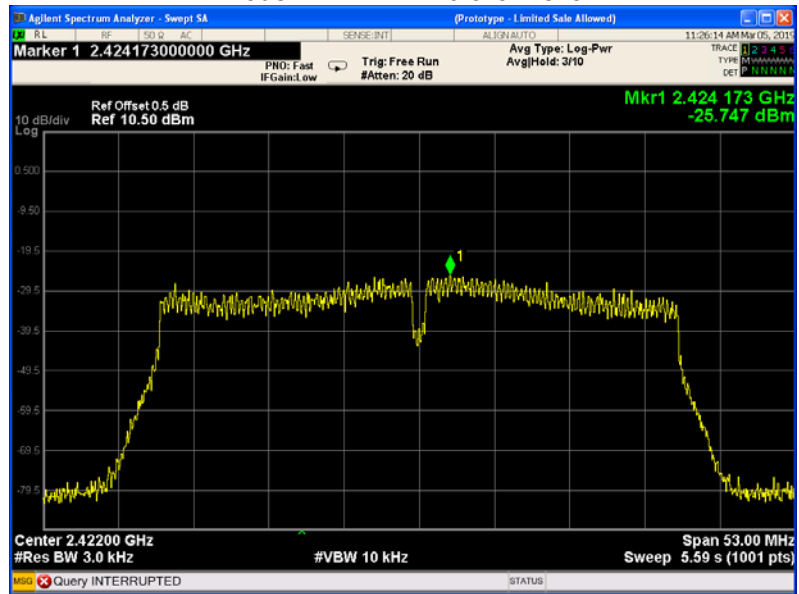

Mode: TX 11n HT40 channel 6

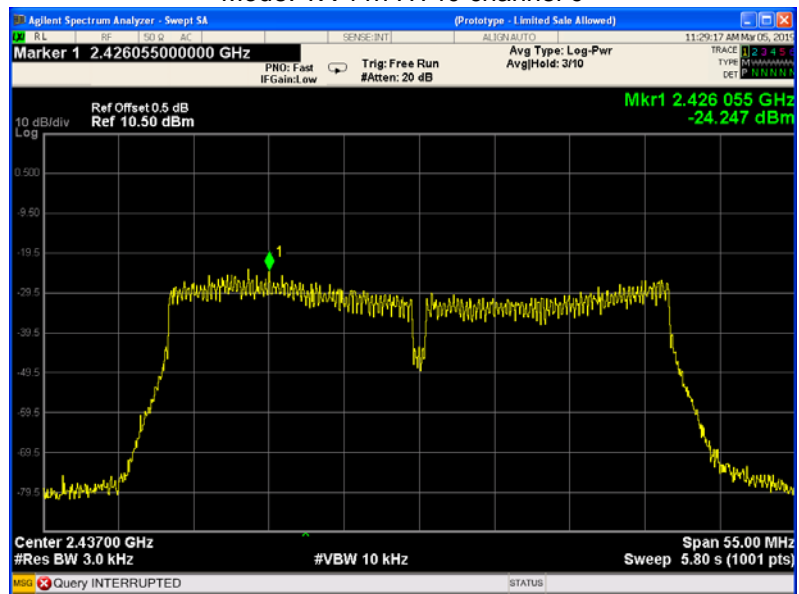


Mode: TX 11n HT40 channel 9

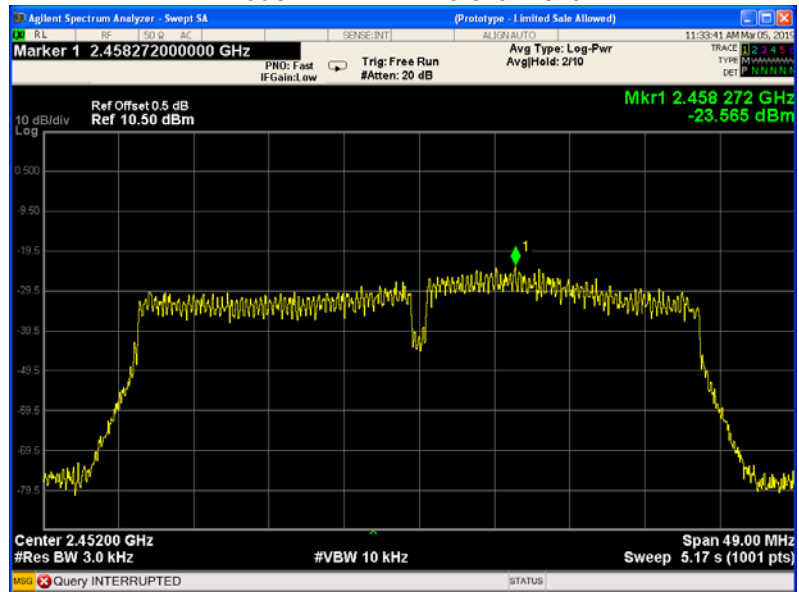





BLE: channel 0

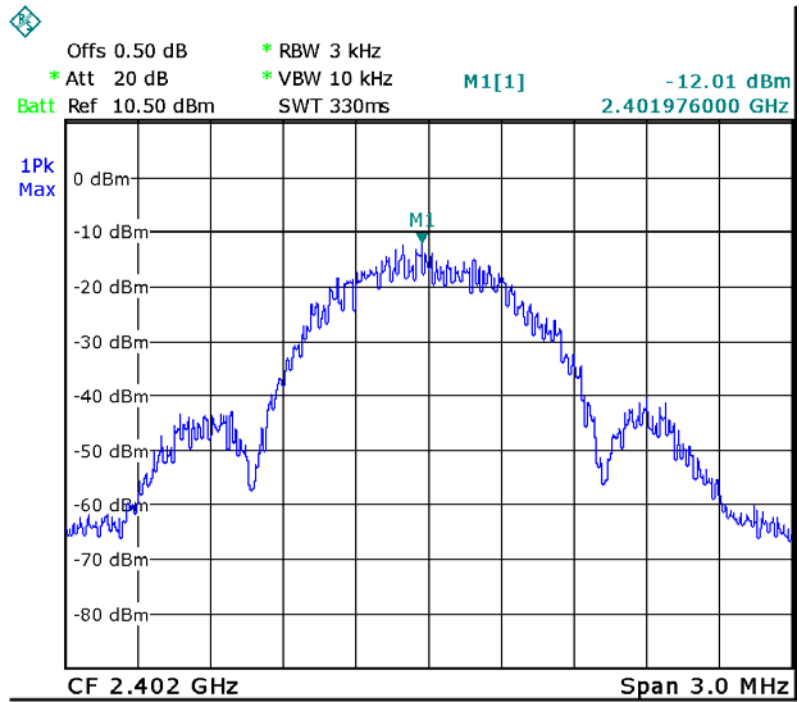

BLE: channel 19

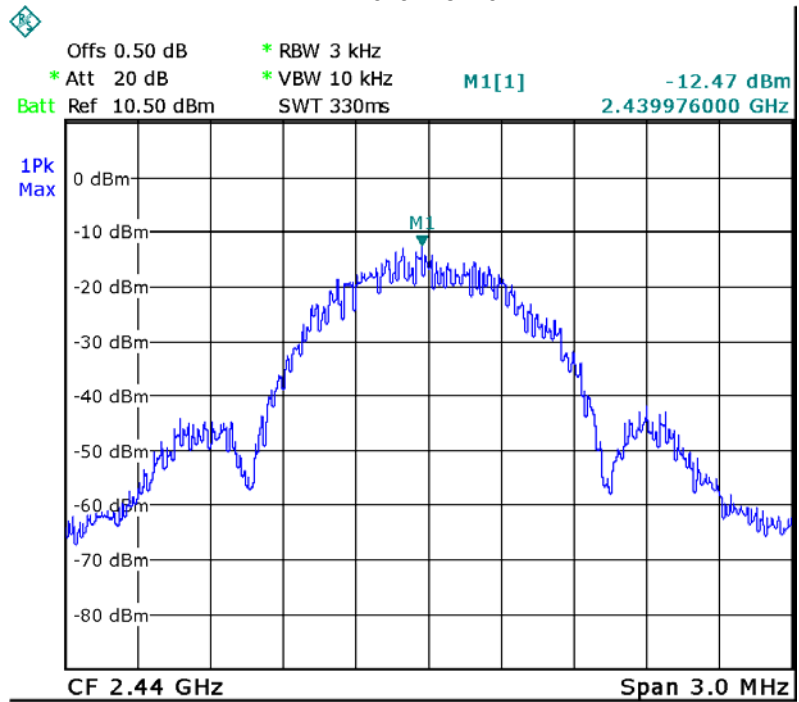

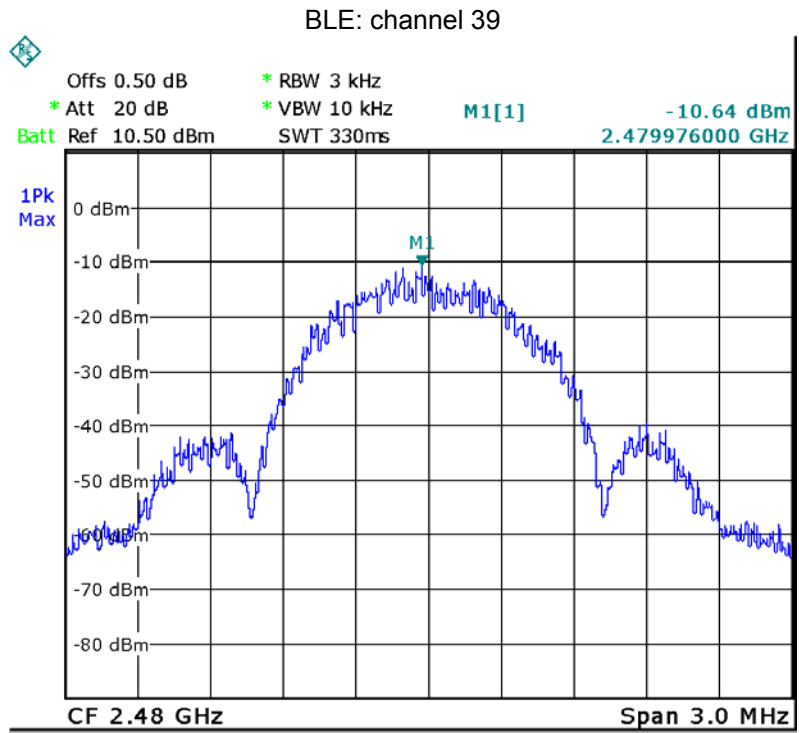

## **16 Antenna Requirement**

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.

## **17 RF Exposure**

Remark: refer to SAR test report: WTS19S02008915-1W.

## **18 Photographs of test setup and EUT.**

Note: Please refer to appendix: WTS19S02008915W\_Photo.

=====**End of Report**=====