

## FCC TEST REPORT

FOR

Shenzhen Muke Technology Co., Ltd

Bluetooth Sport Earphone

Test Model: WB-251S

Serial model No.: Please Refer to Page 6

Prepared for : Shenzhen Muke Technology Co., Ltd  
Address : 5th floor No.4 Building, Huarong No.2 Industrial Park, Huarong Road, Dalang Street, Longhua District, Shenzhen.

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : September 18, 2017  
Number of tested samples : 1  
Serial number : Prototype  
Date of Test : September 18, 2017~ October 12, 2017  
Date of Report : October 12, 2017

**FCC TEST REPORT****FCC CFR 47 PART 15 C(15.247): 2016****Report Reference No.** ..... : **LCS170627063AE**

Date of Issue..... : October 12, 2017

**Testing Laboratory Name** ..... : **Shenzhen LCS Compliance Testing Laboratory Ltd.**Address..... : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,  
Bao'an District, Shenzhen, Guangdong, ChinaTesting Location/ Procedure..... : Full application of Harmonised standards   
Partial application of Harmonised standards   
Other standard testing method **Applicant's Name**..... : Shenzhen Muke Technology Co., LtdAddress..... : 5th floor No.4 Building, Huarong No.2 Industrial Park, Huarong  
Road, Dalang Street, Longhua District, Shenzhen.**Test Specification**

Standard..... : FCC CFR 47 PART 15 C(15.247): 2016

Test Report Form No..... : LCSEMC-1.0

TRF Originator ..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF ..... : Dated 2011-03

**Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test Item Description.** ..... : **Bluetooth Sport Earphone**

Trade Mark..... : Willong

Test Model ..... : WB-251S

Ratings..... : DC 3.7V by Lithium ion polymer battery  
5V<sup>---</sup>, 0.5A**Result** ..... : **Positive****Compiled by:**

Ace Chai/ File administrators

**Supervised by:**

Dick Su/ Technique principal

**Approved by:**

Gavin Liang/ Manager

### FCC -- TEST REPORT

<b>Test Report No. :</b> LCS170627063AE	<u>October 12, 2017</u> Date of issue
---	--

Test Model.....	: WB-251S
EUT.....	: Bluetooth Sport Earphone
<b>Applicant</b> .....	: Shenzhen Muke Technology Co., Ltd
Address.....	: 5th floor No.4 Building, Huarong No.2 Industrial Park, Huarong Road, Dalang Street, Longhua District, Shenzhen.
Telephone.....	: /
Fax.....	: /
<b>Manufacturer</b> .....	: Shenzhen Muke Technology Co., Ltd
Address.....	: 5th floor No.4 Building, Huarong No.2 Industrial Park, Huarong Road, Dalang Street, Longhua District, Shenzhen.
Telephone.....	: /
Fax.....	: /
<b>Factory</b> .....	: Shenzhen Muke Technology Co., Ltd
Address.....	: 5th floor No.4 Building, Huarong No.2 Industrial Park, Huarong Road, Dalang Street, Longhua District, Shenzhen.
Telephone.....	: /
Fax.....	: /

<b>Test Result</b>	<b>Positive</b>
--------------------	-----------------

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

**Revision History**

Revision	Issue Date	Revisions	Revised By
00	October 12, 2017	Initial Issue	Gavin Liang

## TABLE OF CONTENTS

Description	Page
<b>1. GENERAL INFORMATION .....</b>	<b>6</b>
1.1 Description of Device (EUT) .....	6
1.2. Host System Configuration List and Details .....	6
1.3. External I/O Cable.....	6
1.4. Description of Test Facility .....	6
1.5 Statement of the Measurement Uncertainty .....	7
1.6 Measurement Uncertainty.....	7
1.7 Description of Test Modes .....	7
<b>2. TEST METHODOLOGY .....</b>	<b>8</b>
2.1 EUT Configuration.....	8
2.2 EUT Exercise .....	8
2.3 General Test Procedures.....	8
2.4. Test Sample .....	8
<b>3. SYSTEM TEST CONFIGURATION .....</b>	<b>9</b>
3.1 Justification.....	9
3.2 EUT Exercise Software .....	9
3.3 Special Accessories.....	9
3.4 Block Diagram/Schematics.....	9
3.5 Equipment Modifications .....	9
3.6 Test Setup .....	9
<b>4. SUMMARY OF TEST RESULTS.....</b>	<b>10</b>
<b>5. SUMMARY OF TEST EQUIPMENT .....</b>	<b>11</b>
<b>6. MEASUREMENT RESULTS .....</b>	<b>12</b>
6.1 Peak Power .....	12
6.2 Frequency Separation and 20 dB Bandwidth .....	15
6.3 Number of Hopping Frequency.....	22
6.4 Time of Occupancy (Dwell Time) .....	24
6.5 Conducted Spurious Emissions and Band Edges Test .....	28
6.6 Restricted Band Emission Limit .....	35
6.7. AC Power line conducted emissions.....	45
6.8. Band-edge measurements for radiated emissions .....	48
6.9. Pseudorandom frequency hopping sequence.....	52
6.10. Antenna requirement.....	53
<b>7. TEST SETUP PHOTOGRAPHS OF EUT .....</b>	<b>55</b>
<b>8. EXTERIOR PHOTOGRAPHS OF THE EUT .....</b>	<b>55</b>
<b>9. INTERIOR PHOTOGRAPHS OF THE EUT .....</b>	<b>55</b>

## 1. GENERAL INFORMATION

### 1.1 Description of Device (EUT)

EUT	: Bluetooth Sport Earphone
Test Model	: WB-251S
Model Declaration	: PCB board, structure and internal of these model(s) are the same, So no additional models were tested.
Model Number	: WB-237S, WB-235S, WB-132S, WB-122, WB-107, WB-103, WB-236, WB-252, WB-238
Hardware version	: WB-251V1.0
Software version	: WB-251V1.0
Power Supply	: DC 3.7V by Lithium ion polymer battery 5V $\overline{=}$ , 0.5A
Bluetooth Technology	
Operation frequency	: 2402MHz-2480MHz
Modulation Type	: GFSK, $\pi/4$ -DQPSK, 8-DPSK for Bluetooth 4.2 (BT Classics) GFSK for Bluetooth 4.2 (BT LE)
Bluetooth Version	4.0
Channel Number	: 79 channels for Bluetooth 4.2 (BT Classics) 40 channels for Bluetooth 4.2 (BT LE)
Channel Spacing	: 1MHz for Bluetooth 4.2 (BT Classics) 2MHz for Bluetooth 4.2 (BT LE)
Antenna Type	: PCB Antenna
Antenna Gain	: 2dBi (Max.)
Extreme temp. Tolerance	: -20°C to +45°C

### 1.2. Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	Certificate
--	--	--	--	--

### 1.3. External I/O Cable

I/O Port Description	Quantity	Cable
Micro USB	1	N/A
AC Power Port	1	N/A
Audio Input	1	N/A

### 1.4. Description of Test Facility

CNAS Registration Number. is L4595.  
 FCC Registration Number. is CN5024.  
 Industry Canada Registration Number. is 9642A-1.  
 ESMD Registration Number. is ARCB0108.  
 UL Registration Number. is 100571-492.  
 TUV SUD Registration Number. is SCN1081.  
 TUV RH Registration Number. is UA 50296516-001  
 NVLAP Registration Code is 600167-0.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

## 1.5 Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

## 1.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	9KHz~30MHz	3.10dB	(1)
	30MHz~200MHz	2.96dB	(1)
	200MHz~1000MHz	3.10dB	(1)
	1GHz~26.5GHz	3.80dB	(1)
	26.5GHz~40GHz	3.90dB	(1)
Conduction Uncertainty	150kHz~30MHz	1.63dB	(1)
Power disturbance	30MHz~300MHz	1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.7 Description of Test Modes

Bluetooth operates in the unlicensed ISM Band at 2.4GHz. With basic data rate feature, the data rates can be up to 1 Mb/s by modulating the RF carrier using GFSK techniques. The EUT works in the X-axis, Y-axis, Z-axis. The following operating modes were applied for the related test items. All test modes were tested, only the result of the worst case was recorded in the report.

Mode of Operations	Frequency Range (MHz)	Data Rate (Mbps)
BT V3.0	2402	1/2/3
	2441	1/2/3
	2480	1/2/3
For Conducted Emission		
Test Mode		TX Mode
For Radiated Emission		
Test Mode		TX Mode

Worst-case mode and channel used for 150 KHz-30 MHz power line conducted emissions was the mode and channel with the highest output power that was determined to be TX (1Mbps).

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be TX(1Mbps-Low Channel).

Pre-test AC conducted emission at charge from power adapter mode, recorded worst case.

Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded worst case.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR PART 15C 15.207, 15.209, 15.247 and DA 00-705.

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT Exercise

The EUT was operated in the normal operating mode for Hopping Numbers and Dwell Time test and a continuous transmits mode for other tests.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209, 15.247 under the FCC Rules Part 15 Subpart C.

### 2.3 General Test Procedures

#### 2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane.. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

#### 2.3.2 Radiated Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013

### 2.4. Test Sample

The application provides 2 samples to meet requirement;

Sample Number	Description
Sample 1	Engineer sample – continuous transmit
Sample 2	Normal sample – Intermittent transmit



### 3. SYSTEM TEST CONFIGURATION

#### 3.1 Justification

The system was configured for testing in a continuous transmits condition.

#### 3.2 EUT Exercise Software

The system was configured for testing in a continuous transmits condition and change test channels by software (MP\_kit\_RF TOOL) provided by application.

#### 3.3 Special Accessories

No.	Equipment	Manufacturer	Model No.	Serial No.	Length	shielded/ unshielded	Notes
1	PC	Lenovo	Ideapad	A131101550	/	/	DOC
2	Power adapter	Lenovo	CPA-A090	36200414	1.00m	unshielded	DOC

#### 3.4 Block Diagram/Schematics

Please refer to the related document.

#### 3.5 Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

#### 3.6 Test Setup

Please refer to the test setup photo.

## 4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart C			
FCC Rules	Description of Test	Test Sample	Result
§15.247(b)(1)	Maximum Conducted Output Power	Sample 1	Compliant
§15.247(c)	Frequency Separation And 20 dB Bandwidth	Sample 1	Compliant
§15.247(a)(1)(ii)	Number Of Hopping Frequency	Sample 2	Compliant
§15.247(a)(1)(iii)	Time Of Occupancy (Dwell Time)	Sample 2	Compliant
§15.209, §15.247(d)	Radiated and Conducted Spurious Emissions	Sample 1	Compliant
§15.205	Emissions at Restricted Band	Sample 1	Compliant
§15.207(a)	Conducted Emissions	Sample 1	Compliant
§15.203	Antenna Requirements	Sample 1	Compliant
§15.247(i)§2.1093	RF Exposure	N/A	Compliant


## 5. SUMMARY OF TEST EQUIPMENT

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1	Power Meter	R&S	NRVS	100444	2017-06-17	2018-06-16
2	Power Sensor	R&S	NRV-Z81	100458	2017-06-17	2018-06-16
3	Power Sensor	R&S	NRV-Z32	10057	2017-06-17	2018-06-16
4	EPM Series Power Meter	Agilent	E4419B	MY45104493	2017-06-17	2018-06-16
5	E-SERIES AVG	Agilent	E9301H	MY41495234	2017-06-17	2018-06-16
6	ESA-E SERIES	Agilent	E4407B	MY41440754	2016-11-18	2017-11-17
7	MXA Signal Analyzer	Agilent	N9020A	MY49100040	2017-06-17	2018-06-16
8	SPECTRUM ANALYZER	R&S	FSP	100503	2017-06-17	2018-06-16
9	3m Semi Anechoic	SIDT FRANKONIA	SAC-3M	03CH03-HY	2017-06-17	2018-06-16
10	Positioning Controller	MF	MF-7082	/	2017-06-17	2018-06-16
11	EMI Test Software	AUDIX	E3	N/A	2017-06-17	2018-06-16
12	EMI Test Receiver	ROHDE & SCHWARZ	ESR 7	101181	2017-06-17	2018-06-16
13	AMPLIFIER	QuieTek	QTK-A2525G	CHM10809065	2016-11-18	2017-11-17
14	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2017-06-23	2018-06-22
15	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2017-05-02	2018-05-01
16	Horn Antenna	EMCO	3115	6741	2017-06-23	2018-06-22
17	RF Cable-R03m	Jye Bao	RG142	CB021	2017-06-17	2018-06-16
18	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	2017-06-17	2018-06-16
19	TEST RECEIVER	R&S	ESCI	101142	2017-06-17	2018-06-16
20	RF Cable-CON	UTIFLEX	3102-26886-4	CB049	2017-06-17	2018-06-16
21	10dB Attenuator	SCHWARZBECK	MTS-IMP136	261115-001-0032	2017-06-17	2018-06-16
22	Artificial Mains	R&S	ENV216	101288	2017-06-17	2018-06-16

## 6. MEASUREMENT RESULTS

### 6.1 Peak Power

#### 6.1.1 Block Diagram of Test Setup

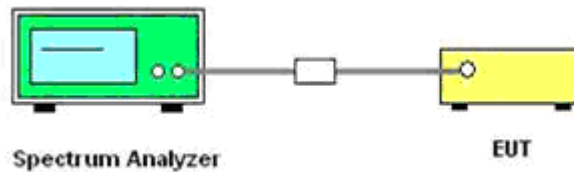

#### 6.1.2 Limit

According to §15.247(b)(1), For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

#### 6.1.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power

#### 6.1.4 Test Results

Test Mode	Channel	Frequency (MHz)	Measured Maximum Power (dBm)	Limits (dBm)	Verdict
GFSK	0	2402	3.195	30.00	PASS
	39	2441	3.858		
	78	2480	3.642		
π/4DQPSK	0	2402	2.603	21.00	PASS
	39	2441	3.306		
	78	2480	3.007		
8DPSK	0	2402	2.629	21.00	PASS
	39	2441	3.512		
	78	2480	3.154		



#### Remark:

1. Test results including cable loss;
2. Measured output power at difference Packet Type for each mode and recorded worst case for each mode.
3. Worst case data at DH5 for GFSK, 2DH5 for π/4DQPSK, 3DH5 for 8DPSK modulation type;
4. Please refer to following test plots;

### Peak Output Power



#### GFSK

#### $\pi/4$ -DQPSK

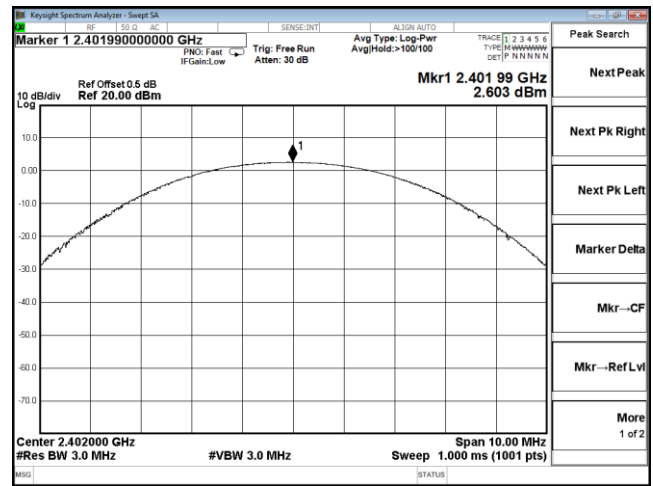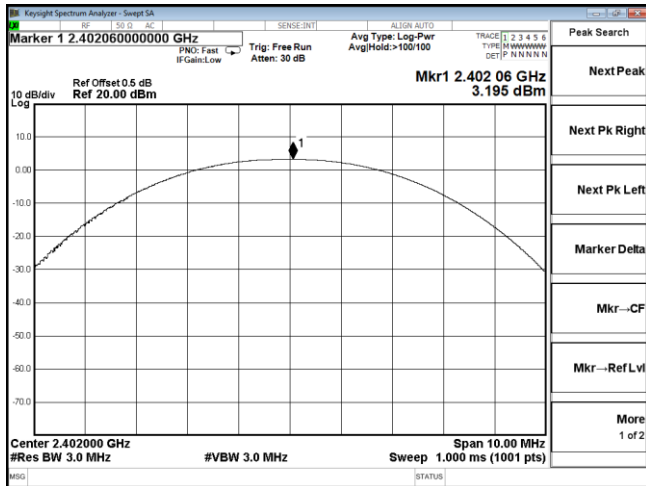



#### Channel 0 / 2402 MHz

#### Channel 0 / 2402 MHz

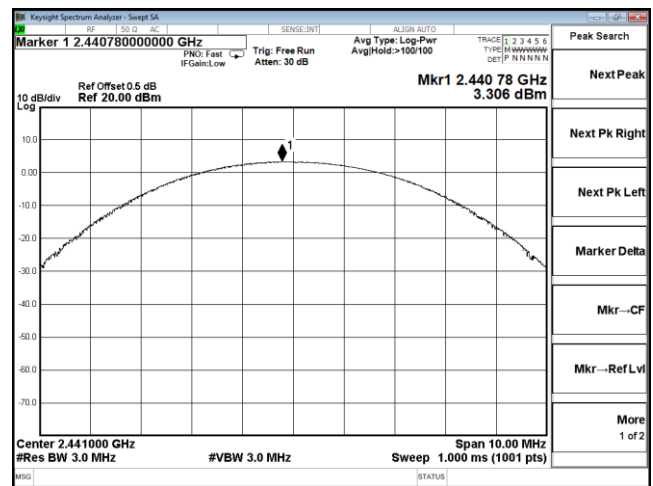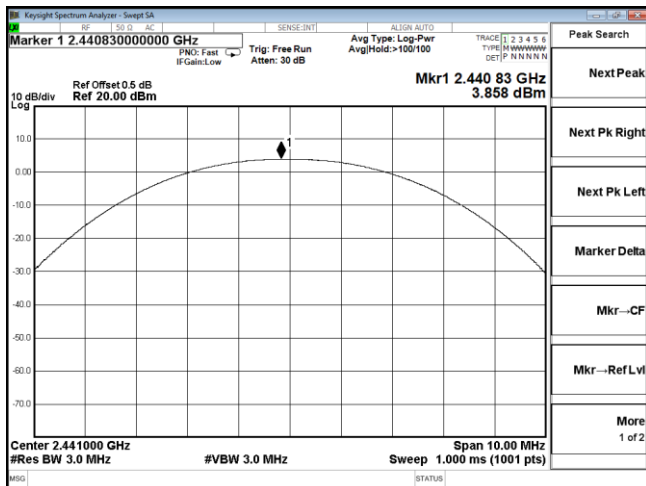

#### Channel 39 / 2441 MHz

#### Channel 39 / 2441 MHz

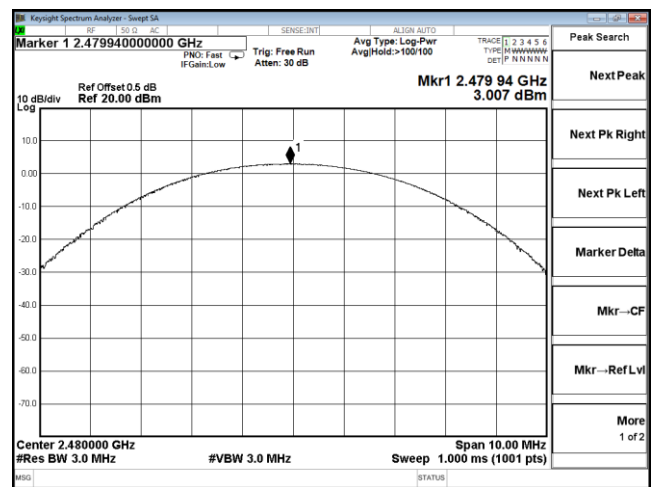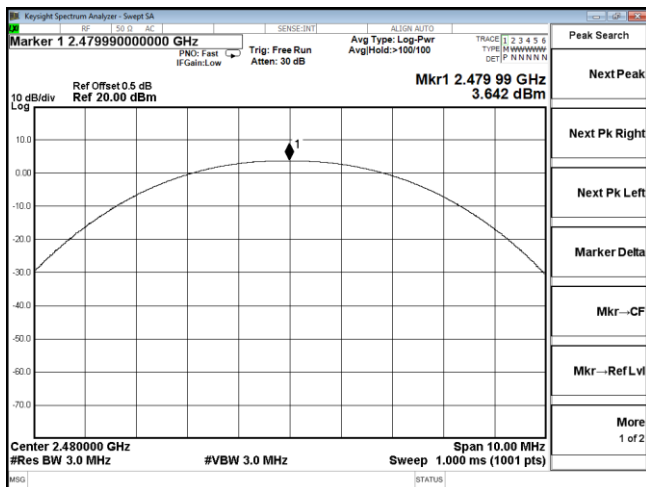


#### Channel 78 / 2480 MHz


#### Channel 78 / 2480 MHz

### Peak Output Power


#### 8DPSK

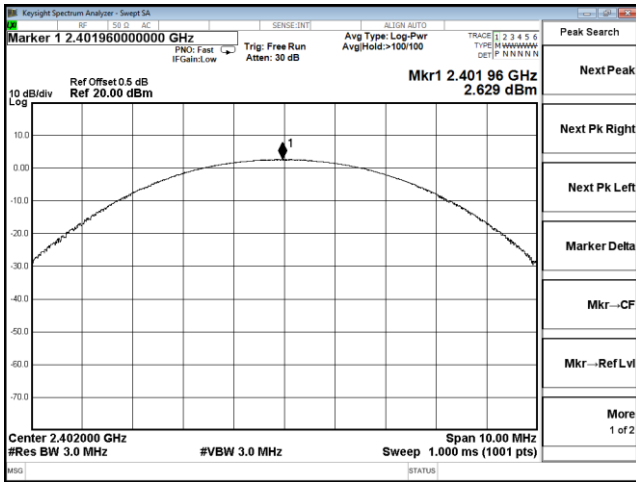

#### Channel 0 / 2402 MHz

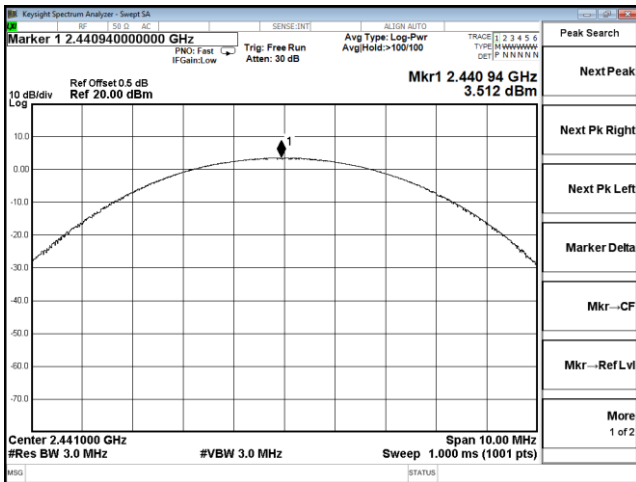

#### Channel 39 / 2441 MHz

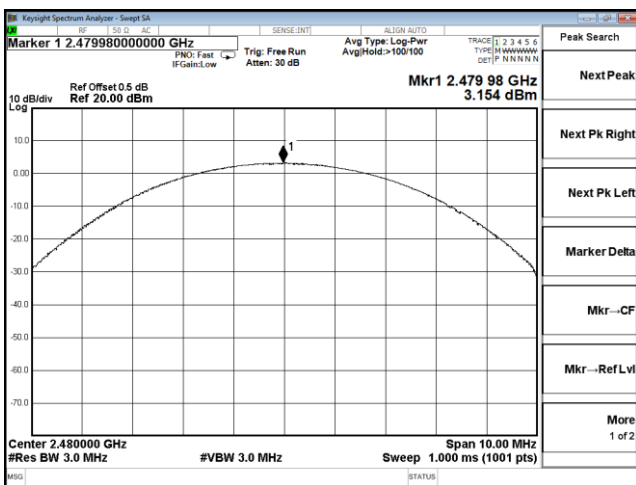


#### Channel 78 / 2480 MHz

## 6.2 Frequency Separation and 20 dB Bandwidth

### 6.2.1 Limit

According to §15.247(a) (1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 6.2.2 Block Diagram of Test Setup

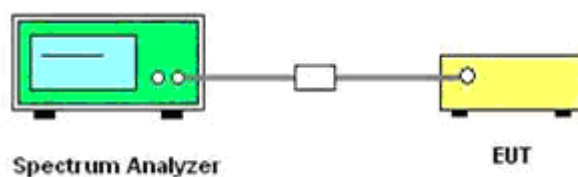

### 6.2.3 Test Procedure

Frequency separation test procedure :

- 1). Place the EUT on the table and set it in transmitting mode.
- 2). Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- 3). Set center frequency of Spectrum Analyzer = middle of hopping channel.
- 4). Set the Spectrum Analyzer as RBW = 30 kHz, VBW = 100 kHz, Span = wide enough to capture the peaks of two adjacent channels, Sweep = auto.
- 5). Max hold, mark 2 peaks of hopping channel and record the 2 peaks frequency.

20dB bandwidth test procedure :

- 1). Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel.
- 2). RBW  $\geq 1\%$  of the 20 dB bandwidth, VBW  $\geq$  RBW.
- 3). Detector function = peak.
- 4). Trace = max hold.

### 6.2.4 Test Results

## 6.2.4 Test Results

## 6.2.4.1 20dB Bandwidth

Test Mode	Channel	Frequency (MHz)	Measured Bandwidth (KHz)		Limits (KHz)	Verdict
			99%	20dB		
GFSK	0	2402	842.68	836.8	No Limits	PASS
	39	2441	841.25	833.4		
	78	2480	826.66	836.8		
$\pi/4$ DQPSK	0	2402	1064.2	1112	No Limits	PASS
	39	2441	1065	1117		
	78	2480	1063.3	1116		
8DPSK	0	2402	1101.9	1162	No Limits	PASS
	39	2441	1103.3	1165		
	78	2480	1103.4	1163		

*Remark:*



1. Test results including cable loss;
2. Measured 20dB Bandwidth at difference Packet Type for each mode and recorded worst case for each mode.
3. Worst case data at DH5 for GFSK, 2DH5 for  $\pi/4$ DQPSK, 3DH5 for 8DPSK modulation type;
4. Please refer following test plots;



99% and 20dB Bandwidth



GFSK

$\pi/4$ -DQPSK

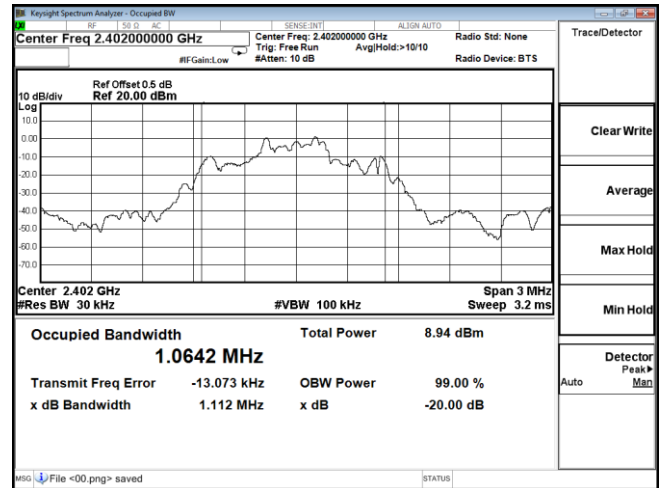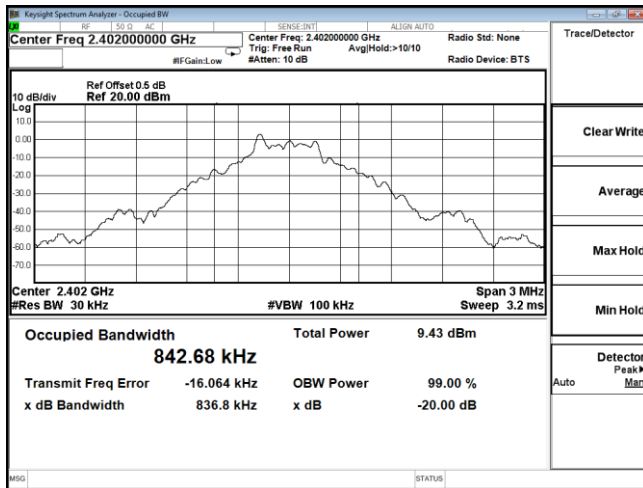



Channel 0 / 2402 MHz

Channel 0 / 2402 MHz

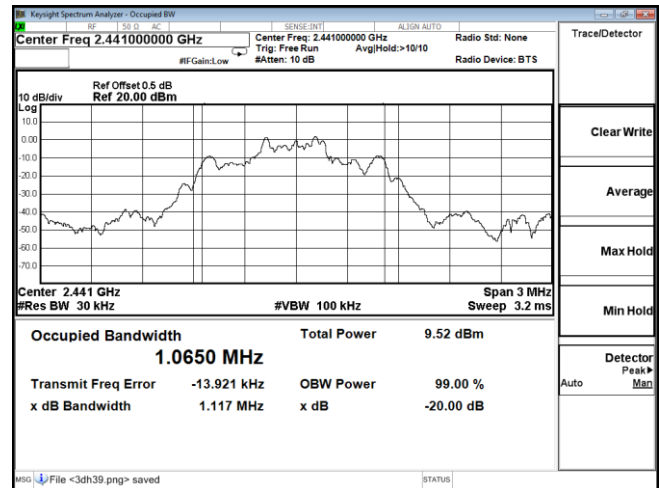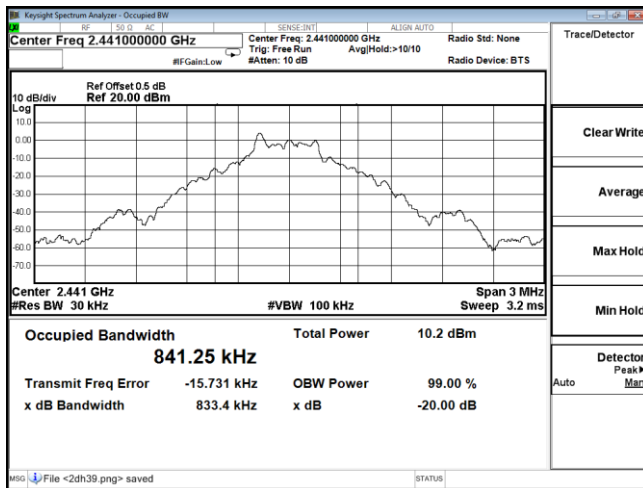

Channel 39 / 2441 MHz

Channel 39 / 2441 MHz

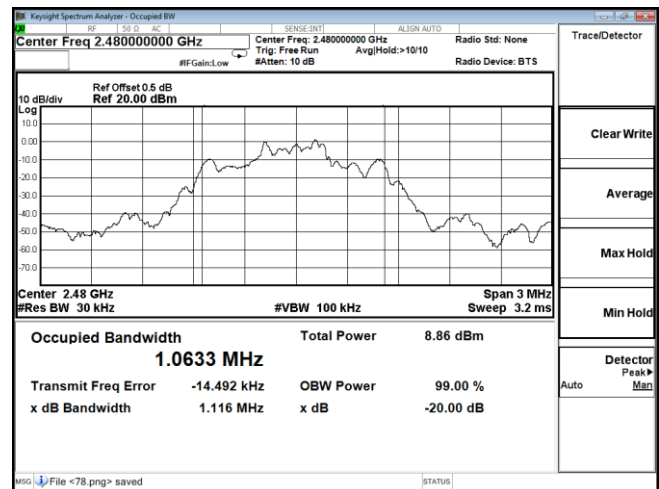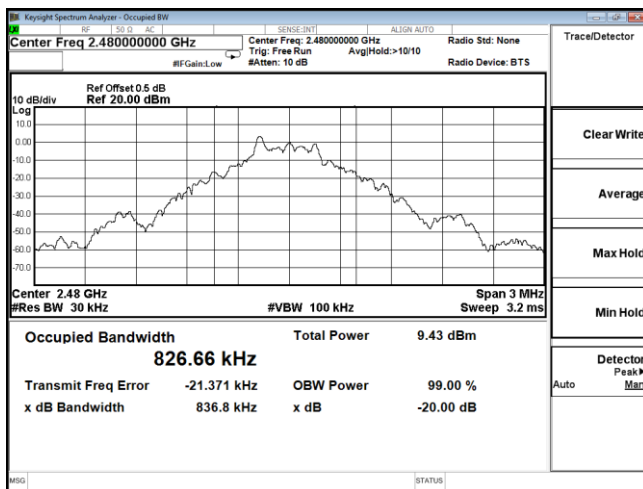


Channel 78 / 2480 MHz


Channel 78 / 2480 MHz

99% and 20dB Bandwidth


8DPSK

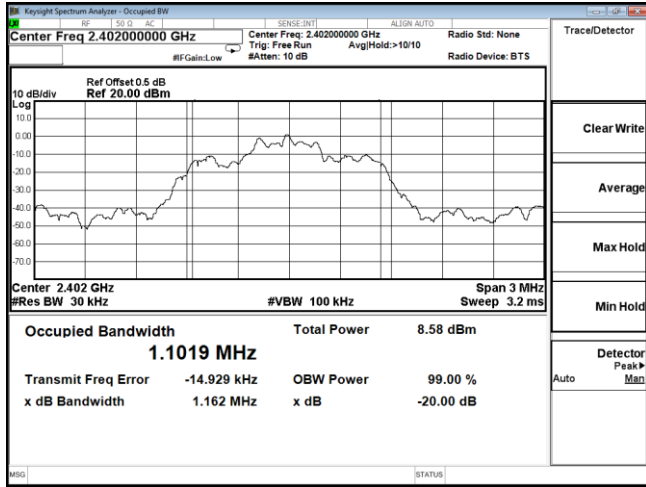

Channel 0 / 2402 MHz

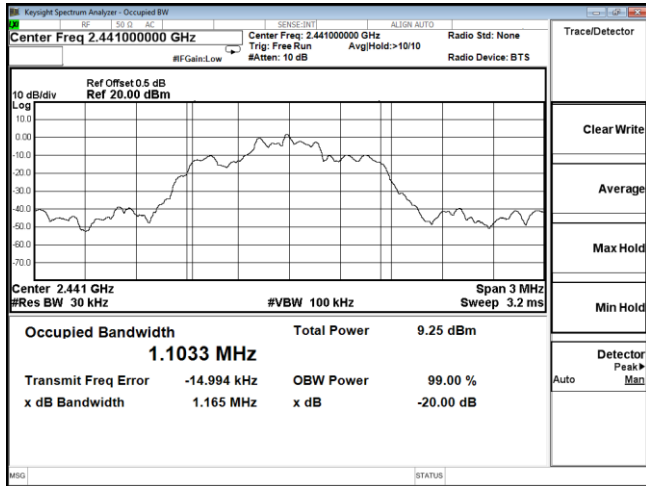

Channel 39 / 2441 MHz

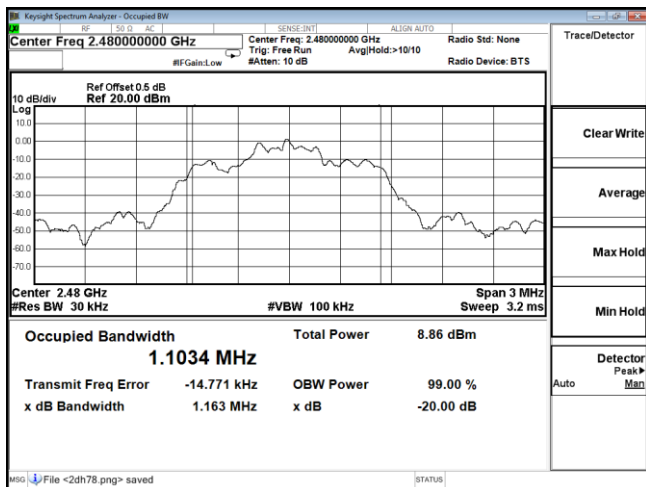

Channel 78 / 2480 MHz

## 6.2.4.2 Frequency Separation

The Measurement Result With 1Mbps For GFSK Modulation				
Channel	20dB Bandwidth (KHz)	Channel Separation (MHz)	Limit (KHz)	Result
Low	836.8	1.000	836.8	PASS
Middle	833.4		833.4	PASS
High	836.8		836.8	PASS
The Measurement Result With 2Mbps For $\pi/4$ -DQPSK Modulation				
Channel	20dB Bandwidth (KHz)	Channel Separation (MHz)	Limit (KHz)	Result
Low	1112	1.000	741.33	PASS
Middle	1117		744.67	PASS
High	1116		744.00	PASS
The Measurement Result With 3Mbps For 8-DPSK Modulation				
Channel	20dB Bandwidth (KHz)	Channel Separation (MHz)	Limit (KHz)	Result
Low	1162	1.000	774.67	PASS
Middle	1165		776.67	PASS
High	1163		775.33	PASS



**Remark:**

1. Test results including cable loss;
2. Please refer to following plots;
3. Measured at difference Packet Type for each mode and recorded worst case for each mode.
4. Worst case data at DH5 for GFSK, 2DH5 for  $\pi/4$ -DQPSK, 3DH5 for 8DPSK modulation type;

Frequency Separation



GFSK

$\pi/4$ -DQPSK

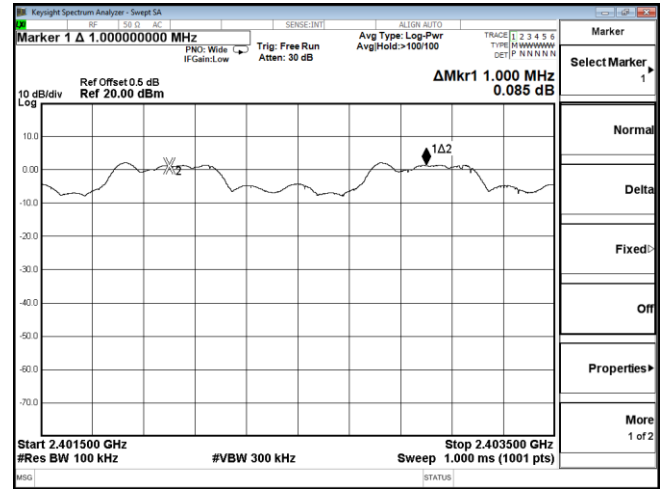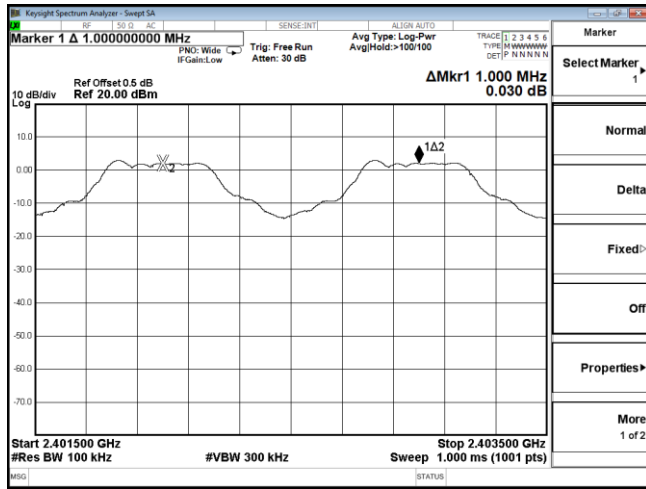



Channel 0 / 2402 MHz

Channel 0 / 2402 MHz

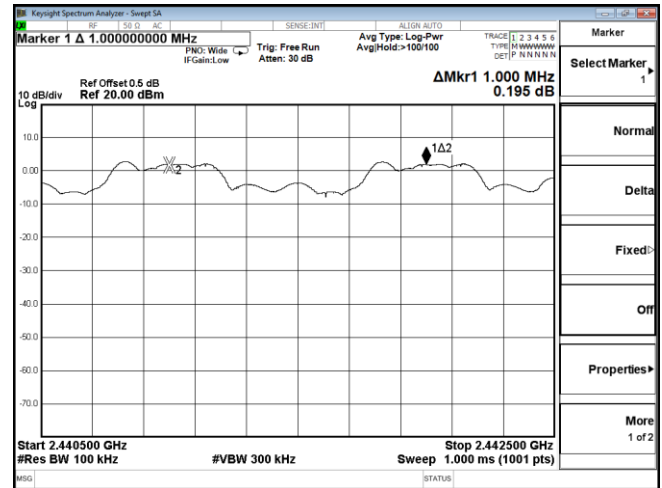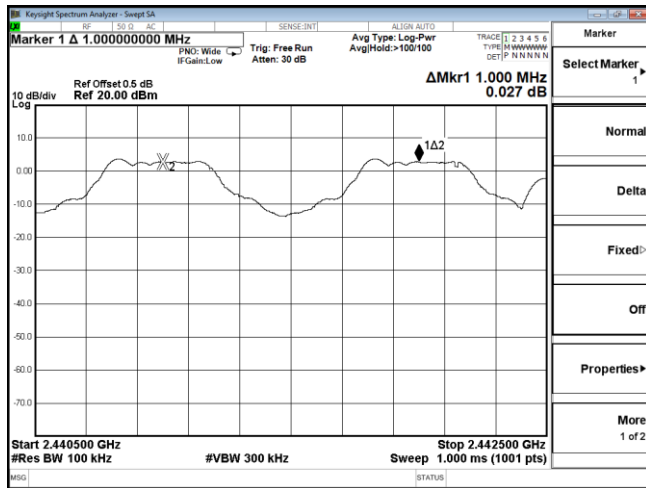

Channel 39 / 2441 MHz

Channel 39 / 2441 MHz

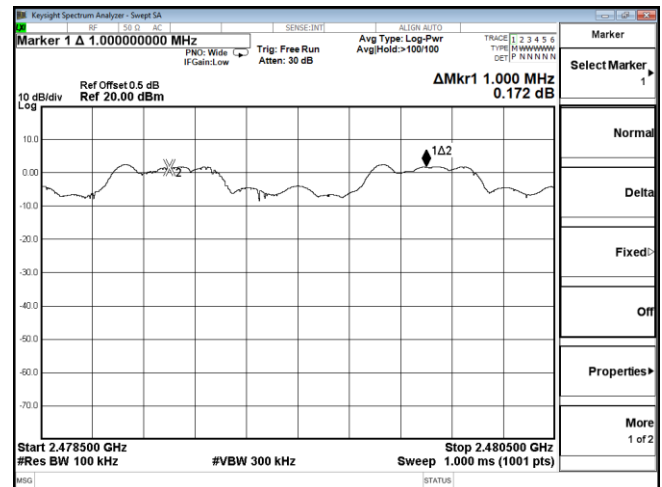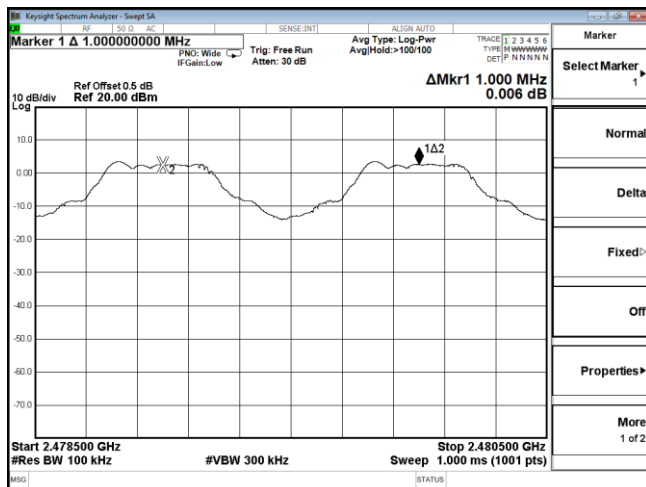


Channel 78 / 2480 MHz


Channel 78 / 2480 MHz

Frequency Separation


8DPSK

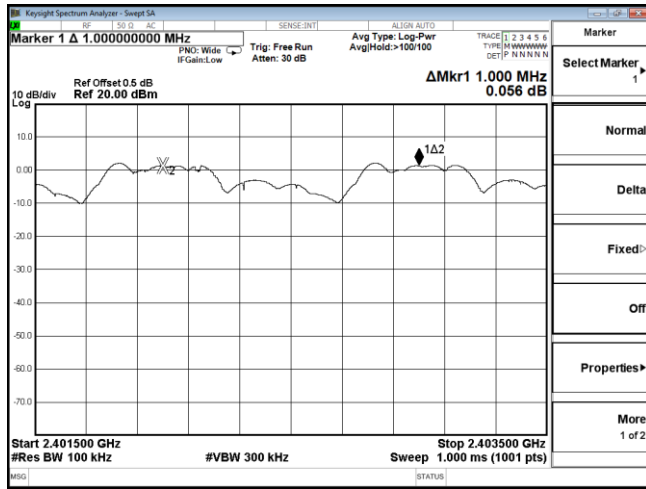

Channel 0 / 2402 MHz

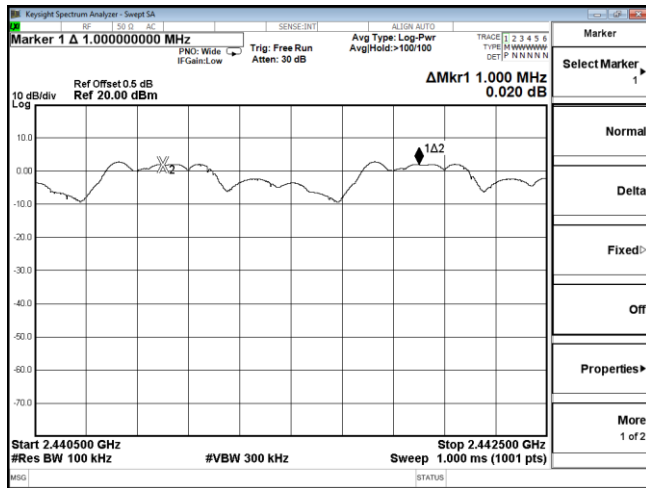

Channel 39 / 2441 MHz

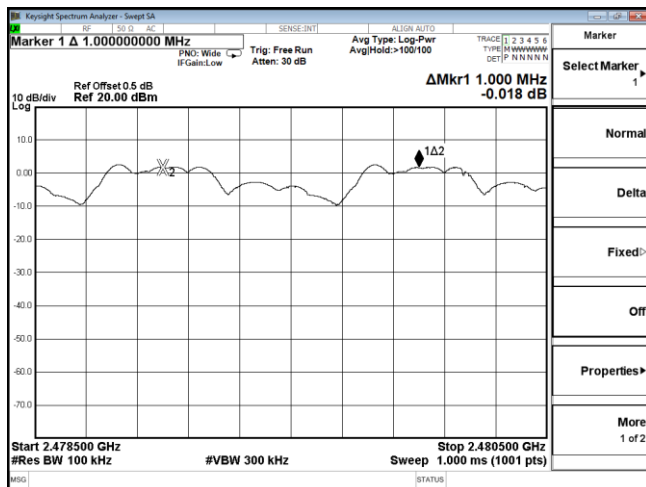


Channel 78 / 2480 MHz

## 6.3 Number of Hopping Frequency

### 6.3.1 Limit

According to §15.247(a)(1)(ii) or A8.1 (d), Frequency hopping systems operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels.

### 6.3.2 Block Diagram of Test Setup

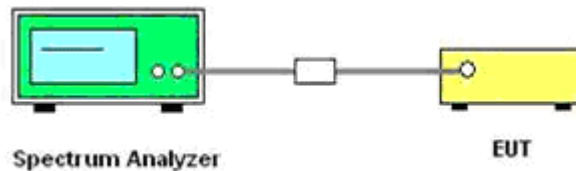

### 6.3.3 Test Procedure

- 1). Place the EUT on the table and set it in transmitting mode.
- 2). Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- 3). Set Spectrum Analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 4). Set the Spectrum Analyzer as RBW, VBW=1MHz.
- 5). Max hold, view and count how many channel in the band.

### 6.3.4 Test Results


Test Mode	Measurement Result (No. of Channels)	Limit (No. of Channels)	Result
GFSK	79	≥15	PASS
$\pi/4$ DQPSK	79	≥15	PASS
8DPSK	79	≥15	PASS

#### Remark:

1. Test results including cable loss;
2. Measured number of hopping channels at difference Packet Type for each mode and recorded worst case for each mode.
3. Worst case data at DH5 for GFSK, 2DH5 for  $\pi/4$ DQPSK, 3DH5 for 8DPSK modulation type;
4. Record test plots only for GFSK;
5. Please refer following test plots;

### Number of Hopping Frequency

#### GFSK

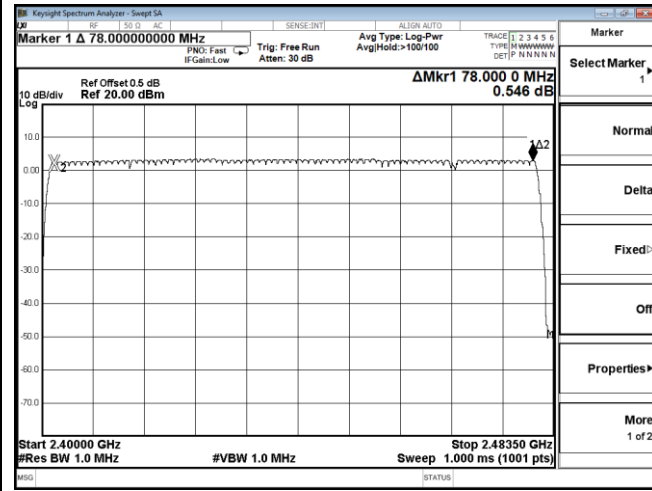


## 6.4 Time of Occupancy (Dwell Time)

### 6.4.1 Limit

According to §15.247(a)(1)(iii) or A8.1 (d), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

### 6.4.2 Block Diagram of Test Setup

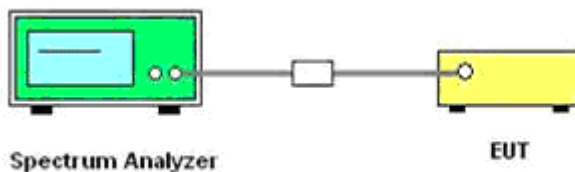

### 6.4.3 Test Procedure

- 1). Place the EUT on the table and set it in transmitting mode.
- 2). Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
- 3). Set center frequency of Spectrum Analyzer = operating frequency.
- 4). Set the Spectrum Analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
- 5). Repeat above procedures until all frequency measured was complete.

### 6.4.4 Test Results

The Dwell Time=Burst Width\*Total Hops. The detailed calculations are showed as follows:

The duration for dwell time calculation:  $0.4[s] \times \text{hopping number} = 0.4[s] \times 79[\text{ch}] = 31.6[s \cdot \text{ch}]$ ;

The burst width [ms/hop/ch], which is directly measured, refers to the duration on one channel hop.

The hops per second for all channels: The selected EUT Conf uses a slot type of 5-Tx&1-Rx and a hopping rate of 1600 [ch\*hop/s] for all channels. So the final hopping rate for all channels is  $1600/6 = 266.67 [\text{ch} \cdot \text{hop}/\text{s}]$

The hops per second on one channel:  $266.67 [\text{ch} \cdot \text{hops}/\text{s}] / 79 [\text{ch}] = 3.38 [\text{hop}/\text{s}]$ ;

The total hops for all channels within the dwell time calculation duration:  $3.38 [\text{hop}/\text{s}] \times 31.6[s \cdot \text{ch}] = 106.67 [\text{hop} \cdot \text{ch}]$ ;


The dwell time for all channels hopping:  $106.67 [\text{hop} \cdot \text{ch}] \times \text{Burst Width} [\text{ms}/\text{hop}/\text{ch}]$ .

Mode	Frequency (MHz)	Burst Type	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Verdict
GFSK	2441	DH1	0.355	0.114	0.4	PASS
		DH3	1.62	0.259		
		DH5	2.86	0.305		
π/4-DQPSK	2441	2DH1	0.36	0.115	0.4	PASS
		2DH3	1.62	0.259		
		2DH5	2.87	0.306		
8-DPSK	2441	3DH1	0.37	0.118	0.4	PASS
		3DH3	1.61	0.258		
		3DH5	2.86	0.305		



*Remark:*

1. *Test results including cable loss;*
2. *Please refer to following plots;*
3. *Measured at difference Packet Type for each mode and recorded worst case for each mode.*
4. *Dwell Time Calculate formula:*  
*DH1: Dwell time=Pulse time (ms) × (1600 ÷ 2 ÷ 79) ×31.6 Second*  
*DH3: Dwell time=Pulse time (ms) × (1600 ÷ 4 ÷ 79) ×31.6 Second*  
*DH5: Dwell time=Pulse Time (ms) × (1600 ÷ 6 ÷ 79) ×31.6 Second*
5. *Measured at low, middle and high channel, recorded worst at middle channel;*

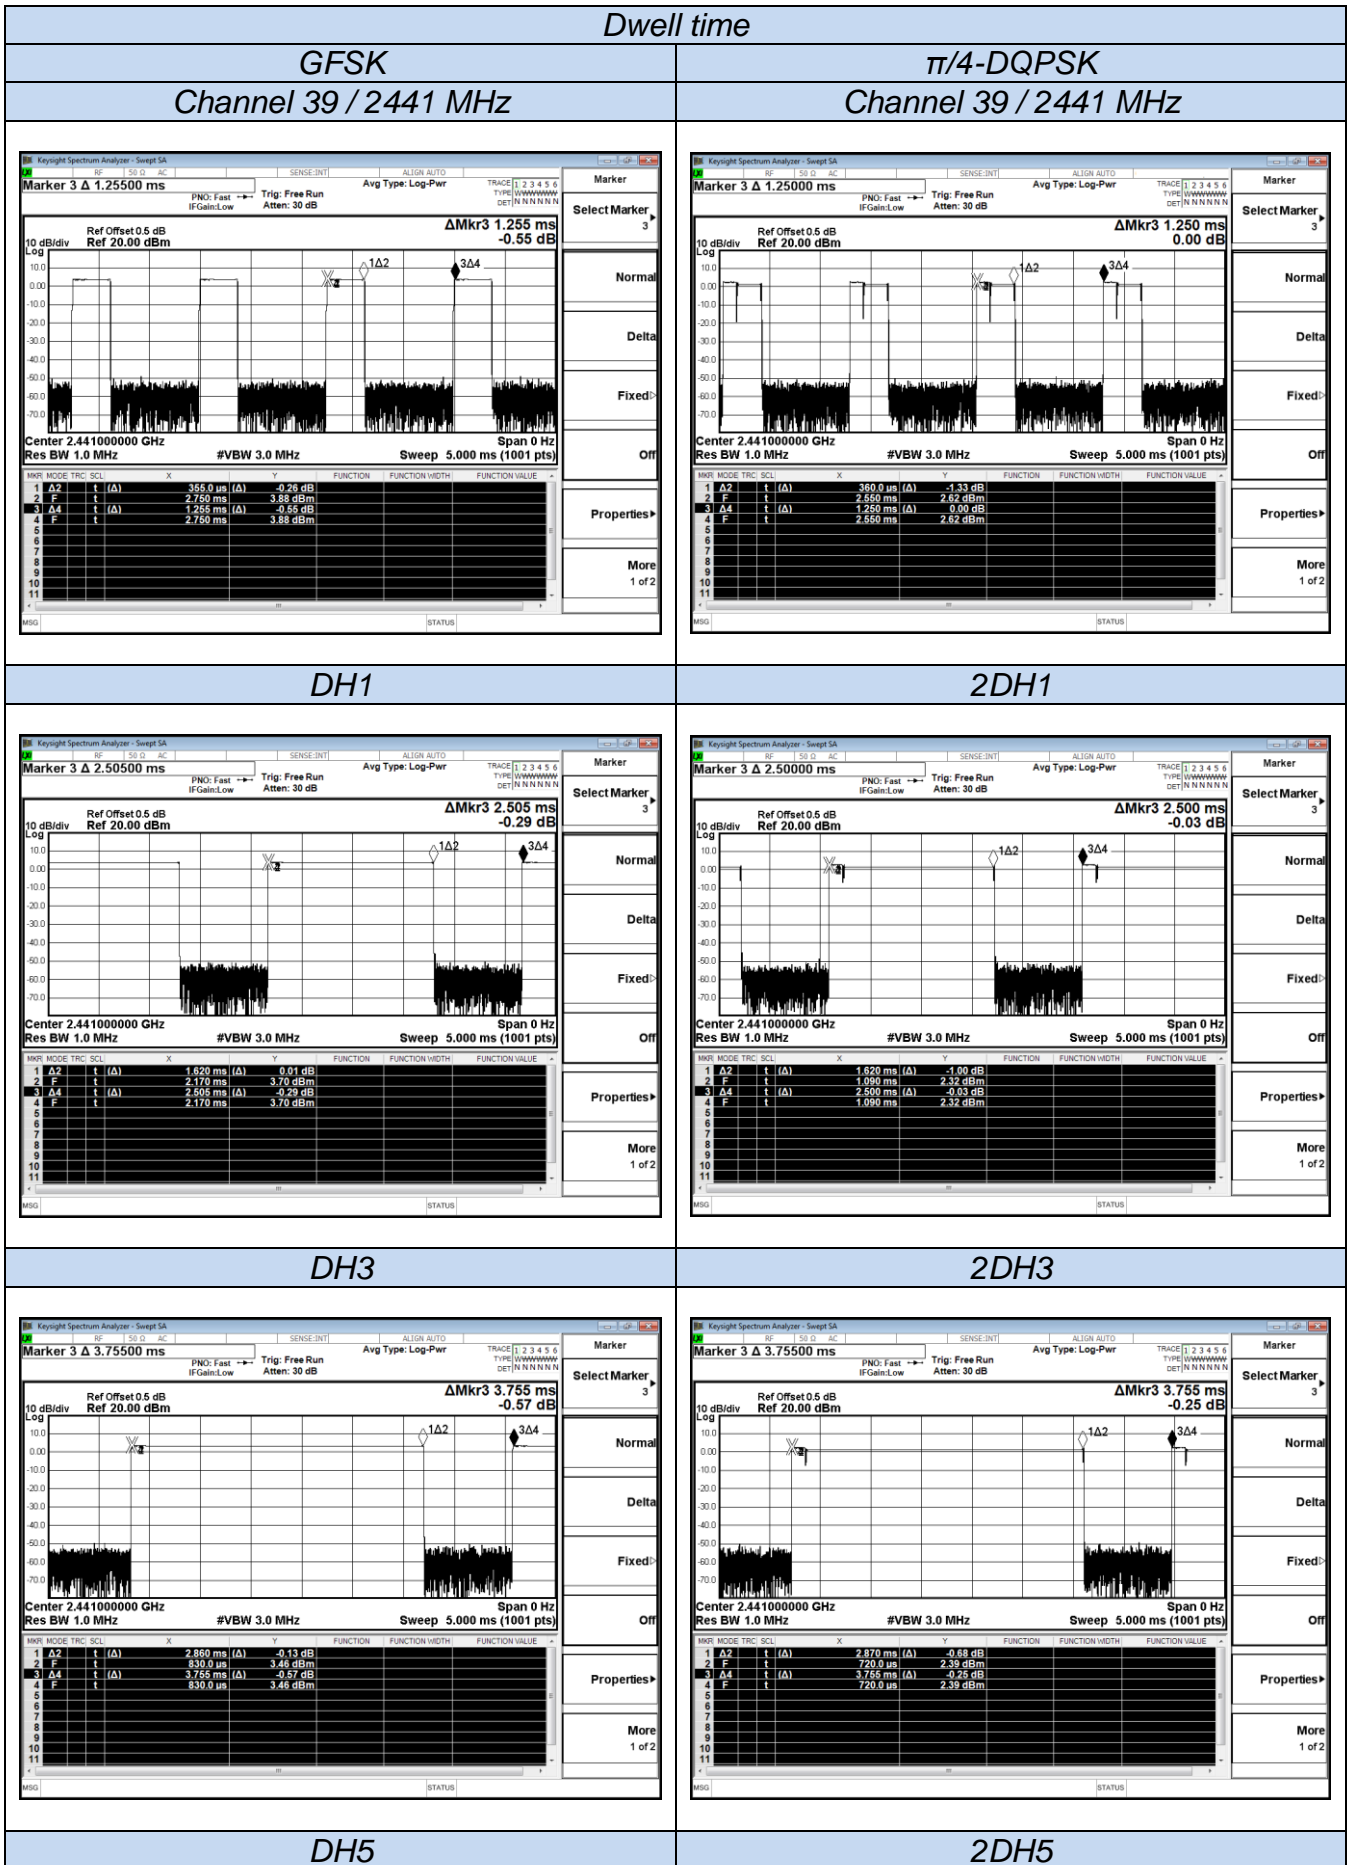


Dwell time																																														
<p><b>8DPSK</b></p> <p><b>Channel 39 / 2441 MHz</b></p>																																														
<table border="1"> <thead> <tr> <th>MARKER</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>t</td> <td>(A)</td> <td>370.0 ms</td> <td>-0.21 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>t</td> <td>(A)</td> <td>3.010 ms</td> <td>2.94 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ4</td> <td>t</td> <td>(A)</td> <td>1.250 ms</td> <td>0.00 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>F</td> <td>t</td> <td>(A)</td> <td>3.010 ms</td> <td>2.94 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MARKER	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	t	(A)	370.0 ms	-0.21 dB				2	F	t	(A)	3.010 ms	2.94 dBm				3	Δ4	t	(A)	1.250 ms	0.00 dB				4	F	t	(A)	3.010 ms	2.94 dBm				
MARKER	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	A2	t	(A)	370.0 ms	-0.21 dB																																									
2	F	t	(A)	3.010 ms	2.94 dBm																																									
3	Δ4	t	(A)	1.250 ms	0.00 dB																																									
4	F	t	(A)	3.010 ms	2.94 dBm																																									
<p><b>3DH1</b></p>																																														
<table border="1"> <thead> <tr> <th>MARKER</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>t</td> <td>(A)</td> <td>1.610 ms</td> <td>-1.29 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>t</td> <td>(A)</td> <td>270.0 μs</td> <td>2.88 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ4</td> <td>t</td> <td>(A)</td> <td>2.500 ms</td> <td>0.02 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>F</td> <td>t</td> <td>(A)</td> <td>270.0 μs</td> <td>2.88 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MARKER	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	t	(A)	1.610 ms	-1.29 dB				2	F	t	(A)	270.0 μs	2.88 dBm				3	Δ4	t	(A)	2.500 ms	0.02 dB				4	F	t	(A)	270.0 μs	2.88 dBm				
MARKER	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	A2	t	(A)	1.610 ms	-1.29 dB																																									
2	F	t	(A)	270.0 μs	2.88 dBm																																									
3	Δ4	t	(A)	2.500 ms	0.02 dB																																									
4	F	t	(A)	270.0 μs	2.88 dBm																																									
<p><b>3DH3</b></p>																																														
<table border="1"> <thead> <tr> <th>MARKER</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>t</td> <td>(A)</td> <td>2.860 ms</td> <td>-1.45 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>F</td> <td>t</td> <td>(A)</td> <td>920.0 μs</td> <td>2.61 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>Δ4</td> <td>t</td> <td>(A)</td> <td>3.750 ms</td> <td>0.00 dB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>F</td> <td>t</td> <td>(A)</td> <td>920.0 μs</td> <td>2.61 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MARKER	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	t	(A)	2.860 ms	-1.45 dB				2	F	t	(A)	920.0 μs	2.61 dBm				3	Δ4	t	(A)	3.750 ms	0.00 dB				4	F	t	(A)	920.0 μs	2.61 dBm				
MARKER	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	A2	t	(A)	2.860 ms	-1.45 dB																																									
2	F	t	(A)	920.0 μs	2.61 dBm																																									
3	Δ4	t	(A)	3.750 ms	0.00 dB																																									
4	F	t	(A)	920.0 μs	2.61 dBm																																									
<p><b>3DH5</b></p>																																														

## 6.5 Conducted Spurious Emissions and Band Edges Test

### 6.5.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 6.5.2 Block Diagram of Test Setup

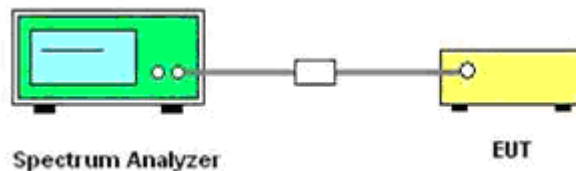

### 6.5.3 Test Procedure

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 300 KHz.

Measurements are made over the 9 kHz to 26.5GHz range with the transmitter set to the lowest, middle, and highest channels

### 6.5.4 Test Results of Conducted Spurious Emissions


No non-compliance noted. Only record the worst test result in this report. The test data refer to the following page.

Test Mode	Channel	Frequency (MHz)	Measured Frequency Range	Spurious RF Conducted Emission (dBc)	Limits (dBc)	Verdict
GFSK	0	2402	9 KHz – 26.5 GHz	<-20	-20	PASS
	39	2441	9 KHz – 26.5 GHz	<-20		
	78	2480	9 KHz – 26.5 GHz	<-20		
π/4-DQPSK	0	2402	9 KHz – 26.5 GHz	<-20	-20	PASS
	39	2441	9 KHz – 26.5 GHz	<-20		
	78	2480	9 KHz – 26.5 GHz	<-20		
8DPSK	0	2402	9 KHz – 26.5 GHz	<-20	-20	PASS
	39	2441	9 KHz – 26.5 GHz	<-20		
	78	2480	9 KHz – 26.5 GHz	<-20		


*Remark:*

- 1. Test results including cable loss;*
- 2. Please refer to following plots;*
- 3. Measured at difference Packet Type for each mode and recorded worst case for each mode.*
- 4. Worst case data at DH5 for GFSK, 2DH5 for  $\pi/4$ -DQPSK, 3DH5 for 8DPSK modulation type;*

**RF Conducted Spurious Emissions**  
**GFSK – Channel 0 / 2402 MHz**

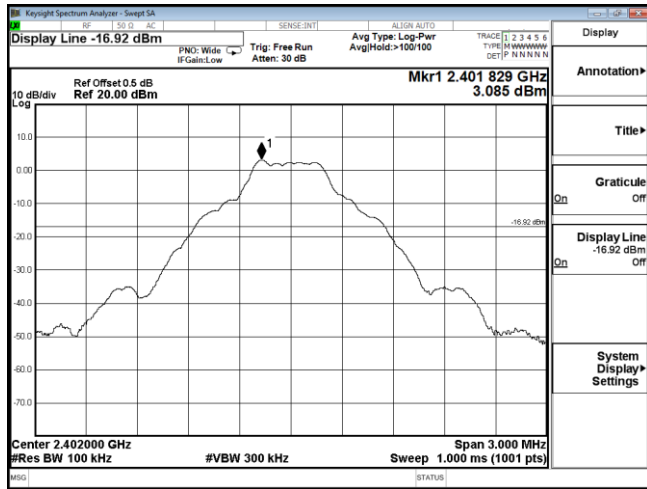


2400.5 MHz – 2403.5 MHz

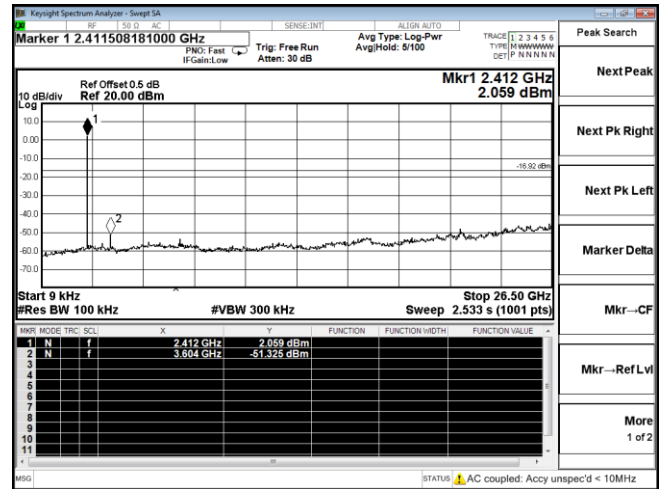


9 KHz – 26.5 GHz

**GFSK – Channel 39 / 2441 MHz**

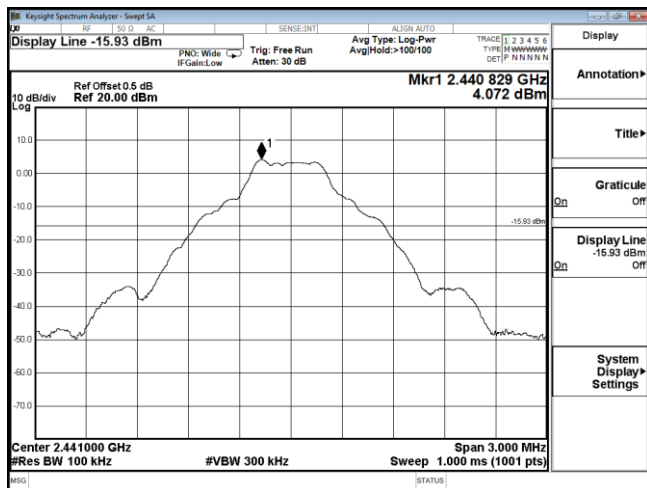


2439.5 MHz – 2442.5 MHz

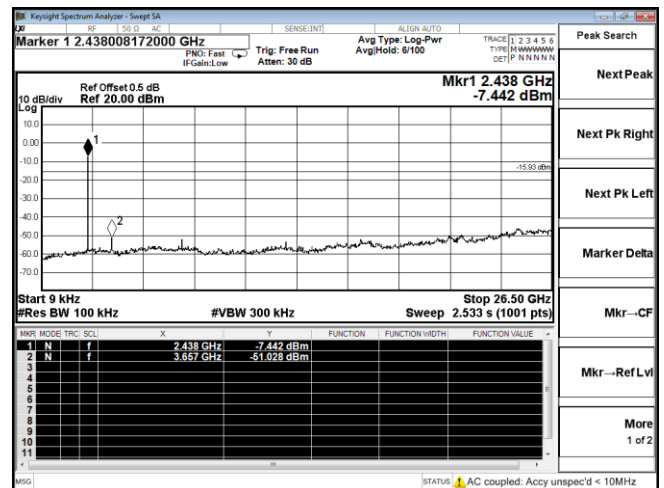


9 KHz – 26.5 GHz

**GFSK – Channel 78 / 2480 MHz**


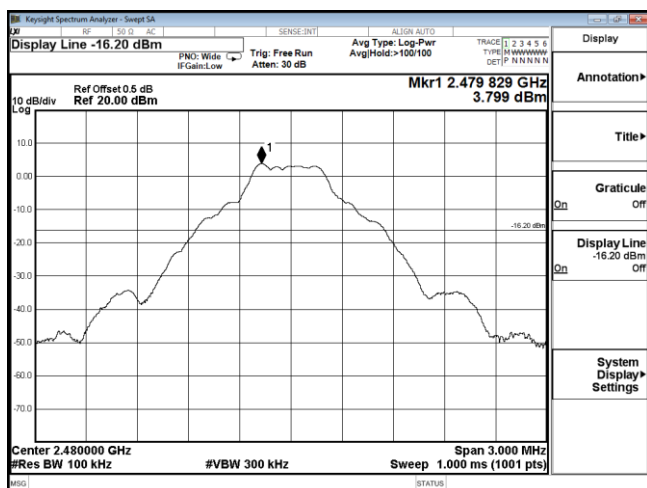


2478.5 MHz – 2482.5 MHz

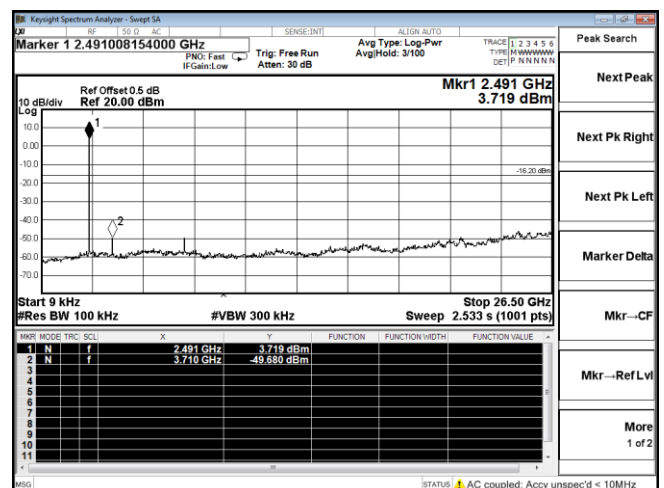

9 KHz – 26.5 GHz



**RF Conducted Spurious Emissions**  
 $\pi/4$ -DQPSK - Channel 0 / 2402 MHz

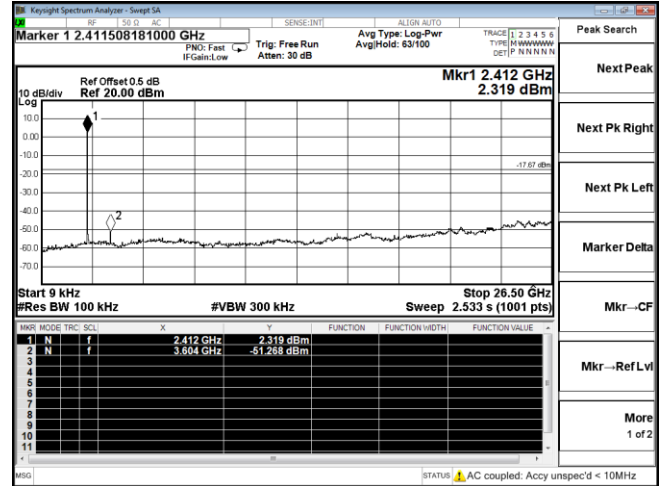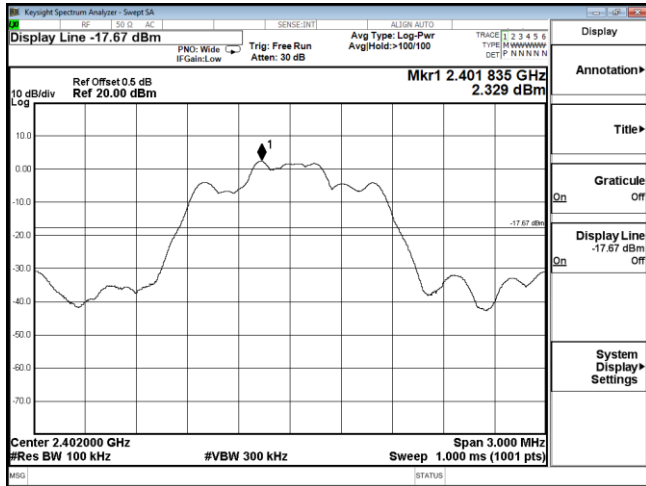

2400.5 MHz – 2403.5 MHz

9 KHz – 26.5 GHz



$\pi/4$ -DQPSK - Channel 39 / 2441 MHz

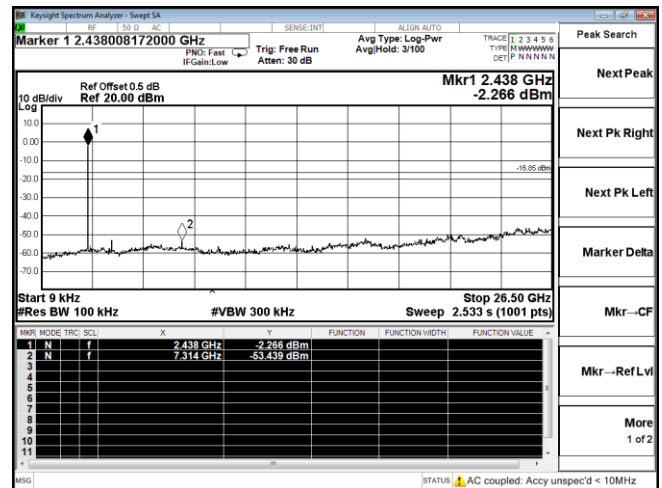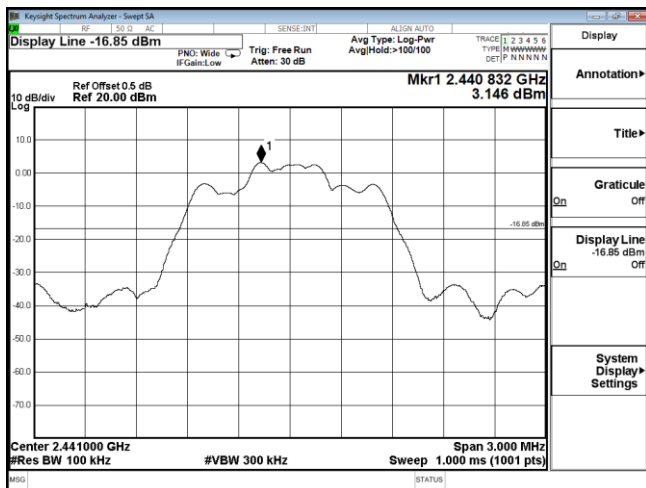

2439.5 MHz – 2442.5 MHz

9 KHz – 26.5 GHz



$\pi/4$ -DQPSK - Channel 78 / 2480 MHz

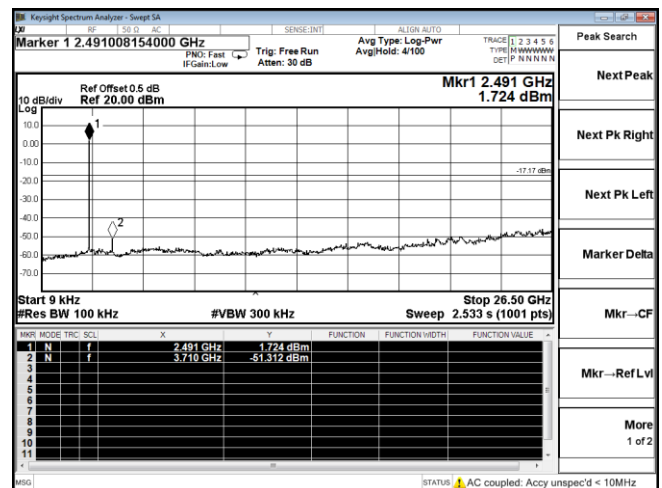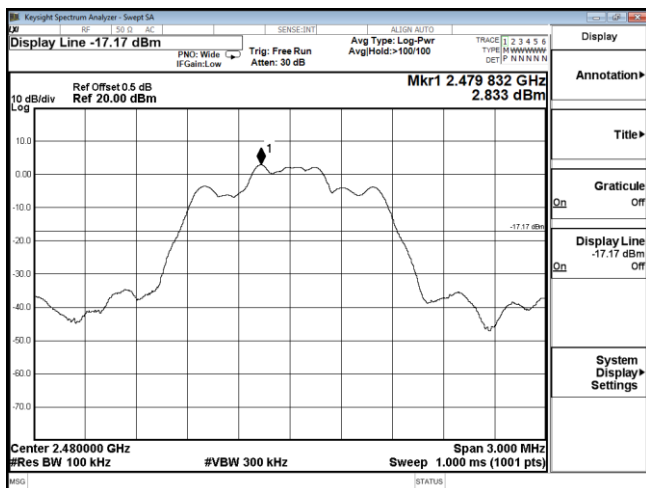

2478.5 MHz – 2482.5 MHz

9 KHz – 26.5 GHz



### RF Conducted Spurious Emissions 8-DPSK - Channel 0 / 2402 MHz

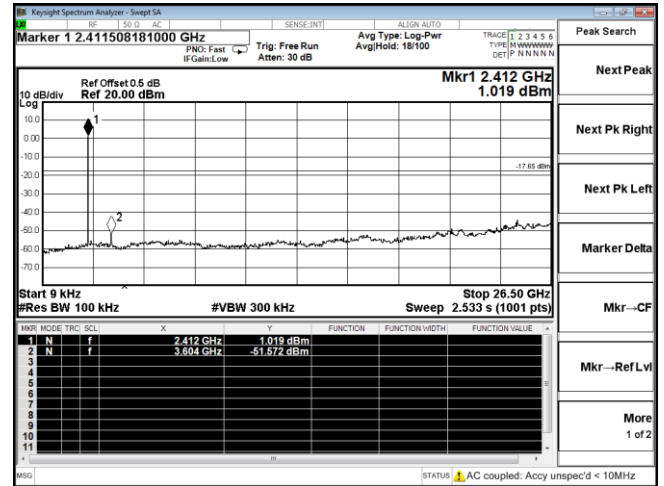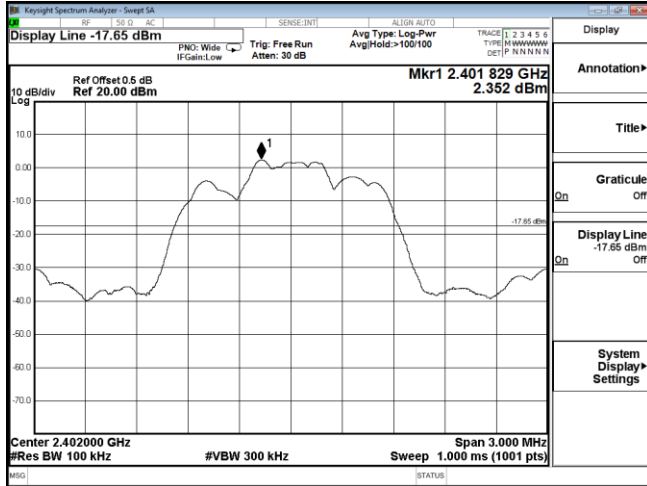

2400.5 MHz – 2404.5 MHz

9 KHz – 26.5 GHz



### 8-DPSK - Channel 39 / 2441 MHz

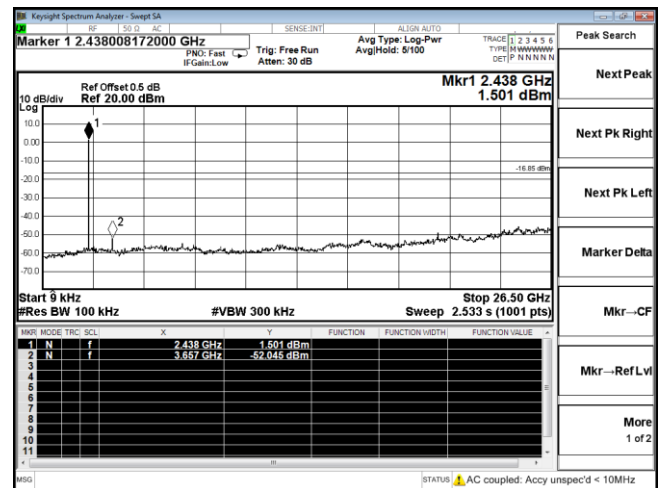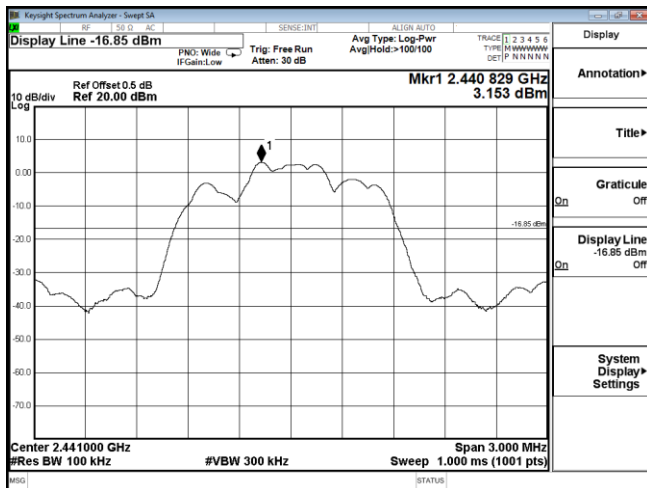

2439.5 MHz – 2442.5 MHz

9 KHz – 26.5 GHz

### 8-DPSK - Channel 78 / 2480 MHz

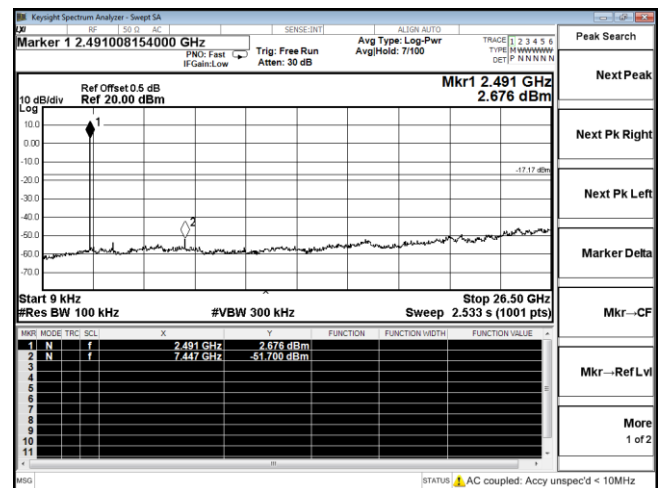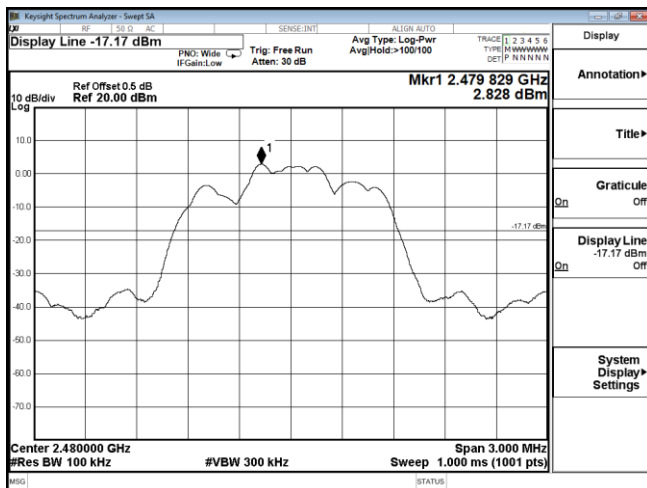

2478.5 MHz – 2483.5 MHz



9 KHz – 26.5 GHz



Band-edge for RF conducted emissions



GFSK

$\pi/4$ -DQPSK

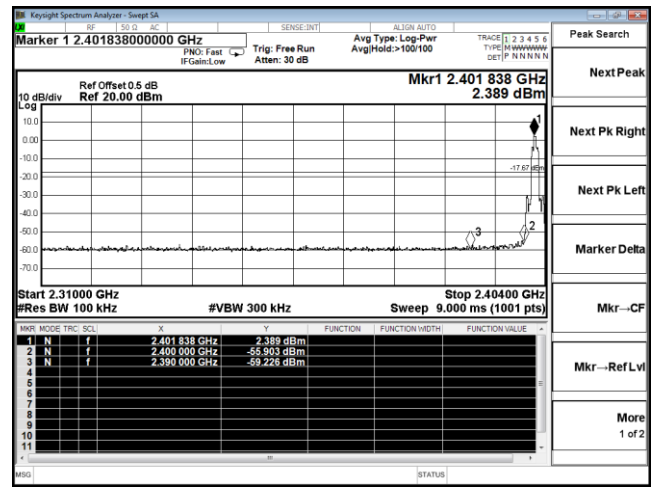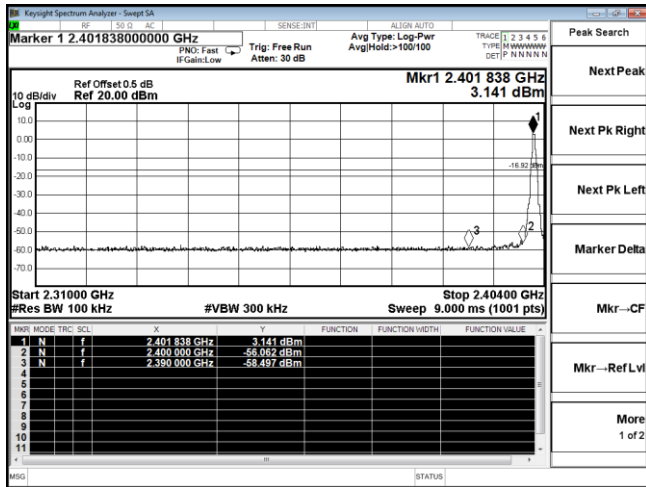



Channel 0 / 2402 MHz – Non-Hopping

Channel 0 / 2402 MHz – Non-Hopping

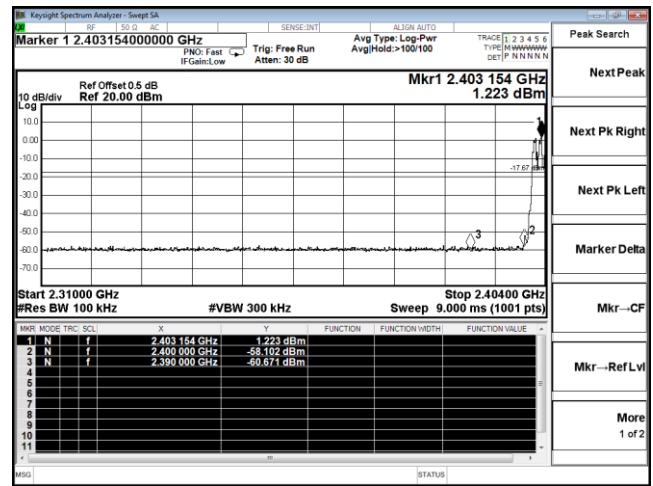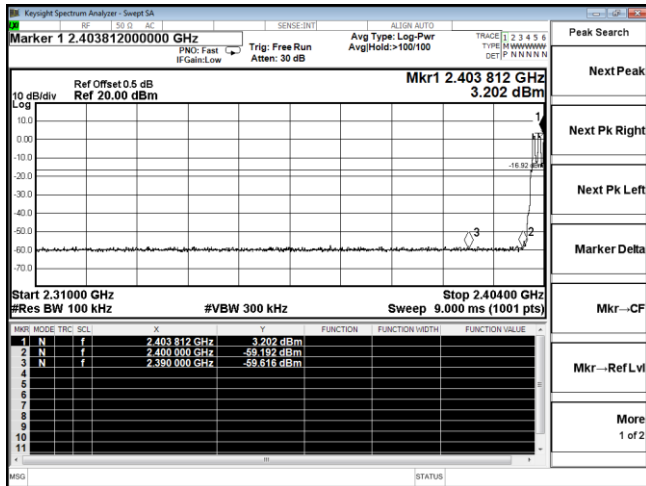

Channel 0 / 2402 MHz – Hopping

Channel 0 / 2402 MHz – Hopping

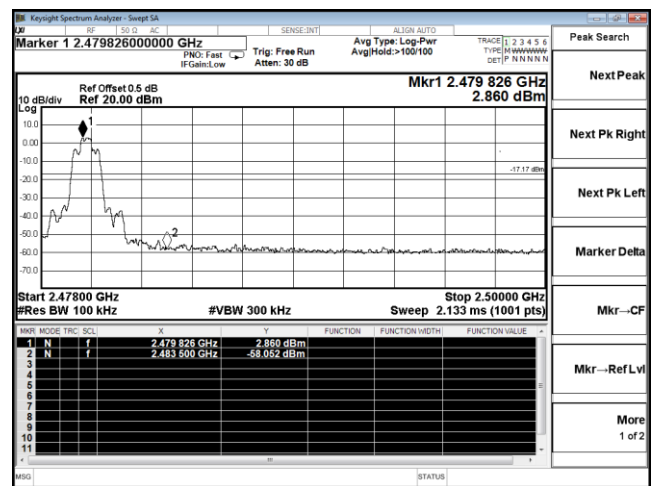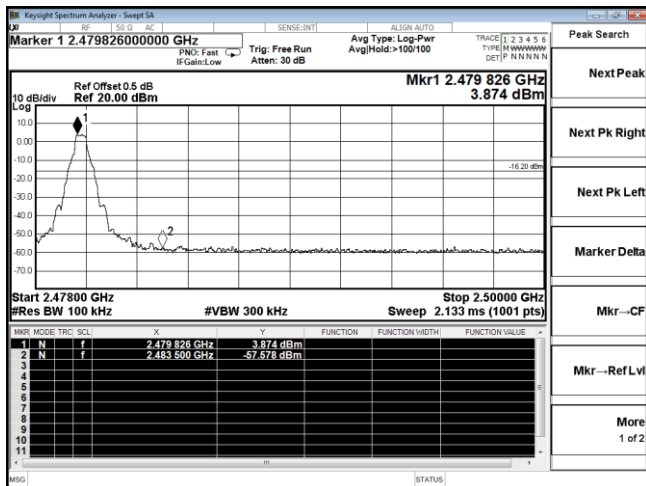

Channel 78 / 2480 MHz – Non-Hopping

Channel 78 / 2480 MHz – Non-Hopping