



FCC RF Test Report

APPLICANT : Casa Systems, Inc.
EQUIPMENT : Apex Enterprise Femto cell (E-Femto) (B4/B13/B66 with LAA)
BRAND NAME : APEX 4G LTE Femto for Enterprose (eFemto)
MODEL NAME : LTE-2004-04
FCC ID : 2AO38LTE2004-04
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Aug. 27, 2020 and testing was completed on Oct. 13, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 TEST RESULT	12
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	12
3.2 Maximum Conducted Output Power Measurement	15
3.3 Power Spectral Density Measurement	16
3.4 Unwanted Emissions Measurement.....	18
3.5 AC Conducted Emission Measurement.....	22
3.6 Automatically Discontinue Transmission	24
3.7 Antenna Requirements.....	25
4 LIST OF MEASURING EQUIPMENT	26
5 UNCERTAINTY OF EVALUATION.....	27
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR0827110B	Rev. 01	Initial issue of report	Nov. 23, 2020

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 0.26 dB at 7715.715 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 14.36 dB at 0.410 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Casa Systems, Inc.

100 Old River Road Suite 100 Andover, Massachusetts 01810 United States

1.2 Manufacturer

Casa Systems, Inc.

100 Old River Road Suite 100 Andover, Massachusetts 01810 United States

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Apex Enterprise Femto cell (E-Femto) (B4/B13/B66 with LAA)
Brand Name	APEX 4G LTE Femto for Enterprose (eFemto)
Model Name	LTE-2004-04
FCC ID	2AO38LTE2004-04
EUT supports Radios application	LTE/GPS WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80
HW Version	V01
SW Version	V01
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	5745 MHz ~ 5825 MHz
Maximum Output Power	<5745 MHz ~ 5825 MHz> 802.11a : 25.75 dBm / 0.3758 W 802.11n HT20 : 26.39 dBm / 0.4355 W 802.11n HT40 : 26.54 dBm / 0.4508 W 802.11ac VHT20: 26.27 dBm / 0.4236 W 802.11ac VHT40: 26.41 dBm / 0.4375 W 802.11ac VHT80: 26.07 dBm / 0.4046 W
99% Occupied Bandwidth	802.11a : 18.48 MHz 802.11n HT20 : 19.93 MHz 802.11n HT40 : 38.36 MHz 802.11ac VHT80 : 76.60 MHz
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Antenna Type / Gain	Dipole Antenna with gain 6.00 dBi

Remark: For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing have assessed only 802.11n HT20/ HT40 by referring to their maximum conducted power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0

AC Conducted Emission	Mode 1 : LTE Band 13 Idle + WLAN Link(5G) + Adapter + WAN Link
Remark: 1. For Radiated Test Cases, The tests were performance with Adapter	

Ch. #		Band IV : 5725-5850 MHz			
		802.11a	802.11n HT20	802.11n HT40	802.11ac VHT80
L	Low	149	149	151	-
M	Middle	157	157	-	155
H	High	165	165	159	-

2.3 Connection Diagram of Test System

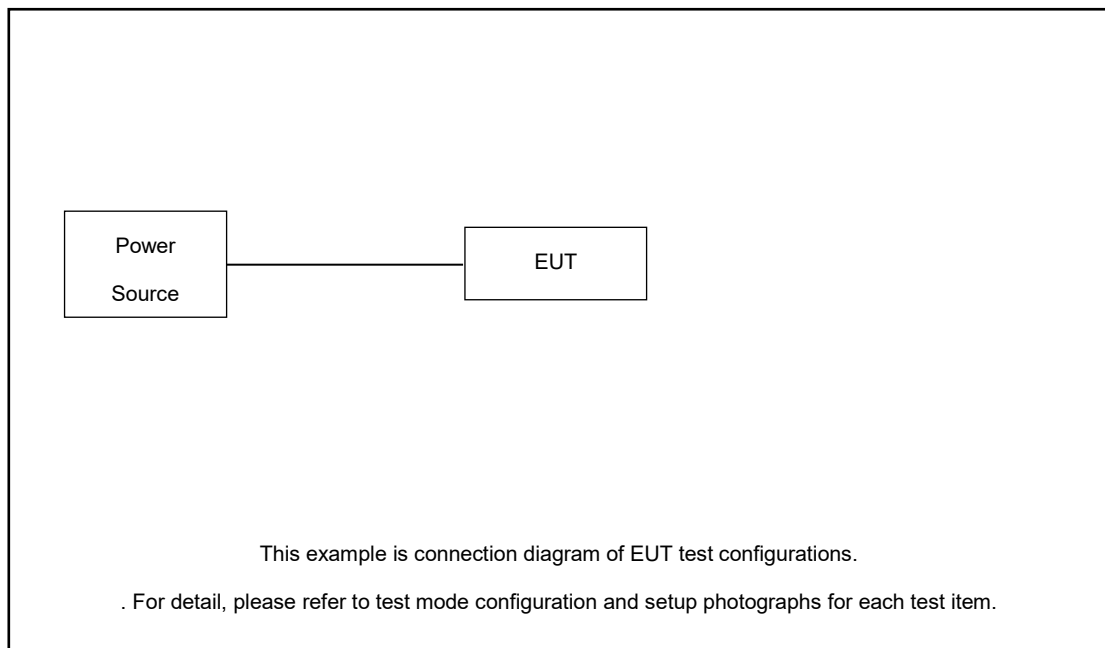

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
2.	Notebook *2	Lenovo	V130-15IKB005	N/A	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
3.	Hard DISK	WD	C6B	N/A	N/A	N/A
4.	Earphone	Lenovo	P121	N/A	N/A	Unshielded,1.2m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 7.5 dB.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 7.5 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


3.1.4 Test Setup

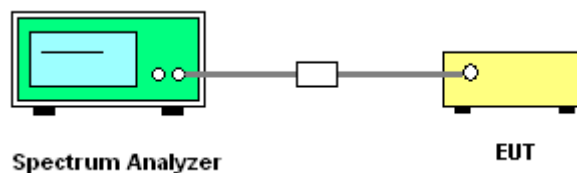

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

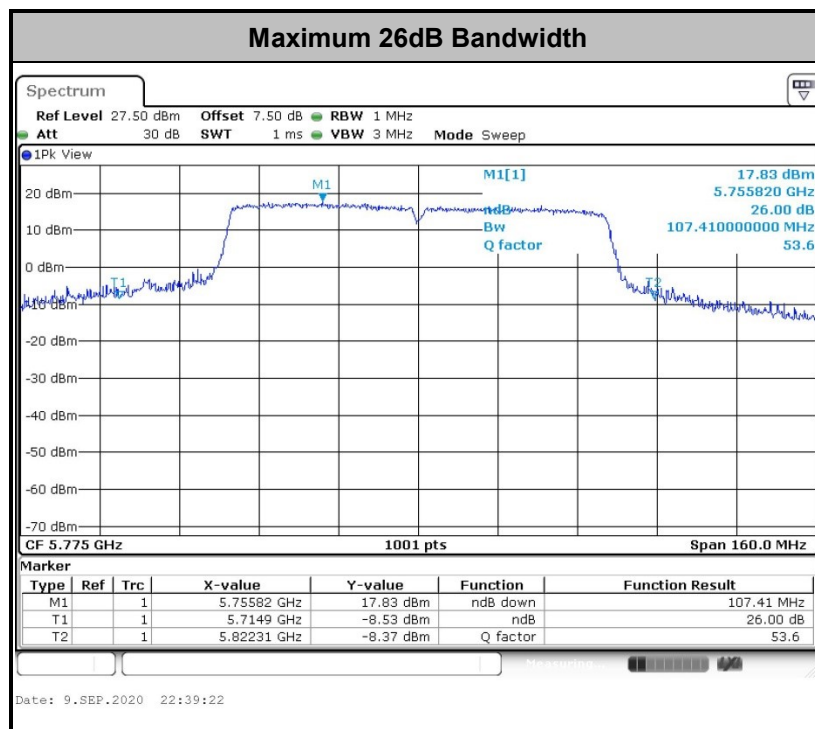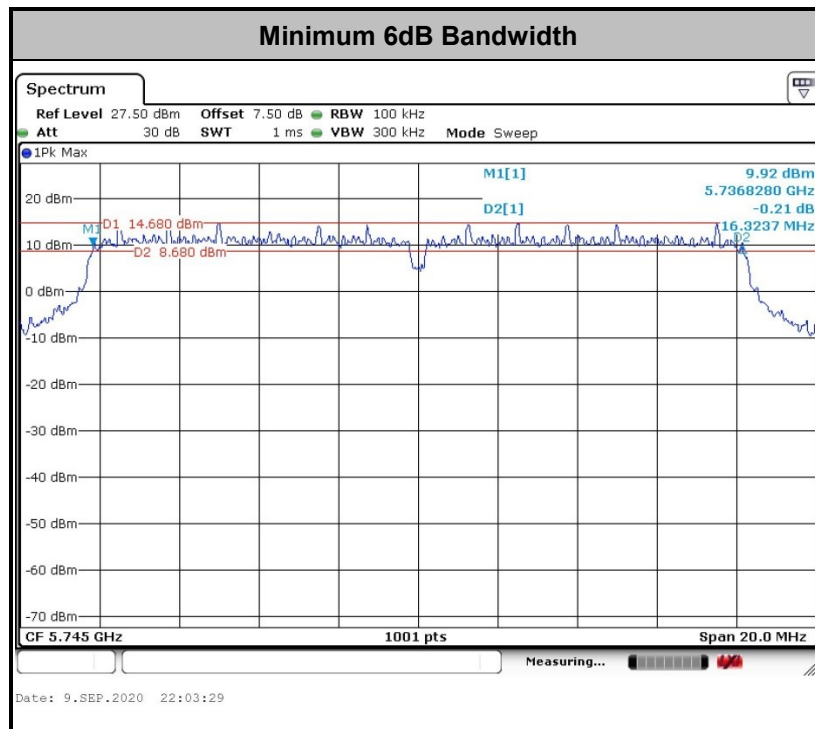

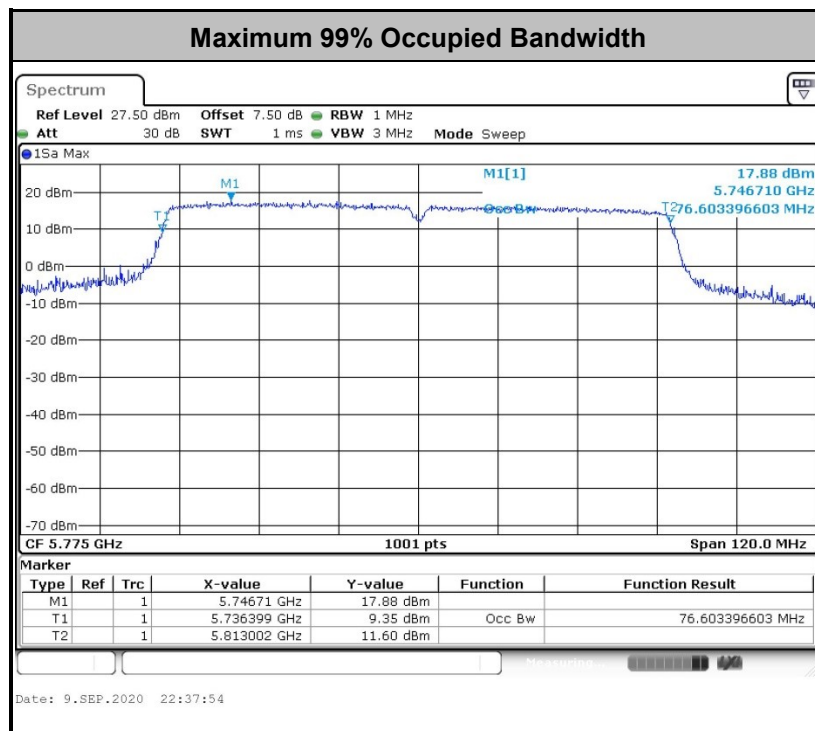

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

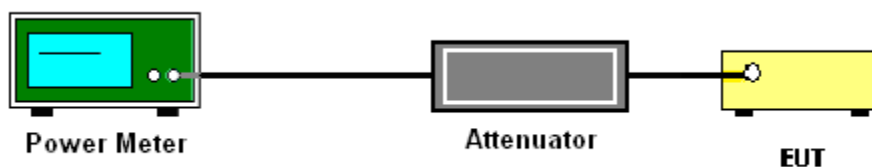

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 300 kHz.
 - Set VBW $\geq$ 1 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

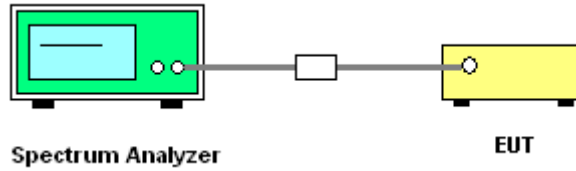

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

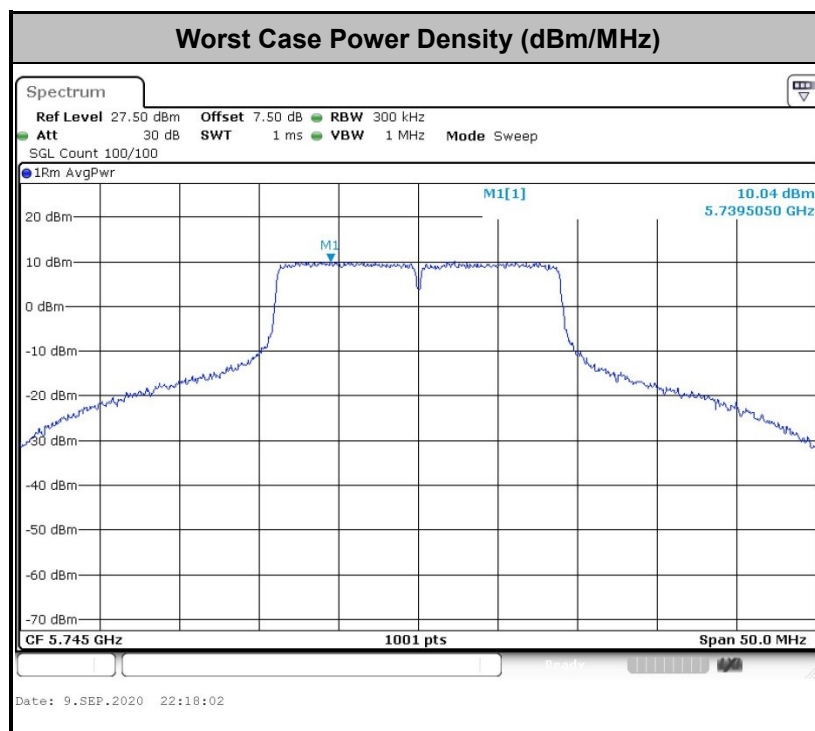

Note: Average Power Density (dB) = Measured value+ Duty Factor

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.8$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

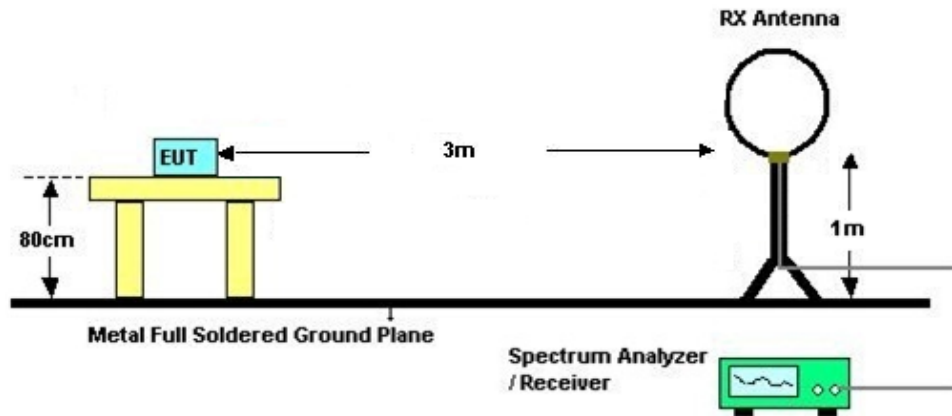

For radiated emissions from 30MHz to 1GHz

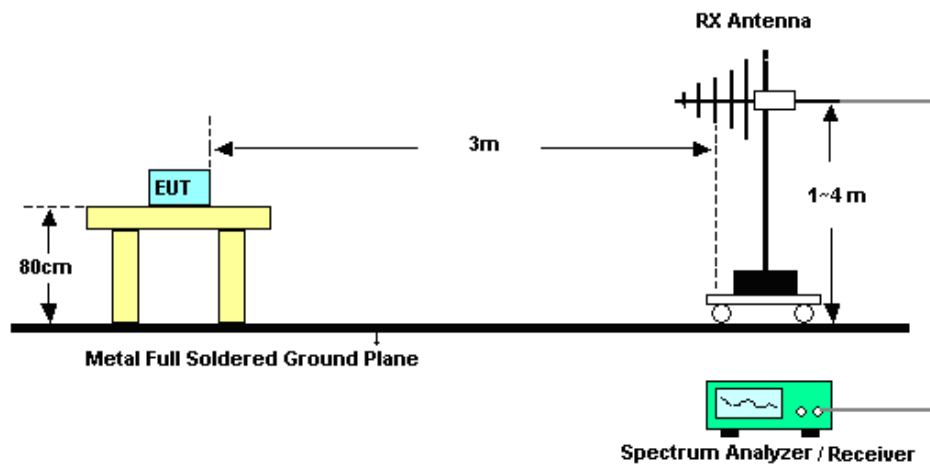

For radiated emissions above 1GHz

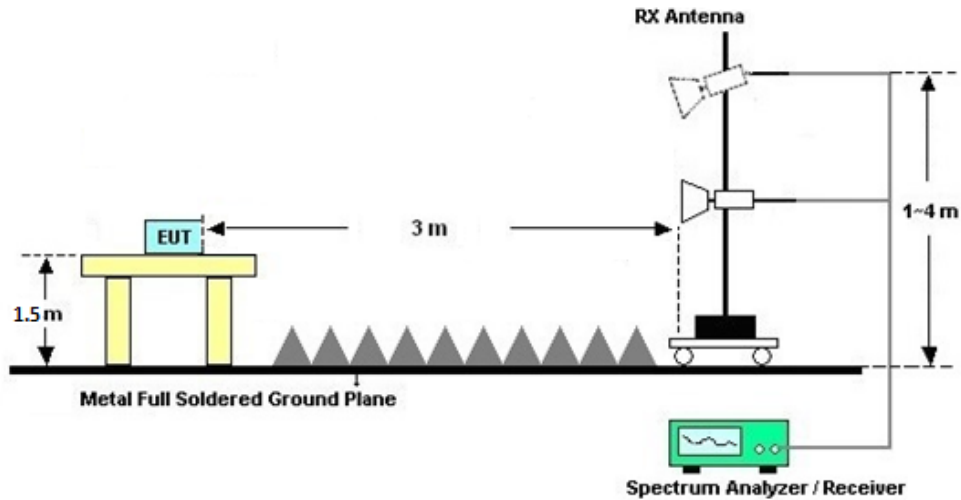

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

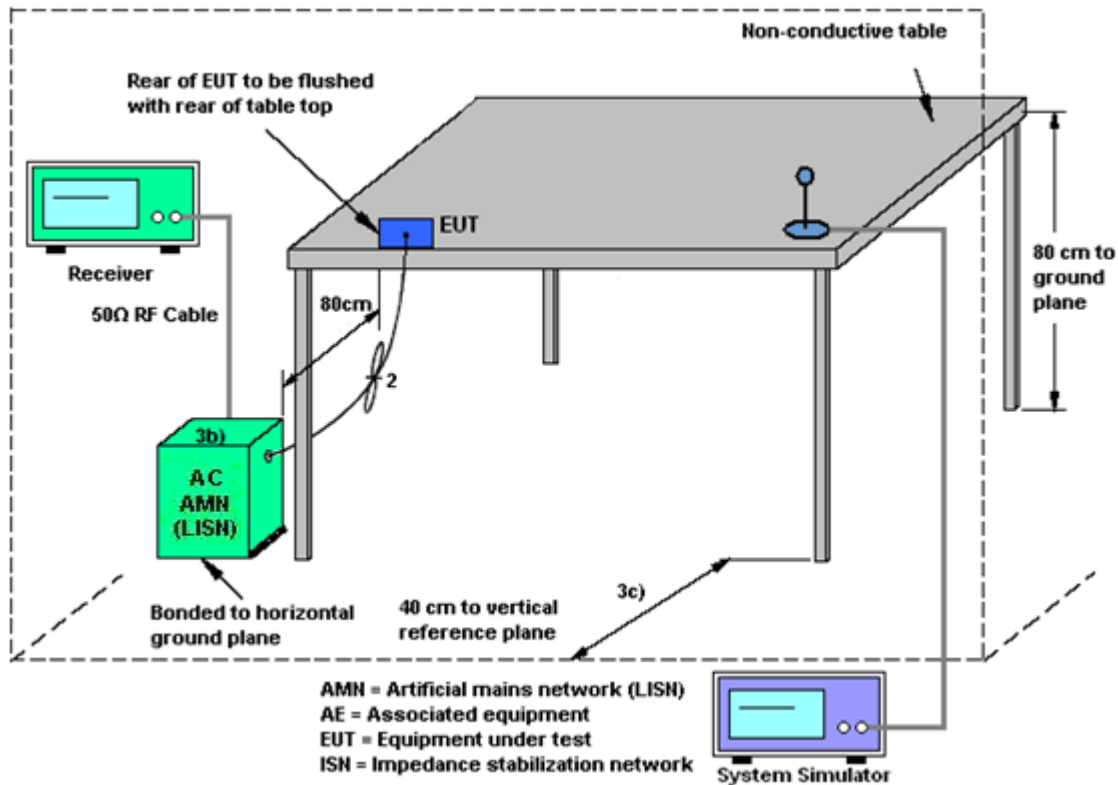

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 02, 2019	Sep. 09, 2020	Nov. 01, 2020	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 15, 2020	Sep. 09, 2020	Jan. 14, 2021	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 08, 2020	Sep. 09, 2020	Jan. 07, 2021	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz; Max 30dBm	Oct. 18, 2019	Sep. 23, 2020	Oct. 17, 2020	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz~44GHz	Apr. 14, 2020	Sep. 23, 2020	Apr. 13, 2021	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 10, 2019	Sep. 23, 2020	Nov. 09, 2020	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	May 29, 2020	Sep. 23, 2020	May 28, 2021	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 27, 2020	Sep. 23, 2020	Apr. 26, 2021	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2019	Sep. 23, 2020	Nov. 09, 2020	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9KHz ~1GHZ	Apr. 14, 2020	Sep. 23, 2020	Apr. 13, 2021	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 08, 2020	Sep. 23, 2020	Jan. 07, 2021	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2025788	1Ghz-18Ghz	Jan. 02, 2020	Sep. 23, 2020	Jan. 01, 2021	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270203	500MHz~26.5GHz	Apr. 15, 2020	Sep. 23, 2020	Apr. 14, 2021	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Sep. 23, 2020	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Sep. 23, 2020	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Sep. 23, 2020	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 14, 2020	Oct. 13, 2020	Apr. 13, 2021	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 18, 2019	Oct. 13, 2020	Oct. 17, 2020	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Oct. 28, 2019	Oct. 13, 2020	Oct. 27, 2020	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 18, 2019	Oct. 13, 2020	Oct. 17, 2020	Conduction (CO01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
---	-------



Appendix A. Conducted Test Results

Test Engineer:	Tizzy T	Temperature:	21~25	°C
Test Date:	2020/9/9	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6dB Bandwidth min. Limit (MHz)	Pass/Fail
11a	6M bps	1	149	5745	18.48	27.023	16.3237	0.5	Pass
11a	6Mbps	1	157	5785	18.23	24.625	16.3237	0.5	Pass
11a	6Mbps	1	165	5825	17.78	23.127	16.3237	0.5	Pass
HT20	MCS 0	1	149	5745	19.93	31.968	17.5824	0.5	Pass
HT20	MCS 0	1	157	5785	19.08	25.974	17.5624	0.5	Pass
HT20	MCS 0	1	165	5825	18.83	23.976	17.5624	0.5	Pass
HT40	MCS 0	1	151	5755	38.36	63.926	36.2438	0.5	Pass
HT40	MCS 0	1	159	5795	37.86	58.172	36.2837	0.5	Pass
VHT80	MCS 0	1	155	5775	76.60	107.41	75.3646	0.5	Pass

TEST RESULTS DATA
Average Power Table


Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6M bps	1	149	5745	0.00	25.75	30.00	6.00		Pass
11a	6Mbps	1	157	5785	0.00	24.21	30.00	6.00		Pass
11a	6Mbps	1	165	5825	0.00	23.29	30.00	6.00		Pass
HT20	MCS 0	1	149	5745	0.00	26.39	30.00	6.00		Pass
HT20	MCS 0	1	157	5785	0.00	24.94	30.00	6.00		Pass
HT20	MCS 0	1	165	5825	0.00	23.73	30.00	6.00		Pass
HT40	MCS 0	1	151	5755	0.04	26.54	30.00	6.00		Pass
HT40	MCS 0	1	159	5795	0.04	26.09	30.00	6.00		Pass
VHT20	MCS 0	1	149	5745	0.00	26.27	30.00	6.00		Pass
VHT20	MCS 0	1	157	5785	0.00	24.84	30.00	6.00		Pass
VHT20	MCS 0	1	165	5825	0.00	23.71	30.00	6.00		Pass
VHT40	MCS 0	1	151	5755	0.03	26.41	30.00	6.00		Pass
VHT40	MCS 0	1	159	5795	0.03	25.98	30.00	6.00		Pass
VHT80	MCS 0	1	155	5775	0.09	26.07	30.00	6.00		Pass

TEST RESULTS DATA
Power Spectral Density

Band IV										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	5745	0.00	2.22	11.87	30.00	6.00	Pass
11a	6Mbps	1	157	5785	0.00	2.22	10.17	30.00	6.00	Pass
11a	6Mbps	1	165	5825	0.00	2.22	9.11	30.00	6.00	Pass
HT20	MCS 0	1	149	5745	0.00	2.22	12.26	30.00	6.00	Pass
HT20	MCS 0	1	157	5785	0.00	2.22	10.69	30.00	6.00	Pass
HT20	MCS 0	1	165	5825	0.00	2.22	9.16	30.00	6.00	Pass
HT40	MCS 0	1	151	5755	0.04	2.22	9.68	30.00	6.00	Pass
HT40	MCS 0	1	159	5795	0.04	2.22	8.89	30.00	6.00	Pass
VHT80	MCS 0	1	155	5775	0.09	2.22	6.00	30.00	6.00	Pass




Appendix B. AC Conducted Emission Test Results

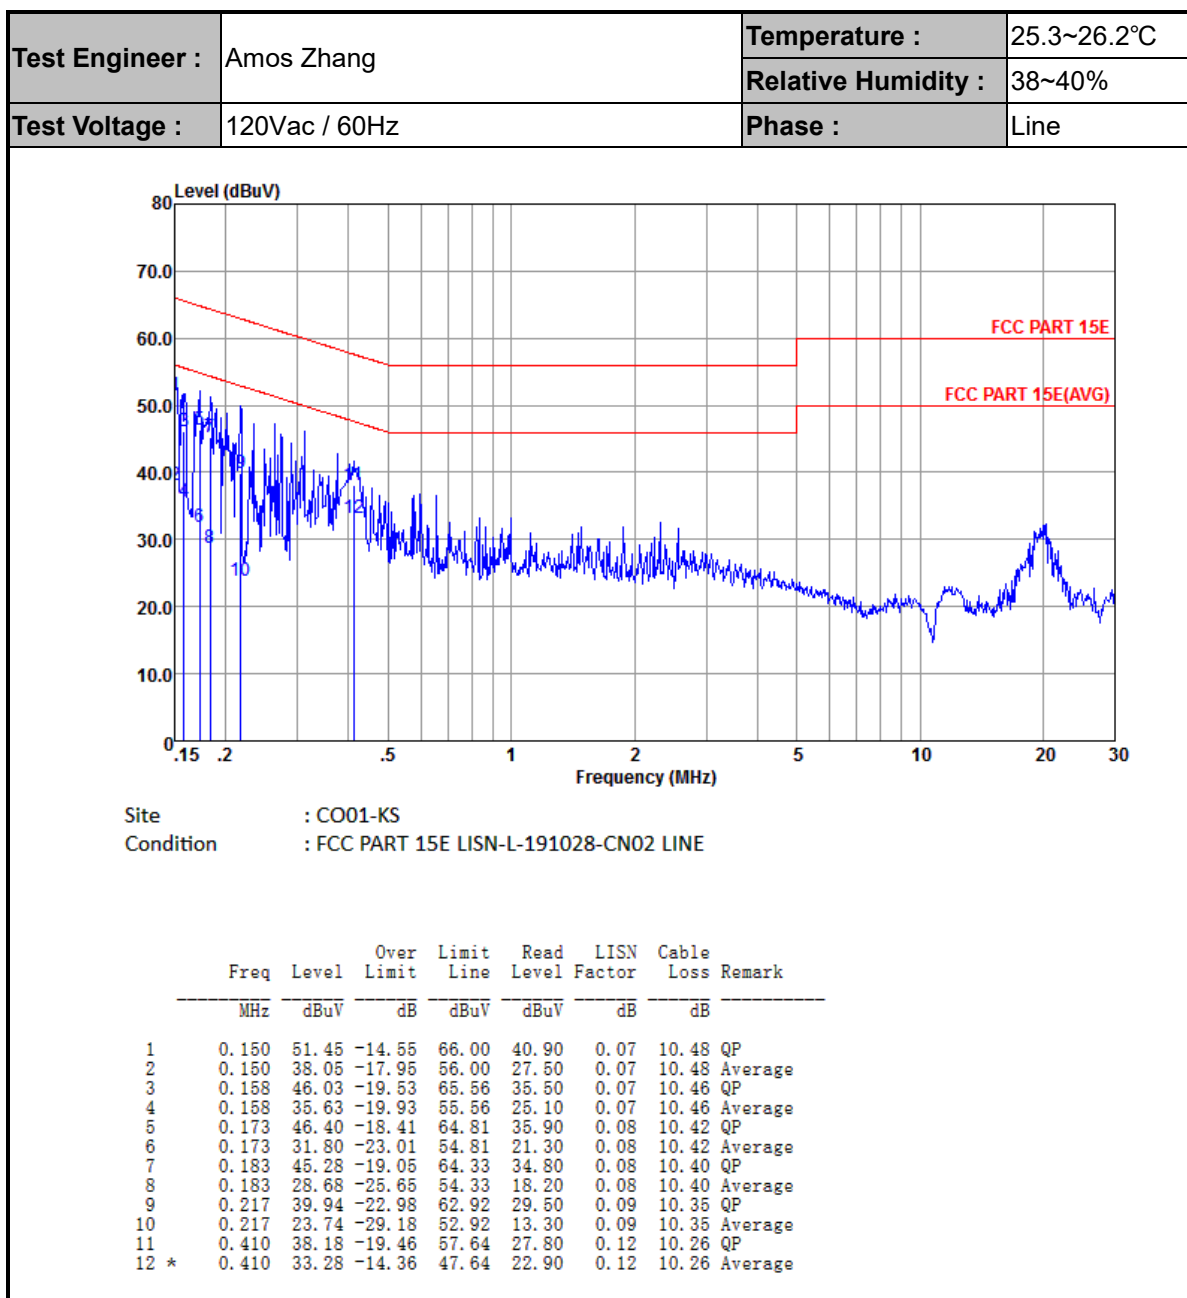



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

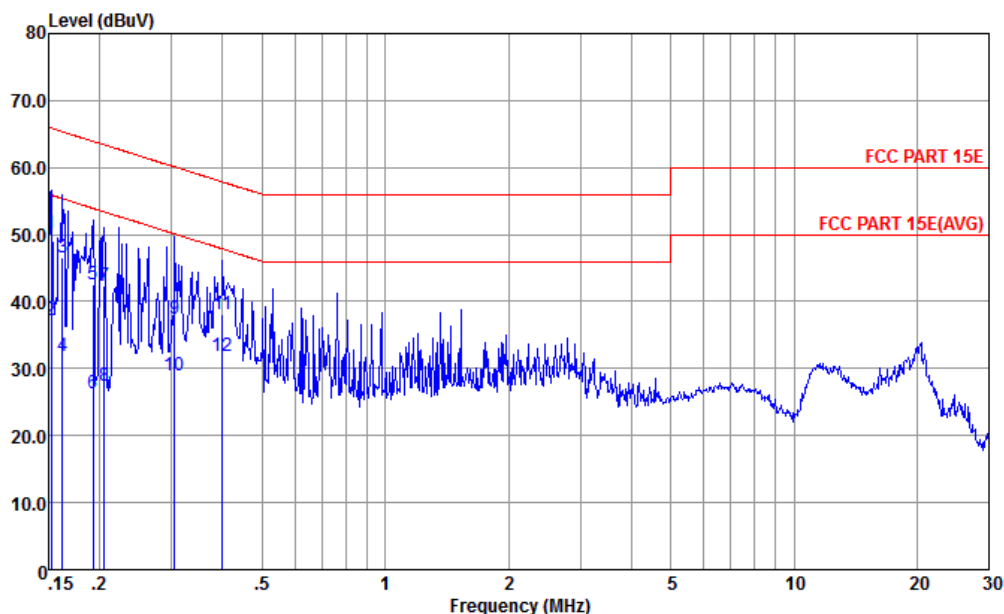

Site : CO01-KS
Condition : FCC PART 15E LISN-N-191028-CN02 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1 *	0.152	50.22	-15.65	65.87	39.60	0.15	10.47	QP
2	0.152	37.22	-18.65	55.87	26.60	0.15	10.47	Average
3	0.162	46.50	-18.84	65.34	35.90	0.15	10.45	QP
4	0.162	31.90	-23.44	55.34	21.30	0.15	10.45	Average
5	0.192	42.64	-21.29	63.93	32.09	0.17	10.38	QP
6	0.192	26.34	-27.59	53.93	15.79	0.17	10.38	Average
7	0.205	42.43	-20.97	63.40	31.90	0.17	10.36	QP
8	0.205	27.33	-26.07	53.40	16.80	0.17	10.36	Average
9	0.305	37.40	-22.70	60.10	26.89	0.20	10.31	QP
10	0.305	29.00	-21.10	50.10	18.49	0.20	10.31	Average
11	0.400	38.08	-19.78	57.86	27.60	0.21	10.27	QP
12	0.400	31.78	-16.08	47.86	21.30	0.21	10.27	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5610.8	59.16	-9.14	68.3	45.16	35.77	11.57	33.34	308	250	P	H
		5699.6	73.4	-31.61	105.01	59.3	35.82	11.65	33.37	308	250	P	H
		5720	83.89	-27.01	110.9	69.75	35.84	11.68	33.38	308	250	P	H
		5724.8	94.91	-26.93	121.84	80.77	35.84	11.68	33.38	308	250	P	H
		5740	118.49	-	-	104.33	35.85	11.69	33.38	308	250	P	H
		5740	111.21	-	-	97.05	35.85	11.69	33.38	308	250	A	H
		5648.4	57.48	-10.82	68.3	43.44	35.8	11.6	33.36	297	346	P	V
		5700	68.8	-36.5	105.3	54.7	35.82	11.65	33.37	297	346	P	V
		5720	79.65	-31.25	110.9	65.51	35.84	11.68	33.38	297	346	P	V
		5724.4	93.13	-27.8	120.93	78.99	35.84	11.68	33.38	297	346	P	V
		5752	117.01	-	-	102.84	35.85	11.71	33.39	297	346	P	V
		5752	109.32	-	-	95.15	35.85	11.71	33.39	297	346	A	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 165 5825MHz		5850.8	81.01	-39.47	120.48	66.73	35.89	11.81	33.42	316	250	P	H
		5855.2	78.41	-32.43	110.84	64.09	35.9	11.84	33.42	316	250	P	H
		5875.6	70.11	-34.74	104.85	55.76	35.92	11.86	33.43	316	250	P	H
		5959.6	59.31	-8.99	68.3	44.76	36.02	11.99	33.46	316	250	P	H
		5824	119.63	-	-	105.37	35.88	11.79	33.41	316	250	P	H
		5824	112.01	-	-	97.75	35.88	11.79	33.41	316	250	A	H
		5850	83.69	-38.61	122.3	69.41	35.89	11.81	33.42	344	344	P	V
		5858	76.48	-33.58	110.06	62.16	35.9	11.84	33.42	344	344	P	V
		5876.4	65.98	-38.28	104.26	51.63	35.92	11.86	33.43	344	344	P	V
		5941.2	57.56	-10.74	68.3	43.04	36	11.97	33.45	344	344	P	V
		5830	117.1	-	-	102.85	35.88	11.79	33.42	344	344	P	V
		5830	109.91	-	-	95.66	35.88	11.79	33.42	344	344	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamplifier Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		7660.66	48.62	-25.38	74	60.18	36.9	13.6	62.06	300	0	P	H
		11490	56.9	-17.1	74	61.78	40.19	16.87	61.94	353	237	P	H
		11490	47.46	-6.54	54	52.34	40.19	16.87	61.94	353	237	A	H
		7660.66	55.3	-18.7	74	66.86	36.9	13.6	62.06	341	305	P	V
		7660.66	52.2	-1.8	54	63.76	36.9	13.6	62.06	341	305	A	V
		11490	62.43	-11.57	74	67.31	40.19	16.87	61.94	313	317	P	V
		11490	52.43	-1.57	54	57.31	40.19	16.87	61.94	313	317	A	V
802.11a CH 157 5785MHz		7715.715	48.06	-25.94	74	59.53	36.9	13.64	62.01	300	0	P	H
		11570	55.35	-18.65	74	60.1	40.27	16.94	61.96	358	296	P	H
		11570	44.81	-9.19	54	49.56	40.27	16.94	61.96	358	296	A	H
		7715.715	55.72	-18.28	74	67.19	36.9	13.64	62.01	300	299	P	V
		7715.715	53.74	-0.26	54	65.21	36.9	13.64	62.01	300	299	A	V
		11570	62.3	-11.7	74	67.05	40.27	16.94	61.96	334	315	P	V
		11570	52.47	-1.53	54	57.22	40.27	16.94	61.96	334	315	A	V
802.11a CH 165 5825MHz		7765.765	46.28	-22.02	68.3	57.79	36.9	13.67	62.08	300	0	P	H
		11650	53.81	-20.19	74	58.44	40.34	17.01	61.98	347	290	P	H
		11650	44.6	-9.4	54	49.23	40.34	17.01	61.98	347	290	A	H
		7765.765	48.95	-19.35	68.3	60.46	36.9	13.67	62.08	100	360	P	V
		11650	62.27	-11.73	74	66.9	40.34	17.01	61.98	313	315	P	V
		11650	53.36	-0.64	54	57.99	40.34	17.01	61.98	313	315	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		5621.2	59.77	-8.53	68.3	45.75	35.78	11.59	33.35	255	250	P	H
		5698.8	72.85	-31.57	104.42	58.75	35.82	11.65	33.37	255	250	P	H
		5719.6	86.92	-23.87	110.79	72.78	35.84	11.68	33.38	255	250	P	H
		5723.6	94.62	-24.49	119.11	80.48	35.84	11.68	33.38	255	250	P	H
		5740	119.19	-	-	105.03	35.85	11.69	33.38	255	250	P	H
		5740	111.36	-	-	97.2	35.85	11.69	33.38	255	250	A	H
		5646.4	57.32	-10.98	68.3	43.28	35.8	11.6	33.36	297	348	P	V
		5696.8	68.91	-34.03	102.94	54.81	35.82	11.65	33.37	297	348	P	V
		5720	82.23	-28.67	110.9	68.09	35.84	11.68	33.38	297	348	P	V
		5722.8	93.21	-24.07	117.28	79.07	35.84	11.68	33.38	297	348	P	V
		5740	116.69	-	-	102.53	35.85	11.69	33.38	297	348	P	V
		5740	109.07	-	-	94.91	35.85	11.69	33.38	297	348	A	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 165 5825MHz		5850	83.91	-38.39	122.3	69.63	35.89	11.81	33.42	300	251	P	H
		5856	77.59	-33.03	110.62	63.27	35.9	11.84	33.42	300	251	P	H
		5879.2	69.01	-33.17	102.18	54.66	35.92	11.86	33.43	300	251	P	H
		5927.2	60.15	-8.15	68.3	45.68	35.98	11.94	33.45	300	251	P	H
		5818	119.61	-	-	105.38	35.88	11.76	33.41	300	251	P	H
		5818	111.51	-	-	97.28	35.88	11.76	33.41	300	251	A	H
		5850	83.29	-39.01	122.3	69.01	35.89	11.81	33.42	309	343	P	V
		5855.2	75.57	-35.27	110.84	61.25	35.9	11.84	33.42	309	343	P	V
		5875.6	65.3	-39.55	104.85	50.95	35.92	11.86	33.43	309	343	P	V
		5948.4	57.22	-11.08	68.3	42.7	36	11.97	33.45	309	343	P	V
		5818	117.04	-	-	102.81	35.88	11.76	33.41	309	343	P	V
		5818	109.34	-	-	95.11	35.88	11.76	33.41	309	343	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamplifier Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 149 5745MHz		7660.66	47.88	-26.12	74	59.44	36.9	13.6	62.06	300	0	P	H
		11490	58.24	-15.76	74	63.12	40.19	16.87	61.94	363	317	P	H
		11490	48.35	-5.65	54	53.23	40.19	16.87	61.94	363	317	A	H
		7660.66	54.08	-19.92	74	65.64	36.9	13.6	62.06	364	304	P	V
		7660.66	51.18	-2.82	54	62.74	36.9	13.6	62.06	364	304	A	V
		11490	62.47	-11.53	74	67.35	40.19	16.87	61.94	312	317	P	V
		11490	53.43	-0.57	54	58.31	40.19	16.87	61.94	312	317	A	V
802.11n HT20 CH 157 5785MHz		7715.715	52.96	-21.04	74	64.43	36.9	13.64	62.01	241	299	P	H
		7715.715	49.52	-4.48	54	60.99	36.9	13.64	62.01	241	299	A	H
		11570	56.21	-17.79	74	60.96	40.27	16.94	61.96	315	317	P	H
		11570	45.66	-8.34	54	50.41	40.27	16.94	61.96	315	317	A	H
		7715.715	55.82	-18.18	74	67.29	36.9	13.64	62.01	255	298	P	V
		7715.715	53.21	-0.79	54	64.68	36.9	13.64	62.01	255	298	A	V
		11570	64.1	-9.9	74	68.85	40.27	16.94	61.96	318	315	P	V
		11570	53.51	-0.49	54	58.26	40.27	16.94	61.96	318	315	A	V
802.11n HT20 CH 165 5825MHz		7765.765	48.75	-19.55	68.3	60.26	36.9	13.67	62.08	300	0	P	H
		11650	59.76	-14.24	74	64.39	40.34	17.01	61.98	365	219	P	H
		11650	48.29	-5.71	54	52.92	40.34	17.01	61.98	365	219	A	H
		7765.765	52.45	-15.85	68.3	63.96	36.9	13.67	62.08	100	360	P	V
		11650	63.72	-10.28	74	68.35	40.34	17.01	61.98	327	315	P	V
		11650	53.19	-0.81	54	57.82	40.34	17.01	61.98	327	315	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 151 5755MHz		5647.2	64.38	-3.92	68.3	50.34	35.8	11.6	33.36	310	250	P	H
		5696.8	73.87	-29.07	102.94	59.77	35.82	11.65	33.37	310	250	P	H
		5719.8	93.91	-16.93	110.84	79.77	35.84	11.68	33.38	310	250	P	H
		5720.4	96.63	-15.18	111.81	82.49	35.84	11.68	33.38	310	250	P	H
		5851.2	70.78	-48.78	119.56	56.5	35.89	11.81	33.42	310	250	P	H
		5856	69.2	-41.42	110.62	54.88	35.9	11.84	33.42	310	250	P	H
		5877.6	62.91	-40.46	103.37	48.56	35.92	11.86	33.43	310	250	P	H
		5926.4	58.37	-9.93	68.3	43.9	35.98	11.94	33.45	310	250	P	H
		5740	115.74	-	-	101.58	35.85	11.69	33.38	310	250	P	H
		5740	107.42	-	-	93.26	35.85	11.69	33.38	310	250	A	H
		5648.8	63.65	-4.65	68.3	49.61	35.8	11.6	33.36	341	217	P	V
		5689.2	72.95	-24.39	97.34	58.85	35.82	11.65	33.37	341	217	P	V
		5717.6	92.49	-17.74	110.23	78.35	35.84	11.68	33.38	341	217	P	V
		5724.4	94.82	-26.11	120.93	80.68	35.84	11.68	33.38	341	217	P	V
		5851.2	65.66	-53.9	119.56	51.38	35.89	11.81	33.42	341	217	P	V
		5855.2	65.23	-45.61	110.84	50.91	35.9	11.84	33.42	341	217	P	V
		5882.4	60.76	-39.04	99.8	46.42	35.92	11.86	33.44	341	217	P	V
		5935.6	55.47	-12.83	68.3	41	35.98	11.94	33.45	341	217	P	V
		5746	113.43	-	-	99.28	35.85	11.69	33.39	341	217	P	V
		5746	106.03	-	-	91.88	35.85	11.69	33.39	341	217	A	V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 159 5795MHz		5619.6	59.29	-9.01	68.3	45.27	35.78	11.59	33.35	302	249	P	H
		5697.2	68.33	-34.91	103.24	54.23	35.82	11.65	33.37	302	249	P	H
		5700.8	73.75	-31.77	105.52	59.63	35.83	11.66	33.37	302	249	P	H
		5724.4	71.24	-49.69	120.93	57.1	35.84	11.68	33.38	302	249	P	H
		5851.2	77.28	-42.28	119.56	63	35.89	11.81	33.42	302	249	P	H
		5856.8	75.62	-34.78	110.4	61.3	35.9	11.84	33.42	302	249	P	H
		5885.2	70.91	-26.82	97.73	56.57	35.92	11.86	33.44	302	249	P	H
		5929.2	62.19	-6.11	68.3	47.72	35.98	11.94	33.45	302	249	P	H
		5806	116.64	-	-	102.41	35.88	11.76	33.41	302	249	P	H
		5806	108.59	-	-	94.36	35.88	11.76	33.41	302	249	A	H
		5648	56.62	-11.68	68.3	42.58	35.8	11.6	33.36	328	344	P	V
		5698	69.52	-34.31	103.83	55.42	35.82	11.65	33.37	328	344	P	V
		5718.8	71.13	-39.43	110.56	56.99	35.84	11.68	33.38	328	344	P	V
		5724	70.66	-49.36	120.02	56.52	35.84	11.68	33.38	328	344	P	V
		5850.4	74.21	-47.18	121.39	59.93	35.89	11.81	33.42	328	344	P	V
		5855.2	73.54	-37.3	110.84	59.22	35.9	11.84	33.42	328	344	P	V
		5878.4	70.11	-32.66	102.77	55.76	35.92	11.86	33.43	328	344	P	V
		5927.6	59.39	-8.91	68.3	44.92	35.98	11.94	33.45	328	344	P	V
		5788	114.67	-	-	100.46	35.87	11.74	33.4	328	344	P	V
		5788	106.93	-	-	92.72	35.87	11.74	33.4	328	344	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamplifier Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n		11510	57.36	-16.64	74	62.22	40.2	16.88	61.94	356	316	P	H
HT40		11510	47.51	-6.49	54	52.37	40.2	16.88	61.94	356	316	A	H
CH 151		11510	61.49	-12.51	74	66.35	40.2	16.88	61.94	305	316	P	V
5755MHz		11510	53.07	-0.93	54	57.93	40.2	16.88	61.94	305	316	A	V
802.11n		11590	49.43	-24.57	74	54.15	40.29	16.96	61.97	100	360	P	H
HT40		11590	63.84	-10.16	74	68.56	40.29	16.96	61.97	315	316	P	V
CH 159		11590	53.3	-0.7	54	58.02	40.29	16.96	61.97	315	316	A	V
5795MHz		11590	53.3	-0.7	54	58.02	40.29	16.96	61.97	315	316	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		5642.4	66.89	-1.41	68.3	52.85	35.8	11.6	33.36	300	249	P	H
		5699.2	75.35	-29.36	104.71	61.25	35.82	11.65	33.37	300	249	P	H
		5718	77.07	-33.27	110.34	62.93	35.84	11.68	33.38	300	249	P	H
		5724.4	80.91	-40.02	120.93	66.77	35.84	11.68	33.38	300	249	P	H
		5850	72.74	-49.56	122.3	58.46	35.89	11.81	33.42	300	249	P	H
		5857.6	72.77	-37.4	110.17	58.45	35.9	11.84	33.42	300	249	P	H
		5876.4	68.28	-35.98	104.26	53.93	35.92	11.86	33.43	300	249	P	H
		5932	59.69	-8.61	68.3	45.22	35.98	11.94	33.45	300	249	P	H
		5788	110.21	-	-	96	35.87	11.74	33.4	300	249	P	H
		5788	102.09	-	-	87.88	35.87	11.74	33.4	300	249	A	H
		5640.4	62.92	-5.38	68.3	48.88	35.8	11.6	33.36	298	348	P	V
		5695.6	71.46	-30.6	102.06	57.36	35.82	11.65	33.37	298	348	P	V
		5715.6	78.16	-31.51	109.67	64.05	35.83	11.66	33.38	298	348	P	V
		5720.8	78.37	-34.35	112.72	64.23	35.84	11.68	33.38	298	348	P	V
		5854.8	69	-42.36	111.36	54.68	35.9	11.84	33.42	298	348	P	V
		5856.8	70.58	-39.82	110.4	56.26	35.9	11.84	33.42	298	348	P	V
		5876	63.97	-40.59	104.56	49.62	35.92	11.86	33.43	298	348	P	V
		5927.2	56.14	-12.16	68.3	41.67	35.98	11.94	33.45	298	348	P	V
		5752	107.48	-	-	93.31	35.85	11.71	33.39	298	348	P	V
		5752	100.38	-	-	86.21	35.85	11.71	33.39	298	348	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 155 5775MHz		7700.7	48.28	-25.72	74	59.75	36.9	13.62	61.99	300	0	P	H
		11550	51.36	-22.64	74	56.14	40.25	16.93	61.96	379	264	P	H
		11550	42.09	-11.91	54	46.87	40.25	16.93	61.96	379	264	A	H
		7700.7	53.69	-20.31	74	65.16	36.9	13.62	61.99	327	305	P	V
		7700.7	50.98	-3.02	54	62.45	36.9	13.62	61.99	327	305	A	V
		11550	60.32	-13.68	74	65.1	40.25	16.93	61.96	316	315	P	V
		11550	48.8	-5.2	54	53.58	40.25	16.93	61.96	316	315	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

WIFI 802.11a (LF @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a LF		30.97	19	-21	40	25.58	24.57	1.05	32.2	-	-	P	H
		109.54	22.51	-20.99	43.5	35.83	17	1.86	32.18	-	-	P	H
		207.51	29.3	-14.2	43.5	43.71	15.18	2.52	32.11	100	0	P	H
		268.62	27.91	-18.09	46	37.33	19.8	2.94	32.16	-	-	P	H
		290.93	29.3	-16.7	46	39.19	19.22	3.01	32.12	-	-	P	H
		478.14	25.94	-20.06	46	30.81	23.6	3.84	32.31	-	-	P	H
		31.94	31.07	-8.93	40	38.17	24.04	1.06	32.2	100	0	P	V
		54.25	29.96	-10.04	40	47.43	13.4	1.33	32.2	-	-	P	V
		114.39	23.36	-20.14	43.5	36.36	17.27	1.9	32.17	-	-	P	V
		207.51	31.2	-12.3	43.5	45.61	15.18	2.52	32.11	-	-	P	V
		506.27	27.07	-18.93	46	31.37	24.16	3.93	32.39	-	-	P	V
		633.34	28.81	-17.19	46	30.36	26.27	4.41	32.23	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
 = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
 = 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
 = 55.45 (dBμV/m)
2. Over Limit(dB)
 = Level(dBμV/m) – Limit Line(dBμV/m)
 = 55.45(dBμV/m) – 74(dBμV/m)
 = -18.55(dB)

For Average Limit @ 2390MHz:


1. Level(dBμV/m)
 = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
 = 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
 = 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
 = 43.54(dBμV/m) – 54(dBμV/m)
 = -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	100	-	-	10Hz
802.11n HT20	100	-	-	10Hz
802.11n HT40	99.03	-	-	10Hz
802.11ac VHT80	97.94	4.145	0.241	0.51kHz

802.11a

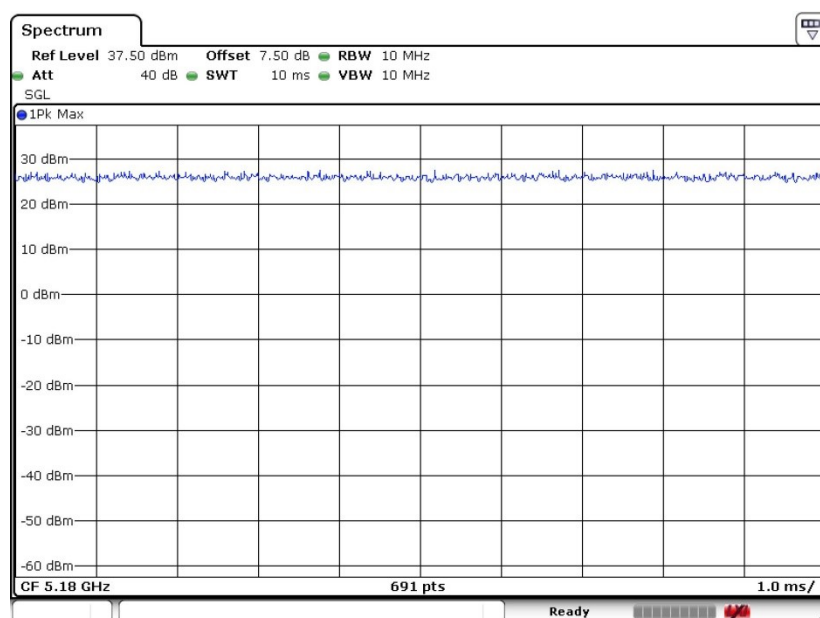


Date: 7.SEP.2020 15:29:34

802.11n HT20

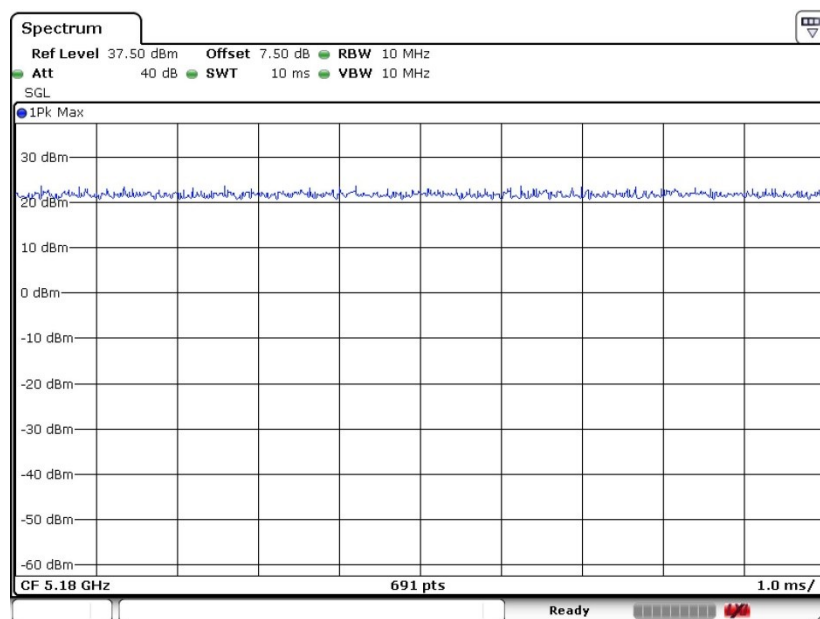

Date: 3.SEP.2020 15:38:11

802.11n HT40

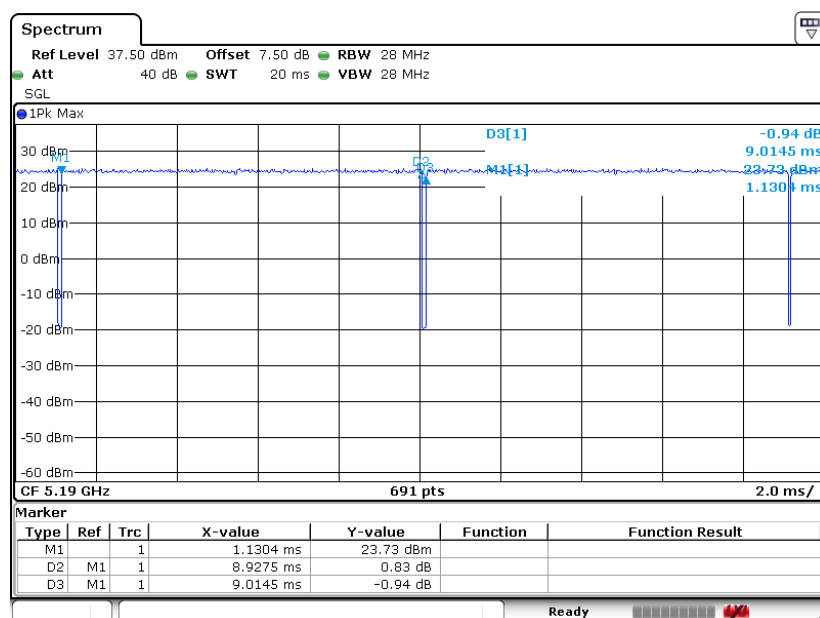

802.11ac VHT80

