

# FCC TEST REPORT

## FCC ID: 2A08RNI-8401

**Product** : Birdfy Feeder Bamboo  
**Model Name** : NI-8401, NI-8400, NI-8402, NI-8403, NI-8404,  
NI-8405, NI-8406, NI-8407, NI-8408, NI-8409  
**Brand** : Netvue, Birdfy  
**Report No.** : NCT23032324XE-2

Prepared for

**Netvue Technologies Co.,Ltd.**

**Room A501-502, Academy of Aerospace Technology, 10 Kejinan Road,  
Nanshan District, Shenzhen, China,518057**

Prepared by

**Shenzhen NCT Testing Technology Co., Ltd.**

**A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District,  
Shenzhen, People's Republic of China**

**TEL: 400-8868-419**

**FAX: 86-755-27790922**


## 1 TEST RESULT CERTIFICATION

Applicant's name : Netvue Technologies Co.,Ltd.  
Address : Room A501-502, Academy of Aerospace Technology, 10 Kejinan Road, Nanshan District, Shenzhen, China, 518057  
Manufacture's name : Netvue Technologies Co.,Ltd.  
Address : Room A501-502, Academy of Aerospace Technology, 10 Kejinan Road, Nanshan District, Shenzhen, China, 518057  
Product name : Birdfy Feeder Bamboo  
Model name : NI-8401, NI-8400, NI-8402, NI-8403, NI-8404, NI-8405, NI-8406, NI-8407, NI-8408, NI-8409  
Standards : FCC CFR47 Part 15 Section 15.247  
RSS-247 Issue 2, February 2017  
RSS-GEN Issue 5 April 2018 Amendment 2(February 2021)  
Test procedure : ANSI C63.10:2013  
Date of test : Aug. 05, 2023-Aug. 16, 2023  
Date of Issue : Aug. 16, 2023

This device described above has been tested by NCT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NCT, this document may be altered or revised by NCT, personal only, and shall be noted in the revision of the document.

Test Engineer:

  
Keven Wu / Engineer

Technical Manager:


  
Henry Wang / Manager



## Contents

	Page
<b>1 TEST RESULT CERTIFICATION</b> .....	2
<b>2 TEST SUMMARY</b> .....	5
<b>3 GENERAL INFORMATION</b> .....	6
3.1 GENERAL DESCRIPTION OF E.U.T. ....	6
3.2 CHANNEL LIST .....	7
3.3 TEST SITE .....	8
3.4 TEST SETUP CONFIGURATION .....	8
3.5 TEST MODE .....	9
<b>4 EQUIPMENT DURING TEST</b> .....	10
4.1 EQUIPMENTS LIST .....	10
4.2 MEASUREMENT UNCERTAINTY .....	12
4.3 DESCRIPTION OF SUPPORT UNITS .....	12
<b>5 CONDUCTED EMISSION</b> .....	13
5.1 E.U.T. OPERATION .....	13
5.2 EUT SETUP .....	13
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	14
5.4 MEASUREMENT PROCEDURE .....	14
5.5 CONDUCTED EMISSION LIMIT .....	14
5.6 MEASUREMENT DESCRIPTION .....	14
5.7 CONDUCTED EMISSION TEST RESULT .....	14
<b>6 RADIATED SPURIOUS EMISSIONS</b> .....	17
6.1 EUT OPERATION .....	17
6.2 TEST SETUP .....	18
6.3 SPECTRUM ANALYZER SETUP .....	19
6.4 TEST PROCEDURE .....	20
6.5 SUMMARY OF TEST RESULTS .....	21
<b>7 CONDUCT BAND EDGE AND SPURIOUS EMISSIONS MEASUREMENT</b> .....	30
7.1 TEST PROCEDURE .....	30

7.2 TEST RESULT .....	30
<b>8 6DB&amp;99% BANDWIDTH MEASUREMENT .....</b>	<b>47</b>
8.1 TEST PROCEDURE .....	47
8.2 TEST RESULT .....	47
<b>9 MAXIMUM PEAK OUTPUT POWER .....</b>	<b>60</b>
9.1 TEST PROCEDURE .....	60
9.2 TEST RESULT .....	60
<b>10 POWER SPECTRAL DENSITY .....</b>	<b>63</b>
10.1 TEST PROCEDURE .....	63
10.2 TEST RESULT .....	63
<b>11 ANTENNA APPLICATION .....</b>	<b>70</b>
11.1 ANTENNA REQUIREMENT .....	70
11.2 RESULT .....	70
<b>12 TEST SETUP AND EUT PHOTOS .....</b>	<b>71</b>

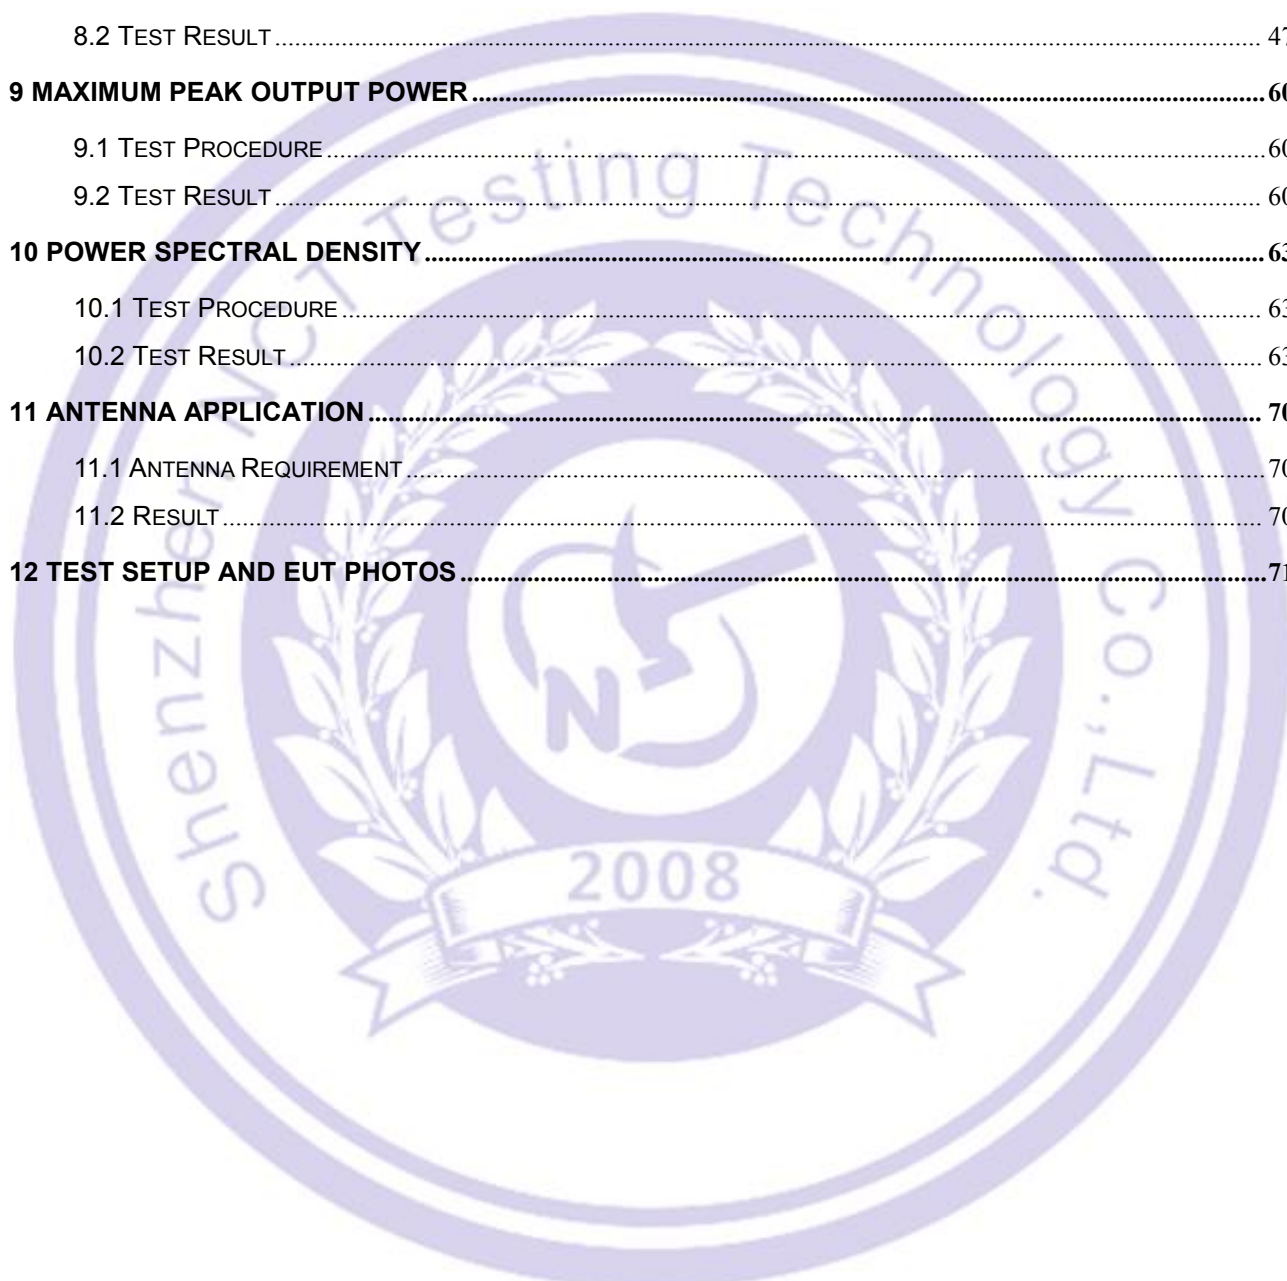

## 2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	FCC part 15.207 RSS-Gen § 8.8 RSS-247 § 3.1	PASS
Radiated Spurious Emissions	FCC part 15.205/15.209 RSS-Gen § 8.9&8.10	PASS
Conducted Spurious Emission	FCC part 15.205/15.209 RSS-247 § 5.5	PASS
Band edge	FCC part 15.247(d) RSS-247 § 5.5	PASS
6dB&99% Bandwidth	FCC part 15.247 (a)(2) RSS-GEN § 6.7 RSS-247 § 5.2	PASS
Maximum Peak Output Power	FCC part 15.247 (b)(3) RSS-247 § 5.4	PASS
Power Spectral Density	FCC part 15.247 (e) RSS-247 § 5.2	PASS
Antenna Requirement	FCC part 15.203/15.247 (c) RSS-GEN § 6.8	PASS

Remark:

“N/A” denotes test is not applicable in this Test Report.

### 3 General Information

#### 3.1 General Description of E.U.T.

Product Name	:	Birdfy Feeder Bamboo
Model Name	:	NI-8401
Sample ID	:	20230806A-001
Sample(s) Status:	:	Engineer sample
Series Model	:	NI-8400, NI-8402, NI-8403, NI-8404, NI-8405, NI-8406, NI-8407, NI-8408, NI-8409
Model Different.:	:	All the same except the model number.
Specification	:	802.11b/g/n HT20/40
Operation Frequency	:	2412-2462MHz for 802.11b/g/n20; 2422-2452MHz for 802.11n40;
Number of Channel	:	11 channels for 802.11b/g/n20; 7 channels for 802.11n40;
Type of Modulation	:	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Antenna installation	:	External Antenna
Antenna Gain	:	5.42 dBi
Power supply	:	DC 5V From adapter input AC 120V/60Hz or DC 3.7V from Battery
Hardware Version	:	CG623C_C01_V5
Software Version	:	1.3.0
<p>Remark : the Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.</p>		

## 3.2 Channel List

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20): MCS0; 802.11n (HT40): MCS0; were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11 b/g/n (HT20)/n (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Test Frequency and Channel for 802.11 b/g/n (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462
3	2422	6	2437	9	2452

### 3.3 Test Site

#### Site Description

EMC Lab. : Accredited by CNAS, 2022-09-27

The certificate is valid until 2028.01.07

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)

The Certificate Registration Number is L8251

Designation Number: CN1347

Test Firm Registration Number: 894804

Accredited by A2LA, June 14, 2023

The Certificate Registration Number is 6837.01

Accredited by Industry Canada, November 09, 2018

The Conformity Assessment Body Identifier is CN0150

Company Number: 30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.


Site Location : A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District, Shenzhen, People's Republic of China

### 3.4 Test Setup Configuration

Conducted Emission







Radiated Emission(above 1GHz)



Conducted Spurious



### 3.5 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Test Software	RTL8189_V3
Power level setup	< 0 dBm

## 4 Equipment During Test

### 4.1 Equipments List

#### Conducted emission Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	944 Room	/	EMToni	2022/5/31	2025/5/30
EMI Test Receiver	ESPI	101604	Rohde & Schwarz	2023/6/21	2024/6/20
LISN	ENV 216	102796	Rohde & Schwarz	2023/6/21	2024/6/20
LISN	VN1-13S	004023	CRANAGE	2023/6/21	2024/6/20
Cable	RG223-1500MM	NA	RG	2023/6/21	2024/6/20

#### Radiated emission & Radio Frequency Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	2022/5/31	2025/5/30
EMI Test Receiver	ESCI	101178	Rohde & Schwarz	2023/6/21	2024/6/20
Spectrum Analyze (10Hz-26.5GHz)	N9020A	MY50510202	Agilent	2023/6/21	2024/6/20
Amplifi (30MHz-1GHz)	BBV 9743 B	00374	SCHNARZBECK	2023/6/21	2024/6/20
Bilog Antenna (30MHz-1GHz)	VULB9162	00473	SCHNARZBECK	2023/3/19	2025/3/18
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHNARZBECK	2023/3/19	2025/3/18
Pream plifier (1GHz-18GHz)	BBV 9718D	0024	SCHNARZBECK	2023/6/21	2024/6/20
Spectrum Analyze (1GHz-40GHz)	FSV 40	100952	Rohde & Schwarz	2023/6/21	2024/6/20
Pream plifier (15GHz-40GHz)	BBV 9718D	0024	SCHNARZBECK	2023/6/21	2024/6/20
Broadband Antenna (15GHz-40GHz)	SAS-574	588	A.H.System	2023/3/19	2025/3/18
Loop Antenna (9KHz-30MHz)	FMZB1519B	014	SCHNARZBECK	2023/6/21	2024/6/20

Amplifier (9KHz-30MHz)	CVP 9222 C	00109	SCHNARZBECK	2023/6/21	2024/6/20
MXG Signal Analyzer	N9020A	101178	RS	2023/6/21	2024/6/20
MXG Vector Signal Generator	N5182A	MY50510202	Agilent	2023/6/21	2024/6/20
MXG Analog Signal Generator	N5181A	00374	SCHWARZBECK	2023/6/21	2024/6/20
Power Sensor	TR1029-2	00473	SCHNARZBECK	2023/6/21	2024/6/20
RF Swith	TR1029-1	02622	SCHNARZBECK	2023/6/21	2024/6/20
Cable	DA800-4000MM	NA	DA	2023/6/21	2024/6/20
Cable	DA800-11000MM	NA	DA	2023/6/21	2024/6/20

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	AUDIX	e3	6.120718
2	EMC radiation test system	AUDIX	e3	6.120718
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0

## 4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 <sup>-6</sup>
Bandwidth	± 1.5 x 10 <sup>-6</sup>
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB

## 4.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Birdfy Feeder Bamboo	Birdfy, Netvue	NI-8401	N/A	EUT
E-2	Adapter	N/A	X2904	N/A	Auxiliary

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## 5 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207, RSS-Gen§8.8, RSS-247§ 3.1  
Test Method : ANSI C63.10: 2013  
Test Result : PASS  
Frequency Range : 150kHz to 30MHz  
Class/Severity : Class B


### 5.1 E.U.T. Operation

Operating Environment :


Temperature : 24.5 °C  
Humidity : 51.3 % RH  
Atmospheric Pressure : 101.11kPa

### 5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

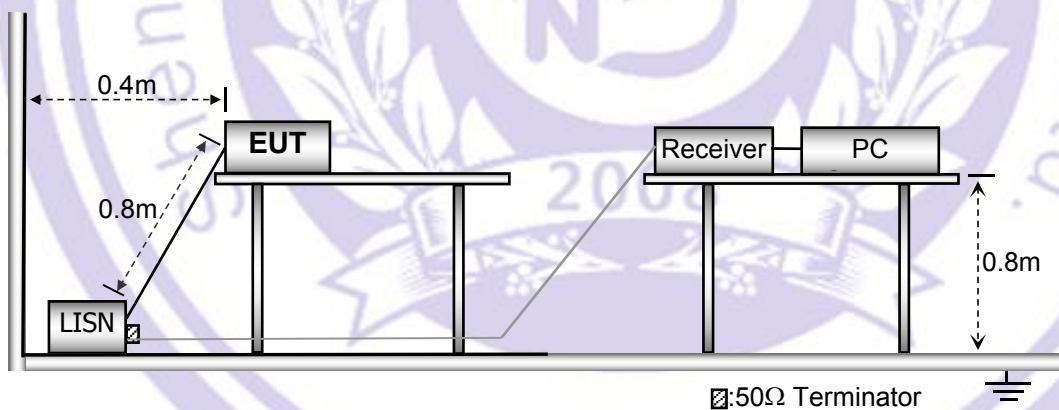

### 5.3 Test SET-UP (Block Diagram of Configuration)

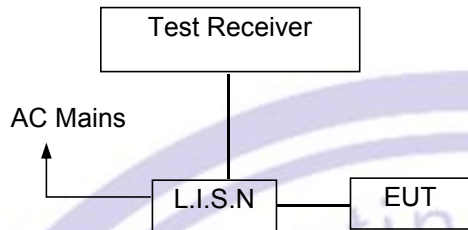

### 5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

### 5.5 Conducted Emission Limit

#### Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

#### Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 5.6 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

### 5.7 Conducted Emission Test Result

Pass.

Please refer to the following pages.


Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz		

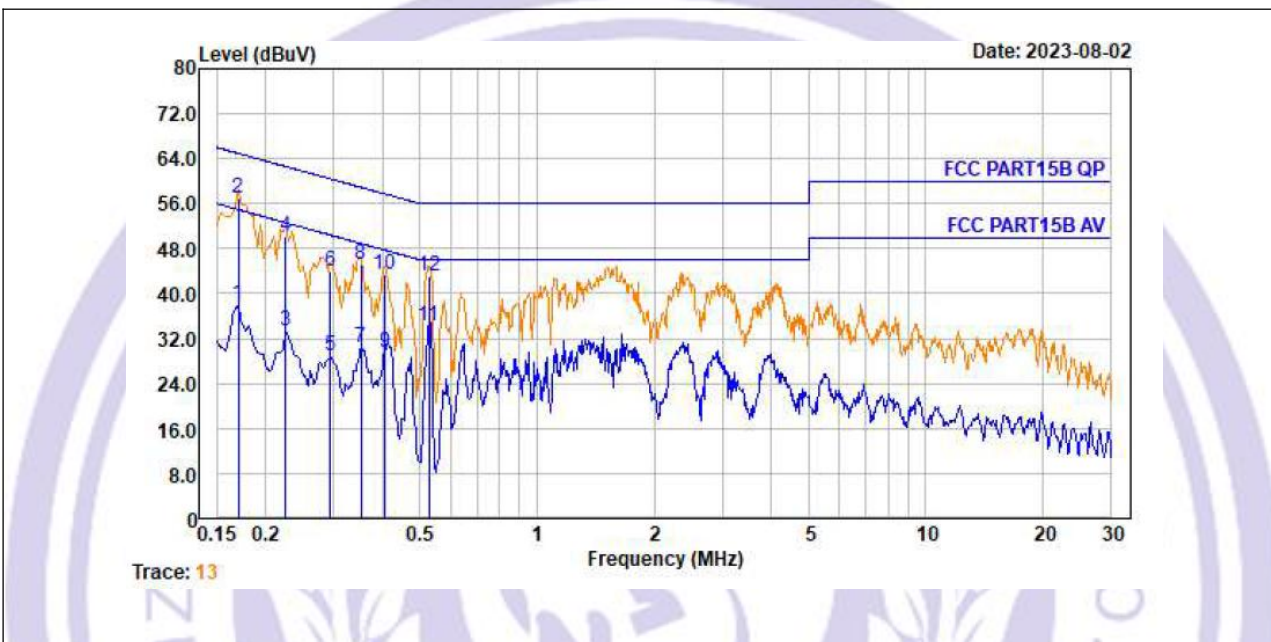

No.	Freq MHz	Cable Loss dB	LISN Factor dB/m	Receiver Reading dBuV	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	0.170	0.00	9.54	28.51	38.05	54.94	-16.89	Average
2.	0.170	0.00	9.54	47.37	56.91	64.94	-8.03	QP
3.	0.226	0.01	9.55	23.67	33.23	52.61	-19.38	Average
4.	0.226	0.01	9.55	40.71	50.27	62.61	-12.34	QP
5.	0.294	0.01	9.56	19.34	28.91	50.41	-21.50	Average
6.	0.294	0.01	9.56	34.42	43.99	60.41	-16.42	QP
7.	0.352	0.01	9.56	20.80	30.37	48.91	-18.54	Average
8.	0.352	0.01	9.56	35.47	45.04	58.91	-13.87	QP
9.	0.406	0.01	9.57	19.99	29.57	47.73	-18.16	Average
10.	0.406	0.01	9.57	33.87	43.45	57.73	-14.28	QP
11.	0.527	0.01	9.57	24.72	34.30	46.00	-11.70	Average
12.	0.527	0.01	9.57	33.64	43.22	56.00	-12.78	QP

Notes: 1.An initial pre-scan was performed on the line and neutral lines with peak detector.  
 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.  
 3.Measurement Level = Reading level + Correct Factor

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		

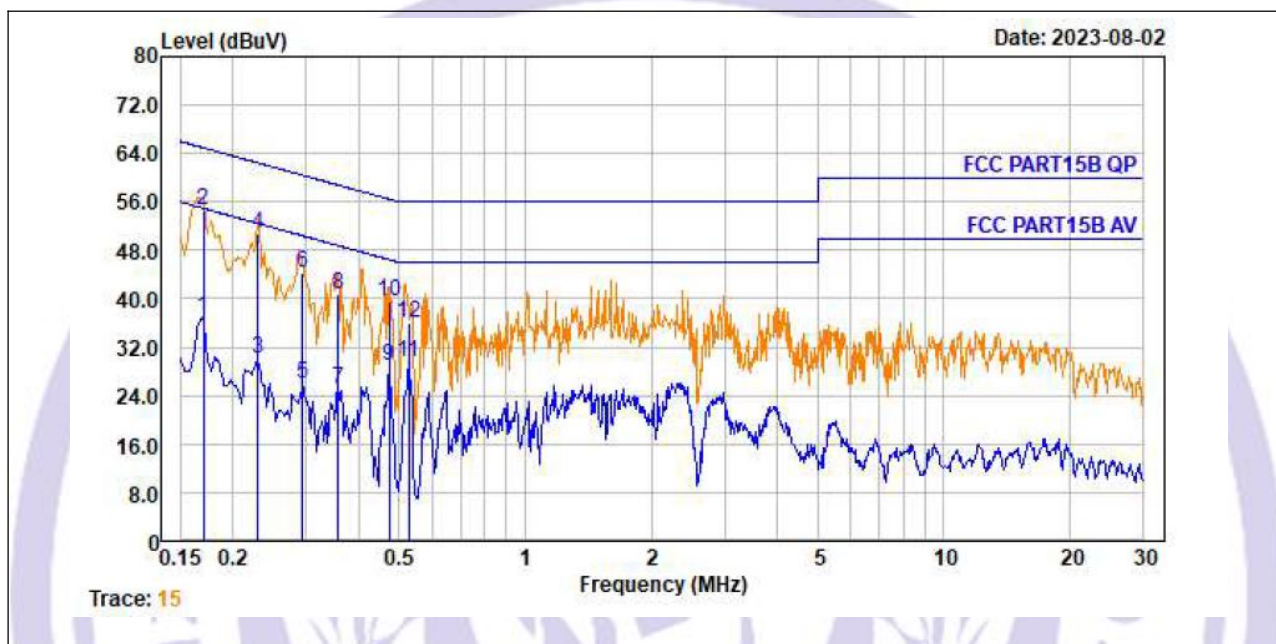

No.	Freq MHz	Cable Loss dB	LISN Factor dB/m	Receiver Reading dBUV	Emission Level dBUV/m	Limit dBUV/m	Over Limit dB	Remark
1.	0.170	0.00	9.54	27.51	37.05	54.94	-17.89	Average
2.	0.170	0.00	9.54	45.14	54.68	64.94	-10.26	QP
3.	0.230	0.01	9.55	20.61	30.17	52.44	-22.27	Average
4.	0.230	0.01	9.55	41.12	50.68	62.44	-11.76	QP
5.	0.294	0.01	9.56	16.29	25.86	50.41	-24.55	Average
6.	0.294	0.01	9.56	34.82	44.39	60.41	-16.02	QP
7.	0.358	0.01	9.57	15.62	25.20	48.78	-23.58	Average
8.	0.358	0.01	9.57	31.24	40.82	58.78	-17.96	QP
9.	0.474	0.01	9.58	19.28	28.87	46.45	-17.58	Average
10.	0.474	0.01	9.58	29.87	39.46	56.45	-16.99	QP
11.	0.527	0.01	9.58	19.93	29.52	46.00	-16.48	Average
12.	0.527	0.01	9.58	26.42	36.01	56.00	-19.99	QP

Notes: 1.An initial pre-scan was performed on the line and neutral lines with peak detector.  
 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.  
 3.Measurement Level = Reading level + Correct Factor



## 6 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247  
 RSS-Gen §8.9, RSS-Gen §8.10

Test Method : ANSI C63.10:2013

Test Result : PASS

Measurement Distance : 3m

Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log <sup>(2400/F(kHz))</sup> + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log <sup>(24000/F(kHz))</sup> + 40
1.705 ~ 30	30	30	100 * 30	20log <sup>(30)</sup> + 40
30 ~ 88	100	3	100	20log <sup>(100)</sup>
88 ~ 216	150	3	150	20log <sup>(150)</sup>
216 ~ 960	200	3	200	20log <sup>(200)</sup>
Above 960	500	3	500	20log <sup>(500)</sup>

### 6.1 EUT Operation

Operating Environment :

Temperature: : 24.5°C

Humidity: : 52 % RH


Atmospheric Pressure: : 101.11kPa

Test Voltage : DC 3.7V


## 6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

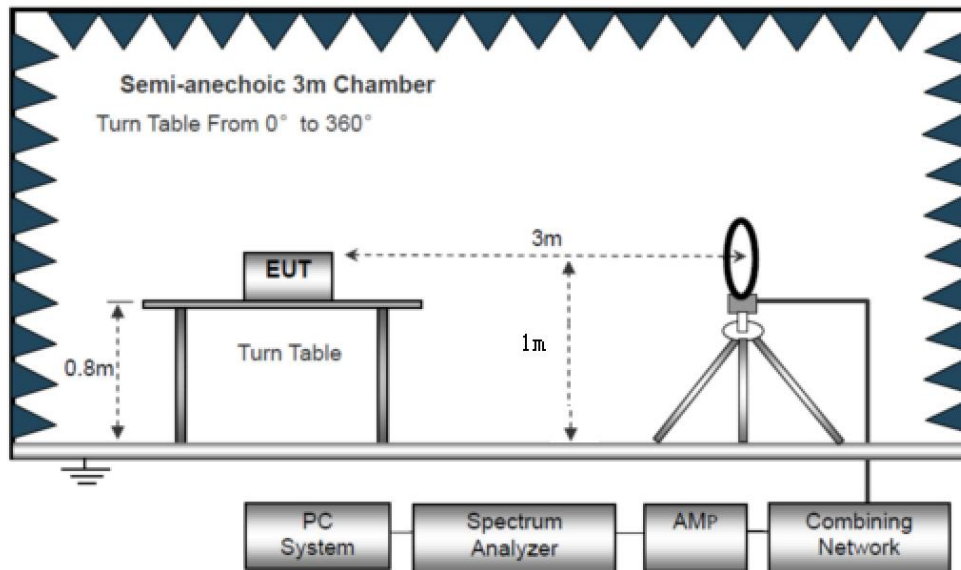

The test setup for emission measurement from 30 MHz to 1 GHz.

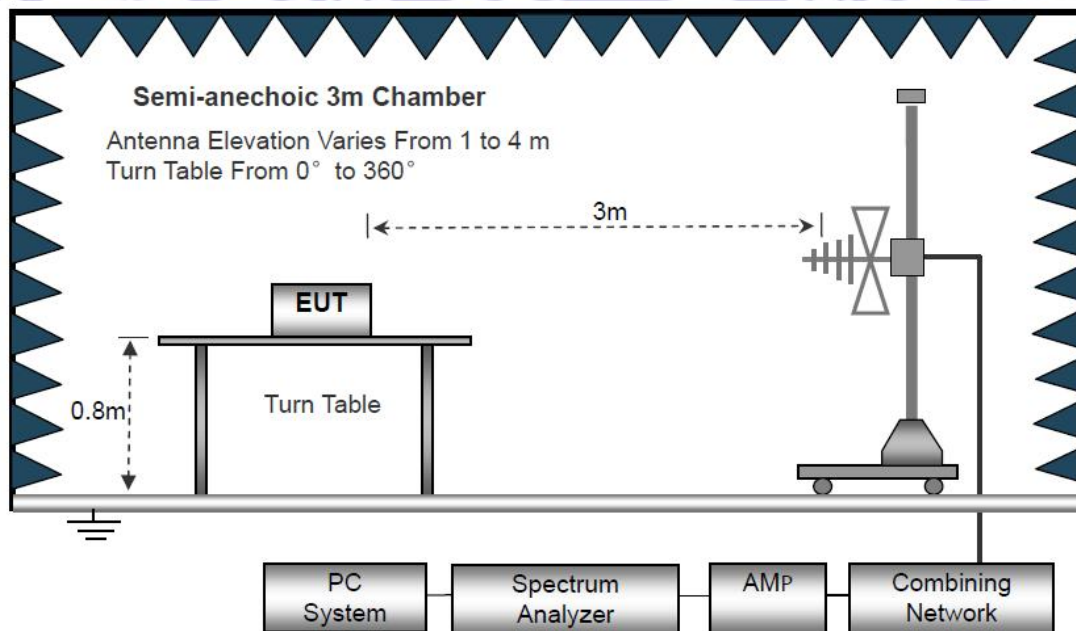

The test setup for emission measurement above 1 GHz

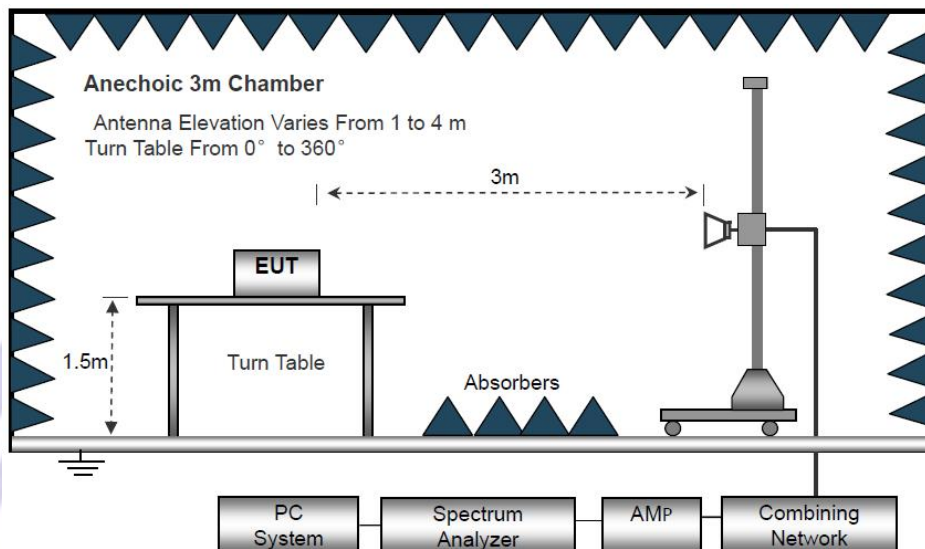

### 6.3 Spectrum Analyzer Setup

Below 30MHz		
IF Bandwidth	:	10kHz
Resolution Bandwidth	:	10kHz
Video Bandwidth	:	10kHz
30MHz ~ 1GHz		
Detector	:	PK QP
Resolution Bandwidth	:	100kHz 120kHz
Video Bandwidth	:	300kHz 300kHz
Above 1GHz		
Detector	:	PK AV
Resolution Bandwidth	:	1MHz 1MHz
Video Bandwidth	:	3MHz 10Hz

## 6.4 Test Procedure

1. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane, And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. The test above 1GHz must be use the fully anechoic room, and the test below 1GHz use the half anechoic room

## 6.5 Summary of Test Results

### Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

**Note:**

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{Specific distance} / \text{test distance})$  (dB);  
Limit line = Specific limits (dBuV) + distance extrapolation factor.

### Test Frequency: 30MHz ~ 1GHz

All the modulation modes were tested the data of the worst mode (TX 802.11b Low Channel) are recorded in the following pages and the others modulation methods do not exceed the limits.


Please refer to the following test plots:

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

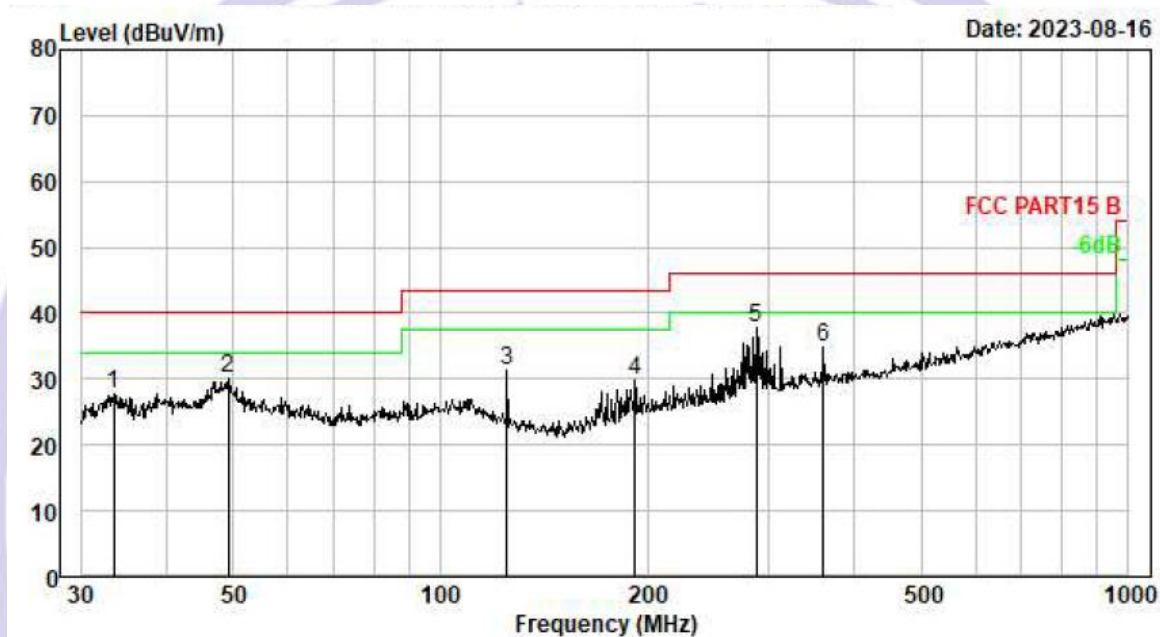

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBμV	Emission Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
1	33.445	0.28	10.70	16.86	27.84	40.00	-12.16	QP
2	49.187	0.42	12.69	16.88	29.99	40.00	-10.01	QP
3	125.007	0.81	9.69	20.87	31.37	43.50	-12.13	QP
4	191.745	1.04	11.15	17.61	29.80	43.50	-13.70	QP
5	287.990	1.26	14.01	22.64	37.91	46.00	-8.09	QP
6	360.448	1.38	15.26	18.18	34.82	46.00	-11.18	QP

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

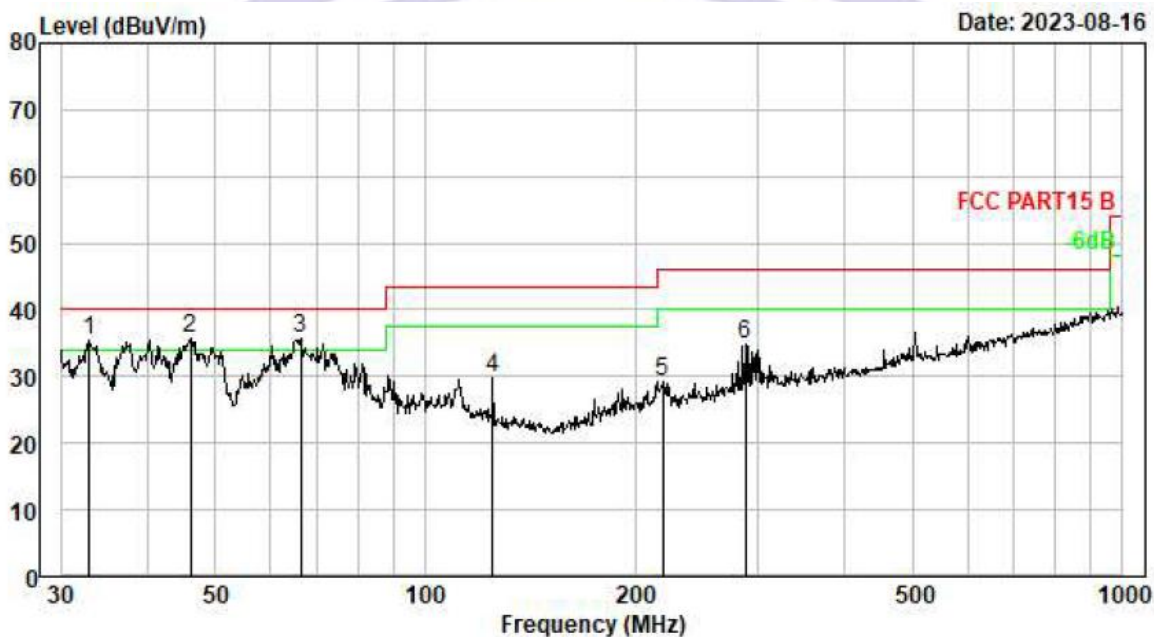

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBμV	Emission Level dBμV/m	Limit dBμV/m	Over Limit dB	Remark
1	32.979	0.28	10.55	24.59	35.42	40.00	-4.58	QP
2	46.016	0.40	12.63	22.57	35.60	40.00	-4.40	QP
3	66.266	0.54	10.22	24.95	35.71	40.00	-4.29	QP
4	125.007	0.81	9.69	19.38	29.88	43.50	-13.62	QP
5	219.075	1.11	12.05	16.04	29.20	46.00	-16.80	QP
6	287.990	1.26	14.01	19.42	34.69	46.00	-11.31	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor

**Test Frequency: From 1GHz to 18GHz**

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Low Channel:2412MHz									
V	4824.00	45.87	34.11	5.04	32.44	49.24	74.00	-24.76	PK
V	4824.00	36.15	34.11	5.04	32.44	39.52	54.00	-14.48	AV
V	7236.00	43.5	32.57	6.30	35.89	53.12	74.00	-20.88	PK
V	7236.00	27.45	32.57	6.30	35.89	37.07	54.00	-16.93	AV
V	9648.00	36.65	32.96	7.56	38.40	49.65	74.00	-24.35	PK
V	9648.00	25.87	32.96	7.56	38.40	38.87	54.00	-15.13	AV
V	12060.00	33.5	32.06	8.92	39.01	49.37	74.00	-24.63	PK
V	12060.00	22.42	32.06	8.92	39.01	38.29	54.00	-15.71	AV
H	4824.00	48.22	34.11	5.04	32.44	51.59	74.00	-22.41	PK
H	4824.00	35.87	34.11	5.04	32.44	39.24	54.00	-14.76	AV
H	7236.00	39.56	32.57	6.30	35.89	49.18	74.00	-24.82	PK
H	7236.00	28.67	32.57	6.30	35.89	38.29	54.00	-15.71	AV
H	9648.00	39.92	32.96	7.56	38.40	52.92	74.00	-21.08	PK
H	9648.00	25.09	32.96	7.56	38.40	38.09	54.00	-15.91	AV
H	12060.00	38.38	32.06	8.92	39.01	54.25	74.00	-19.75	PK
H	12060.00	28.59	32.06	8.92	39.01	44.46	54.00	-9.54	AV



Radiated Band Emission Measurement:

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detect or Type
Middle Channel:2437MHz									
V	4874.00	50.09	34.08	5.08	32.57	53.66	74.00	-20.34	PK
V	4874.00	36.34	34.08	5.08	32.57	39.91	54.00	-14.09	AV
V	7311.00	44.09	32.62	6.34	35.95	53.76	74.00	-20.24	PK
V	7311.00	30.56	32.62	6.34	35.95	40.23	54.00	-13.77	AV
V	9748.00	43.63	32.93	7.58	38.40	56.68	74.00	-17.32	PK
V	9748.00	33.68	32.93	7.58	38.40	46.73	54.00	-7.27	AV
V	12185.00	40.24	31.97	8.89	39.04	56.20	74.00	-17.80	PK
V	12185.00	28.96	31.97	8.89	39.04	44.92	54.00	-9.08	AV
H	4874.00	45.81	34.08	5.08	32.57	49.38	74.00	-24.62	PK
H	4874.00	30.84	34.08	5.08	32.57	34.41	54.00	-19.59	AV
H	7311.00	39.22	32.62	6.34	35.95	48.89	74.00	-25.11	PK
H	7311.00	33.63	32.62	6.34	35.95	43.30	54.00	-10.70	AV
H	9748.00	42.66	32.93	7.58	38.40	55.71	74.00	-18.29	PK
H	9748.00	27.39	32.93	7.58	38.40	40.44	54.00	-13.56	AV
H	12185.00	35.33	31.97	8.89	39.04	51.29	74.00	-22.71	PK
H	12185.00	27.5	31.97	8.89	39.04	43.46	54.00	-10.54	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
High Channel:2462MHz									
V	4924.00	45.74	34.05	5.14	32.79	49.62	74.00	-24.38	PK
V	4924.00	31.93	34.05	5.14	32.79	35.81	54.00	-18.19	AV
V	7386.00	38.98	32.67	6.36	35.99	48.66	74.00	-25.34	PK
V	7386.00	27.23	32.67	6.36	35.99	36.91	54.00	-17.09	AV
V	9848.00	40.43	32.89	7.59	38.37	53.50	74.00	-20.50	PK
V	9848.00	26.85	32.89	7.59	38.37	39.92	54.00	-14.08	AV
V	12310.00	34.71	31.88	8.82	39.06	50.71	74.00	-23.29	PK
V	12310.00	26.55	31.88	8.82	39.06	42.55	54.00	-11.45	AV
H	4924.00	43.79	34.05	5.14	32.79	47.67	74.00	-26.33	PK
H	4924.00	37.06	34.05	5.14	32.79	40.94	54.00	-13.06	AV
H	7386.00	45.13	32.67	6.36	35.99	54.81	74.00	-19.19	PK
H	7386.00	27.01	32.67	6.36	35.99	36.69	54.00	-17.31	AV
H	9848.00	40.53	32.89	7.59	38.37	53.60	74.00	-20.40	PK
H	9848.00	25.27	32.89	7.59	38.37	38.34	54.00	-15.66	AV
H	12310.00	38.66	31.88	8.82	39.06	54.66	74.00	-19.34	PK
H	12310.00	25.98	31.88	8.82	39.06	41.98	54.00	-12.02	AV

Note:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,  
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. We test all the mode and recorded the worst mode (802.11b) in the report.

	Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV/m)	Detector Type	Result
802.11b	Low Channel 2412MHz									
	H	2390.00	58.46	35.17	3.48	27.49	54.26	74.00	PK	PASS
	H	2390.00	49.54	35.17	3.48	27.49	45.34	54.00	AV	PASS
	H	2400.00	60.05	35.16	3.49	27.52	55.90	74.00	PK	PASS
	H	2400.00	50.15	35.16	3.49	27.52	46.00	54.00	AV	PASS
	V	2390.00	57.82	35.17	3.48	27.49	53.62	74.00	PK	PASS
	V	2390.00	50.1	35.17	3.48	27.49	45.90	54.00	AV	PASS
	V	2400.00	60.03	35.16	3.49	27.52	55.88	74.00	PK	PASS
	V	2400.00	49.85	35.16	3.49	27.52	45.70	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	57.96	35.11	3.56	27.75	54.16	74.00	PK	PASS
	H	2483.50	49.14	35.11	3.56	27.75	45.34	54.00	AV	PASS
	H	2500.00	59.32	35.10	3.57	27.80	55.59	74.00	PK	PASS
	H	2500.00	49.37	35.10	3.57	27.80	45.64	54.00	AV	PASS
	V	2483.50	58.5	35.11	3.56	27.75	54.70	74.00	PK	PASS
	V	2483.50	50.08	35.11	3.56	27.75	46.28	54.00	AV	PASS
V	2500.00	58.51	35.10	3.57	27.80	54.78	74.00	PK	PASS	
V	2500.00	49.53	35.10	3.57	27.80	45.80	54.00	AV	PASS	
802.11g	Low Channel 2412MHz									
	H	2390.00	55.49	30.22	4.85	23.98	54.10	74.00	PK	PASS
	H	2390.00	47.79	30.22	4.85	23.98	46.40	54.00	AV	PASS
	H	2400.00	57.19	30.22	4.85	23.98	55.80	74.00	PK	PASS
	H	2400.00	44.62	30.22	4.85	23.98	43.23	54.00	AV	PASS

802.11 n20	V	2390.00	56.65	30.22	4.85	23.98	55.26	74.00	PK	PASS	
	V	2390.00	47.13	30.22	4.85	23.98	45.74	54.00	AV	PASS	
	V	2400.00	55.51	30.22	4.85	23.98	54.12	74.00	PK	PASS	
	V	2400.00	45.92	30.22	4.85	23.98	44.53	54.00	AV	PASS	
	High Channel 2462MHz										
	H	2483.50	56.94	35.11	3.56	27.75	53.14	74.00	PK	PASS	
	H	2483.50	48.32	35.11	3.56	27.75	44.52	54.00	AV	PASS	
	H	2500.00	58.72	35.10	3.57	27.80	54.99	74.00	PK	PASS	
	H	2500.00	49.21	35.10	3.57	27.80	45.48	54.00	AV	PASS	
	V	2483.50	57.53	35.11	3.56	27.75	53.73	74.00	PK	PASS	
	V	2483.50	50.09	35.11	3.56	27.75	46.29	54.00	AV	PASS	
	V	2500.00	58.26	35.10	3.57	27.80	54.53	74.00	PK	PASS	
	V	2500.00	49.39	35.10	3.57	27.80	45.66	54.00	AV	PASS	
	Low Channel 2412MHz										
	H	2390.00	57.88	35.17	3.48	27.49	53.68	74.00	PK	PASS	
	H	2390.00	49.98	35.17	3.48	27.49	45.78	54.00	AV	PASS	
	H	2400.00	60.43	35.16	3.49	27.52	56.28	74.00	PK	PASS	
	H	2400.00	49.38	35.16	3.49	27.52	45.23	54.00	AV	PASS	
	V	2390.00	57.25	35.17	3.48	27.49	53.05	74.00	PK	PASS	
	V	2390.00	50.2	35.17	3.48	27.49	46.00	54.00	AV	PASS	
V	2400.00	59.79	35.16	3.49	27.52	55.64	74.00	PK	PASS		
V	2400.00	49.92	35.16	3.49	27.52	45.77	54.00	AV	PASS		
High Channel 2462MHz											
H	2483.50	57.67	35.11	3.56	27.75	53.87	74.00	PK	PASS		
H	2483.50	49.06	35.11	3.56	27.75	45.26	54.00	AV	PASS		
H	2500.00	59.5	35.10	3.57	27.80	55.77	74.00	PK	PASS		

	H	2500.00	49.58	35.10	3.57	27.80	45.85	54.00	AV	PASS
	V	2483.50	58.51	35.11	3.56	27.75	54.71	74.00	PK	PASS
	V	2483.50	49.57	35.11	3.56	27.75	45.77	54.00	AV	PASS
	V	2500.00	58.41	35.10	3.57	27.80	54.68	74.00	PK	PASS
	V	2500.00	50.32	35.10	3.57	27.80	46.59	54.00	AV	PASS
	Low Channel 2422MHz									
	H	2390.00	57.28	35.17	3.48	27.49	53.08	74.00	PK	PASS
	H	2390.00	49.86	35.17	3.48	27.49	45.66	54.00	AV	PASS
	H	2400.00	58.5	35.16	3.49	27.52	54.35	74.00	PK	PASS
	H	2400.00	49.43	35.16	3.49	27.52	45.28	54.00	AV	PASS
	V	2390.00	57.08	35.17	3.48	27.49	52.88	74.00	PK	PASS
	V	2390.00	49.15	35.17	3.48	27.49	44.95	54.00	AV	PASS
	V	2400.00	58.56	35.16	3.49	27.52	54.41	74.00	PK	PASS
802.11 n40	V	2400.00	48.68	35.16	3.49	27.52	44.53	54.00	AV	PASS
	High Channel 2452MHz									
	H	2483.50	56.87	35.11	3.56	27.75	53.07	74.00	PK	PASS
	H	2483.50	48.67	35.11	3.56	27.75	44.87	54.00	AV	PASS
	H	2500.00	58.99	35.10	3.57	27.80	55.26	74.00	PK	PASS
	H	2500.00	49.02	35.10	3.57	27.80	45.29	54.00	AV	PASS
	V	2483.50	57.71	35.11	3.56	27.75	53.91	74.00	PK	PASS
	V	2483.50	49.99	35.11	3.56	27.75	46.19	54.00	AV	PASS
	V	2500.00	58.13	35.10	3.57	27.80	54.40	74.00	PK	PASS
	V	2500.00	49.32	35.10	3.57	27.80	45.59	52.36	AV	PASS
Remark:										
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit										

## 7 Conduct Band Edge And Spurious Emissions Measurement

Test Requirement	:	FCC CFR47 Part 15 Section 15.247, RSS-247 § 5.5
Test Method	:	ANSI C63.10:2013
Test Limit	:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). RSS-247 § 5.5: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### 7.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold

### 7.2 Test Result

802.11b




802.11g

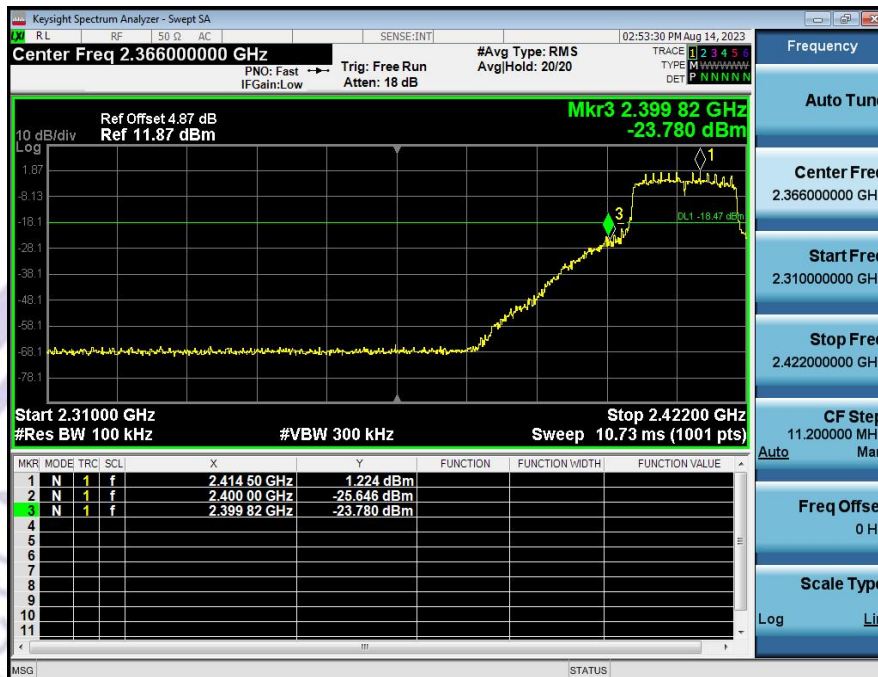






802.11n 20

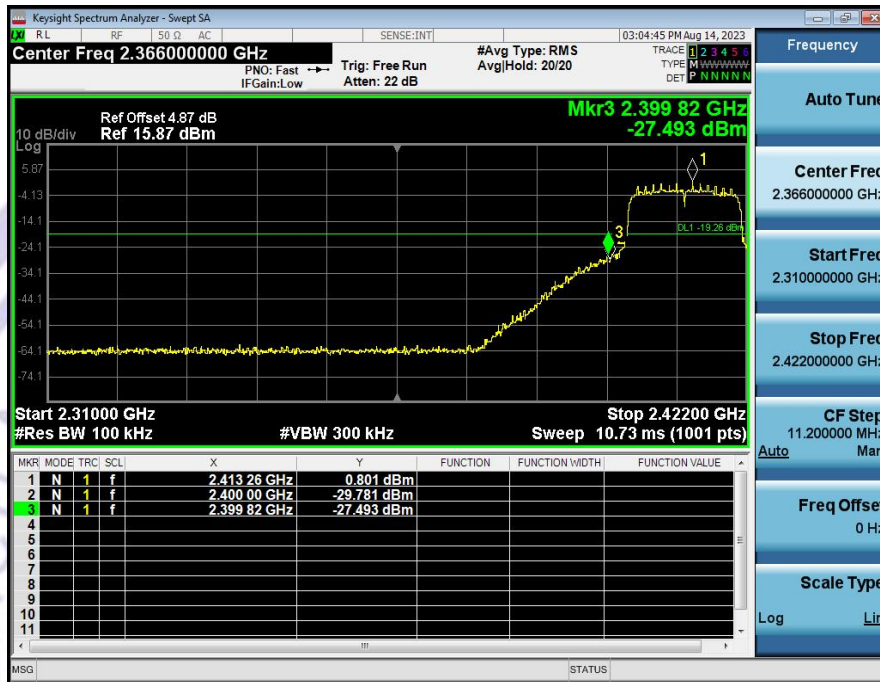



802.11n 40

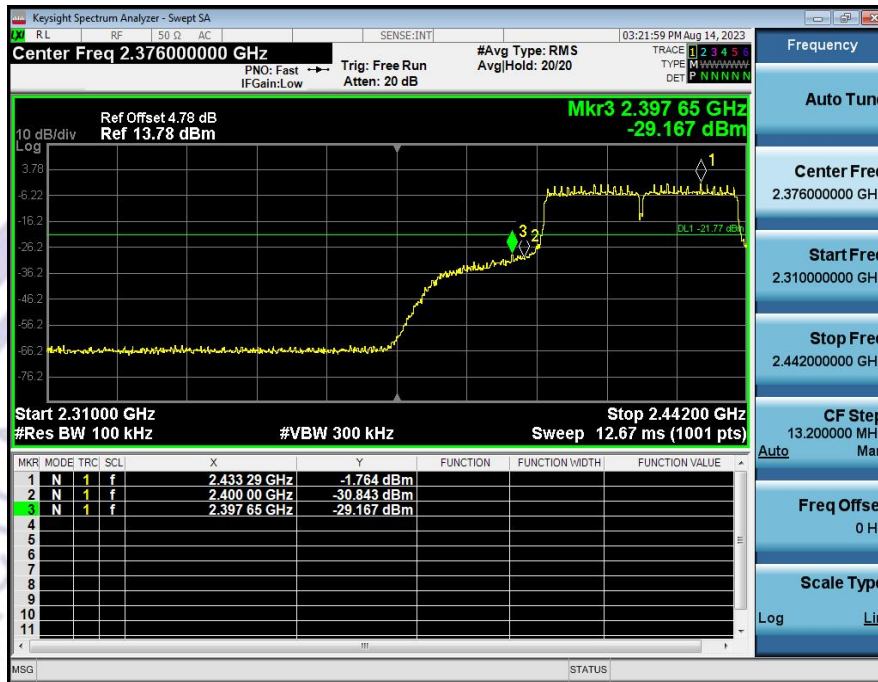



802.11 b  
Low Channel

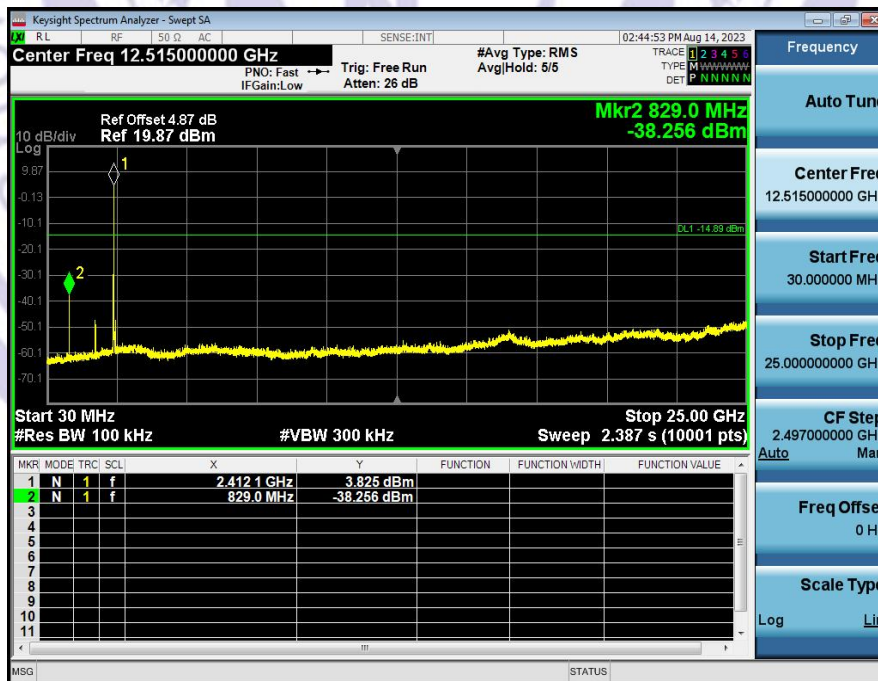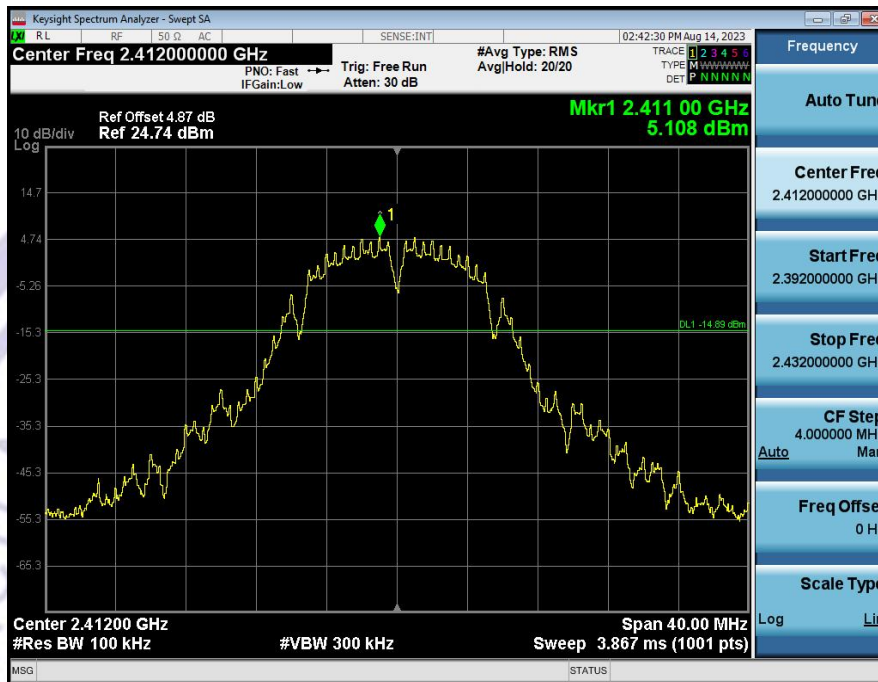



## Middle Channel

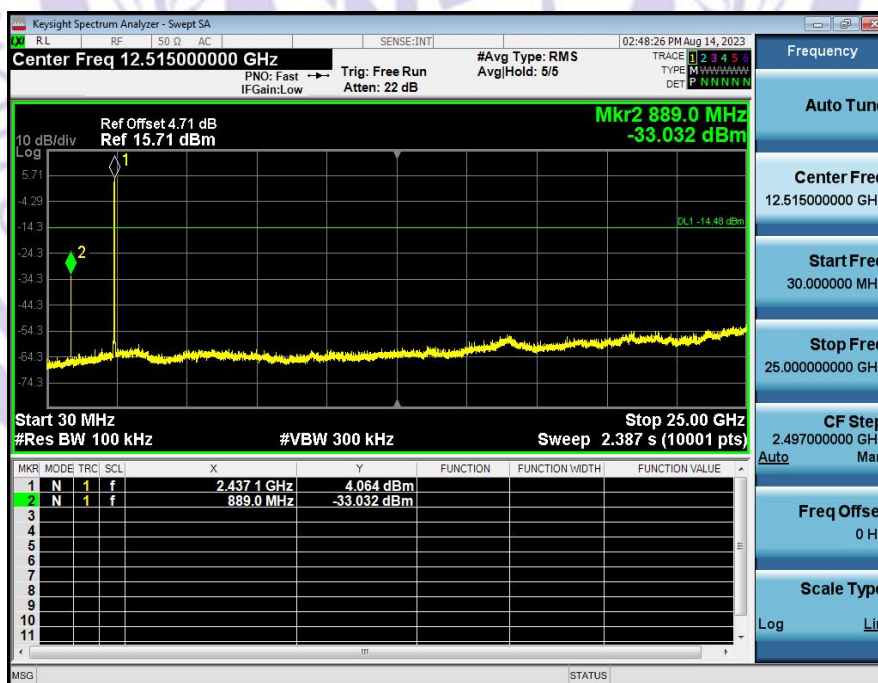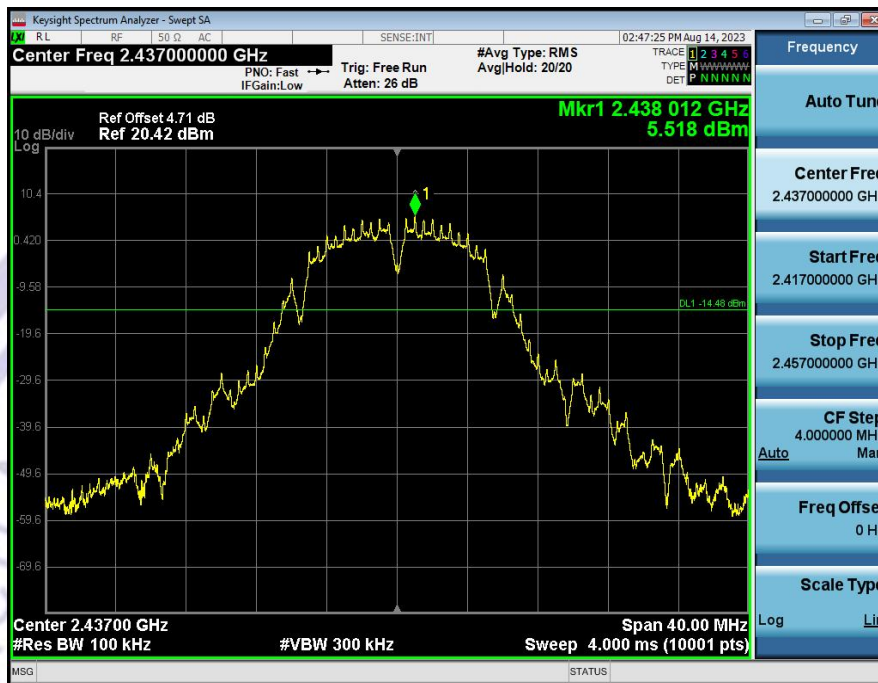



## High Channel

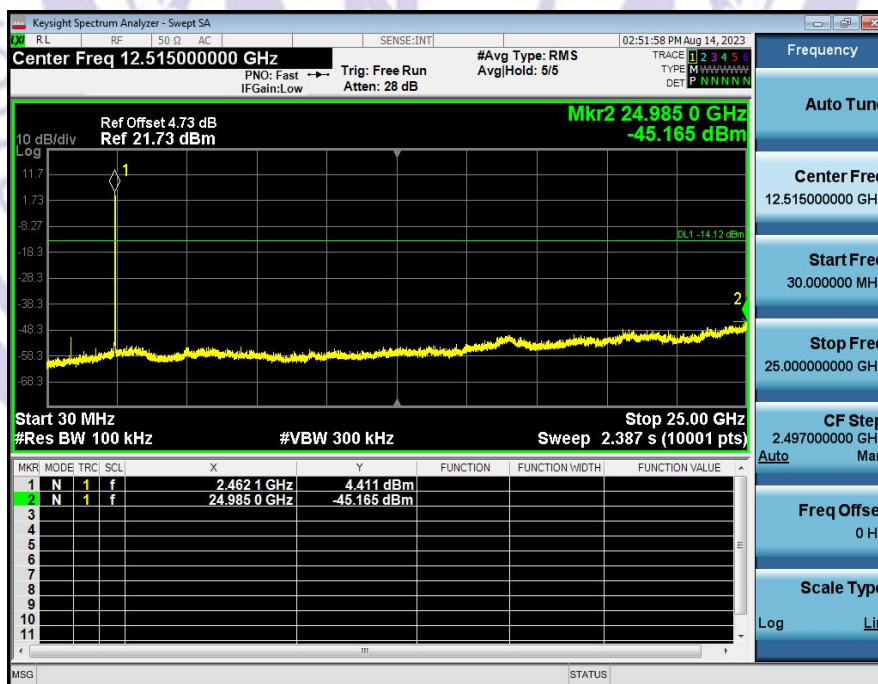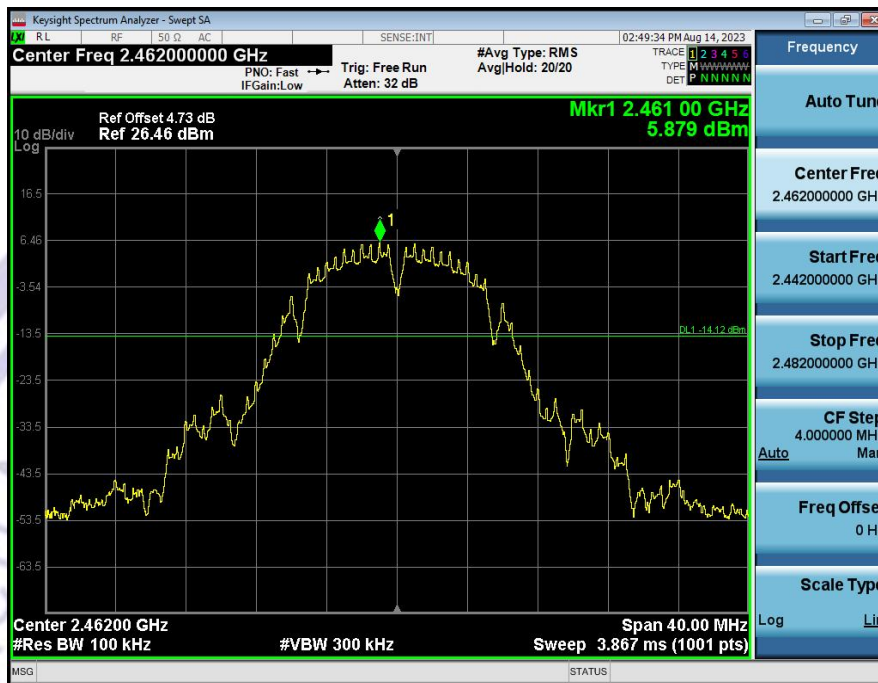



802.11g  
Low Channel

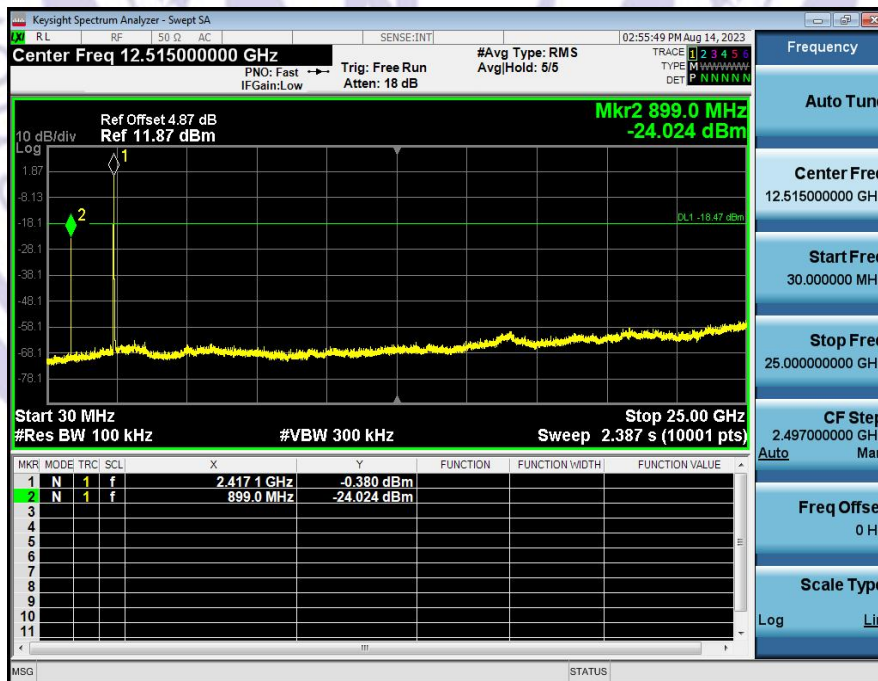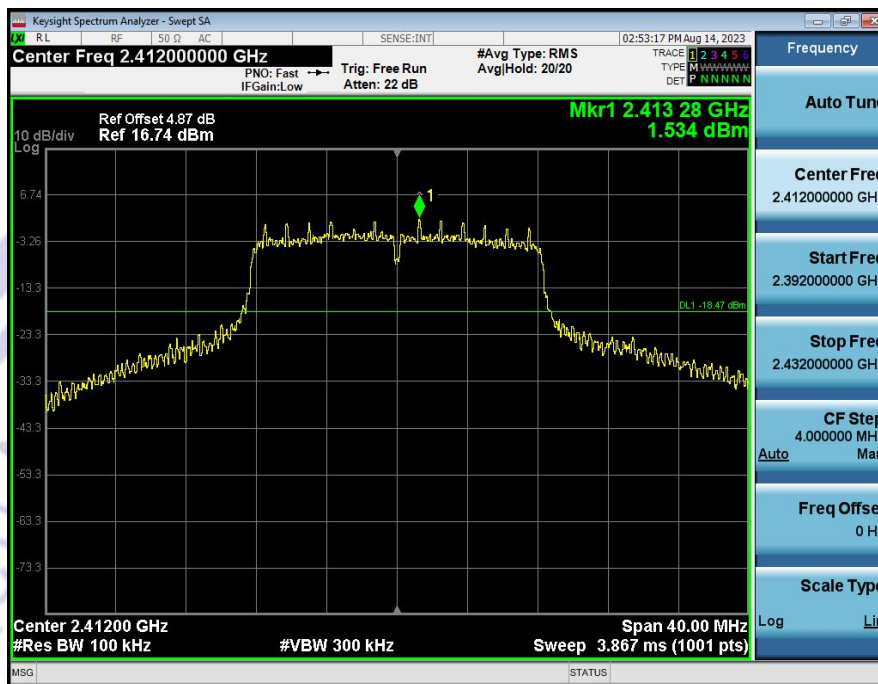

## Middle Channel

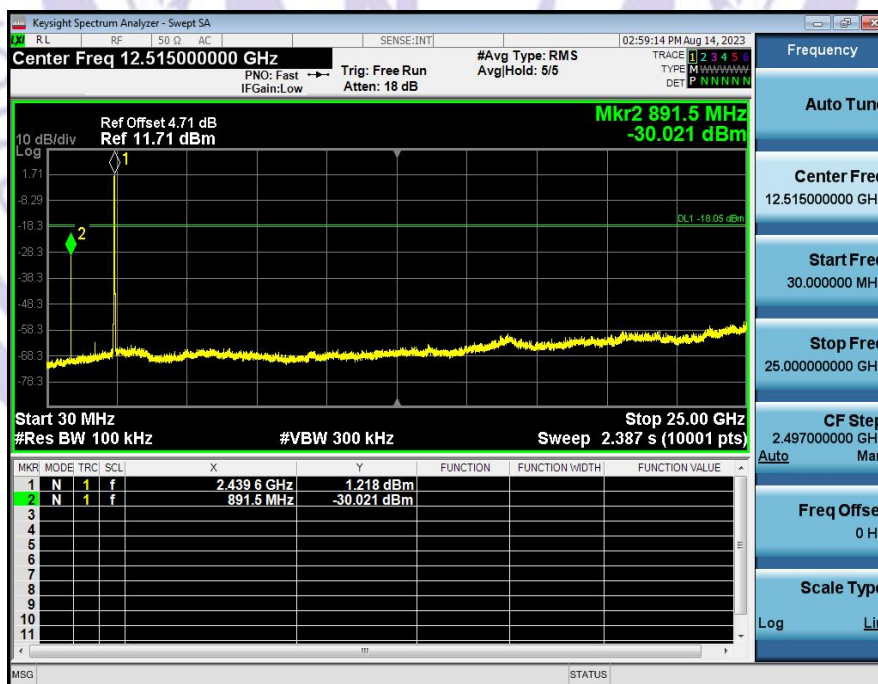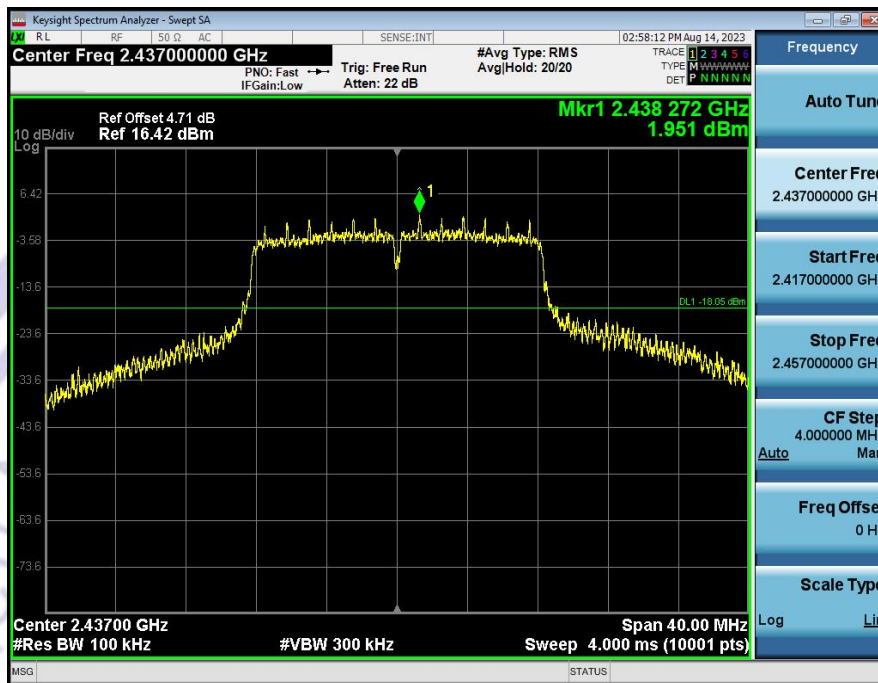


## High Channel

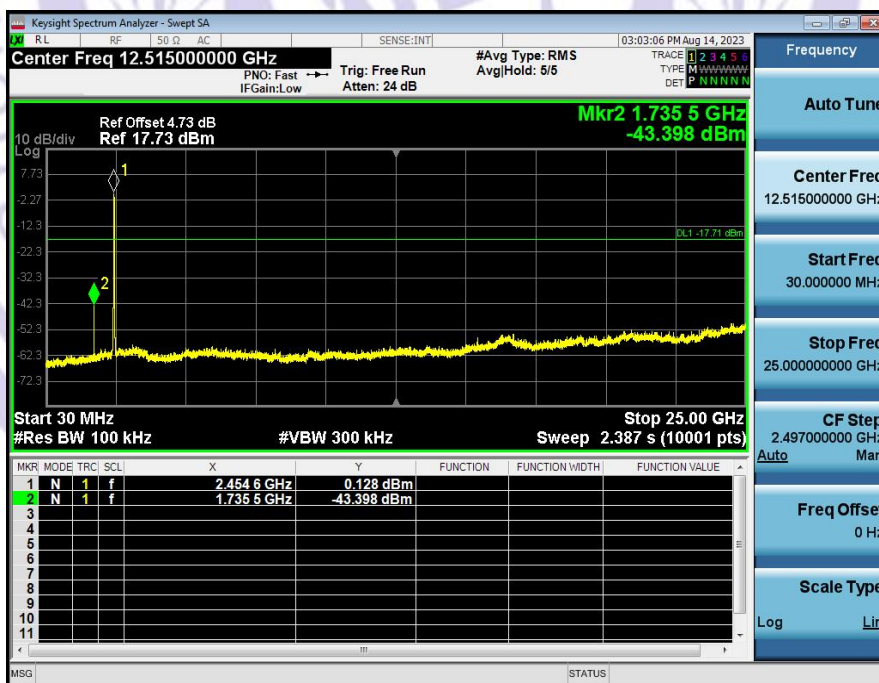
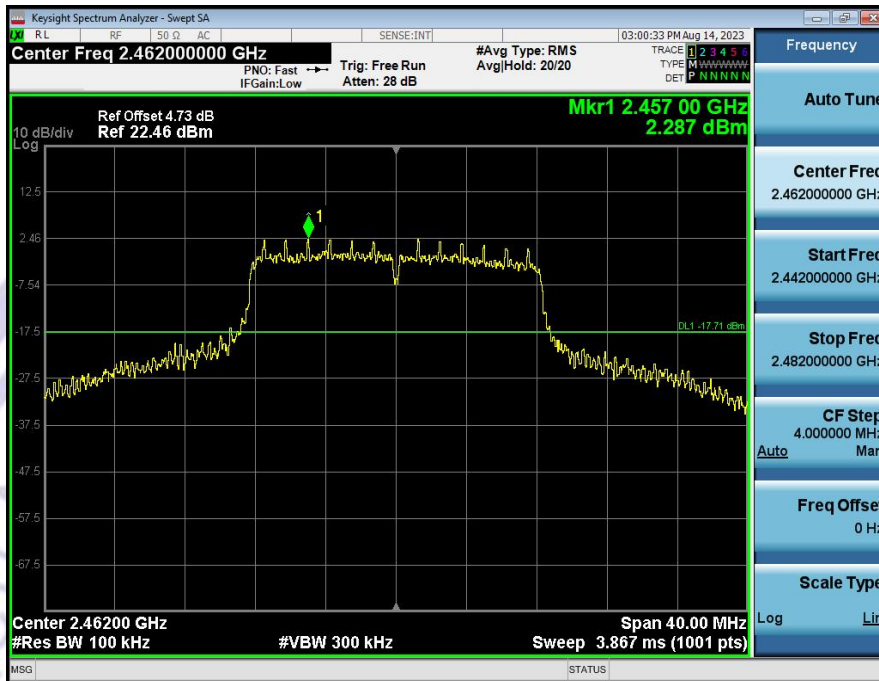






802.11n-HT20  
Low Channel

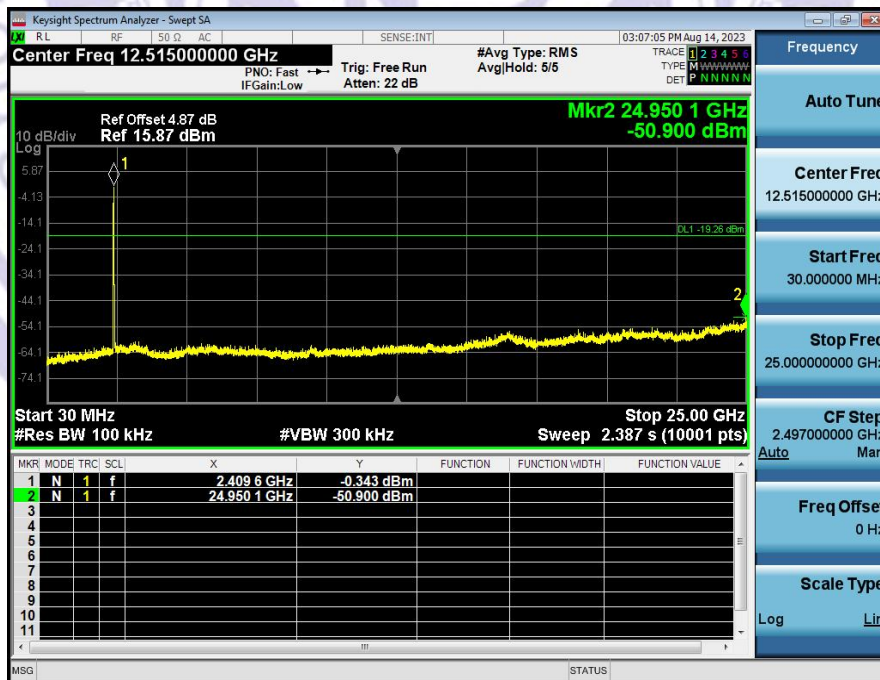


## Middle Channel

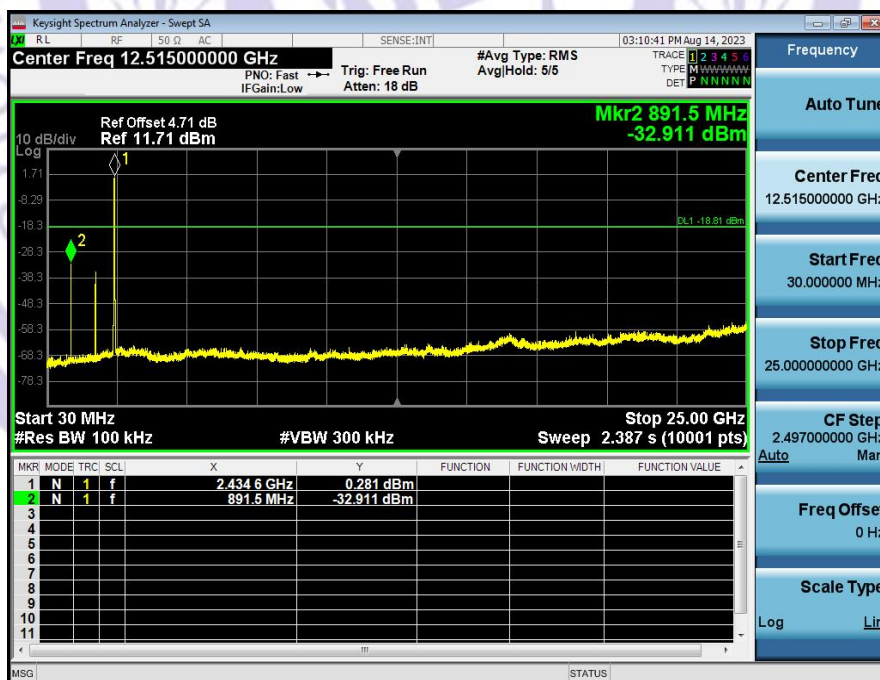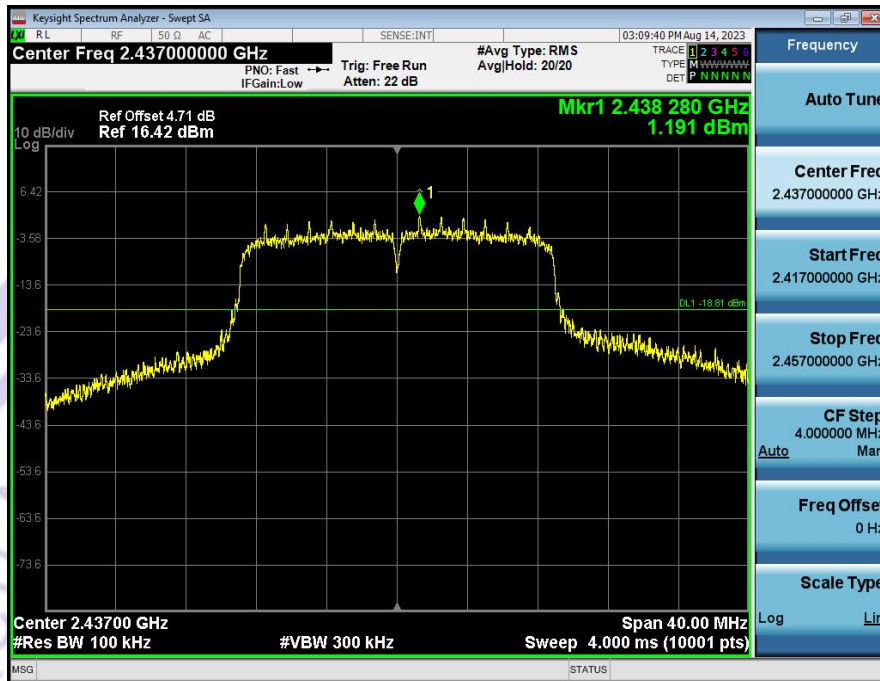


## High Channel

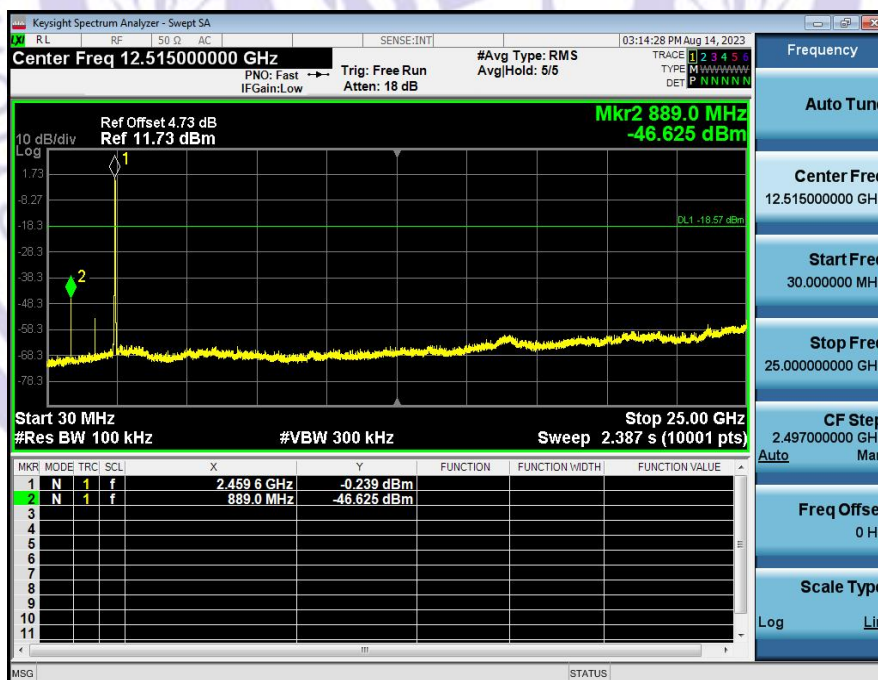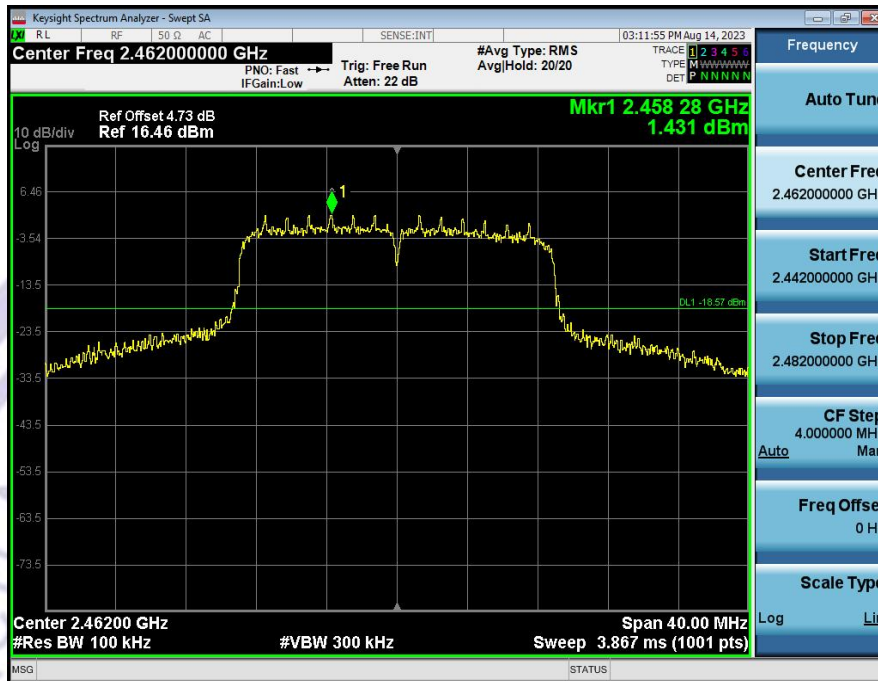

802.11n-HT40  
Low Channel

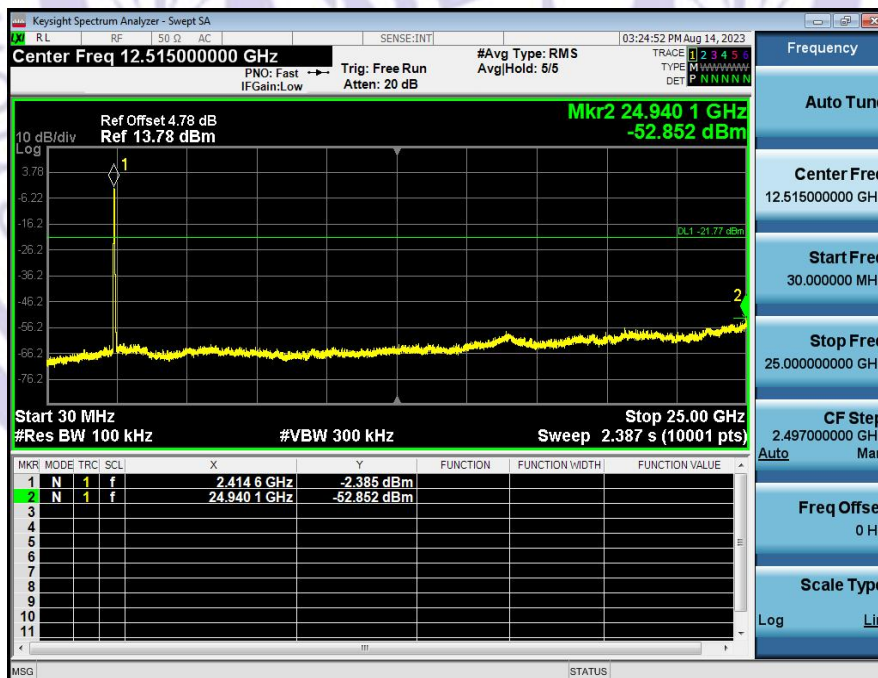

## Middle Channel

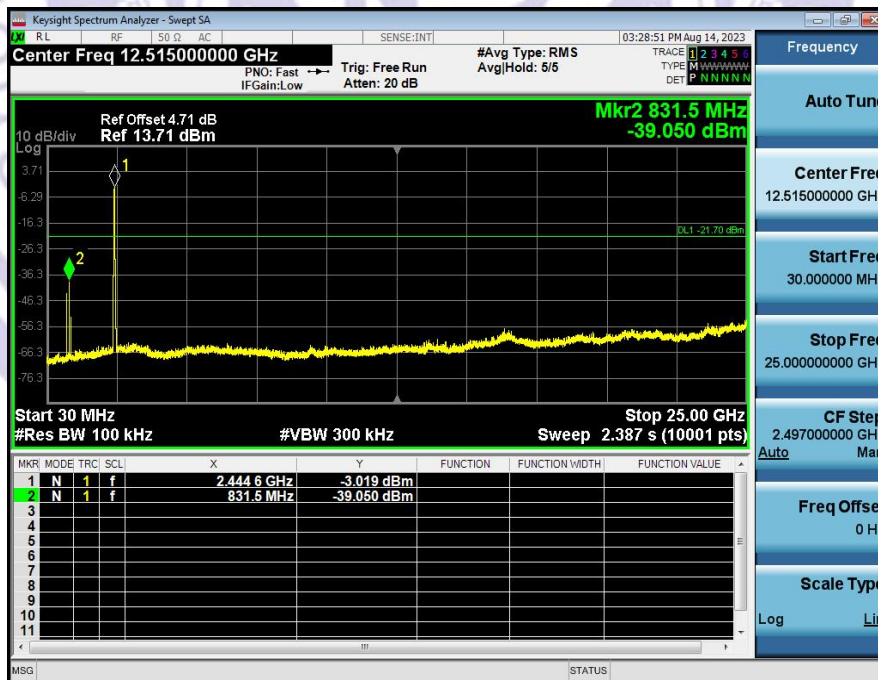

## High Channel

