



TEST REPORT

APPLICANT : Dongguan SmartAction Technology Co.,Ltd

PRODUCT NAME : High resolution music player

MODEL NAME : HiBy M300

BRAND NAME : HiBy

FCC ID : 2AOBQ-HIBYM300

STANDARD(S) : 47 CFR Part 15 Subpart E

RECEIPT DATE : 2023-10-16

TEST DATE : 2023-10-20 to 2023-11-03

ISSUE DATE : 2023-12-05



Edited by: Su Xiaoxian
Su Xiaoxian(Rapporteur)

Approved by: Shen Junsheng
Shen Junsheng(Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

- 1. Summary of Test Result 4
- 1.1. Testing Applied Standards 5
- 1.2. Test Equipment List 6
- 1.3. Measurement Uncertainty 8
- 1.4. Testing Laboratory 8
- 2. General Description 9
- 2.1. Information of Applicant and Manufacturer 9
- 2.2. Information of EUT 9
- 2.3. Channel List of EUT 10
- 2.4. Test Configuration of EUT 11
- 2.5. Test Conditions 11
- 2.6. Test Setup Layout Diagram 12
- 3. Test Results 15
- 3.1. Antenna Requirement 15
- 3.2. Duty Cycle of Test Signal 16
- 3.3. Maximum Conducted Output Power 17
- 3.4. Emission Bandwidth 19
- 3.5. Peak Power Spectral Density 21
- 3.6. Frequency Stability 22
- 3.7. Conducted Emission 23
- 3.8. Restricted Frequency Bands 24
- 3.9. Radiated Emission 26
- Annex A Test Data and Result 28



Change History		
Version	Date	Reason for change
1.0	2023-12-05	First edition



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	ANSI C63.10	Duty Cycle of the Test Signal	Oct. 25, 2023	Zhong Yanshan	PASS	No deviation
3	15.407(a)	Maximum Conducted Output Power	Oct. 25, 2023	Zhong Yanshan	PASS	No deviation
4	15.407(a)(e)	Emission Bandwidth	Oct. 25, 2023	Zhong Yanshan	PASS	No deviation
5	15.407(a)	Peak Power Spectral Density	Oct. 25, 2023	Zhong Yanshan	PASS	No deviation
6	15.407(g)	Frequency Stability	Oct. 25, 2023	Zhong Yanshan	PASS	No deviation
7	15.207	Conducted Emission	Oct. 21, 2023	Wang Deyong	PASS	No deviation
8	15.407(b)	Restricted Frequency Bands	Nov. 03, 2023	Li Hanbin	PASS	No deviation
9	15.407(b)	Radiated Emission	Nov. 03, 2023	Li Hanbin	PASS	No deviation

Note 1: The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10 2013.

Note 2: These RF tests were performed according to the method of measurements prescribed in KDB789033 D02 v02r01.

Note 3: These RF tests were performed according to the method of measurements prescribed in KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02.

Note 4: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 5: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.



1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart E Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2023.02.27	2024.02.26
USB Wideband Power Sensor	MY54180008	U2021XA	Agilent	2023.09.19	2024.09.18
Temperature Chamber	12108015	DTL-003S 101	YOMA	2023.09.19	2024.09.18
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Attenuator	MTJ6004-10	10dB	MTJ cooperation	N/A	N/A

1.2.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2023.02.09	2024.02.08
LISN	8127449	NSLK 8127	Schwarzbeck	2023.02.21	2024.02.20
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2023.06.27	2024.06.26
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	N/A	N/A

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
Morlab EMCR	Morlab	V1.2
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**1.2.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2023.06.21	2024.06.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2022.05.25	2025.05.24
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2022.02.11	2025.02.10
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2022.07.13	2025.07.12
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2022.07.14	2025.07.13
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2023.06.26	2024.06.27
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2023.06.26	2024.06.27
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-K K-0.5	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-K KF-2	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-N N-5	Qualwave	2023.07.04	2024.07.03
Notch Filter	N/A	WRCG-5150-5350	Wainwright	N/A	N/A
Notch Filter	N/A	WRCG-5725-5850	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Peak Output Power	±2.22dB	Confidence levels of 95%
Power Spectral Density	±2.22dB	Confidence levels of 95%
Bandwidth	±5%	Confidence levels of 95%
Restricted Frequency Bands	±5%	Confidence levels of 95%
Radiated Emission	±2.95dB	Confidence levels of 95%
Conducted Emission	±2.44dB	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone	+86 755 36698555
Facsimile	+86 755 36698525
FCC Designation Number	CN1192
FCC Test Firm Registration Number	226174



2. General Description

2.1. Information of Applicant and Manufacturer

Applicant	Dongguan SmartAction Technology Co.,Ltd
Applicant Address	Room 1201,Lianjing Commercial Building, No.39, Hongwei 3rd Road, Nancheng District, Dongguan, Guangdong, China
Manufacturer	SHENZHEN GR-VOICE TECHNOLOGY CO., LTD
Manufacturer Address	201,Building1,Anhao'ru industrial Park,NO.2,Jian'an Road,Tangwei Community,Fuhai Subdistrict,Bao'an District,Shenzhen,China

2.2. Information of EUT

Product Name:	High resolution music player	
Sample No.:	1#	
Hardware Version:	1.00	
Software Version:	1.0	
Modulation Technology:	OFDM	
Modulation Mode:	802.11a, 802.11n (HT20), 802.11n (HT40)	
Operating Frequency Range:	5180MHz-5240MHz; 5745MHz-5825MHz	
Antenna Type:	FPC Antenna	
Antenna Gain:	3.80dBi	
Accessory Information:	Battery	
	Brand Name:	N/A
	Model No.:	PL404185N
	Serial No.:	N/A
	Capacity:	2000mAh
	Rated Voltage:	3.85V
	Charge Limit:	4.4V
	Manufacturer:	Dongguan Yiming Electronic Technology Co., Ltd.

Note 1: We use the dedicated software to control the EUT continuous transmission.

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



2.3. Channel List of EUT

(U-NII-1) 5180MHz-5240MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	36	5180	40	5200
	44	5220	48	5240
40MHz	38	5190	46	5230
(U-NII-3) 5745MHz-5825MHz				
Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	149	5745	153	5765
	157	5785	161	5805
	165	5825		
40MHz	151	5775	159	5795

Note 1: The black bold channels were selected for test.



2.4. Test Configuration of EUT

2.4.1. Modulation Type and Data Rate of EUT

Mode	Bandwidth (MHz)	Modulation Technology	Modulation Type	Data Rate	RU Size
802.11a	20	OFDM	DBPSK	1/2/5.5/11Mbps	N/A
			DQPSK		
			CCK		
802.11n	20/40 (HT20/40)	OFDM	BPSK	MCS0~MCS7	N/A
			QPSK		
			16QAM		
			64QAM		

Note1: The worst-case mode (bold face) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.


2.5. Test Conditions

Temperature (°C)	15-35
Relative Humidity (%)	30-60
Atmospheric Pressure (kPa)	86-106


2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement


For power item that BW below 80MHz system:

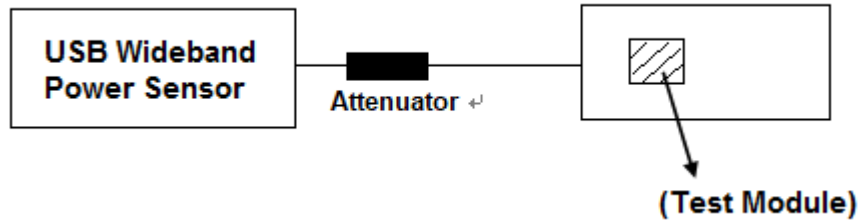

For power item that BW equal or above 80MHz and other items:

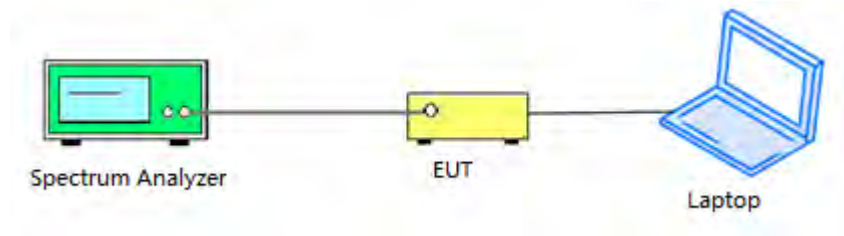


2.6.2. Conducted Emission Measurement

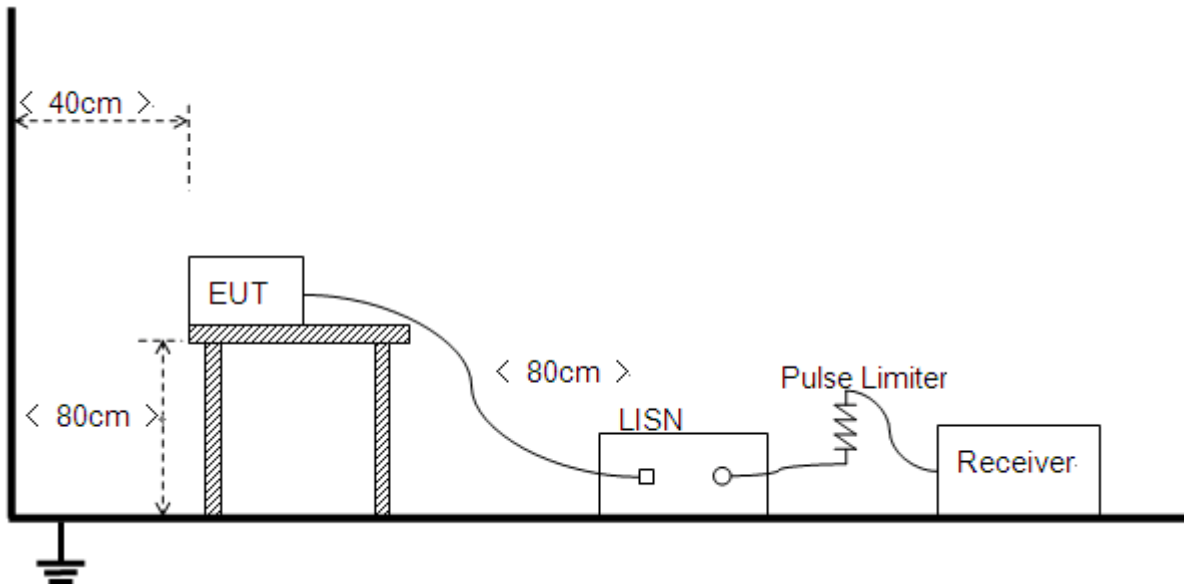


2.6.3.Radiation Measurement


1) For radiated emissions from 9kHz to 30MHz

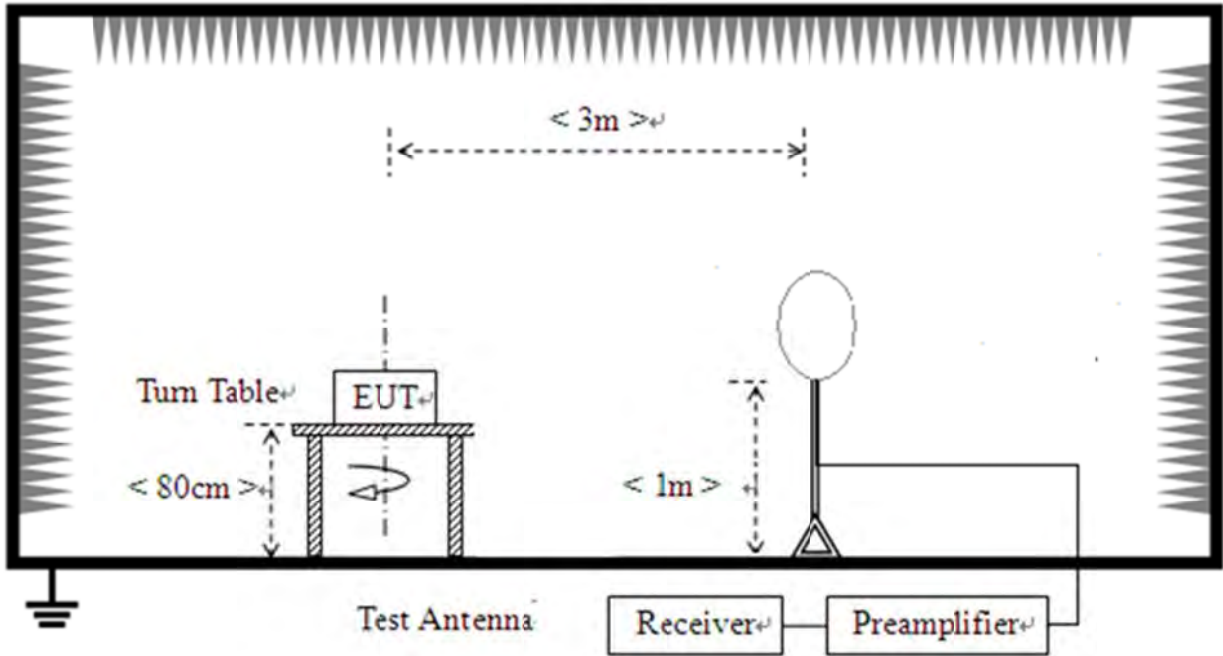

2) For radiated emissions from 30MHz to 1GHz

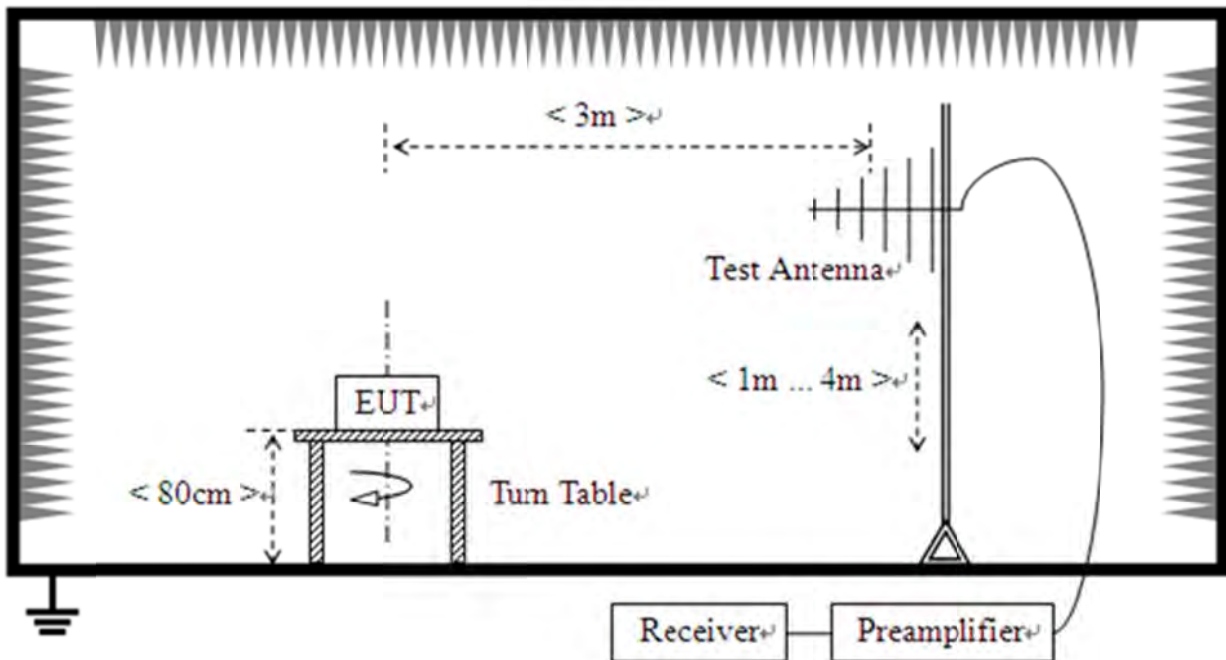

3) For radiated emissions above 1GHz

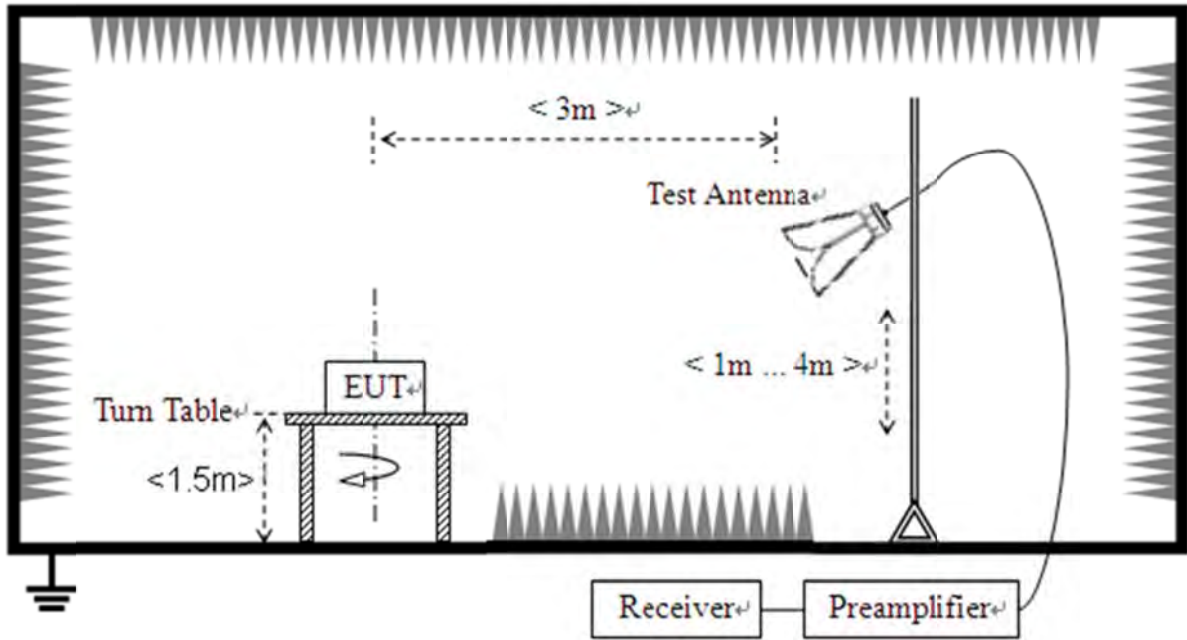



3. Test Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

The EUT has a FPC antenna coupled with the I-PEX connector. Please refer to the EUT photos.



3.2. Duty Cycle of Test Signal

3.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.2.2. Test Result

Refer to Annex A.1 in this report.



3.3. Maximum Conducted Output Power

3.3.1. Requirement

(1) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or 11dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(4) According to KDB662911D01 Measure-and-sum technique, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in units that are directly proportional to power.

(5) According to KDB 662911 D01, the directional gain = $G_{ANT} + 10\log(N_{ANT})$ dBi, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.

3.3.2. Test Procedures

Select of test method listed in the ANSI C63.10:

Instrument	Method	Chapter
Spectrum Analyzer	<input checked="" type="checkbox"/> Method SA-1	12.3.2.2
	<input type="checkbox"/> Method SA-1A(alternative)	12.3.2.3
	<input type="checkbox"/> Method SA-2	12.3.2.4
	<input type="checkbox"/> Method SA-2A(alternative)	12.3.2.5
	<input type="checkbox"/> Method SA-3	12.3.2.6
	<input type="checkbox"/> Method SA-3A(alternative)	12.3.2.7
Spectrum Analyzer	<input type="checkbox"/> Method PM	12.3.3.1
	<input checked="" type="checkbox"/> Method PM-G	12.3.3.2

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in USB Wideband Power Sensor.



For ac (VHT80) mode power

The EUT (Equipment under the test) is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

The internal ref offset of the spectrum analyzer already includes the duty factor.

3.3.3.Test Result

Refer to Annex A.2 in this report.



3.4. Emission Bandwidth

3.4.1. Requirement

For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement. Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

3.4.1. Test Procedures

1. KDB 789033 Section C) 1) Emission Bandwidth was used in order to prove compliance

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. KDB 789033 Section C) 2) minimum emission bandwidth for the band 5.725-5.85GHz was used in order to prove compliance.

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



REPORT No.: SZ23100095W03

3.4.2. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.3. Test Result

Refer to Annex A.3 in this report.



3.5. Peak Power Spectral Density

3.5.1. Requirement

(1) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30dBm in any 500kHz band.

If transmitting antennas of directional gain greater than 6dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(4) According to KDB662911D01 Measure-and-sum technique, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in units that are directly proportional to power.

(5) According to KDB 662911 D01, the directional gain = $G_{ANT} + 10\log(N_{ANT})$ dBi, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.

3.5.2. Test Procedures

KDB 789033 Section F) Maximum Power Spectral Density (PSD) Method SA-3 was used in order to prove compliance

- 1) Set span to encompass the entire 26-dB emission bandwidth
- 2) Set RBW = 1MHz. Set VBW \geq 3MHz
- 3) Number of points in sweep \geq 2 Span / RBW. Sweep time = auto
- 4) Detector = Average
- 5) Trace mode=Max hold

Record the max value

3.5.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.4. Test Result

Refer to Annex A.4 in this report.



3.6. Frequency Stability

3.6.1. Requirement

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3.6.2. Test Procedures

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between 5°C to 40°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

3.6.3. Test Result

Refer to Annex A.5 in this report.



3.7. Conducted Emission

3.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.7.2. Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.7.3. Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.7.4. Test Result

Refer to Annex A.7 in this report.



3.8. Restricted Frequency Bands

3.8.1. Requirement

The peak emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (3) For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

The following formula is used to convert the equipment isotropic radiated power(e.i.r.p.) to field strength (dBμV/m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz = 68.23 dBuV/m



Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).

3.8.2. Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

KDB 789033 Section H) 3)5)6(d)) was used in order to prove compliance

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

3.8.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.8.4. Test Result

Refer to Annex A.8 in this report.



3.9. Radiated Emission

3.9.1. Requirement

The peak emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (3) For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

The following formula is used to convert the equipment isotropic radiated power(e.i.r.p.) to field strength (dBμV/m);

$$E = 1000000 \times \sqrt{\frac{30P}{3}} \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz = 68.23 dBuV/m

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3



For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).

3.9.2.Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.9.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.9.4.Test Result

Refer to Annex A.9 in this report.



Annex A Test Data and Result


A.1. Duty Cycle of Test Signal

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	Ant1	98.16	0.08	0.49
NVNT	a	5220	Ant1	98.26	0.08	0.49
NVNT	a	5240	Ant1	98.26	0.08	0.49
NVNT	a	5745	Ant1	98.26	0.08	0.49
NVNT	a	5785	Ant1	98.16	0.08	0.49
NVNT	a	5825	Ant1	98.16	0.08	0.49
NVNT	n20	5180	Ant1	98.03	0.09	0.53
NVNT	n20	5220	Ant1	98.13	0.08	0.53
NVNT	n20	5240	Ant1	98.03	0.09	0.53
NVNT	n20	5745	Ant1	98.03	0.09	0.53
NVNT	n20	5785	Ant1	98.02	0.09	0.53
NVNT	n20	5825	Ant1	98.13	0.08	0.53
NVNT	n40	5190	Ant1	96.27	0.17	1.08
NVNT	n40	5230	Ant1	96.27	0.17	1.08
NVNT	n40	5755	Ant1	96.27	0.17	1.08
NVNT	n40	5795	Ant1	96.27	0.17	1.08




Test Graphs

Duty Cycle NVNT a 5180MHz Ant1

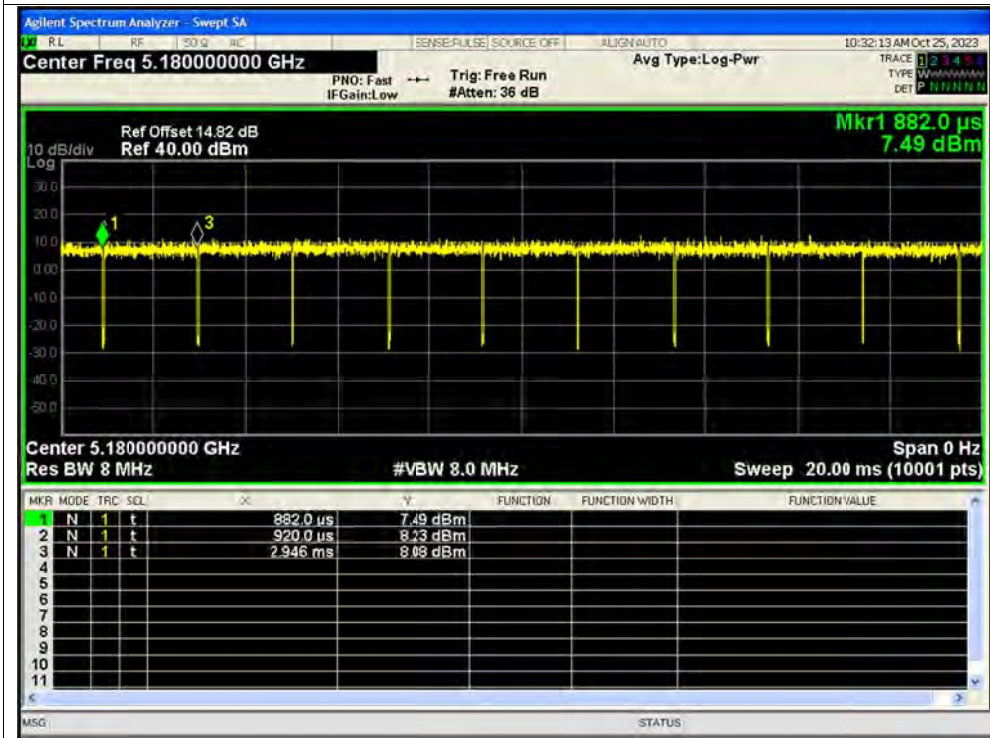


Duty Cycle NVNT a 5220MHz Ant1

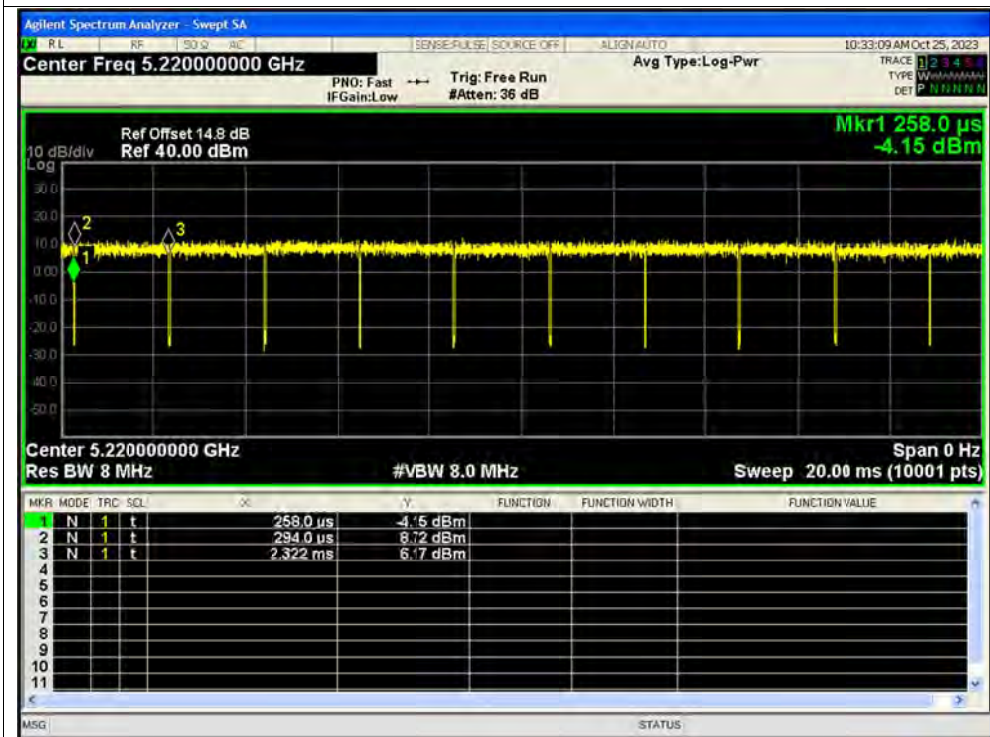




Duty Cycle NVNT a 5240MHz Ant1

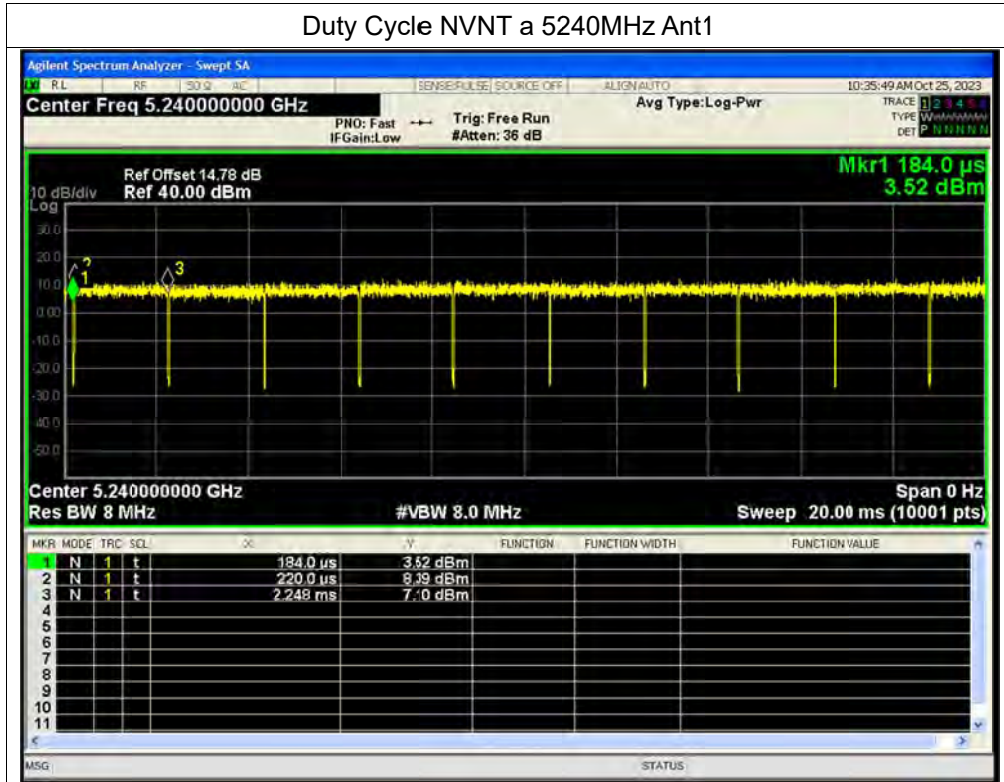


Duty Cycle NVNT a 5745MHz Ant1

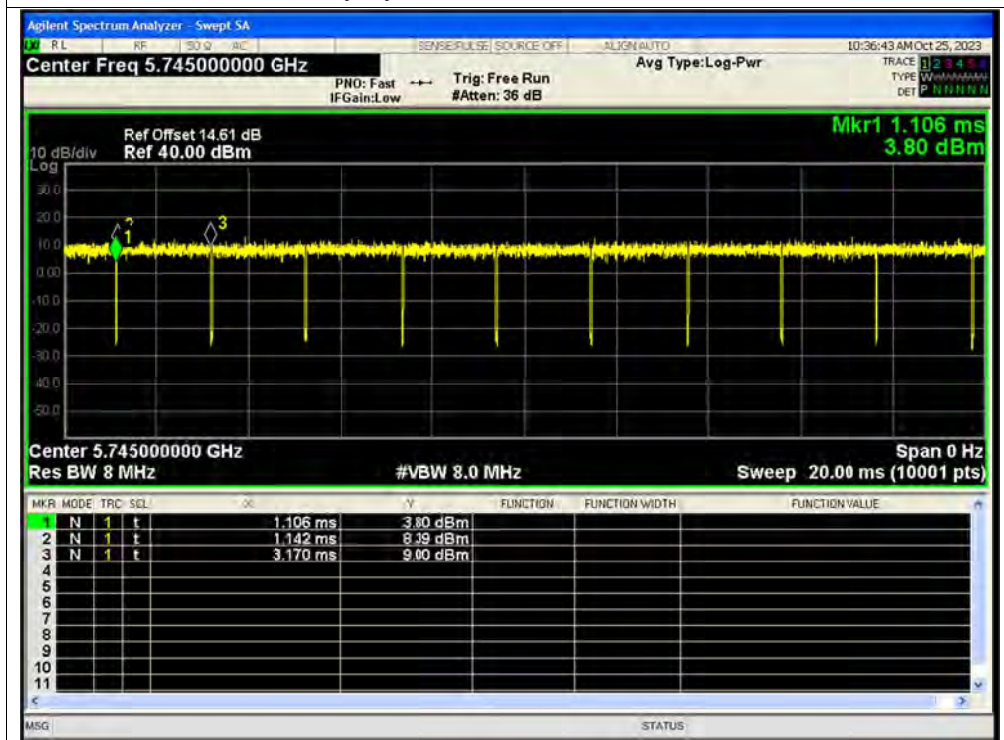




Duty Cycle NVNT a 5785MHz Ant1

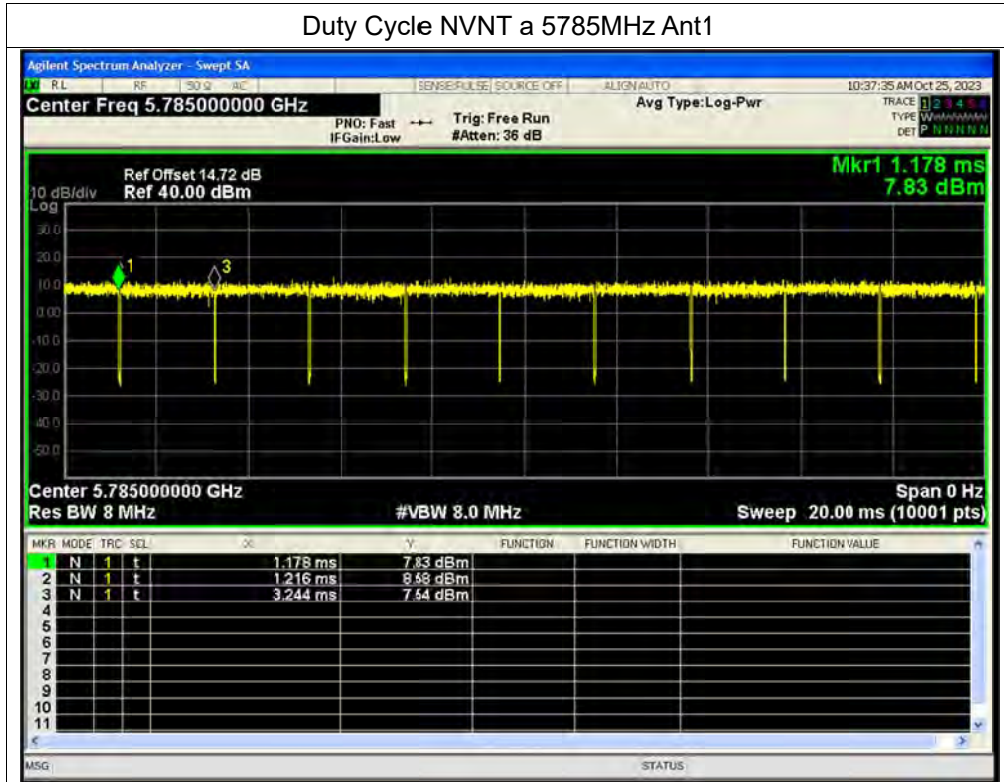


Duty Cycle NVNT a 5825MHz Ant1

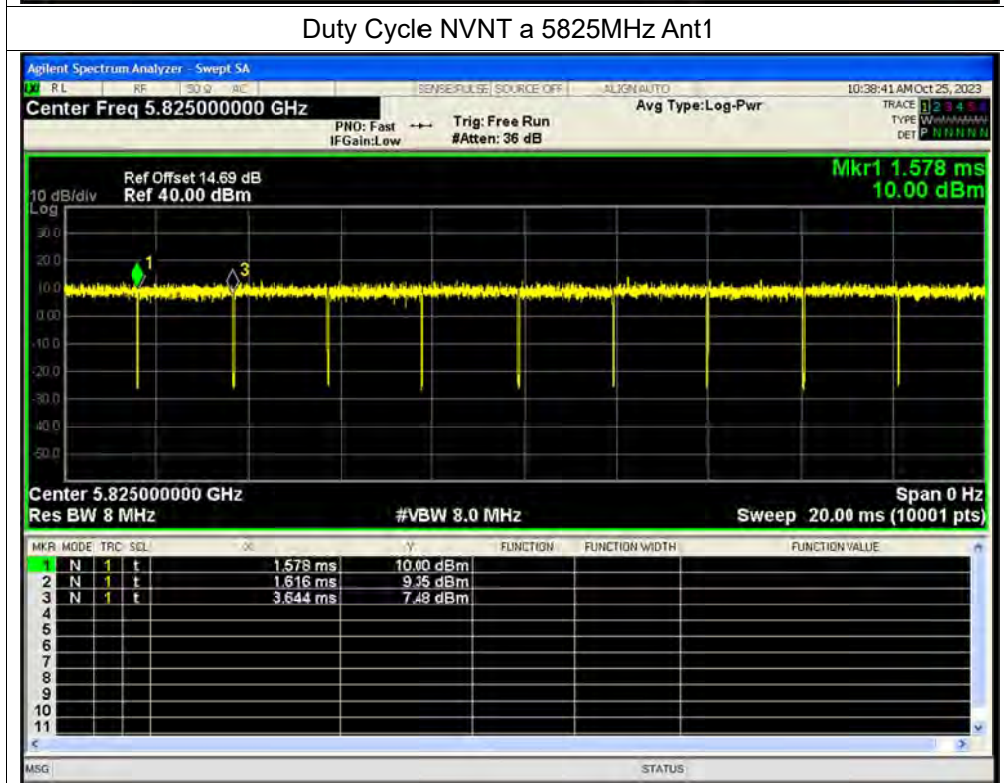




Duty Cycle NVNT n20 5180MHz Ant1

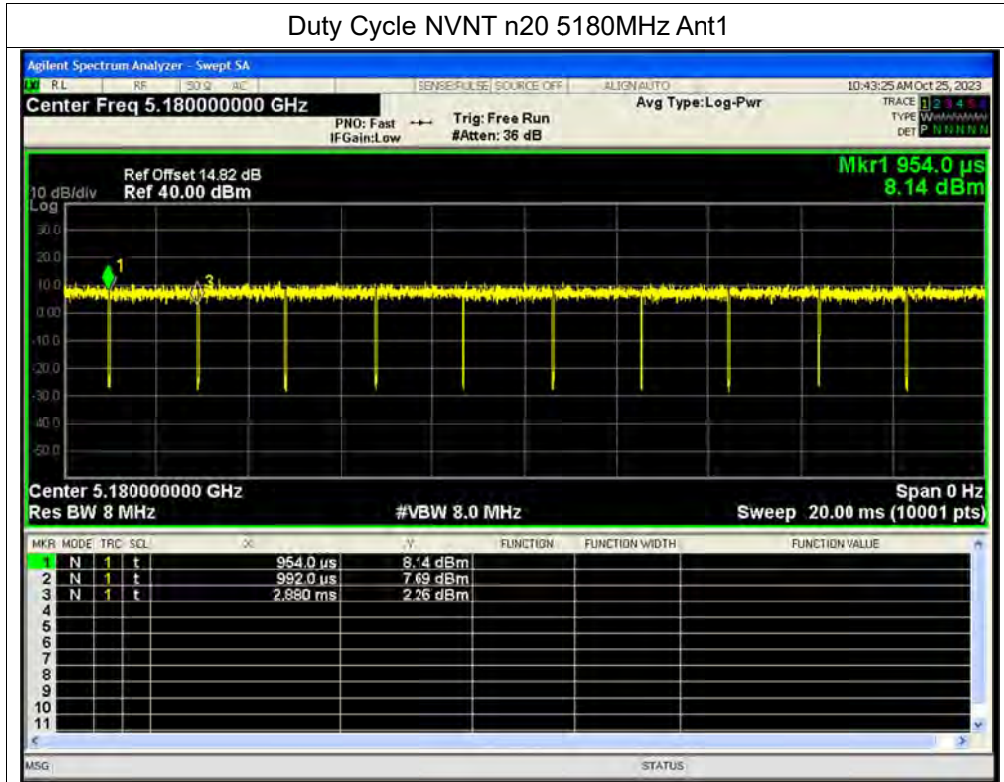


Duty Cycle NVNT n20 5220MHz Ant1

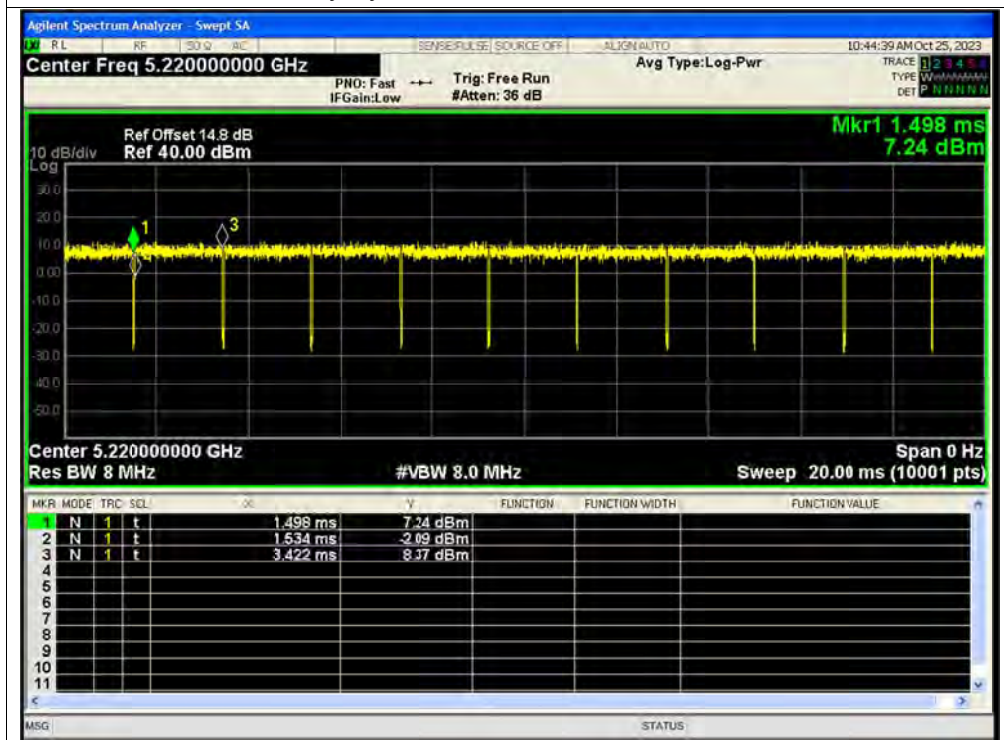




Duty Cycle NVNT n20 5240MHz Ant1

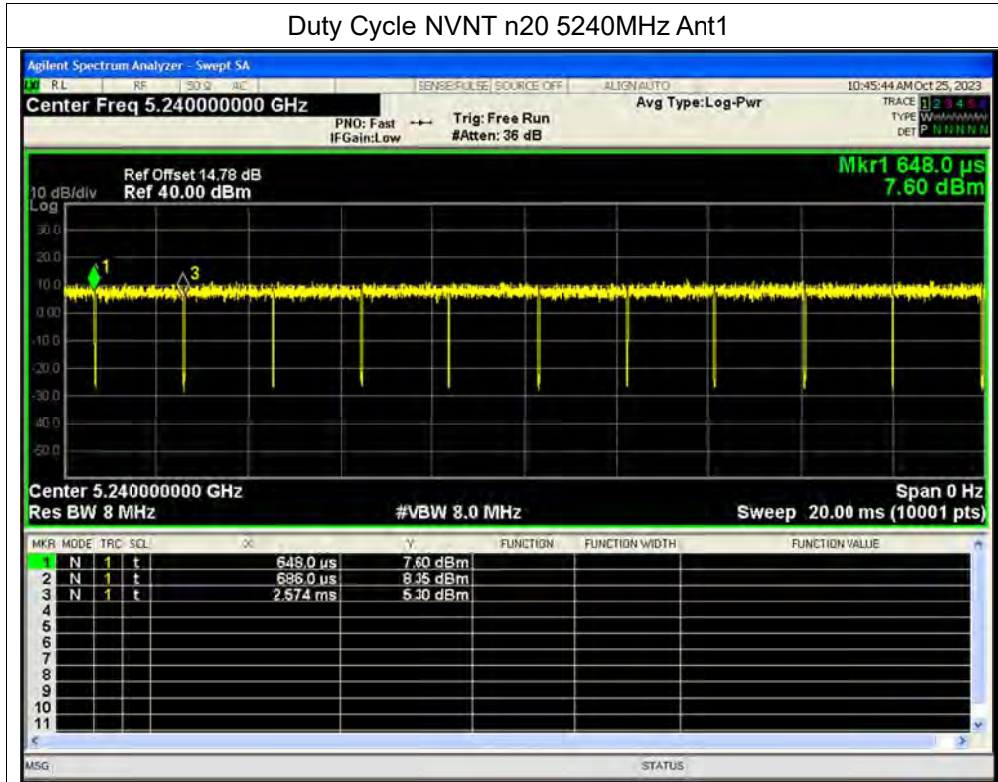


Duty Cycle NVNT n20 5745MHz Ant1

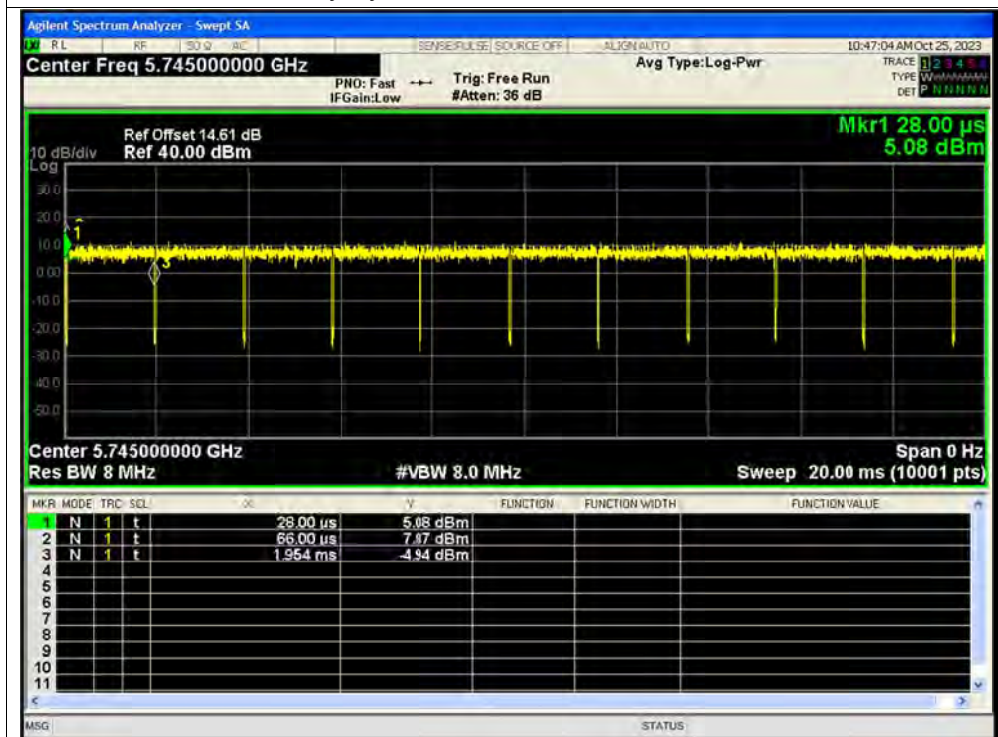




Duty Cycle NVNT n20 5785MHz Ant1

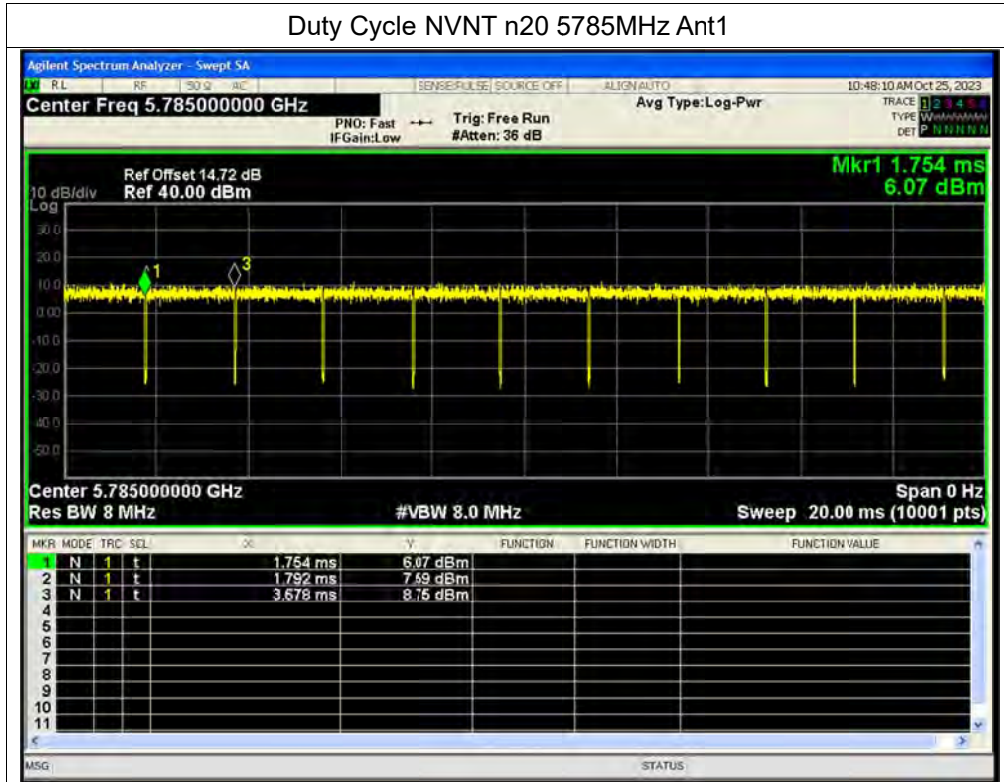


Duty Cycle NVNT n20 5825MHz Ant1

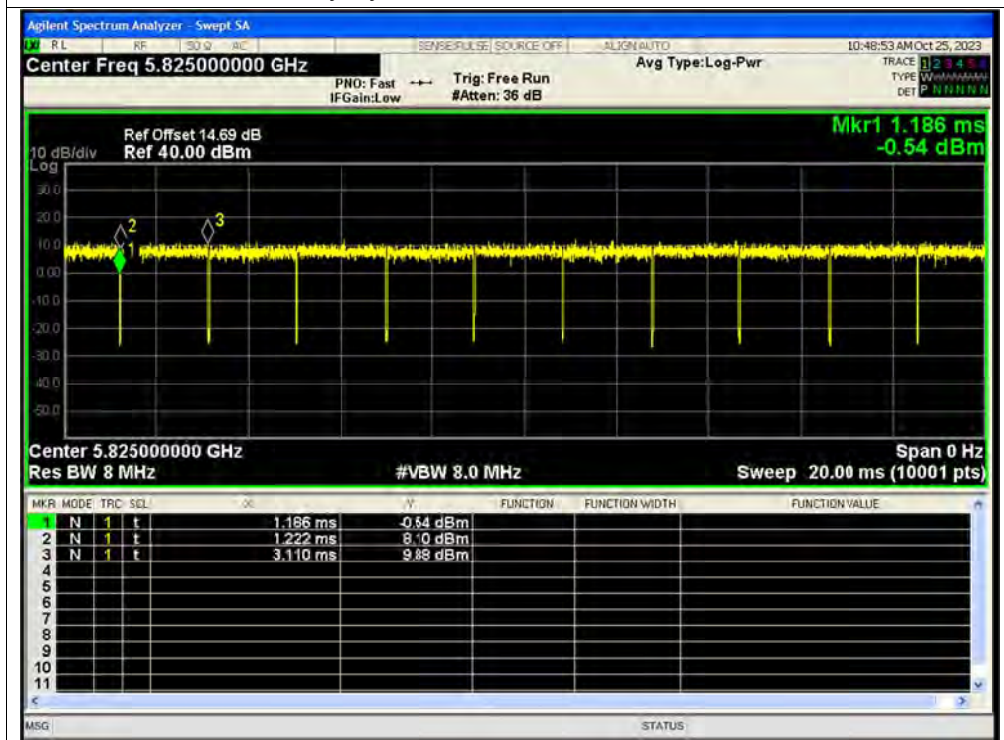




Duty Cycle NVNT n40 5190MHz Ant1

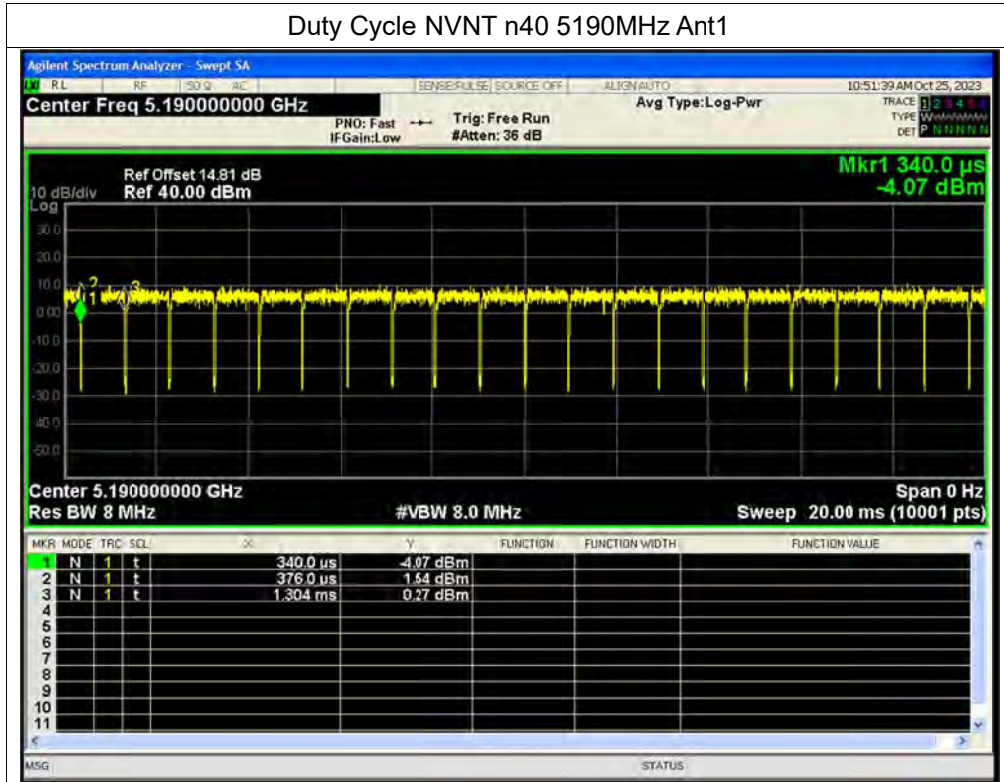


Duty Cycle NVNT n40 5230MHz Ant1

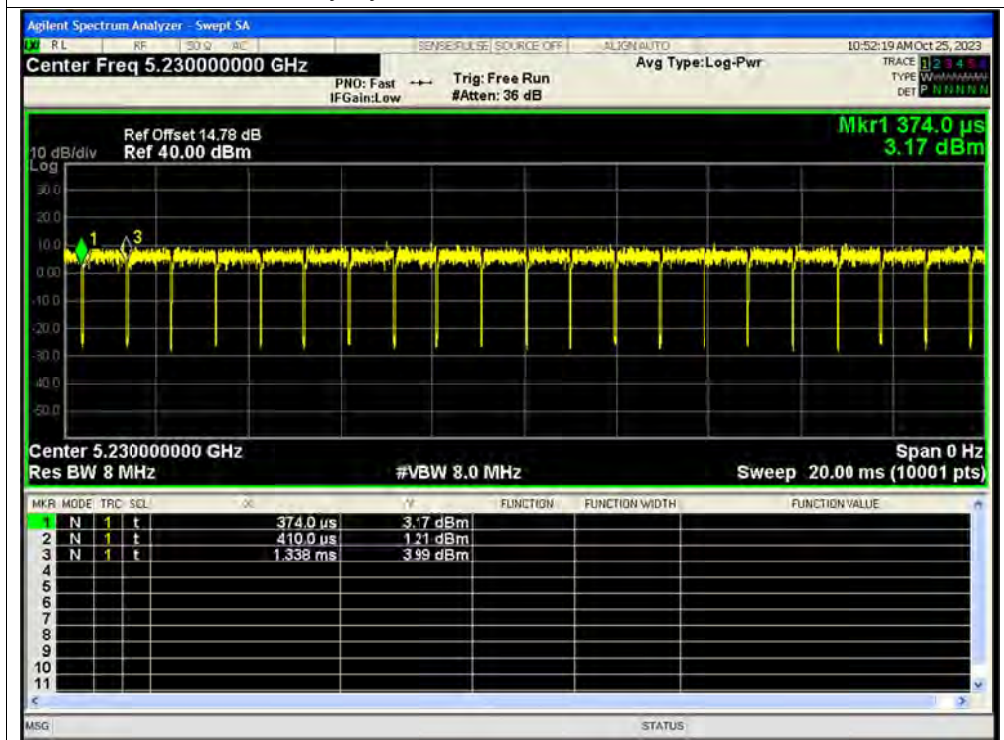




Duty Cycle NVNT n40 5755MHz Ant1

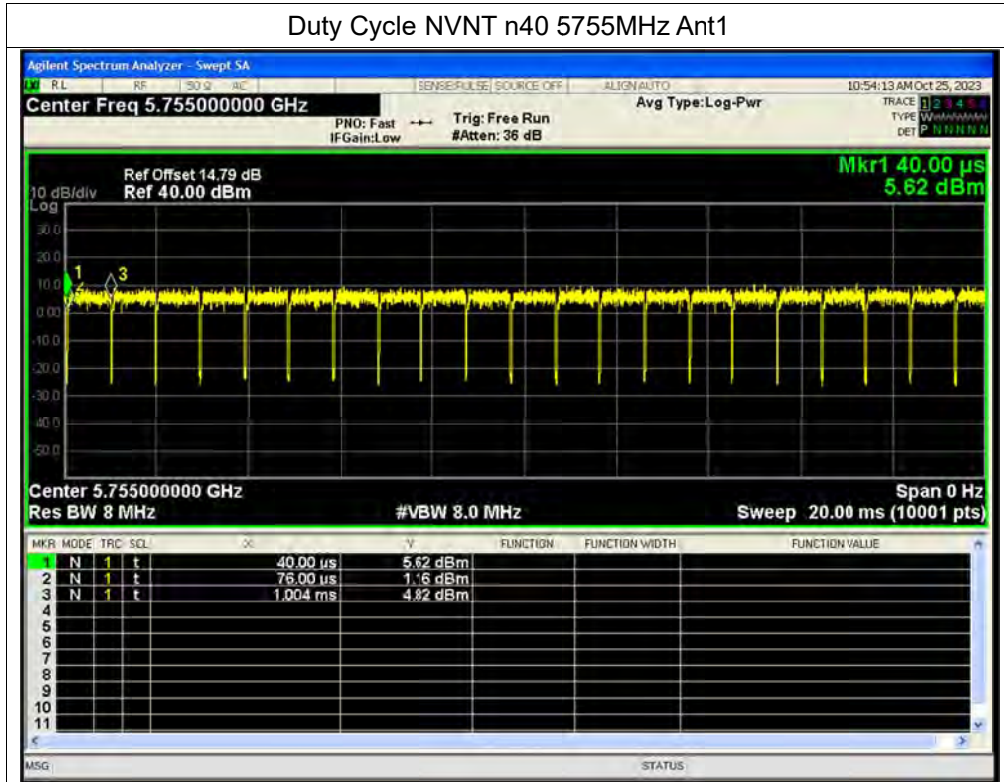

Duty Cycle NVNT n40 5795MHz Ant1

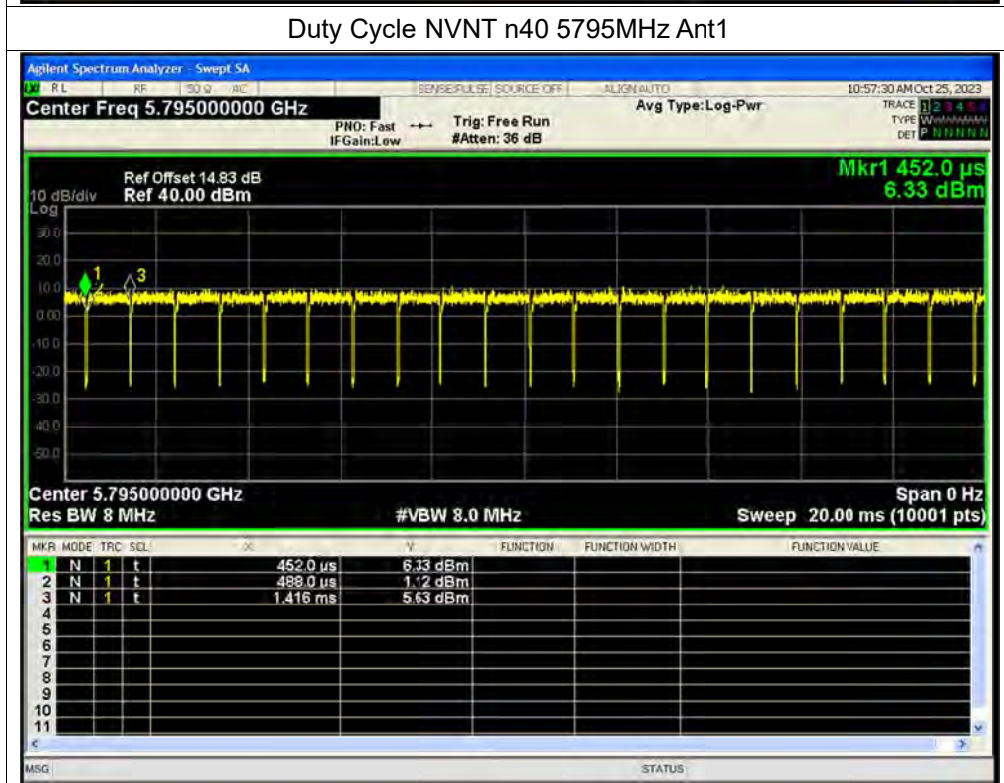

**A.2. Maximum Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted(dBm)	Verdict
NVNT	a	5180	Ant1	6.78	0.00476	24	Pass
NVNT	a	5220	Ant1	6.76	0.00474	24	Pass
NVNT	a	5240	Ant1	6.76	0.00474	24	Pass
NVNT	a	5745	Ant1	7.29	0.00536	30	Pass
NVNT	a	5785	Ant1	7.07	0.00509	30	Pass
NVNT	a	5825	Ant1	7.15	0.00519	30	Pass
NVNT	n20	5180	Ant1	6.7	0.00468	24	Pass
NVNT	n20	5220	Ant1	6.8	0.00479	24	Pass
NVNT	n20	5240	Ant1	6.58	0.00455	24	Pass
NVNT	n20	5745	Ant1	6.74	0.00472	30	Pass
NVNT	n20	5785	Ant1	6.6	0.00457	30	Pass
NVNT	n20	5825	Ant1	6.57	0.00454	30	Pass
NVNT	n40	5190	Ant1	7.22	0.00527	24	Pass
NVNT	n40	5230	Ant1	6.97	0.00498	24	Pass
NVNT	n40	5755	Ant1	7.38	0.00547	30	Pass
NVNT	n40	5795	Ant1	7.23	0.00528	30	Pass



A.3. Emission Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	22.685	Pass
NVNT	a	5220	Ant1	23.45	Pass
NVNT	a	5240	Ant1	23.243	Pass
NVNT	n20	5180	Ant1	24.1	Pass
NVNT	n20	5220	Ant1	23.809	Pass
NVNT	n20	5240	Ant1	23.912	Pass
NVNT	n40	5190	Ant1	41.532	Pass
NVNT	n40	5230	Ant1	41.133	Pass



Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	16.282	0.5	Pass
NVNT	a	5785	Ant1	15.564	0.5	Pass
NVNT	a	5825	Ant1	15.894	0.5	Pass
NVNT	n20	5745	Ant1	16.165	0.5	Pass
NVNT	n20	5785	Ant1	14.975	0.5	Pass
NVNT	n20	5825	Ant1	15.596	0.5	Pass
NVNT	n40	5755	Ant1	35.352	0.5	Pass
NVNT	n40	5795	Ant1	35.715	0.5	Pass



Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant1




-26dB Bandwidth NVNT a 5220MHz Ant1






-26dB Bandwidth NVNT a 5240MHz Ant1

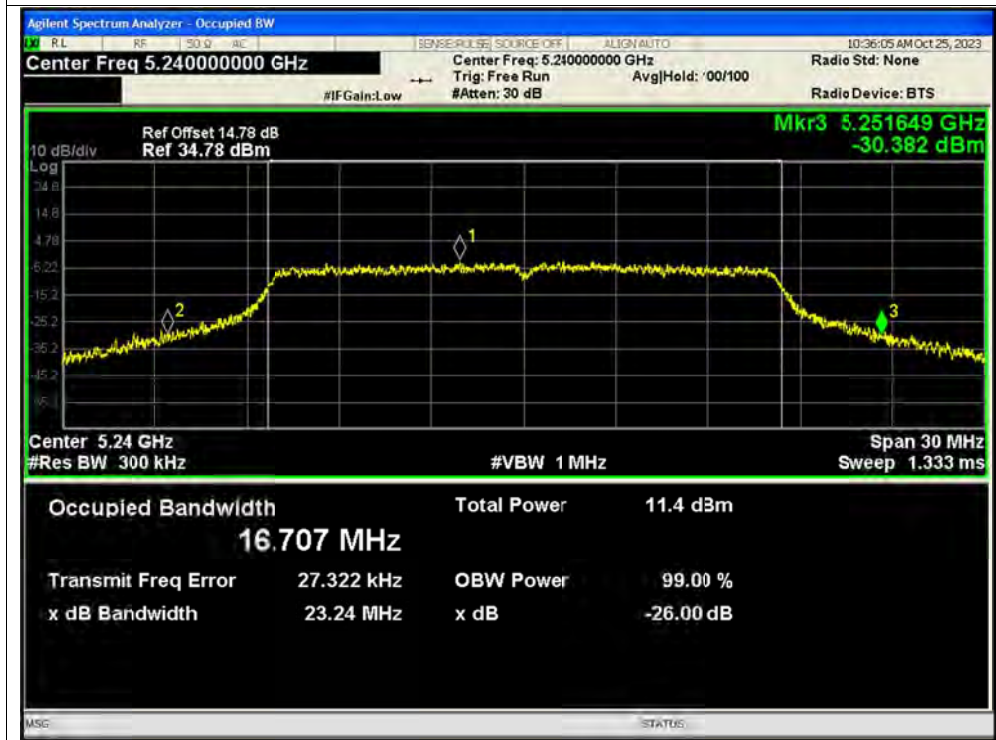


-26dB Bandwidth NVNT n20 5180MHz Ant1

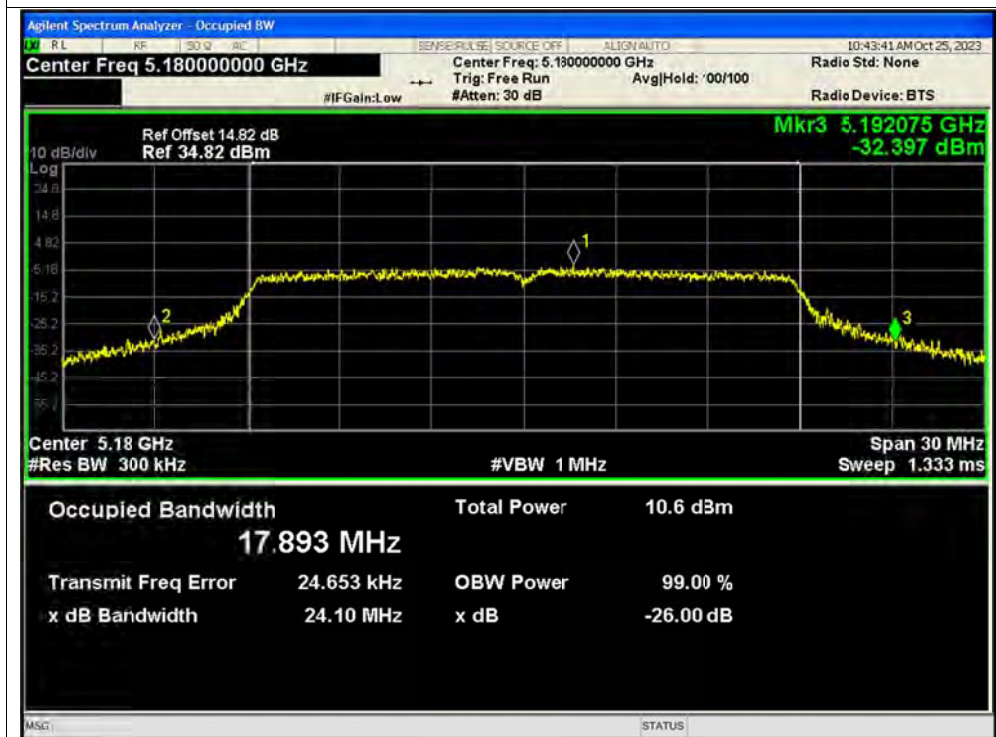



-26dB Bandwidth NVNT n20 5220MHz Ant1

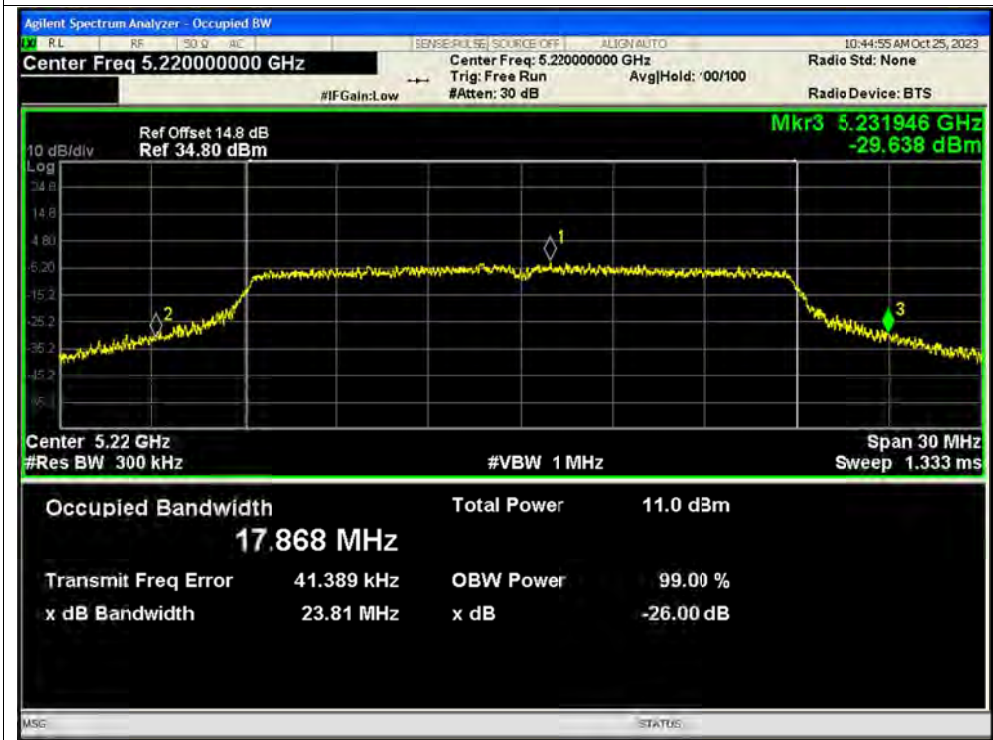

-26dB Bandwidth NVNT n20 5240MHz Ant1






-26dB Bandwidth NVNT n40 5190MHz Ant1



-26dB Bandwidth NVNT n40 5230MHz Ant1

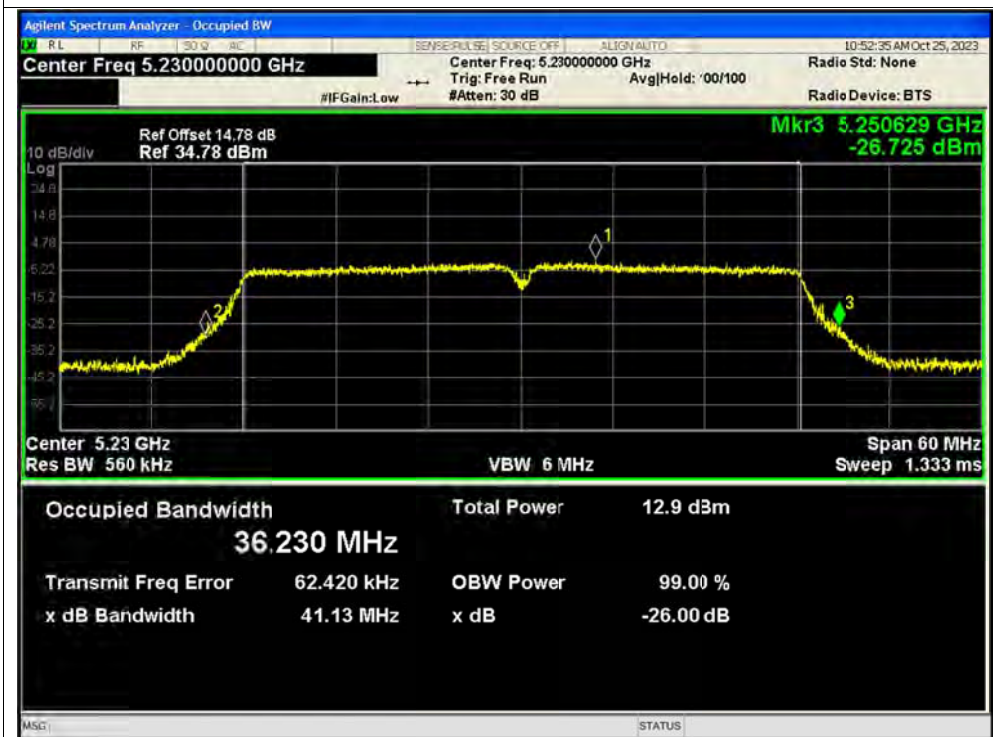




Test Graphs

-6dB Bandwidth NVNT a 5745MHz Ant1




-6dB Bandwidth NVNT a 5785MHz Ant1

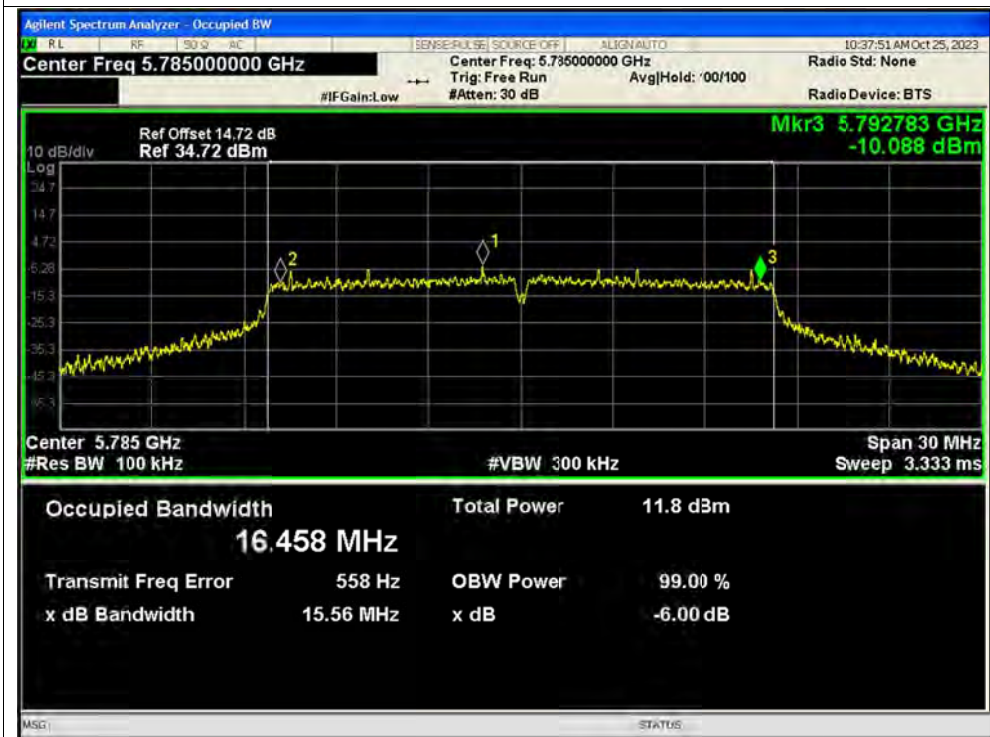




-6dB Bandwidth NVNT a 5825MHz Ant1

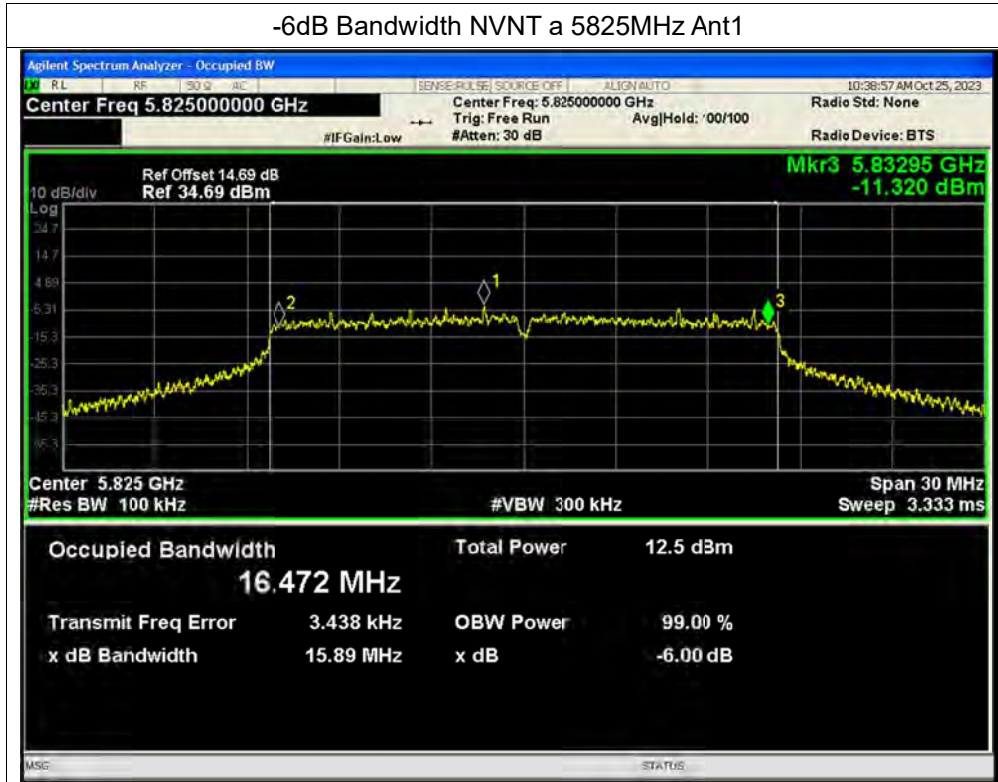


-6dB Bandwidth NVNT n20 5745MHz Ant1

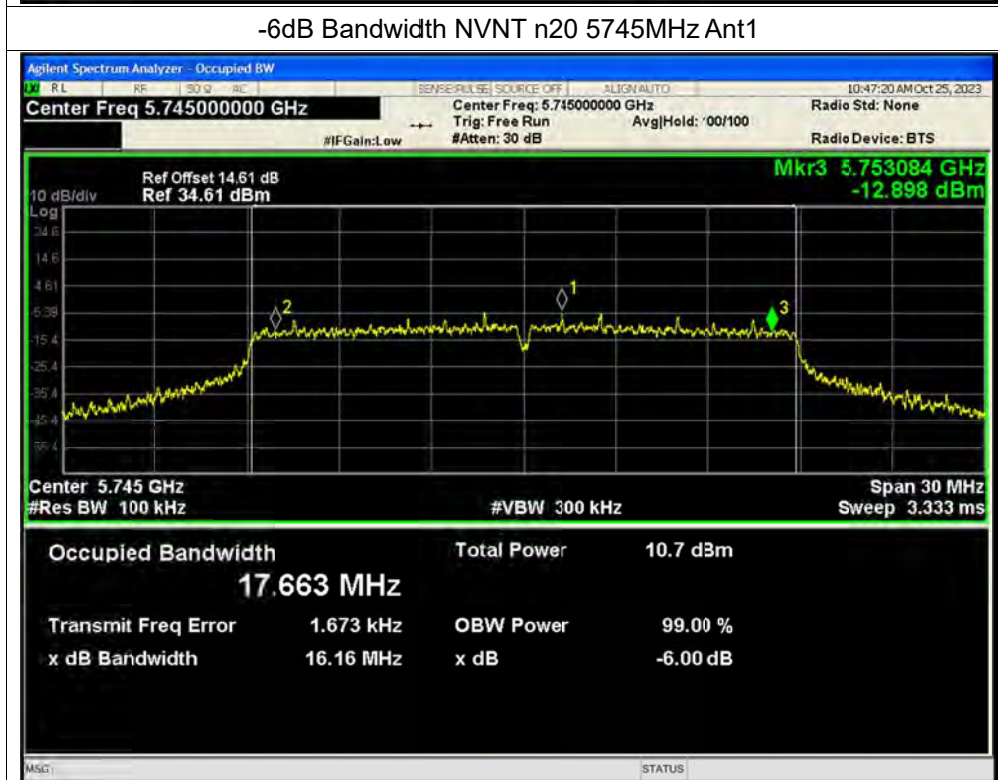




-6dB Bandwidth NVNT n20 5785MHz Ant1

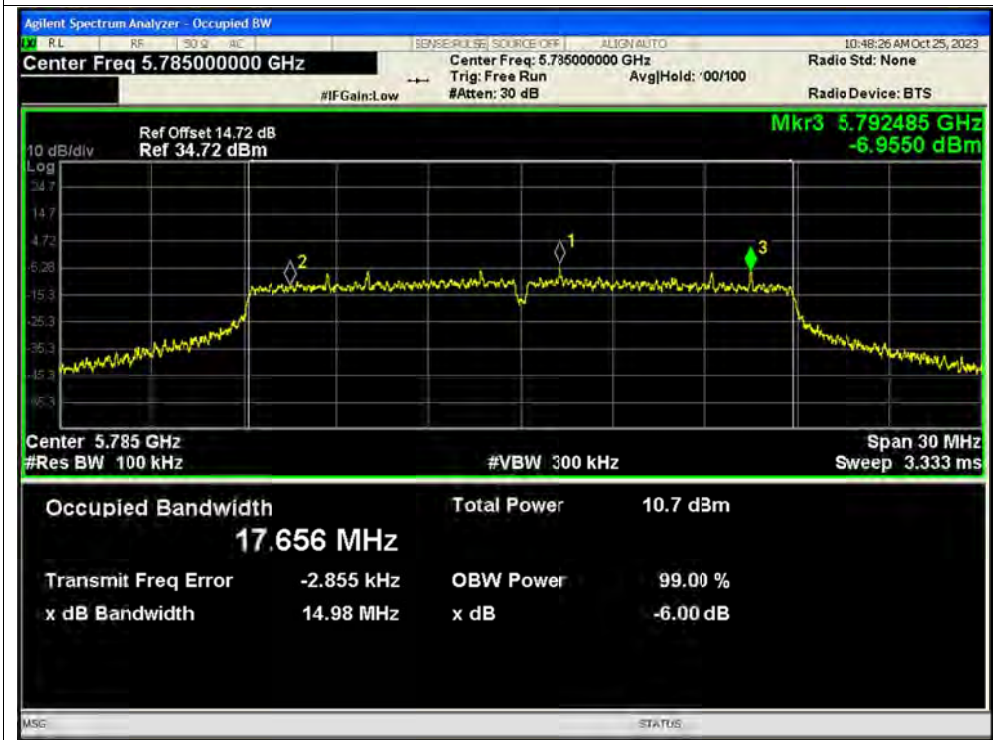


-6dB Bandwidth NVNT n20 5825MHz Ant1

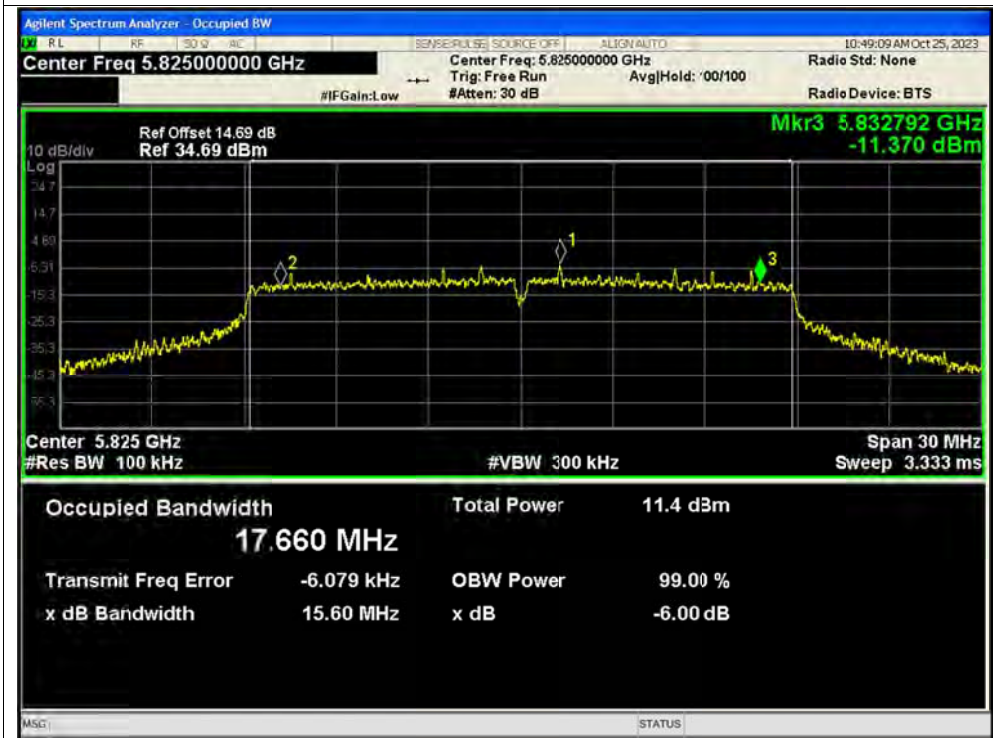



-6dB Bandwidth NVNT n40 5755MHz Ant1

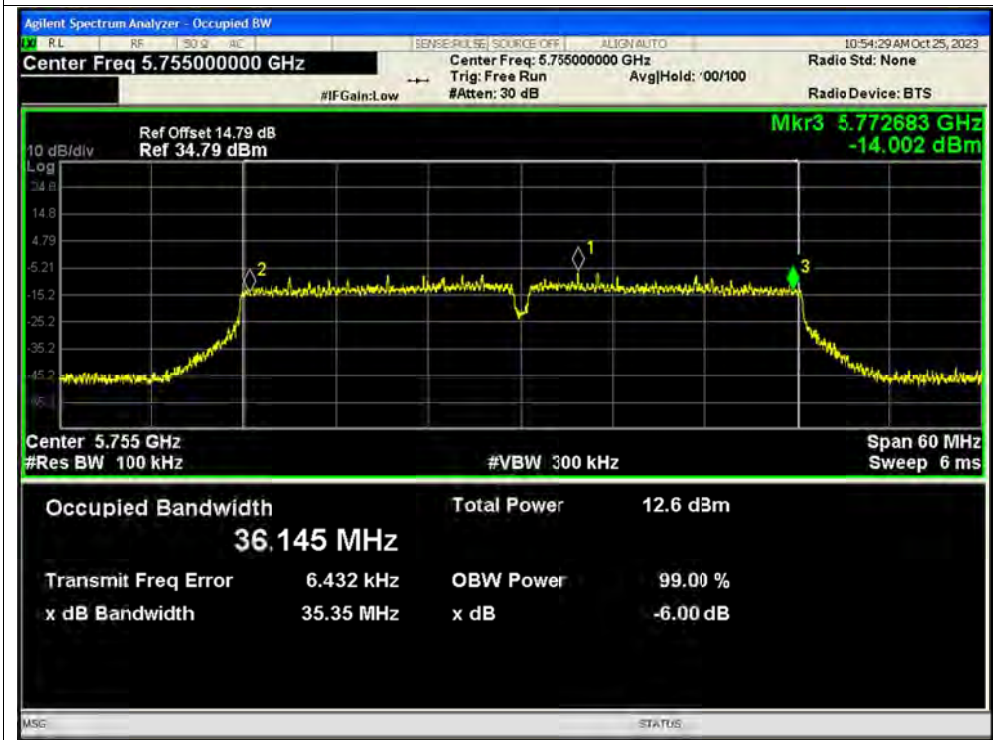

-6dB Bandwidth NVNT n40 5795MHz Ant1



**A.4. Peak Power Spectral Density**

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	-5.68	0.08	-5.6	11	Pass
NVNT	a	5220	Ant1	-5.35	0.08	-5.27	11	Pass
NVNT	a	5240	Ant1	-5.06	0.08	-4.98	11	Pass
NVNT	a	5745	Ant1	-7.61	0.08	-7.53	30	Pass
NVNT	a	5785	Ant1	-7.62	0.08	-7.54	30	Pass
NVNT	a	5825	Ant1	-7.02	0.08	-6.94	30	Pass
NVNT	n20	5180	Ant1	-6.19	0.09	-6.1	11	Pass
NVNT	n20	5220	Ant1	-5.78	0.08	-5.7	11	Pass
NVNT	n20	5240	Ant1	-5.49	0.09	-5.4	11	Pass
NVNT	n20	5745	Ant1	-9.11	0.09	-9.02	30	Pass
NVNT	n20	5785	Ant1	-8.99	0.09	-8.9	30	Pass
NVNT	n20	5825	Ant1	-8.27	0.08	-8.19	30	Pass
NVNT	n40	5190	Ant1	-7.31	0.17	-7.14	11	Pass
NVNT	n40	5230	Ant1	-7.15	0.17	-6.98	11	Pass
NVNT	n40	5755	Ant1	-10.33	0.17	-10.15	30	Pass
NVNT	n40	5795	Ant1	-9.96	0.17	-9.79	30	Pass



Test Graphs

PSD NVNT a 5180MHz Ant1



PSD NVNT a 5220MHz Ant1



PSD NVNT a 5240MHz Ant1



PSD NVNT a 5745MHz Ant1





PSD NVNT a 5785MHz Ant1



PSD NVNT a 5825MHz Ant1





PSD NVNT n20 5180MHz Ant1



PSD NVNT n20 5220MHz Ant1





PSD NVNT n20 5240MHz Ant1



PSD NVNT n20 5745MHz Ant1





PSD NVNT n20 5785MHz Ant1



PSD NVNT n20 5825MHz Ant1





PSD NVNT n40 5190MHz Ant1




PSD NVNT n40 5230MHz Ant1





PSD NVNT n40 5755MHz Ant1

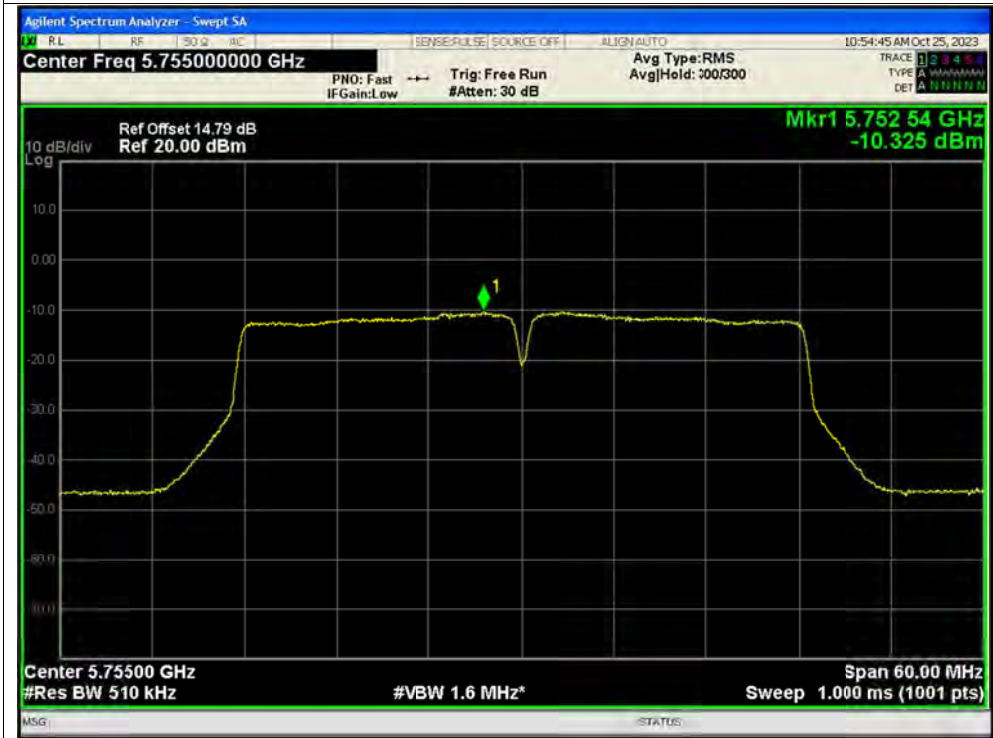

PSD NVNT n40 5795MHz Ant1



**A.5. Frequency Stability**

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
20C 3V	Carrier	5180	Ant1	5179.996	-4000	-0.77	25	Pass
20C 4.4V	Carrier	5180	Ant1	5179.996	-4000	-0.77	25	Pass
0C 3.85V	Carrier	5180	Ant1	5179.996	-4000	-0.77	25	Pass
10C 3.85V	Carrier	5180	Ant1	5179.996	-4000	-0.77	25	Pass
20C 3.85V	Carrier	5180	Ant1	5179.995	-5000	-0.97	25	Pass
30C 3.85V	Carrier	5180	Ant1	5179.995	-5000	-0.97	25	Pass
40C 3.85V	Carrier	5180	Ant1	5179.995	-5000	-0.97	25	Pass
45C 3.85V	Carrier	5180	Ant1	5179.995	-5000	-0.97	25	Pass
20C 3V	Carrier	5745	Ant1	5744.993	-7000	-1.22	25	Pass
20C 4.4V	Carrier	5745	Ant1	5744.993	-7000	-1.22	25	Pass
0C 3.85V	Carrier	5745	Ant1	5744.993	-7000	-1.22	25	Pass
10C 3.85V	Carrier	5745	Ant1	5744.993	-7000	-1.22	25	Pass
20C 3.85V	Carrier	5745	Ant1	5744.992	-8000	-1.39	25	Pass
30C 3.85V	Carrier	5745	Ant1	5744.992	-8000	-1.39	25	Pass
40C 3.85V	Carrier	5745	Ant1	5744.992	-8000	-1.39	25	Pass
45C 3.85V	Carrier	5745	Ant1	5744.992	-8000	-1.39	25	Pass



A.6. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT+PC+PC Adapter+USB Cable+Earphone+WIFI TX

Test voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plot:

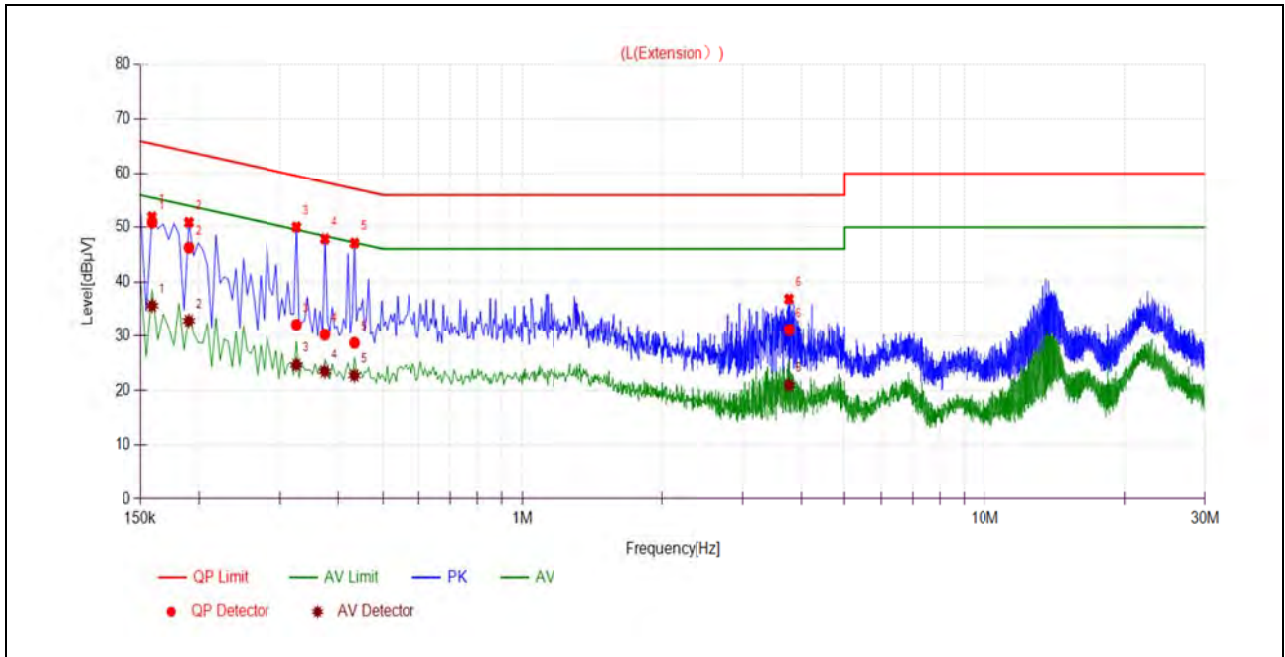

(L Phase)

No.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1590	50.86	35.60	65.52	55.52	Line	PASS
2	0.1905	46.22	32.79	64.01	54.01		PASS
3	0.3254	32.05	24.62	59.57	49.57		PASS
4	0.3746	30.24	23.41	58.40	48.40		PASS
5	0.4335	28.69	22.65	57.18	47.18		PASS
6	3.7661	31.11	20.89	56.00	46.00		PASS

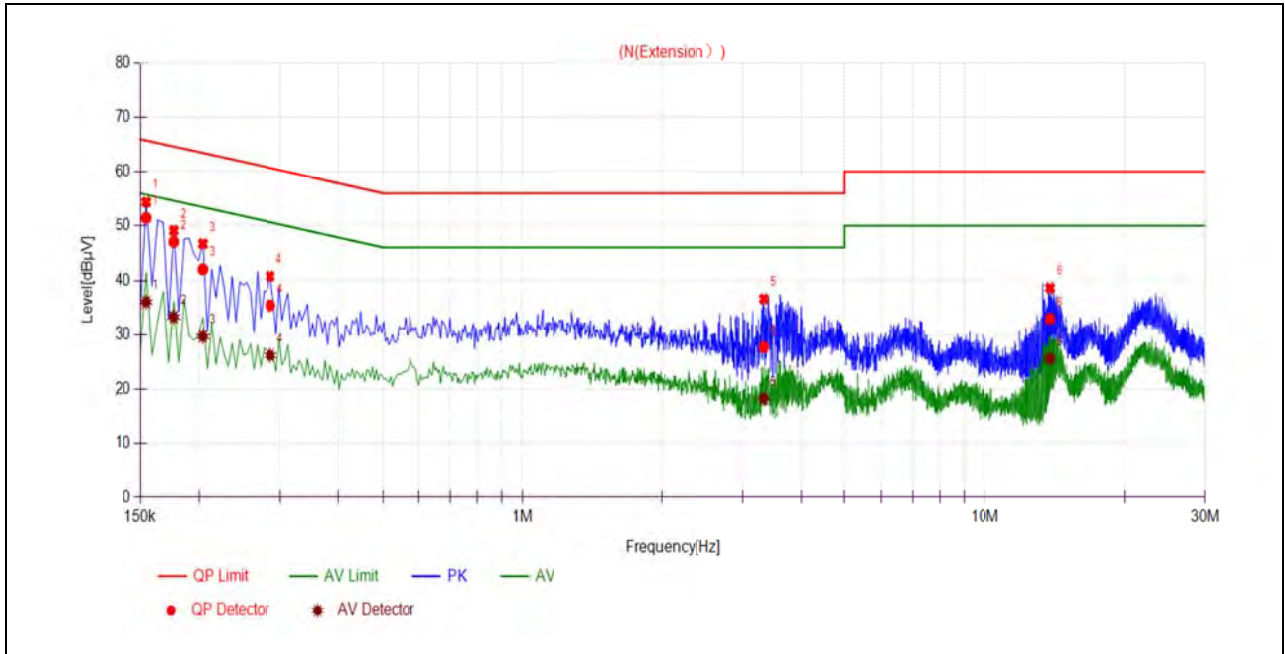

(N Phase)

No.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1544	51.45	36.08	65.76	55.76	Neutral	PASS
2	0.1769	47.04	33.31	64.63	54.63		PASS
3	0.2039	42.08	29.73	63.45	53.45		PASS
4	0.2851	35.44	26.23	60.67	50.67		PASS
5	3.3249	27.75	18.21	56.00	46.00		PASS
6	13.8351	32.99	25.59	60.00	50.00		PASS



A.7. Restricted Frequency Bands

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain


A_{Factor} : Antenna Factor at 3m

Note 1: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


Note 2 All test modes and bandwidth were considered and evaluated respectively by performing full test, only the worst data were recorded for each bandwidth.

802.11a Mode


Channel	Frequency (MHz)	Detector	Receiver Reading	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV	U_R (dB μ V)					
36	5147.36	PK	45.57	-19.54	32.20	58.23	74	PASS
36	5124.00	AV	34.01	-19.54	32.20	46.67	54	PASS
48	5435.36	PK	43.43	-19.54	32.20	56.09	74	PASS
48	5414.46	AV	32.44	-19.54	32.20	45.10	54	PASS
149	5725.00	PK	44.69	-19.01	32.20	57.88	122.23	PASS
165	5880.00	PK	43.72	-19.01	32.20	56.91	101.53	PASS

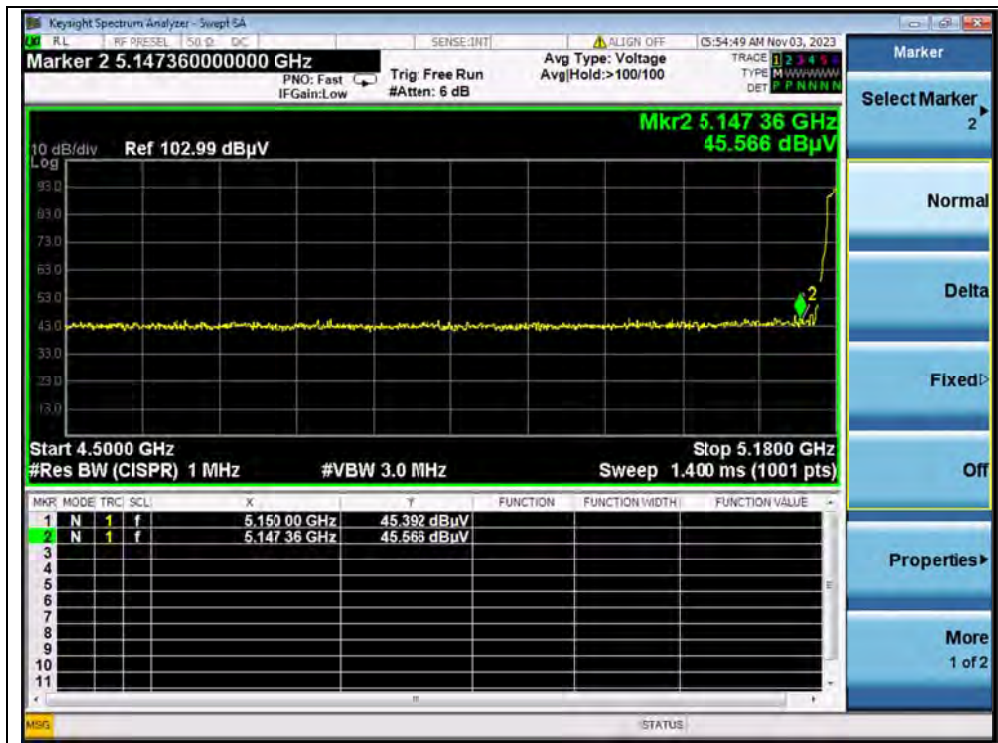


(PEAK, Channel 36, 802.11a)

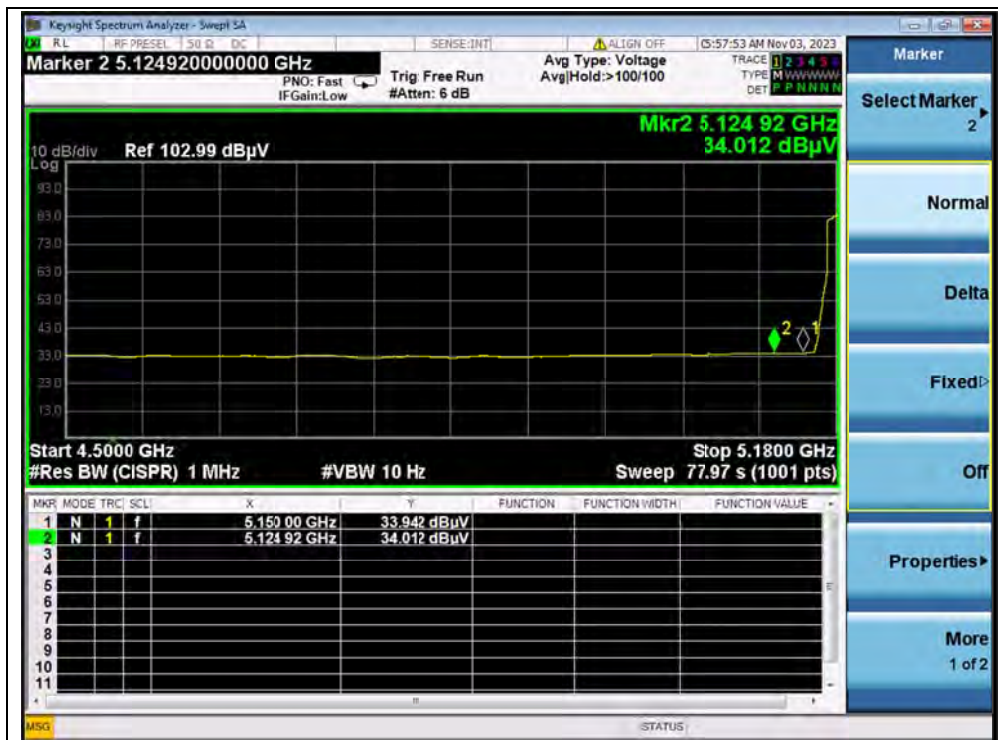


(AVERAGE, Channel 36, 802.11a)

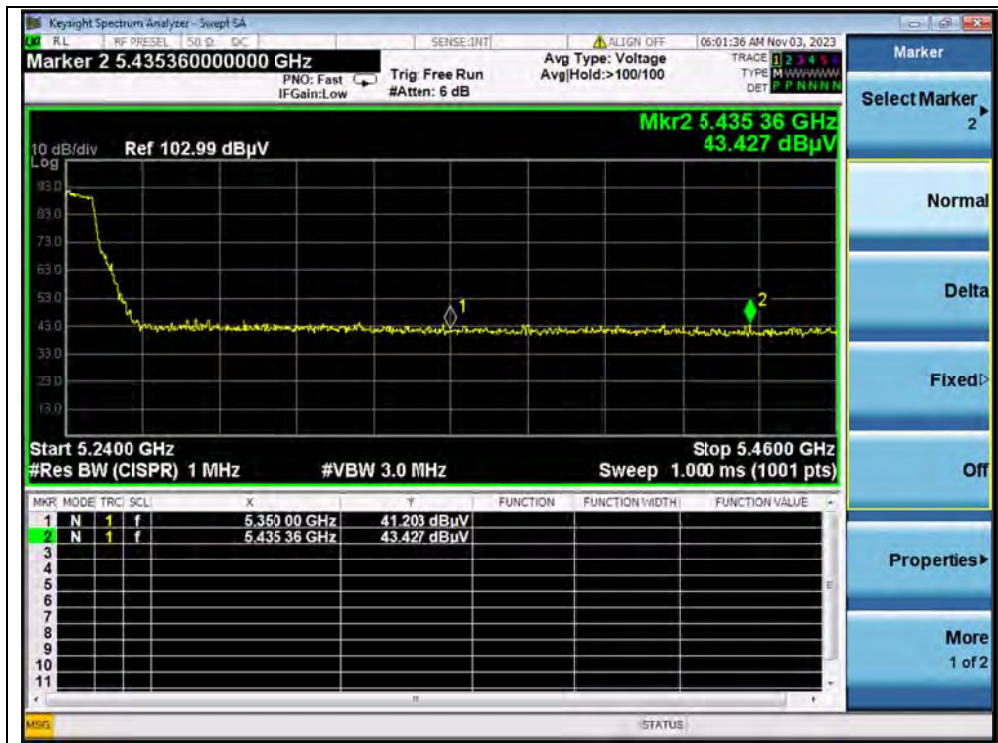


(PEAK, Channel 48, 802.11a)

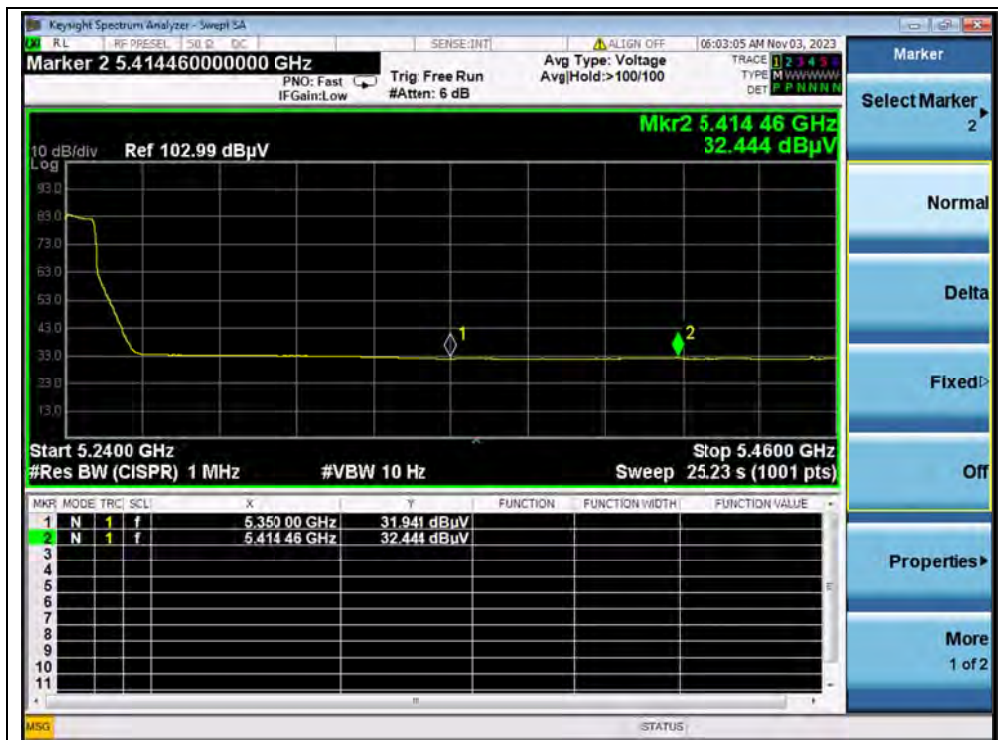

(AVERAGE, Channel 48, 802.11a)

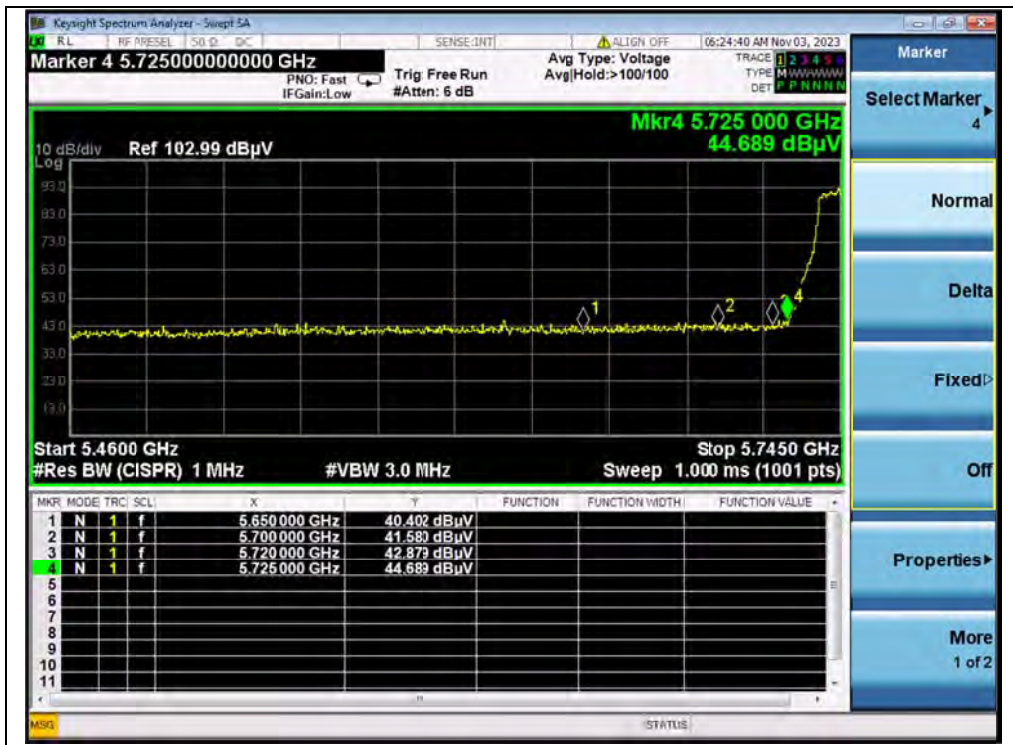

(PEAK, Channel 149, 802.11a)

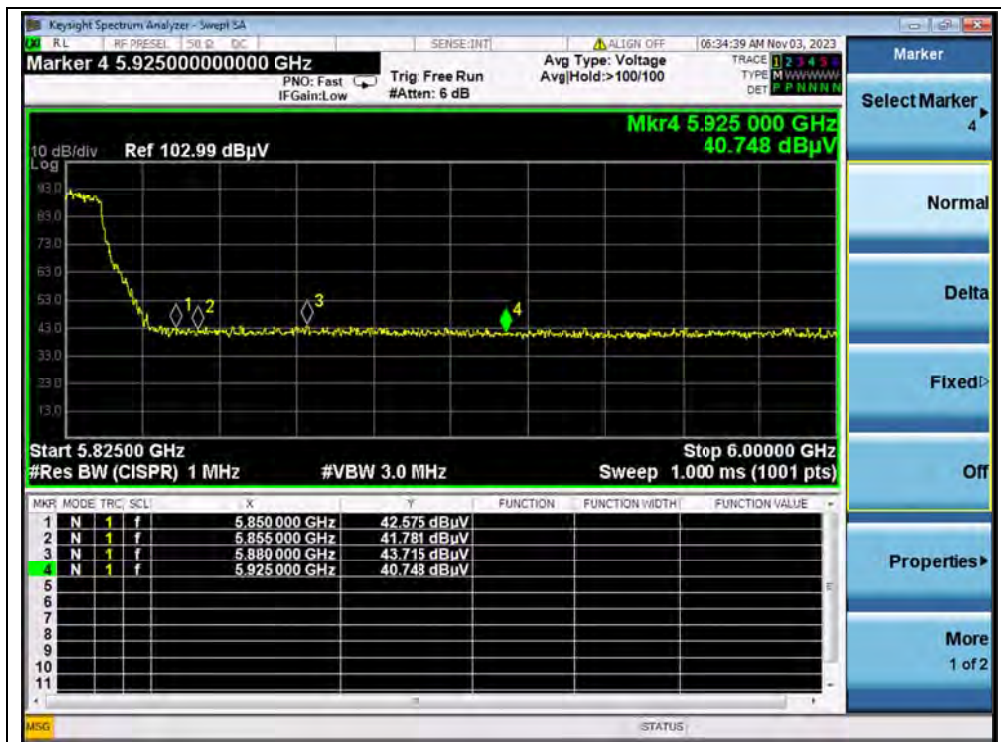


(PEAK, Channel 165, 802.11a)




802.11n (HT40) Mode


Channel	Frequency (MHz)	Detector	Receiver Reading	A _T (dB)	A _{Factor} (dB@3m)	Max. Emission	Limit (dBμV/m)	Verdict
		PK/ AV	U _R (dBμV)			E (dBμV/m)		
38	5148.60	PK	45.66	-19.54	32.20	58.32	74	PASS
38	5119.62	AV	35.28	-19.54	32.20	47.94	54	PASS
46	5385.40	PK	43.08	-19.54	32.20	55.74	74	PASS
46	5414.15	AV	33.20	-19.54	32.20	45.86	54	PASS
151	5725.00	PK	45.93	-19.01	32.20	59.12	122.23	PASS
159	5855.00	PK	42.41	-19.01	32.20	55.60	110.83	PASS

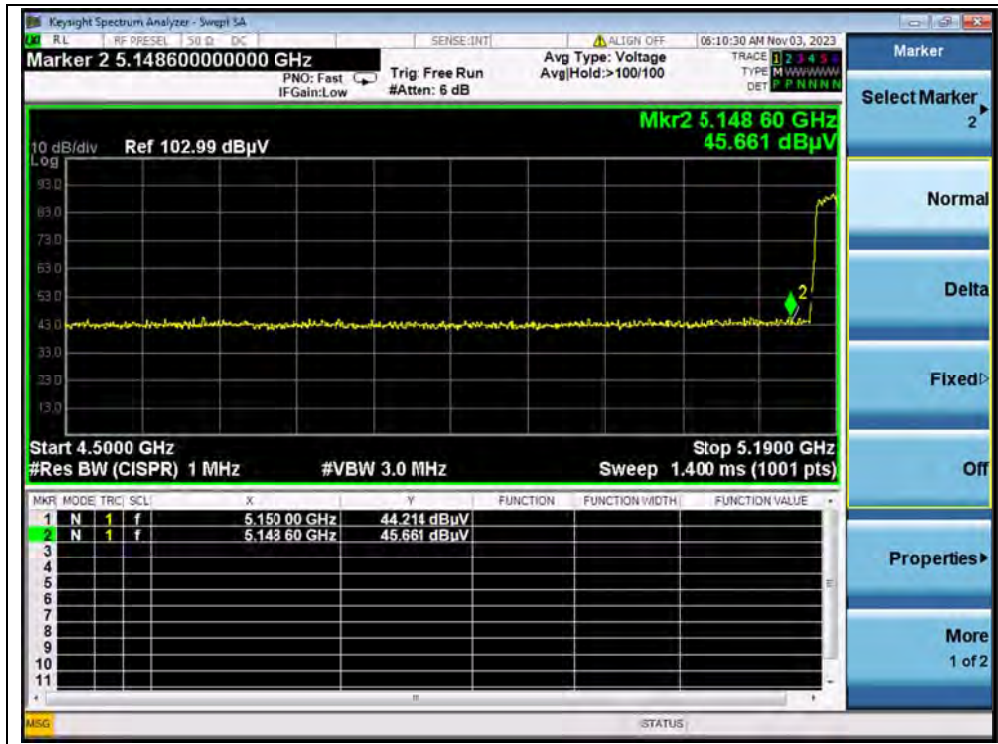


(PEAK, Channel 38, 802.11n (HT40))

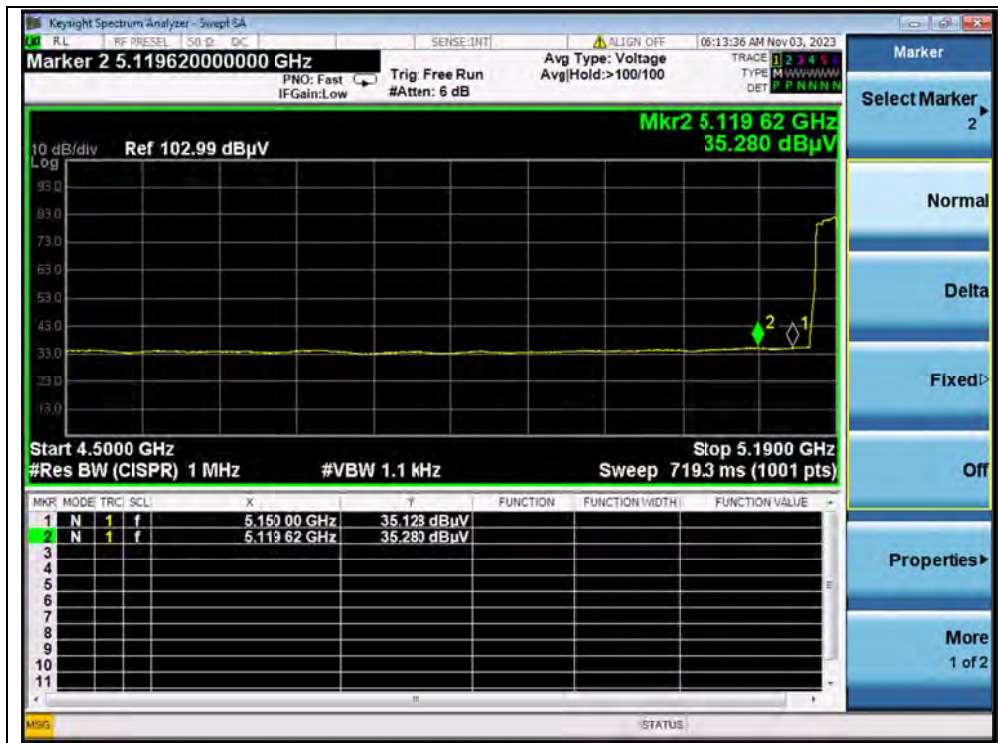


(AVERAGE, Channel 38, 802.11n (HT40))

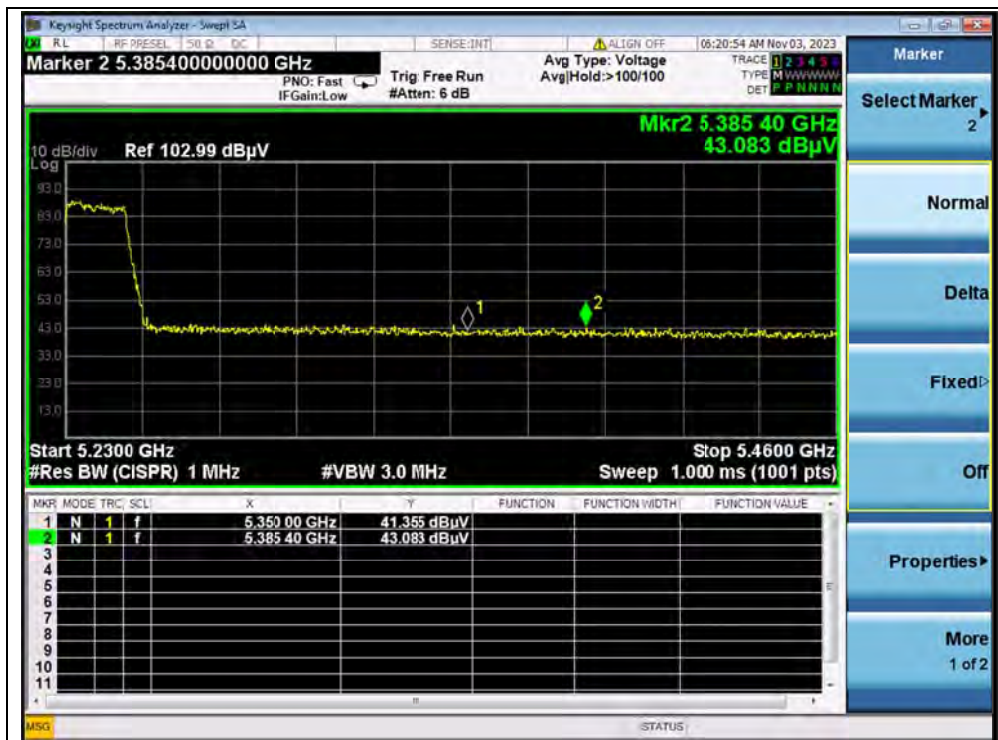


(PEAK, Channel 48, 802.11n (HT40))

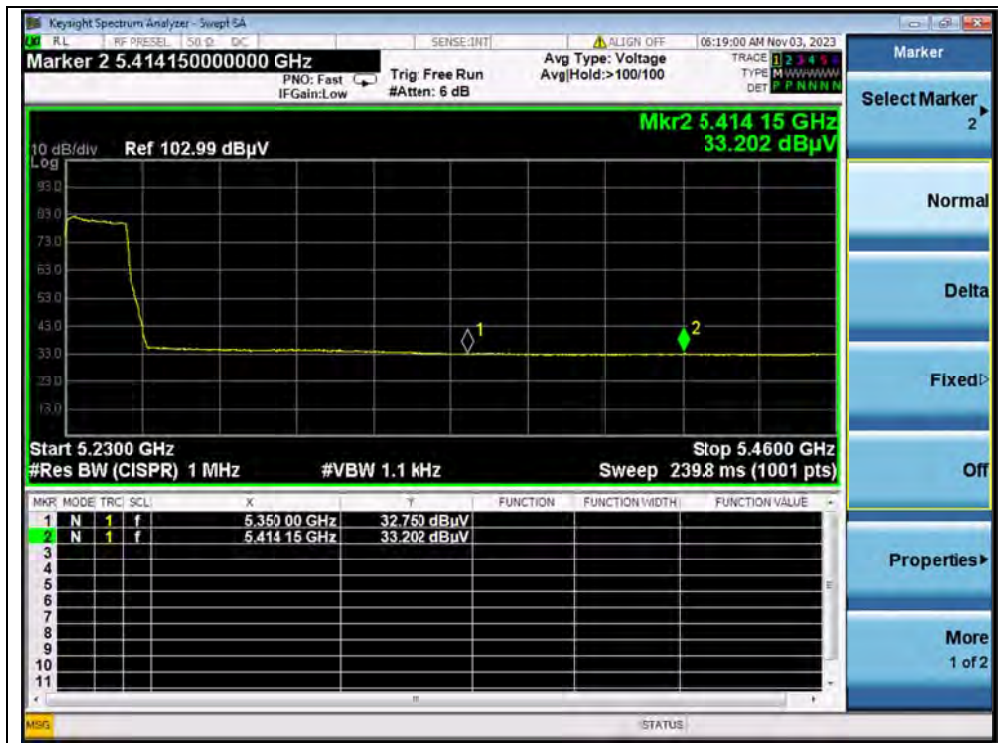

(AVERAGE, Channel 48, 802.11n (HT40))

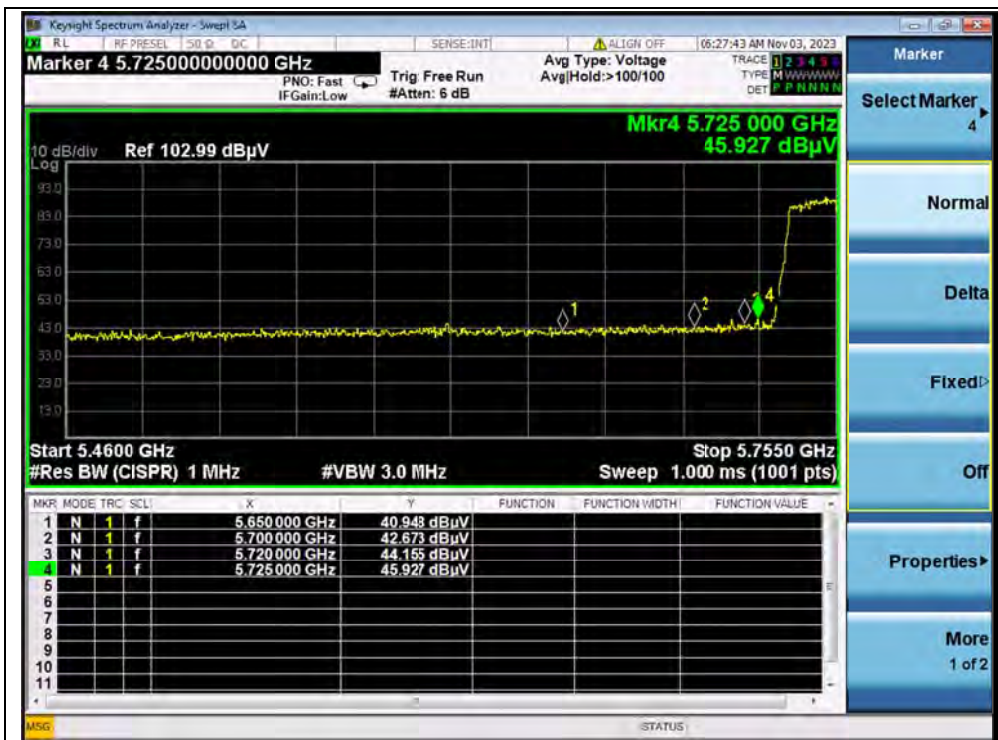

(PEAK, Channel 151, 802.11n (HT40))

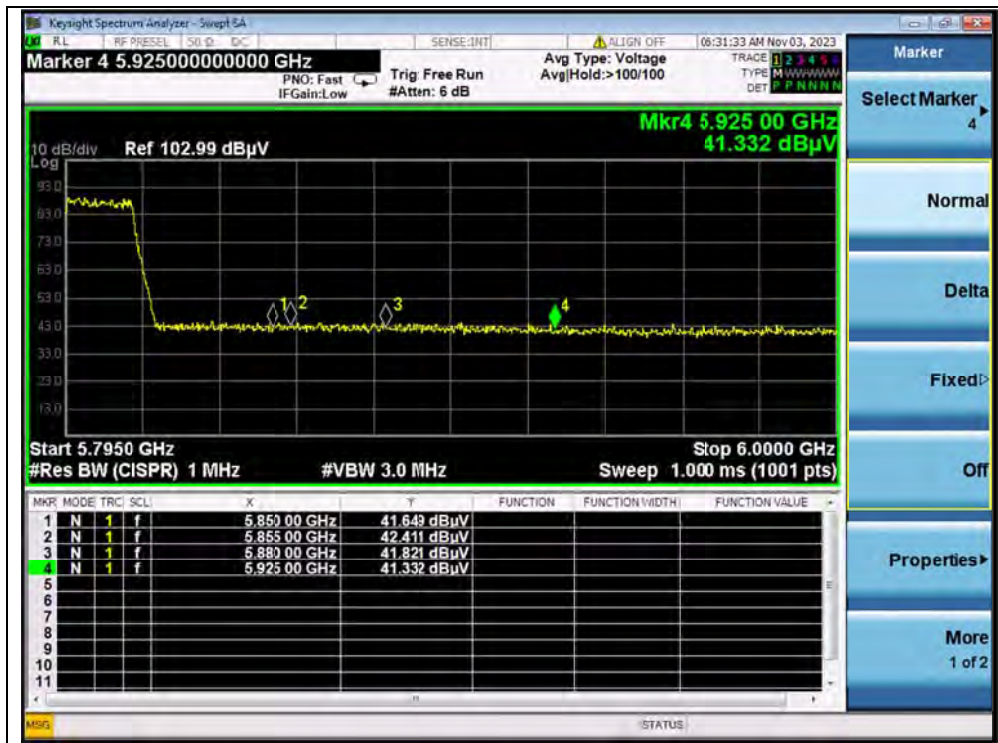

(PEAK, Channel 159, 802.11n (HT40))



A.8. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note 4: All test modes and bandwidth were considered and evaluated respectively by performing full test, only the worst data were recorded for each bandwidth.


802.11a Mode

Plot for Channel 36

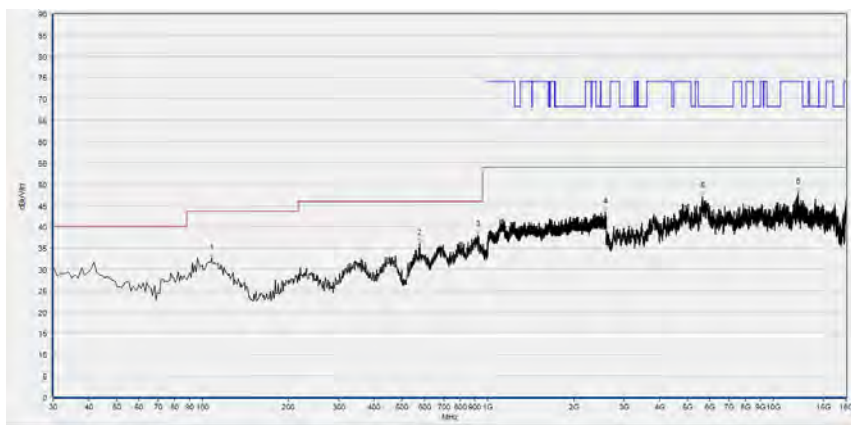

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
107.600	32.54	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
578.050	36.00	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
923.370	38.01	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2579.733	43.43	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5655.360	47.03	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12206.520	48.04	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

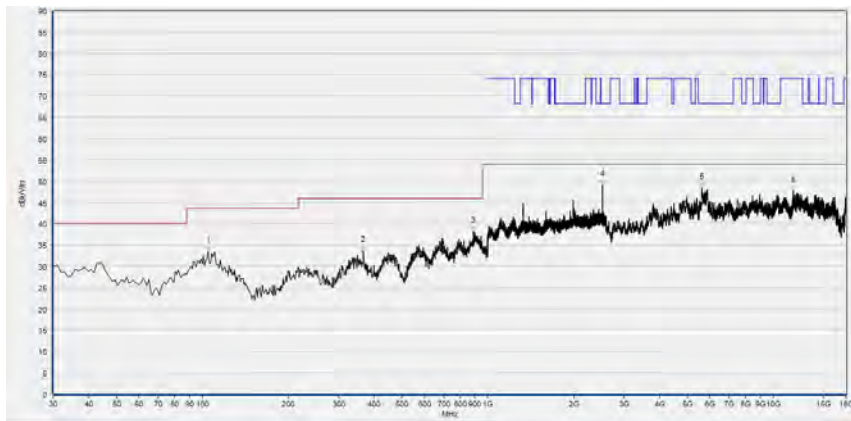

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
104.690	33.50	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
366.590	33.68	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
890.390	38.24	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2528.000	49.17	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5633.800	48.48	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
11744.520	47.77	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 44

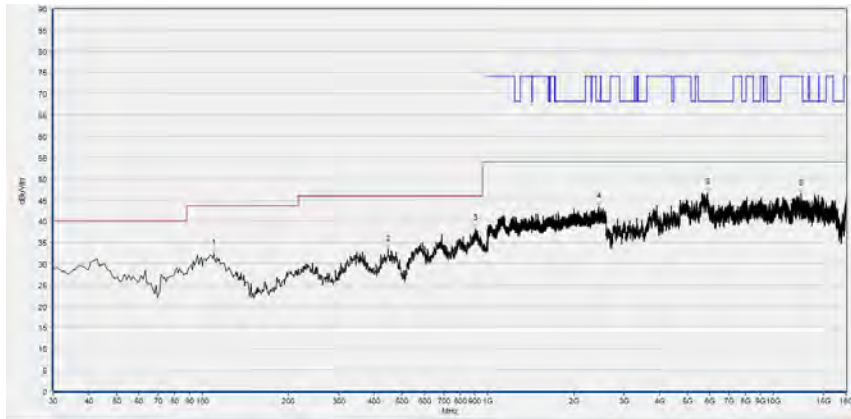

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
109.540	32.30	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
447.100	33.37	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
905.910	38.16	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2450.667	43.37	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5877.120	46.79	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12529.920	46.40	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

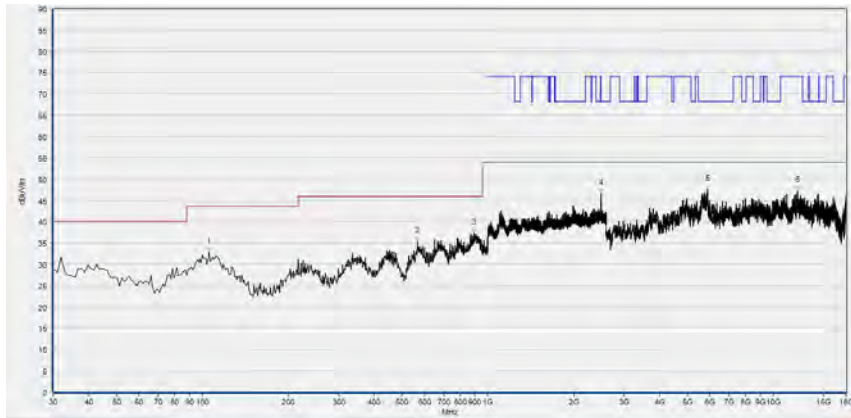

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
105.660	32.82	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
567.380	35.43	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
896.210	37.29	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2490.133	46.62	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5874.040	47.64	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12157.240	47.29	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 48

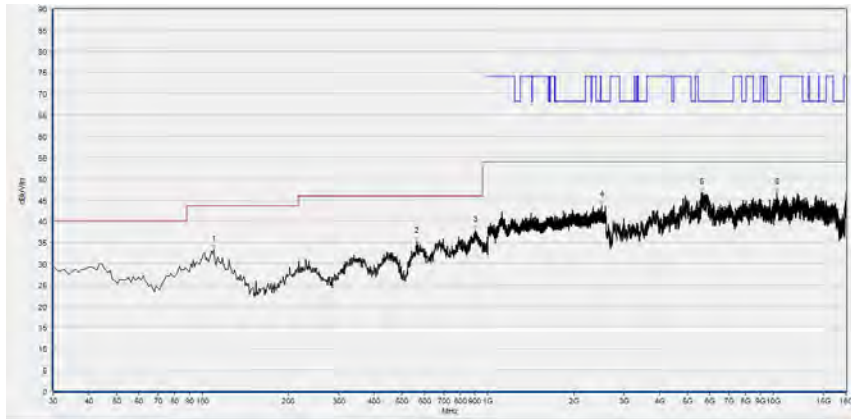

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	33.34	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
563.500	35.25	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
904.940	37.84	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2511.467	43.81	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5630.720	46.71	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
10309.240	46.74	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

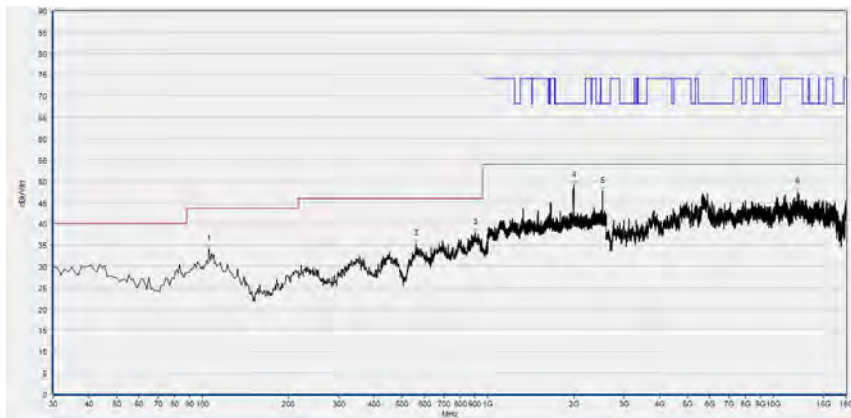

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
105.660	34.02	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
559.620	35.18	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
902.030	37.85	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1998.933	48.93	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
2518.933	47.65	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12148.000	47.47	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 149

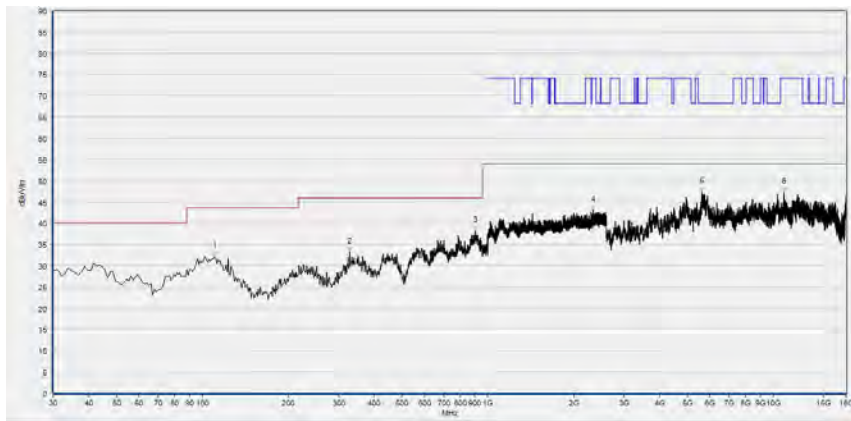

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
110.510	32.22	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
328.760	33.25	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
902.030	38.29	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2345.600	43.07	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5618.400	47.37	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
10909.840	47.30	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

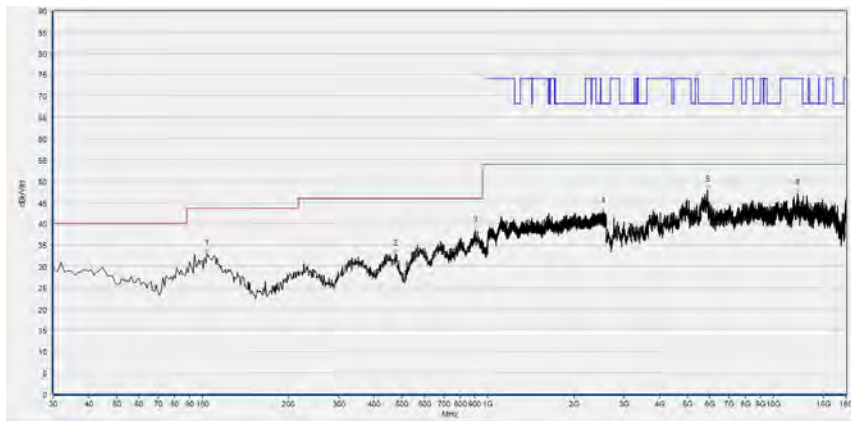

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
103.720	33.10	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
475.230	32.79	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
903.000	38.43	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2535.467	42.83	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5870.960	47.91	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12141.840	47.01	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 157

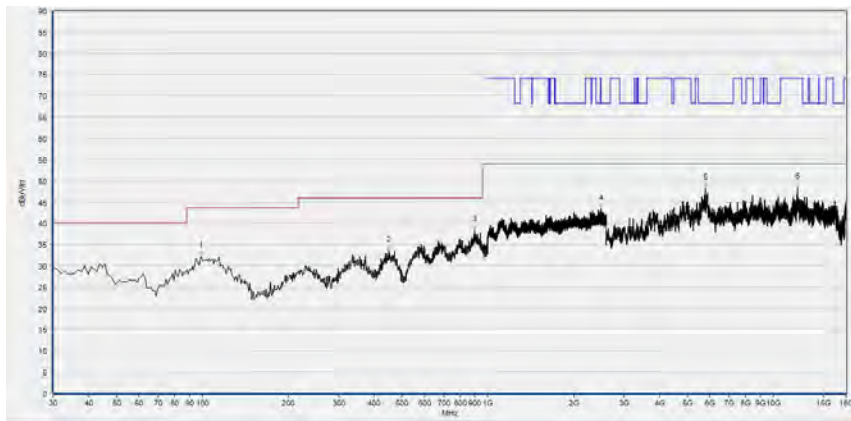

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
98.870	32.21	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
449.040	33.60	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
899.120	38.44	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2486.933	43.33	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5775.480	48.29	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12163.400	48.47	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

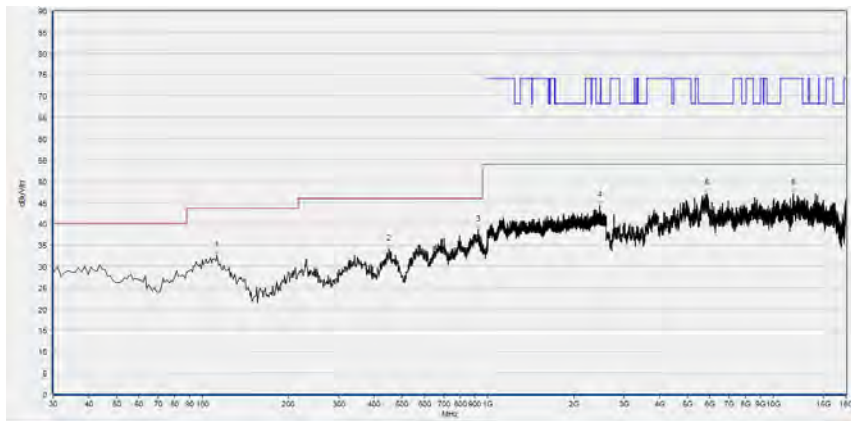

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
112.450	32.44	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
449.040	34.03	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
924.340	38.47	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2461.333	44.25	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5864.800	47.09	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
11732.200	47.17	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 165

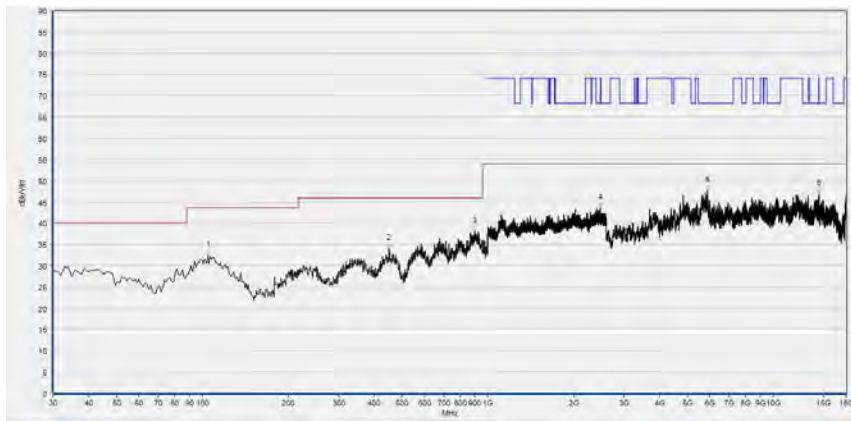

Fre. (MHz)	PK (dB μ V/m)	QP (dB μ V/m)	AV (dB μ V/m)	Limit-PK (dB μ V/m)	Limit-QP (dB μ V/m)	Limit-AV (dB μ V/m)	Antenna	Verdict
104.690	32.37	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
450.010	33.96	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
899.120	38.04	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2477.867	43.54	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5883.280	47.76	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
14467.240	46.96	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

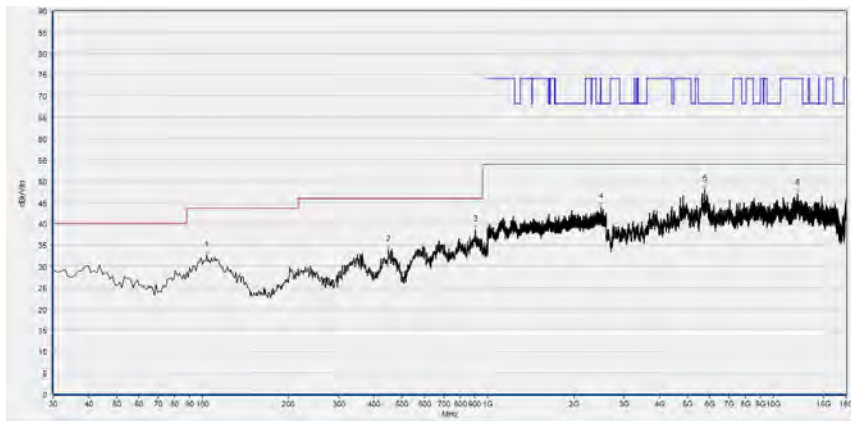


Fre. (MHz)	PK (dB μ V/m)	QP (dB μ V/m)	AV (dB μ V/m)	Limit-PK (dB μ V/m)	Limit-QP (dB μ V/m)	Limit-AV (dB μ V/m)	Antenna	Verdict
103.720	32.45	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
448.070	33.93	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
905.910	38.51	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2497.600	43.85	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5753.920	48.06	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12157.240	47.10	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




802.11n (HT40) mode

Plot for Channel 38

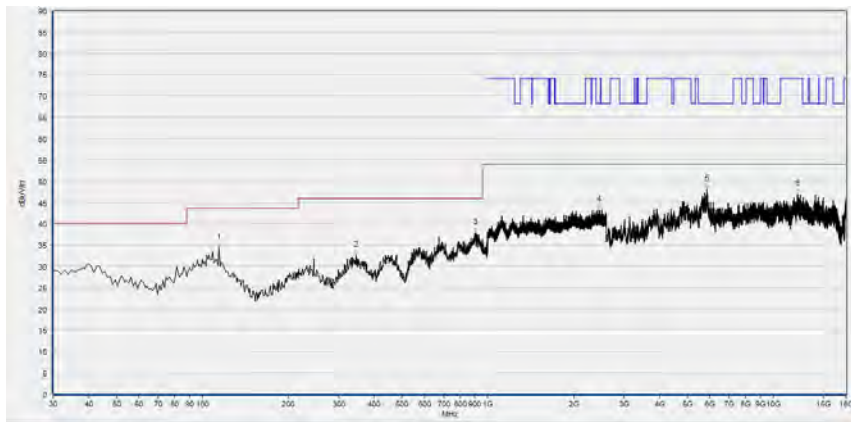

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
114.390	34.37	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
346.220	32.44	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
905.910	37.84	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2456.533	43.27	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5864.800	48.02	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12178.800	46.92	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

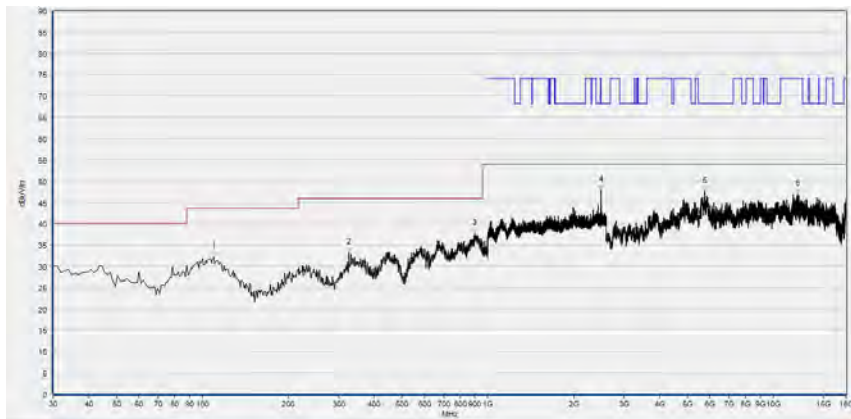

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
109.540	32.22	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
326.820	33.26	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
901.060	37.68	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2489.600	47.86	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5766.240	47.64	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12151.080	46.90	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 46

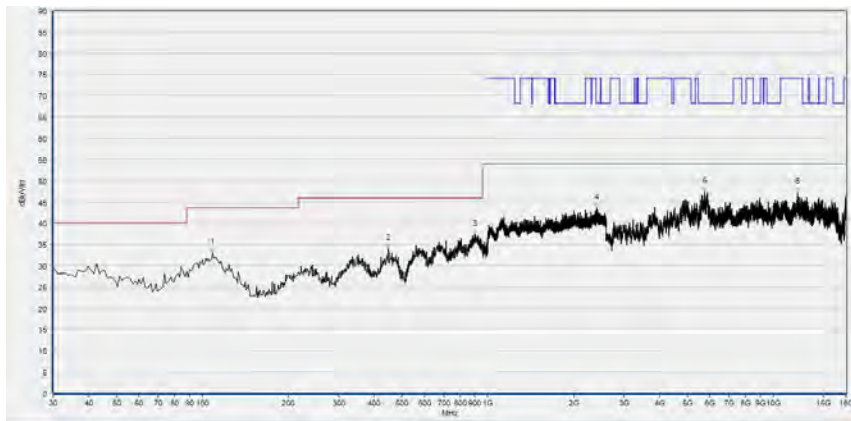

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
108.570	32.94	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
448.070	34.02	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
898.150	37.36	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2414.400	43.51	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5744.680	47.44	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12148.000	47.33	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

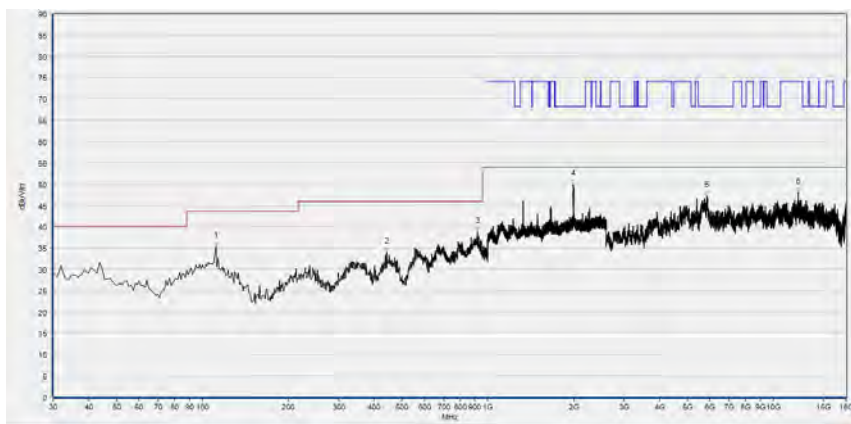

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
111.480	35.30	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
441.280	34.01	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
919.490	38.92	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1992.000	50.02	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5864.800	47.29	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12231.160	48.06	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 151

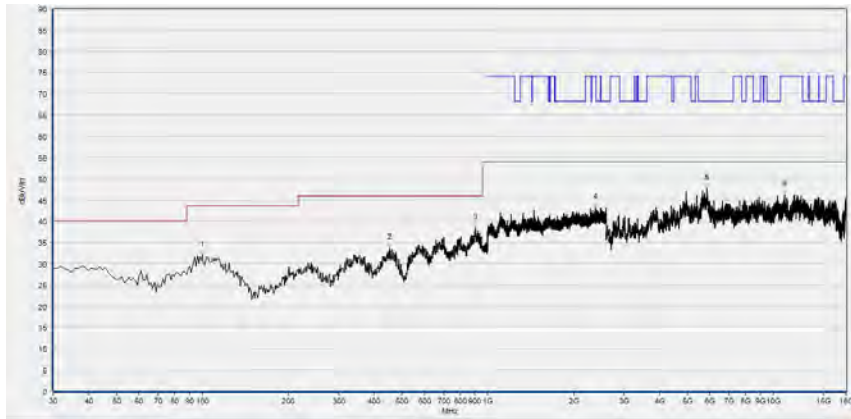

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
99.840	31.95	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
451.950	33.66	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
904.940	38.36	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2379.733	43.28	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5864.800	47.76	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
10949.880	46.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

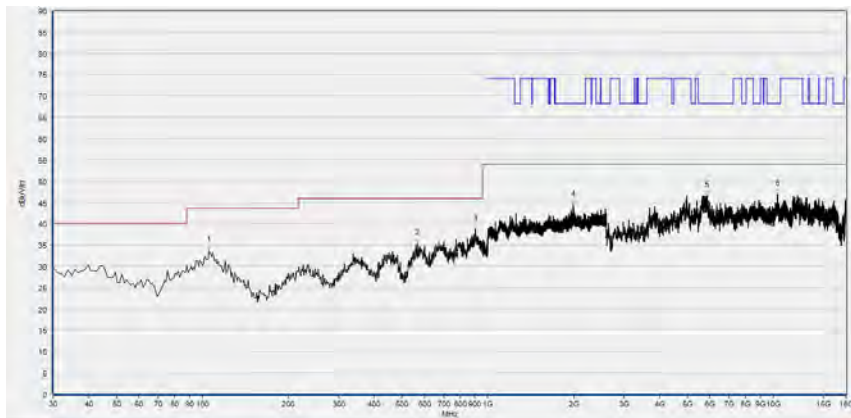

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
105.660	33.72	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
565.440	35.41	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
904.940	38.67	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1993.600	44.43	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5849.400	46.54	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
10340.040	46.98	N/A	N/A	68.23	N/A	N/A	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 159

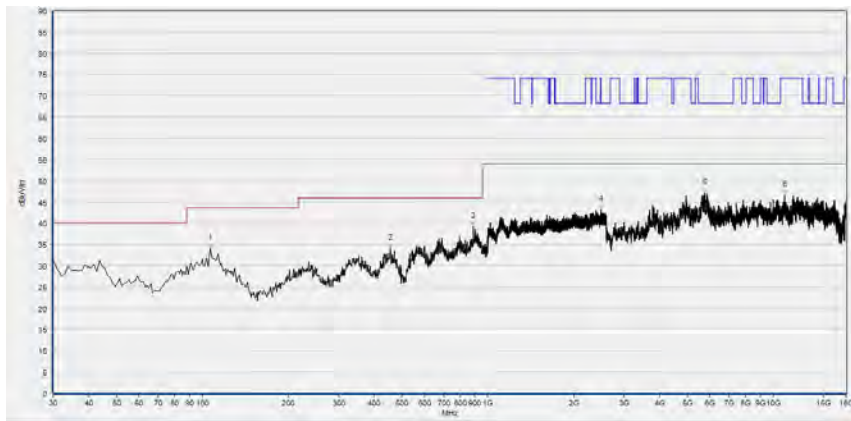

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
106.630	33.99	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
455.830	33.95	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
890.390	39.21	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2496.533	43.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5741.600	47.10	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
10968.360	46.59	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

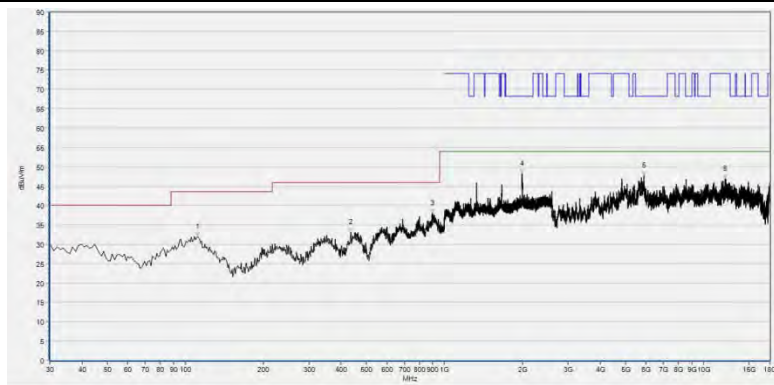

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
111.480	31.96	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
434.490	33.19	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
899.120	38.04	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1995.200	48.32	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5867.880	47.73	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12098.720	47.00	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

————— END OF REPORT —————