

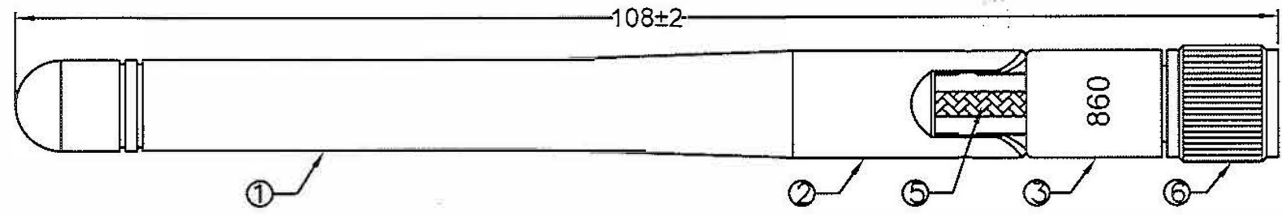



REV.	CONTENT	DATE
X1	Frist Sample	2022.11.09



Specification:
 Frequency Rang:860~930MHz
 Return Loss:-6.0dB or less
 VSWR:3.0 Max
 Gain:2.0±0.5 dBi

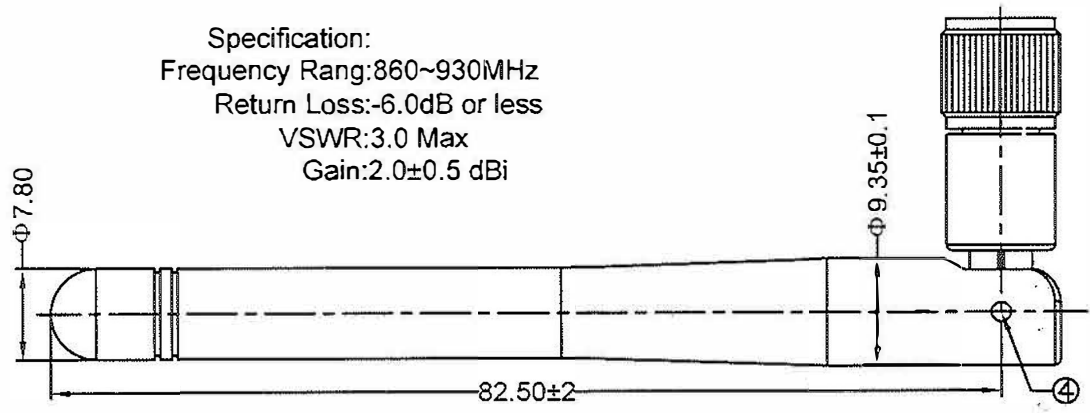

6	Connector	RP~SMA connector		1
5	Cable	RG-178,Transparency Brown,50Ω		1
4	Rivet	POM,Color:Black		2
3	Bottom Base	PBT,Color:Black		1
2	Upper Base	PC,Color:Black		1
1	Antenna Cap	TPE,Color:Black		1
NO	PART NAME	DESCRIPTION	REMARK	Q'TY

SLEing®
 DONGGUAN SLEing INTEL-TECH CO.,LTD

TOLERANCE UNLESS OTHERWISE SPECIFIED

UNIT:mm ANGLES ±0.5° X. ±0.3
 SHEET: 1/1 .XX ±0.05 XX. ±0.5
 SCALE: 1/1 XXX. ±2.0


CUSTOMER			
PART NO			
TITLE		RF ANTENNA	
S.H P/NO		SLEingA100020108-F34	
SIZE	DRAWN	CHECKED	APPROVED
A4	Xiang	H3H	Joulan

Test Reports

Electrical Properties	
Frequency	860~930MHz
Impedance	50 Ohm Nominal
V.S.W.R	≤ 3.0
Return Loss	-6 dB Max
Radiation	Omni-directional
Gain (Peak)	2 \pm 0.5 dBi
Polarization	Linear, Vertical
Admitted Power	2 W
Connector	RP-SMA connector
Physical Properties	
Antenna Material	TPE/PC/POM
Antenna Color .	Black
Cable Type	RG-178
Operating Temp	-40 ~ +85 °C
Storage Temp	-40 ~ +85 °C



S Parameter Test

Agilent E5071C

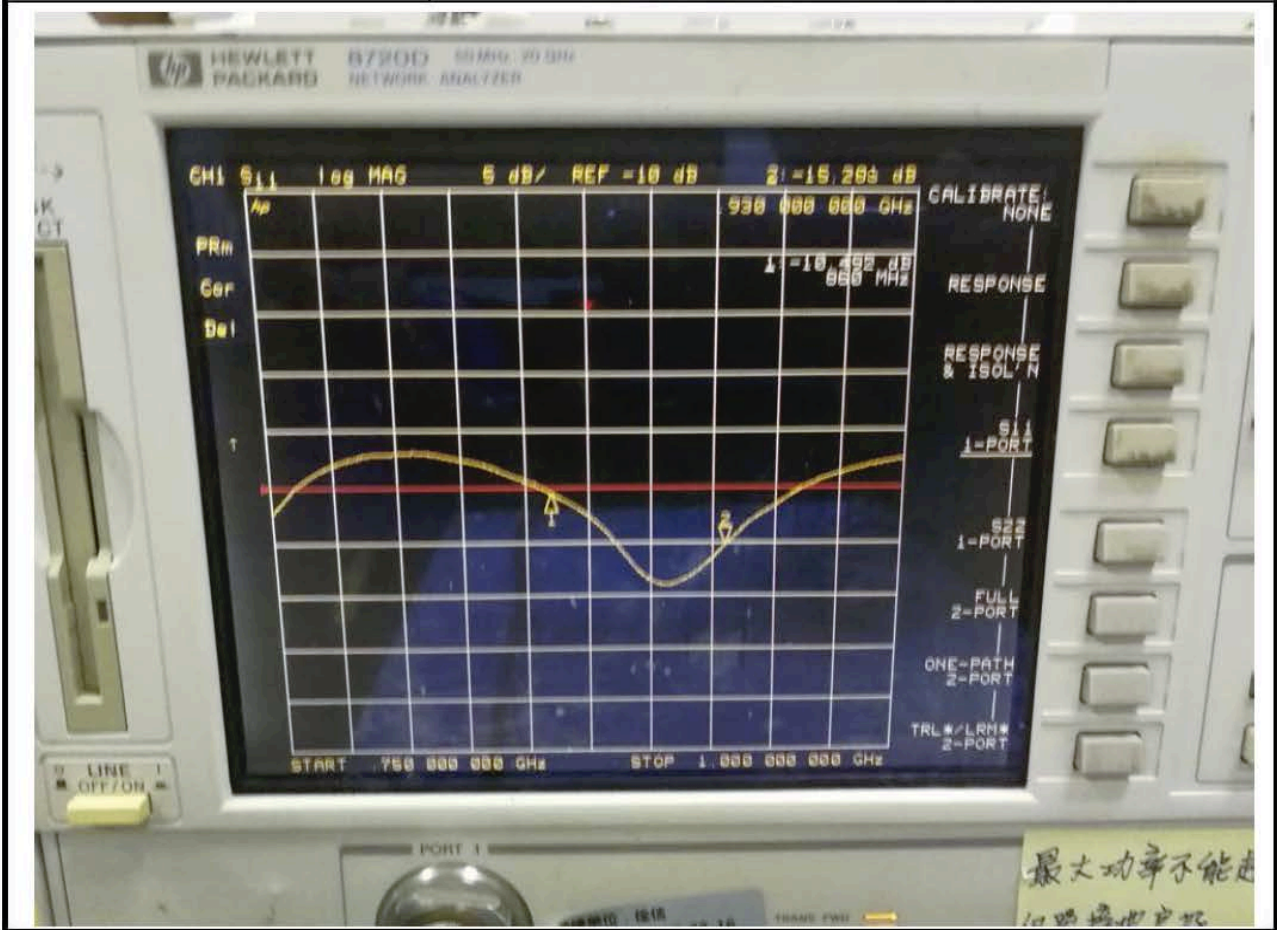

Test Setup


NFC-500S 3D Chamber Coordinate System Definition

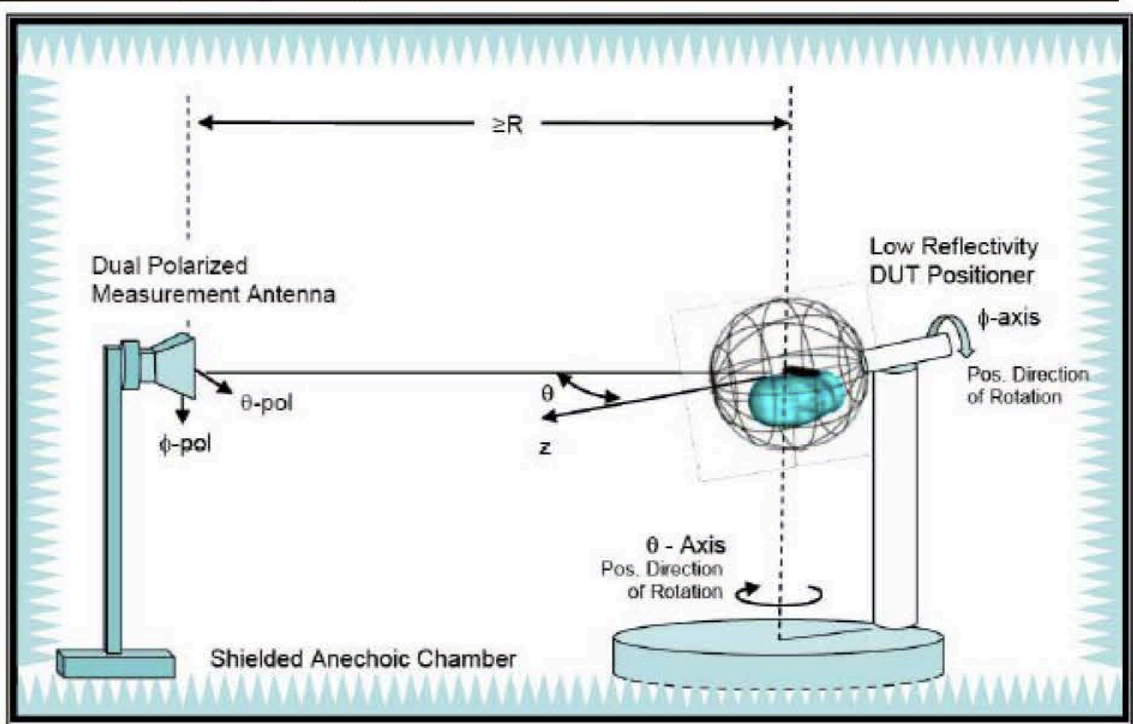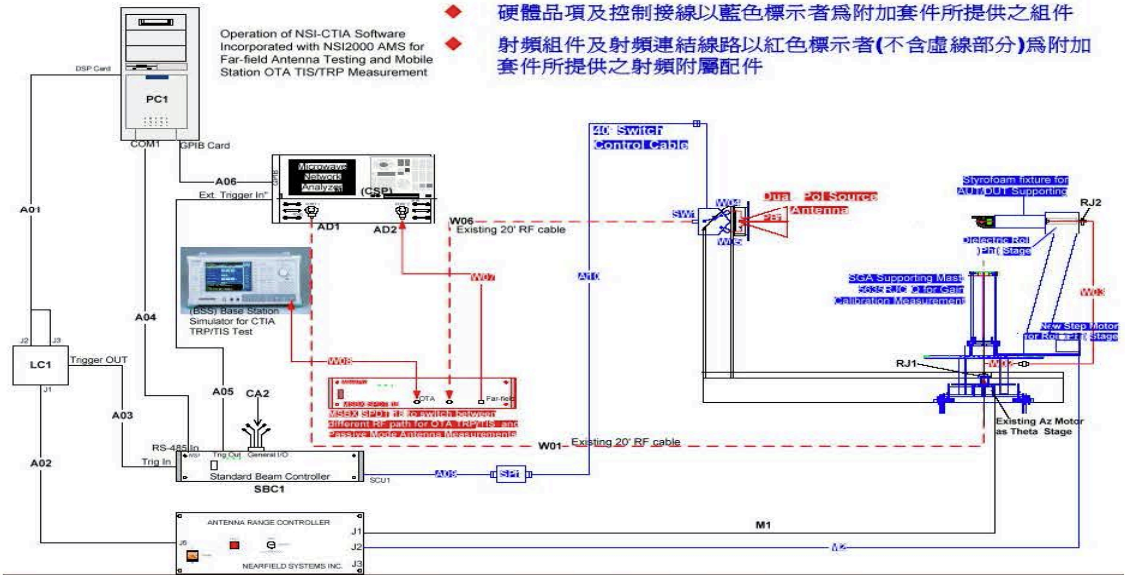


Configuration of 3D Chamber

868MHz Patten

1.3 2D Radiation patterns test results (Passive Antenna)

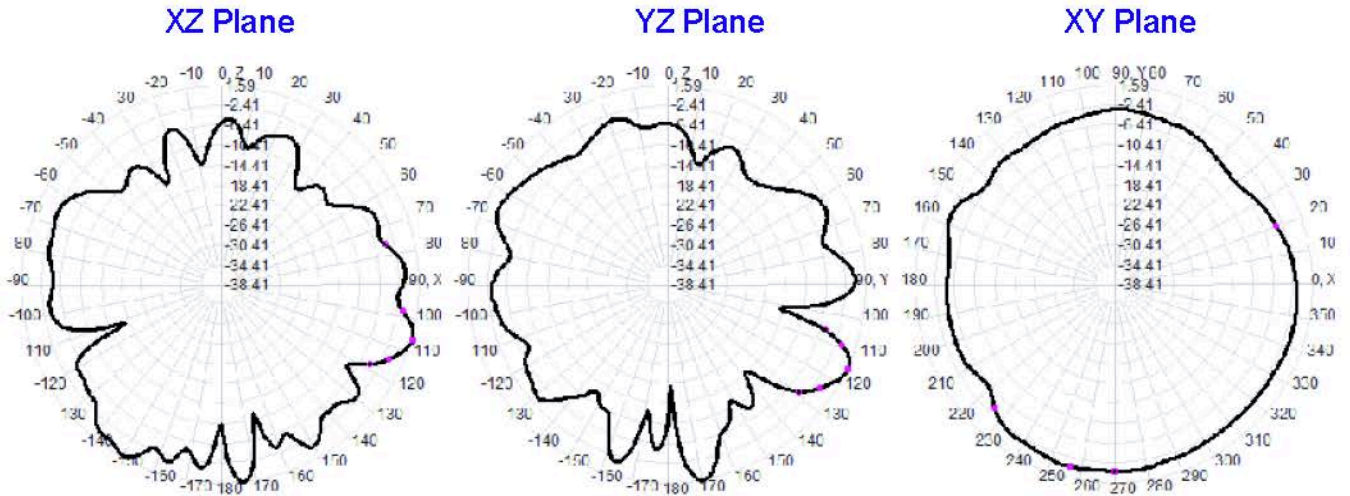


1.5 3D Radiation patterns test results (Passive Antenna)

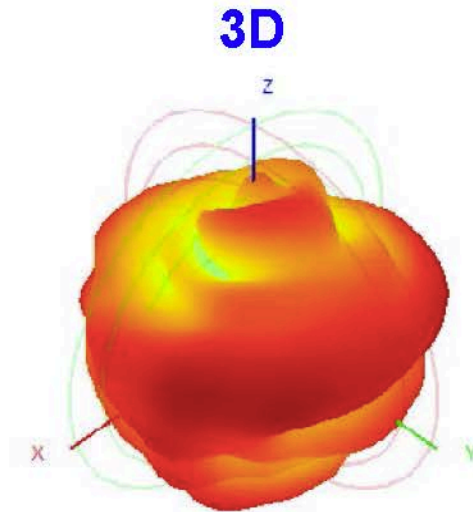


915MHz Patten

1.3 2D Radiation patterns test results (Passive Antenna)

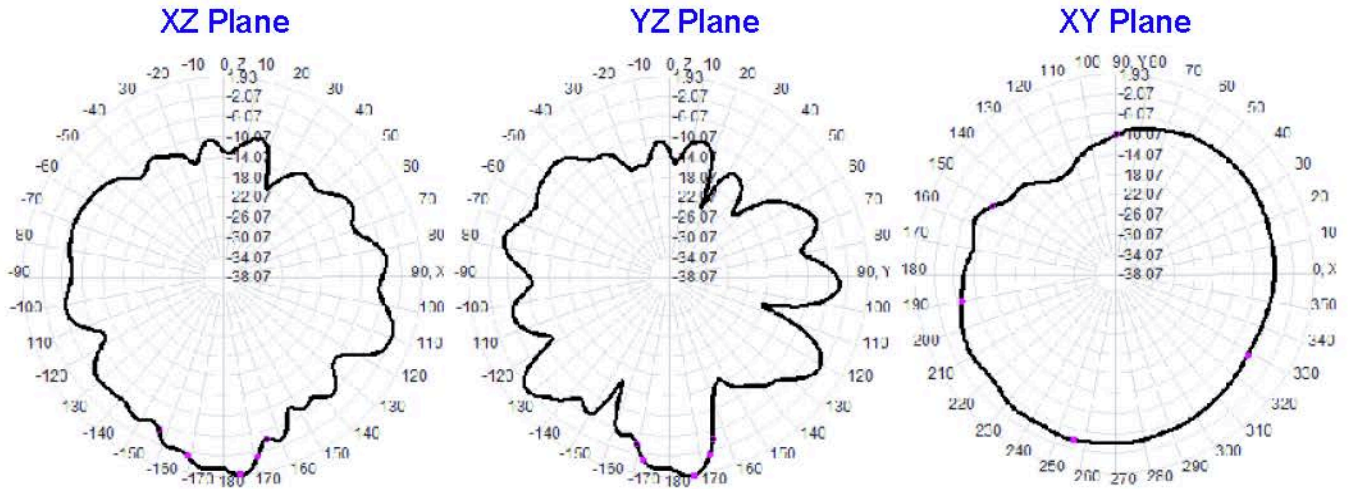

1.5 3D Radiation patterns test results (Passive Antenna)

3D

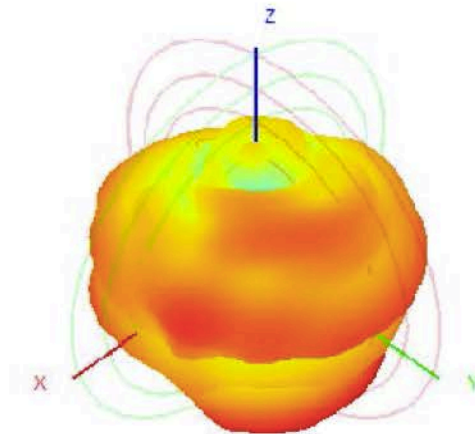



测试效率 Test Efficiency

Frequency ID	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Frequency (MHz)	860.0	865.0	870.0	875.0	880.0	885.0	890.0	895.0	900.0	905.0	910.0	915.0	920.0	925.0	930.0
Gain (dBi)	2.29	2.17	2.89	2.14	2.63	2.36	2.86	2.07	2.41	2.02	2.10	2.22	1.96	2.21	2.37
Efficiency (%)	49.17	44.43	44.44	45.41	48.98	48.75	48.91	45.30	49.55	45.70	40.26	40.68	40.43	45.30	49.87