






B.Test Plot:

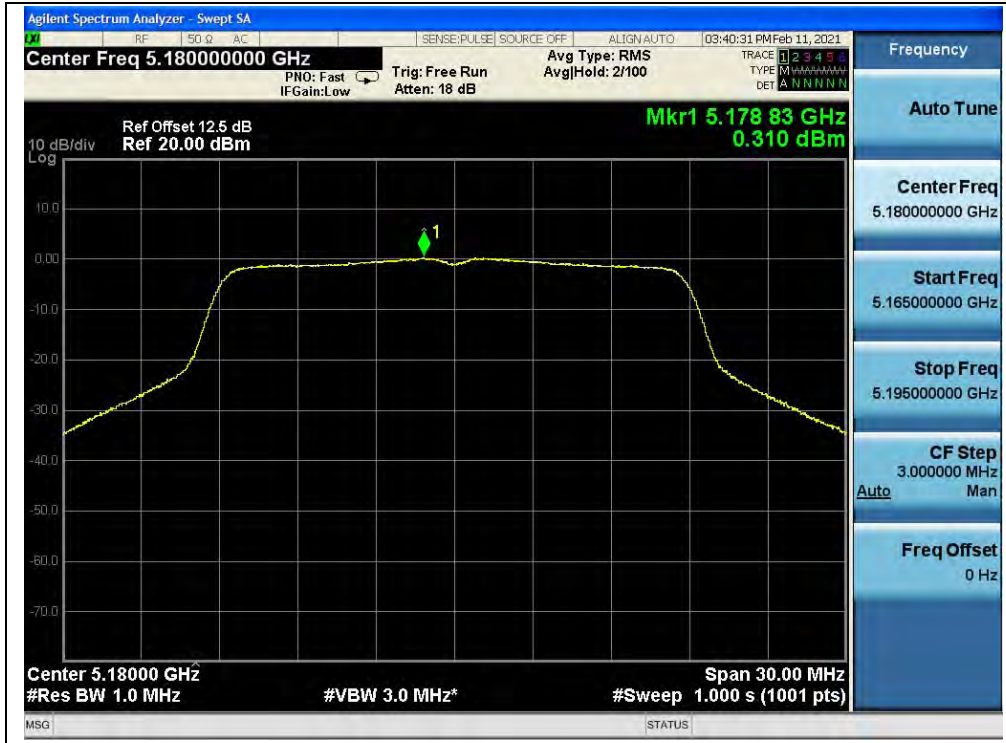

(Channel 36, 5180MHz, 802.11ac (VHT20))

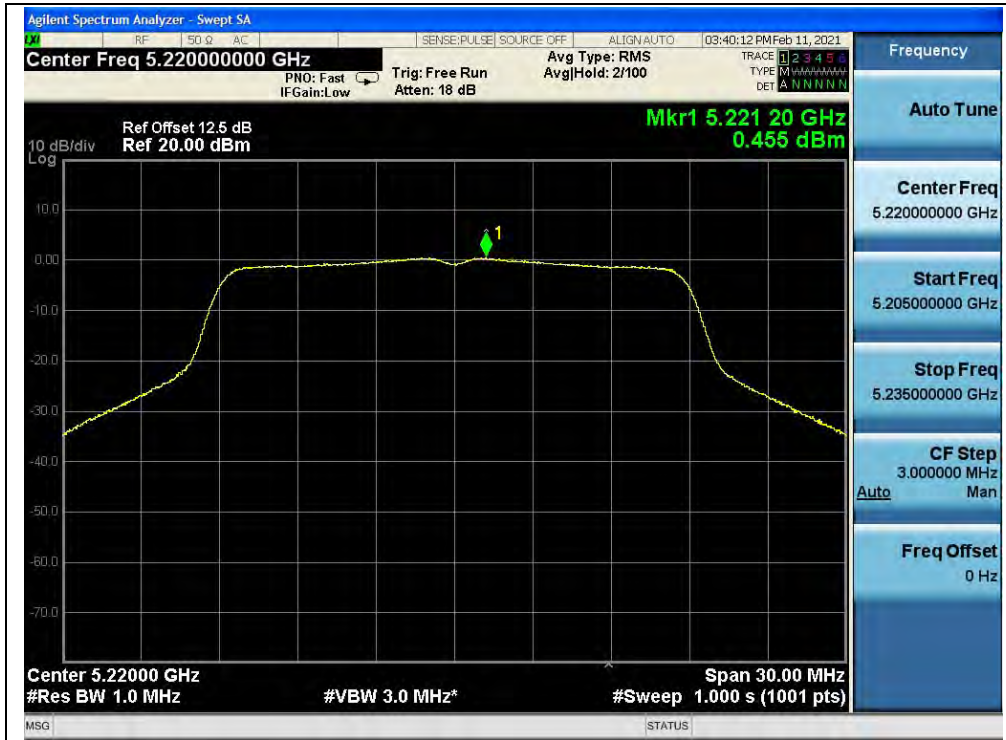


(Channel 44, 5220MHz, 802.11ac (VHT20))

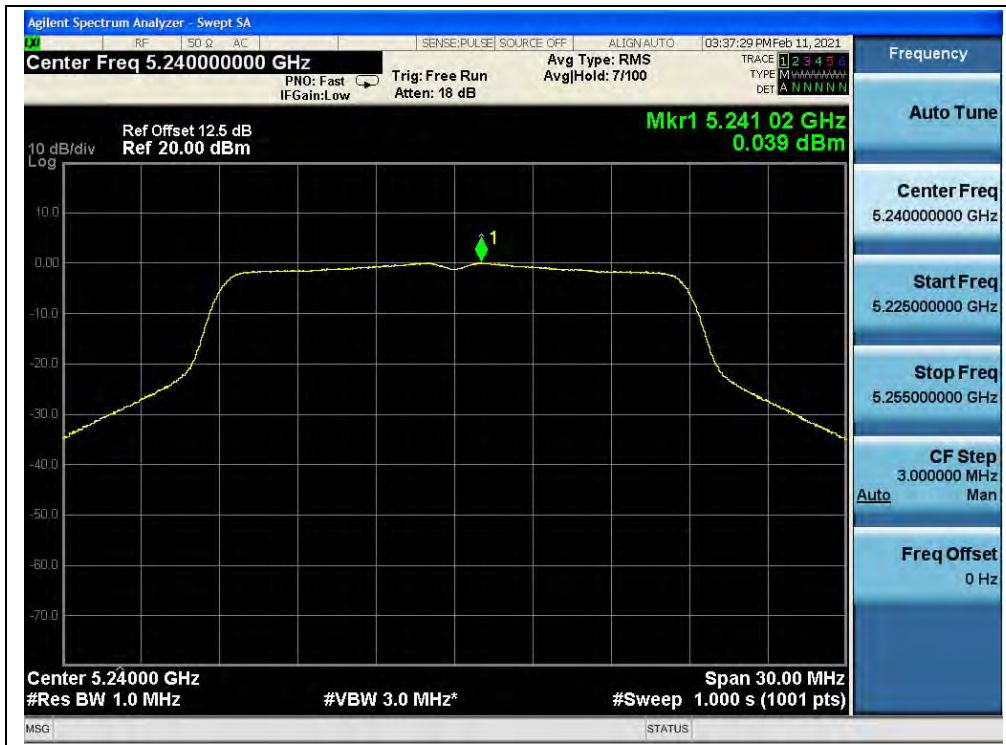

(Channel 48, 5240MHz, 802.11ac (VHT20))




(Channel 52, 5260MHz, 802.11ac (VHT20))

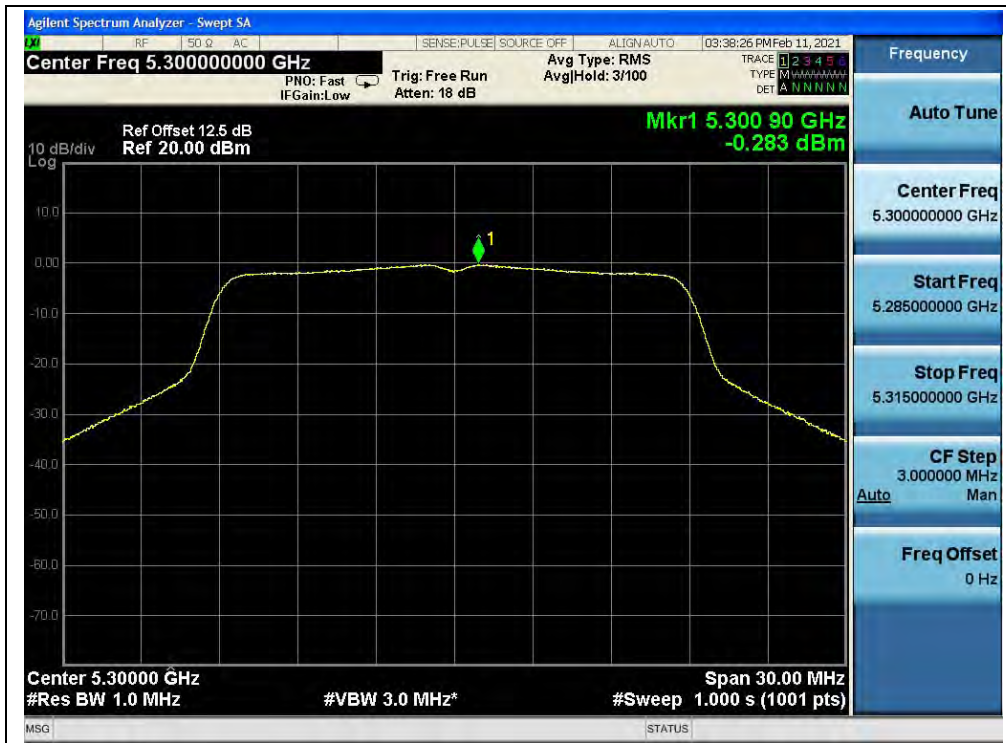


(Channel 60, 5300MHz, 802.11ac (VHT20))




(Channel 64, 5320MHz, 802.11ac (VHT20))

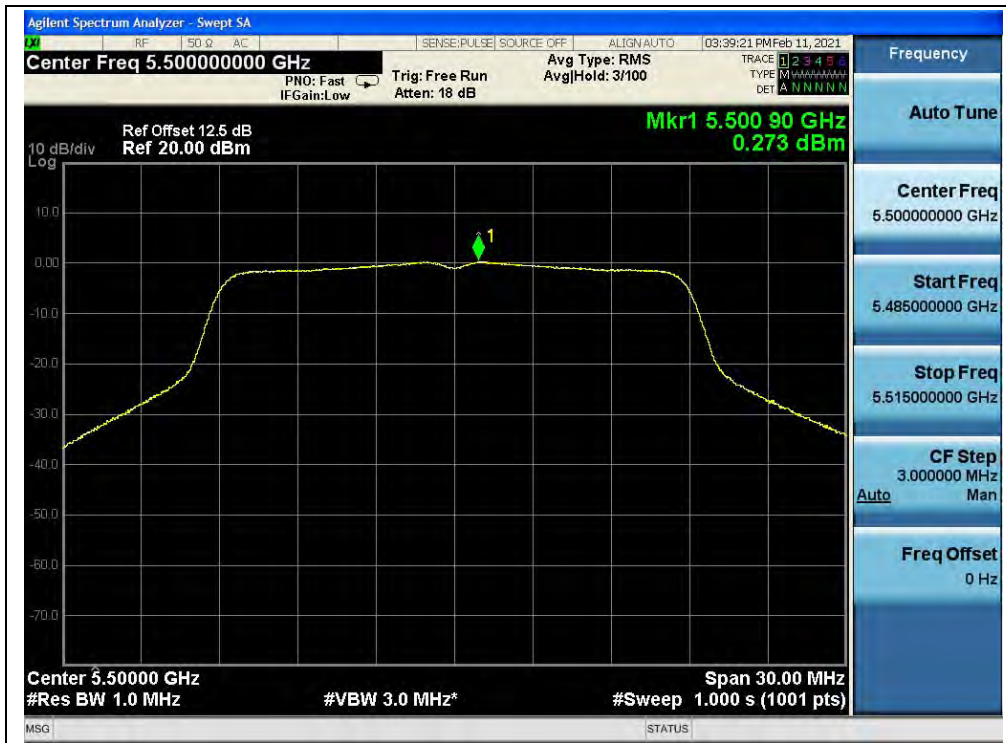

(Channel 100, 5500MHz, 802.11ac (VHT20))

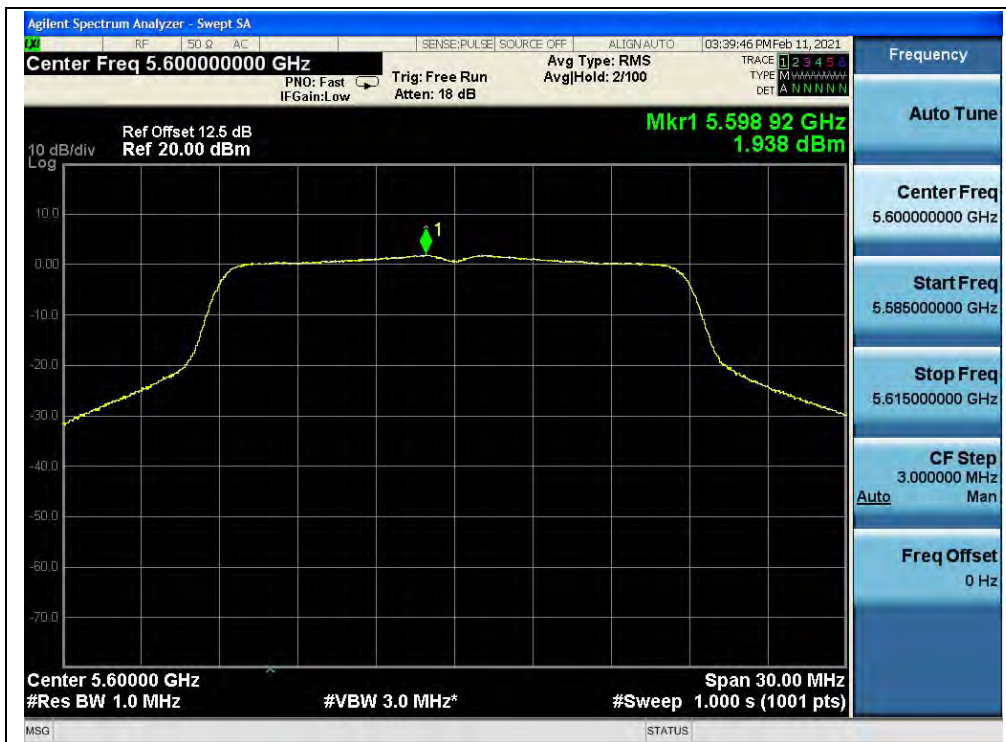

(Channel 120, 5600MHz, 802.11ac (VHT20))

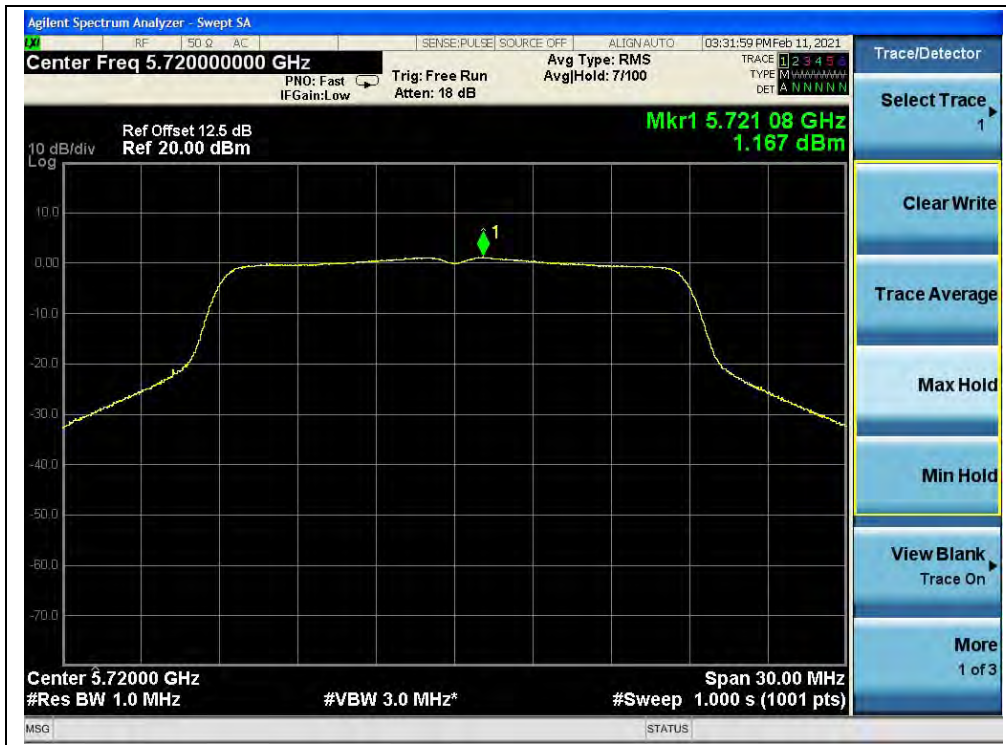

(Channel 144, 5720MHz, 802.11ac (VHT20))



(Channel 144, 5720MHz, 802.11ac(VHT20))



(Channel 149, 5745MHz, 802.11ac (VHT20))



(Channel 157, 5785MHz, 802.11ac (VHT20))



(Channel 165, 5825MHz, 802.11ac (VHT20))



802.11ac (VHT40) Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured PPSD (dBm/MHz)	Duty Factor	Corrected PPSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
38	5190	-2.31	0.16	-2.15	11	PASS
46	5230	-2.25		-2.09		
54	5270	-2.75		-2.59		
62	5310	-2.84		-2.68		
102	5510	-2.12		-1.96		
126	5630	-0.31		-0.15		
142	5710	-1.05		-0.89		
Channel	Frequency (MHz)	Measured PPSD (dBm/500KHz)	Duty Factor	Corrected (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
142	5710	-3.82	0.16	-3.66	30	PASS
151	5755	-3.93		-3.77		
155	5795	-3.99		-3.83		

B. Test Plot:



(Channel 38, 5190MHz, 802.11ac (VHT40))



(Channel 46, 5230MHz, 802.11ac (VHT40))




(Channel 54, 5270MHz, 802.11ac (VHT40))



(Channel 62, 5310MHz, 802.11ac (VHT40))



(Channel 102, 5510MHz, 802.11ac (VHT40))

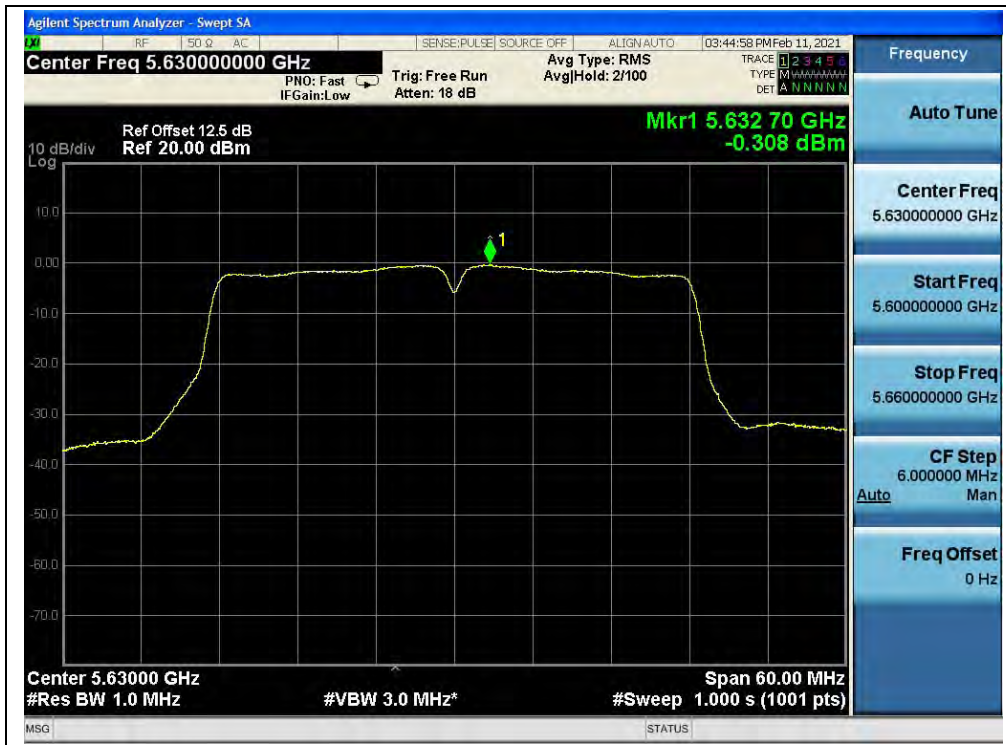

(Channel 126, 5630MHz, 802.11ac (VHT40))



(Channel 142, 5710MHz, 802.11ac (VHT40))



(Channel 142, 5710MHz, 802.11ac (VHT40))



(Channel 151, 5755MHz, 802.11ac (VHT40))



(Channel 159, 5795MHz, 802.11ac (VHT40))



802.11ac (VHT80) Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured PSD (dBm/MHz)	Duty Factor	Corrected PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
42	5210	-6.00	0.33	-5.67	11	PASS
58	5290	-6.58		-6.25		
106	5530	-5.44		-5.11		
122	5610	-4.43		-4.10		
138	5690	-4.38		-4.05		
Channel	Frequency (MHz)	Measured PSD (dBm/500KHz)	Duty Factor	Corrected (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
138	5690	-7.15	0.33	-6.82	30	PASS
155	5775	-7.55		-7.22		

B. Test Plot:



(Channel 42, 5210MHz, 802.11ac (VHT80))



(Channel 58, 5290MHz, 802.11ac (VHT80))




(Channel 106, 5530MHz, 802.11ac (VHT80))



(Channel 122, 5610MHz, 802.11ac (VHT80))



(Channel 138, 5690MHz, 802.11ac (VHT80))

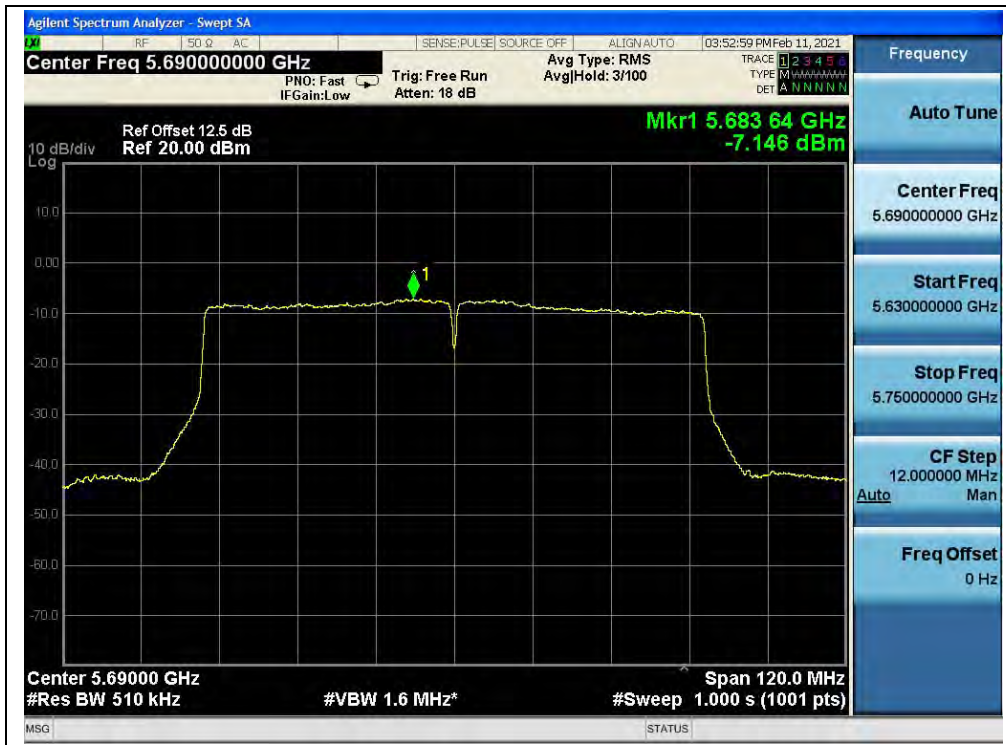

(Channel 138, 5690MHz, 802.11ac (VHT80))



(Channel 155, 5775MHz, 802.11ac (VHT80))



2.6. Frequency Stability

2.6.1. Requirement

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

2.6.2. Test Procedure

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between 5°C to 40°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

2.6.3. Test Result

U-NII-1 (Ch. 36) 5180MHz				
VOLTAGE (%)	POWER (VDC)	TEMP (°C)	Fre. Dev. (kHz)	Deviation (ppm)
100%	3.8	+20(Ref)	16	3.089
100%		-30	21	4.054
100%		-20	23	4.440
100%		-10	25	4.826
100%		0	19	3.668
100%		+10	16	3.089
100%		+20	23	4.440
100%		+30	25	4.826
100%		+40	28	5.405
100%		+50	25	4.826
85%		3.6	+20	18
115%	4.2	+20	16	3.089



U-NII-2A (Ch. 52)				
5260MHz				
VOLTAGE (%)	POWER (VDC)	TEMP (°C)	Fre. Dev. (kHz)	Deviation (ppm)
100%	3.8	+20(Ref)	19	3.612
100%		-30	21	3.992
100%		-20	26	4.943
100%		-10	23	4.373
100%		0	26	4.943
100%		+10	19	3.612
100%		+20	16	3.042
100%		+30	31	5.894
100%		+40	30	5.703
100%		+50	26	4.943
85%	3.6	+20	26	4.943
115%	4.2	+20	24	4.563

U-NII-2C (Ch. 100)				
5500MHz				
VOLTAGE (%)	POWER (VDC)	TEMP (°C)	Fre. Dev. (kHz)	Deviation (ppm)
100%	3.8	+20(Ref)	21	3.818
100%		-30	29	5.273
100%		-20	30	5.455
100%		-10	28	5.091
100%		0	28	5.091
100%		+10	27	4.909
100%		+20	26	4.727
100%		+30	26	4.727
100%		+40	34	6.182
100%		+50	30	5.455
85%	3.6	+20	24	4.364
115%	4.2	+20	26	4.727



U-NII-3 (Ch. 149)				
5745MHz				
VOLTAGE (%)	POWER (VDC)	TEMP (°C)	Fre. Dev. (kHz)	Deviation (ppm)
100%	3.8	+20(Ref)	26	4.727
100%		-30	21	3.818
100%		-20	20	3.636
100%		-10	26	4.727
100%		0	19	3.455
100%		+10	31	5.636
100%		+20	28	5.091
100%		+30	28	5.091
100%		+40	26	4.727
100%		+50	25	4.545
85%	3.6	+20	29	5.273
115%	4.2	+20	22	4.000

2.7. Conducted Emission

2.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50μH/50Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dBμV)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.7.2. Test Description

Test Setup:

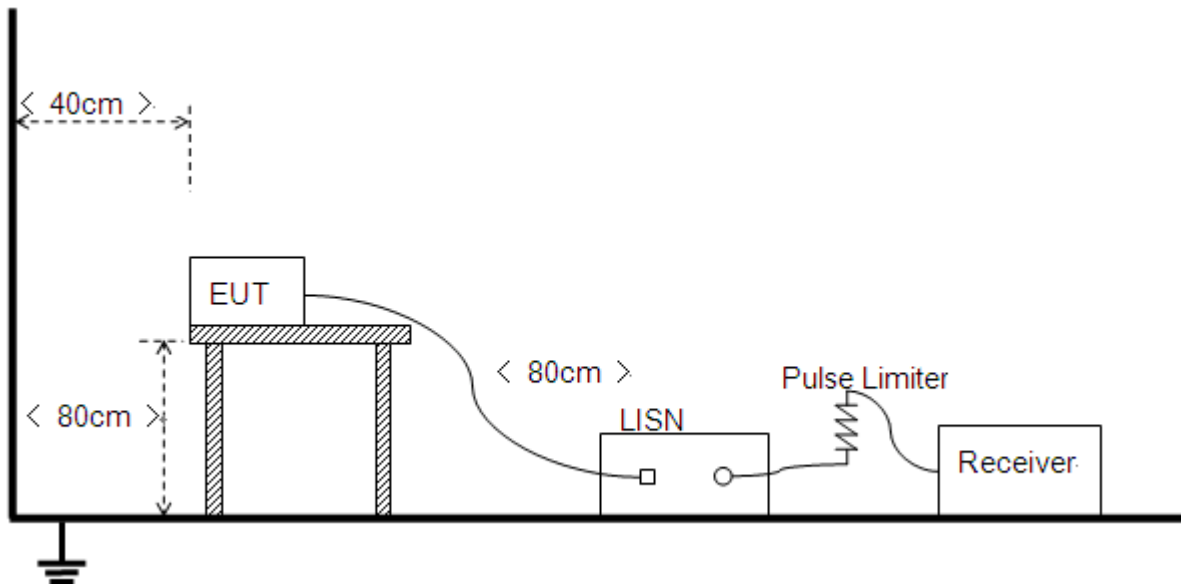

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.



2.7.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and Plot below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT+ ADAPTER+WIFI TX

Test Voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B.Test Plot:

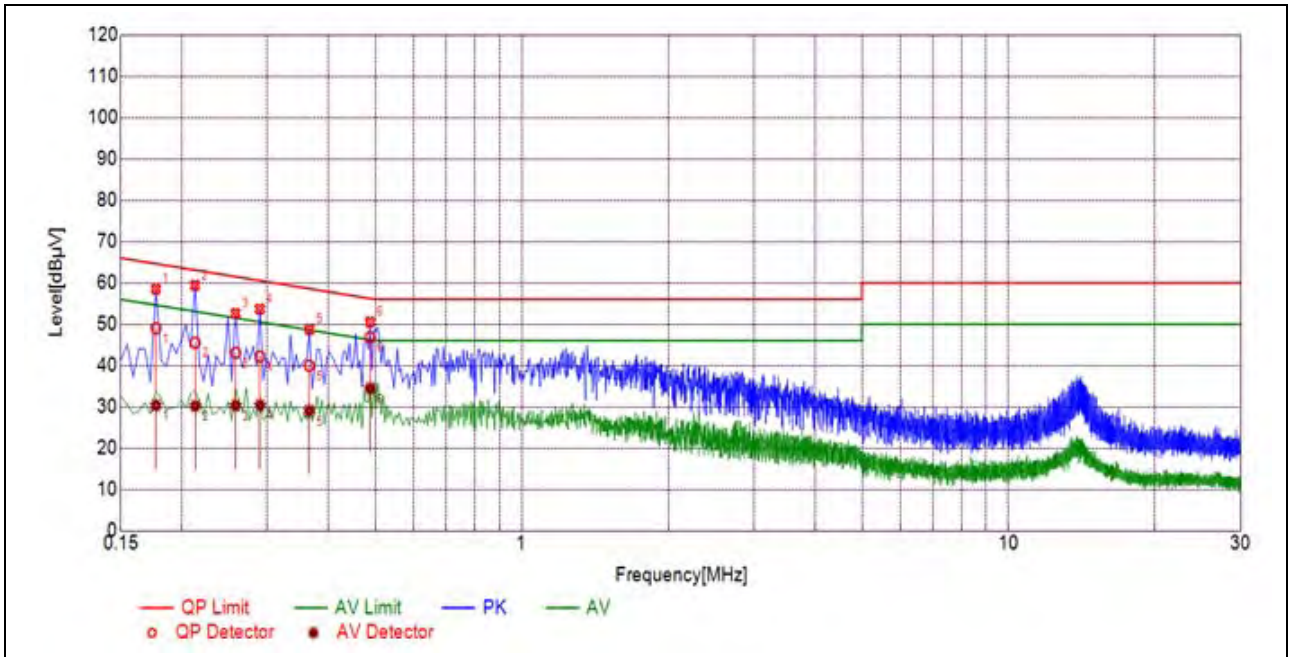

(L Phase)

No.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1771	49.01	30.34	64.62	54.62	Line	PASS
2	0.2132	45.53	30.19	63.08	53.08		PASS
3	0.2582	43.08	30.28	61.49	51.49		PASS
4	0.2897	42.18	30.37	60.53	50.53		PASS
5	0.3657	39.94	29.04	58.60	48.60		PASS
6	0.4872	46.83	34.44	56.22	46.22		PASS

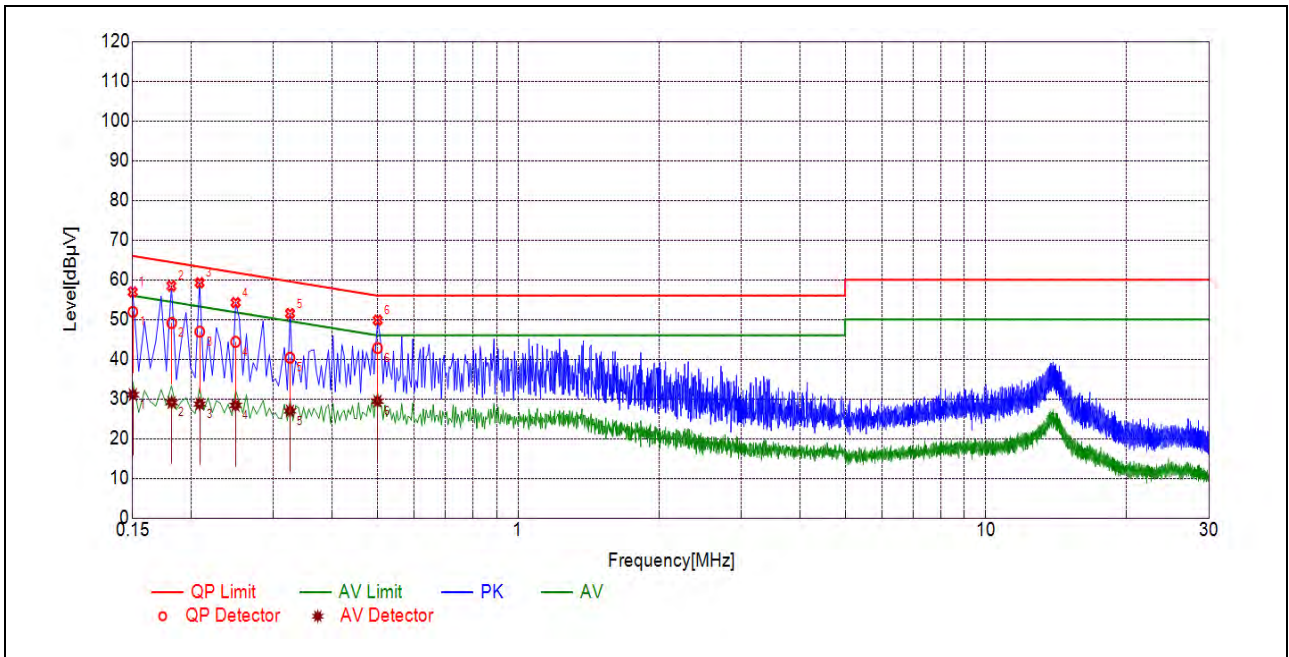

(N Phase)

No.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1501	51.93	31.06	65.99	55.99	Neutral	PASS
2	0.1817	49.10	29.09	64.41	54.41		PASS
3	0.2086	46.92	28.72	63.26	53.26		PASS
4	0.2488	44.38	28.37	61.80	51.80		PASS
5	0.3253	40.37	27.00	59.57	49.57		PASS
6	0.5005	42.80	29.45	56.00	46.00		PASS

2.8. Restricted Frequency Bands

2.8.1. Requirement

The peak emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (3) For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

The following formula is used to convert the equipment isotropic radiated power(e.i.r.p.) to field strength (dBμV/m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz = 68.23 dBuV/m


Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).

2.8.2. Test Description

Test Setup

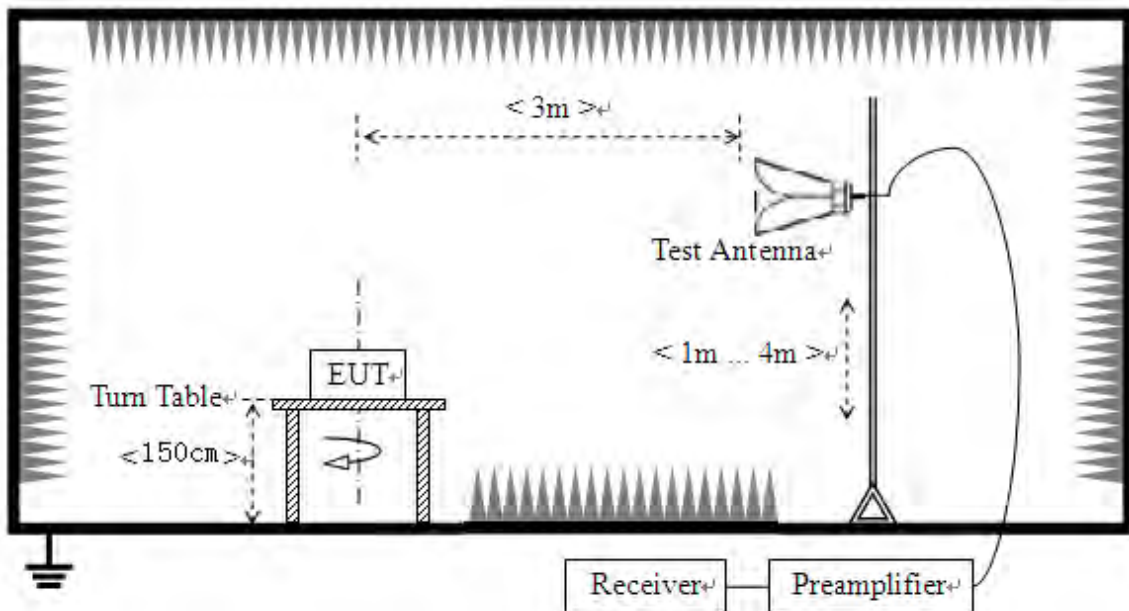



The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

KDB 789033 Section H) 3)5)6(d)) was used in order to prove compliance

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

2.8.3. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna; U_R : Receiver Reading

G_{preamp} : Preamplifier Gain; A_{Factor} : Antenna Factor at 3m

Note 1: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

Note 2 All test modes and bandwidth were considered and evaluated respectively by performing full test, only the worst data were recorded for each bandwidth.


802.11a Mode

A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV	U_R (dB μ V)					
36	5111.56	PK	48.16	-16.92	32.20	63.44	74	PASS
36	5131.24	AV	31.92	-16.92	32.20	47.20	54	PASS
64	5354.44	PK	41.05	-16.80	32.20	56.45	74	PASS
64	5350.00	AV	30.31	-16.80	32.20	45.71	54	PASS
100	5455.31	PK	42.25	-16.64	32.20	57.81	74	PASS
100	5470.00	AV	30.29	-16.64	32.20	45.85	54	PASS
144	5738.70	PK	48.82	-16.64	32.20	64.38	68.23	PASS
144	5725.00	AV	31.47	-16.64	32.20	47.03	54	PASS
149	5700.00	PK	46.98	-16.23	32.20	62.95	105.23	PASS
165	5850.00	PK	39.93	-16.23	32.20	55.90	122.23	PASS




B.Test Plot:

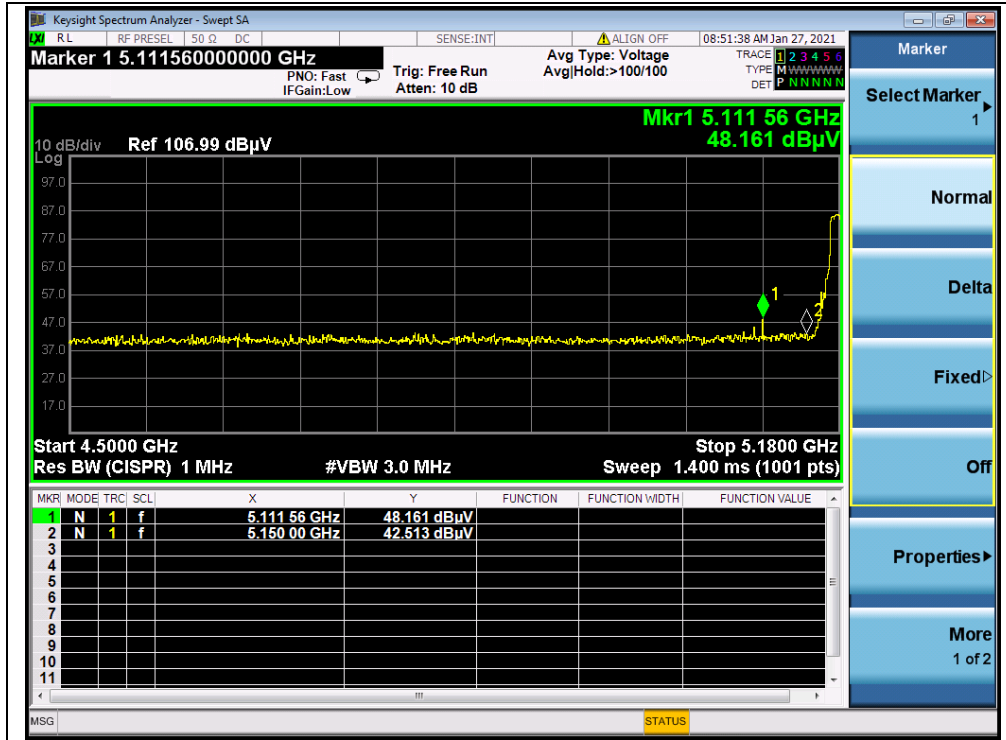


(PEAK, Channel 36, 802.11a)

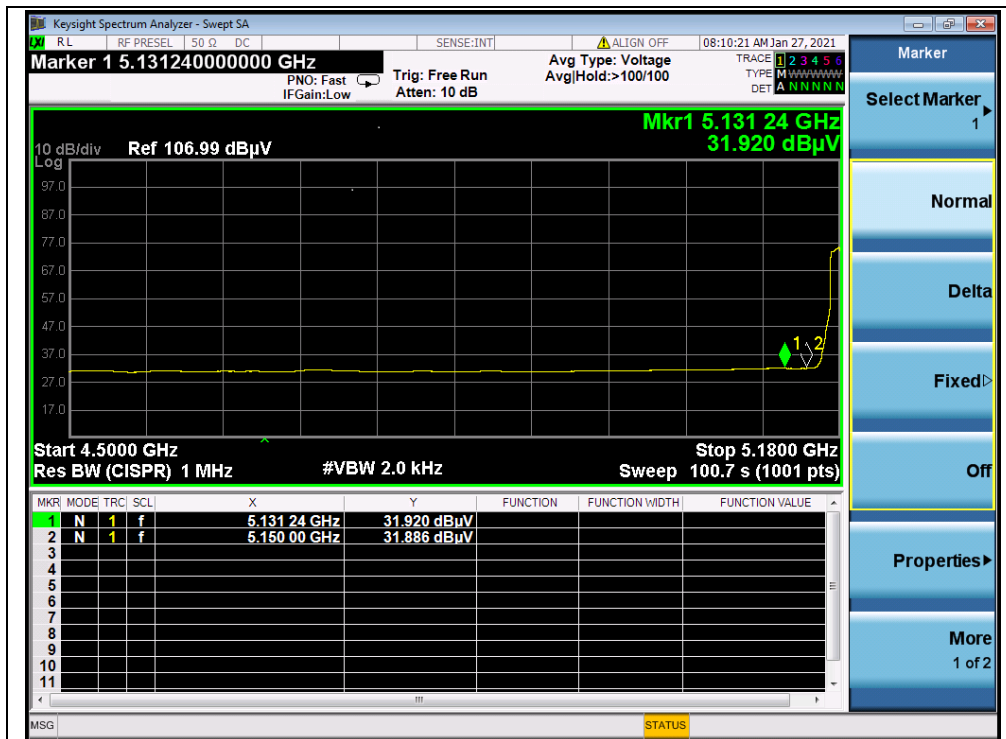


(AVERAGE, Channel 36, 802.11a)

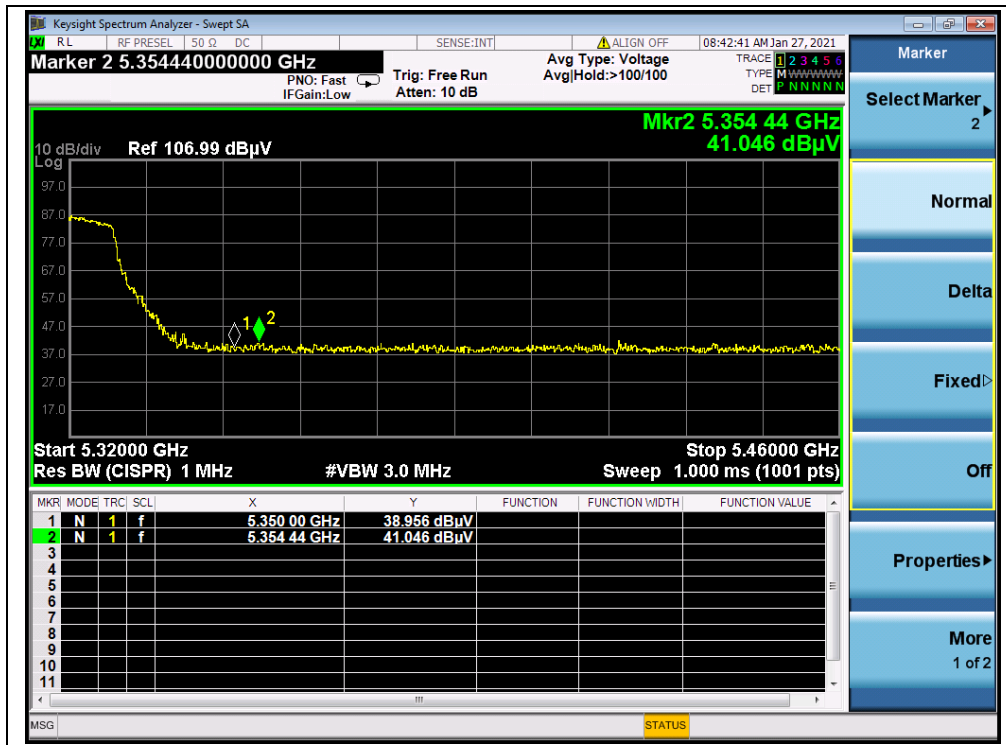


(PEAK, Channel 64, 802.11a)

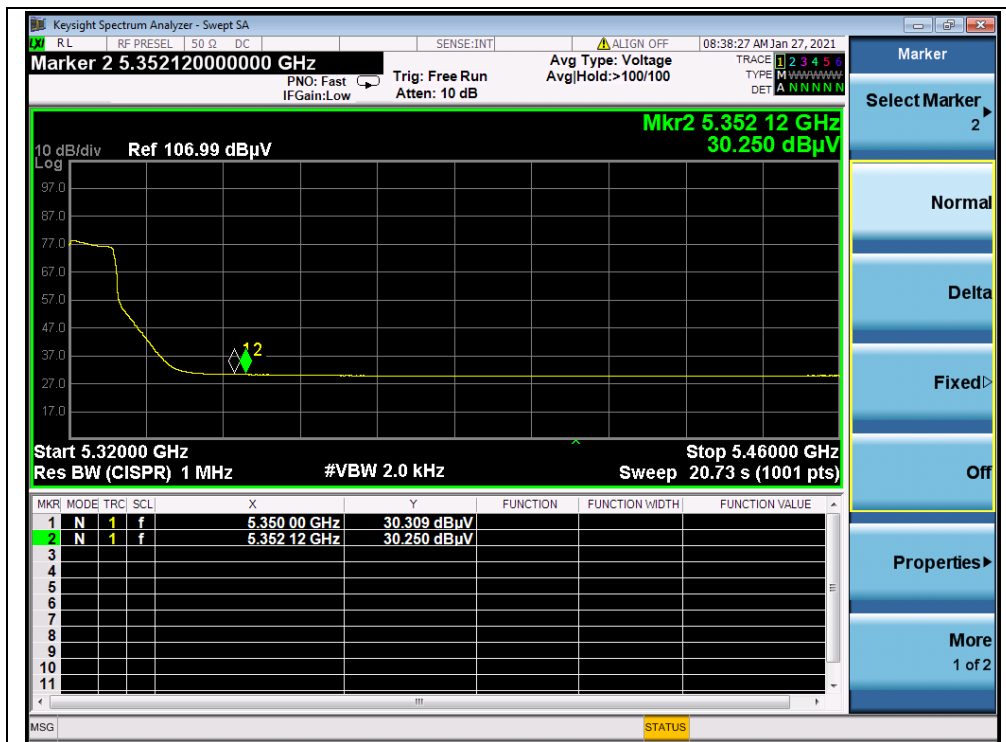


(AVERAGE, Channel 64, 802.11a)

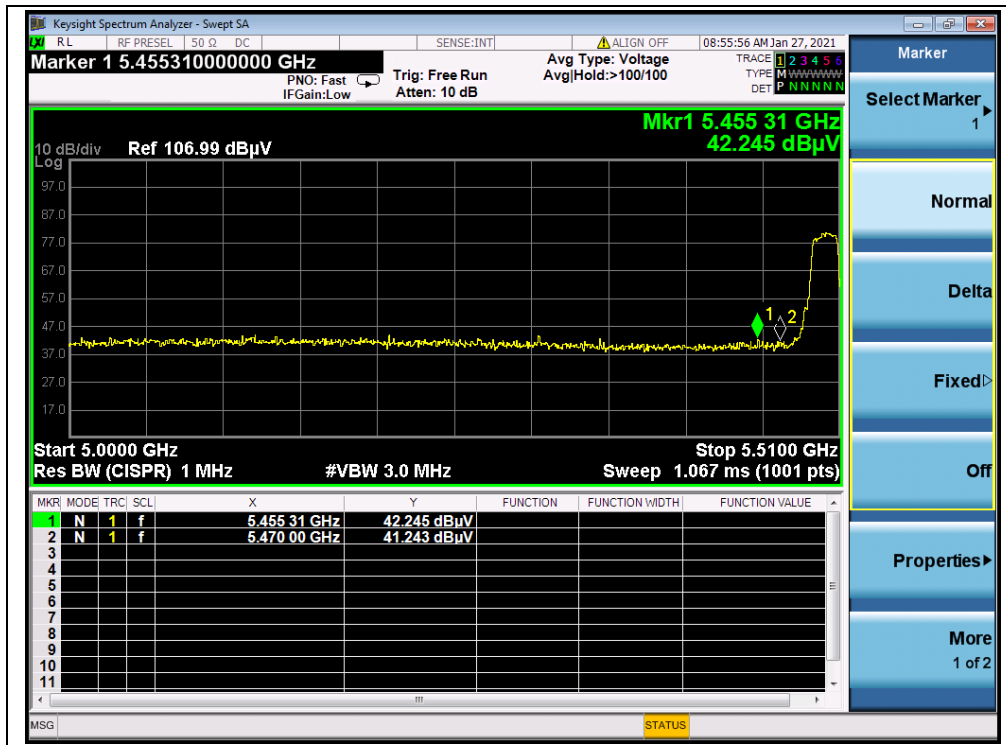


(PEAK, Channel100, 802.11a)

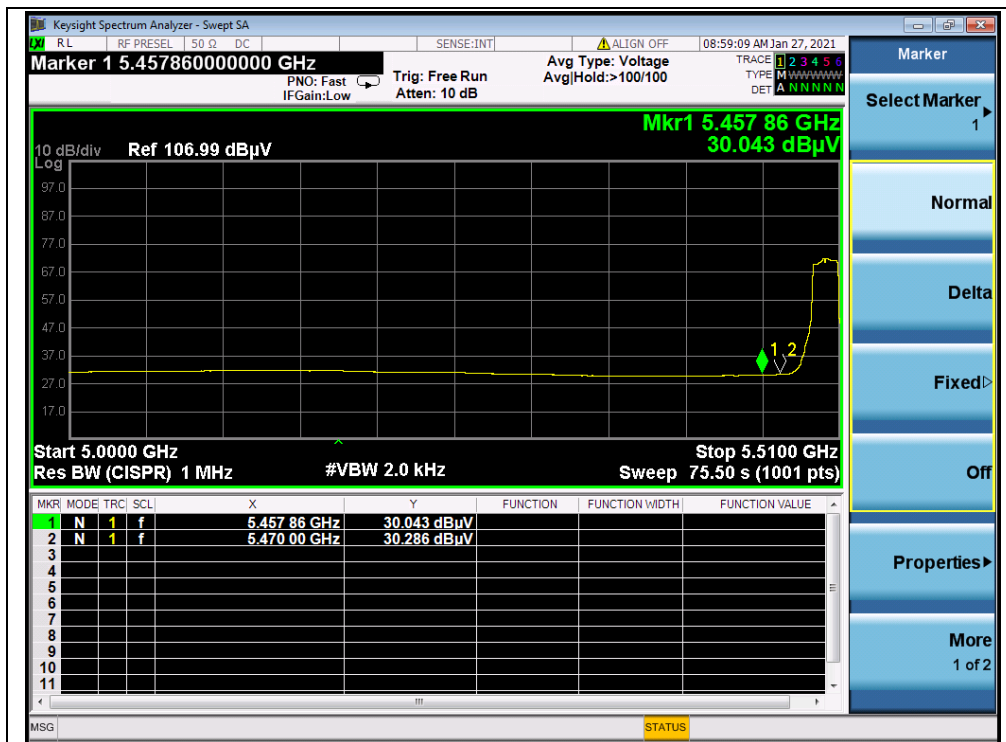


(AVERAGE, Channel 100, 802.11a)

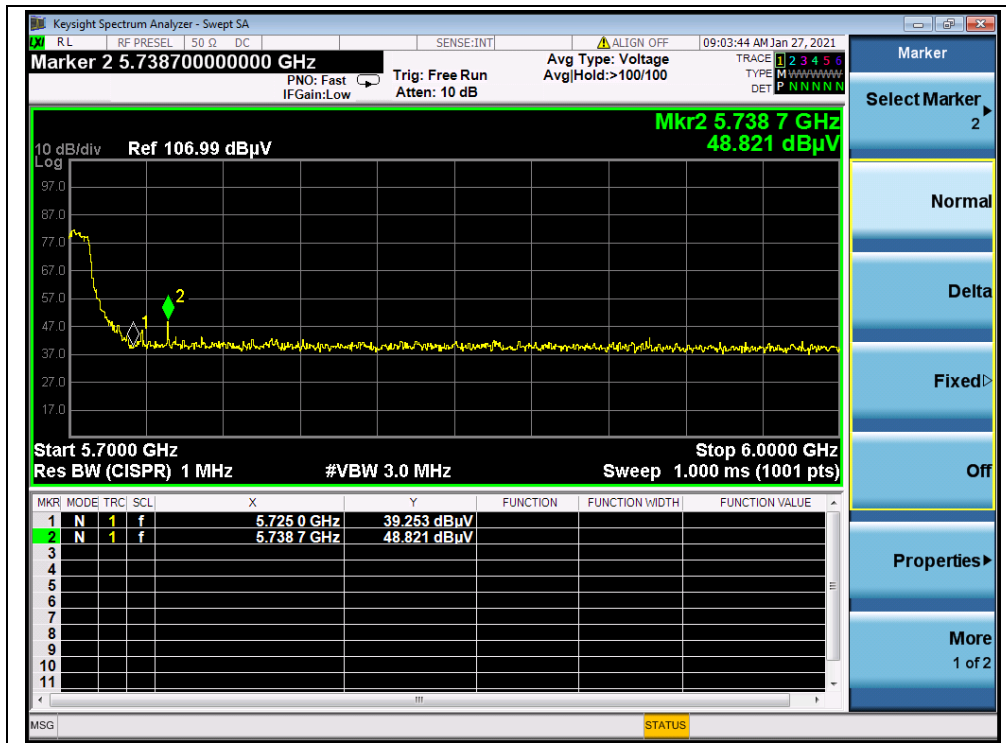


(PEAK, Channel 144, 802.11a)

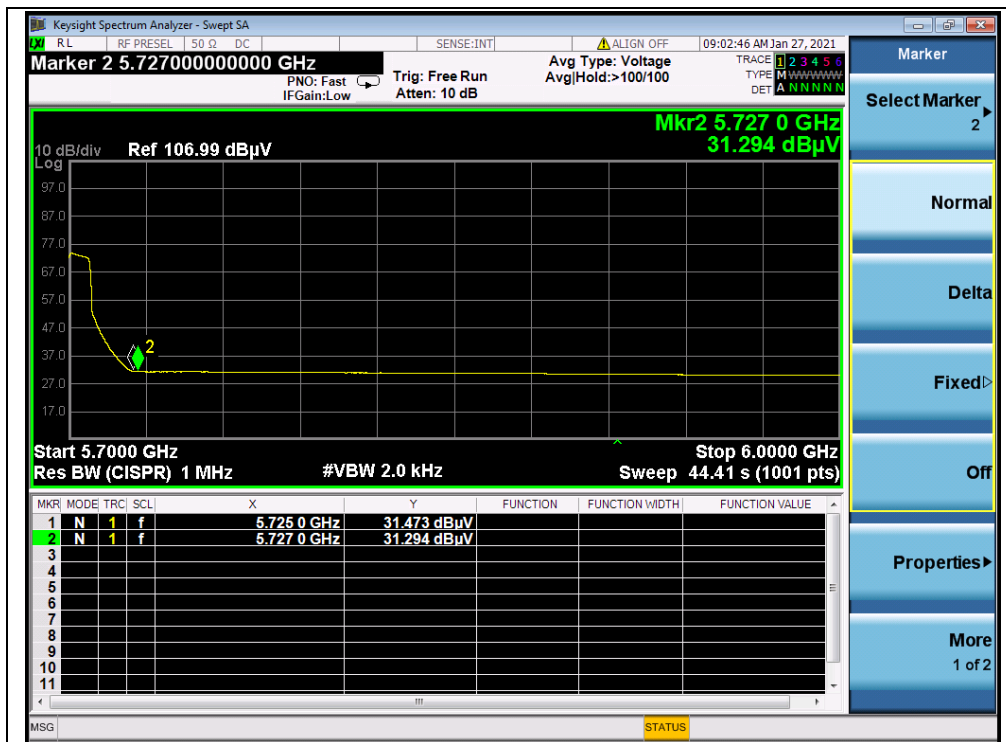

(AVERAGE, Channel 144, 802.11a)

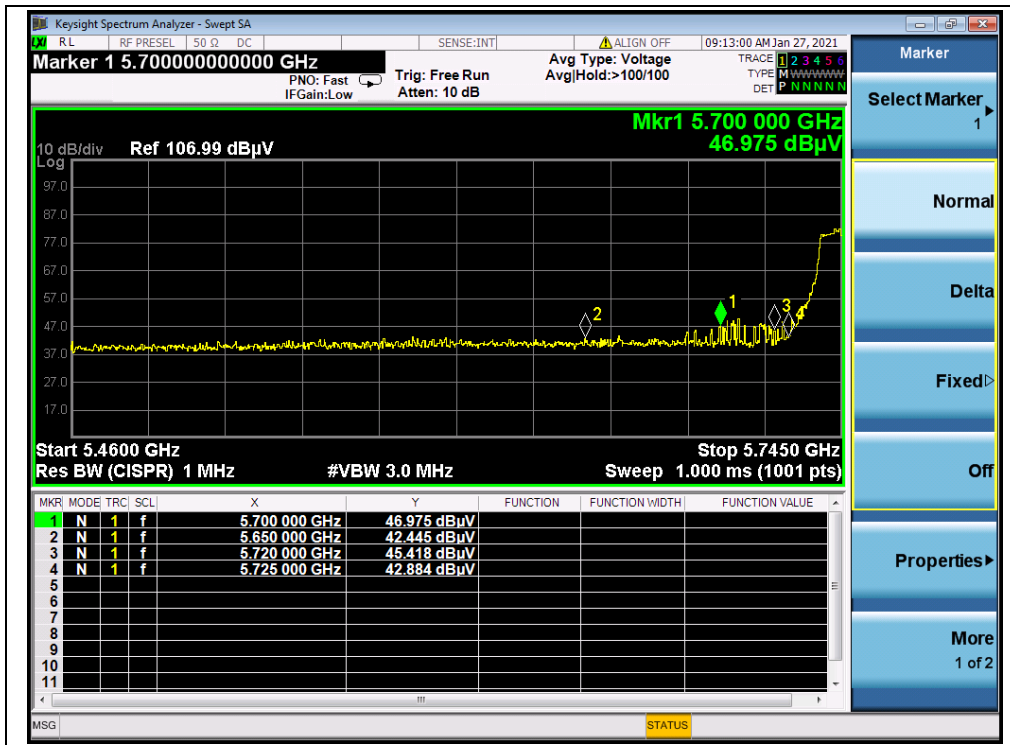

(PEAK, Channel 149, 802.11a)

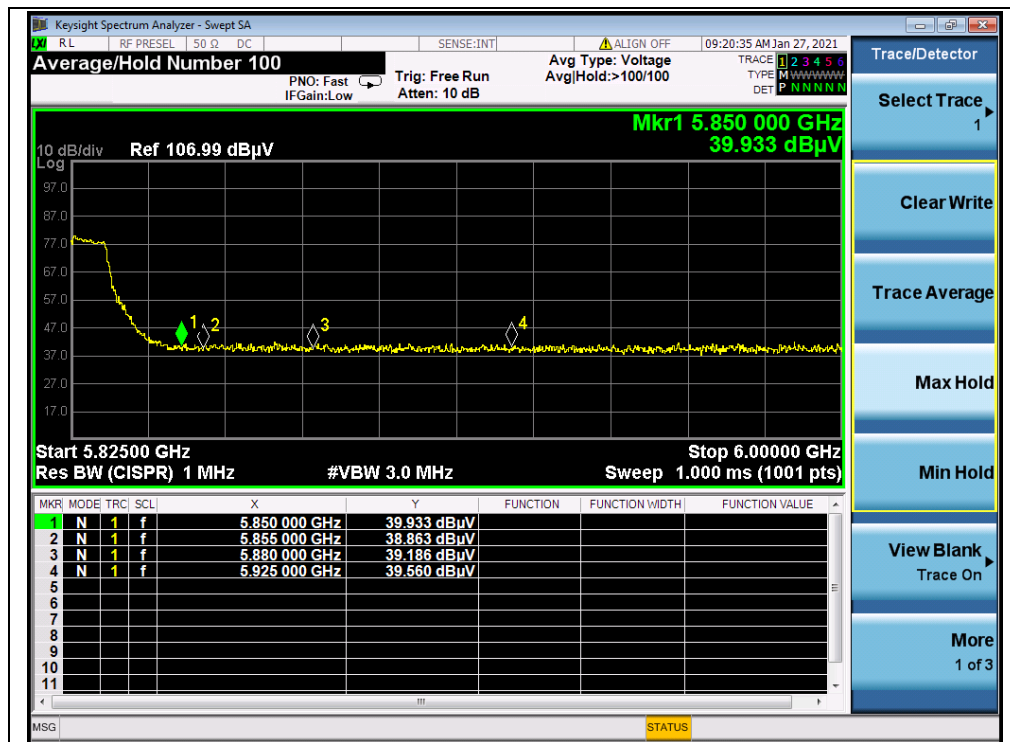


(PEAK, Channel 165, 802.11a)


**802.11n (HT40) Mode****A.Test Verdict:**

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
38	5131.58	PK	52.40	-16.92	32.20	67.68	74	PASS
38	5150.00	AV	34.27	-16.92	32.20	49.55	54	PASS
62	5354.60	PK	40.50	-16.80	32.20	55.90	74	PASS
62	5350.00	AV	31.00	-16.80	32.20	46.40	54	PASS
102	5467.04	PK	46.35	-16.64	32.20	61.91	68.23	PASS
102	5470.00	AV	30.41	-16.64	32.20	45.97	54	PASS
142	5754.38	PK	45.16	-16.64	32.20	60.72	68.23	PASS
142	5744.15	AV	31.17	-16.64	32.20	46.73	54	PASS
151	5719.00	PK	46.33	-16.23	32.20	62.30	110.55	PASS
159	5850.00	PK	45.08	-16.23	32.20	61.05	122.23	PASS


B.Test Plot:

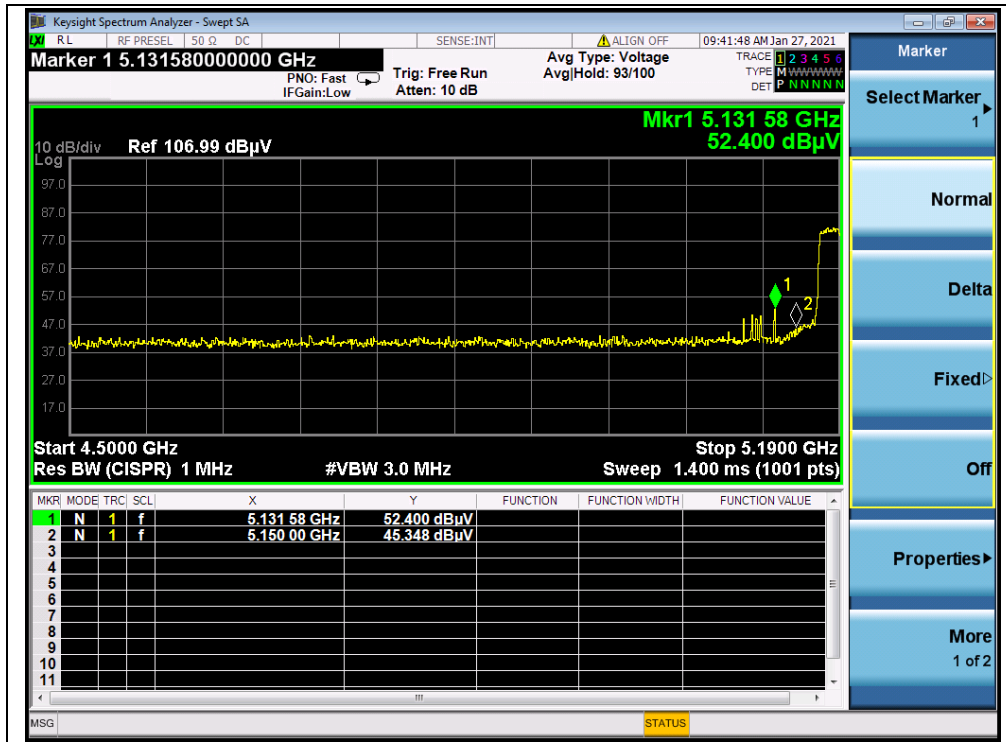


(PEAK, Channel 38, 802.11n (HT40))

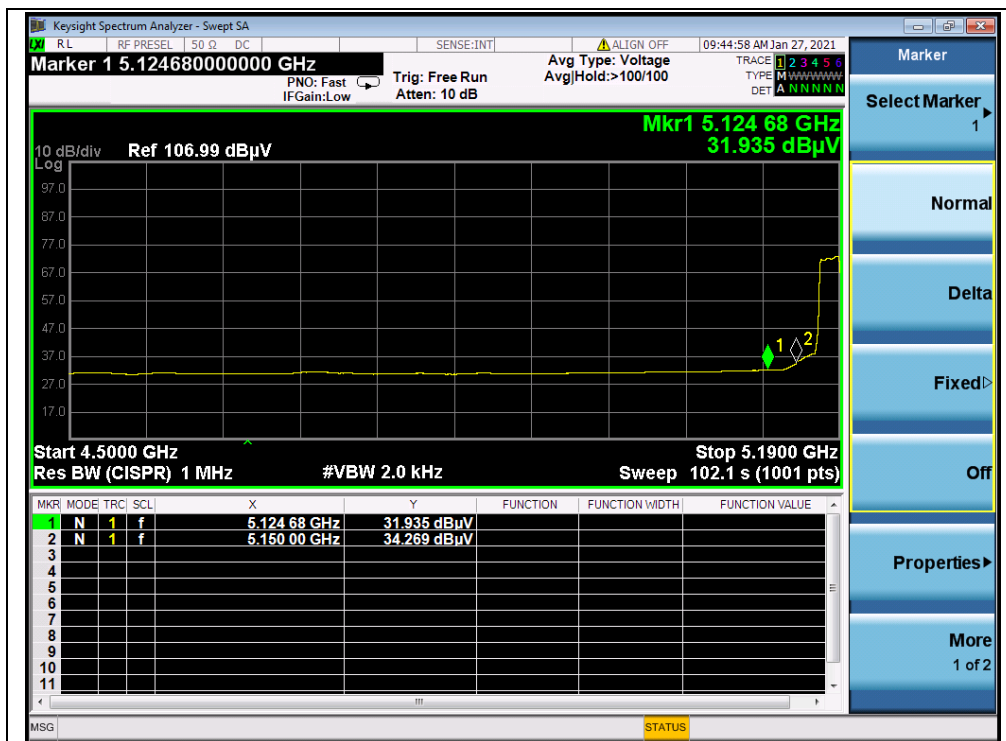


(AVERAGE, Channel 38, 802.11n (HT40))

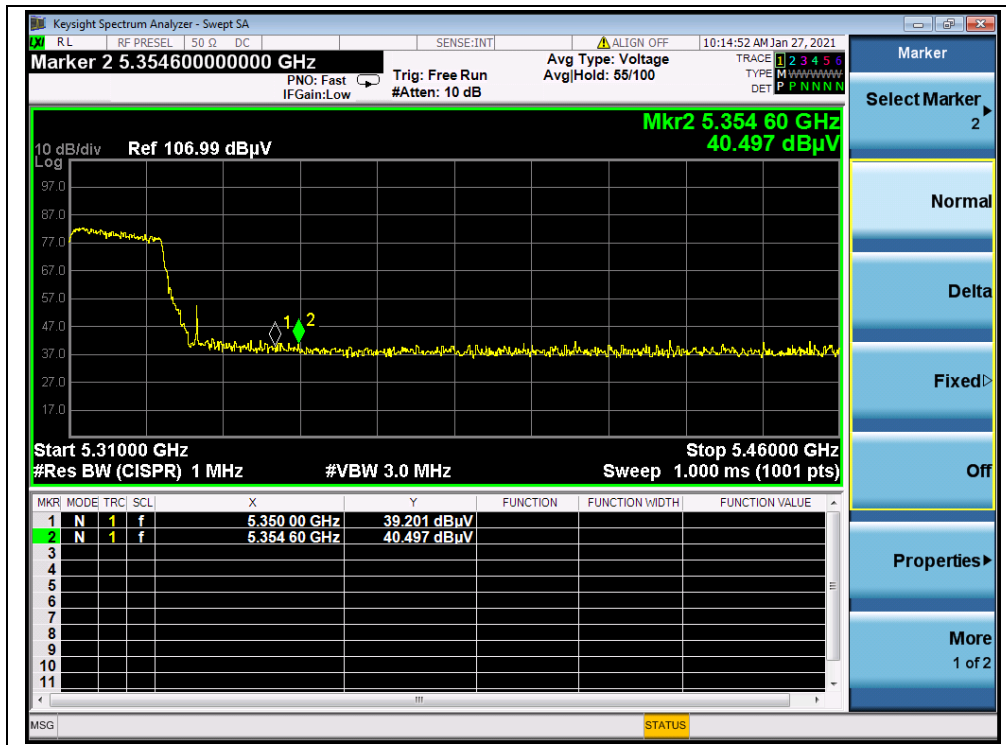


(PEAK, Channel 62, 802.11n (HT40))

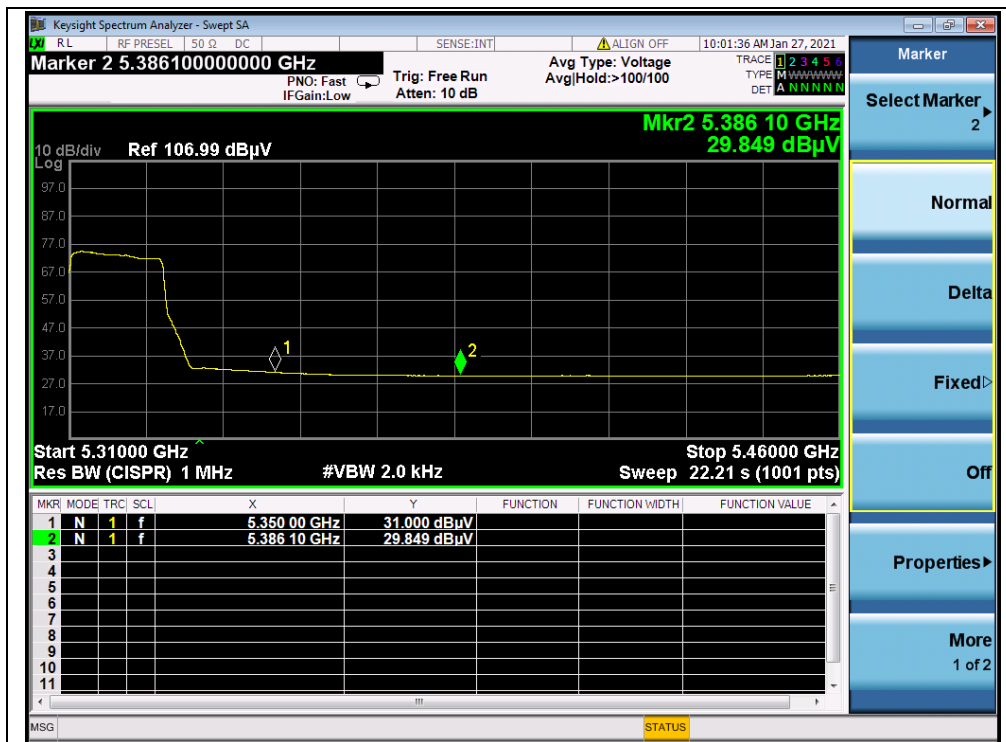


(AVERAGE, Channel 62, 802.11n (HT40))

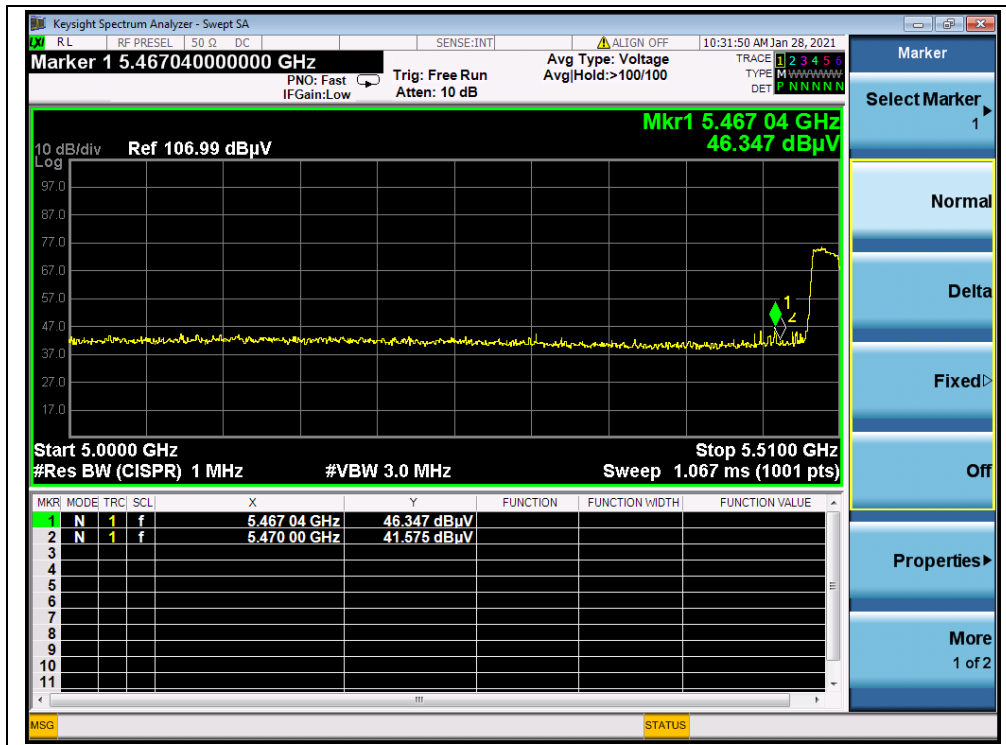


(PEAK, Channel 102, 802.11n (HT40))

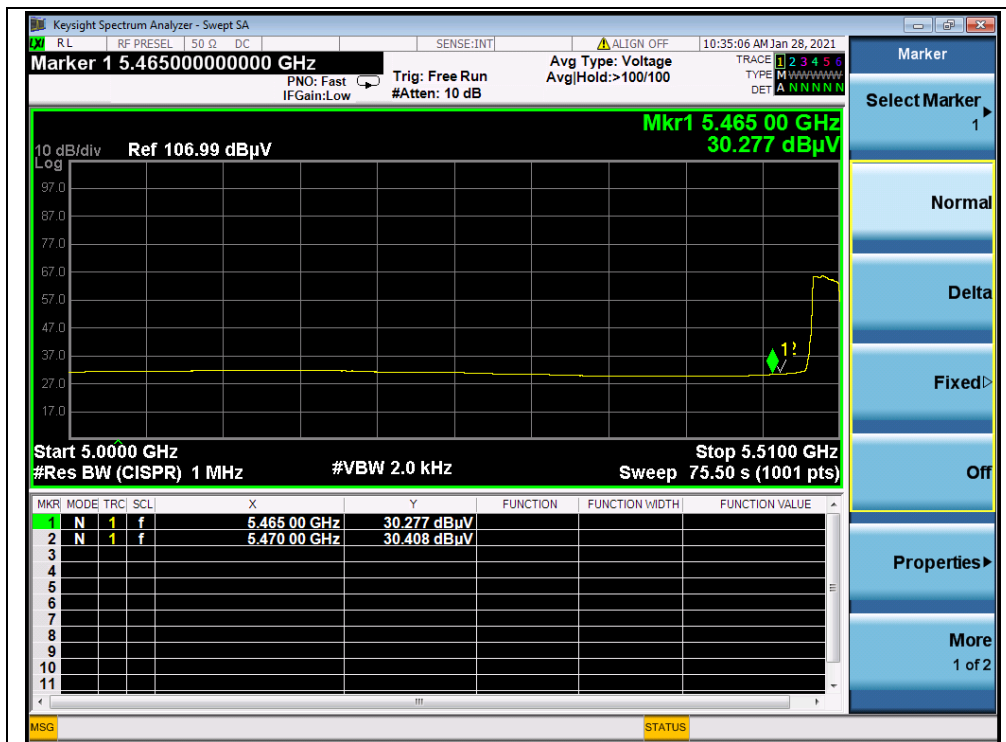


(AVERAGE, Channel 102, 802.11n (HT40))

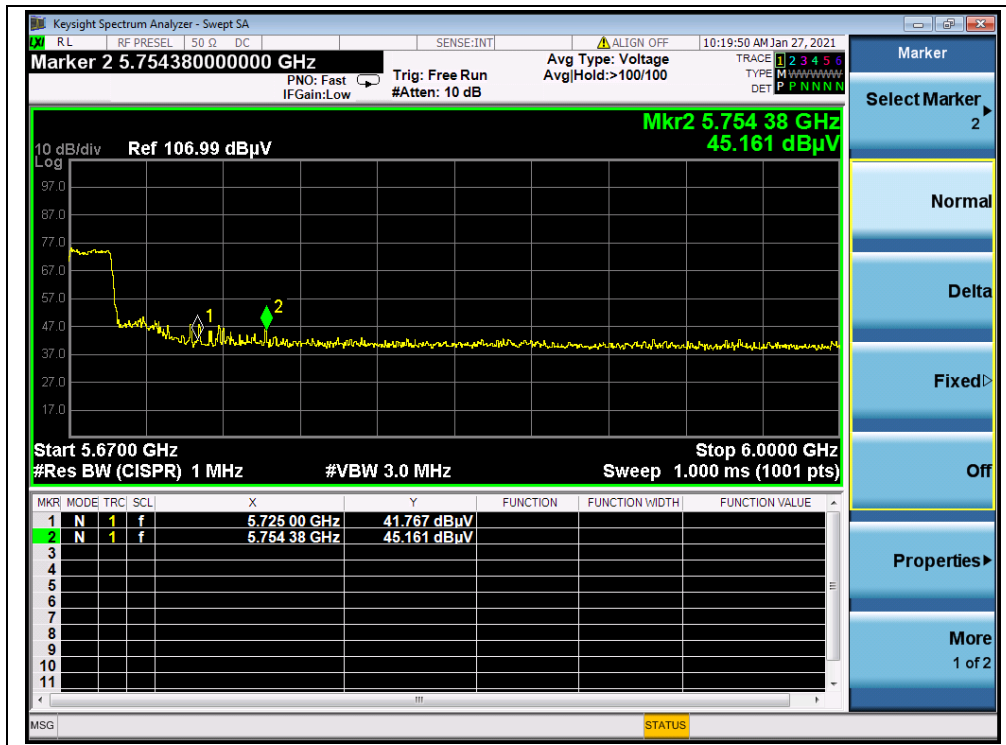


(PEAK, Channel 142, 802.11n (HT40))

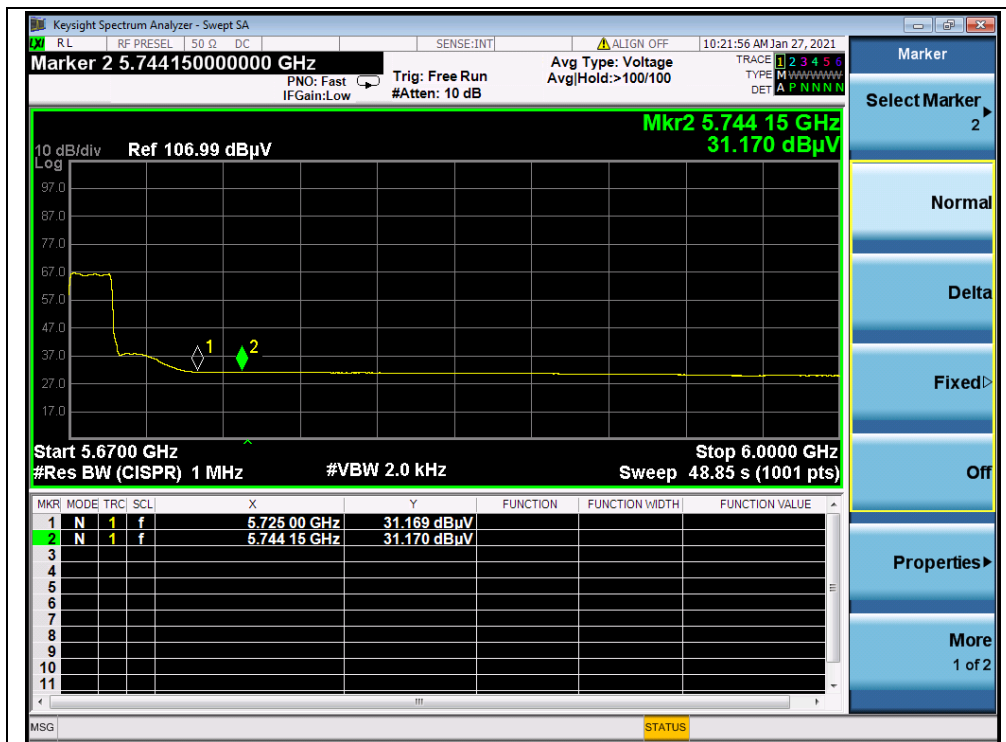

(AVERAGE, Channel 142, 802.11n (HT40))

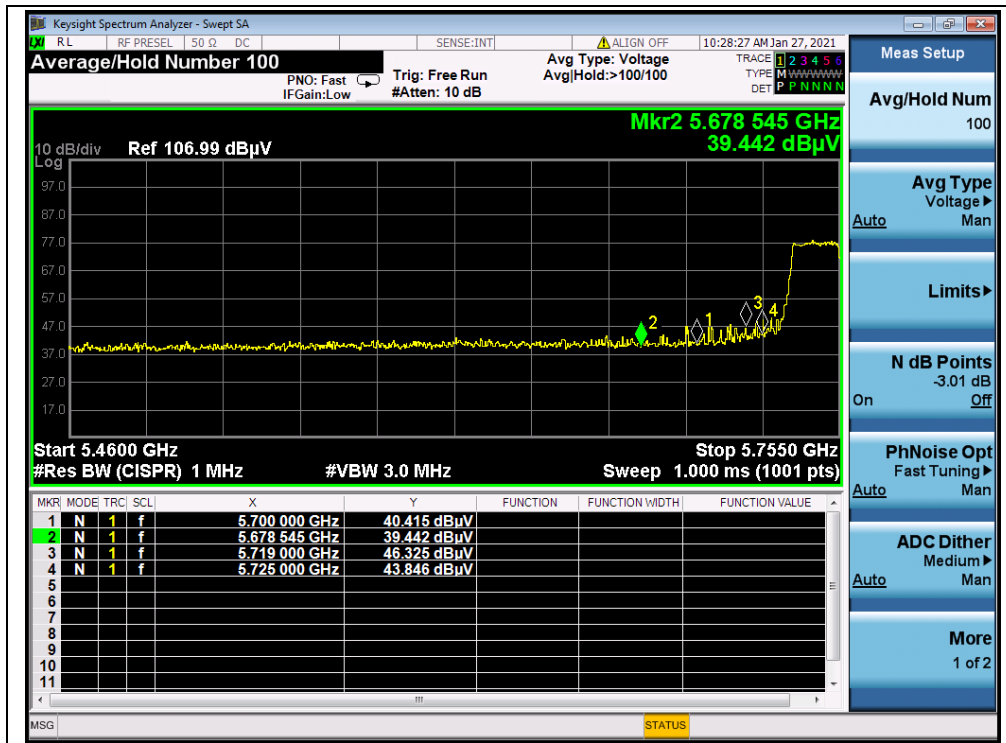

(PEAK, Channel 151, 802.11n (HT40))

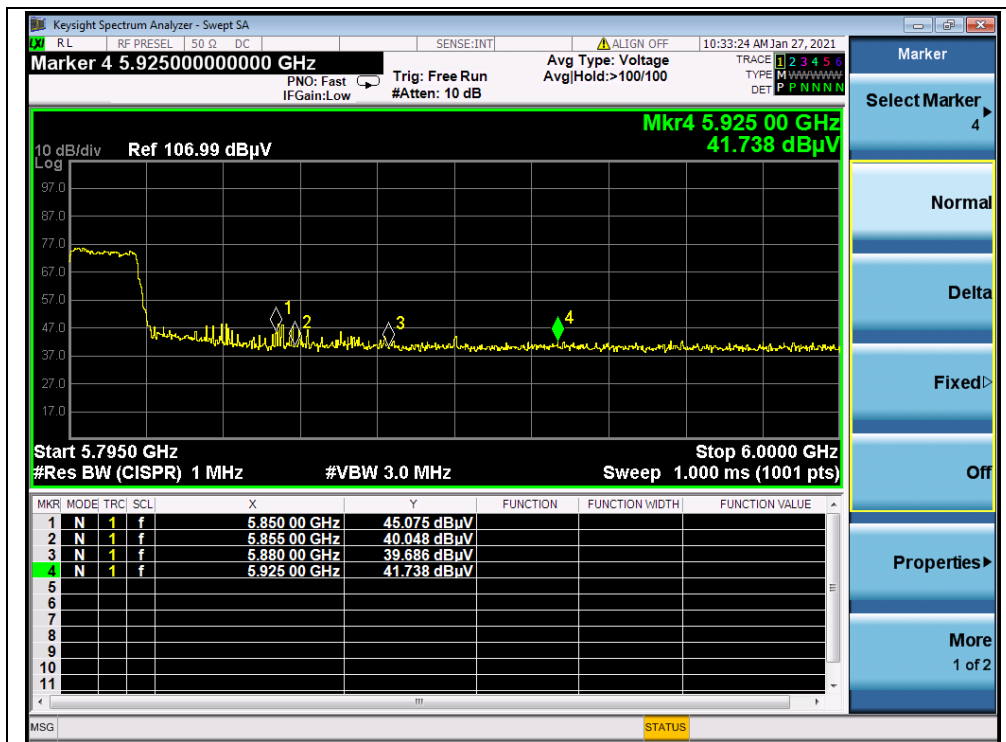


(PEAK, Channel 159, 802.11n (HT40))

**802.11ac (VHT80) Mode****A.Test Verdict:**


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
42	5136.60	PK	48.01	-16.92	32.20	63.29	74	PASS
42	5150.00	AV	35.41	-16.92	32.20	50.69	54	PASS
58	5353.40	PK	52.91	-16.80	32.20	68.31	74	PASS
58	5353.40	AV	31.60	-16.80	32.20	47.00	54	PASS
106	5461.10	PK	46.60	-16.64	32.20	62.16	68.23	PASS
106	5470.00	AV	31.50	-16.64	32.20	47.06	54	PASS
138	5737.61	PK	43.64	-16.64	32.20	59.20	68.23	PASS
138	5738.39	AV	31.51	-16.64	32.20	47.07	54	PASS
155	5718.26	PK	55.37	-16.23	32.20	71.34	95.24	PASS
155	5850.85	PK	50.96	-16.23	32.20	66.93	100.47	PASS




B.Test Plot:

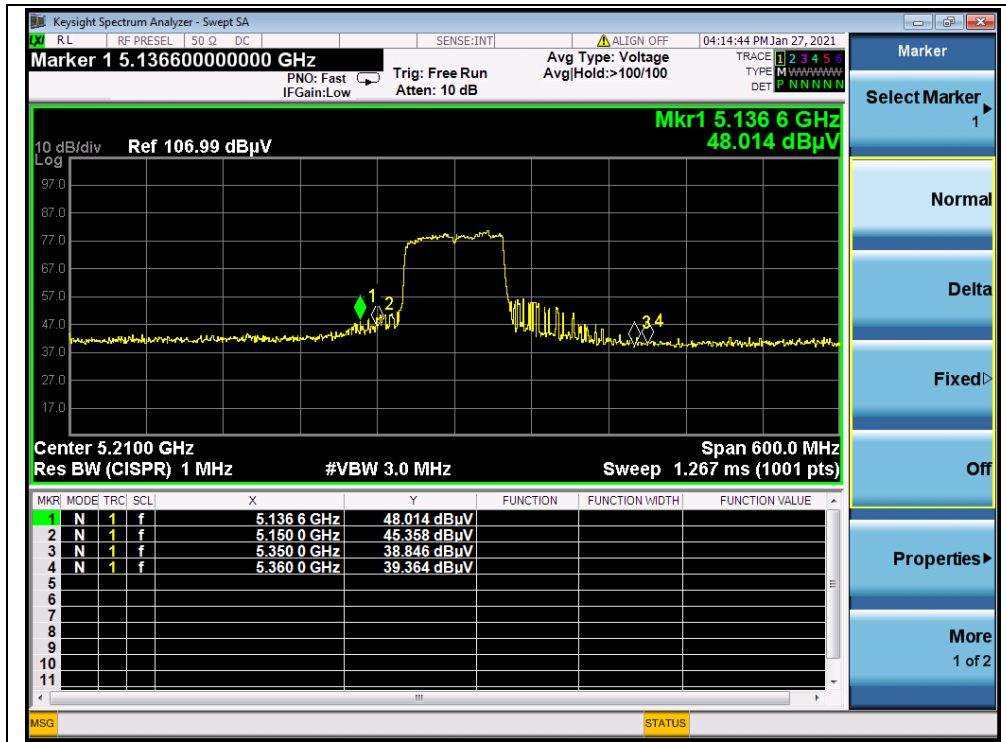


(PEAK, Channel 42, 802.11ac (VHT80))

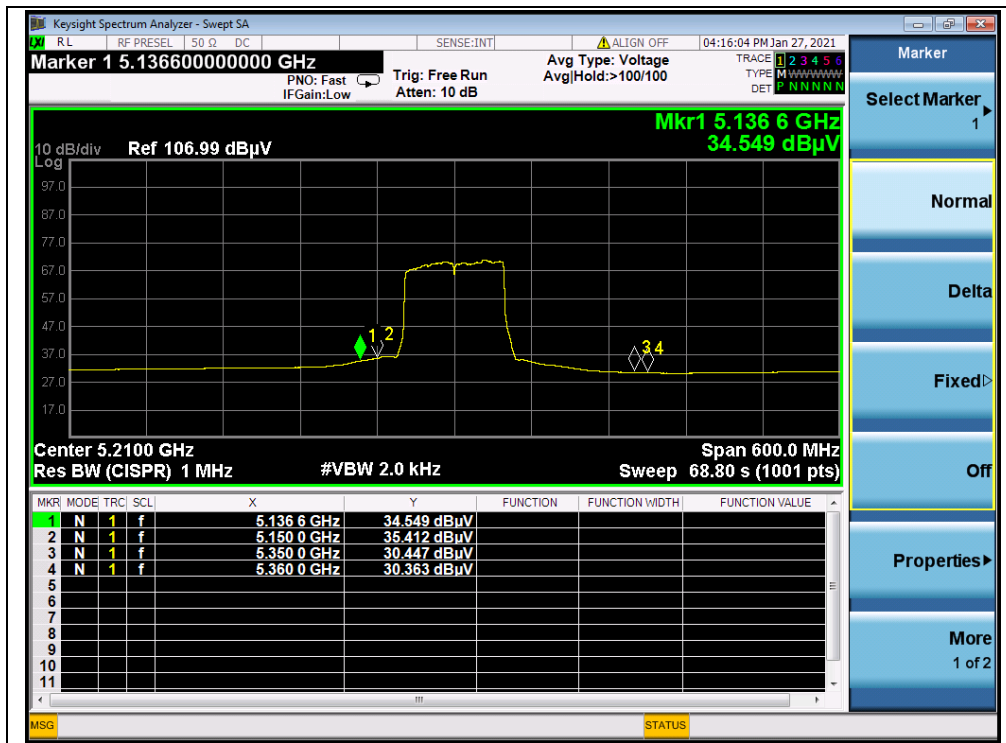


(AVERAGE, Channel 42, 802.11ac (VHT80))

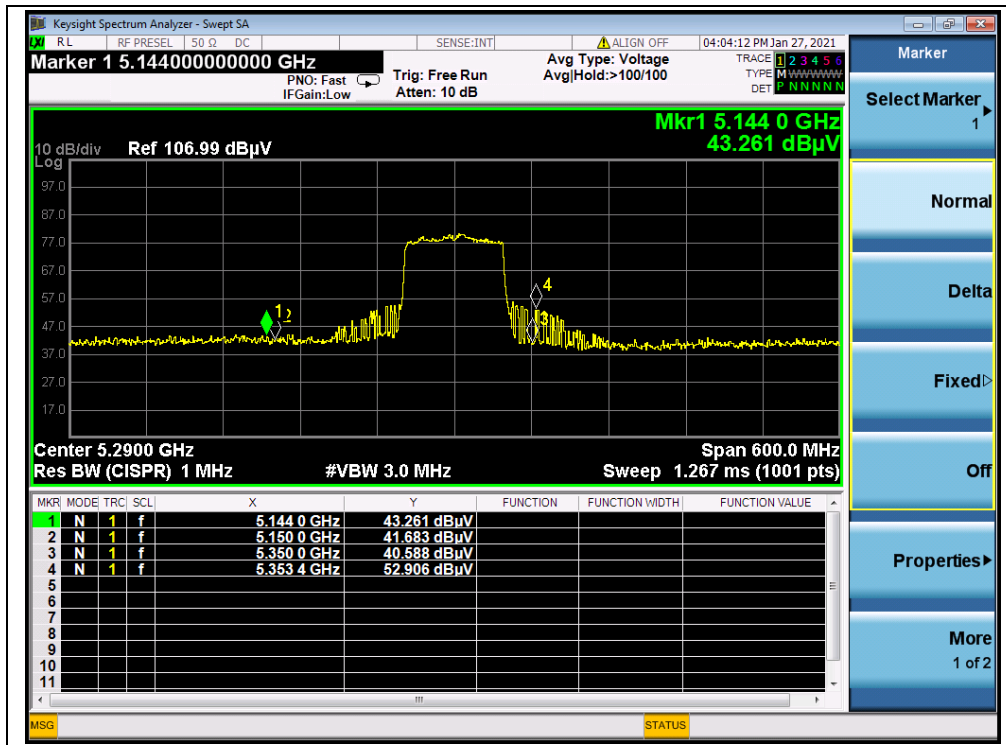


(PEAK, Channel 58, 802.11ac (VHT80))

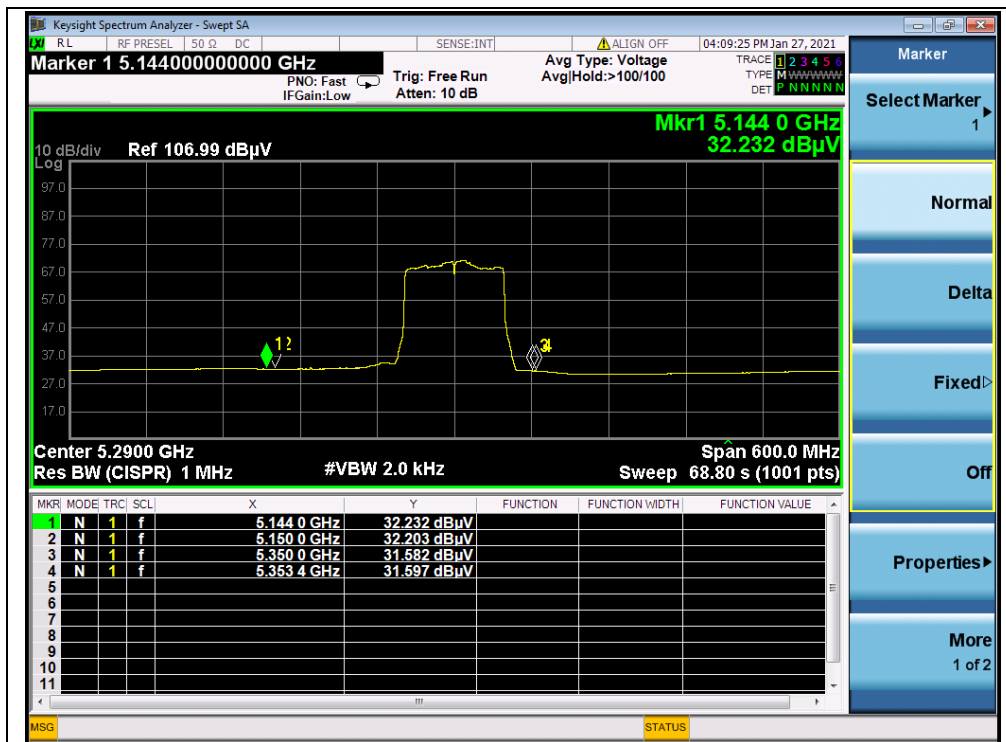


(AVERAGE, Channel 58, 802.11ac (VHT80))

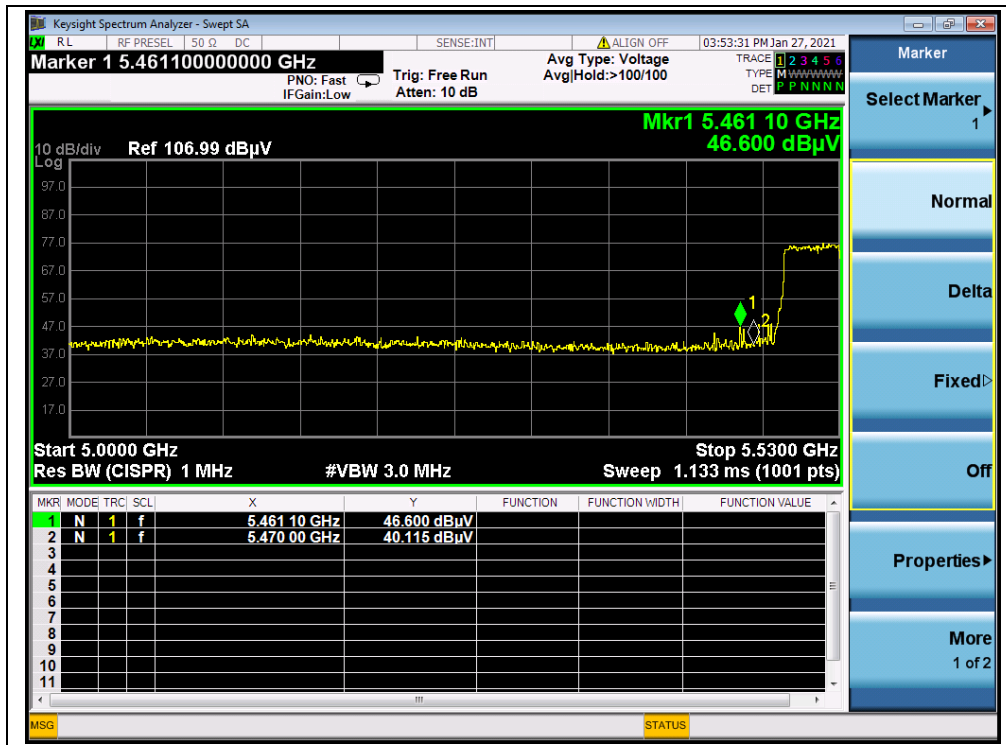


(PEAK, Channel 106, 802.11ac (VHT80))

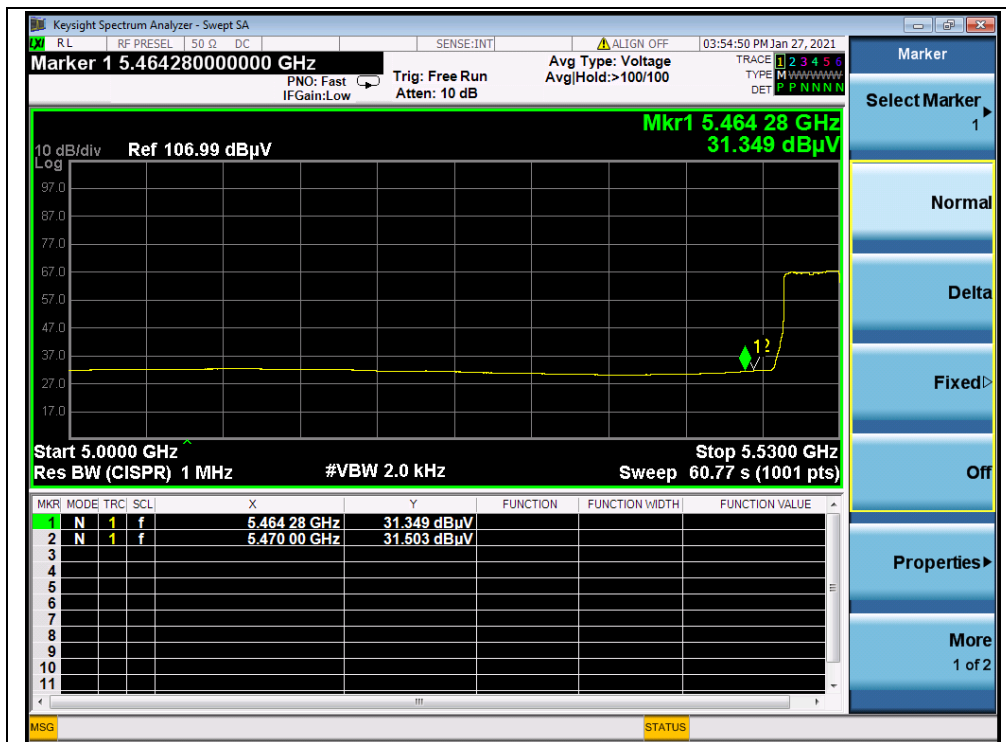


(AVERAGE, Channel 106, 802.11ac (VHT80))

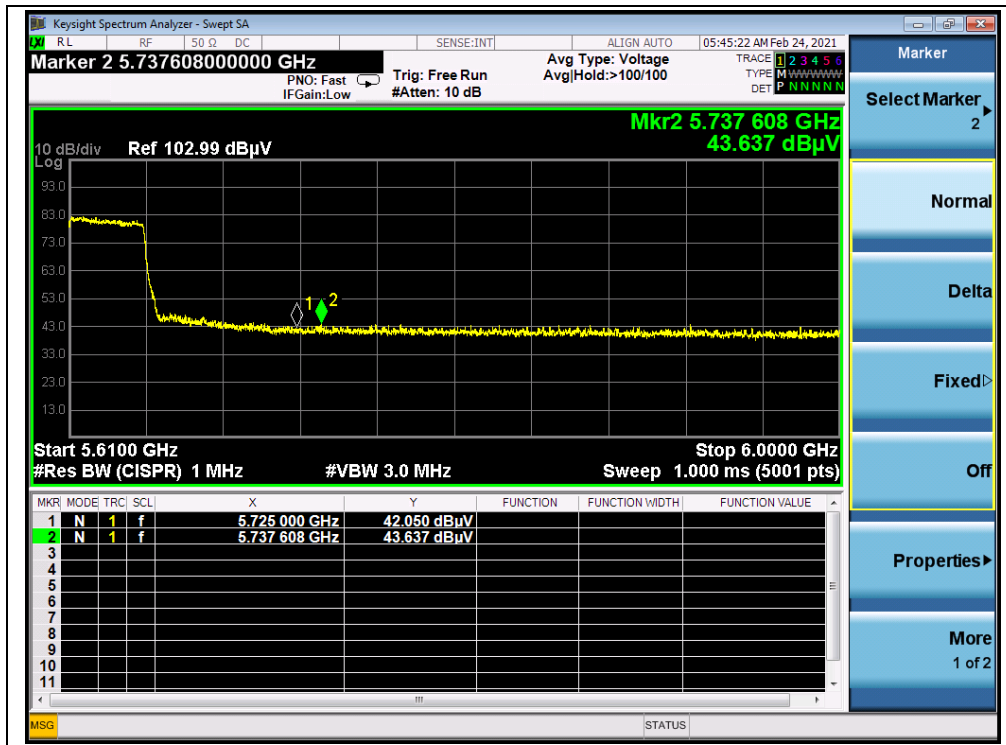


(PEAK, Channel 138, 802.11ac (VHT80))

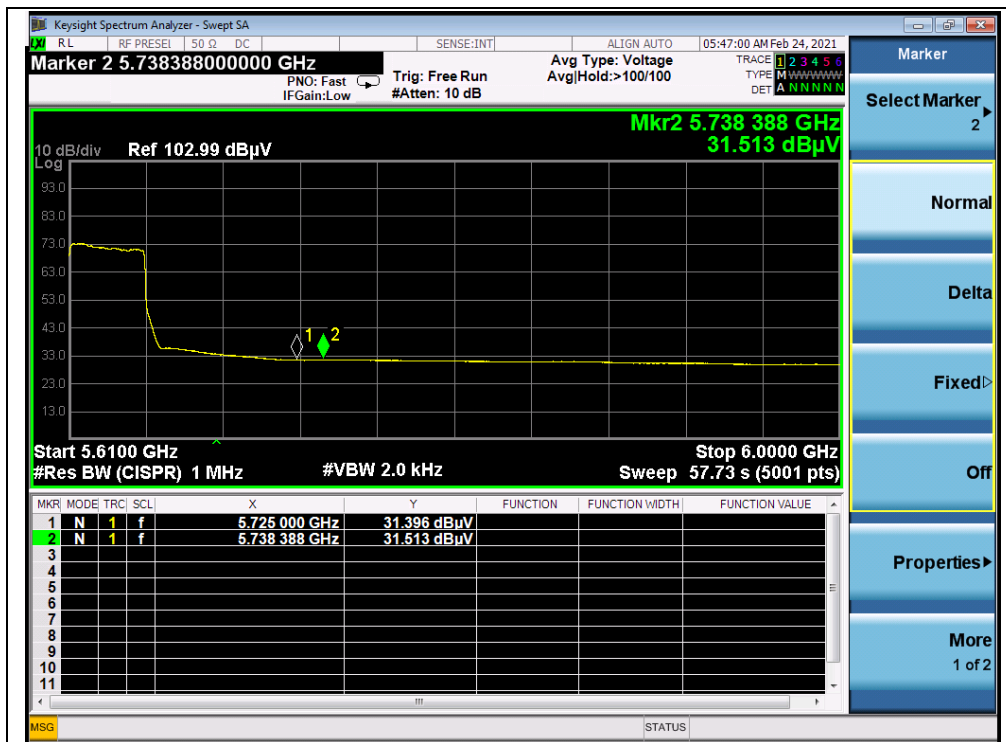

(AVERAGE, Channel 138, 802.11ac (VHT80))

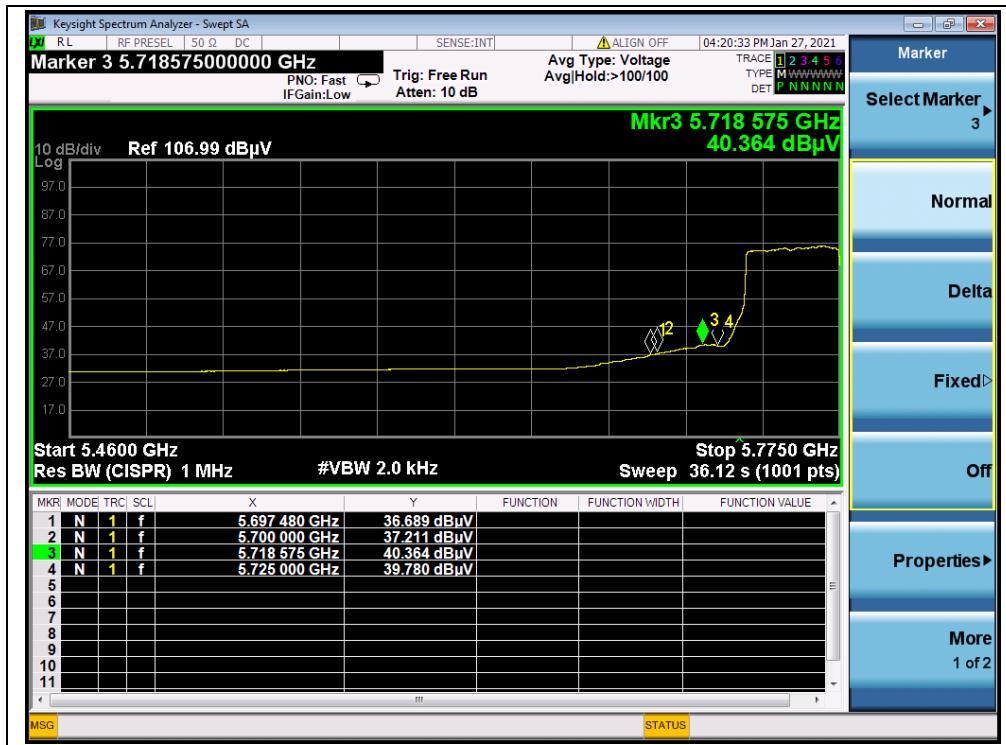

(PEAK, Channel 155, 802.11ac (VHT80))

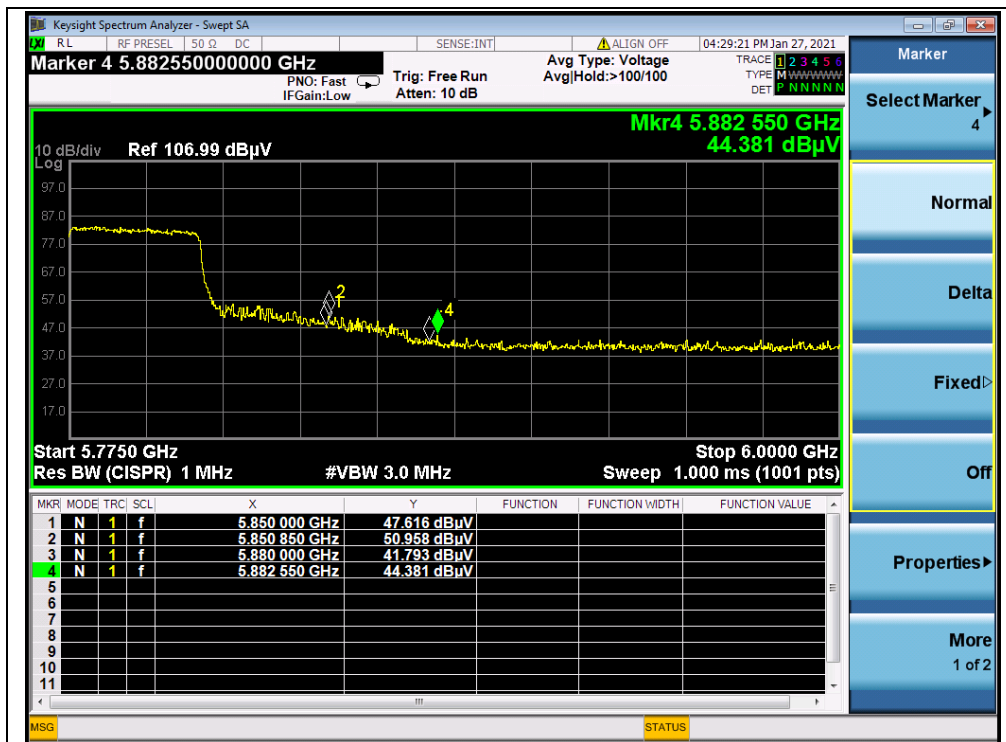

(PEAK, Channel 155, 802.11ac (VHT80))



2.9. Radiated Emission

2.9.1. Requirement

The peak emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (2) For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (3) For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

The following formula is used to convert the equipment isotropic radiated power(e.i.r.p.) to field strength (dBμV/m);

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz = 68.23 dBuV/m

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:


Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).


2.9.2. Test Description

Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

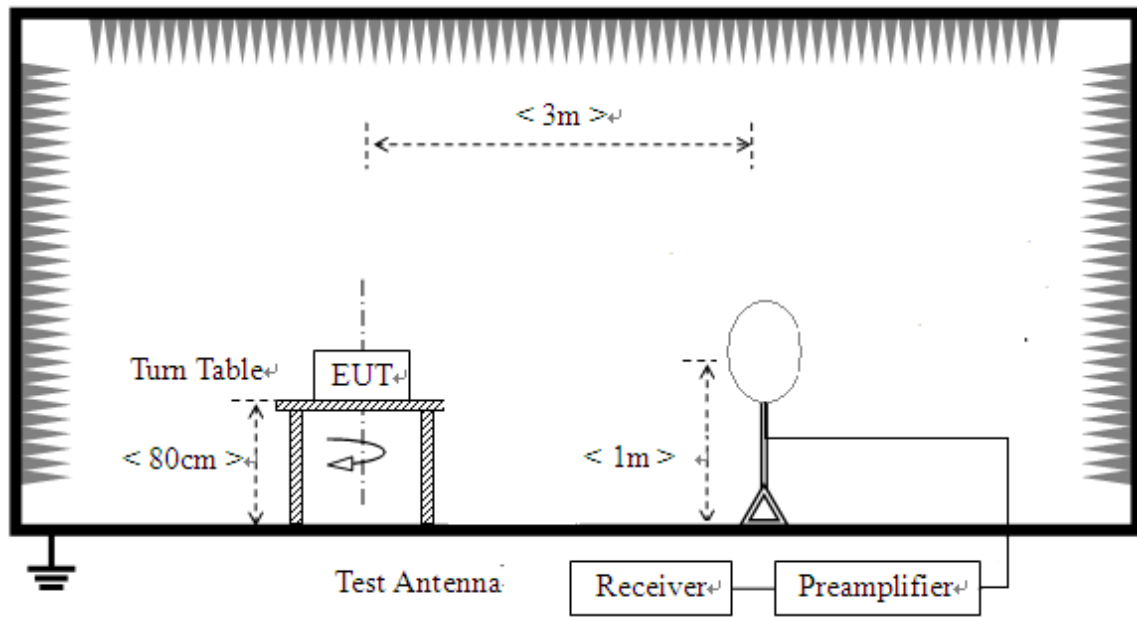

2) For radiated emissions from 30MHz to1GHz

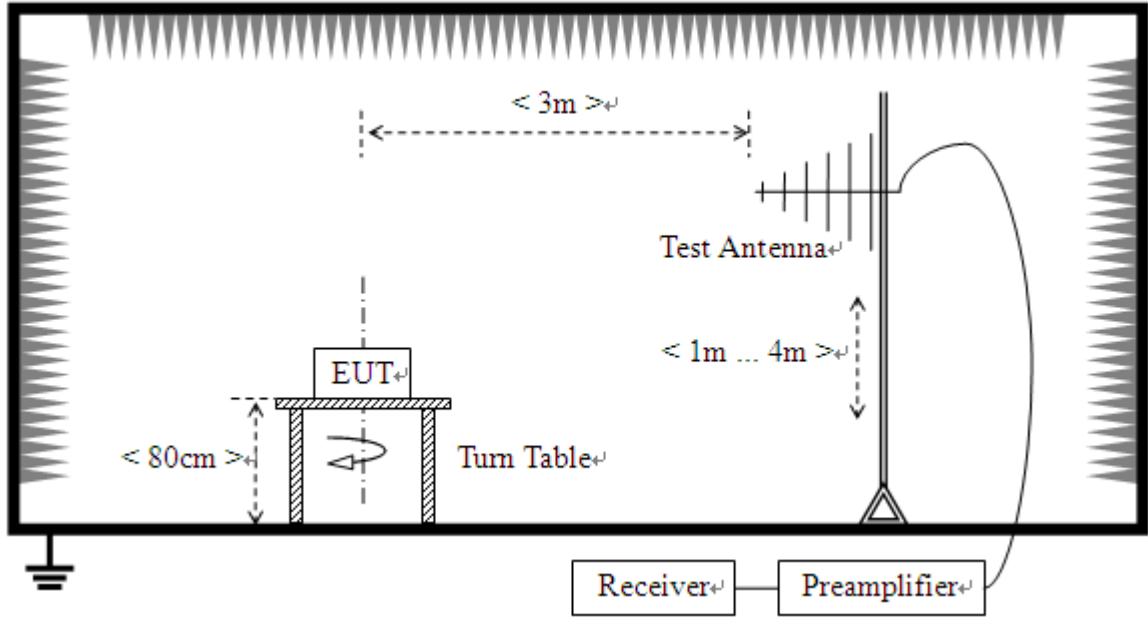

3) For radiated emissions above 1GHz

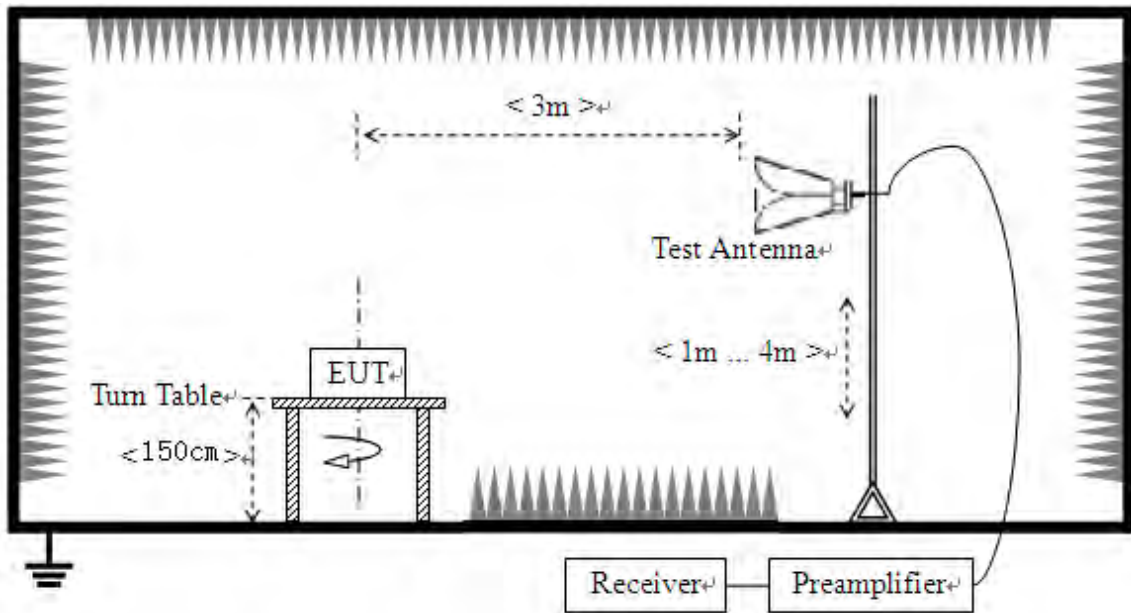

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.



For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

2.9.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform a quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note 1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note 2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


Note 3: For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note 4: All test modes and bandwidth were considered and evaluated respectively by performing full test, only the worst data were recorded for each bandwidth.




802.11a Mode

Plot for Channel 36

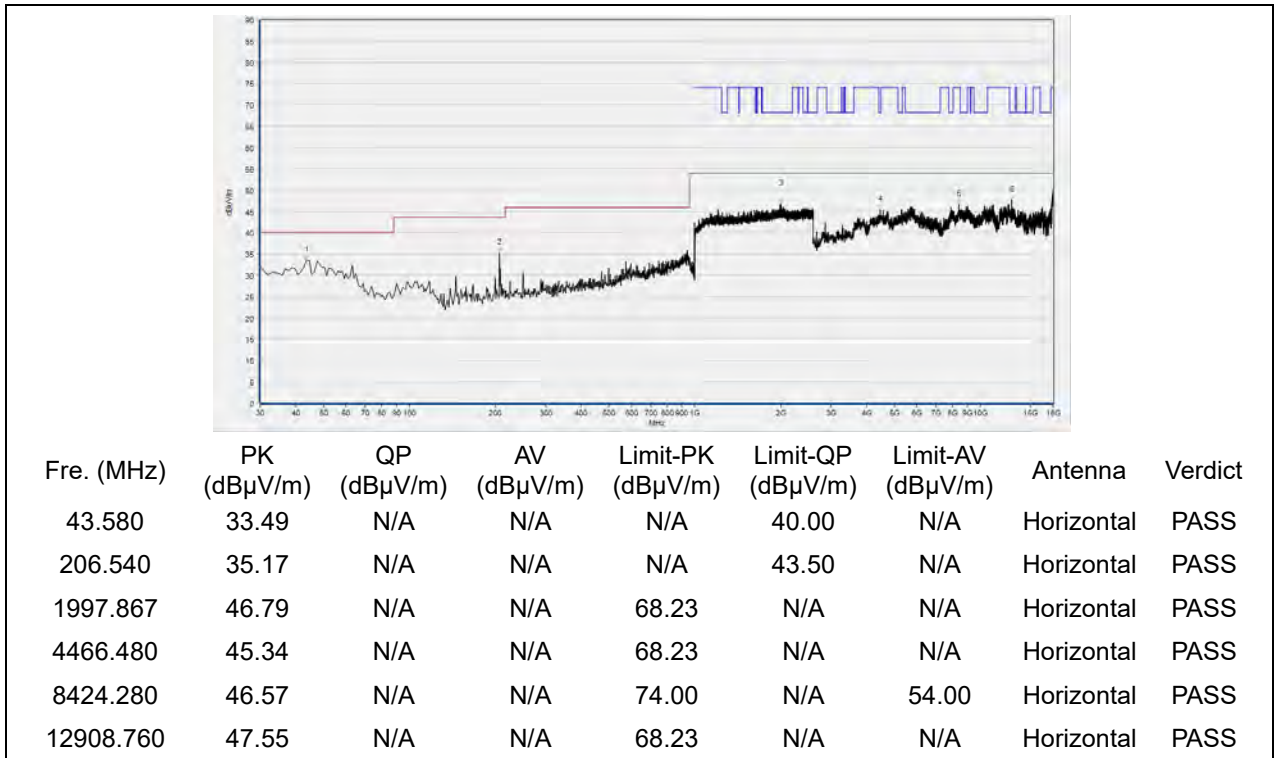


(Antenna Horizontal, 30MHz to 18GHz)

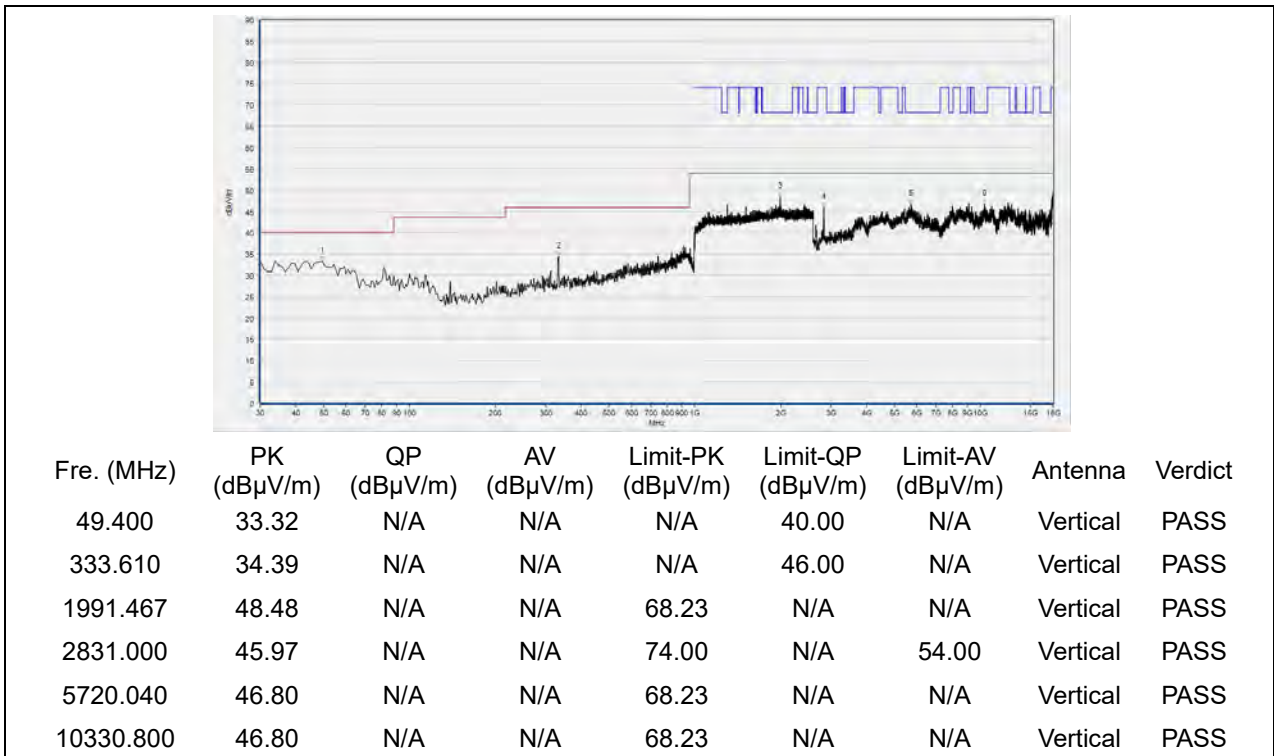


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 44

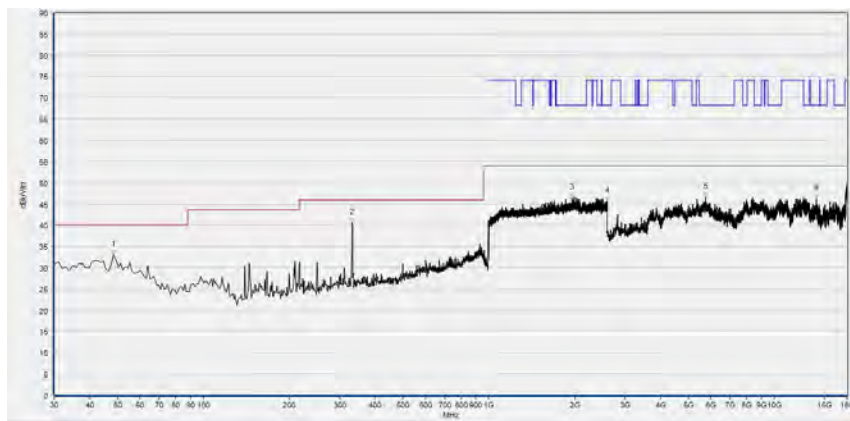

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.430	32.99	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
332.640	40.63	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1958.400	46.35	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
2590.400	45.57	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5757.000	46.53	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
14017.560	46.29	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

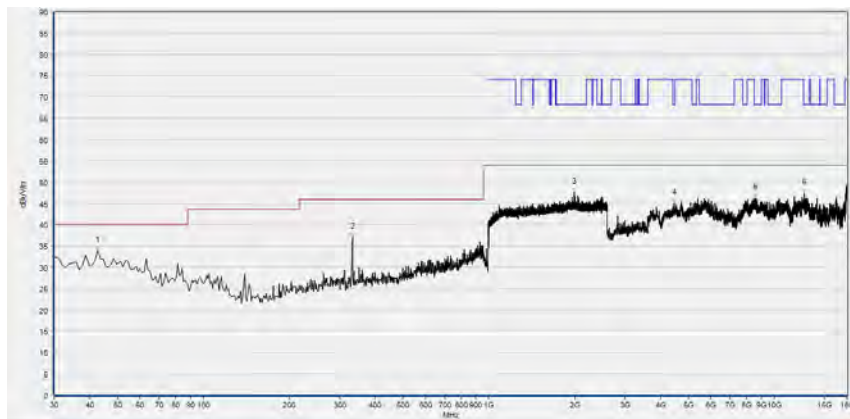

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
42.610	33.79	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
333.610	37.05	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1995.733	47.62	N/A	N/A	68.23	N/A	68.23	Vertical	PASS
4454.160	45.04	N/A	N/A	68.23	N/A	68.23	Vertical	PASS
8569.040	46.27	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12742.440	47.42	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 48

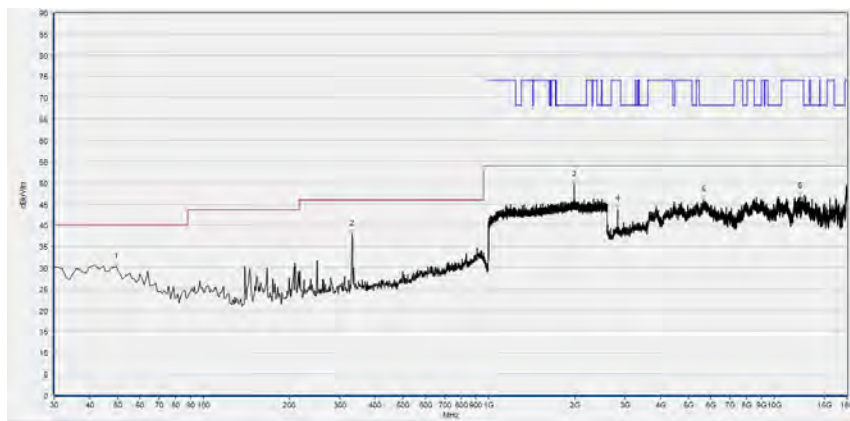

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.400	30.14	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
332.640	37.88	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1995.733	49.53	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
2824.840	43.71	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5646.120	45.86	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12298.920	46.81	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

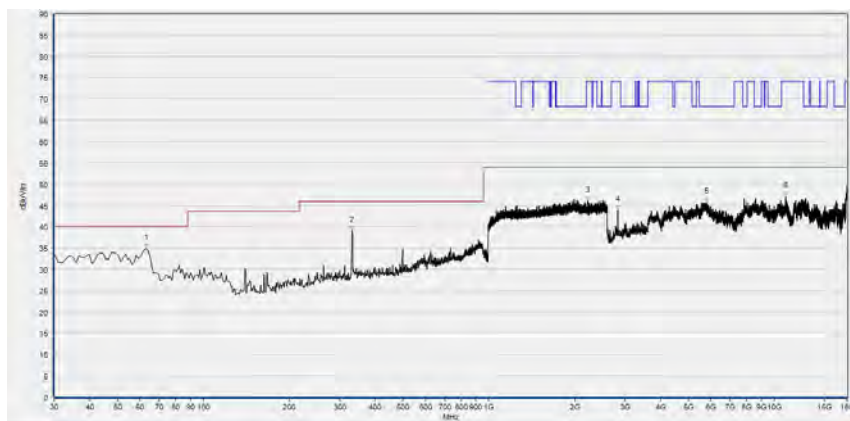

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
62.980	34.88	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
332.640	39.04	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2224.000	46.08	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2831.000	43.92	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5772.400	45.69	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
10965.280	47.15	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 52

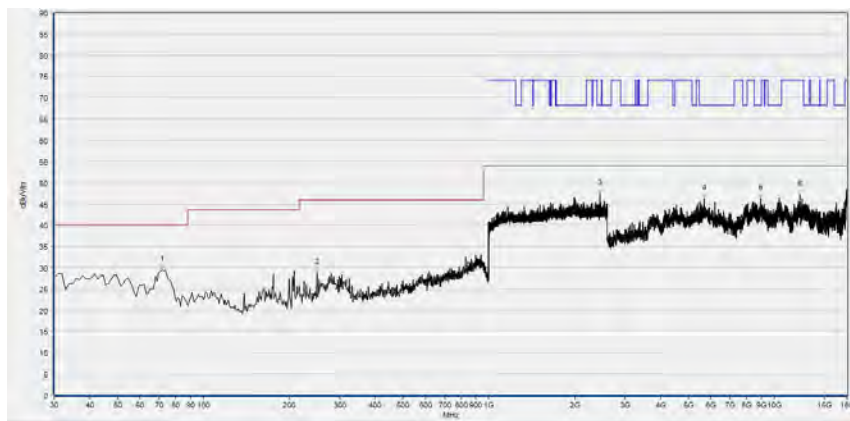

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
71.710	29.54	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
250.190	28.86	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2456.000	47.35	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5683.080	46.33	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
8947.880	46.22	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12305.080	47.14	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

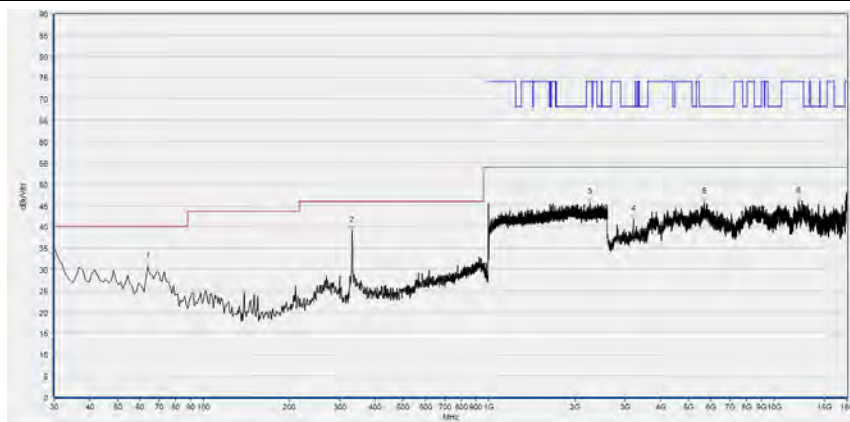

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
63.950	30.69	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
332.640	39.12	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2262.933	45.57	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3206.760	41.78	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5686.160	45.70	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12132.600	45.85	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 60

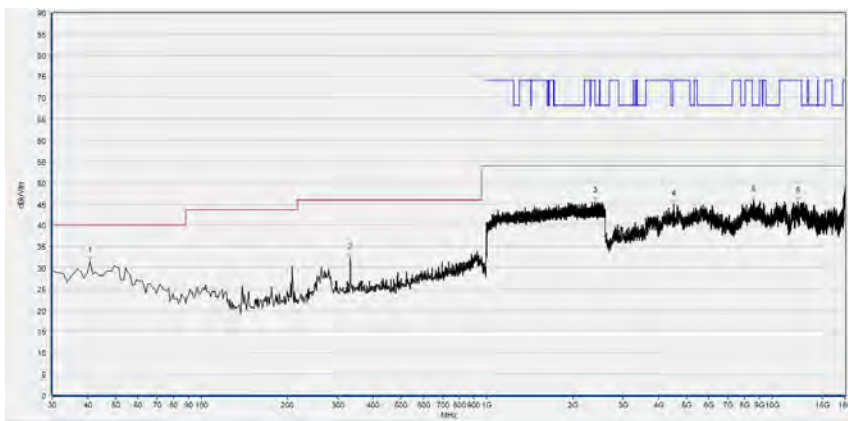

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
40.670	31.50	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
332.640	32.37	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2388.800	45.64	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4509.600	44.94	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8599.840	45.87	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12295.840	45.65	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

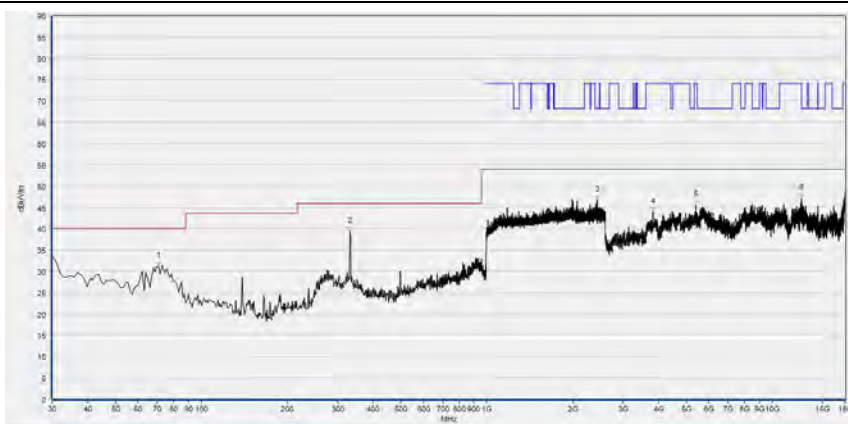

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
70.740	31.24	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
331.670	39.31	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2443.200	46.78	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
3825.840	43.85	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5399.720	45.59	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12656.200	47.10	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 64

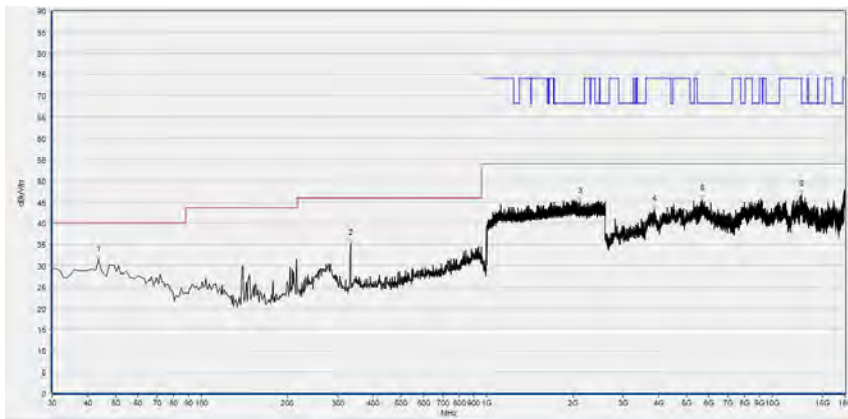

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
43.580	31.36	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
333.610	35.12	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2121.600	45.11	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
3859.720	43.18	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5686.160	45.59	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12699.320	46.74	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

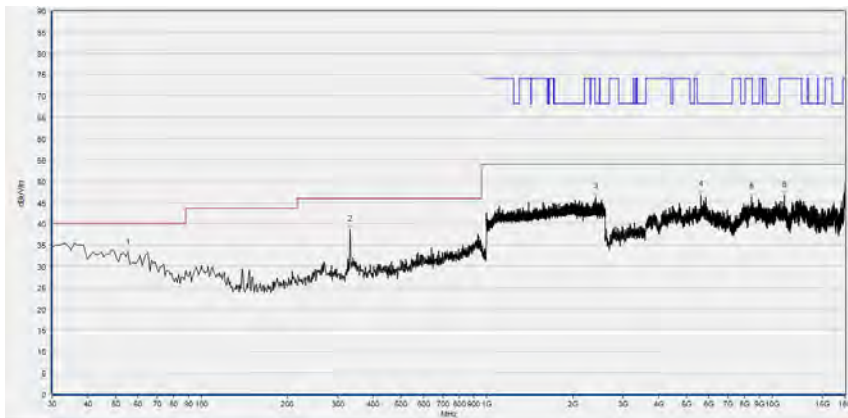


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
55.220	33.14	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
332.640	38.55	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2412.800	46.23	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5618.400	46.80	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
8445.840	46.22	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11026.880	46.65	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 100

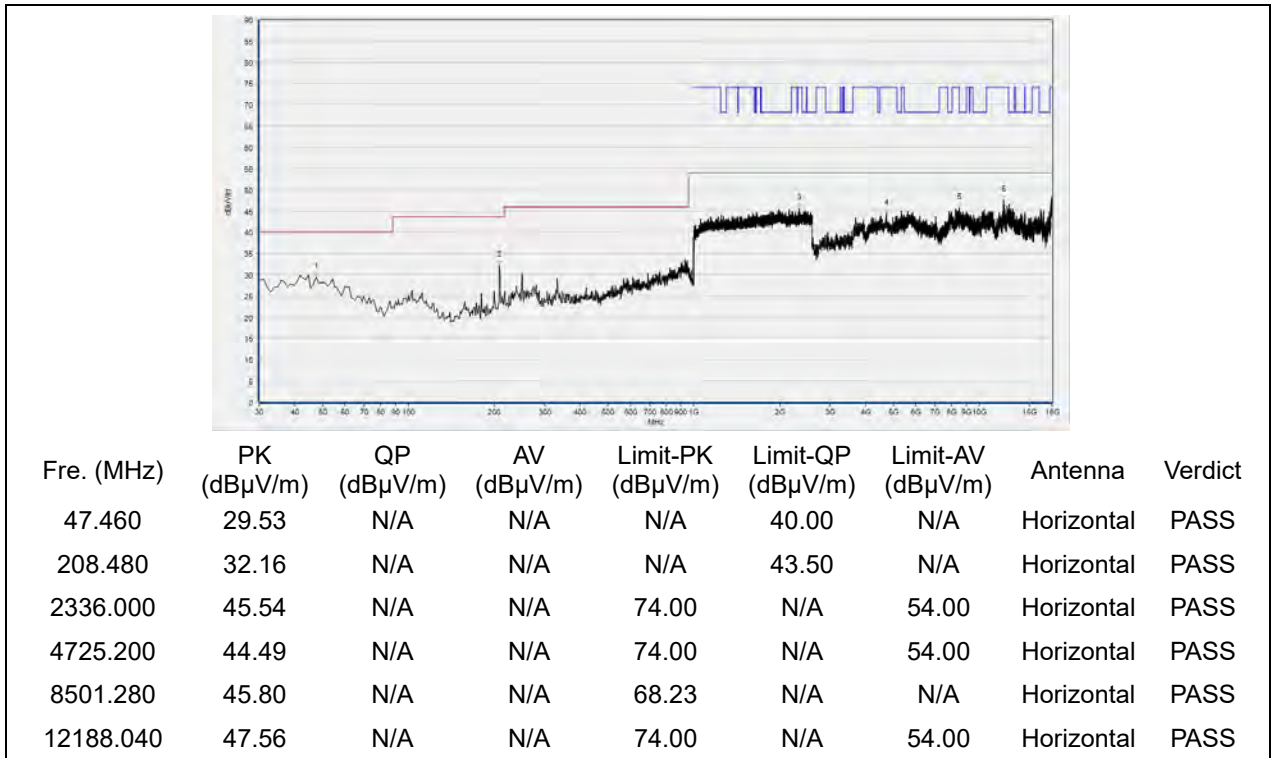


(Antenna Horizontal, 30MHz to 18GHz)

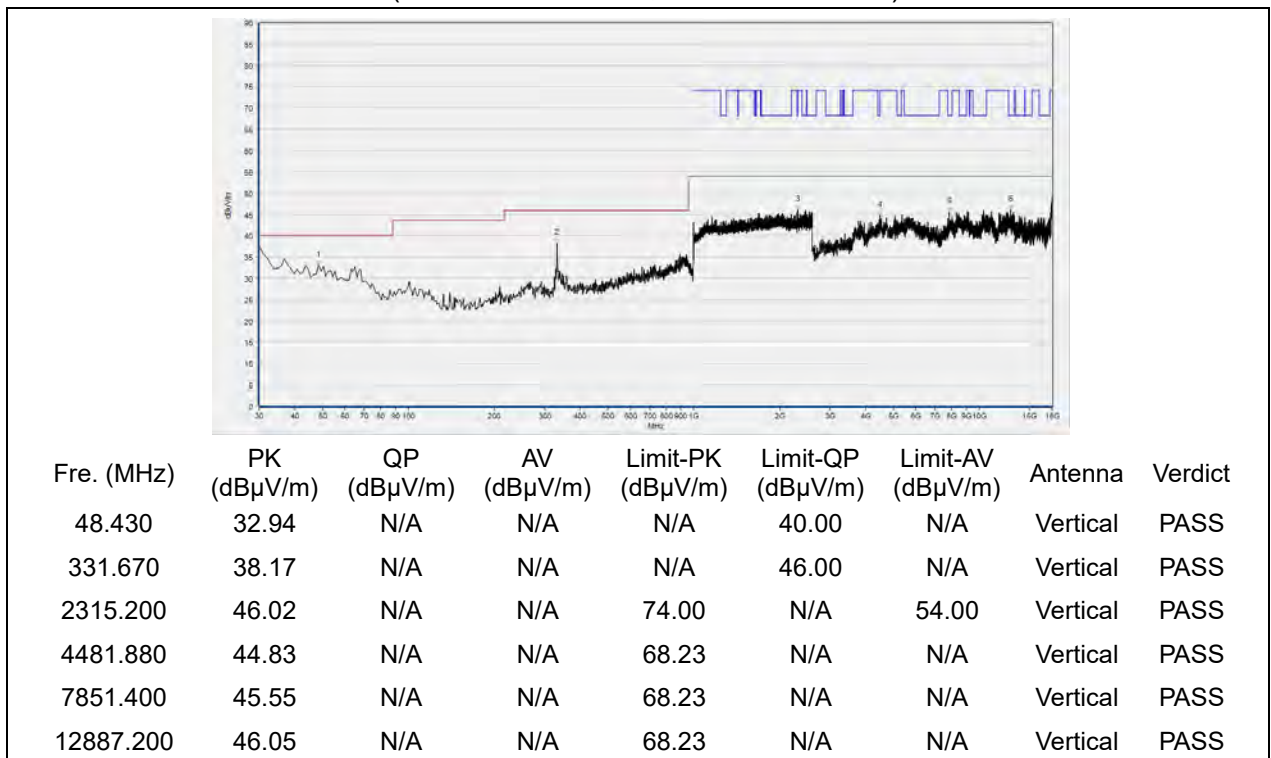


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 120

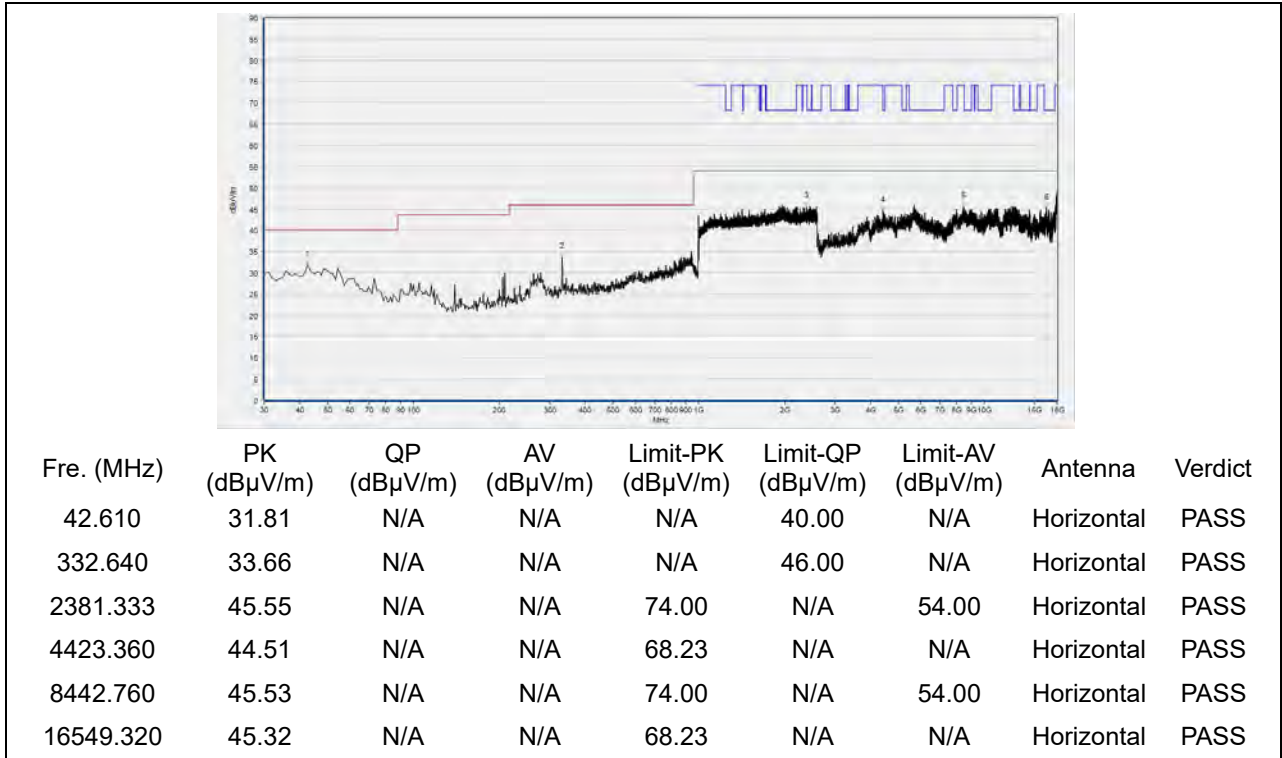


(Antenna Horizontal, 30MHz to 18GHz)

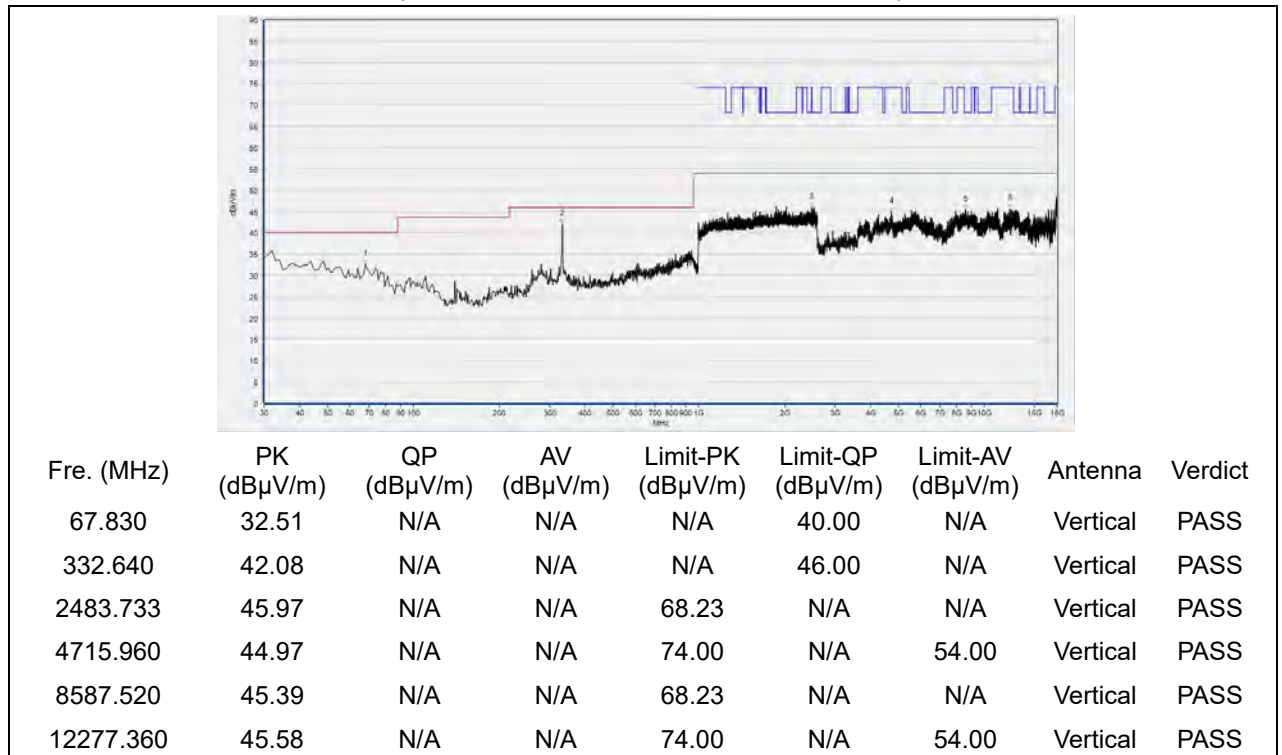


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 144

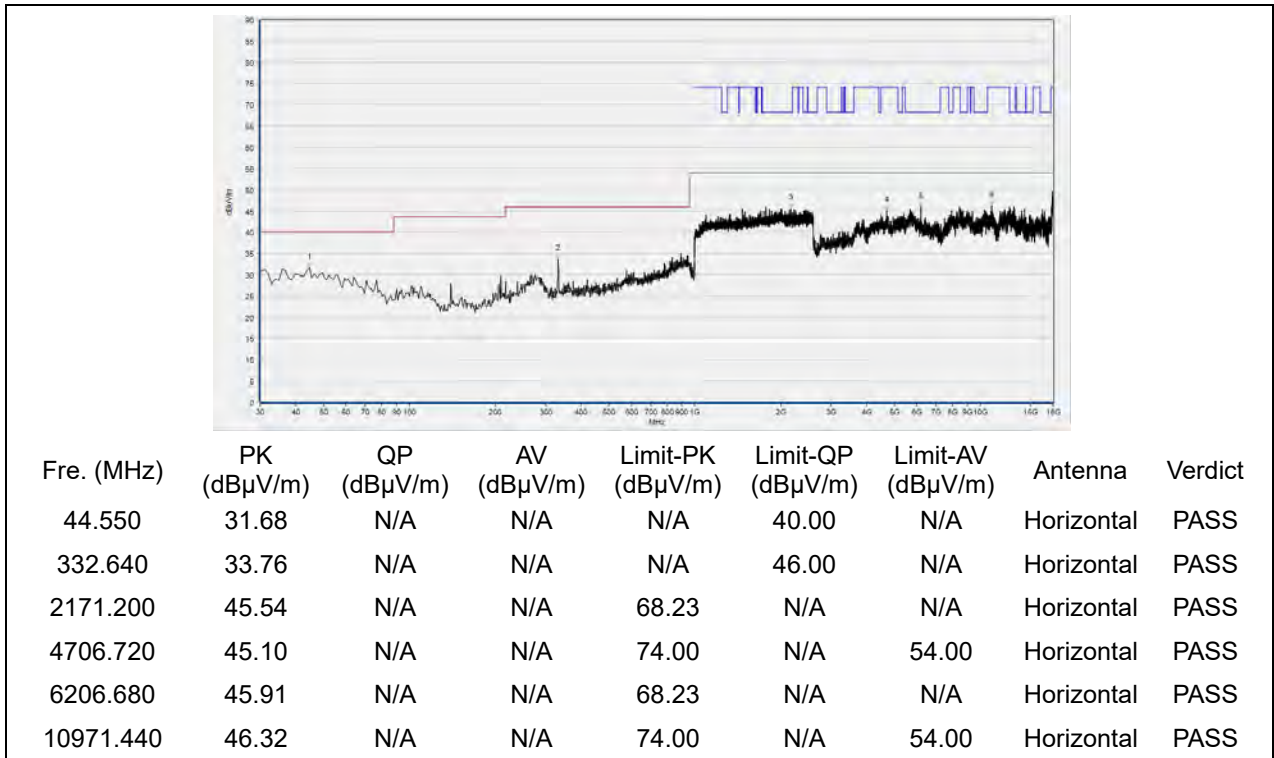


(Antenna Horizontal, 30MHz to 18GHz)

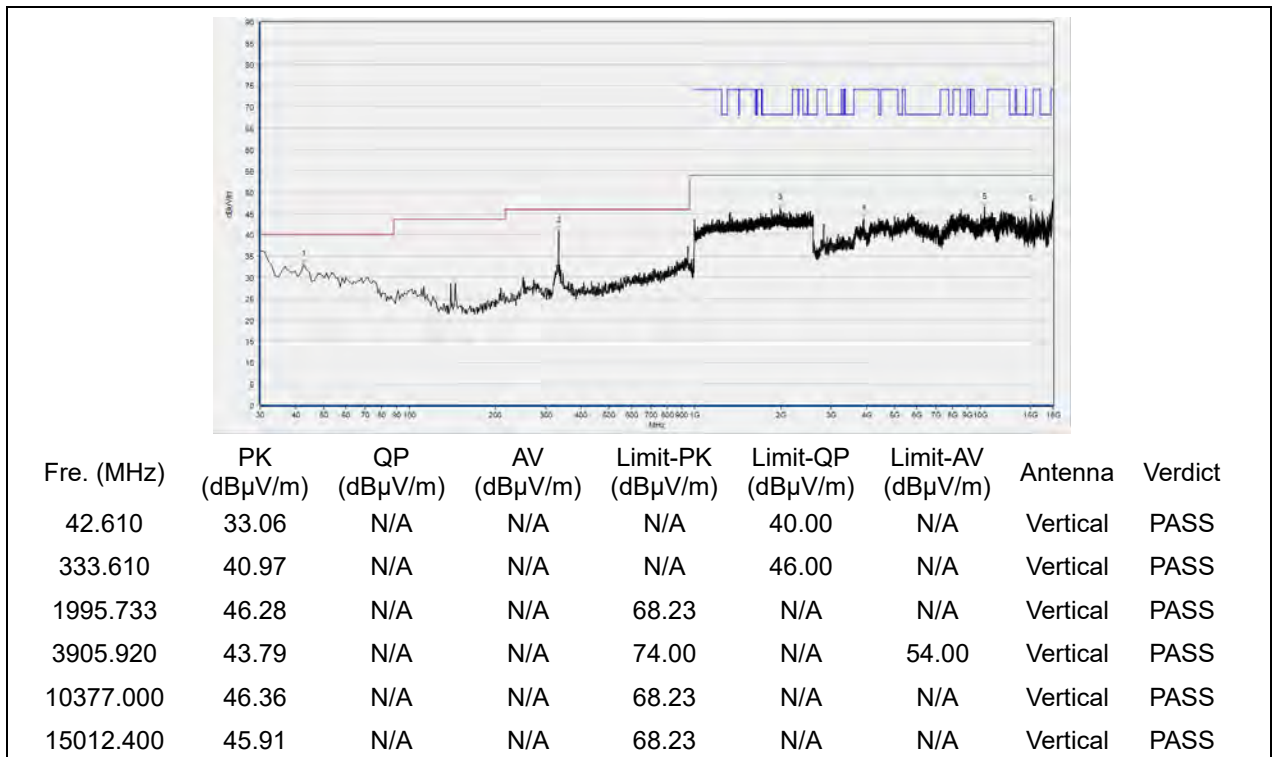


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 149

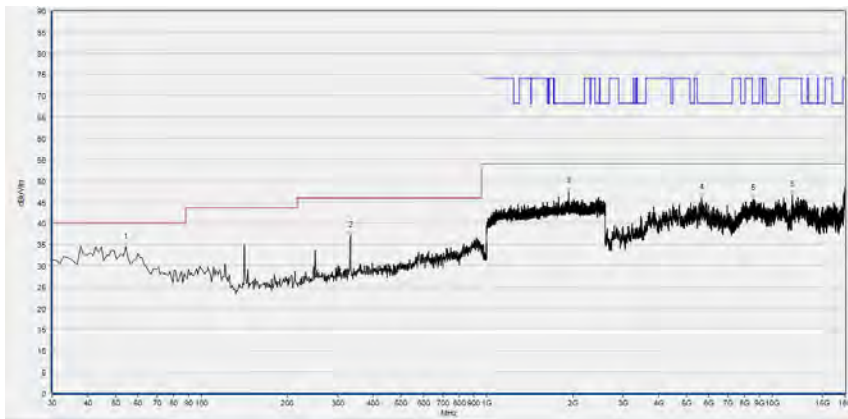

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
54.250	34.39	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
333.610	36.99	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1935.467	47.36	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5646.120	45.90	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
8578.280	45.80	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
11735.280	46.58	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

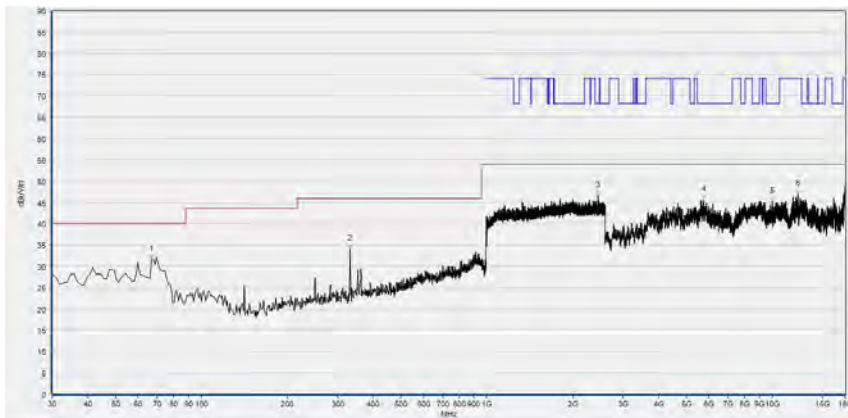


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
66.860	31.53	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
332.640	34.08	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2457.067	46.55	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5750.840	45.58	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
9979.680	45.25	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12292.760	46.89	N/A	N/A	74.00	N/A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 157

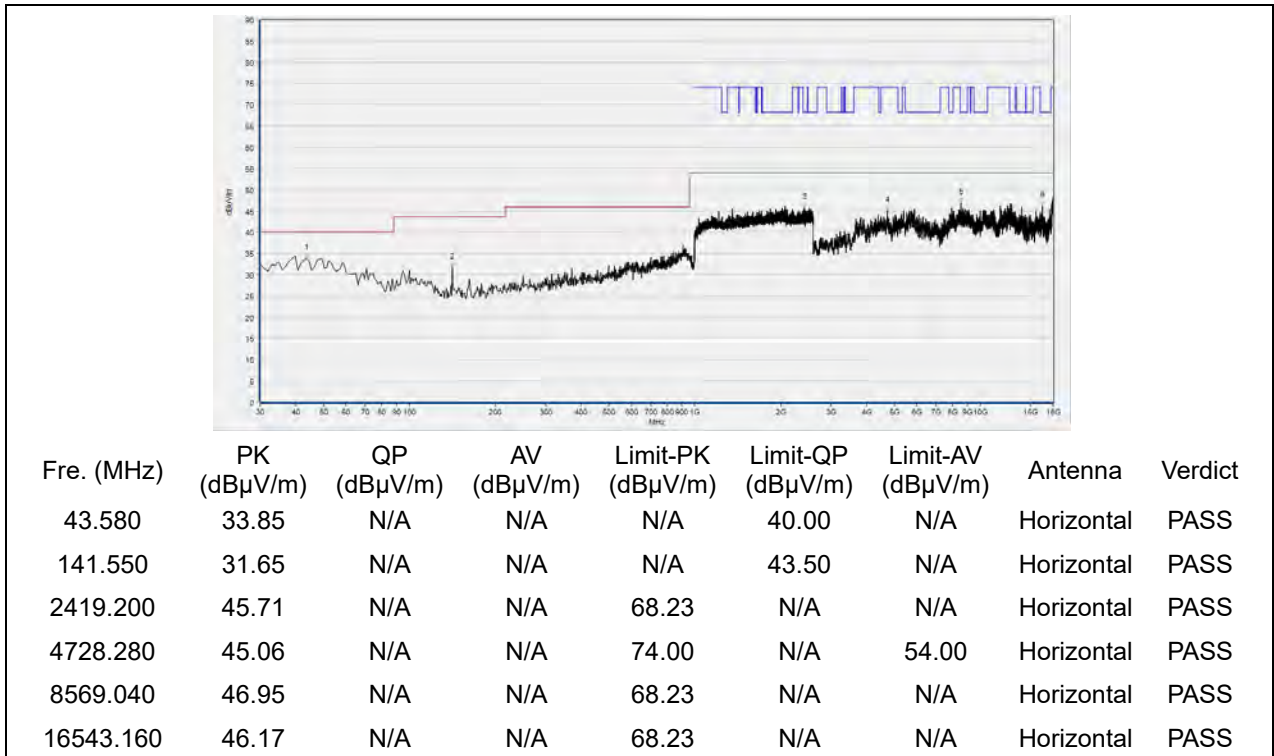


(Antenna Horizontal, 30MHz to 18GHz)

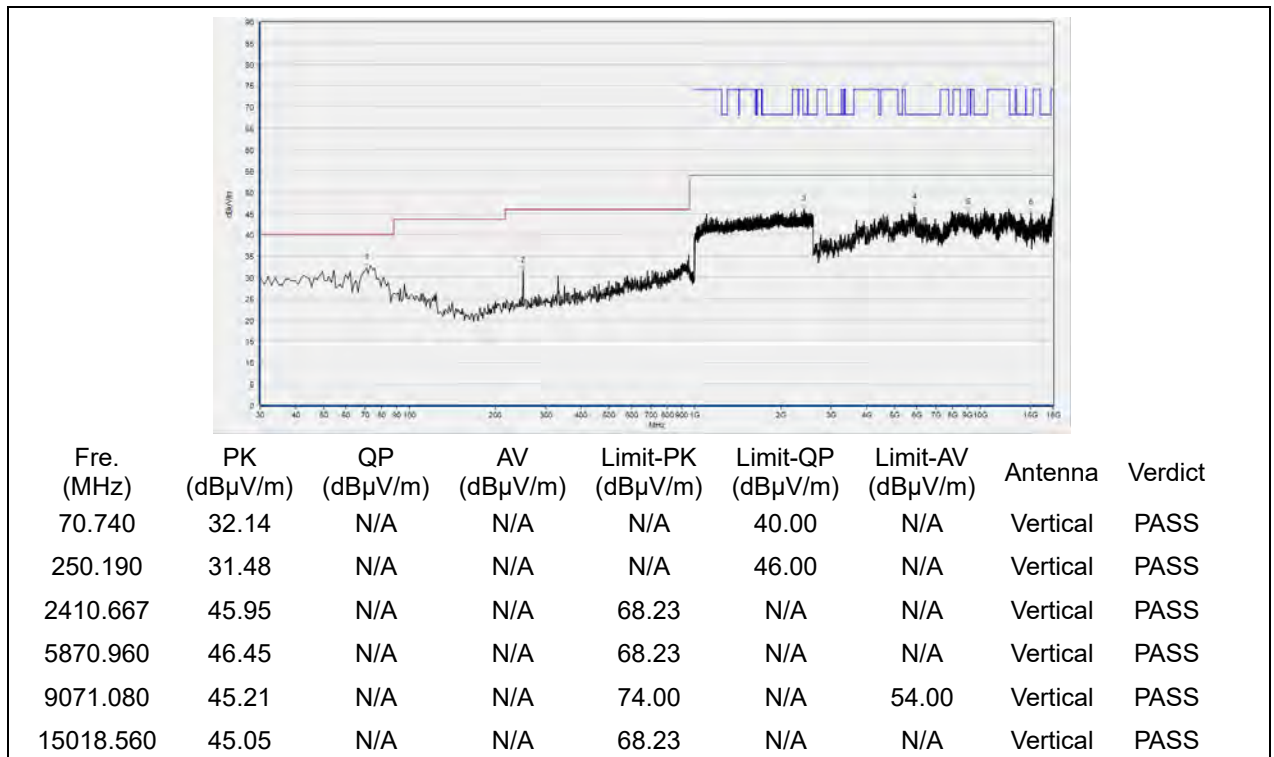


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 165

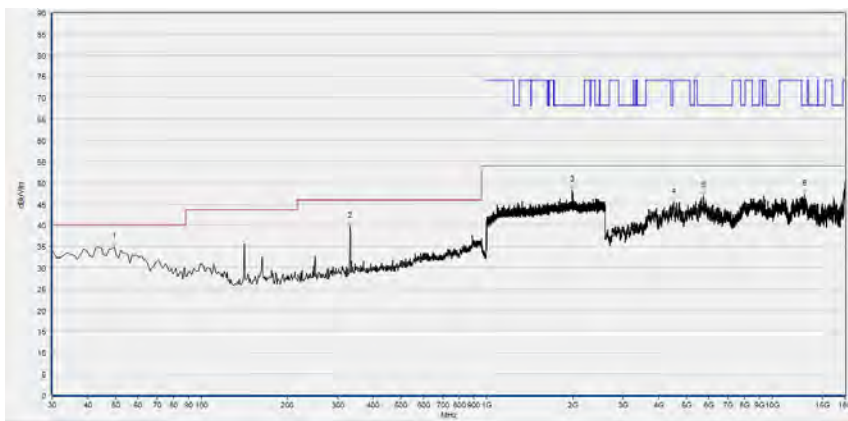

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.400	34.82	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
332.640	39.79	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1993.067	48.19	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
4503.440	45.40	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5744.680	46.87	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12951.880	47.28	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

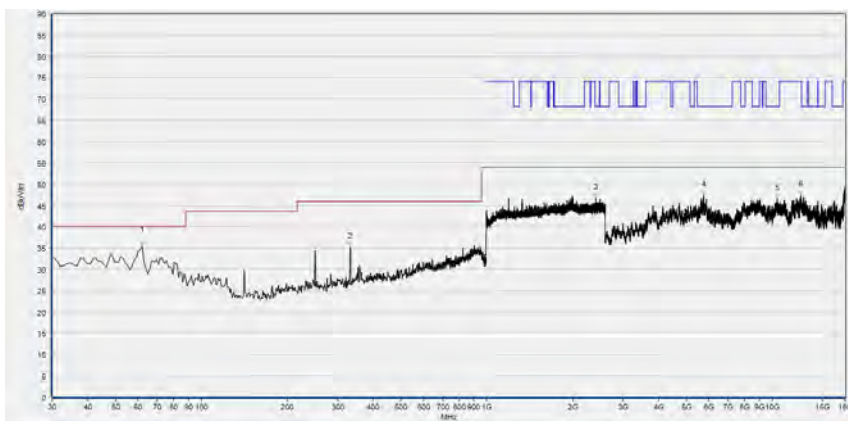


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
62.010	35.38	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
332.640	35.18	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2413.333	46.73	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5747.760	47.35	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
10432.440	46.53	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12573.040	47.49	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




802.11n (HT40) mode

Plot for Channel 38

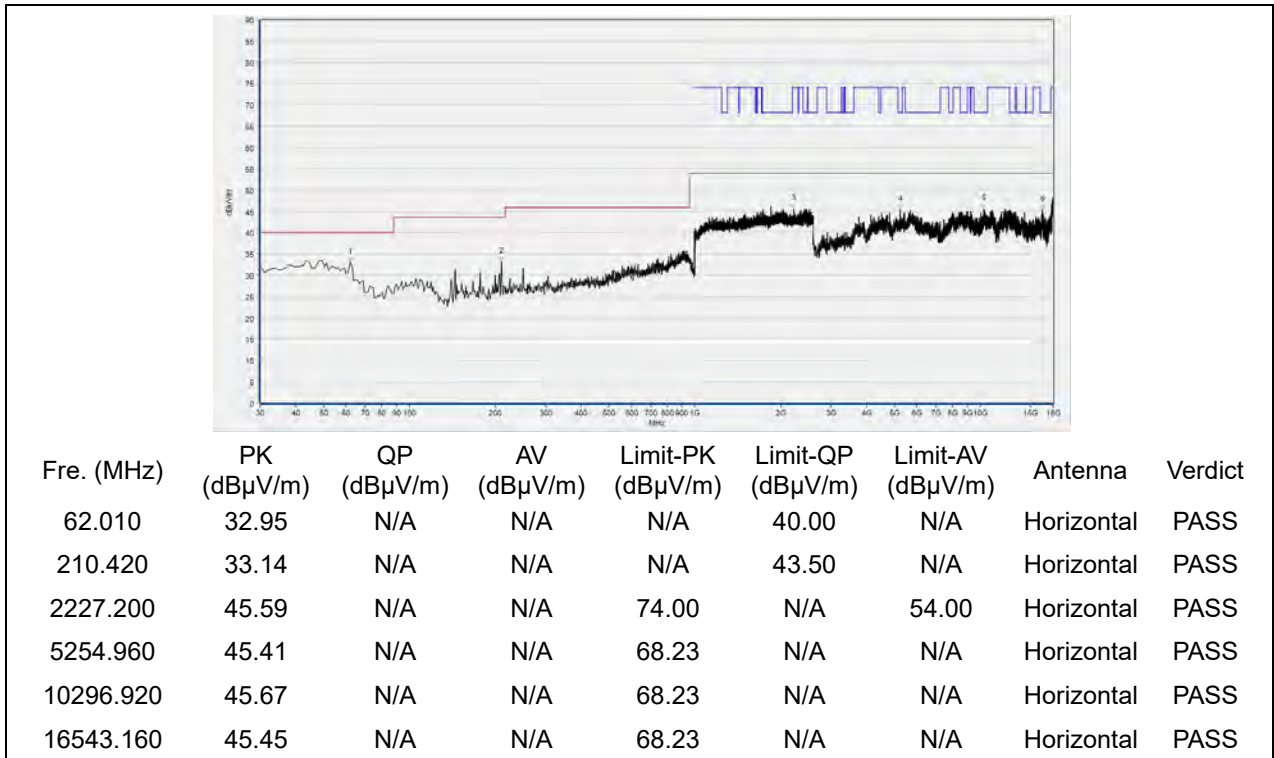


(Antenna Horizontal, 30MHz to 18GHz)

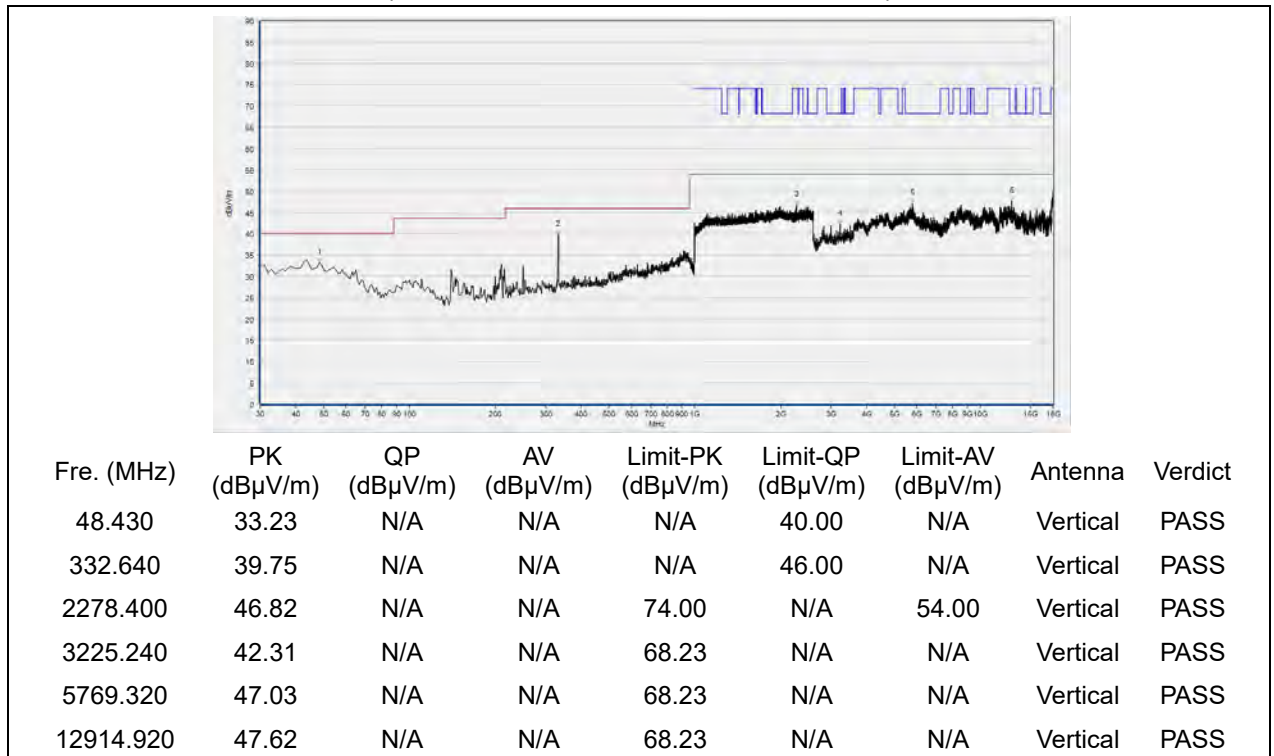


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 46

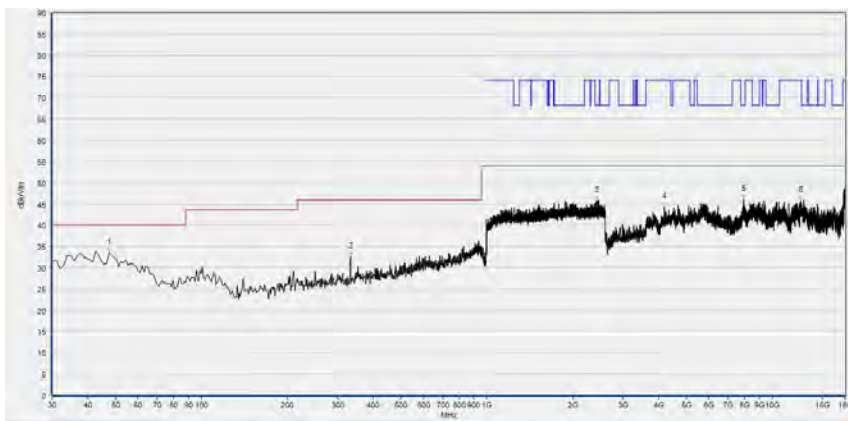

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
47.460	33.48	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
333.610	32.55	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2416.000	45.71	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
4186.200	44.26	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7946.880	46.17	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12585.360	45.82	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

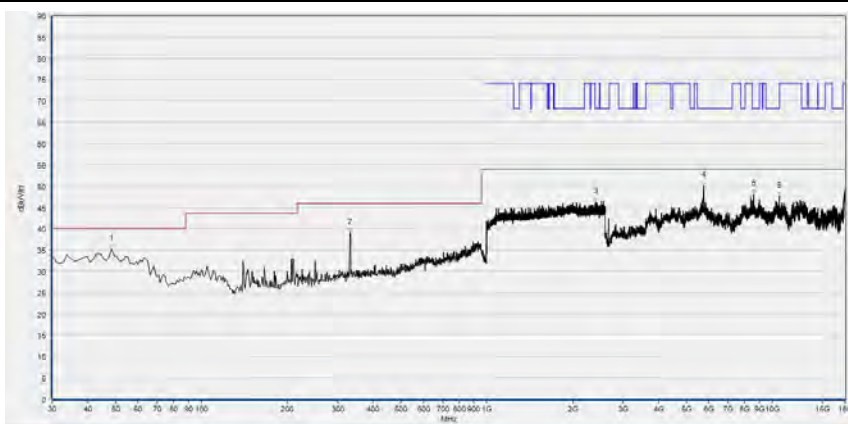


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
48.430	35.15	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
331.670	39.12	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2411.733	46.27	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
5750.840	50.04	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
8593.680	48.12	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
10577.200	47.66	N/A	N/A	68.23	N/A	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 54

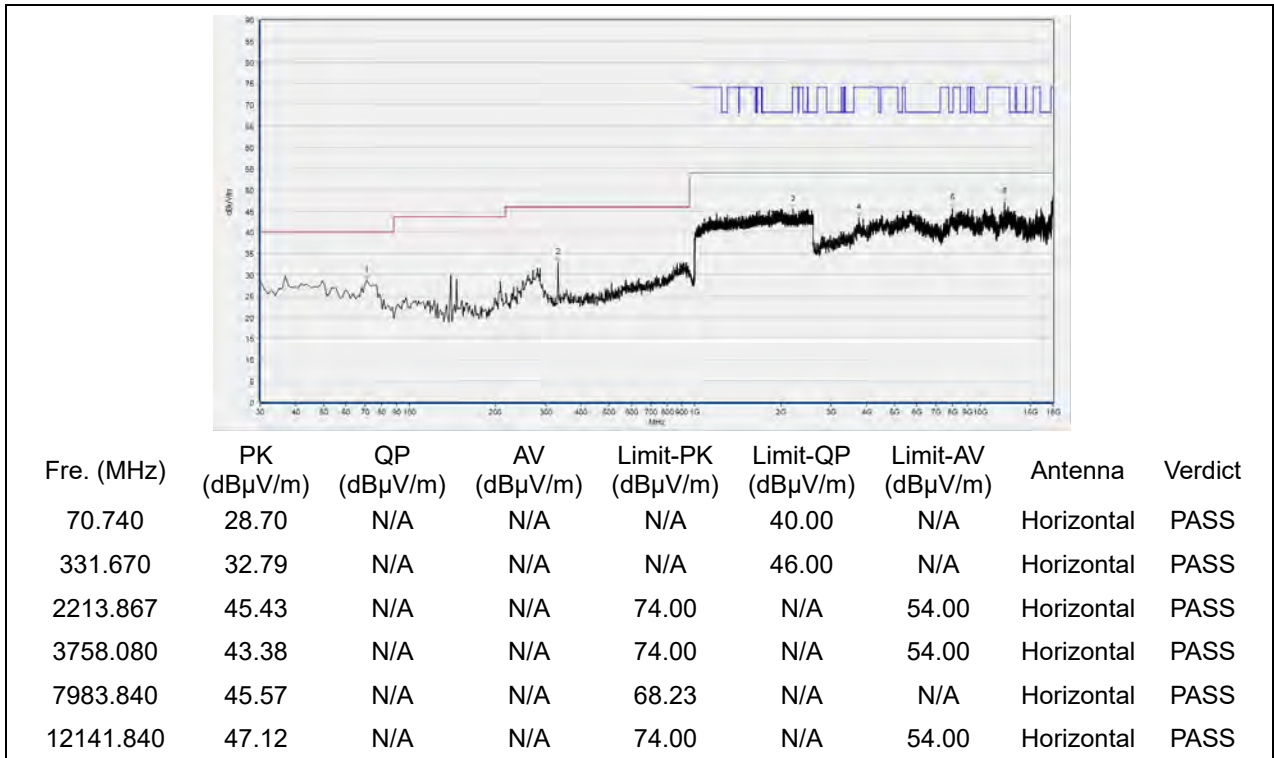


(Antenna Horizontal, 30MHz to 18GHz)

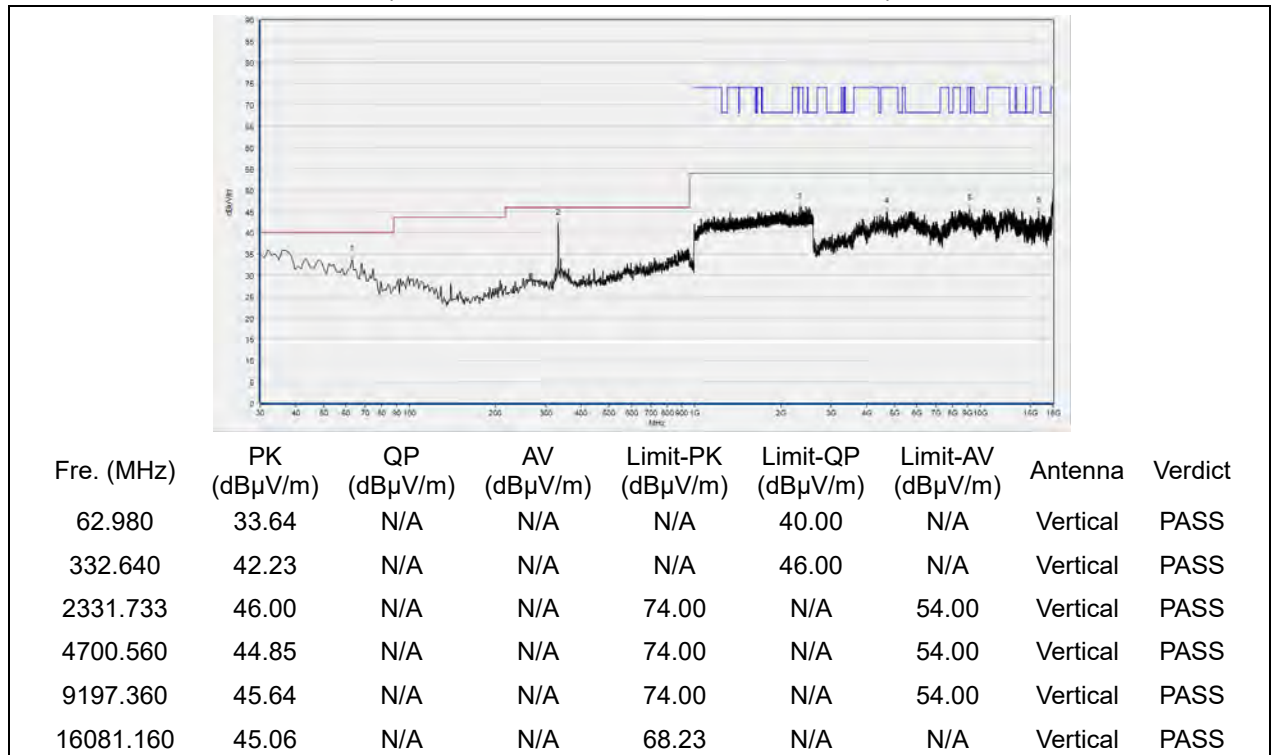


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 62

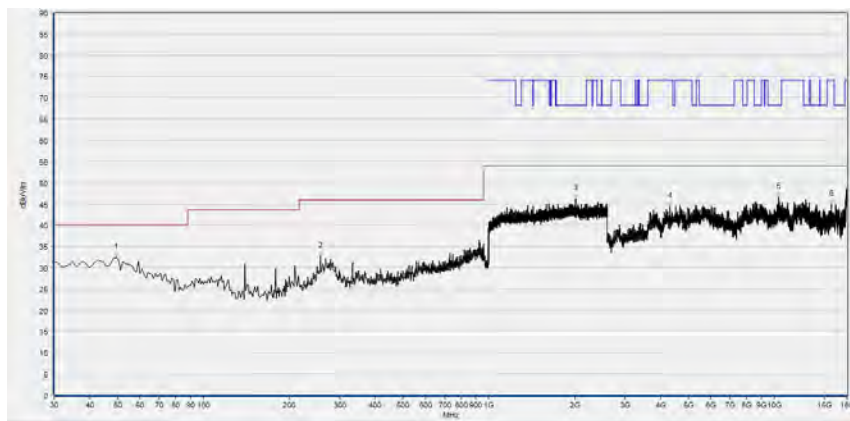

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
49.400	32.34	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
256.980	32.72	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2012.267	46.32	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
4312.480	44.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10373.920	46.55	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
15825.520	44.86	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

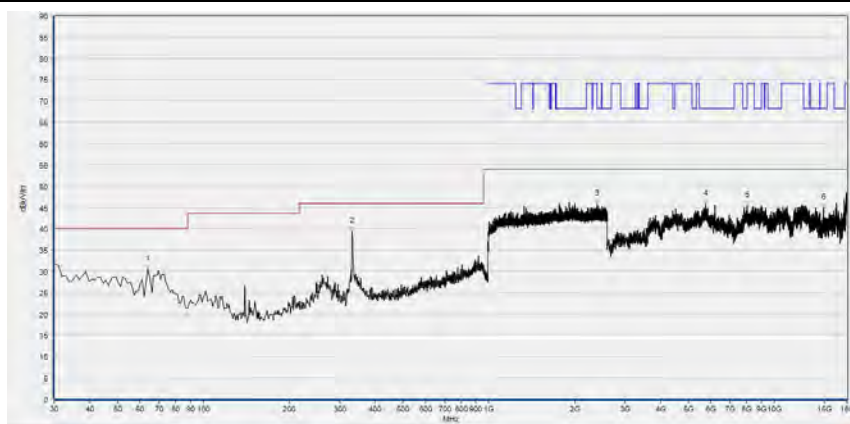


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
63.950	30.45	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
332.640	39.41	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2388.800	45.82	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5763.160	45.69	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
8026.960	45.39	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
14883.040	44.84	N/A	N/A	68.23	N/A	N/A	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 102

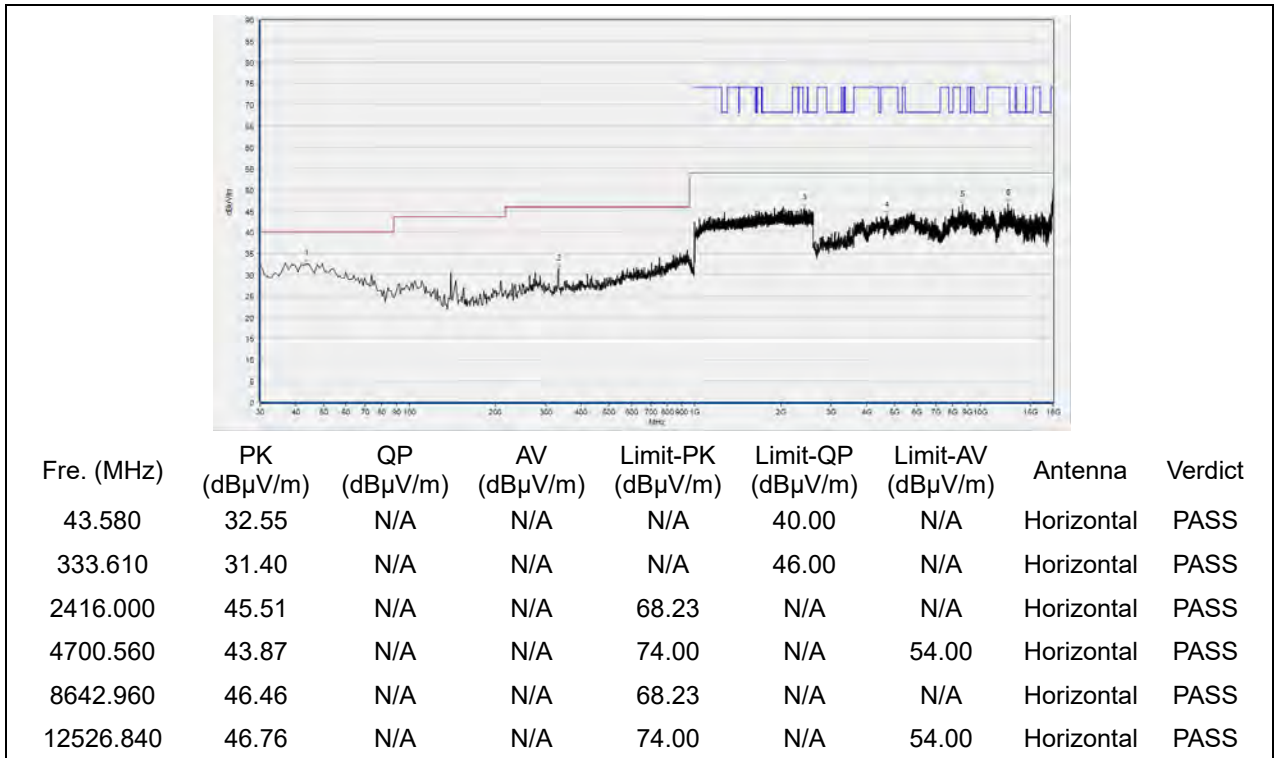


(Antenna Horizontal, 30MHz to 18GHz)

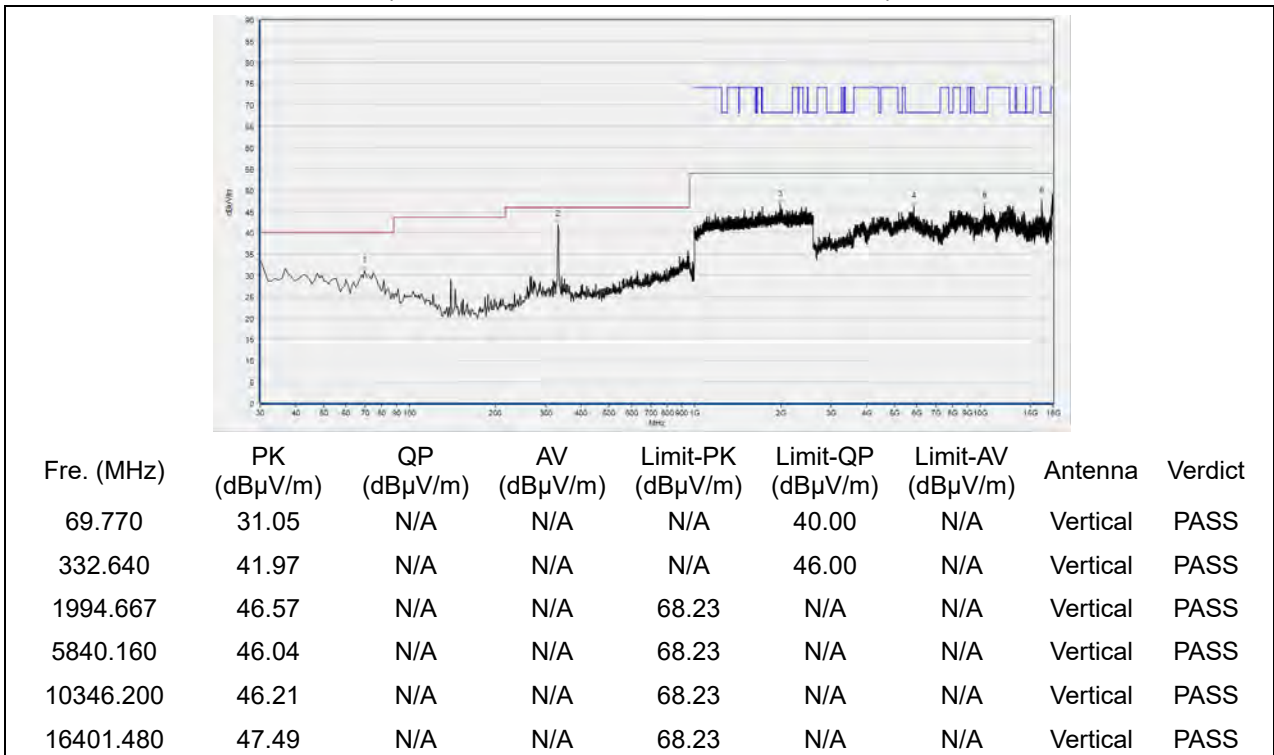


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 126

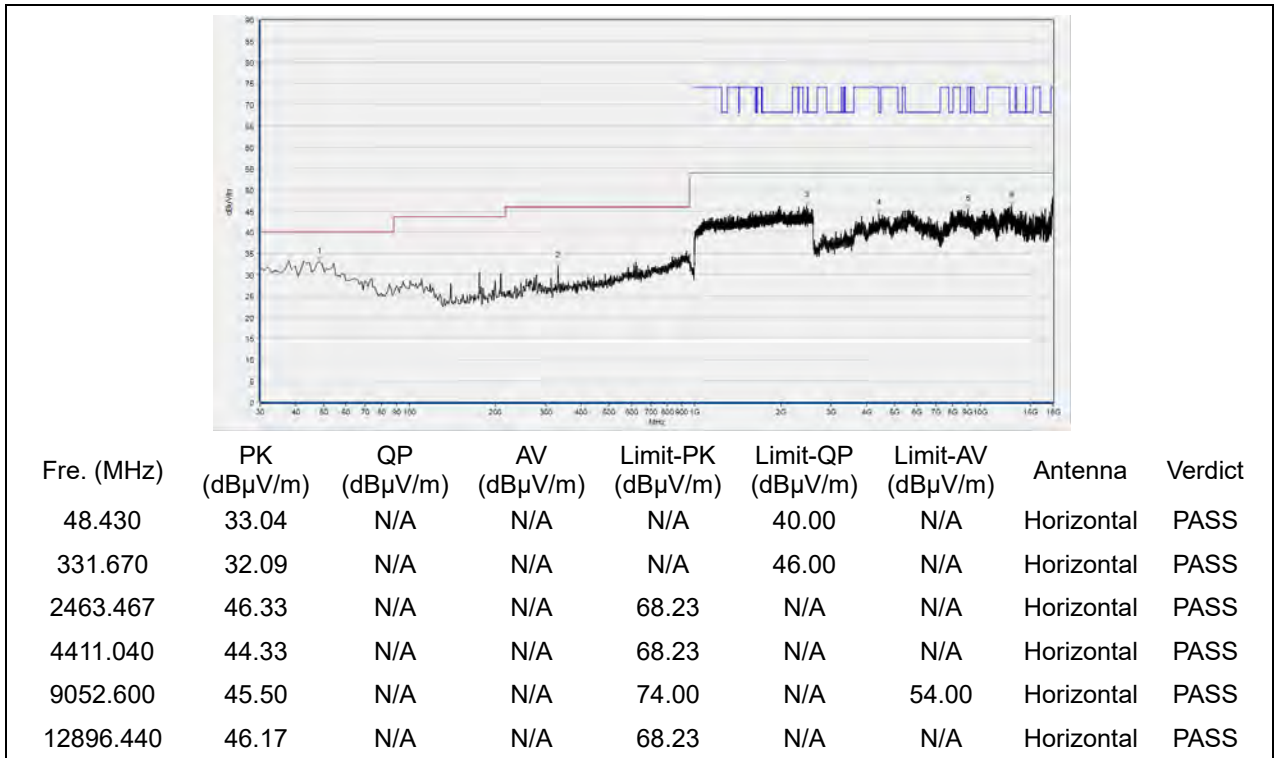


(Antenna Horizontal, 30MHz to 18GHz)

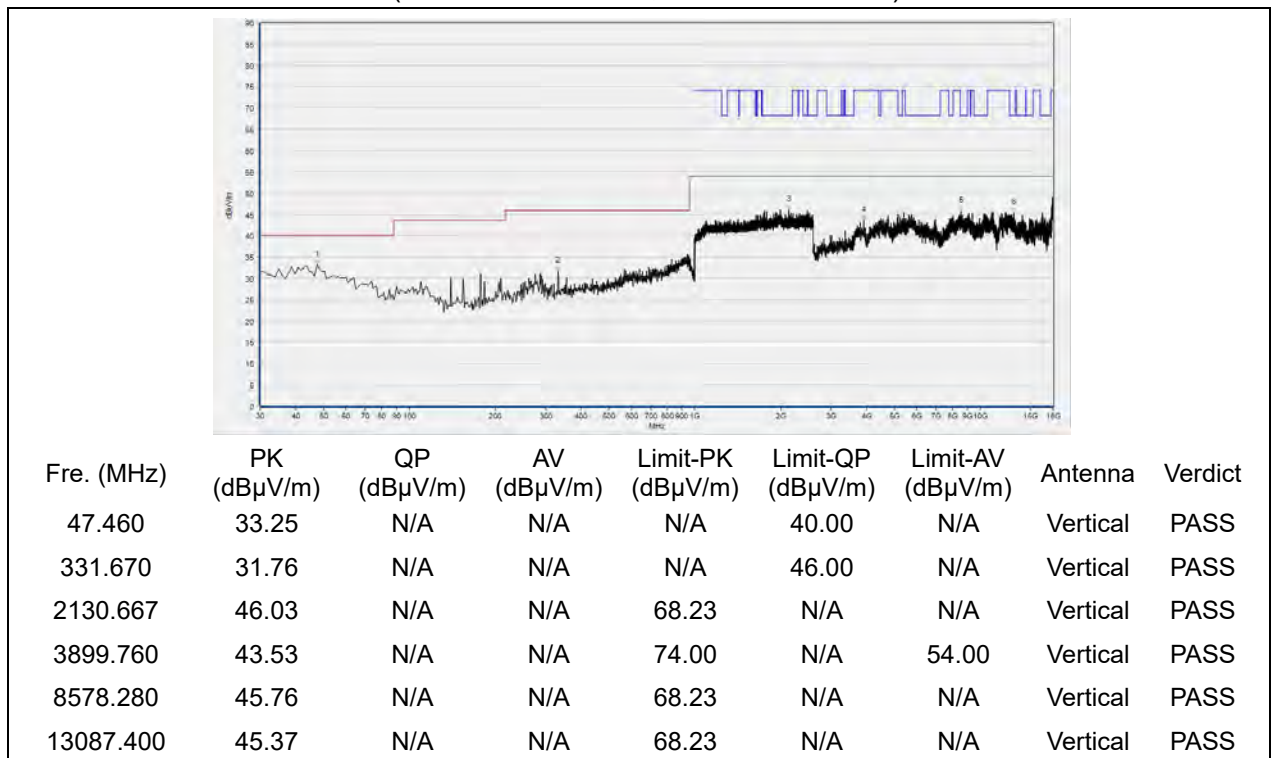


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 142

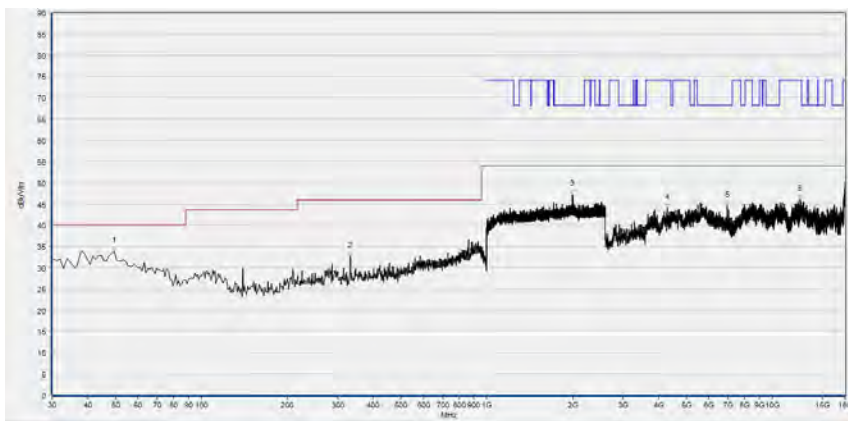

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
49.400	33.78	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
332.640	32.63	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1995.200	47.28	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
4297.080	44.02	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6961.280	44.66	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12526.840	46.07	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

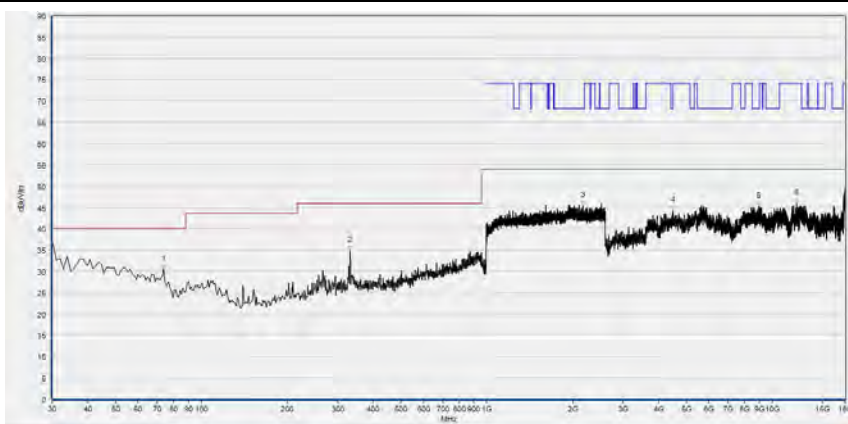


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
73.650	30.44	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
331.670	34.80	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2165.333	45.47	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
4481.880	44.16	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
8978.680	45.33	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12141.840	45.94	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 151

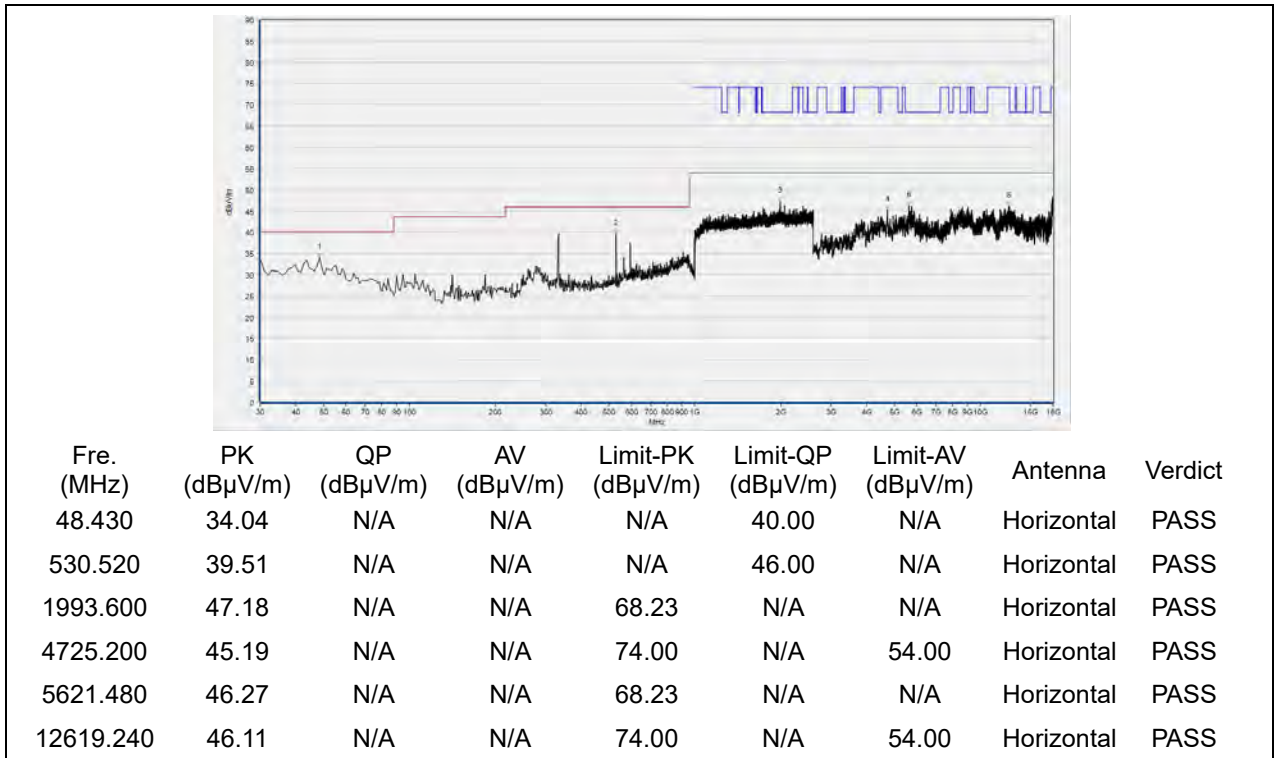


(Antenna Horizontal, 30MHz to 18GHz)

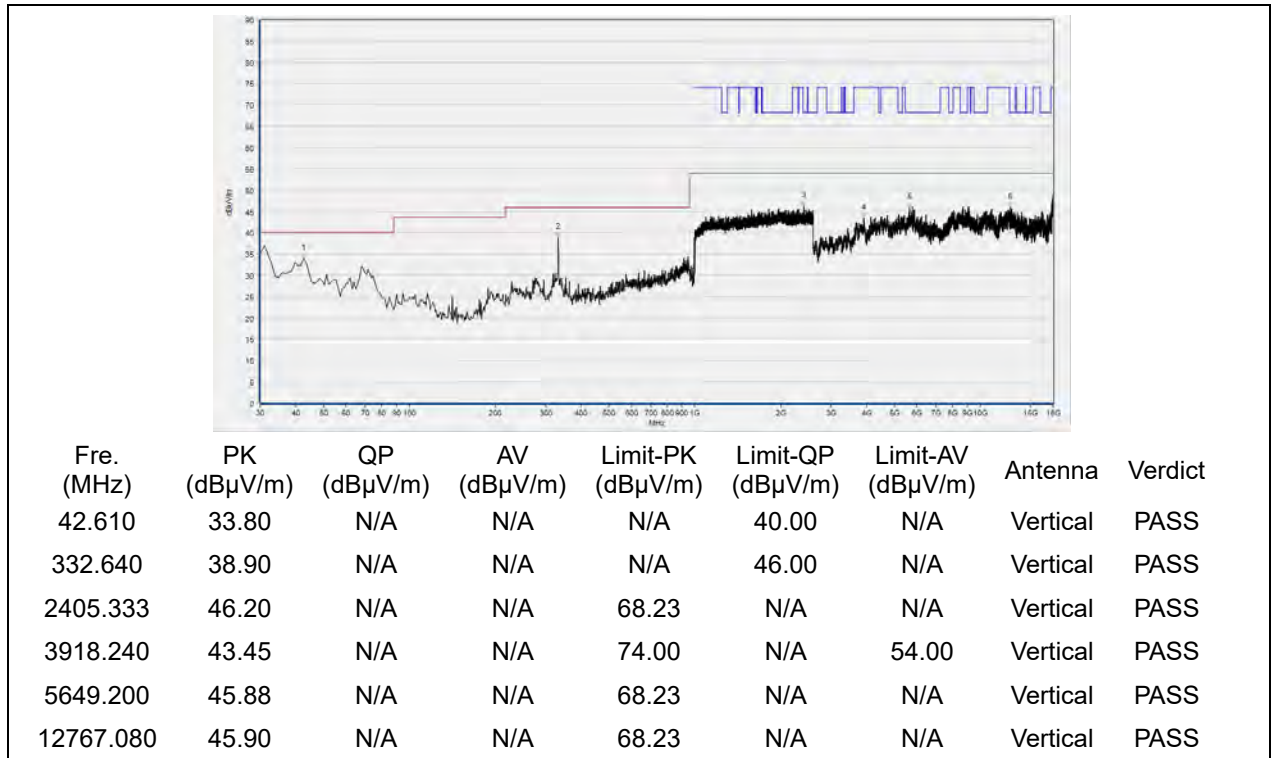


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 159

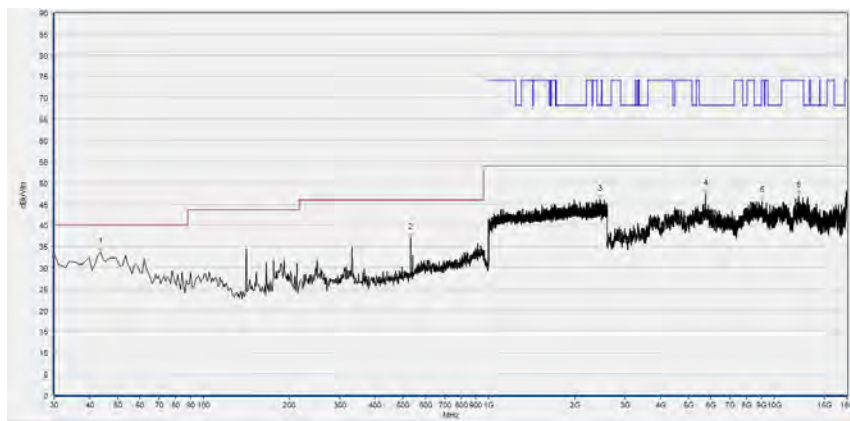

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
43.580	33.63	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
532.460	37.06	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2455.467	46.10	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5747.760	47.40	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
9071.080	45.71	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12135.680	46.90	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

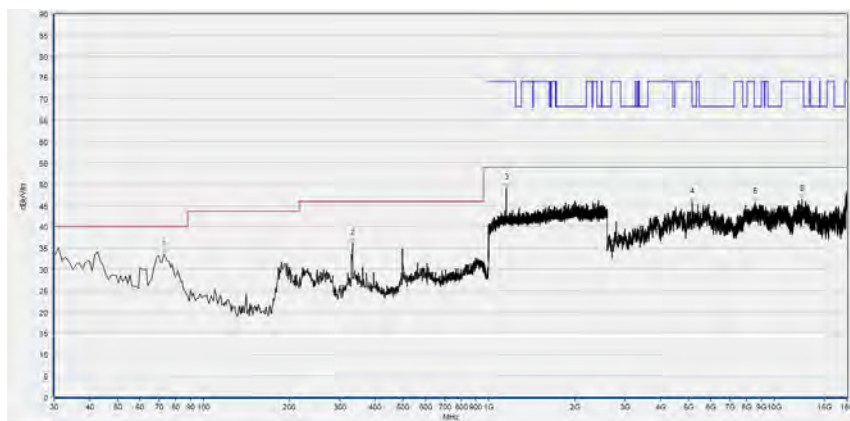


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
72.680	33.45	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
333.610	36.00	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1149.333	49.05	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5168.720	45.72	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
8578.280	45.74	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12526.840	46.41	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




802.11ac (VHT80) Mode

Plot for Channel 42

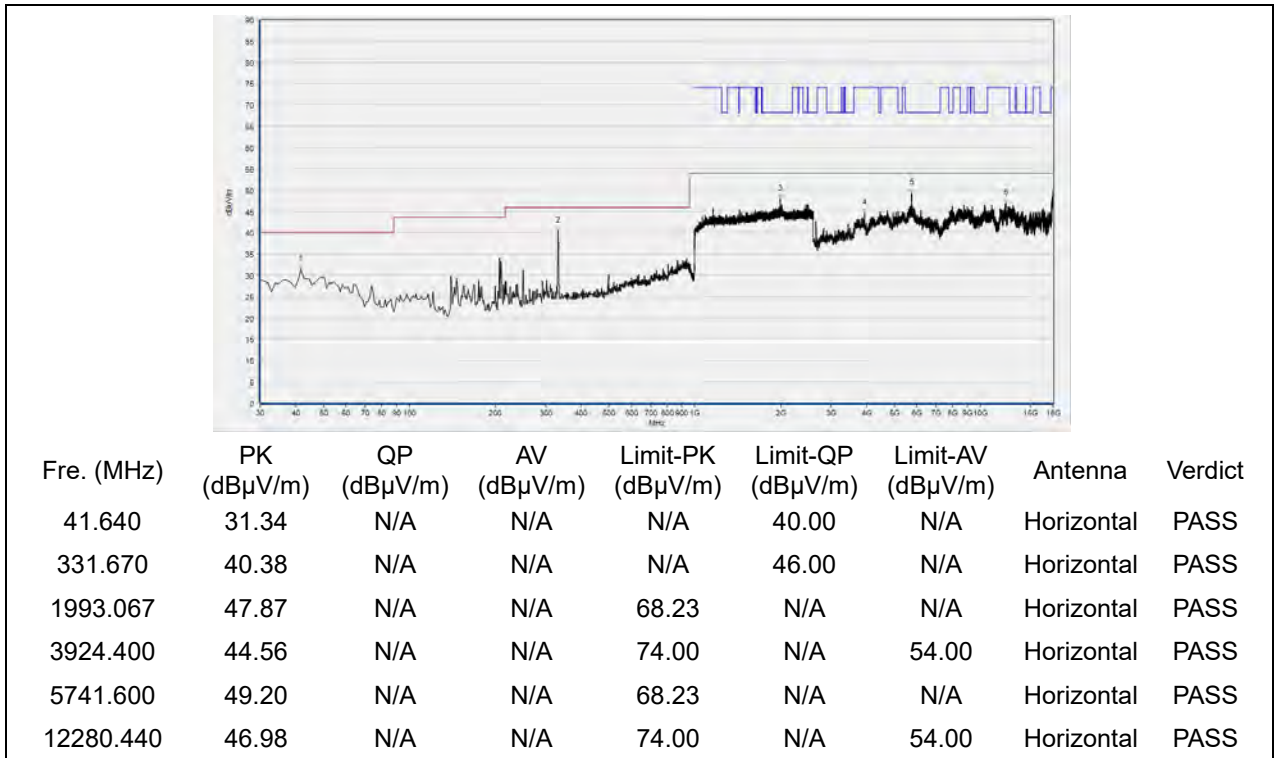


(Antenna Horizontal, 30MHz to 18GHz)

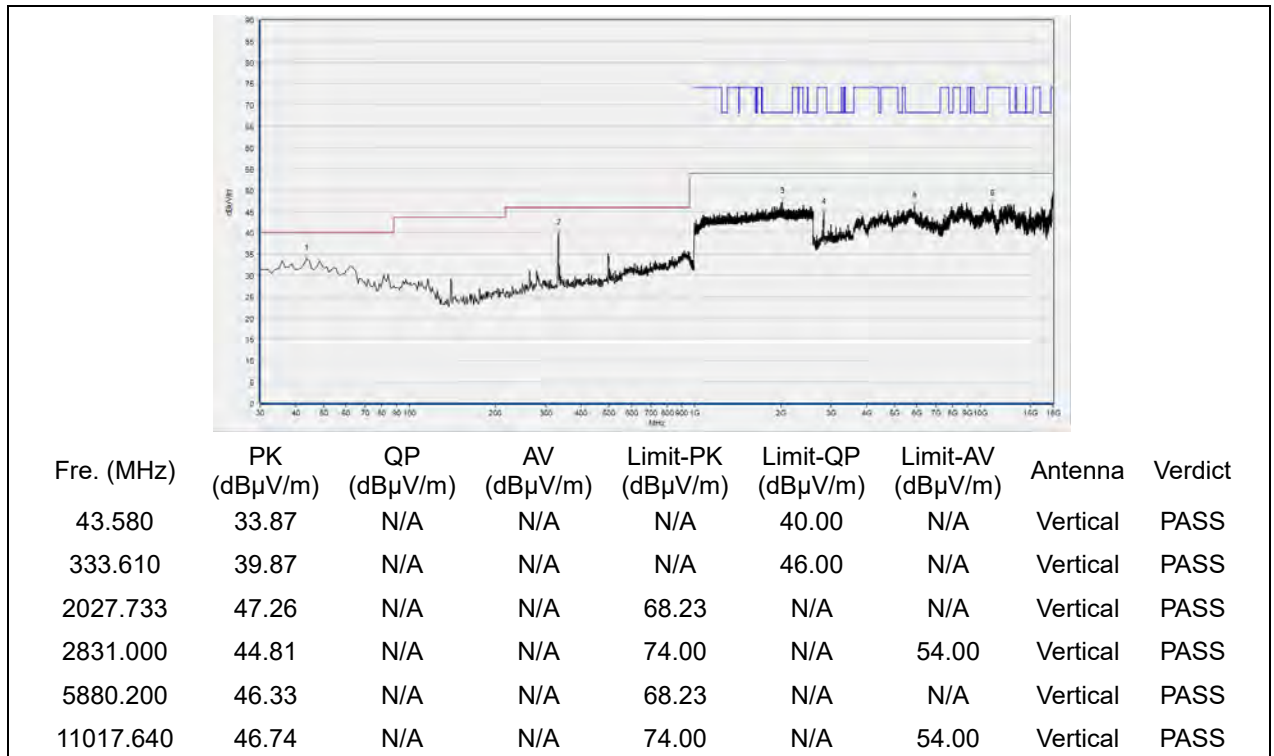


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 58

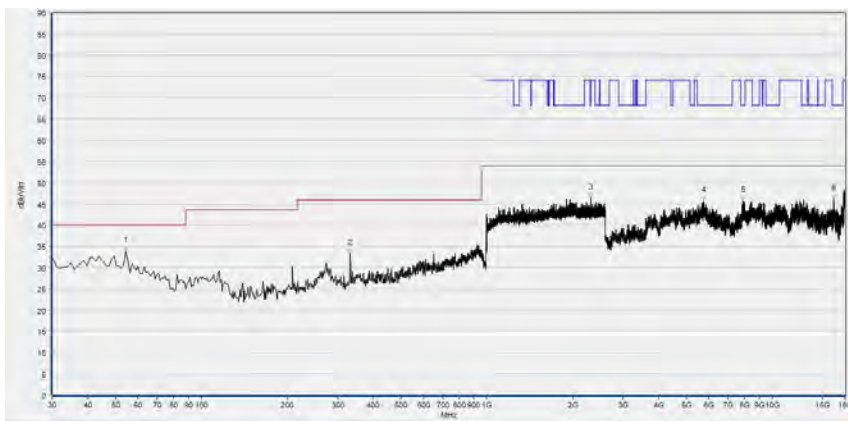

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
54.250	33.88	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
332.640	33.35	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2310.933	46.45	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5750.840	45.82	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
7900.680	45.68	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
16398.400	46.22	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

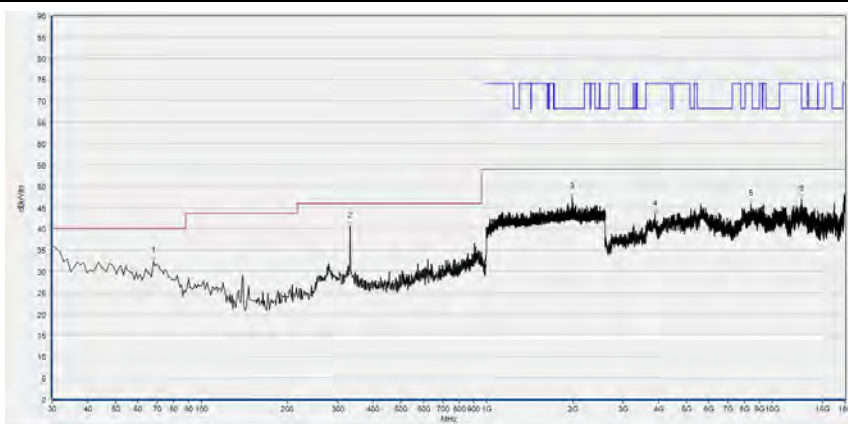

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
67.830	32.33	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
332.640	40.58	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1995.200	47.37	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
3887.440	43.35	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8430.440	45.74	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12674.680	46.98	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 106

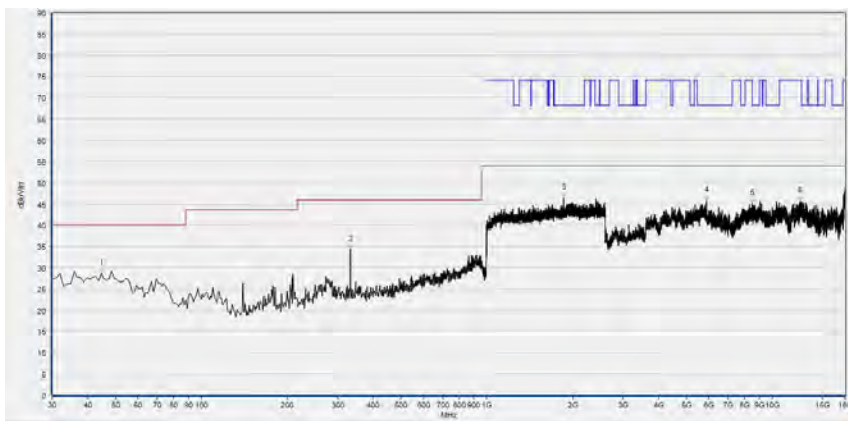

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
44.550	28.70	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
333.610	34.25	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1861.333	46.42	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
5892.520	45.70	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
8519.760	45.14	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12523.760	45.52	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

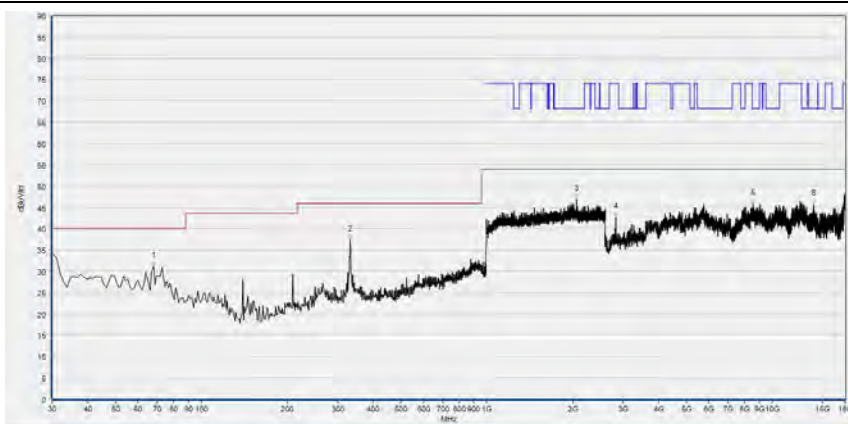

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
67.830	31.10	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
332.640	37.37	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2058.667	47.01	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
2827.920	42.67	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8565.960	45.87	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
14005.240	45.69	N/A	N/A	68.23	N/A	N/A	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 122

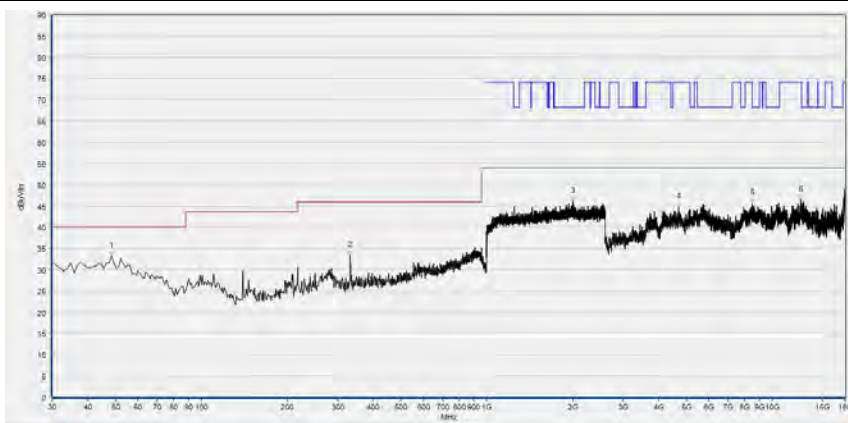

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.430	33.25	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
332.640	33.40	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1998.400	46.17	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
4691.320	44.69	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8507.440	45.51	N/A	N/A	68.23	N/A	N/A	Horizontal	PASS
12610.000	46.51	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

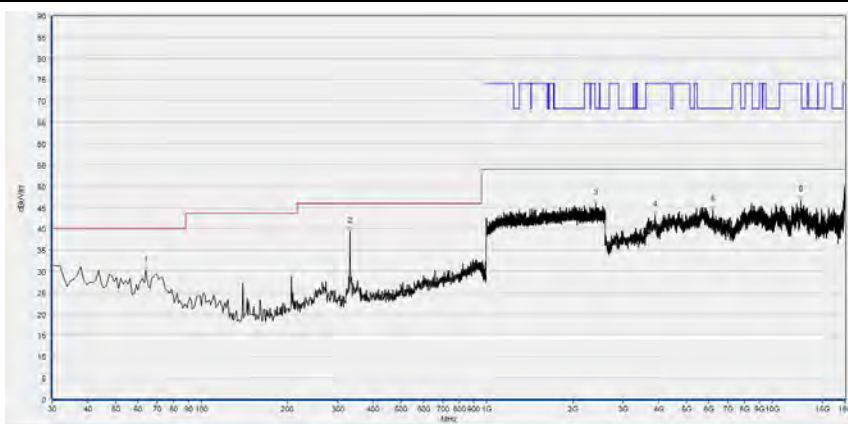


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
63.950	30.09	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
331.670	39.34	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2412.800	45.86	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
3881.280	43.31	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6197.440	44.47	N/A	N/A	68.23	N/A	N/A	Vertical	PASS
12603.840	46.80	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 138

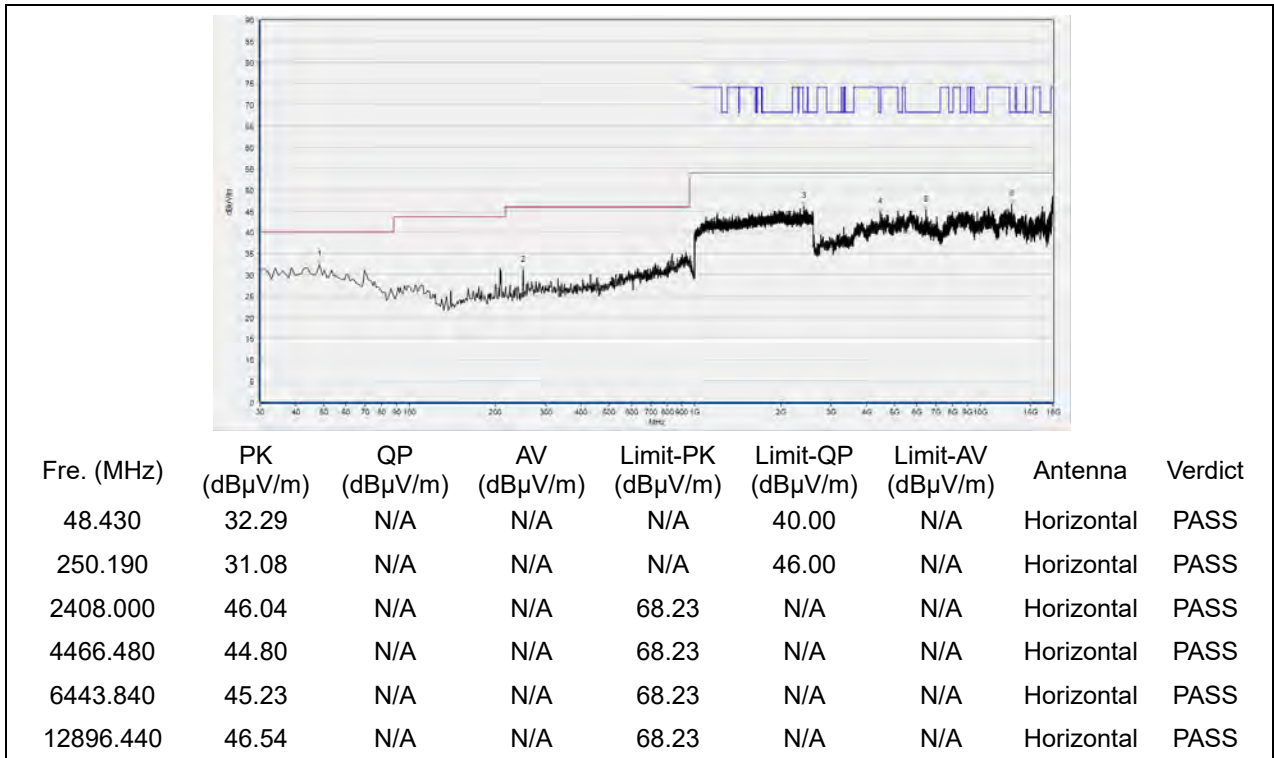


(Antenna Horizontal, 30MHz to 18GHz)

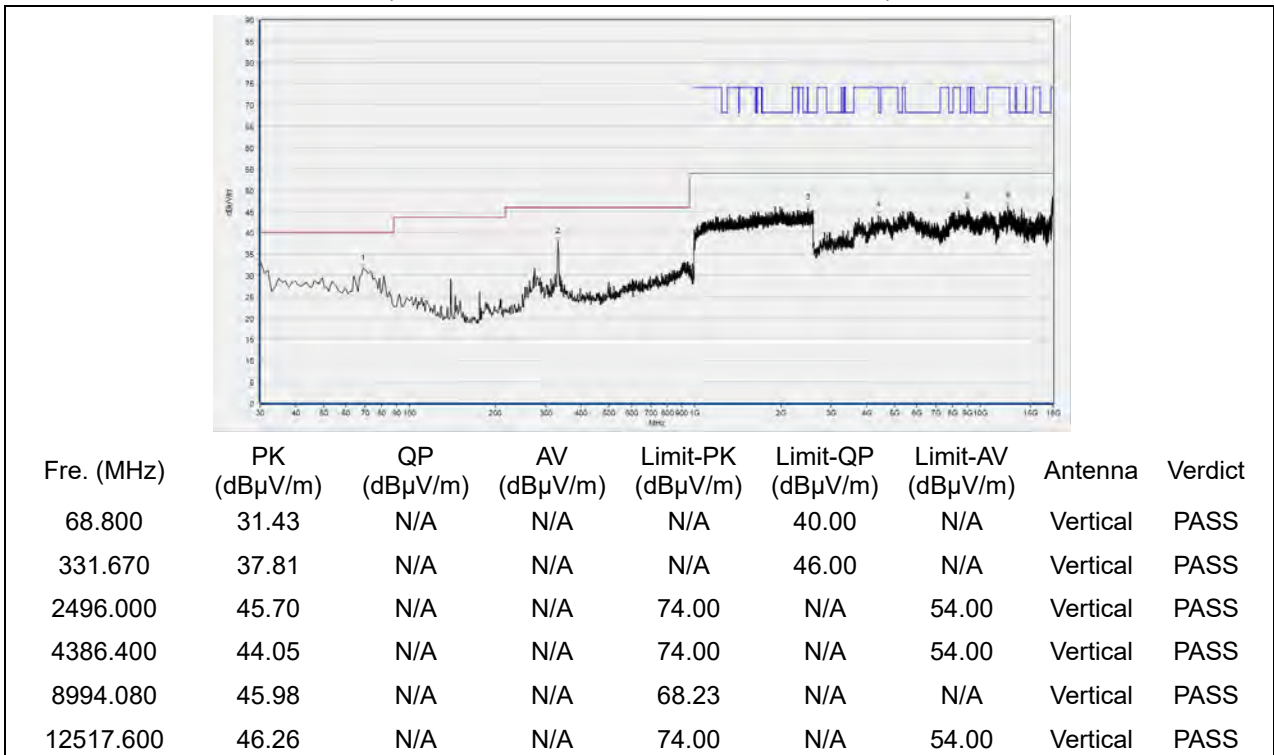


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 155

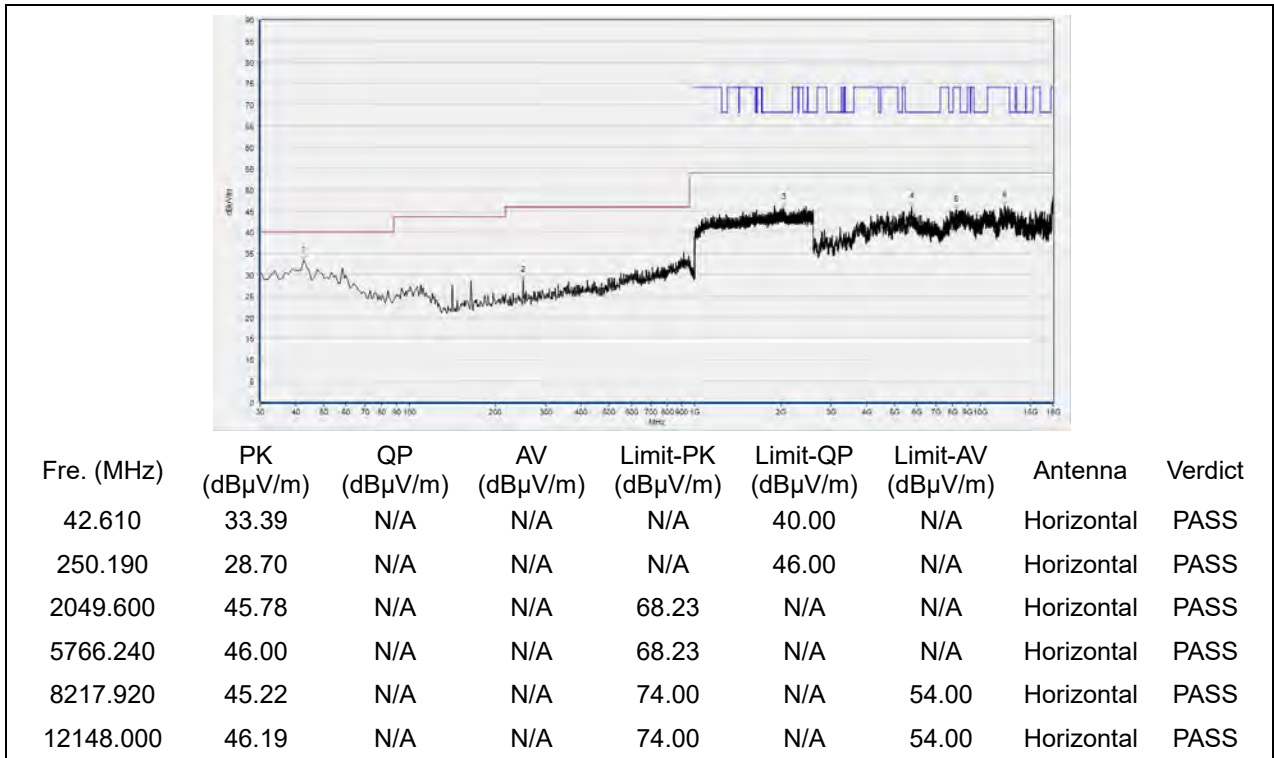

(Antenna Horizontal, 30MHz to 18GHz)

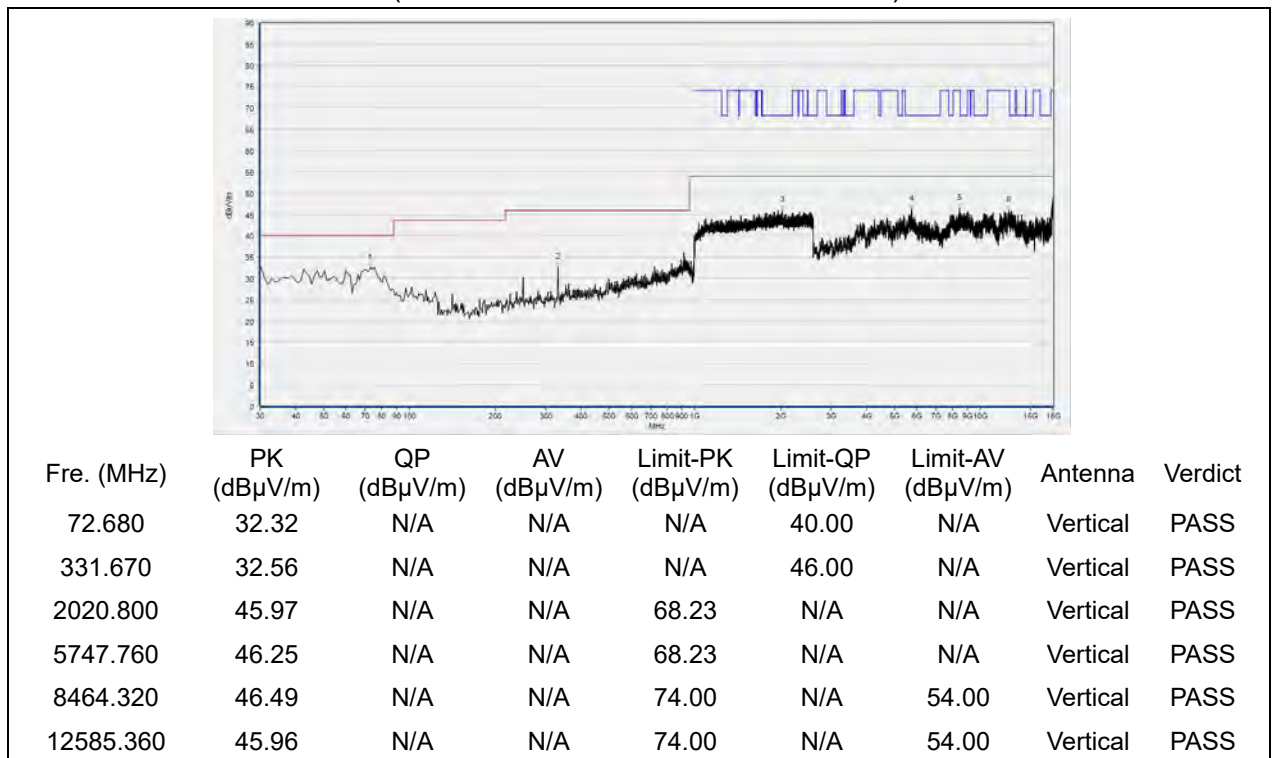

(Antenna Vertical, 30MHz to 18GHz)

Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Peak Output Power	$\pm 2.22\text{dB}$
Power spectral density (PSD)	$\pm 2.22\text{dB}$
Bandwidth	$\pm 5\%$
Restricted Frequency Bands	$\pm 5\%$
Radiated Emission	$\pm 2.95\text{dB}$
Conducted Emission	$\pm 2.44\text{dB}$

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Attenuator 1	N/A	10dB	Resnet	N/A	N/A
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2020.04.01	2021.03.31
USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2020.04.01	2021.03.31
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Temperature Chamber	12108015	DTL-003S101	YOMA	2020.01.08	2021.01.07

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2020.03.26	2021.03.25
LISN	812744	NSLK 8127	Schwarzbeck	2020.03.26	2021.03.25
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2020.07.24	2021.07.23
Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A
Adapter	N/A	LYD120200 0B	Guangdong Lianyunda Electronic Co., Ltd.	N/A	N/A
PCBA	N/A	TKH1V060 8467C0	Wuzhu	N/A	N/A

4.3 List of Software Used

Description	Manufacturer	Software Version
Test System	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V1.0
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**4.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2020.07.21	2021.07.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2019.05.24	2022.05.23
Test Antenna - Horn	BBHA9170 #774	BBHA 9170	Schwarzbeck	2019.07.26	2022.07.25
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2019.02.14	2022.02.13
Test Antenna - Horn	01774	BBHA 9120D	Schwarzbeck	2019.07.26	2022.07.25
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-40GHz)	CB05	EMC05	Morlab	N/A	N/A
1-18GHz pre-Amplifier	61171/61172	S020180L32 03	Tonscend	2020.07.21	2021.07.20
18-26.5GHz pre-Amplifier	46732	S10M100L38 02	Tonscend	2020.07.21	2021.07.20
26-40GHz pre-Amplifier	56774	S40M400L40 02	Tonscend	2020.07.21	2021.07.20
Notch Filter	N/A	WRCG-5150-5350	Wainwright	2020.07.21	2021.07.20
Notch Filter	N/A	WRCG-5470-5725	Wainwright	2020.07.21	2021.07.20
Notch Filter	N/A	WRCG-5725-5850	Wainwright	2020.07.21	2021.07.20



REPORT No.: SZ20120391W04

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Anechoic Chamber	N/A	9m*6m*6m	CRT	2020.01.06	2023.01.05

————— END OF REPORT —————