


FCC Radio Test Report

FCC ID: 2AOHHTURBOXC7230C

According to

**47 CFR FCC Part 15, Subpart C(Section 15.247)
ANSI C63.10:2013**

Product description : Smart Module
 Model No. : C7230C
 Trade Mark : TurboX
 Product No. : POC230731014-S001
 Applicant : Thundercomm Technology Co., Ltd
 No. 107, Middle Datagu Road, Xiantao Street, Yubei District,
 Chongqing, China, 401122
 Receipt date : 2023.08.02
 Test date : 2023.08.03~2023.08.16
 Issued Date : 2023.08.31

Prepared By:	Checked By:	Approved By:	
Jason huang	Tim zhang	Misue Su	
<i>Jason huang</i>	<i>Tim.zhang</i>	<i>Misue Su</i>	

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen Haiyun Standard Technical Co., Ltd. This document may be altered or revised by Shenzhen Haiyun Standard Technical Co., Ltd. Personnel only, and shall be noted in the revision section of the document. The test results of this report relate only to the tested sample identified in this report.

Table of Contents

REPORT ISSUED HISTORY	4
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
1.3 TEST ENVIRONMENT CONDITIONS	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	8
2.3 PARAMETERS OF TEST SOFTWARE	8
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.5 SUPPORT UNITS	8
3 . AC POWER LINE CONDUCTED EMISSIONS	9
3.1 LIMIT	9
3.2 TEST PROCEDURE	9
3.3 DEVIATION FROM TEST STANDARD	9
3.4 TEST SETUP	10
3.5 EUT OPERATING CONDITIONS	10
3.6 TEST RESULTS	10
4 . RADIATED EMISSIONS	11
4.1 LIMIT	11
4.2 TEST PROCEDURE	12
4.3 DEVIATION FROM TEST STANDARD	13
4.4 TEST SETUP	13
4.5 EUT OPERATING CONDITIONS	14
4.6 TEST RESULTS - 9 KHZ TO 30 MHZ	14
4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	14
4.8 TEST RESULTS - ABOVE 1000 MHZ	14
5 . MAXIMUM OUTPUT POWER	15
5.1 LIMIT	15
5.2 TEST PROCEDURE	15
5.3 DEVIATION FROM STANDARD	15
5.4 TEST SETUP	15

5.5 EUT OPERATION CONDITIONS	15
5.6 TEST RESULTS	15
6 . MEASUREMENT INSTRUMENTS LIST	17
7 . ANTENNA REQUIREMENT	18
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	19
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	21
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	22
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	24
APPENDIX E - MAXIMUM OUTPUT POWER	39

REPORT ISSUED HISTORY

Report No.	Issue Date	Description
RF230731014-01-003	2023.08.31	Replaced the antenna, CPU, model, and IC of the product compared to the original report (SZ22110114W02), see below for details. After the evaluation, we retested the conducted and radiated emissions, power of the AC power line. Other test data is subject to the original report

Content of change:

1. The new antenna is changed, and the antenna gain is different. 2.4G and Bluetooth are the gain becomes larger, and 5G is the gain becomes smaller
2. QCS8250 replaced by QCS7230, both CPUs have the same PIN, which is pin-for-pin with the original CPU, and the RF performance is basically the same.
3. Modify the product name, model and FCC ID, original FCC ID: 2AOHHTURBOXC865C Change to 2AOHHTURBOXC7230C

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emission	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247 (a)(1)(iii)	Number of Hopping Frequency	-----	PASS	Note(3)
15.247 (a)(1)(iii)	Average Time of Occupancy	-----	PASS	Note(3)
15.247(a)(1)	Hopping Channel Separation	-----	PASS	Note(3)
15.247(a)(1)	Bandwidth	-----	PASS	Note(3)
15.247(a)(1)	Maximum Output Power	APPENDIX E	PASS	-----
15.247(d)	Conducted Spurious Emission	-----	PASS	Note(3)
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable in this test report
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) For test item: Average Time of Occupancy, Average Time of Occupancy and Hopping Channel Separation and Bandwidth and Conducted Spurious Emission and Conducted Spurious Emission, Please refer to original report(SZ22110114W02)

1.1 TEST FACILITY

Company:	Shenzhen Haiyun Standard Technical CO., Ltd.
Address:	Room 110, 111, 112, 113, 115, 116, Block B, Jinyuan Business Building, No. 302, Xixiang Avenue, Labor Community, Xixiang Street, Baoan District, Shenzhen, China
CNAS Registration Number:	CNAS L18252
CAB identifier:	CN0145
A2LA Certificate Number:	6823.01
Telephone:	0755-26024411

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Uncertainty	
Parameter	Uncertainty
Occupied Channel Bandwidth	±143.88 kHz
Power Spectral Density	±0.743dB
Conducted Spurious Emission	±1.328dB
RF power conducted	±0.384 dB
Conducted emission(9kHz~30MHz) AC main	±2.72dB
Radiated emission(9kHz~30MHz)	±2.66dB
Radiated emission (30MHz~1GHz)	±4.62dB
Radiated emission (1GHz~18GHz)	±4.86dB
Radiated emission (18GHz~40GHz)	±3.80dB

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	25°C	53%	AC 120V/60Hz	Albert Fan
Radiated Emissions-9 kHz to 30 MHz	24°C	51%	AC 120V/60Hz	Albert Fan
Radiated Emissions-30 MHz to 1000 MHz	24°C	51%	AC 120V/60Hz	Albert Fan
Radiated Emissions-Above 1000 MHz	24°C	51%	AC 120V/60Hz	Albert Fan

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Module
Brand Name	TURBOX
Test Model	C7230C
Software Version	FlatBuild_Turbox-QCS8250_xx.xx_la1.0.D.userdebug.20221024.1345
Hardware Version	DT865_DEq_LA-IOB V03
Power Source	INPUT: 100-240V~ 50/60Hz 1.5A OUTPUT: 5.0V \leq 3.0A 15.0W; 9.0V \leq 3.0A 27W; 15.0V \leq 3.0A 45.0W; 20V \leq 2.25A 45.0W
Operation Frequency	2402 MHz ~ 2480 MHz
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Bit Rate of Transmitter	1Mbps, 2Mbps, 3Mbps
Max. Output Power	1Mbps: 7.23 dBm
Antenna gain	Ant1: 3.35dBi
Antenna type	PIFA antenna

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

2.2 DESCRIPTION OF TEST MODES

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 1	TX Mode_1Mbps Channel 39

Radiated emissions test - Below 1GHz	
Final Test Mode	Description
Mode 1	TX Mode_1Mbps Channel 39

Radiated emissions test - Above 1GHz	
Final Test Mode	Description
Mode 1	TX Mode_1Mbps 2Mbps 3Mbps Channel 00/39/78

Note:

- (1) For AC power line conducted emissions and radiated spurious emissions below 1 GHz test, the 1Mbps Channel 39 are found to be the worst case and recorded.

2.3 PARAMETERS OF TEST SOFTWARE

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test Software Version	WCN_Combo_Tool		
Frequency (MHz)	2402	2441	2480
1Mbps	default	default	default
2Mbps	default	default	default
3Mbps	default	default	default

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED



2.5 SUPPORT UNITS

Support Equipment				
No.	Equipment	Brand Name	Model Name	Remarks
1	Mini PC	/	S10	DC 12V/4A
2	Adapter	CHANNEL WELL TECHNOLOG Y	S1C045DC	INPUT: 100-240V~ 50/60Hz 1.5A OUTPUT:5.0V \Rightarrow 3.0A15.0W; 9.0V \Rightarrow 3.0A27W; 15.0V \Rightarrow 3.0A45.0W; 20V \Rightarrow 2.25A 45.0W

3. AC POWER LINE CONDUCTED EMISSIONS

3.1 LIMIT

Frequency of Emission (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameters	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

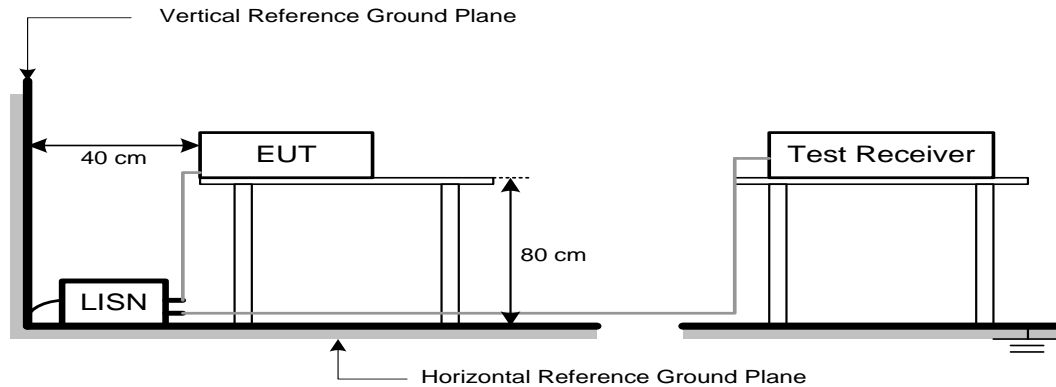

3.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical function (as a customer would normally use it), EUT was programmed to be in continuously transmitting data or hopping on mode.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of [Note] . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform in this case, a "*" marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150 kHz to 30 MHz.

4. RADIATED EMISSIONS

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

Note:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector

4.3 DEVIATION FROM TEST STANDARD


No deviation.

4.4 TEST SETUP


9 kHz to 30 MHz

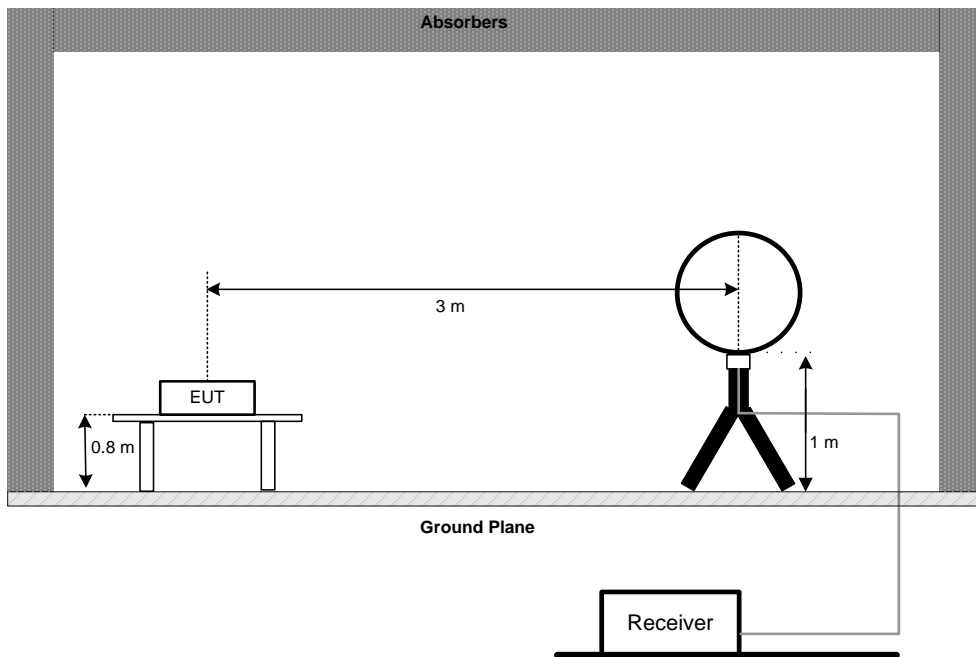

30 MHz to 1 GHz

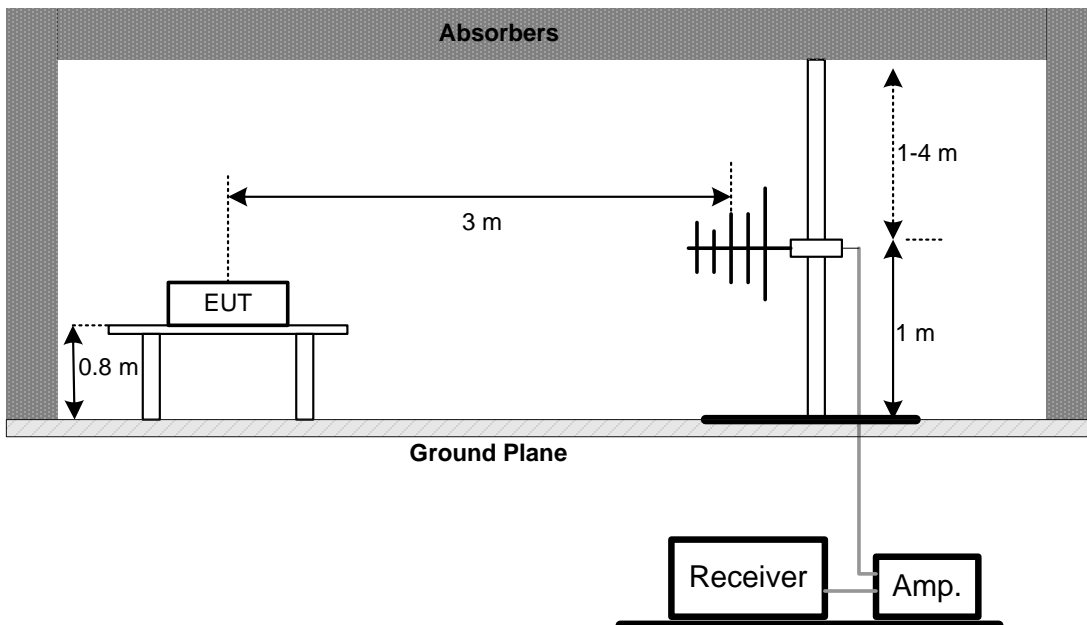

Above 1 GHz

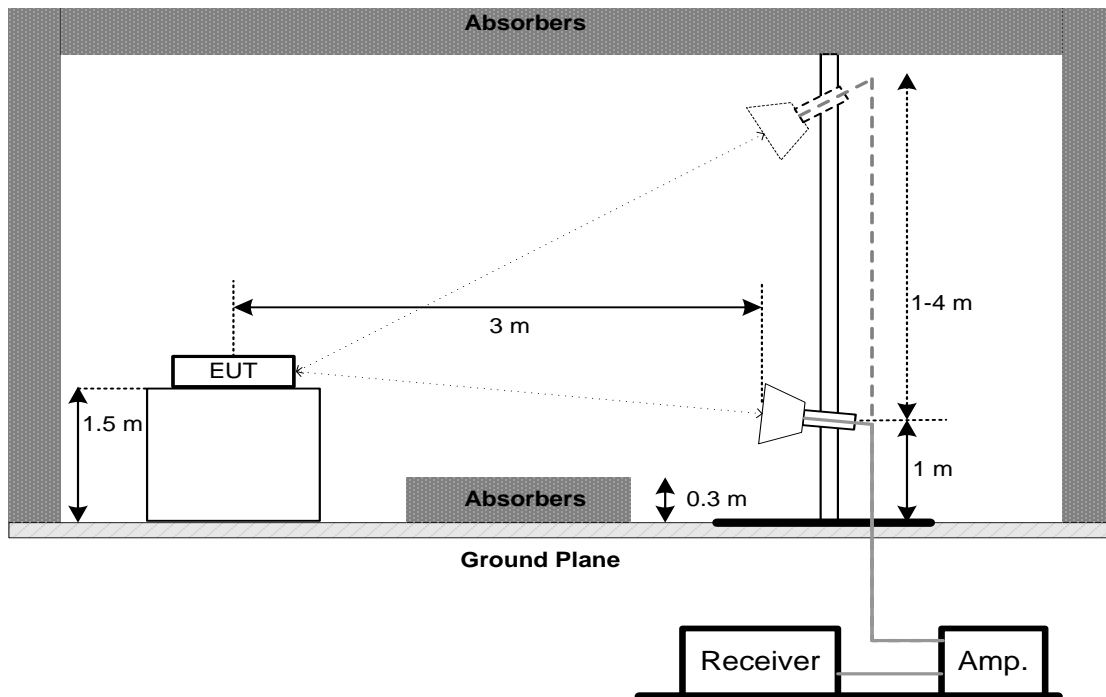

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULTS - 9 kHz TO 30 MHz

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.7 TEST RESULTS - 30 MHz TO 1000 MHz

Please refer to the APPENDIX C.

4.8 TEST RESULTS - ABOVE 1000 MHz

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. MAXIMUM OUTPUT POWER

5.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(1)	Maximum Output Power	0.1250 Watt or 20.97 dBm

Note: Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.2 TEST PROCEDURE


- The EUT was directly connected to the tonscond test system and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	Approximately five times the 20 dB bandwidth, centered on a hopping channel.
RBW	3 MHz
VBW	3 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP

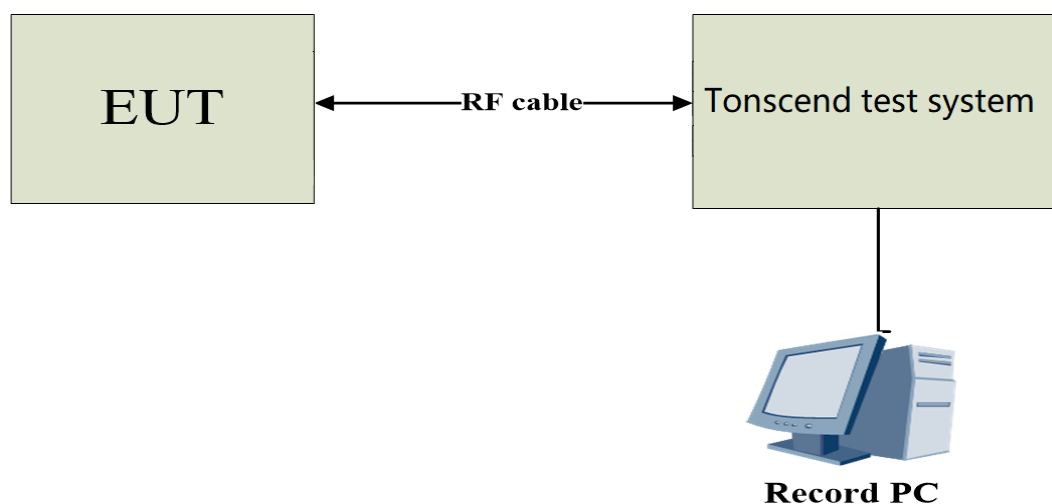

5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX E.

6. MEASUREMENT INSTRUMENTS LIST

Radiated Emissions						
No.	Equipment	Manufacturer	Type No.	Serial No.	Cal. date (yyyy/mm/dd)	Cal. Due date (yyyy/mm/dd)
1	Test receiver	Rohde&Schwarz	ESU	100184	2023/5/3	2024/5/2
2	Horn Antenna	Schwarzbeck	BBHA 9120 D	9120D-1273	2023/4/23	2024/4/22
3	Low frequency amplifier	Unknown	LNA 0920N	2014	2023/5/3	2024/5/2
4	High frequency amplifier	Schwarzbeck	BBV 9718	284	2023/5/3	2024/5/2
5	Loop Antenna	Schwarzbeck	FMZB1519 B	00029	2022/7/4	2025/7/3
6	Log periodic antenna	Schwarzbeck	VULB 9168	1151	2023/4/23	2024/4/22
7	Horn Antenna	Schwarzbeck	BBHA 9120 D	9120D-1273	2022/5/5	2025/5/4
8	Horn Antenna	Schwarzbeck	BBHA 9170	9170#685	2022/7/4	2025/7/3
9	Temp&Humidity Recorder	Meideshi	JR900	/	2023/5/3	2024/5/2
10	RF cable(966 chamber)9kHz-1 GHz	Unknown	Unknown	Unknown	2023/5/3	2024/5/2
11	RF cable(966 chamber)1GHz-1 8GHz	Unknown	Unknown	Unknown	2023/5/3	2024/5/2
12	RF cable(966 chamber)18GHz-40GHz	Unknown	Unknown	Unknown	2023/5/3	2024/5/2
13	Test software	Farad Technology Co., Ltd	EZ-EMC	/	/	/
Conducted Emission						
1	Test receiver	Rohde&Schwarz	ESCI	100718	2023/5/3	2024/5/2
2	LISN	Rohde&Schwarz	ENV216	100075	2023/5/3	2024/5/2
3	Pulse limiter	Rohde&Schwarz	ESH3-Z2	102299	2023/5/3	2024/5/2
4	RF cable (9kHz-30MHz)	Unknown	Unknown	Unknown	2023/5/3	2024/5/2
5	Test software	Farad Technology Co., Ltd	EZ-EMC	/	/	/
RF conducted Emissions						
1	MXA Signal Analyzer	Keysight	N9021B	MY6008016 9	2023/4/23	2024/4/22
2	RF Control Unit	dsusoft	JS0806-2	21G806044 9	2023/4/23	2024/4/22
3	power supply unit	dsusoft	JS0806-4A DC	N/A	2023/4/23	2024/4/22
4	VXG Signal Generator	Keysight	M9384B	MY6127078 7	2023/4/23	2024/4/22
5	EXG Analog Signal Generator	Keysight	N5173B	MY5910128 2	2023/4/23	2024/4/22
6	Test software	dsusoft	JS1120-3	/	/	/

7. ANTENNA REQUIREMENT

Test standard: FCC part 15.203


According to the manufacturer, BT is a PIFA antenna, with a gain of 3.35dBi, and the antenna connector is designed to be permanently connected without thinking about replacement.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX Mode_1Mbps Channel 39	Phase	Line
-----------	--------------------------	-------	------

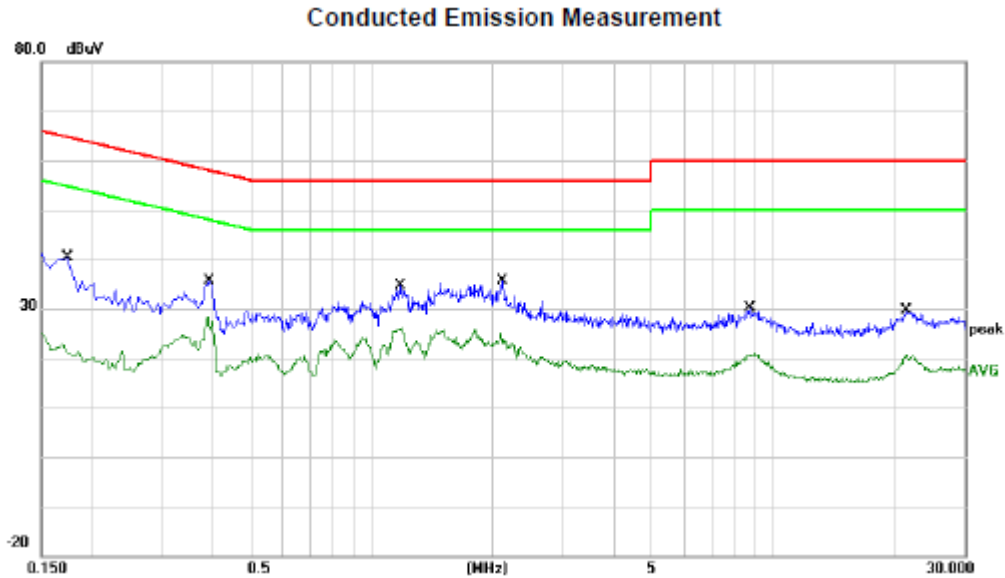


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1740	12.69	19.88	32.57	64.77	-32.20	QP	
2		0.1740	1.44	19.88	21.32	54.77	-33.45	AVG	
3		0.3940	10.72	19.88	30.60	57.98	-27.38	QP	
4		0.3940	5.23	19.88	25.11	47.98	-22.87	AVG	
5		1.1740	8.72	19.89	28.61	56.00	-27.39	QP	
6	*	1.1740	5.84	19.89	25.73	46.00	-20.27	AVG	
7		2.1140	8.84	19.91	28.75	56.00	-27.25	QP	
8		2.1140	3.78	19.91	23.69	46.00	-22.31	AVG	
9		8.7460	4.04	19.95	23.99	60.00	-36.01	QP	
10		8.7460	-0.05	19.95	19.90	50.00	-30.10	AVG	
11		21.5060	3.48	20.07	23.55	60.00	-36.45	QP	
12		21.5060	-0.84	20.07	19.23	50.00	-30.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_1Mbps Channel 39	Phase	Neutral
-----------	--------------------------	-------	---------

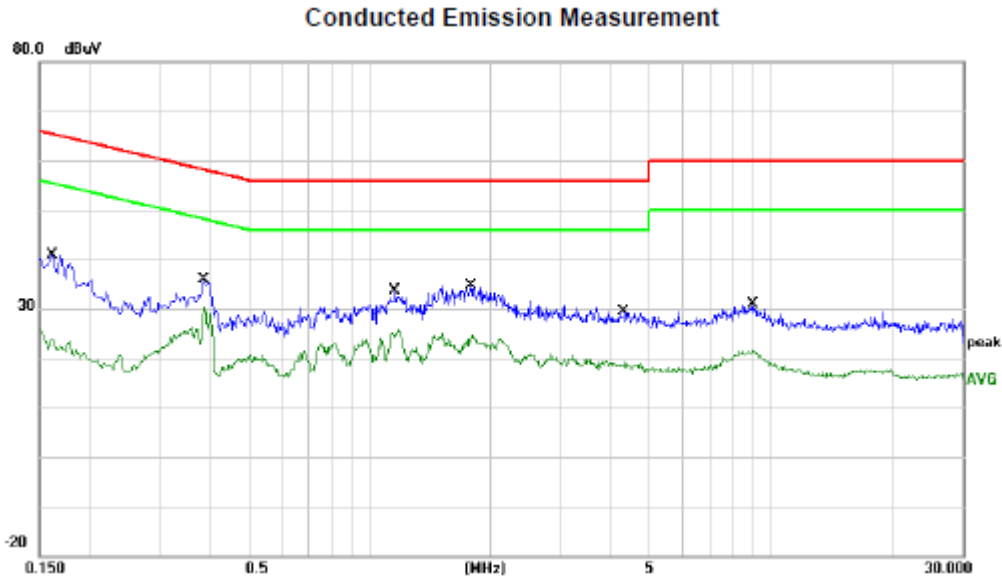

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1620	14.37	19.88	34.25	65.36	-31.11	QP	
2		0.1620	1.74	19.88	21.62	55.36	-33.74	AVG	
3		0.3860	12.09	19.88	31.97	58.15	-26.18	QP	
4	*	0.3860	8.94	19.88	28.82	48.15	-19.33	AVG	
5		1.1540	7.12	19.89	27.01	56.00	-28.99	QP	
6		1.1540	4.17	19.89	24.06	46.00	-21.94	AVG	
7		1.7860	8.56	19.90	28.46	56.00	-27.54	QP	
8		1.7860	3.71	19.90	23.61	46.00	-22.39	AVG	
9		4.2940	2.65	19.91	22.56	56.00	-33.44	QP	
10		4.2940	-1.92	19.91	17.99	46.00	-28.01	AVG	
11		9.0500	4.82	19.95	24.77	60.00	-35.23	QP	
12		9.0500	0.77	19.95	20.72	50.00	-29.28	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX Mode_1Mbps Channel 39	Polarization	Vertical
-----------	--------------------------	--------------	----------

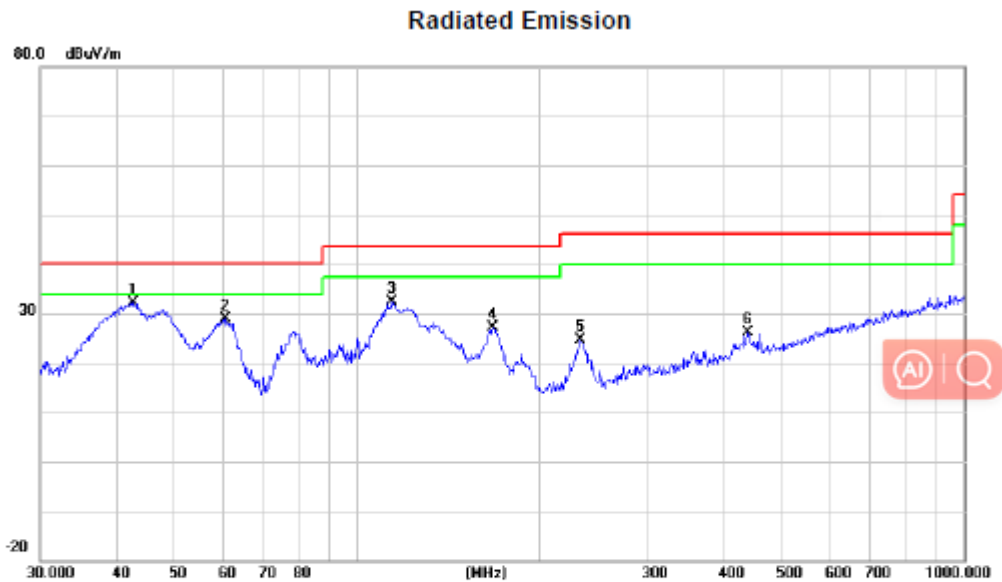


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	42.7495	42.90	-10.71	32.19	40.00	-7.81			peak
2		60.7043	41.19	-12.19	29.00	40.00	-11.00			peak
3		113.7143	44.20	-11.72	32.48	43.50	-11.02			peak
4		167.2366	37.08	-9.84	27.24	43.50	-16.26			peak
5		232.5318	34.68	-10.17	24.51	46.00	-21.49			peak
6		440.1962	31.06	-4.85	26.21	46.00	-19.79			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_1Mbps Channel 39	Polarization	Horizontal
-----------	--------------------------	--------------	------------

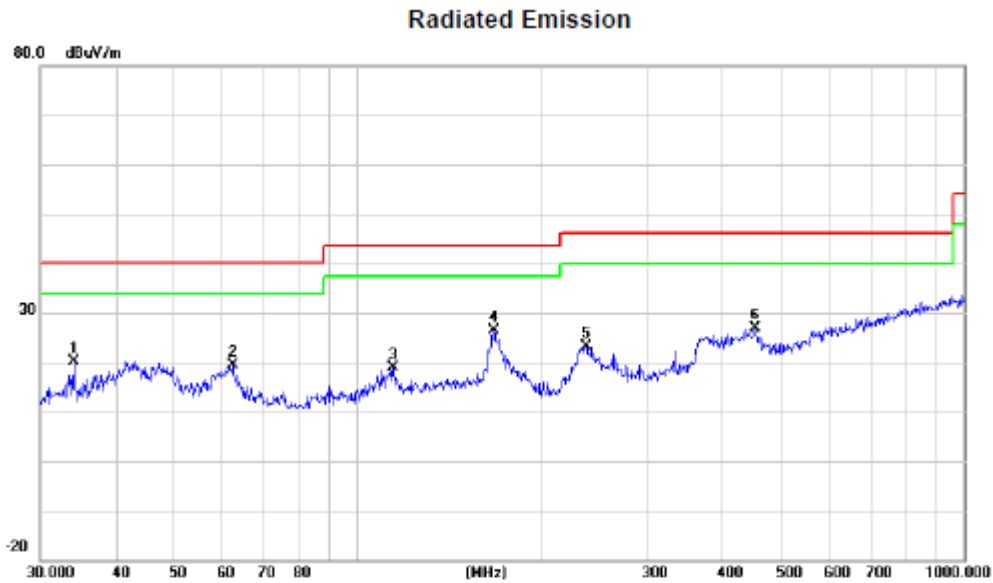


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	
1		34.0363	31.99	-11.78	20.21	40.00	-19.79	peak		
2		62.2128	31.57	-12.31	19.26	40.00	-20.74	peak		
3		114.5146	30.38	-11.61	18.77	43.50	-24.73	peak		
4	*	167.8242	36.27	-9.88	26.39	43.50	-17.11	peak		
5		238.3101	33.13	-9.92	23.21	46.00	-22.79	peak		
6		452.7197	31.33	-4.56	26.77	46.00	-19.23	peak		

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode	TX Mode_1Mbps Channel 00	Polarization	Vertical
-----------	--------------------------	--------------	----------

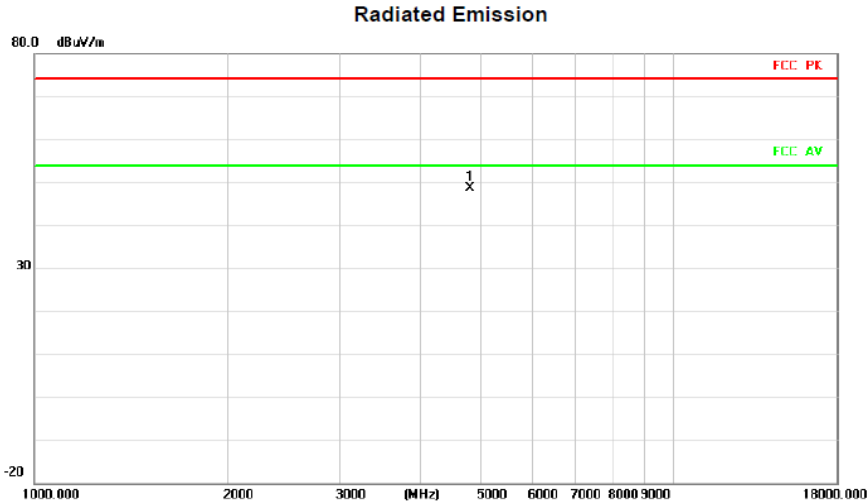


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	4804.000	50.59	-1.99	48.60	74.00	-25.40	peak		

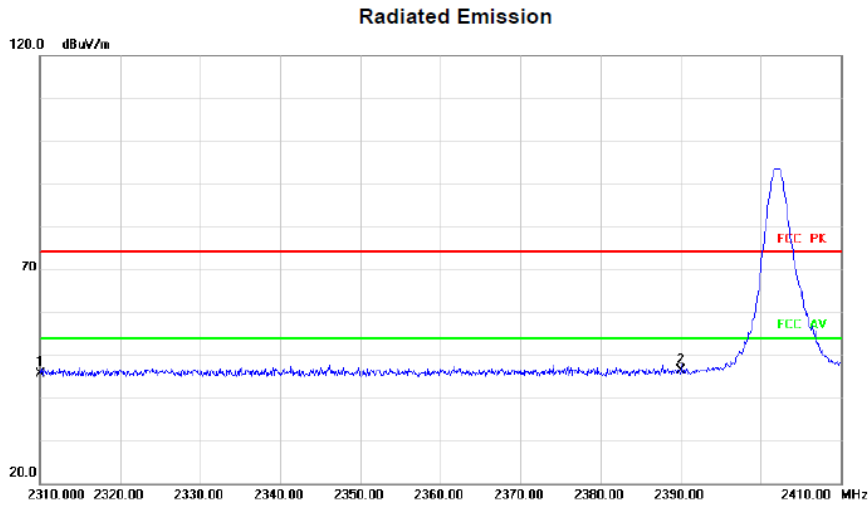

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	35.39	10.19	45.58	74.00	-28.42	peak		
2	*	2390.000	35.97	10.41	46.38	74.00	-27.62	peak		


Test Mode	TX Mode_1Mbps Channel 00	Polarization	Horizontal
-----------	--------------------------	--------------	------------

Radiated Emission

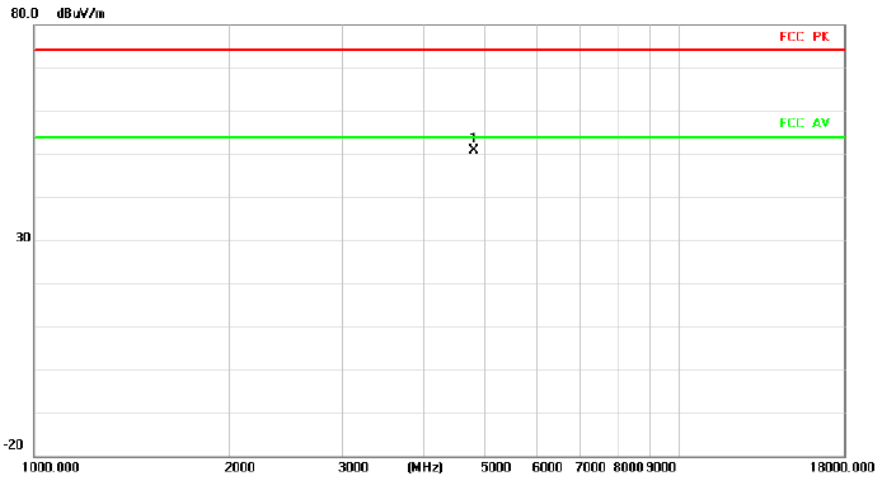


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	4804.000	52.88	-1.99	50.89	74.00	-23.11	peak	

Radiated Emission

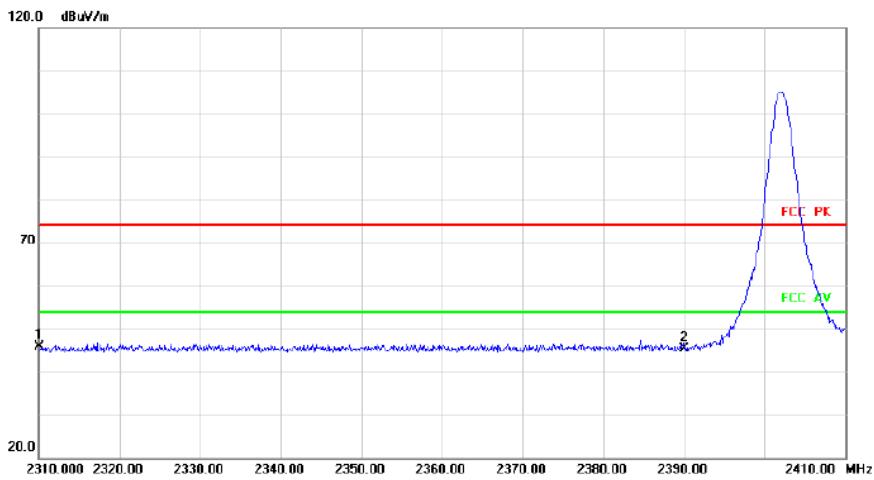


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	2310.000	35.79	10.19	45.98	74.00	-28.02	peak	
2		2390.000	35.02	10.41	45.43	74.00	-28.57	peak	

Test Mode	TX Mode_1Mbps Channel 39	Polarization	Vertical
-----------	--------------------------	--------------	----------

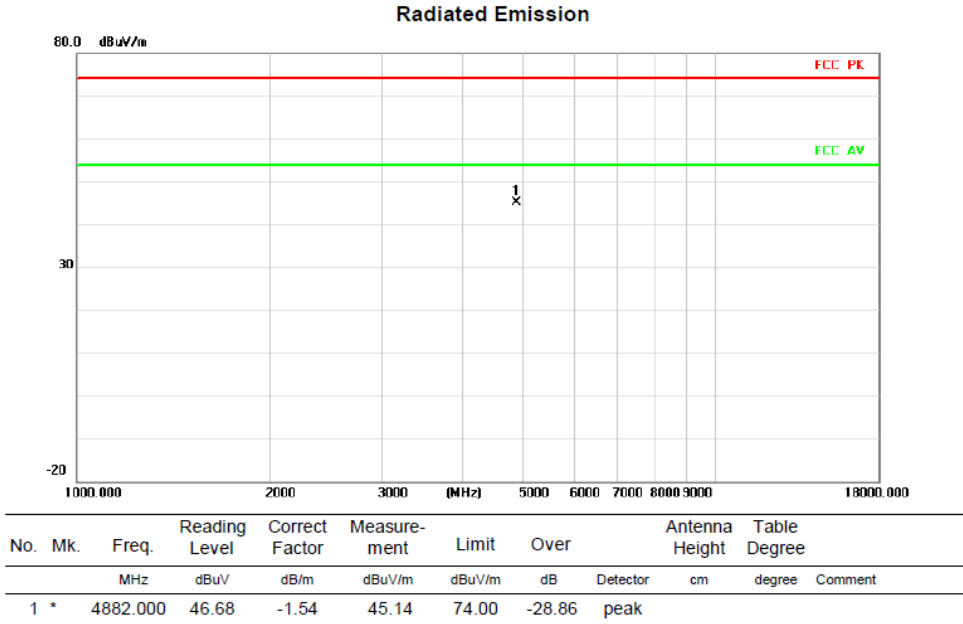


Test Mode	TX Mode_1Mbps Channel 39	Polarization	Horizontal
-----------	--------------------------	--------------	------------

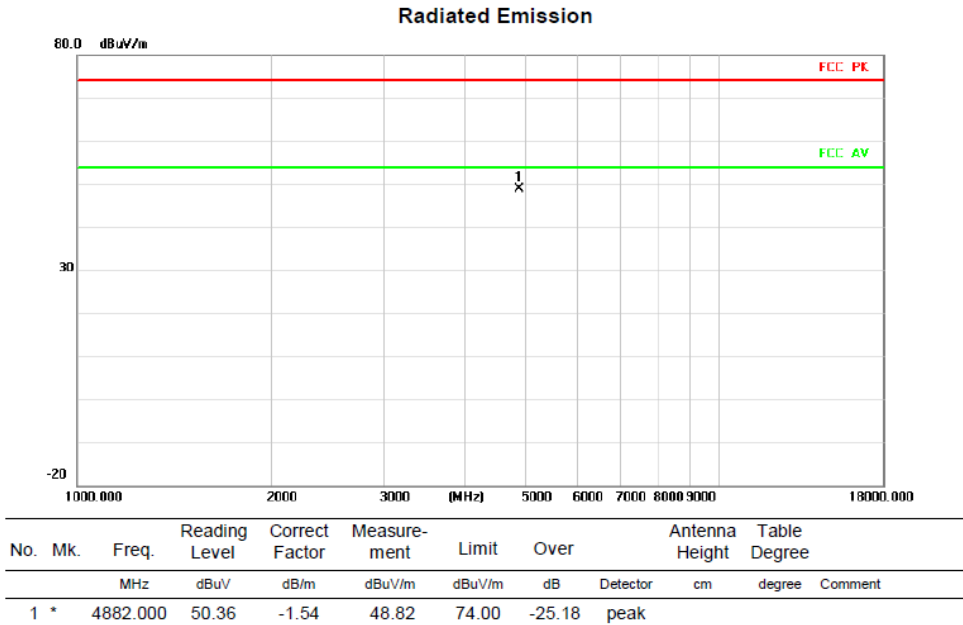


Test Mode	TX Mode_1Mbps Channel78	Polarization	Vertical
-----------	-------------------------	--------------	----------

Radiated Emission

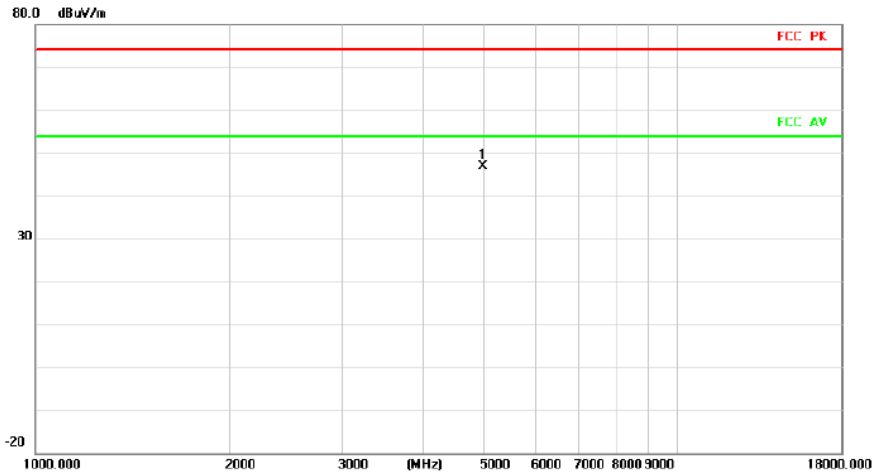

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	4960.000	48.02	-1.08	46.94	74.00	-27.06	peak	


Radiated Emission

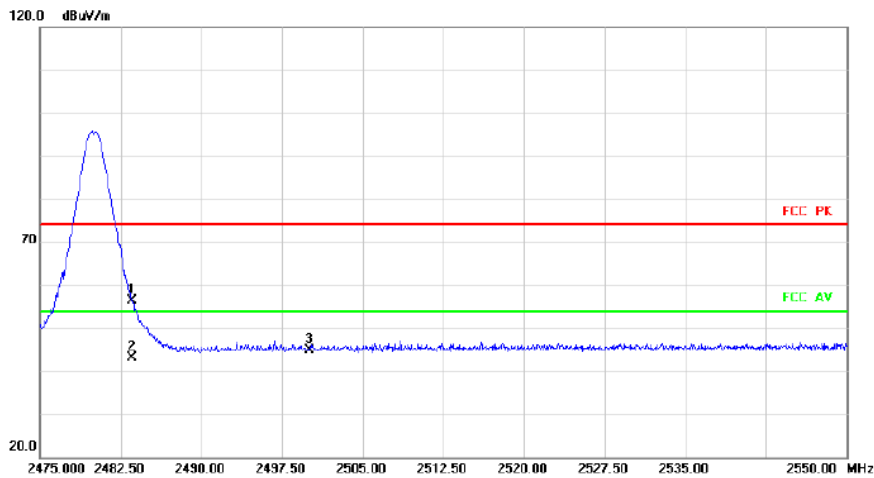

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		2483.500	45.34	11.09	56.43	74.00	-17.57	peak	
2	*	2483.500	32.13	11.09	43.22	54.00	-10.78	AVG	
3		2500.000	33.59	11.22	44.81	74.00	-29.19	peak	


Test Mode	TX Mode_1Mbps Channel 78	Polarization	Horizontal
-----------	--------------------------	--------------	------------

Radiated Emission

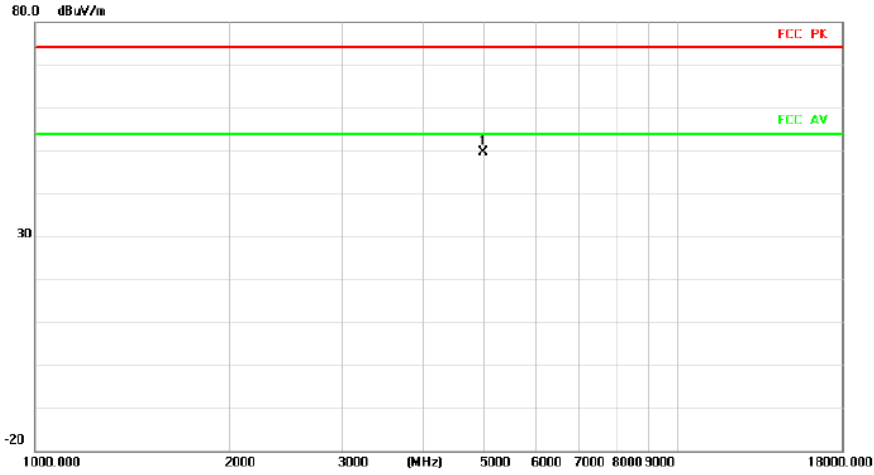

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	4960.000	50.60	-1.08	49.52	74.00	-24.48	peak	


Radiated Emission

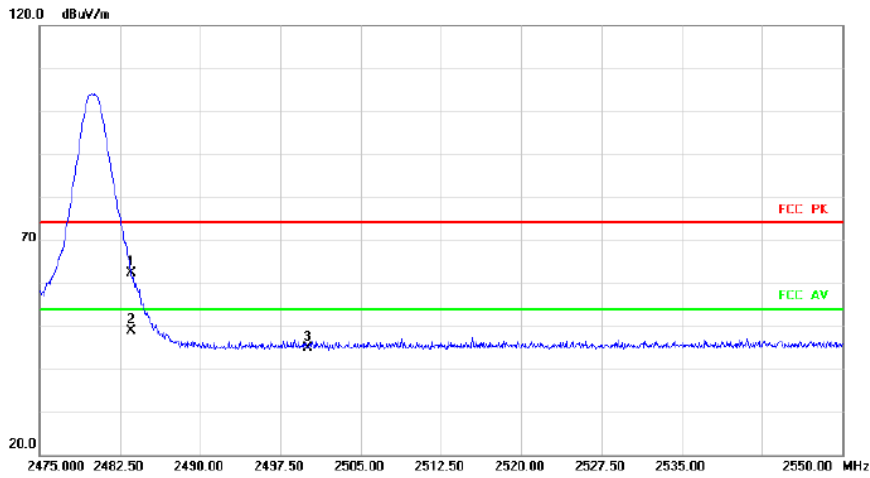

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		2483.500	51.19	11.09	62.28	74.00	-11.72	peak	
2	*	2483.500	37.86	11.09	48.95	54.00	-5.05	AVG	
3		2500.000	33.70	11.22	44.92	74.00	-29.08	peak	


Test Mode	TX Mode_2Mbps Channel 00	Polarization	Vertical
-----------	--------------------------	--------------	----------

Radiated Emission

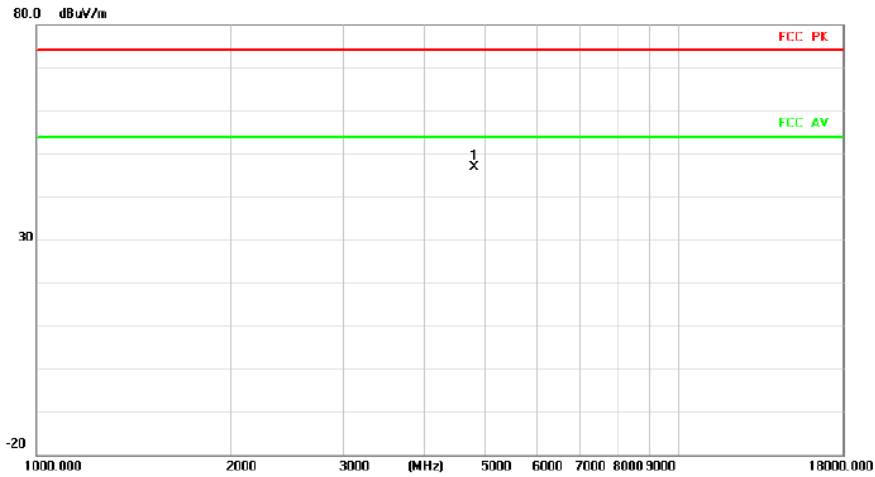


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	4804.000	48.87	-1.99	46.88	74.00	-27.12	peak		

Radiated Emission

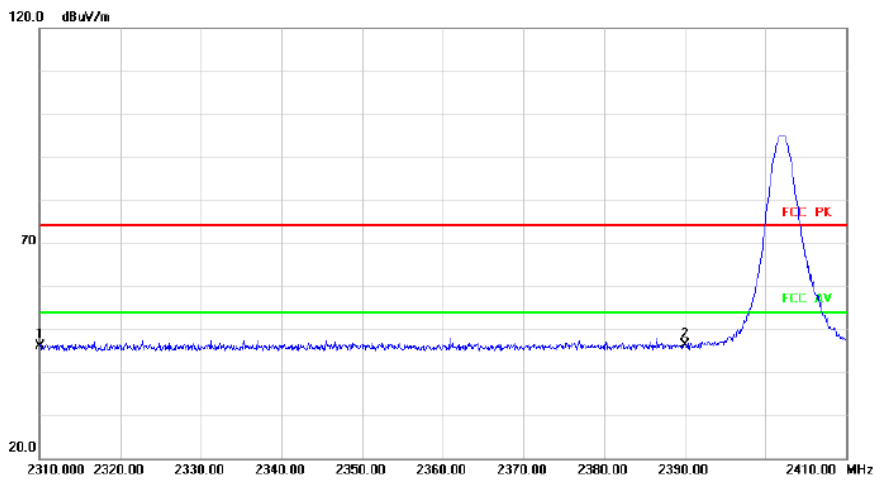


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	36.05	10.19	46.24	74.00	-27.76	peak		
2	*	2390.000	35.91	10.41	46.32	74.00	-27.68	peak		

Test Mode	TX Mode_2Mbps Channel 00	Polarization	Horizontal
-----------	--------------------------	--------------	------------

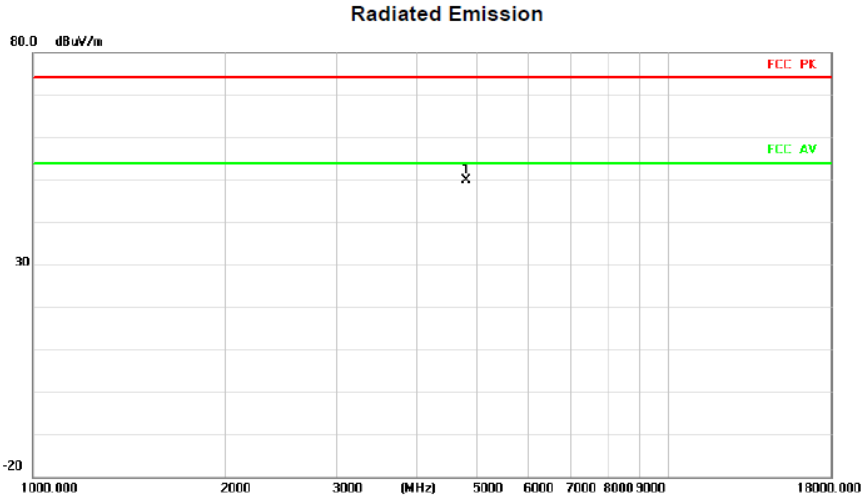


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	
1	*	4804.000	51.85	-1.99	49.86	74.00	-24.14	peak		

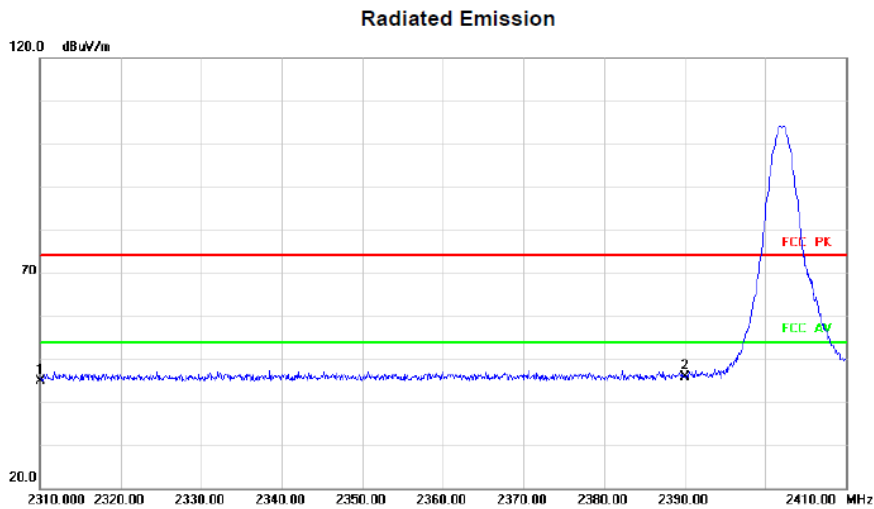


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	
1		2310.000	34.78	10.19	44.97	74.00	-29.03	peak		
2	*	2390.000	35.58	10.41	45.99	74.00	-28.01	peak		

Test Mode	TX Mode_2Mbps Channel 39	Polarization	Vertical
-----------	--------------------------	--------------	----------

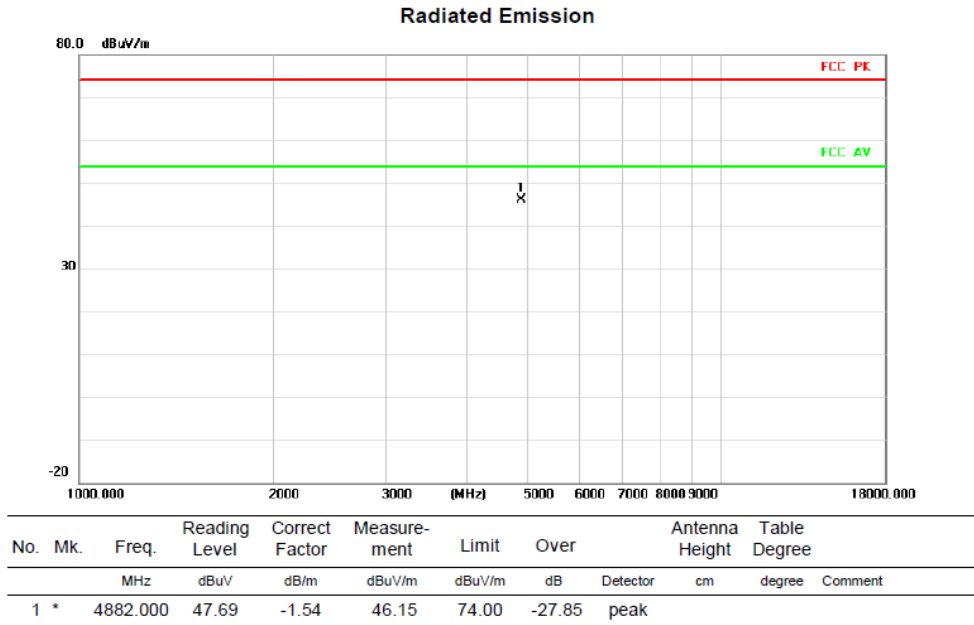


Test Mode	TX Mode_2Mbps Channel 39	Polarization	Horizontal
-----------	--------------------------	--------------	------------

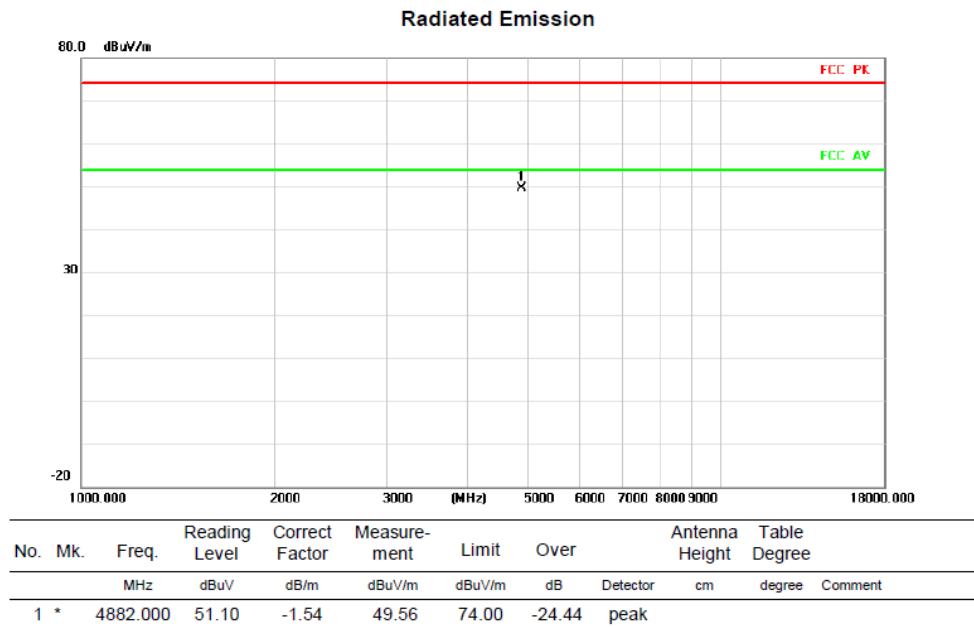


Test Mode	TX Mode_2Mbps Channel 78	Polarization	Vertical
-----------	--------------------------	--------------	----------

Radiated Emission

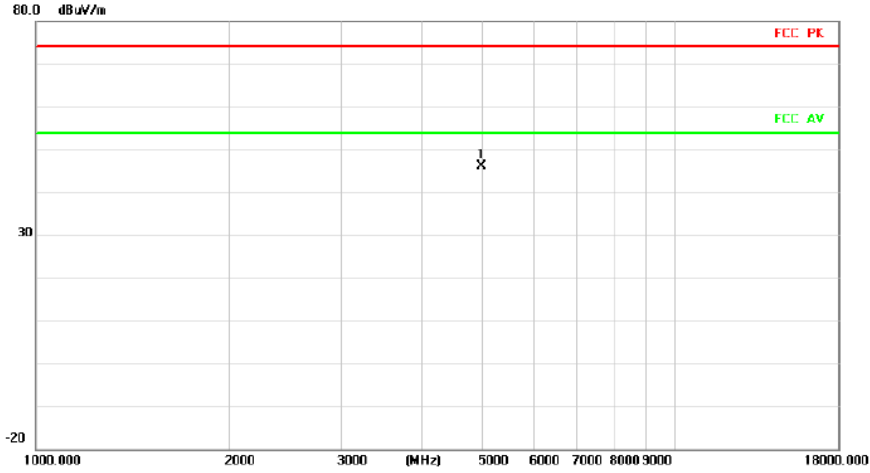

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	4960.000	47.09	-1.08	46.01	74.00	-27.99	peak	


Radiated Emission

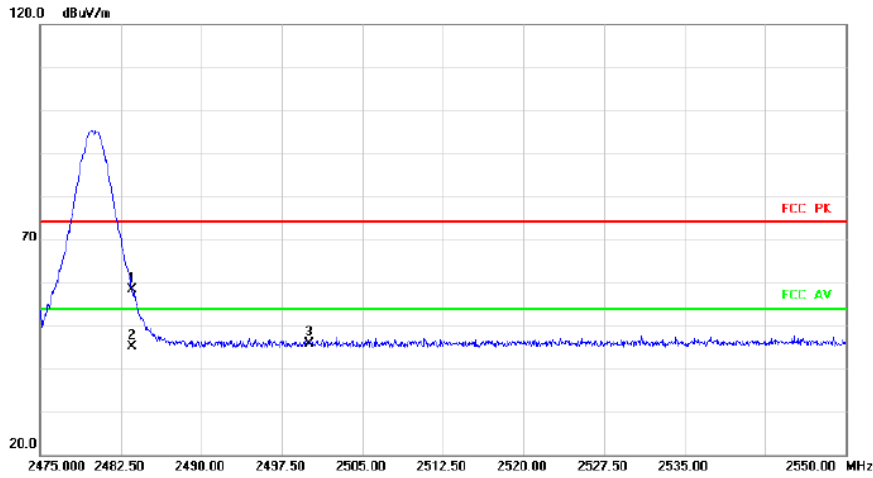

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		2483.500	47.30	11.09	58.39	74.00	-15.61	peak	
2	*	2483.500	34.07	11.09	45.16	54.00	-8.84	AVG	
3		2500.000	34.63	11.22	45.85	74.00	-28.15	peak	


Test Mode	TX Mode_2Mbps Channel 78	Polarization	Horizontal
-----------	--------------------------	--------------	------------

Radiated Emission

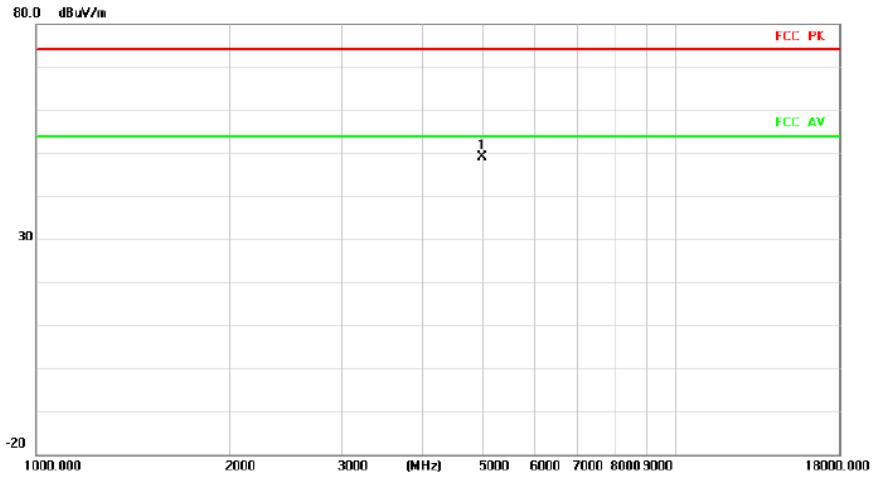


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	4960.000	50.32	-1.08	49.24	74.00	-24.76	peak	

Radiated Emission

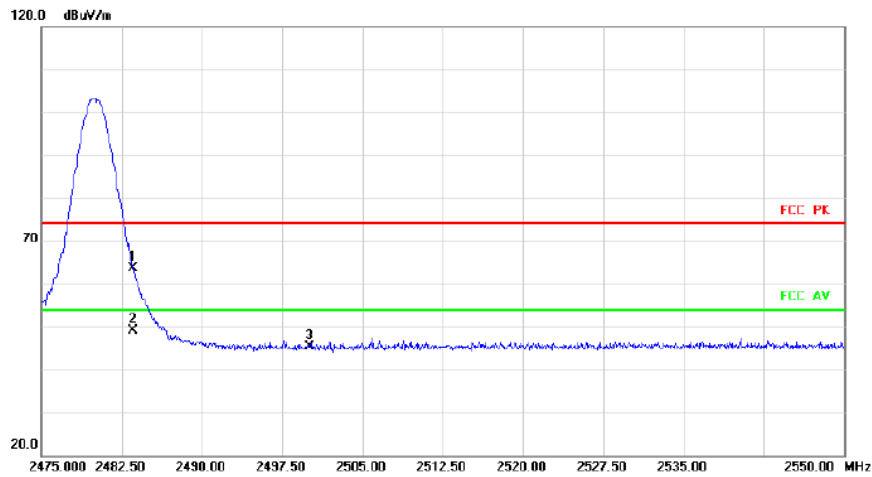


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		2483.500	52.47	11.09	63.56	74.00	-10.44	peak	
2	*	2483.500	38.14	11.09	49.23	54.00	-4.77	AVG	
3		2500.000	34.20	11.22	45.42	74.00	-28.58	peak	

Test Mode	TX Mode_3Mbps Channel 00	Polarization	Vertical
-----------	--------------------------	--------------	----------

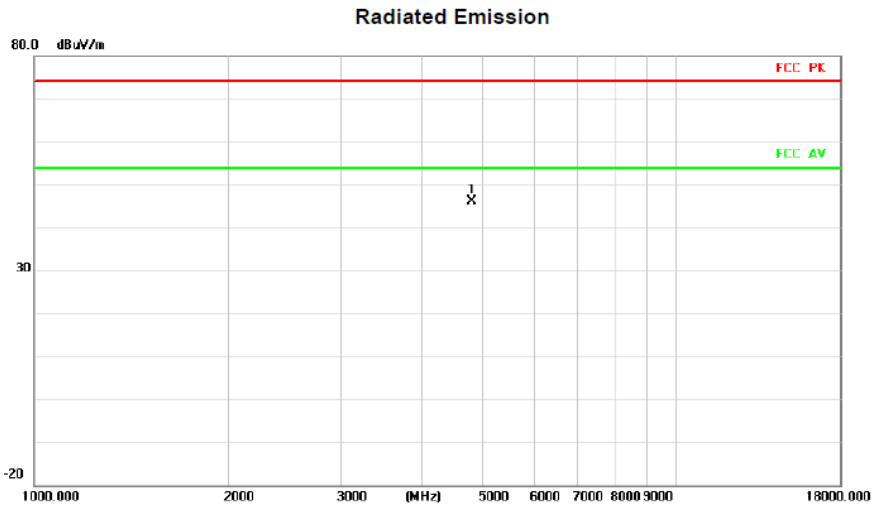


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	4804.000	48.22	-1.99	46.23	74.00	-27.77			peak

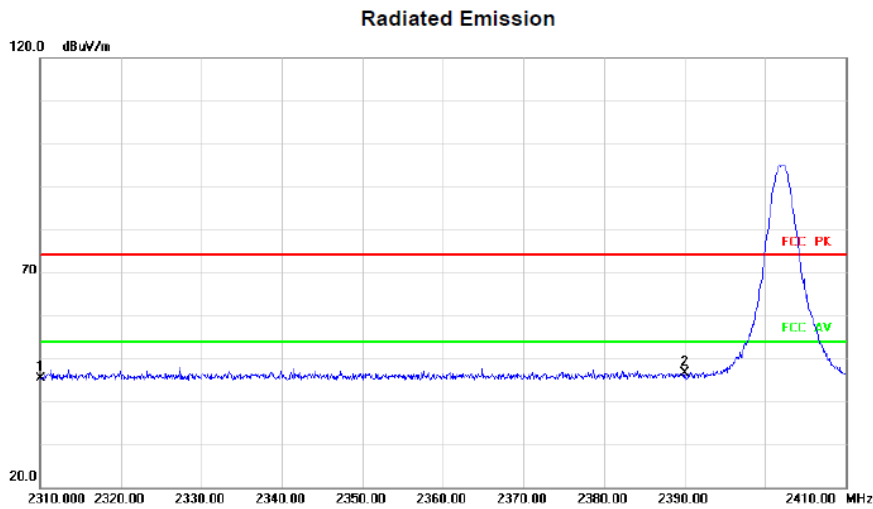

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	35.23	10.19	45.42	74.00	-28.58			peak
2	*	2390.000	36.20	10.41	46.61	74.00	-27.39			peak


Test Mode	TX Mode_3Mbps Channel 00	Polarization	Horizontal
-----------	--------------------------	--------------	------------

Radiated Emission

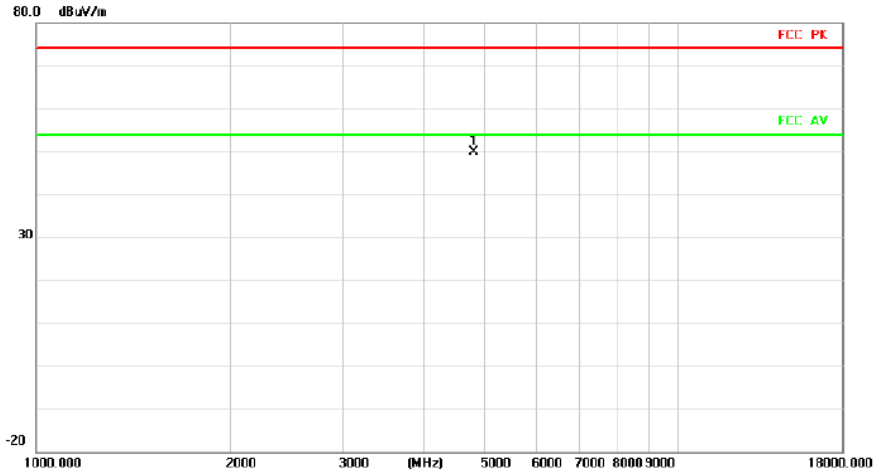


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	4804.000	51.91	-1.99	49.92	74.00	-24.08			peak

Radiated Emission

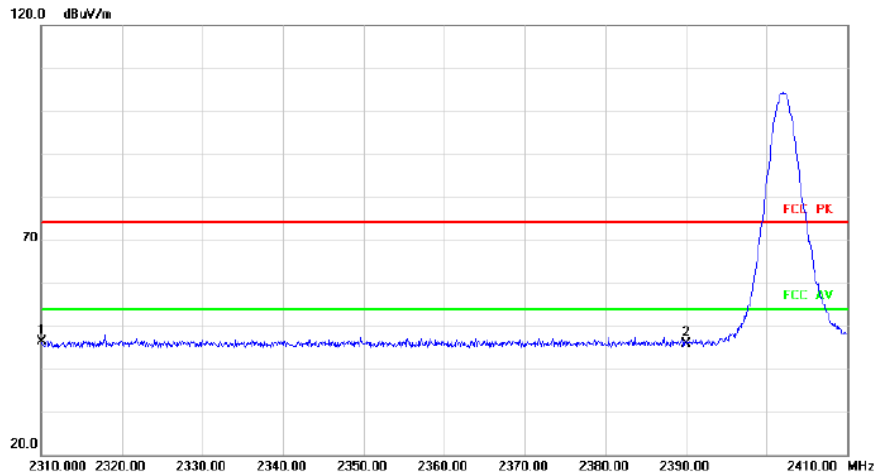


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2310.000	36.23	10.19	46.42	74.00	-27.58			peak
2		2390.000	35.50	10.41	45.91	74.00	-28.09			peak

Test Mode	TX Mode_3Mbps Channel 39	Polarization	Vertical
-----------	--------------------------	--------------	----------

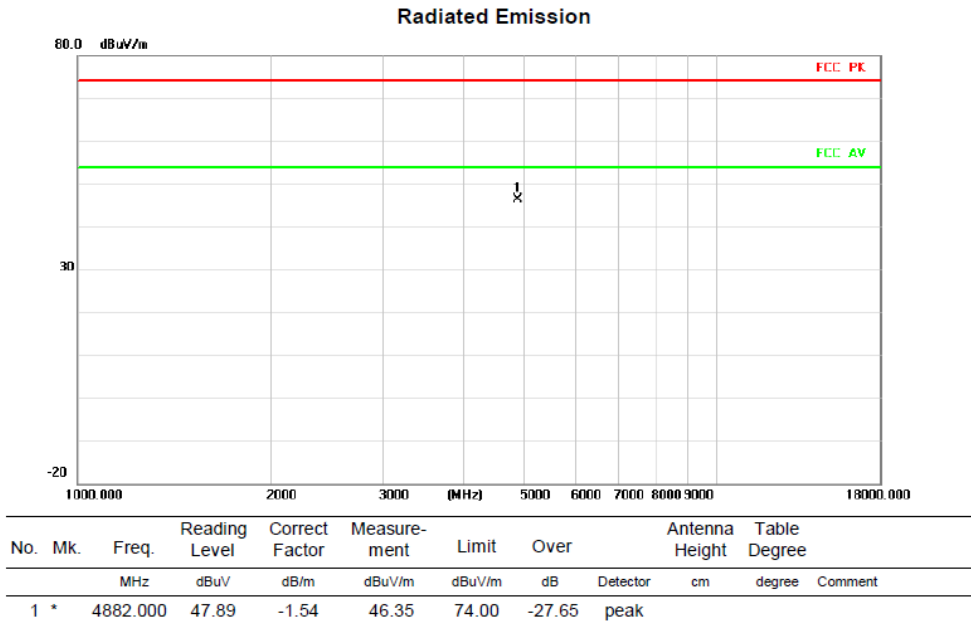


Test Mode	TX Mode_3Mbps Channel 39	Polarization	Horizontal
-----------	--------------------------	--------------	------------

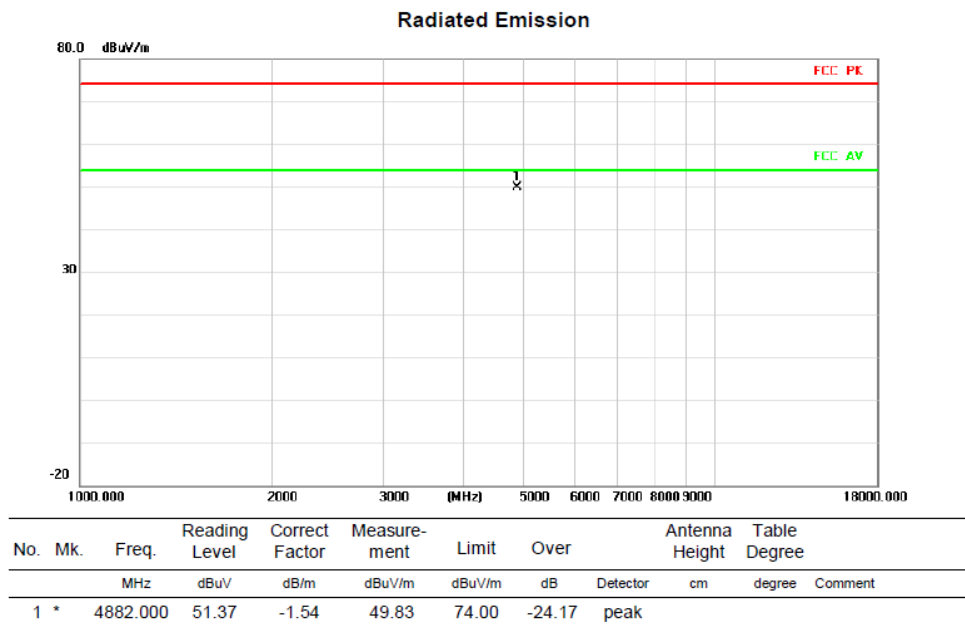


Test Mode	TX Mode_3Mbps Channel 78	Polarization	Vertical
-----------	--------------------------	--------------	----------

Radiated Emission

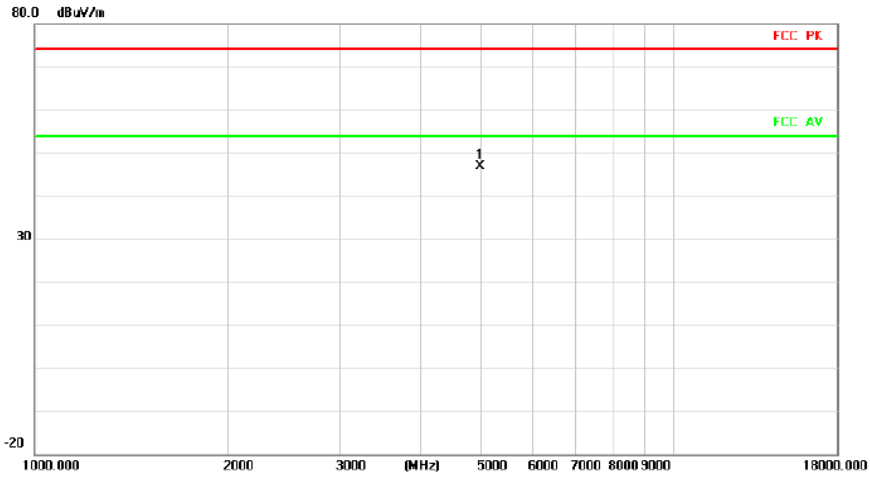

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	4960.000	48.06	-1.08	46.98	74.00	-27.02			peak


Radiated Emission

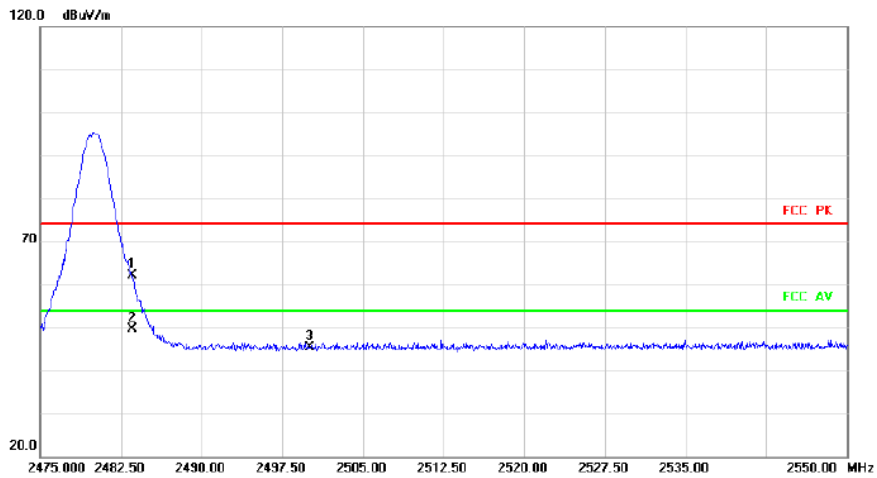

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	51.12	11.09	62.21	74.00	-11.79			peak
2	*	2483.500	38.46	11.09	49.55	54.00	-4.45			AVG
3		2500.000	34.21	11.22	45.43	74.00	-28.57			peak


Test Mode	TX Mode_3Mbps Channel 78	Polarization	Horizontal
-----------	--------------------------	--------------	------------

Radiated Emission

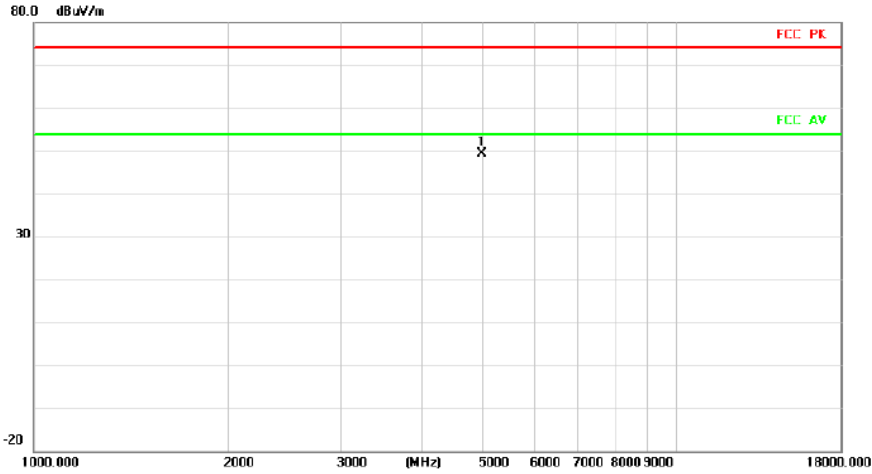

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1	*	4960.000	50.39	-1.08	49.31	74.00	-24.69	peak	

Radiated Emission

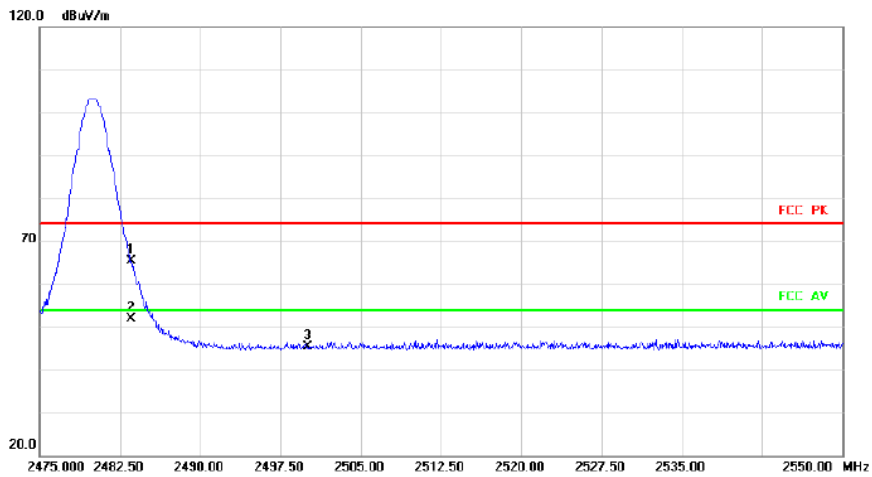

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree
1		2483.500	54.39	11.09	65.48	74.00	-8.52	peak	
2	*	2483.500	40.77	11.09	51.86	54.00	-2.14	AVG	
3		2500.000	34.07	11.22	45.29	74.00	-28.71	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - MAXIMUM OUTPUT POWER

Test Mode	Antenna	Channel	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	6.74	≤30	PASS
		2441	7.23	≤30	PASS
		2480	5.46	≤30	PASS
2DH5	Ant1	2402	6.34	≤30	PASS
		2441	6.83	≤30	PASS
		2480	5.06	≤30	PASS
3DH5	Ant1	2402	6.49	≤30	PASS
		2441	7.00	≤30	PASS
		2480	5.13	≤30	PASS

End of Test Report