



SAR TEST REPORT

Test Report No. : 13274888H-G-R1

Applicant : SOURCENEXT CORPORATION
Type of EUT : POCKETALK S
Model Number of EUT : PTS
FCC ID : 2AOJA-PTS
Test regulation : FCC47CFR 2.1093
Test Result : Complied (Refer to SECTION 4)
Reported SAR (1 g) Value : **The highest reported SAR (1 g)**
Standalone (Body): 0.95 W/kg
Simultaneous Transmission (Body): 1.49 W/kg

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report covers SAR technical requirements. It does not cover administrative issues such as Manual or non-SAR test related Requirements. (if applicable)
6. The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
7. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.
8. The information provided from the customer for this report is identified in SECTION 1.
9. This report is a revised version of 13274888H-G. 13274888H-G is replaced with this report.

Date of test: January 8 to March 26, 2020

Representative test engineer: 

Yutaka Yoshida
Engineer
Consumer Technology Division

Approved by : 

Takayuki Shimada
Leader
Consumer Technology Division



This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation. *As for the range of Accreditation in NVLAP, you may refer to the WEB address, http://japan.ul.com/resources/emc_accredited/

This report contains data that are not covered by the NVLAP accreditation.

There is no testing item of "Non-accreditation".

REVISION HISTORY

Original Test Report No.: 13274888H-G

Revision	Test report No.	Date	Page revised	Contents
- (Original)	13274888H-G	April 6, 2020	-	-
1	13274888H-G-R1	April 16, 2020	P1	Corrected SAR value
1	13274888H-G-R1	April 16, 2020	P8	Corrected the frequency
1	13274888H-G-R1	April 16, 2020	P11	Added the burst power information and correction of sum of SAR
1	13274888H-G-R1	April 16, 2020	P14	Added the note in clause 5.2
1	13274888H-G-R1	April 16, 2020	P15	Corrected the tune up limit
1	13274888H-G-R1	April 16, 2020	P43	Added the note for Transmitting duty
1	13274888H-G-R1	April 16, 2020	P64-65	Corrected tune up limit and measured power
1	13274888H-G-R1	April 16, 2020	P75-77	Corrected SAR sum

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	MCS	Modulation and Coding Scheme
AC	Alternating Current	MRA	Mutual Recognition Arrangement
AFH	Adaptive Frequency Hopping	N/A	Not Applicable
AM	Amplitude Modulation	NIST	National Institute of Standards and Technology
Amp, AMP	Amplifier	NS	No signal detect.
ANSI	American National Standards Institute	NSA	Normalized Site Attenuation
Ant, ANT	Antenna	NVLAP	National Voluntary Laboratory Accreditation Program
AP	Access Point	OBW	Occupied Band Width
ASK	Amplitude Shift Keying	OFDM	Orthogonal Frequency Division Multiplexing
Atten., ATT	Attenuator	P/M	Power meter
AV	Average	PCB	Printed Circuit Board
BPSK	Binary Phase-Shift Keying	PER	Packet Error Rate
BR	Bluetooth Basic Rate	PHY	Physical Layer
BT	Bluetooth	PK	Peak
BT LE	Bluetooth Low Energy	PN	Pseudo random Noise
BW	BandWidth	PRBS	Pseudo-Random Bit Sequence
Cal Int	Calibration Interval	PSD	Power Spectral Density
CCK	Complementary Code Keying	QAM	Quadrature Amplitude Modulation
Ch., CH	Channel	QP	Quasi-Peak
CISPR	Comite International Special des Perturbations Radioelectriques	QPSK	Quadri-Phase Shift Keying
CW	Continuous Wave	RBW	Resolution Band Width
DBPSK	Differential BPSK	RDS	Radio Data System
DC	Direct Current	RE	Radio Equipment
D-factor	Distance factor	RF	Radio Frequency
DFS	Dynamic Frequency Selection	RMS	Root Mean Square
DQPSK	Differential QPSK	RSS	Radio Standards Specifications
DSSS	Direct Sequence Spread Spectrum	Rx	Receiving
EDR	Enhanced Data Rate	SA, S/A	Spectrum Analyzer
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	SG	Signal Generator
EMC	ElectroMagnetic Compatibility	SVSWR	Site-Voltage Standing Wave Ratio
EMI	ElectroMagnetic Interference	TR	Test Receiver
EN	European Norm	Tx	Transmitting
ERP, e.r.p.	Effective Radiated Power	VBW	Video BandWidth
EU	European Union	Vert.	Vertical
EUT	Equipment Under Test	WLAN	Wireless LAN
Fac.	Factor		
FCC	Federal Communications Commission		
FHSS	Frequency Hopping Spread Spectrum		
FM	Frequency Modulation		
Freq.	Frequency		
FSK	Frequency Shift Keying		
GFSK	Gaussian Frequency-Shift Keying		
GNSS	Global Navigation Satellite System		
GPS	Global Positioning System		
Hori.	Horizontal		
ICES	Interference-Causing Equipment Standard		
IEC	International Electrotechnical Commission		
IEEE	Institute of Electrical and Electronics Engineers		
IF	Intermediate Frequency		
ILAC	International Laboratory Accreditation Conference		
ISED	Innovation, Science and Economic Development Canada		
ISO	International Organization for Standardization		
JAB	Japan Accreditation Board		
LAN	Local Area Network		
LIMS	Laboratory Information Management System		

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

CONTENTS	PAGE
SECTION1: Customer information.....	5
SECTION2: Equipment under test (EUT).....	5
2.1 Identification of EUT.....	5
2.2 Product description.....	6
2.3 General LTE SAR Test and Reporting Considerations.....	8
2.4 Test Specification.....	9
2.5 Procedure.....	9
2.6 Additions or deviations to standard.....	9
2.7 Exposure limit.....	10
2.8 SAR.....	10
2.9 Test Location.....	10
SECTION3: Test result.....	11
3.1 Result.....	11
3.2 Stand-alone SAR result.....	11
3.3 Simultaneous transmission SAR result.....	11
SECTION4: Tune-up tolerance information and software information.....	12
SECTION5: RF Exposure Conditions (Test Configurations).....	14
5.1 Summary of the distance between antenna and surface of EUT.....	14
5.2 Applicability of SAR test as UMPC Mini-Tablet and next ot mouth.....	14
5.3 SAR test exclusion considerations according to KDB UMPC.....	15
5.4 Procedure for SAR test position determination.....	16
5.5 Test position for Body setup.....	16
SECTION6: Description of the operating mode.....	17
6.1 Output Power for GSM.....	17
6.2 Output Power for WCDMA.....	19
6.3 Output Power for LTE.....	23
6.4 Output Power and SAR test required for WLAN and Bluetooth.....	43
SECTION7: Test surrounding.....	46
7.1 Measurement uncertainty.....	46
SECTION8: Parameter Check.....	47
8.1 For SAR system check.....	47
8.2 For SAR measurement.....	48
SECTION9: System Check confirmation.....	49
SECTION10: Measured and Reported (Scaled) SAR Results.....	51
10.1 WCDMA Band 2.....	53
10.2 WCDMA Band 5.....	53
10.3 LTE Band 2.....	54
10.4 LTE Band 5.....	56
10.5 LTE Band 7.....	58
10.6 LTE Band 26.....	60
10.7 Bluetooth.....	61
10.8 BTLE.....	61
10.9 WLAN 2.4GHz Band.....	62
10.10 WLAN 5.3GHz Band.....	63
10.11 WLAN 5.6GHz Band.....	64
10.12 GSM850.....	64
10.13 PCS1900.....	65
10.14 Repeated measurement.....	66
SECTION11: Simultaneous Transmission SAR Analysis.....	67
SECTION12: Test instruments.....	78
APPENDIX 1 : System Check.....	79
APPENDIX 2 : SAR Measurement data.....	98
APPENDIX 3 : System specifications.....	115
APPENDIX 4 : Photographs of test setup.....	204

SECTION1: Customer information

Company Name : SOURCENEXT CORPORATION
Address : Shiodome City Center 33F, 1-5-2 Higashi Shimbashi Minato-ku, Tokyo
105-7133, Japan
Telephone Number : +81-50-5533-9606
Facsimile Number : +81-3-6430-6405
Contact Person : Yukio Aotani

The information provided from the customer is as follows;

- Applicant, Type of Equipment, Model No. FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer information
- SECTION 2: Equipment under test (EUT) other than the Receipt Date
- SECTION 5: Tune-up tolerance information and software information

* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2.

SECTION2: Equipment under test (EUT)

2.1 Identification of EUT

<Information of the EUT>

Type of Equipment : POCKETALK S
Model No. : PTS
Serial No. : 868792030071628
Rating : DC 3.8 V (Lithium-ion battery)
AC 100 V to AC 240 V (AC Adapter)
Option battery : None
Body-worn accessory : None
Receipt Date of Sample : November 14, 2019
Country of Mass-production : China
Condition of EUT : Production prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No Modification by the test lab

2.2 Product description

Model: PTS(referred to as the EUT in this report) is a POKETALK S
There are 2 versions. One has eSIM and SIM slot. Another has only SIM slot. Also there are some color variations.

General Specification

Operating Temperature : 0 deg. C to +40 deg. C

Radio Specification (1/2)

WLAN (IEEE802.11b/g/a/n-20/n-40)

Type of radio	IEEE802.11b	IEEE802.11g/n-20	IEEE802.11n-40	IEEE802.11a/n-20	IEEE802.11n-40
Frequency of operation	2412 MHz - 2462 MHz	2412 MHz - 2462 MHz	2422 MHz - 2452 MHz	5180 MHz - 5240 MHz 5260 MHz - 5320 MHz 5500 MHz - 5700 MHz	5190 MHz - 5230 MHz 5270 MHz - 5310 MHz 5510 MHz - 5670 MHz
Type of modulation	DSSS (CCK, DQPSK, DBPSK)	OFDM-CCK (64QAM, 16QAM, QPSK, BPSK)		OFDM (64QAM, 16QAM, QPSK, BPSK)	
Channel spacing	5 MHz			20 MHz	40 MHz
Antenna type	Planar Inverted-F Antenna				
Antenna Gain	2.4 GHz: 1.25 dBi 5 GHz: 0.36 dBi				
Clock frequency	26 MHz				

Bluetooth (BR/EDR, BTLE(Low Energy))

	BR/EDR	BTLE(Low Energy)
Frequency of operation	2402 MHz - 2480 MHz	
Type of modulation	FHSS (GFSK, π /4DQPSK, 8DPSK)	GFSK
Channel spacing	1 MHz	2 MHz
Antenna type	Planar Inverted-F Antenna	
Antenna Gain	1.25 dBi	
Clock frequency	26 MHz	

GNSS

Radio Type	Receiver
Frequency of Operation	See table below.
Antenna type	Planar Inverted-F Antenna
Antenna Gain	-0.45 dBi
Clock frequency	26 MHz

Supported GNSS and GNSS signals

GNSS	RNSS Frequency Band / Frequency [MHz]		
	1559 to 1610		1164 to 1215
BDS	<input type="checkbox"/> B11 1561.098	-	-
Galileo	<input type="checkbox"/> E1 1575.42	<input type="checkbox"/> E6 1278.75	<input type="checkbox"/> E5a 1176.45 <input type="checkbox"/> E5b 1207.14
GLONASS	<input checked="" type="checkbox"/> G1 1598.0625 - 1605.375	<input type="checkbox"/> G2 1242.9375 - 1248.625	-
GPS	<input checked="" type="checkbox"/> L1 1575.42	<input type="checkbox"/> L2 1227.6	<input type="checkbox"/> L5 1176.45
SBAS	<input type="checkbox"/> L1 1575.42	-	<input type="checkbox"/> L5 1176.45

- Supported GNSS signal
 Not supported GNSS signal

Radio Specification (2/2)

GSM

Equipment Type	Transceiver	
Frequency of Operation	[Up Link] PCS1900: 1850 MHz to 1910 MHz GSM850: 824 MHz to 849 MHz	[Down Link] PCS1900: 1930 MHz to 1990 MHz GSM850: 869 MHz to 894 MHz
Type of Modulation	GMSK, 8-PSK	
Multi-Slot Class	GPRS:12(4 Down/4 Up/5 Sum) EGPRS:12(4 Down/4 Up/5 Sum)	
Voice & Data communication	Data only	
Antenna Type	Planar Inverted-F Antenna	
Antenna Gain	PCS1900: 1850 MHz to 1910 MHz: -4.61 dBi GSM850 824 MHz to 849 MHz: -4.81 dBi	

WCDMA

Equipment Type	Transceiver	
Frequency of Operation	[Up Link] Band 2: 1850 MHz to 1910 MHz Band 5: 824 MHz to 849 MHz	[Down Link] Band 2: 1930 MHz to 1990 MHz Band 5: 869 MHz to 894 MHz
Type of Modulation	QPSK	
Voice & Data communication	Data only	
Antenna Type	Planar Inverted-F Antenna	
Antenna Gain	Band 2: 1850 MHz to 1910 MHz: -4.61 dBi Band 5 824 MHz to 849 MHz: -4.81 dBi	

LTE

Equipment Type	Transceiver	
Frequency of Operation	[Up Link] Band 2: 1850 MHz to 1910 MHz Band 5: 824 MHz to 849 MHz Band 7: 2500 MHz to 2570 MHz Band 26: 814 MHz to 849 MHz	[Down Link] Band 2: 1930 MHz to 1990 MHz Band 5: 869 MHz to 894 MHz Band 7: 2620 MHz to 2690 MHz Band 26: 859 MHz to 894 MHz
Type of Modulation	QPSK, 16QAM, 64QAM	
Voice & Data communication	Data only	
Antenna Gain	Band 2: 1850 MHz to 1910 MHz: -4.61 dBi Band 5: 824 MHz to 849 MHz: -4.81 dBi Band 7: 2500 MHz to 2570 MHz: -2.15 dBi Band 26: 814 MHz to 849 MHz: -4.81 dBi	

* WLAN and Bluetooth do not transmit simultaneously.

2.3 General LTE SAR Test and Reporting Considerations

Frequency range and channel bandwidth

Band	Frequency Range [MHz]		Supported Bandwidth [MHz]					
			20	15	10	5	3	1.4
2	1850 - 1910	Low	Ch:18700 Freq:1860	Ch:18675 Freq:1857.5	Ch:18650 Freq:1855	Ch:18625 Freq:1852.5	Ch:18615 Freq:1851.5	Ch:18067 Freq:1850.7
		Mid	Ch:18900 Freq:1880	Ch:18900 Freq:1880	Ch:18900 Freq:1880	Ch:18900 Freq:1880	Ch:18900 Freq:1880	Ch:18900 Freq:1880
		High	Ch:19100 Freq:1900	Ch:19125 Freq:1902.5	Ch:19150 Freq:1905	Ch:19175 Freq:1907.5	Ch:19185 Freq:1908.5	Ch:19193 Freq:1909.3
5 *1	824 - 849	Low	-	-	Ch:20450 Freq:829	Ch:20425 Freq:826.5	Ch:20415 Freq:825.5	Ch:20407 Freq:824.7
		Mid	-	-	Ch:20525 Freq:836.5	Ch:20525 Freq:836.5	Ch:20525 Freq:836.5	Ch:20525 Freq:836.5
		High	-	-	Ch:20600 Freq:844	Ch:20625 Freq:846.5	Ch:20635 Freq:847.5	Ch:20643 Freq:848.3
7	2500 - 2570	Low	Ch:20850 Freq:2510	Ch:20825 Freq:2507.5	Ch:20800 Freq:2505	Ch:20775 Freq:2502.5	-	-
		Mid	Ch:21100 Freq:2535	Ch:21100 Freq:2535	Ch:21100 Freq:2535	Ch:21100 Freq:2535	-	-
		High	Ch:21350 Freq:2560	Ch:21375 Freq:2562.5	Ch:21400 Freq:2565	Ch:21425 Freq:2567.5	-	-
26 *1	814 - 849	Low	-	-	Ch:26740 Freq:819	Ch:26715 Freq:816.5	Ch:26705 Freq:815.5	Ch:26697 Freq:814.7
		Mid	-	-	Ch:26865 Freq:831.5	Ch:26865 Freq:831.5	Ch:26865 Freq:831.5	Ch:26865 Freq:831.5
		High	-	-	Ch:26990 Freq:844	Ch:27015 Freq:846.5	Ch:27025 Freq:847.5	Ch:27033 Freq:848.3

*1 Frequency band 814-849MHz was tested as below since the tune-up upper limit and power settings are same value.

814-824MHz: LTE Band 26

824-849MHz: LTE Band 5

LTE transmitter and antenna implementation

The LTE transmitter operates independently of the other wireless transmitters in the device, and it does not support voice 1
LTE Antenna configuration is Main transmit antenna and Aux receive diversity.

Maximum power reduction (MPR)

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3

MPR Built-in by design

The manufacturer MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values.

A-MPR (additional MPR) was disabled during SAR testing

Spectrum plots for RB configurations

A properly configured basestation simulator was used for the SAR or power measurements;
therefore spectrum plots for each RB allocation and offset configuration are not included in the SAR report.

Test standard information

2.4 Test Specification

Title : **FCC47CFR 2.1093**

Radiofrequency radiation exposure evaluation: portable devices.

: **IEEE Std 1528-2013:**

IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

: **Published RF exposure KDB procedures**

- KDB447498D01(v06)** RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices
- KDB447498D02(v02r01)** SAR Measurement Procedures for USB Dongle Transmitters
- KDB648474D04(v01r03)** SAR Evaluation Considerations for Wireless Handsets
- KDB941225D01(v03r01)** 3G SAR Measurement Procedures
- KDB941225D05(v02r05)** SAR Evaluation Considerations for LTE Devices
- KDB941225D06(v02r01)** SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities (Hot Spot SAR)
- KDB941225D07(v01r02)** SAR Evaluation Procedures for UMPC Mini-Tablet Devices
- KDB616217D04(v01r02)** SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers
- KDB865664D01(v01r04)** SAR Measurement Requirements for 100MHz to 6 GHz
- KDB248227D01(v02r02)** SAR Guidance for 802.11(Wi-Fi) Transmitters

Reference

[1]SPEAG uncertainty document (AN 15-7/AN19-17) for DASY 5 System from SPEAG (Schmid & Partner Engineering AG).

2.5 Procedure

Transmitter	WLAN and Bluetooth
Test Procedure	Published RF exposure KDB procedures
Category	FCC47CFR 2.1093
Note: UL Japan, Inc. 's SAR Work Procedures 13-EM-W0429 and 13-EM-W0430	

2.6 Additions or deviations to standard

Other than above, no addition, exclusion nor deviation has been made from the standard.

2.7 Exposure limit

(A) Limits for Occupational/Controlled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.4	8.0	20.0

(B) Limits for General population/Uncontrolled Exposure (W/kg)

Spatial Average (averaged over the whole body)	Spatial Peak (averaged over any 1g of tissue)	Spatial Peak (hands/wrists/feet/ankles averaged over 10g)
0.08	1.6	4.0

Occupational/Controlled Environments: are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments: are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

**NOTE:GENERAL POPULATION/UNCONTROLLED EXPOSURE
SPATIAL PEAK(averaged over any 1g of tissue) LIMIT
1.6 W/kg**

2.8 SAR

Specific Absorption Rate (SAR): The time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ), as shown in the following equation:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg) or equivalently milliwatts per gram (mW/g).

SAR is related to the E-field at a point by the following equation:

$$SAR = \frac{\sigma |E|^2}{\rho}$$

where

σ = conductivity of the tissue (S/m)

ρ = mass density of the tissue (kg/m³)

E = rms E-field strength (V/m)

2.9 Test Location

UL Japan, Inc. Ise EMC Lab.

Shielded room for SAR testings

NVLAP Lab. code: 200572-0 / FCC Test Firm Registration Number: 199967 / ISED SAR Lab Company Number: 2973C

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

SECTION3: Test result

3.1 Result

Complied
Highest values at each band are listed next section.

3.2 Stand-alone SAR result

Reported SAR

Measured SAR is scaled to the maximum tune-up tolerance limit by the following formulas.
Reported SAR= Measured SAR [W/kg] * Scaled factor
Maximum tune-up tolerance limit is by the specification from a customer.

* Scaled factor = Maximum tune-up tolerance limit [mW] / Measured power [mW]

Body SAR

Mode	Freq. (MHz)	Power (dBm)		Scaled factor	1-g SAR (W/kg)	
		Tune-up upper Power	Measured average Power		Meas.	Reported
GSM850	824.2	24.00	23.65	1.08	0.693	0.751
PCS1900 *Tima ave	1909.8	24.00	23.26	1.19	0.801	0.950
WCDMA Band 2	1880.0	15.00	14.37	1.16	0.368	0.425
WCDMA Band 5	826.4	21.50	20.94	1.14	0.876	0.997
LTE Band 2	1900.0	19.00	18.30	1.17	0.804	0.945
LTE Band 5	844.0	20.00	19.04	1.25	0.587	0.732
LTE Band 7	2560.0	21.50	20.91	1.15	0.759	0.869
LTE Band 26	819.0	20.00	19.22	1.20	0.597	0.714
Bluetooth	2441.0	5.50	5.21	1.07	0.012	0.013
BTLE	2440.0	5.50	5.32	1.04	0.038	0.040
WLAN11b	2462.0	6.00	5.90	1.02	0.085	0.087
WLAN 5.3G 11n-40	5310.0	8.30	8.17	1.03	0.471	0.485
WLAN 5.6G 11n-40	5510.0	9.60	8.57	1.27	0.425	0.539

Note(s):

The sample used by the SAR test is not more than 2 dB lower than the maximum tune-up tolerance limit. That is, measured power is included the tune-up tolerance range.

*Details are shown at section 11.

3.3 Simultaneous transmission SAR result

Body SAR: 1.489 W/kg

Refer to Section 12 “Simultaneous Transmission SAR Analysis”.

Wireless LAN 2.4G, Wireless LAN 5G, Bluetooth and BTLE(Bluetooth Low Energy) do not transmit simultaneously.

SECTION4: Tune-up tolerance information and software information

Maximum tune-up tolerance limit


Mode	Maximum frequency in each band	Maximum tune-up tolerance limit *1 [dBm]	Maximum tune-up tolerance limit *1 [mW]
GSM850 GMSK 1 time slot	848.6	27.50	562.34
GSM850 GMSK 2 time slots	848.6	26.50	446.68
GSM850 GMSK 3 time slots	848.6	25.00	316.23
GSM850 GMSK 4 time slots	848.6	24.00	251.19
GSM850 8PSK 1 time slot	848.6	27.50	562.34
GSM850 8PSK 2 time slots	848.6	26.50	446.68
GSM850 8PSK 3 time slots	848.6	25.00	316.23
GSM850 8PSK4 time slots	848.6	24.00	251.19
PCS1900 GMSK 1 time slot	1909.8	27.00	501.19
PCS1900 GMSK 2 time slots	1909.8	26.50	446.68
PCS1900 GMSK 3 time slots	1909.8	25.00	316.23
PCS1900 GMSK 4 time slots	1909.8	24.00	251.19
PCS1900 8PSK 1 time slot	1909.8	27.00	501.19
PCS1900 8PSK 2 time slots	1909.8	26.50	446.68
PCS1900 8PSK 3 time slots	1909.8	25.00	316.23
PCS1900 8PSK4 time slots	1909.8	24.00	251.19
WCDMA Band 2 R99	1907.6	15.00	31.62
WCDMA Band 2 HSDPA	1907.6	14.00	25.12
WCDMA Band 2 HSUPA	1907.6	13.00	19.95
WCDMA Band 5 R99	846.6	21.50	141.25
WCDMA Band 5 HSDPA	846.6	20.50	112.20
WCDMA Band 5 HSUPA	846.6	19.50	89.13
LTE Band 2	1900	19.00	79.43
LTE Band 5 *2	844	20.00	100.00
LTE Band 7	2560	21.50	141.25
LTE Band 26 *2	823.3	20.00	100.00
WLAN 11b	2462	6.00	3.98
WLAN 11g	2462	7.50	5.62
WLAN 11n-20	2462	7.50	5.62
WLAN 11n-40	2480	7.50	5.62
Bluetooth DH5 BDR	2480	5.50	3.55
Bluetooth 2DH5 EDR	2480	2.50	1.78
Bluetooth 3DH5 EDR	2480	2.50	1.78
BTLE	2480	5.50	3.55
WLAN 11a	5240	8.10	6.46
WLAN 11a	5320	8.30	6.76
WLAN 11a	5700	9.60	9.12
WLAN 11n-20	5240	8.10	6.46
WLAN 11n-20	5320	8.30	6.76
WLAN 11n-20	5700	9.60	9.12
WLAN 11n-40	5230	8.10	6.46
WLAN 11n-40	5310	8.30	6.76
WLAN 11n-40	5670	9.60	9.12

*1 Maximum tune-up tolerance limit in above the table are defined by a customer as Burst Power(duty100%).

*2 LTE Band 5 (824-849MHz) is a sub band of LTE Band 26 (814-849MHz). For SAR test, LTE Band 5 was performed to cover LTE band 26 (824-849MHz) as they have the same target power level and bandwidth configurations.

Software setting
*Power of the EUT was set by the software as follows; WLAN Power settings: 10 Bluetooth Power setting: 0 BTLE Power setting: Same as production model WWAN Power setting: Same as production model Software: 1.1.4
*This setting of software is the worst case. The test was performed with condition that obtained the maximum average power (Burst) in pre-check. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.

Duty Confirmation for Bluetooth/BTLE

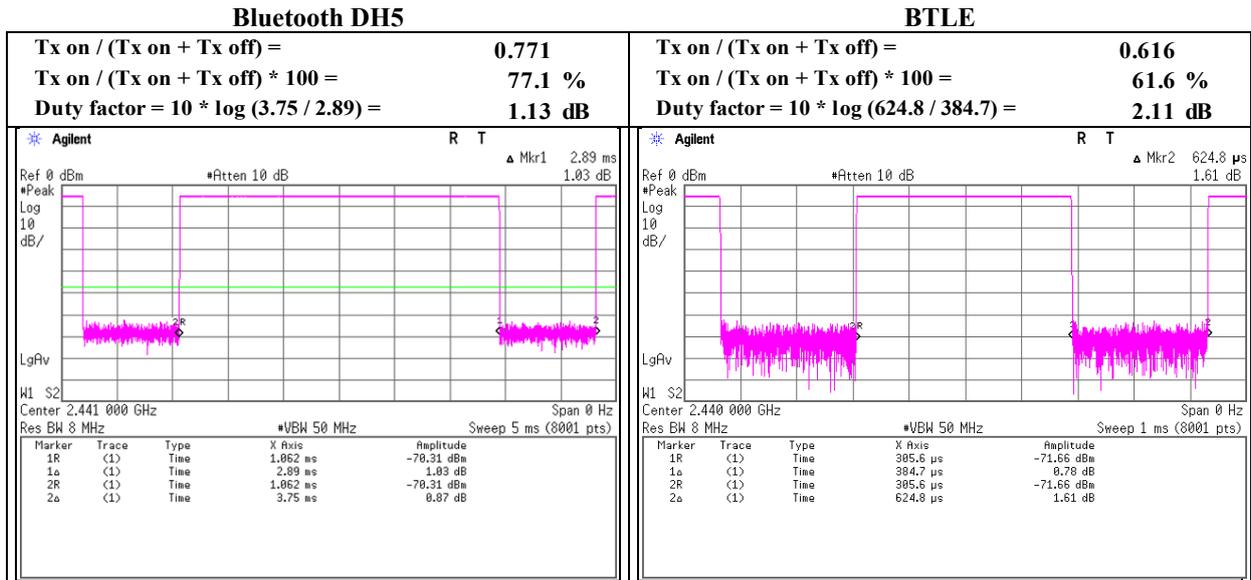

SECTION5: RF Exposure Conditions (Test Configurations)


5.1 Summary of the distance between antenna and surface of EUT

Test position	WWAN Antenna	WLAN/Bluetooth/BTLE Antenna
	Distance	
Front	3.7 mm	4.6 mm
Rear	1.2 mm	1.2 mm
Left	2.10 mm	46.89 mm
Right	2.10 mm	2.10 mm
Top	58.70 mm	13.40 mm
Bottom	2.14 mm	36.30 mm

*Details are shown in appendix 4

5.2 Applicability of SAR test as UMPC Mini-Tablet and next ot mouth

The UMPC SAR test is applicable because the EUT is with a display and overall diagonal dimension ≤ 20 cm (~7.9") as shown in the figure below.

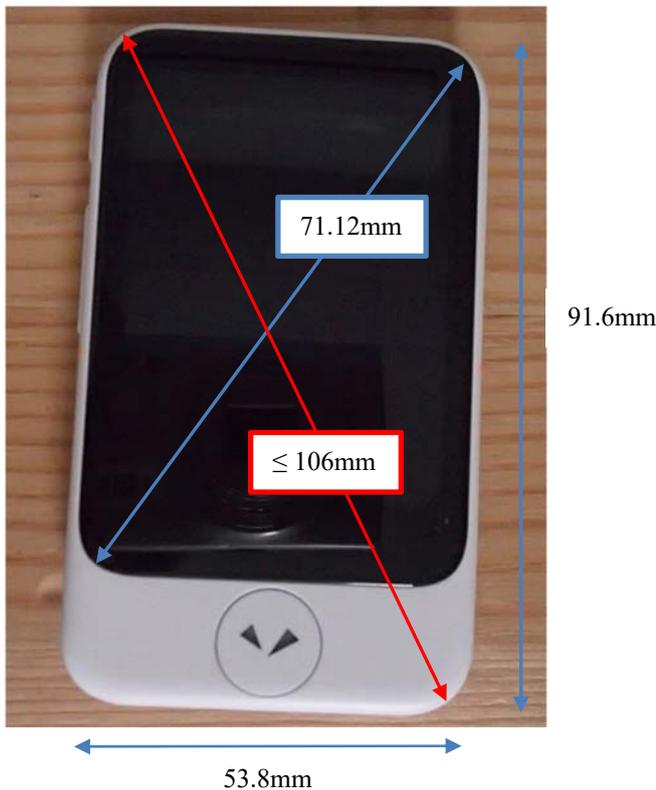

Test was done at 5mm separation distance to cover use as UMPC and also address next to mouth use which requires a separation distance of 10mm.

5.3 SAR test exclusion considerations according to KDB UMPC

Based on KDB941225D07, UMPC mini-tablet devices must be tested for 1-g SAR on all surfaces and side edges with a transmitting antenna location at ≤ 25 mm from that surface or edges, at 5 mm separation from a flat phantom, for the data modes, wireless technologies and frequency bands by the devices to determine SAR compliance.

KDB 941225 UMPC

Antenna	Tx Interface	Frequency (MHz)	Output Power		SAR test required					
			dBm	mW	Front	Rear	Left	Right	Top	Bottom
Main	GSM850 GSMK 4 time slots	848.6	24.00	251.19	MEASURE	MEASURE	MEASURE	MEASURE	EXEMPT	MEASURE
Main	PCSI900 GSMK	1909.8	24.00	251.19	MEASURE	MEASURE	MEASURE	MEASURE	EXEMPT	MEASURE

Antenna	Tx Interface	Frequency (MHz)	Output Power		SAR test required					
			dBm	mW	Front	Rear	Left	Right	Top	Bottom
Main	WCDMA Band 2 (R99)	1910	15.00	31.62	MEASURE	MEASURE	MEASURE	MEASURE	EXEMPT	MEASURE
Main	WCDMA Band 5 (R99)	849	21.50	141.25	MEASURE	MEASURE	MEASURE	MEASURE	EXEMPT	MEASURE
Main	LTE Band 2	1910	19.00	79.43	MEASURE	MEASURE	MEASURE	MEASURE	EXEMPT	MEASURE
Main	LTE Band 5	849	20.00	100.00	MEASURE	MEASURE	MEASURE	MEASURE	EXEMPT	MEASURE
Main	LTE Band 7	2570	21.50	141.25	MEASURE	MEASURE	MEASURE	MEASURE	EXEMPT	MEASURE
Main	LTE Band 26	824	20.00	100.00	MEASURE	MEASURE	MEASURE	MEASURE	EXEMPT	MEASURE

Antenna	Tx Interface	Frequency (MHz)	Output Power		SAR test required					
			dBm	mW	Front	Rear	Left	Right	Top	Bottom
Main	11b	2462	6.00	3.98	MEASURE	MEASURE	EXEMPT	MEASURE	MEASURE	EXEMPT
Main	11g	2462	7.50	5.62	MEASURE	MEASURE	EXEMPT	MEASURE	MEASURE	EXEMPT
Main	11n-20	2462	7.50	5.62	MEASURE	MEASURE	EXEMPT	MEASURE	MEASURE	EXEMPT
Main	11n-40	2462	7.50	5.62	MEASURE	MEASURE	EXEMPT	MEASURE	MEASURE	EXEMPT
Main	BT DH5	2480	5.50	3.55	MEASURE	MEASURE	EXEMPT	MEASURE	MEASURE	EXEMPT
Main	BT 2DH5	2480	2.50	1.78	MEASURE	MEASURE	EXEMPT	MEASURE	MEASURE	EXEMPT
Main	BT 3DH5	2480	2.50	1.78	MEASURE	MEASURE	EXEMPT	MEASURE	MEASURE	EXEMPT
Main	BTLE	2480	5.50	3.55	MEASURE	MEASURE	EXEMPT	MEASURE	MEASURE	EXEMPT

Antenna	Tx Interface	Frequency (MHz)	Output Power		SAR test required					
			dBm	mW	Front	Rear	Left	Right	Top	Bottom
Main	11a	5320	8.30	6.76	MEASURE	MEASURE	EXEMPT	MEASURE	MEASURE	EXEMPT
Main	11a	5700	9.60	9.12	MEASURE	MEASURE	EXEMPT	MEASURE	MEASURE	EXEMPT
Main	11n-20	5320	8.30	6.76	MEASURE	MEASURE	EXEMPT	MEASURE	MEASURE	EXEMPT
Main	11n-20	5700	9.60	9.12	MEASURE	MEASURE	EXEMPT	MEASURE	MEASURE	EXEMPT
Main	11n-40	5310	8.30	6.76	MEASURE	MEASURE	EXEMPT	MEASURE	MEASURE	EXEMPT
Main	11n-40	5670	9.60	9.12	MEASURE	MEASURE	EXEMPT	MEASURE	MEASURE	EXEMPT

Description of the Body setup

5.4 Procedure for SAR test position determination

-The tested procedure was performed according to the KDB 941225 D07 (SAR Evaluation Procedures for UMPC Mini-Tablet Devices).

5.5 Test position for Body setup

No.	Position	Test distance	WWAN	WLAN/Bluetooth/BTLE
			Tested	Tested
1	Front	5mm	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
2	Rear	5mm	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
3	Left	5mm	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> *1
4	Right	5mm	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
5	Top	5mm	<input checked="" type="checkbox"/> *1	<input checked="" type="checkbox"/>
6	Bottom	5mm	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> *1

*1 Antenna located at > 25mm, but tested for simultaneous transmission analysis.

SECTION6: Description of the operating mode

6.1 Output Power for GSM

Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

When different maximum output power applies to GSM voice or GPRS/EDGE time slots, GSM voice and GPRS/EDGE time slots should be tested separately to determine compliance by summing the corresponding reported SAR.

The GMSK EDGE configurations are grouped with GPRS and considered with respect to time-averaged maximum output power to determine compliance

Per October 2013 TCB Workshop:

When the maximum frame-averaged powers levels are within 0.25 dB of each other, test the configuration with the most number of time slots.

GSM850

Mode	Coding Scheme	Time Slots	Ch No.	Freq (MHz)	Maximum Average Power(dBm)			
					Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr (Timed AV)	Burst Pwr	Frame Pwr (Timed AV)
GPRS/EGPRS (GMSK)	CS1	1	128	824.2	26.77	17.48	27.50	18.47
			190	836.6	26.93	17.65	27.50	18.47
			251	848.6	26.99	17.72	27.50	18.47
		2	128	824.2	26.25	19.96	26.50	20.48
			190	836.6	26.39	20.23	26.50	20.48
			251	848.6	26.47	20.27	26.50	20.48
		3	128	824.2	24.73	20.32	25.00	20.74
			190	836.6	24.89	20.45	25.00	20.74
			251	848.6	24.98	20.52	25.00	20.74
		4	128	824.2	23.65	20.42	24.00	20.99
			190	836.6	23.81	20.63	24.00	20.99
			251	848.6	23.92	20.73	24.00	20.99
EGPRS (8PSK)	MCS5	1	128	824.2	27.49	18.06	27.50	18.47
			190	836.6	27.06	17.79	27.50	18.47
			251	848.6	27.21	17.93	27.50	18.47
		2	128	824.2	26.47	20.10	26.50	20.48
			190	836.6	26.22	19.91	26.50	20.48
			251	848.6	26.35	20.01	26.50	20.48
		3	128	824.2	24.60	20.01	25.00	20.74
			190	836.6	24.49	19.89	25.00	20.74
			251	848.6	24.59	19.97	25.00	20.74
		4	128	824.2	23.54	20.19	24.00	20.99
			190	836.6	23.43	20.18	24.00	20.99
			251	848.6	23.68	20.31	24.00	20.99

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GPRS/EGPRS (GMSK) mode with 4 time slots for Max power, based on the Tune-up Procedure.
- SAR is not required for EGPRS (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than GPRS/EGPRS (GMSK) or the adjusted SAR of the highest reported SAR of GPRS/EGPRS (GMSK) is ≤ 1.2 W/kg.

PCS1900

Mode	Coding Scheme	Time Slots	Ch No.	Freq (MHz)	Maximum Average Power(dBm)			
					Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr (Timed AV)	Burst Pwr	Frame Pwr (Timed AV)
GPRS/EGPRS (GMSK)	CS1	1	512	1850.2	26.10	16.77	27.00	17.97
			661	1880	26.22	16.83	27.00	17.97
			810	1909.8	26.29	16.92	27.00	17.97
		2	512	1850.2	25.62	19.32	26.50	20.48
			661	1880	25.75	19.38	26.50	20.48
			810	1909.8	25.85	19.53	26.50	20.48
		3	512	1850.2	24.29	19.67	25.00	20.74
			661	1880	24.23	19.65	25.00	20.74
			810	1909.8	24.37	19.83	25.00	20.74
		4	512	1850.2	23.21	19.89	24.00	20.99
			661	1880	23.28	19.97	24.00	20.99
			810	1909.8	23.26	20.01	24.00	20.99
EGPRS (8PSK)	MCS5	1	512	1850.2	26.95	17.55	27.00	17.97
			661	1880	26.96	17.53	27.00	17.97
			810	1909.8	26.96	17.50	27.00	17.97
		2	512	1850.2	26.11	19.69	26.50	20.48
			661	1880	26.11	19.63	26.50	20.48
			810	1909.8	26.14	19.72	26.50	20.48
		3	512	1850.2	24.32	19.67	25.00	20.74
			661	1880	24.34	19.68	25.00	20.74
			810	1909.8	24.28	19.64	25.00	20.74
		4	512	1850.2	23.19	19.88	24.00	20.99
			661	1880	23.24	19.94	24.00	20.99
			810	1909.8	23.30	19.86	24.00	20.99

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GPRS/EGPRS (GMSK) mode with 4 time slots for Max power, based on the Tune-up Procedure.
- SAR is not required for EGPRS (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4\text{dB}$ higher than GPRS/EGPRS (GMSK) or the adjusted SAR of the highest reported SAR of GPRS/EGPRS (GMSK) is $\leq 1.2\text{W/kg}$.

6.2 Output Power for WCDMA

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

Table C.10.2.4: β values for transmitter characteristics tests with HS-DPCCH

Mode	HSDPA	HSDPA	HSDPA	HSDPA	
Subtest	1	2	3	4	
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
MPR (dB)	0	0	0.5	0.5	
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in table C,11.1.3 of 3GPP TS 34.121-1
A summary of these settings are illustrated below:

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
β_{ed}	1309/225	94/75	47/15	56/75	47/15	
CM (dB)	1	3	2	3	1	
MPR (dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
$A_{hs} = \beta_{hs}/\beta_c$	30/15					
HSUPA Specific Settings	E-DPDCCH	6	8	8	5	0
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	12
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	67
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
Reference E-TFCI PO	27	27	27	27	27	
Maximum Channelization Codes	2xSF2				SF4	

W-CDMA Band 2

R99

Band	Mode	UL Ch No.	Freq.	Tune-up Upper Power(dBm)	Avg Pwr (dBm)
					Full Power
W-CDMA (UMTS) Band II	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	15.00	14.46
		9400	1880.0	15.00	14.37
		9538	1907.6	15.00	14.42

HSDPA

Band	Mode	UL Ch No.	Freq.	Tune-up Upper Power(dBm)	Avg Pwr (dBm)
					Full Power
W-CDMA (UMTS) Band II	Subtest 1	9262	1852.4	14.00	13.49
		9400	1880.0	14.00	13.44
		9538	1907.6	14.00	13.51
	Subtest 2	9262	1852.4	14.00	13.07
		9400	1880.0	14.00	13.02
		9538	1907.6	14.00	13.02
	Subtest 3	9262	1852.4	14.00	13.01
		9400	1880.0	14.00	12.93
		9538	1907.6	14.00	13.03
	Subtest 4	9262	1852.4	14.00	13.52
		9400	1880.0	14.00	13.45
		9538	1907.6	14.00	13.54

HSUPA

Band	Mode	UL Ch No.	Freq.	Tune-up Upper Power(dBm)	Avg Pwr (dBm)
					Full Power
WCDMA (UMTS) Band II	Subtest 1	9262	1852.4	13.00	11.53
		9400	1880.0	13.00	11.42
		9538	1907.6	13.00	11.47
	Subtest 2	9262	1852.4	13.00	11.53
		9400	1880.0	13.00	11.46
		9538	1907.6	13.00	11.52
	Subtest 3	9262	1852.4	13.00	12.52
		9400	1880.0	13.00	12.48
		9538	1907.6	13.00	12.47
	Subtest 4	9262	1852.4	13.00	11.01
		9400	1880.0	13.00	11.01
		9538	1907.6	13.00	11.01
	Subtest 5	9262	1852.4	13.00	12.50
		9400	1880.0	13.00	12.40
		9538	1907.6	13.00	12.50

W-CDMA Band 5

R99

Band	Mode	UL Ch No.	Freq. (MHz)	Tune-up Upper Power(dBm)	Avg Pwr (dBm)
					Full Power
W-CDMA (UMTS) Band V	Rel 99 (RMC, 12.2 kbps)	4132	826.4	21.50	20.94
		4183	836.6	21.50	21.02
		4233	846.6	21.50	21.17

HSDPA

Band	Mode	UL Ch No.	Freq. (MHz)	Tune-up Upper Power(dBm)	Avg Pwr (dBm)
					Full Power
W-CDMA (UMTS) Band V	Subtest 1	4132	826.4	20.50	20.01
		4183	836.6	20.50	19.96
		4233	846.6	20.50	20.10
	Subtest 2	4132	826.4	20.50	19.61
		4183	836.6	20.50	19.58
		4233	846.6	20.50	19.65
	Subtest 3	4132	826.4	20.50	19.65
		4183	836.6	20.50	19.54
		4233	846.6	20.50	19.65
	Subtest 4	4132	826.4	20.50	19.98
		4183	836.6	20.50	19.92
		4233	846.6	20.50	20.10

HSUPA

Band	Mode	UL Ch No.	Freq. (MHz)	Tune-up Upper Power(dBm)	Avg Pwr (dBm)
					Full Power
WCDMA (UMTS) Band V	Subtest 1	4132	826.4	19.50	18.03
		4183	836.6	19.50	17.99
		4233	846.6	19.50	18.14
	Subtest 2	4132	826.4	19.50	18.05
		4183	836.6	19.50	17.95
		4233	846.6	19.50	18.19
	Subtest 3	4132	826.4	19.50	19.02
		4183	836.6	19.50	19.00
		4233	846.6	19.50	19.17
	Subtest 4	4132	826.4	19.50	17.57
		4183	836.6	19.50	17.54
		4233	846.6	19.50	17.68
	Subtest 5	4132	826.4	19.50	18.49
		4183	836.6	19.50	18.46
		4233	846.6	19.50	18.64

6.3 Output Power for LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of “NS_01”.

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 38, 66, 70	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2, 6.6.3.3.19	41	5, 10, 15, 20	Table 6.2.4-4, Table 6.2.4-4a	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50 (NOTE1)	≤ 1 (NOTE1)
			15, 20	Table 6.2.4-18 (NOTE2)	
		65 (NOTE 3)	10, 15, 20	≥ 50	≤ 1 (NOTE 1)
			15, 20	Table 6.2.4-18 (NOTE 2)	
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	N/A
NS_07	6.6.2.2.3, 6.6.3.3.2	13	10	Table 6.2.4-2	
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
				Table 6.2.4-3	
NS_11	6.6.2.2.1, 6.6.3.3.13	23	1.4, 3, 5, 10, 15, 20	Table 6.2.4-5	
NS_12	6.6.3.3.5	26	1.4, 3, 5, 10, 15	Table 6.2.4-6	
NS_13	6.6.3.3.6	26	5	Table 6.2.4-7	
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4-8	
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4-9, Table 6.2.4-10	
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13	
NS_17	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
NS_18	6.6.3.3.11	28	5	≥ 2	≤ 1
			10, 15, 20	≥ 1	≤ 4
NS_19	6.6.3.3.12	44	10, 15, 20	Table 6.2.4-14	
NS_20	6.2.2, 6.6.2.2.1, 6.6.3.3.14	23	5, 10, 15, 20	Table 6.2.4-15	
NS_21	6.6.2.2.1, 6.6.3.3.15	30	5, 10	Table 6.2.4-16	
NS_22	6.6.3.3.16	42, 43	5, 10, 15, 20	Table 6.2.4-17	
NS_23	6.6.3.3.17	42, 43	5, 10, 15, 20	N/A	
NS_24	6.6.3.3.20	65 (NOTE 4)	5, 10, 15, 20	Table 6.2.4-19	
NS_25	6.6.3.3.21	65 (NOTE 4)	5, 10, 15, 20	Table 6.2.4-20	
NS_26	6.6.3.3.22	68	10, 15	Table 6.2.4-21	
NS_27	6.6.2.2.5, 6.6.3.3.23	48	5, 10, 15, 20	Table 6.2.4-22	
NS_28	6.2.2A, 6.6.3.3.24	46 (NOTE 5)	20	Table 6.2.4-23	
NS_29	6.2.2A, 6.6.2.3.1a, 6.6.3.3.25	46 (NOTE 5)	20	Table 6.2.4-24	
NS_30	6.2.2A, 6.6.3.3.26	46 (NOTE 5)	20	Table 6.2.4-25	
NS_31	6.2.2A, 6.6.3.3.27	46 (NOTE 5)	20	Table 6.2.4-26	
NS_32	-	-	-	-	-

NOTE 1: Applicable when the lower edge of the assigned E-UTRA UL channel bandwidth frequency is larger than or equal to the upper edge of PHS band (1915.7 MHz) + 4 MHz + the channel BW assigned, where channel BW is as defined in subclause 5.6. A-MPR for

LTE Band 2

Band : 2

BW (MHz)	UL Ch #	Freq. (MHz)	Modulation	UL RB Allocation	UL RB Start	Target MPR	Meas. MPR	Tune-up Limit (dBm)	Meas. Pwr Avg (dBm)	
20	18700	1860	QPSK	1	0	0	0	19.0	18.02	
				1	49	0	0	19.0	18.29	
				1	99	0	0	19.0	17.87	
				50	0	1	1	18.0	17.28	
				50	24	1	1	18.0	17.27	
				50	49	1	1	18.0	17.28	
			100	0	1	1	18.0	17.28		
			16QAM	1	0	1	1	18.0	17.34	
				1	49	1	1	18.0	17.60	
				1	99	1	1	18.0	17.16	
				50	0	2	2	17.0	16.28	
				50	24	2	2	17.0	16.23	
				50	49	2	2	17.0	16.26	
				100	0	2	2	17.0	16.23	
				18900	1880	QPSK	1	0	0	0
	1	49					0	0	19.0	18.25
	1	99	0				0	19.0	17.90	
	50	0	1				1	18.0	17.16	
	50	24	1				1	18.0	17.15	
	50	49	1				1	18.0	17.07	
	100	0	1			1	18.0	17.10		
	16QAM	1	0			1	1	18.0	17.15	
		1	49			1	1	18.0	17.53	
		1	99			1	1	18.0	17.22	
		50	0			2	2	17.0	16.13	
		50	24			2	2	17.0	16.11	
		50	49			2	2	17.0	16.02	
		100	0			2	2	17.0	16.05	
		19100	1900			QPSK	1	0	0	0
				1	49		0	0	19.0	18.30
1	99			0	0		19.0	17.94		
50	0			1	1		18.0	17.29		
50	24			1	1		18.0	17.23		
50	49			1	1		18.0	17.28		
100	0			1	1	18.0	17.27			
16QAM	1			0	1	1	18.0	17.18		
	1			49	1	1	18.0	17.62		
	1			99	1	1	18.0	17.19		
	50			0	2	2	17.0	16.35		
	50			24	2	2	17.0	16.25		
	50			49	2	2	17.0	16.24		
	100			0	2	2	17.0	16.24		

Band : 2

BW (MHz)	UL Ch #	Freq. (MHz)	Modulation	UL RB Allocation	UL RB Start	Target MPR	Meas. MPR	Tune-up Limit (dBm)	Meas. Pwr Avg (dBm)
15	18675	1857.5	QPSK	1	0	0	0	19.0	18.22
				1	37	0	0	19.0	18.29
				1	74	0	0	19.0	18.14
				36	0	1	1	18.0	17.28
				36	19	1	1	18.0	17.27
				36	39	1	1	18.0	17.26
				75	0	1	1	18.0	17.25
			16QAM	1	0	1	1	18.0	17.51
				1	37	1	1	18.0	17.58
				1	74	1	1	18.0	17.42
				36	0	2	2	17.0	16.28
				36	19	2	2	17.0	16.25
				36	39	2	2	17.0	16.24
				75	0	2	2	17.0	16.28
				18900	1880	QPSK	1	0	0
	1	37	0				0	19.0	18.19
	1	74	0				0	19.0	18.09
	36	0	1				1	18.0	17.16
	36	19	1				1	18.0	17.16
	36	39	1				1	18.0	17.09
	75	0	1				1	18.0	17.12
	16QAM	1	0			1	1	18.0	17.32
		1	37			1	1	18.0	17.45
		1	74			1	1	18.0	17.40
		36	0			2	2	17.0	16.13
		36	19			2	2	17.0	16.16
		36	39			2	2	17.0	16.10
		75	0			2	2	17.0	16.08
		19125	1902.5			QPSK	1	0	0
	1			37	0		0	19.0	18.23
1	74			0	0		19.0	18.13	
36	0			1	1		18.0	17.18	
36	19			1	1		18.0	17.20	
36	39			1	1		18.0	17.21	
75	0			1	1		18.0	17.22	
16QAM	1			0	1	1	18.0	17.40	
	1			37	1	1	18.0	17.52	
	1			74	1	1	18.0	17.40	
	36			0	2	2	17.0	16.25	
	36			19	2	2	17.0	16.20	
	36			39	2	2	17.0	16.17	
	75			0	2	2	17.0	16.16	

Band : 2

BW (MHz)	UL Ch #	Freq. (MHz)	Modulation	UL RB Allocation	UL RB Start	Target MPR	Meas. MPR	Tune-up Limit (dBm)	Meas. Pwr Avg (dBm)
10	18650	1855	QPSK	1	0	0	0	19.0	17.82
				1	24	0	0	19.0	17.94
				1	49	0	0	19.0	17.74
				25	0	1	1	18.0	16.85
				25	12	1	1	18.0	16.86
				25	24	1	1	18.0	16.80
			50	0	1	1	18.0	16.80	
			16QAM	1	0	1	1	18.0	17.13
				1	24	1	1	18.0	17.24
				1	49	1	1	18.0	17.03
				25	0	2	2	17.0	15.89
				25	12	2	2	17.0	15.91
	25	24		2	2	17.0	15.85		
	18900	1880	QPSK	1	0	0	0	19.0	17.61
				1	24	0	0	19.0	17.78
				1	49	0	0	19.0	17.67
				25	0	1	1	18.0	16.71
				25	12	1	1	18.0	16.67
				25	24	1	1	18.0	16.61
			50	0	1	1	18.0	16.67	
			16QAM	1	0	1	1	18.0	16.89
				1	24	1	1	18.0	17.05
				1	49	1	1	18.0	16.92
				25	0	2	2	17.0	15.73
				25	12	2	2	17.0	15.71
	25	24		2	2	17.0	15.64		
	50	0	2	2	17.0	15.68			
	19150	1905	QPSK	1	0	0	0	19.0	17.70
				1	24	0	0	19.0	17.85
				1	49	0	0	19.0	17.71
25				0	1	1	18.0	16.75	
25				12	1	1	18.0	16.74	
25				24	1	1	18.0	16.73	
50			0	1	1	18.0	16.74		
16QAM			1	0	1	1	18.0	16.99	
			1	24	1	1	18.0	17.13	
			1	49	1	1	18.0	16.98	
			25	0	2	2	17.0	15.76	
			25	12	2	2	17.0	15.79	
	25	24	2	2	17.0	15.83			
50	0	2	2	17.0	15.79				

Band : 2

BW (MHz)	UL Ch #	Freq. (MHz)	Modulation	UL RB Allocation	UL RB Start	Target MPR	Meas. MPR	Tune-up Limit (dBm)	Meas. Pwr Avg (dBm)		
5	18625	1852.5	QPSK	1	0	0	0	19.0	17.75		
				1	12	0	0	19.0	17.86		
				1	24	0	0	19.0	17.76		
				12	0	1	1	18.0	16.83		
				12	6	1	1	18.0	16.90		
				12	11	1	1	18.0	16.81		
			25	0	1	1	18.0	16.81			
			16QAM	1	0	1	1	18.0	17.01		
				1	12	1	1	18.0	17.12		
				1	24	1	1	18.0	17.02		
				12	0	2	2	17.0	15.93		
				12	6	2	2	17.0	15.98		
	12	11		2	2	17.0	15.87				
	18900	1880	QPSK	1	0	0	0	19.0	17.56		
				1	12	0	0	19.0	17.72		
				1	24	0	0	19.0	17.57		
				12	0	1	1	18.0	16.64		
				12	6	1	1	18.0	16.70		
				12	11	1	1	18.0	16.58		
				25	0	1	1	18.0	16.63		
				16QAM	1	0	1	1	18.0	16.83	
					1	12	1	1	18.0	17.00	
					1	24	1	1	18.0	16.84	
					12	0	2	2	17.0	15.72	
					12	6	2	2	17.0	15.78	
			12		11	2	2	17.0	15.67		
			19175	1907.5	QPSK	1	0	0	0	19.0	18.15
						1	12	0	0	19.0	18.28
						1	24	0	0	19.0	18.08
						12	0	1	1	18.0	17.13
12						6	1	1	18.0	17.19	
12	11	1				1	18.0	17.21			
25	0	1			1	18.0	17.16				
16QAM	1	0			1	1	18.0	17.38			
	1	12			1	1	18.0	17.50			
	1	24			1	1	18.0	17.35			
	12	0			2	2	17.0	16.13			
	12	6			2	2	17.0	16.21			
	12	11	2	2	17.0	16.20					
25	0	2	2	17.0	16.14						

Band : 2

BW (MHz)	UL Ch #	Freq. (MHz)	Modulation	UL RB Allocation	UL RB Start	Target MPR	Meas. MPR	Tune-up Limit (dBm)	Meas. Pwr Avg (dBm)		
3	18615	1851.5	QPSK	1	0	0	0	19.0	18.33		
				1	7	0	0	19.0	18.36		
				1	14	0	0	19.0	18.32		
				8	0	1	1	18.0	17.35		
				8	4	1	1	18.0	17.36		
				8	7	1	1	18.0	17.34		
			15	0	1	1	18.0	17.31			
			16QAM	1	0	1	1	18.0	17.58		
				1	7	1	1	18.0	17.63		
				1	14	1	1	18.0	17.58		
				8	0	2	2	17.0	16.38		
				8	4	2	2	17.0	16.38		
	8	7		2	2	17.0	16.35				
	18900	1880	QPSK	1	0	0	0	19.0	18.15		
				1	7	0	0	19.0	18.16		
				1	14	0	0	19.0	18.17		
				8	0	1	1	18.0	17.15		
				8	4	1	1	18.0	17.17		
				8	7	1	1	18.0	17.13		
				15	0	1	1	18.0	17.13		
				16QAM	1	0	1	1	18.0	17.38	
					1	7	1	1	18.0	17.45	
					1	14	1	1	18.0	17.48	
					8	0	2	2	17.0	16.15	
					8	4	2	2	17.0	16.17	
			8		7	2	2	17.0	16.13		
			19185	1908.5	QPSK	1	0	0	0	19.0	18.21
						1	7	0	0	19.0	18.20
						1	14	0	0	19.0	18.19
						8	0	1	1	18.0	17.17
8						4	1	1	18.0	17.26	
8	7	1				1	18.0	17.21			
15	0	1			1	18.0	17.17				
16QAM	1	0			1	1	18.0	17.50			
	1	7			1	1	18.0	17.52			
	1	14			1	1	18.0	17.46			
	8	0			2	2	17.0	16.22			
	8	4			2	2	17.0	16.27			
	8	7	2	2	17.0	16.24					
15	0	2	2	17.0	16.16						

Band : 2

BW (MHz)	UL Ch #	Freq. (MHz)	Modulation	UL RB Allocation	UL RB Start	Target MPR	Meas. MPR	Tune-up Limit (dBm)	Meas. Pwr Avg (dBm)				
1.4	18067	1850.7	QPSK	1	0	0	0	19.0	18.36				
				1	2	0	0	19.0	18.48				
				1	5	0	0	19.0	18.35				
				3	0	0	0	19.0	18.41				
				3	1	0	0	19.0	18.45				
				3	3	0	0	19.0	18.44				
			6	0	1	1	18.0	17.43					
			16QAM	1	0	1	1	18.0	17.60				
				1	2	1	1	18.0	17.77				
				1	5	1	1	18.0	17.66				
				3	0	1	1	18.0	17.45				
				3	1	1	1	18.0	17.47				
	3	3		1	1	18.0	17.49						
	18900	1880	1880	QPSK	1	0	0	0	19.0	18.17			
					1	2	0	0	19.0	18.32			
					1	5	0	0	19.0	18.16			
					3	0	0	0	19.0	18.27			
					3	1	0	0	19.0	18.29			
					3	3	0	0	19.0	18.25			
				6	0	1	1	18.0	17.20				
				16QAM	1	0	1	1	18.0	17.45			
					1	2	1	1	18.0	17.58			
					1	5	1	1	18.0	17.43			
					3	0	1	1	18.0	17.25			
					3	1	1	1	18.0	17.31			
					3	3	1	1	18.0	17.26			
				19193	1909.3	1909.3	QPSK	1	0	0	0	19.0	18.18
								1	2	0	0	19.0	18.34
								1	5	0	0	19.0	18.17
								3	0	0	0	19.0	18.27
3								1	0	0	19.0	18.31	
3	3	0	0					19.0	18.28				
6	0	1	1				18.0	17.25					
16QAM	1	0	1				1	18.0	17.45				
	1	2	1				1	18.0	17.66				
	1	5	1				1	18.0	17.45				
	3	0	1				1	18.0	17.31				
	3	1	1				1	18.0	17.36				
	3	3	1	1	18.0	17.29							
6	0	2	2	17.0	16.32								

LTE Band 5

Band : 5

BW (MHz)	UL Ch #	Freq. (MHz)	Modulation	UL RB Allocation	UL RB Start	Target MPR	Meas. MPR	Tune-up Limit (dBm)	Meas. Pwr Avg (dBm)	
10	20450	829	QPSK	1	0	0	0	20.0	19.00	
				1	24	0	0	20.0	19.03	
				1	49	0	0	20.0	18.93	
				25	0	1	1	19.0	18.00	
				25	12	1	1	19.0	18.01	
				25	24	1	1	19.0	18.02	
			50	0	1	1	19.0	18.04		
			16QAM	1	0	1	1	19.0	18.31	
				1	24	1	1	19.0	18.39	
				1	49	1	1	19.0	18.31	
				25	0	2	2	18.0	16.99	
				25	12	2	2	18.0	17.00	
				25	24	2	2	18.0	16.99	
				50	0	2	2	18.0	17.01	
				20525	836.5	QPSK	1	0	0	0
	1	24					0	0	20.0	19.01
	1	49	0				0	20.0	18.92	
	25	0	1				1	19.0	18.07	
	25	12	1				1	19.0	18.05	
	25	24	1				1	19.0	18.00	
	50	0	1			1	19.0	18.06		
	16QAM	1	0			1	1	19.0	18.29	
		1	24			1	1	19.0	18.36	
		1	49			1	1	19.0	18.28	
		25	0			2	2	18.0	17.04	
		25	12			2	2	18.0	17.02	
		25	24			2	2	18.0	17.00	
		50	0			2	2	18.0	17.03	
		20600	844			QPSK	1	0	0	0
				1	24		0	0	20.0	19.04
1	49			0	0		20.0	18.86		
25	0			1	1		19.0	18.06		
25	12			1	1		19.0	18.03		
25	24			1	1		19.0	17.96		
50	0			1	1	19.0	18.01			
16QAM	1			0	1	1	19.0	18.25		
	1			24	1	1	19.0	18.40		
	1			49	1	1	19.0	18.21		
	25			0	2	2	18.0	17.09		
	25			12	2	2	18.0	17.02		
	25			24	2	2	18.0	16.95		
	50			0	2	2	18.0	16.99		

Band : 5

BW (MHz)	UL Ch #	Freq. (MHz)	Modulation	UL RB Allocation	UL RB Start	Target MPR	Meas. MPR	Tune-up Limit (dBm)	Meas. Pwr Avg (dBm)
5	20425	826.5	QPSK	1	0	0	0	20.0	18.94
				1	12	0	0	20.0	19.05
				1	24	0	0	20.0	18.95
				12	0	1	1	19.0	17.94
				12	6	1	1	19.0	18.03
				12	11	1	1	19.0	18.00
			25	0	1	1	19.0	18.00	
			16QAM	1	0	1	1	19.0	18.22
				1	12	1	1	19.0	18.42
				1	24	1	1	19.0	18.23
				12	0	2	2	18.0	16.97
				12	6	2	2	18.0	17.08
	12	11		2	2	18.0	16.99		
	20525	836.5	QPSK	1	0	0	0	20.0	18.84
				1	12	0	0	20.0	18.93
				1	24	0	0	20.0	18.85
				12	0	1	1	19.0	17.99
				12	6	1	1	19.0	18.04
				12	11	1	1	19.0	17.97
			25	0	1	1	19.0	18.01	
			16QAM	1	0	1	1	19.0	18.20
				1	12	1	1	19.0	18.27
				1	24	1	1	19.0	18.17
				12	0	2	2	18.0	17.00
				12	6	2	2	18.0	17.05
	12	11		2	2	18.0	16.98		
	20625	846.5	QPSK	1	0	0	0	20.0	18.83
				1	12	0	0	20.0	18.93
				1	24	0	0	20.0	18.79
				12	0	1	1	19.0	18.00
12				6	1	1	19.0	18.01	
12				11	1	1	19.0	17.90	
25			0	1	1	19.0	17.99		
16QAM			1	0	1	1	19.0	18.24	
			1	12	1	1	19.0	18.28	
			1	24	1	1	19.0	18.10	
			12	0	2	2	18.0	17.01	
			12	6	2	2	18.0	17.02	
	12	11	2	2	18.0	16.93			
25	0	2	2	18.0	16.94				

Band : 5

BW (MHz)	UL Ch #	Freq. (MHz)	Modulation	UL RB Allocation	UL RB Start	Target MPR	Meas. MPR	Tune-up Limit (dBm)	Meas. Pwr Avg (dBm)		
3	20415	825.5	QPSK	1	0	0	0	20.0	19.07		
				1	7	0	0	20.0	19.06		
				1	14	0	0	20.0	19.04		
				8	0	1	1	19.0	18.04		
				8	4	1	1	19.0	18.10		
				8	7	1	1	19.0	18.07		
			15	0	1	1	19.0	18.01			
			16QAM	1	0	1	1	19.0	18.34		
				1	7	1	1	19.0	18.35		
				1	14	1	1	19.0	18.34		
				8	0	2	2	18.0	17.09		
				8	4	2	2	18.0	17.14		
	8	7		2	2	18.0	17.11				
	20525	836.5	QPSK	1	0	0	0	20.0	18.95		
				1	7	0	0	20.0	18.92		
				1	14	0	0	20.0	18.93		
				8	0	1	1	19.0	18.01		
				8	4	1	1	19.0	18.04		
				8	7	1	1	19.0	18.00		
				15	0	1	1	19.0	18.00		
				16QAM	1	0	1	1	19.0	18.31	
					1	7	1	1	19.0	18.31	
					1	14	1	1	19.0	18.28	
					8	0	2	2	18.0	17.08	
					8	4	2	2	18.0	17.07	
			8		7	2	2	18.0	17.03		
			20635	847.5	QPSK	1	0	0	0	20.0	18.94
						1	7	0	0	20.0	19.05
						1	14	0	0	20.0	18.95
						8	0	1	1	19.0	17.94
8						4	1	1	19.0	18.03	
8	7	1				1	19.0	18.00			
15	0	1			1	19.0	17.99				
16QAM	1	0			1	1	19.0	18.22			
	1	7			1	1	19.0	18.42			
	1	14			1	1	19.0	18.23			
	8	0			2	2	18.0	16.97			
	8	4			2	2	18.0	17.08			
	8	7	2	2	18.0	16.99					
15	0	2	2	18.0	16.98						

Band : 5

BW (MHz)	UL Ch #	Freq. (MHz)	Modulation	UL RB Allocation	UL RB Start	Target MPR	Meas. MPR	Tune-up Limit (dBm)	Meas. Pwr Avg (dBm)
1.4	20407	824.7	QPSK	1	0	0	0	20.0	19.04
				1	2	0	0	20.0	19.17
				1	5	0	0	20.0	19.05
				3	0	0	0	20.0	19.11
				3	1	0	0	20.0	19.13
				3	3	0	0	20.0	19.10
			6	0	1	1	19.0	18.09	
			16QAM	1	0	1	1	19.0	18.33
			1	2	1	1	19.0	18.48	
			1	5	1	1	19.0	18.34	
			3	0	1	1	19.0	18.14	
			3	1	1	1	19.0	18.18	
	3	3	1	1	19.0	18.16			
	6	0	2	2	18.0	17.15			
	20525	836.5	QPSK	1	0	0	0	20.0	18.95
				1	2	0	0	20.0	19.07
				1	5	0	0	20.0	18.91
				3	0	0	0	20.0	18.99
				3	1	0	0	20.0	19.00
				3	3	0	0	20.0	19.00
			6	0	1	1	19.0	18.08	
			16QAM	1	0	1	1	19.0	18.28
			1	2	1	1	19.0	18.42	
			1	5	1	1	19.0	18.26	
			3	0	1	1	19.0	18.11	
			3	1	1	1	19.0	18.14	
	3	3	1	1	19.0	18.10			
	6	0	2	2	18.0	17.12			
	20643	848.3	QPSK	1	0	0	0	20.0	18.91
				1	2	0	0	20.0	19.02
				1	5	0	0	20.0	18.89
				3	0	0	0	20.0	18.92
				3	1	0	0	20.0	18.98
				3	3	0	0	20.0	18.97
			6	0	1	1	19.0	18.03	
			16QAM	1	0	1	1	19.0	18.24
1			2	1	1	19.0	18.37		
1			5	1	1	19.0	18.23		
3			0	1	1	19.0	18.06		
3			1	1	1	19.0	18.12		
3	3	1	1	19.0	18.06				
6	0	2	2	18.0	17.10				

LTE Band 7

Band : 7

BW (MHz)	UL Ch #	Freq. (MHz)	Modulation	UL RB Allocation	UL RB Start	Target MPR	Meas. MPR	Tune-up Limit (dBm)	Meas. Pwr Avg (dBm)
20	20850	2510	QPSK	1	0	0	0	21.5	20.50
				1	49	0	0	21.5	20.92
				1	99	0	0	21.5	20.65
				50	0	1	1	20.5	19.70
				50	24	1	1	20.5	19.97
				50	49	1	1	20.5	20.15
				100	0	1	1	20.5	19.90
			16QAM	1	0	1	1	20.5	19.56
				1	49	1	1	20.5	20.17
				1	99	1	1	20.5	19.98
				50	0	2	2	19.5	18.65
				50	24	2	2	19.5	18.90
				50	49	2	2	19.5	19.10
				100	0	2	2	19.5	18.84
				21100	2535	QPSK	1	0	0
	1	49	0				0	21.5	20.91
	1	99	0				0	21.5	20.88
	50	0	1				1	20.5	19.96
	50	24	1				1	20.5	20.03
	50	49	1				1	20.5	20.06
	100	0	1				1	20.5	19.99
	16QAM	1	0			1	1	20.5	19.83
		1	49			1	1	20.5	20.22
		1	99			1	1	20.5	20.13
		50	0			2	2	19.5	18.98
		50	24			2	2	19.5	19.05
		50	49			2	2	19.5	19.08
		100	0			2	2	19.5	18.99
		21350	2560			QPSK	1	0	0
	1			49	0		0	21.5	20.91
1	99			0	0		21.5	20.67	
50	0			1	1		20.5	19.81	
50	24			1	1		20.5	20.03	
50	49			1	1		20.5	19.89	
100	0			1	1		20.5	19.83	
16QAM	1			0	1		1	20.5	19.60
	1			49	1		1	20.5	19.95
	1			99	1	1	20.5	19.70	
	50			0	2	2	19.5	18.64	
	50			24	2	2	19.5	18.69	
	50			49	2	2	19.5	18.67	
	100			0	2	2	19.5	18.62	

Band : 7

BW (MHz)	UL Ch #	Freq. (MHz)	Modulation	UL RB Allocation	UL RB Start	Target MPR	Meas. MPR	Tune-up Limit (dBm)	Meas. Pwr Avg (dBm)			
15	20825	2507.5	QPSK	1	0	0	0	21.5	20.03			
				1	37	0	0	21.5	20.35			
				1	74	0	0	21.5	20.30			
				36	0	1	1	20.5	19.21			
				36	19	1	1	20.5	19.34			
				36	39	1	1	20.5	19.48			
				75	0	1	1	20.5	19.34			
			16QAM	1	0	1	1	20.5	19.27			
				1	37	1	1	20.5	19.58			
				1	74	1	1	20.5	19.62			
				36	0	2	2	19.5	18.20			
				36	19	2	2	19.5	18.31			
				36	39	2	2	19.5	18.46			
				75	0	2	2	19.5	18.29			
	21100	2535	QPSK	1	0	0	0	21.5	20.26			
				1	37	0	0	21.5	20.49			
				1	74	0	0	21.5	20.55			
				36	0	1	1	20.5	19.53			
				36	19	1	1	20.5	19.58			
				36	39	1	1	20.5	19.65			
				75	0	1	1	20.5	19.61			
			16QAM	1	0	1	1	20.5	19.58			
				1	37	1	1	20.5	19.77			
				1	74	1	1	20.5	19.86			
				36	0	2	2	19.5	18.52			
				36	19	2	2	19.5	18.55			
				36	39	2	2	19.5	18.60			
				75	0	2	2	19.5	18.53			
				21375	2562.5	QPSK	1	0	0	0	21.5	20.51
							1	37	0	0	21.5	20.65
1	74	0	0				21.5	20.61				
36	0	1	1				20.5	19.71				
36	19	1	1				20.5	19.70				
36	39	1	1				20.5	19.69				
75	0	1	1				20.5	19.66				
16QAM	1	0	1			1	20.5	19.80				
	1	37	1			1	20.5	19.88				
				1	74	1	1	20.5	19.78			
				36	0	2	2	19.5	18.63			
				36	19	2	2	19.5	18.63			
				36	39	2	2	19.5	18.66			
				75	0	2	2	19.5	18.65			

Band : 7

BW (MHz)	UL Ch #	Freq. (MHz)	Modulation	UL RB Allocation	UL RB Start	Target MPR	Meas. MPR	Tune-up Limit (dBm)	Meas. Pwr Avg (dBm)
10	20800	2505	QPSK	1	0	0	0	21.5	20.12
				1	24	0	0	21.5	20.39
				1	49	0	0	21.5	20.31
				25	0	1	1	20.5	19.22
				25	12	1	1	20.5	19.35
				25	24	1	1	20.5	19.46
				50	0	1	1	20.5	19.40
			16QAM	1	0	1	1	20.5	19.32
				1	24	1	1	20.5	19.60
				1	49	1	1	20.5	19.57
				25	0	2	2	19.5	18.20
				25	12	2	2	19.5	18.32
				25	24	2	2	19.5	18.41
				50	0	2	2	19.5	18.32
				21100	2535	QPSK	1	0	0
	1	24	0				0	21.5	21.04
	1	49	0				0	21.5	21.01
	25	0	1				1	20.5	20.00
	25	12	1				1	20.5	20.00
	25	24	1				1	20.5	20.03
	50	0	1				1	20.5	20.01
	16QAM	1	0			1	1	20.5	20.06
		1	24			1	1	20.5	20.22
		1	49			1	1	20.5	20.23
		25	0			2	2	19.5	19.03
		25	12			2	2	19.5	19.04
		25	24			2	2	19.5	19.06
		50	0			2	2	19.5	19.04
		21400	2565			QPSK	1	0	0
	1			24	0		0	21.5	20.73
1	49			0	0		21.5	20.63	
25	0			1	1		20.5	19.74	
25	12			1	1		20.5	19.72	
25	24			1	1		20.5	19.73	
50	0			1	1		20.5	19.74	
16QAM	1			0	1	1	20.5	19.81	
	1			24	1	1	20.5	19.97	
	1			49	1	1	20.5	19.86	
	25			0	2	2	19.5	18.62	
	25			12	2	2	19.5	18.64	
	25			24	2	2	19.5	18.66	
	50			0	2	2	19.5	18.66	

Band : 7

BW (MHz)	UL Ch #	Freq. (MHz)	Modulation	UL RB Allocation	UL RB Start	Target MPR	Meas. MPR	Tune-up Limit (dBm)	Meas. Pwr Avg (dBm)		
5	20775	2502.5	QPSK	1	0	0	0	21.5	20.52		
				1	12	0	0	21.5	20.72		
				1	24	0	0	21.5	20.57		
				12	0	1	1	20.5	19.66		
				12	6	1	1	20.5	19.75		
				12	11	1	1	20.5	19.77		
			25	0	1	1	20.5	19.74			
			16QAM	1	0	1	1	20.5	19.72		
				1	12	1	1	20.5	19.91		
				1	24	1	1	20.5	19.87		
				12	0	2	2	19.5	18.66		
				12	6	2	2	19.5	18.75		
	12	11		2	2	19.5	18.76				
	21100	2535	QPSK	1	0	0	0	21.5	20.30		
				1	12	0	0	21.5	20.50		
				1	24	0	0	21.5	20.39		
				12	0	1	1	20.5	19.52		
				12	6	1	1	20.5	19.60		
				12	11	1	1	20.5	19.55		
			25	0	1	1	20.5	19.54			
			16QAM	1	0	1	1	20.5	19.61		
				1	12	1	1	20.5	19.81		
				1	24	1	1	20.5	19.67		
				12	0	2	2	19.5	18.48		
				12	6	2	2	19.5	18.57		
				12	11	2	2	19.5	18.50		
			21425	2567.5	QPSK	1	0	0	0	21.5	20.70
						1	12	0	0	21.5	20.67
						1	24	0	0	21.5	20.53
						12	0	1	1	20.5	19.63
12						6	1	1	20.5	19.71	
12	11	1				1	20.5	19.62			
25	0	1			1	20.5	19.65				
16QAM	1	0			1	1	20.5	19.69			
	1	12			1	1	20.5	19.91			
	1	24			1	1	20.5	19.75			
	12	0			2	2	19.5	18.58			
	12	6			2	2	19.5	18.67			
	12	11	2	2	19.5	18.63					
25	0	2	2	19.5	18.59						

LTE Band 26

BW (MHz)	UL Ch #	Freq. (MHz)	Modulation	UL RB Allocation	UL RB Start	Target MPR	Meas. MPR	Tune-up Limit (dBm)	Meas. Pwr Avg (dBm)
10	26740	819	QPSK	1	0	0	0	20.0	19.22
				1	24	0	0	20.0	19.16
				1	49	0	0	20.0	19.04
				25	0	1	1	19.0	18.17
				25	12	1	1	19.0	18.19
				25	24	1	1	19.0	18.18
				50	0	1	1	19.0	18.15
			16QAM	1	0	1	1	19.0	18.48
				1	24	1	1	19.0	18.56
				1	49	1	1	19.0	18.46
				25	0	2	2	18.0	17.09
				25	12	2	2	18.0	17.18
				25	24	2	2	18.0	17.20
				50	0	2	2	18.0	17.14

Band : 26

BW (MHz)	UL Ch #	Freq. (MHz)	Modulation	UL RB Allocation	UL RB Start	Target MPR	Meas. MPR	Tune-up Limit (dBm)	Meas. Pwr Avg (dBm)
5	26715	816.5	QPSK	1	0	0	0	20.0	19.06
				1	12	0	0	20.0	19.21
				1	24	0	0	20.0	19.04
				12	0	1	1	19.0	18.10
				12	6	1	1	19.0	18.20
				12	11	1	1	19.0	18.16
				25	0	1	1	19.0	18.15
			16QAM	1	0	1	1	19.0	18.47
				1	12	1	1	19.0	18.55
				1	24	1	1	19.0	18.37
				12	0	2	2	18.0	17.13
				12	6	2	2	18.0	17.23
				12	11	2	2	18.0	17.20
				25	0	2	2	18.0	17.12
				26740	819	QPSK	1	0	0
	1	12	0				0	20.0	19.16
	1	24	0				0	20.0	19.05
	12	0	1				1	19.0	18.09
	12	6	1				1	19.0	18.15
	12	11	1				1	19.0	18.10
	25	0	1				1	19.0	18.12
	16QAM	1	0			1	1	19.0	18.39
		1	12			1	1	19.0	18.51
		1	24			1	1	19.0	18.37
		12	0			2	2	18.0	17.12
		12	6			2	2	18.0	17.19
		12	11			2	2	18.0	17.14
		25	0			2	2	18.0	17.11
		26765	821.5			QPSK	1	0	0
	1			12	0		0	20.0	19.13
1	24			0	0		20.0	18.96	
12	0			1	1		19.0	18.05	
12	6			1	1		19.0	18.15	
12	11			1	1		19.0	18.08	
25	0			1	1		19.0	18.09	
16QAM	1			0	1	1	19.0	18.31	
	1			12	1	1	19.0	18.48	
	1			24	1	1	19.0	18.36	
	12			0	2	2	18.0	17.08	
	12			6	2	2	18.0	17.17	
	12			11	2	2	18.0	17.14	
	25			0	2	2	18.0	17.11	

Band : 26

BW (MHz)	UL Ch #	Freq. (MHz)	Modulation	UL RB Allocation	UL RB Start	Target MPR	Meas. MPR	Tune-up Limit (dBm)	Meas. Pwr Avg (dBm)
3	26705	815.5	QPSK	1	0	0	0	20.0	19.16
				1	7	0	0	20.0	19.23
				1	14	0	0	20.0	19.20
				8	0	1	1	19.0	18.18
				8	4	1	1	19.0	18.22
				8	7	1	1	19.0	18.19
				15	0	1	1	19.0	18.18
			16QAM	1	0	1	1	19.0	18.57
				1	7	1	1	19.0	18.54
				1	14	1	1	19.0	18.50
				8	0	2	2	18.0	17.26
				8	4	2	2	18.0	17.28
				8	7	2	2	18.0	17.27
				15	0	2	2	18.0	17.20
				26740	819	QPSK	1	0	0
	1	7	0				0	20.0	19.15
	1	14	0				0	20.0	19.18
	8	0	1				1	19.0	18.16
	8	4	1				1	19.0	18.16
	8	7	1				1	19.0	18.17
	15	0	1				1	19.0	18.12
	16QAM	1	0			1	1	19.0	18.48
		1	7			1	1	19.0	18.48
		1	14			1	1	19.0	18.49
		8	0			2	2	18.0	17.21
		8	4			2	2	18.0	17.23
		8	7			2	2	18.0	17.19
		15	0			2	2	18.0	17.14
		26775	822.5			QPSK	1	0	0
	1			7	0		0	20.0	19.13
1	14			0	0		20.0	19.06	
8	0			1	1		19.0	18.12	
8	4			1	1		19.0	18.14	
8	7			1	1		19.0	18.11	
15	0			1	1		19.0	18.08	
16QAM	1			0	1	1	19.0	18.43	
	1			7	1	1	19.0	18.40	
	1			14	1	1	19.0	18.46	
	8			0	2	2	18.0	17.17	
	8			4	2	2	18.0	17.19	
	8			7	2	2	18.0	17.16	
	15			0	2	2	18.0	17.13	

Band : 26

BW (MHz)	UL Ch #	Freq. (MHz)	Modulation	UL RB Allocation	UL RB Start	Target MPR	Meas. MPR	Tune-up Limit (dBm)	Meas. Pwr Avg (dBm)		
1.4	26697	814.7	QPSK	1	0	0	0	20.0	19.16		
				1	2	0	0	20.0	19.32		
				1	5	0	0	20.0	19.19		
				3	0	0	0	20.0	19.25		
				3	1	0	0	20.0	19.29		
				3	3	0	0	20.0	19.24		
			6	0	1	1	19.0	18.22			
			16QAM	1	0	1	1	19.0	18.55		
				1	2	1	1	19.0	18.65		
				1	5	1	1	19.0	18.50		
				3	0	1	1	19.0	18.31		
				3	1	1	1	19.0	18.32		
	3	3		1	1	19.0	18.30				
	26740	819	QPSK	1	0	0	0	20.0	19.13		
				1	2	0	0	20.0	19.24		
				1	5	0	0	20.0	19.10		
				3	0	0	0	20.0	19.17		
				3	1	0	0	20.0	19.20		
				3	3	0	0	20.0	19.18		
				6	0	1	1	19.0	18.14		
				16QAM	1	0	1	1	19.0	18.43	
					1	2	1	1	19.0	18.58	
					1	5	1	1	19.0	18.46	
					3	0	1	1	19.0	18.25	
					3	1	1	1	19.0	18.24	
			3		3	1	1	19.0	18.22		
			26783	823.3	QPSK	1	0	0	0	20.0	19.03
						1	2	0	0	20.0	19.15
						1	5	0	0	20.0	19.02
						3	0	0	0	20.0	19.11
3						1	0	0	20.0	19.10	
3	3	0				0	20.0	19.09			
6	0	1			1	19.0	18.17				
16QAM	1	0			1	1	19.0	18.42			
	1	2			1	1	19.0	18.54			
	1	5			1	1	19.0	18.43			
	3	0			1	1	19.0	18.21			
	3	1			1	1	19.0	18.23			
	3	3	1	1	19.0	18.23					
6	0	2	2	18.0	17.26						

6.4 Output Power and SAR test required for WLAN and Bluetooth

According to KDB248227D01, The initial test configuration for 2.4 GHz and 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

1. The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
2. If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
3. If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
4. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.

*Transmitting duty was 100% on all WLAN tests.

WLAN 2.4GHz (DTS Band)

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Tune-up upper Power	Measured average Power	Initial test configuration	Note(s)
2.4	11b	1 Mbps	1	2412	6.00	4.92		
			6	2437	6.00	5.38		
			11	2462	6.00	5.90	Yes	
	11g	6 Mbps	1	2412	7.50	6.71		
			6	2437	7.50	6.89		
			11	2462	7.50	7.28		
	11n-20	6.5 Mbps (MCS 0)	1	2412	7.50	6.70		
			6	2437	7.50	6.88		
			11	2462	7.50	7.27		
	11n-40	13.5 Mbps (MCS 0)	3	2422	7.50	7.01		
			6	2437	7.50	6.80		
			9	2452	7.50	7.26		

Note(s):

1. Provided higher maximum output power is not specified for the other channels, channels 1, 6 and 11 are used to configure DSSS and OFDM channels for SAR measurements; otherwise, the closest adjacent channel with the highest maximum output power specified for production units should be tested instead of channels 1, 6 or 11.
2. When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.
3. Initial SAR test channel was chosen. (shaded blue frame)

Bluetooth

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Measured average Power (dBm)	Tune-up upper Power (dBm)	SAR Test (Yes/No)	Note(s)
					BT Ant Tx	BT Ant Tx		
2.4	Bluetooth BR	DH5	0	2402	4.77	5.50	Yes	
			39	2441	5.21			
			78	2480	4.54			
	Bluetooth EDR	2DH5	0	2402	1.49	2.50	No	1
			39	2441	2.25			
			78	2480	2.11			
	Bluetooth EDR	3DH5	0	2402	1.50	2.50	No	1
			39	2441	2.26			
			78	2480	2.13			
	BTLE	-	37	2402	4.83	5.50	Yes	
			17	2440	5.32			
			39	2480	4.65			

Note(s):

1. According to KDB865664, SAR measurement is not required for EDR when the specified tune-up tolerances for EDR is lower than BR.
2. SAR test channel was chosen. (shaded blue frame)

Wi-Fi 5GHz (U-NII-1 and U-NII-2A Bands)

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Measured average Power (dBm)	Tune-up upper Power (dBm)	SAR Test (Yes/No)	Note(s)
					Main Ant Tx	Main Ant Tx		
5.2 (U-NII-1)	802.11a	6 Mbps	36	5180	7.72	8.1	No	2
			44	5220	7.84			
			48	5240	7.74			
	802.11n -20	6.5 Mbps	36	5180	7.72	8.1	No	2
			44	5220	7.84			
			48	5240	7.77			
802.11n-40	13.5 Mbps	38	5190	7.86	8.1	No	2,3	
		46	5230	8.01				
5.3 (U-NII-2A)	802.11a	6 Mbps	52	5260	7.86	8.3	No	2
			60	5300	8.22			
			64	5320	8.14			
	802.11n-20	6.5 Mbps	52	5260	7.87	8.3	No	2
			60	5300	8.23			
			64	5320	8.14			
	802.11n-40	13.5 Mbps	54	5270	8.08	8.3	Yes	2,3,4
			62	5310	8.17			

Wi-Fi 5GHz (U-NII-2C Band)

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Measured average Power (dBm)	Tune-up upper Power (dBm)	SAR Test (Yes/No)	Note(s)
					Main Ant Tx	Main Ant Tx		
5.5 (U-NII-2C)	802.11a	6 Mbps	100	5500	8.32	9.6	No	2
			116	5580	9.00			
			140	5700	9.50			
	802.11n-20	6.5 Mbps	100	5500	8.33	9.6	No	2
			116	5580	9.01			
			140	5700	9.51			
802.11n-40	13.5 Mbps	102	5510	8.57	9.6	Yes	2,4	
		110	5550	8.92				
		134	5670	9.40				

Note(s):

- Output Power and SAR measurement is not required for 802.11a/n HT20 channels when the specified tune-up tolerances for 802.11a/n HT20 are lower than 802.11n HT40 and the measured SAR is ≤ 1.2 W/Kg.
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n modes, the channel with the largest bandwidth and lowest data rate is selected (i.e. 802.11n HT40).
- When the specified maximum output power is the same for both UNII band I and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest *reported* SAR for UNII band 2A is
 - ≤ 1.2 W/kg, SAR is not required for UNII band I
 - > 1.2 W/kg, both bands should be tested independently for SAR.
- According to KDB248227D01, SAR test channel was chosen. (shaded blue frame)

SECTION7: Test surrounding

7.1 Measurement uncertainty

This measurement uncertainty budget is suggested by IEEE Std 1528(2013) and IEC62209-2:2010, and determined by Schmid & Partner Engineering AG (DASY5/6 Uncertainty Budget). Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz Section 2.8.1., when the highest measured SAR(1g) within a frequency band is $< 1.5\text{W/kg}$, the extensive SAR measurement uncertainty analysis described in IEEE Std.1528 (2013) is not required in SAR reports submitted for equipment approval.

SECTION8: Parameter Check

The dielectric parameters were checked prior to assessment using the DAK dielectric probe kit. The dielectric parameters measurement is reported in each correspondent section.

According to KDB865664 D01, +/- 5% tolerances are required for ϵ_r and σ and then below table which is the target value of the simulated tissue liquid is quoted from KDB865664 D01.

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m³)

8.1 For SAR system check

DIELECTRIC PARAMETERS MEASUREMENT RESULTS												
Date	Ambient Temp. [deg.c]	Relative Humidity [%]	Liquid type	Liquid Temp. [deg.c]	Measured Frequency [MHz]	Target [σ]	Target [ϵ_r]	Measure [σ]	Measure [ϵ_r]	Deviation σ [%]	Deviation ϵ_r [%]	Remarks
2020/1/7	23	45	HBBL600-10000	22.1	835.0	0.90	41.50	0.938	42.951	4.222	3.496	*1
2020/1/9	23	40	HBBL600-10000	22.5	835.0	0.90	41.50	0.921	41.627	2.333	0.306	*1
2020/1/14	21	45	HBBL600-10000	20.7	835.0	0.90	41.50	0.914	42.748	1.556	3.007	*1
2020/1/15	22	41	HBBL600-10000	21.3	2600.0	1.96	39.01	1.945	38.141	-0.949	-2.225	*2
2020/1/20	22	40	HSL1900	21.8	1900.0	1.40	40.00	1.409	39.369	0.643	-1.578	*2
2020/1/21	21	40	HBBL600-10000	19.8	2450.0	1.80	39.20	1.798	39.292	-0.111	0.235	*1
2020/1/23	22	40	HBBL600-10000	21.5	5250.0	4.71	35.93	4.571	35.409	-2.874	-1.446	*2
2020/1/24	22	40	HBBL600-10000	21.1	5600.0	5.07	35.53	4.910	35.019	-3.060	-1.434	*2
2020/3/24	22	42	HBBL600-10000	21.8	835.0	0.90	41.50	0.905	40.112	0.556	-3.345	*1
2020/3/26	22.5	45	HBBL600-10000	22.0	1900.0	1.40	40.00	1.415	38.326	1.071	-4.185	*2

σ : Conductivity / ϵ_r : Relative Permittivity

*1 The Target value is a parameter defined in KDB 865664D01.

*2 The dielectric parameters should be linearly interpolated between the closest pair of target frequencies to determine the applicable dielectric parameters corresponding to the device test frequency.

8.2 For SAR measurement

DIELECTRIC PARAMETERS MEASUREMENT RESULTS												
Date	Ambient Temp. [deg.c]	Relative Humidity [%]	Liquid type	Liquid Temp. [deg.c]	Measured Frequency [MHz]	Target [σ]	Target [εr]	Measure [σ]	Measure [εr]	Deviation σ [%]	Deviation εr [%]	Remarks
2020/1/8	23.0	45	HBBL600-10000	22.1	826.4	0.90	41.54	0.935	42.991	3.966	3.481	*2
2020/1/8	23.0	45	HBBL600-10000	22.1	836.6	0.90	41.50	0.938	42.943	4.023	3.477	*2
2020/1/8	23.0	45	HBBL600-10000	22.1	846.6	0.91	41.50	0.941	42.920	3.124	3.422	*2
2020/1/9	23.0	40	HBBL600-10000	22.5	836.6	0.90	41.50	0.922	41.622	2.249	0.294	*2
2020/1/9	23.0	40	HBBL600-10000	22.5	836.5	0.90	41.50	0.922	41.623	2.261	0.296	*2
2020/1/9	23.0	40	HBBL600-10000	22.5	844.0	0.91	41.50	0.924	41.600	1.573	0.241	*2
2020/1/14	21.0	45	HBBL600-10000	20.7	836.5	0.90	41.50	0.914	42.744	1.374	2.998	*2
2020/1/14	21.0	45	HBBL600-10000	20.7	844.0	0.91	41.50	0.917	42.720	0.803	2.940	*2
2020/1/14	21.0	45	HBBL600-10000	20.7	819.0	0.90	41.58	0.907	42.808	0.918	2.946	*2
2020/1/15	21.0	42	HBBL600-10000	21.0	819.0	0.90	41.58	0.907	42.808	0.918	2.946	*2
2020/1/16	21.0	40	HBBL600-10000	20.8	2510.0	1.87	39.12	1.876	38.332	0.565	-2.023	*2
2020/1/17	21.0	40	HBBL600-10000	20.8	2510.0	1.87	39.12	1.876	38.332	0.565	-2.023	*2
2020/1/17	21.0	40	HBBL600-10000	20.8	2535.0	1.89	39.09	1.893	38.318	0.014	-1.979	*2
2020/1/17	21.0	40	HBBL600-10000	20.8	2560.0	1.92	39.06	1.909	38.254	-0.573	-2.063	*2
2020/1/20	22.0	40	HSL1900	21.8	1852.4	1.40	40.00	1.375	39.614	-1.786	-0.965	*2
2020/1/20	22.0	40	HSL1900	21.8	1880.0	1.40	40.00	1.397	39.459	-0.214	-1.352	*2
2020/1/20	22.0	40	HSL1900	21.8	1907.6	1.40	40.00	1.414	39.330	1.000	-1.675	*2
2020/1/20	22.0	40	HSL1900	21.8	1900.0	1.40	40.00	1.409	39.369	0.643	-1.578	*2
2020/1/21	21.0	40	HSL1900	20.0	1860.0	1.40	40.00	1.382	39.570	-1.286	-1.075	*2
2020/1/21	21.0	40	HSL1900	20.0	1880.0	1.40	40.00	1.397	39.459	-0.214	-1.352	*2
2020/1/21	21.0	40	HSL1900	20.0	1900.0	1.40	40.00	1.409	39.369	0.643	-1.578	*2
2020/1/22	21.0	40	HBBL600-10000	19.8	2412.0	1.77	39.27	1.766	39.306	-0.013	0.098	*2
2020/1/22	21.0	40	HBBL600-10000	19.8	2437.0	1.79	39.22	1.788	39.295	-0.025	0.183	*2
2020/1/22	21.0	40	HBBL600-10000	19.8	2462.0	1.81	39.18	1.809	39.287	-0.226	0.261	*2
2020/1/22	21.0	40	HBBL600-10000	19.8	2441.0	1.79	39.22	1.791	39.294	-0.056	0.199	*2
2020/1/23	22.0	42	HBBL600-10000	20.5	2440.0	1.79	39.22	1.790	39.295	-0.062	0.197	*2
2020/1/23	22.0	40	HBBL600-10000	21.5	5310.0	4.77	35.86	4.700	35.337	-1.421	-1.458	*2
2020/1/24	22.0	40	HBBL600-10000	21.1	5270.0	4.73	35.91	4.611	35.361	-2.449	-1.517	*2
2020/1/24	22.0	40	HBBL600-10000	21.1	5310.0	4.77	35.86	4.700	35.337	-1.421	-1.458	*2
2020/1/24	22.0	40	HBBL600-10000	21.1	5510.0	4.97	35.63	4.868	35.285	-2.106	-0.972	*2
2020/1/24	22.0	40	HBBL600-10000	21.1	5550.0	5.01	35.59	4.879	35.190	-2.688	-1.112	*2
2020/1/24	22.0	40	HBBL600-10000	21.1	5670.0	5.14	35.45	5.031	34.857	-2.059	-1.669	*2
2020/3/24	22.0	42	HBBL600-10000	21.8	824.2	0.90	41.56	0.901	40.149	0.205	-3.386	*2
2020/3/24	22.0	42	HBBL600-10000	21.8	836.6	0.90	41.50	0.906	40.107	0.474	-3.357	*2
2020/3/24	22.0	42	HBBL600-10000	21.8	848.6	0.91	41.50	0.910	40.075	-0.508	-3.434	*2
2020/3/26	22.5	45	HBBL600-10000	22.0	1850.2	1.40	40.00	1.383	38.367	-1.214	-4.083	*2
2020/3/26	22.5	45	HBBL600-10000	22.0	1880.0	1.40	40.00	1.402	38.322	0.143	-4.195	*2
2020/3/26	22.5	45	HBBL600-10000	22.0	1909.8	1.40	40.00	1.421	38.327	1.500	-4.183	*2

σ : Conductivity / εr: Relative Permittivity

*1 The Target value is a parameter defined in KDB 865664D01.

*2 The dielectric parameters should be linearly interpolated between the closest pair of target frequencies to determine the applicable dielectric parameters corresponding to the device test frequency.

SECTION9: System Check confirmation

The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.

The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm ± 0.5 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm ± 0.5 cm for measurements > 3 GHz.

The DASY system with an E-Field Probe was used for the measurements.

The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom).

The standard measuring distance was 10 mm (above 1GHz to 6GHz) and 15 mm (below 1GHz) from dipole center to the simulating liquid surface.

The coarse grid with a grid spacing of 12 mm (1GHz to 3GHz) and 15 mm (below 1GHz) was aligned with the dipole.

For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.

Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.

Distance between probe sensors and phantom surface was set to 3 mm.

For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm

The dipole input power (forward power) was 100 mW(For 5GHz band) or 250 mW(For other band).

The results are normalized to 1 W input power.

Target Value

Freq [MHz]	Model,S/N	Head		Body	
		(SPEAG) 1g [W/kg]	(SPEAG) 10g[W/kg]	(SPEAG) 1g [W/kg]	(SPEAG) 10g[W/kg]
150	-	-	-	-	-
300	-	-	-	-	-
450	D450,1051	4.48	2.996	4.4	2.948
600	D600,1003	6.80	4.44	6.84	4.52
750	D750,1058	8.24	5.40	8.60	5.72
835	D835,4d149	9.56	6.24	9.84	6.44
900	D900,1d168	10.52	6.72	10.72	6.96
915	-	-	-	-	-
1450	D1450V2,1024	28.44	15.76	29.52	16.60
1610	-	-	-	-	-
1640	D1640V2,320	32.76	17.76	33.80	18.44
1750	D1750,1089	35.68	18.96	36.64	19.48
1800	D1800,2d040	38.72	20.20	38.96	20.52
1900	D1900,5d169	39.48	20.64	39.48	20.88
1950	D1950,1149	41.60	21.40	40.00	20.80
2300	D2300,1078	48.00	23.04	46.80	22.52
2450	D2450,713	54.80	25.40	53.20	24.72
2600	D2600,1030	57.20	25.16	54.80	24.24
3000	-	-	-	-	-
3500	D3500,1052	66.30	25.00	62.10	23.30
5250	D5GHV2,1020	82.20	23.50	76.60	2.14
5600	D5GHV2,1020	85.00	24.20	80.90	22.40
5800	D5GHV2,1020	81.50	2.30	-	-

*1 The target(reference) SAR values can be obtained from the calibration certificate of system validation dipoles(Refer to Appendix 2). The target SAR values are SAR measured value in the calibration certificate scaled to 1W.

Date Tested	Test Freq	Model,S/N	T.S. Liquid		Measured Results		Target (Ref. Value)	Delta ±10 %
					Zoom Scan	Normalize to 1 W		
2020/1/7	835	D835,4d149	Head	1g	2.40	9.6	9.56	0.4
				10g	1.56	6.2	6.24	0.0
2020/1/9	835	D835,4d149	Head	1g	2.48	9.9	9.56	3.8
				10g	1.61	6.44	6.24	3.2
2020/1/14	835	D835,4d149	Head	1g	2.51	10.0	9.56	5.0
				10g	1.66	6.64	6.24	6.4
2020/1/15	2600	D2600,1030	Head	1g	14.90	59.60	57.20	4.2
				10g	6.67	26.68	25.16	6.0
2020/1/20	1900	D1900,5d169	Head	1g	10.50	42.00	39.48	6.4
				10g	5.44	21.76	20.64	5.4
2020/1/21	2450	D2450,713	Head	1g	13.30	53.20	54.80	-2.9
				10g	6.21	24.84	25.40	-2.2
2020/1/23	5250	D5GHV2,1020	Head	1g	8.38	83.80	82.20	1.9
				10g	2.40	24.00	23.50	2.1
2020/1/24	5600	D5GHV2,1020	Head	1g	9.03	90.30	85.00	6.2
				10g	2.58	25.80	24.20	6.6
2020/3/24	835	D835,4d149	Head	1g	2.56	10.24	9.56	7.1
				10g	1.68	6.72	6.24	7.7
2020/3/26	1900	D1900,5d169	Head	1g	10.10	40.40	39.48	2.3
				10g	5.21	20.84	20.64	1.0

SECTION10: Measured and Reported (Scaled) SAR Results

WLAN SAR Test Reduction criteria are as follows

● **KDB 248227 D01 (SAR Guidance for 802.11(Wi-Fi) Transmitters):**

SAR test reduction for 802.11 WLAN transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ◇ ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- ◇ > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- ◇ For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- ◇ When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- ◇ When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

SAR Test Reduction criteria(excluding WLAN) are as follows

KDB 447498 D01 (General RF Exposure Guidance):

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ◇ ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ◇ ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ◇ ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

- According to Notice 2016-DRS001 based on the IEEE1528 and IEC 62209 requirements, the low, mid and high frequency channels for the configuration with the highest SAR value must be tested regardless of the SAR value measured.
- When reported SAR value is exceed 1.2W/kg(if any), device holder perturbation verification is required; however, since distance between device holder and antenna of EUT is enough, it was not conducted.
- Reported SAR= Measured SAR [W/kg] · Scaled factor
* Scaled factor = Maximum tune-up tolerance limit [mW] / Measured power [mW]
- Maximum tune-up tolerance limit is by the specification from a customer.

Note: Measured value is rounded round off to three decimal places

10.1 WCDMA Band 2

Test Position	Dist. (mm)	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
					Tune-up limit	Meas.	Meas.	Scaled	
Front	5	Rel 99 RMC 12.2 kbps	9262	1852.4	15.00	14.46			
			9400	1880.0	15.00	14.37	0.131	0.151	
			9538	1907.6	15.00	14.42			
Rear	5	Rel 99 RMC 12.2 kbps	9262	1852.4	15.00	14.46	0.247	0.280	
			9400	1880.0	15.00	14.37	0.368	0.425	1
			9538	1907.6	15.00	14.42	0.340	0.389	
Left	5	Rel 99 RMC 12.2 kbps	9262	1852.4	15.00	14.46			
			9400	1880.0	15.00	14.37	0.034	0.039	
			9538	1907.6	15.00	14.42			
Right	5	Rel 99 RMC 12.2 kbps	9262	1852.4	15.00	14.46			
			9400	1880.0	15.00	14.37	0.031	0.036	
			9538	1907.6	15.00	14.42			
Top	5	Rel 99 RMC 12.2 kbps	9262	1852.4	15.00	14.46			
			9400	1880.0	15.00	14.37	0.011	0.013	
			9538	1907.6	15.00	14.42			
Bottom	5	Rel 99 RMC 12.2 kbps	9262	1852.4	15.00	14.46			
			9400	1880.0	15.00	14.37	0.209	0.242	
			9538	1907.6	15.00	14.42			

10.2 WCDMA Band 5

Test Position	Dist. (mm)	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
					Tune-up limit	Meas.	Meas.	Scaled	
Front	5	Rel 99 RMC 12.2 kbps	4132	826.4	21.50	20.94			
			4183	836.6	21.50	21.02	0.311	0.347	
			4233	846.6	21.50	21.17			
Rear	5	Rel 99 RMC 12.2 kbps	4132	826.4	21.50	20.94	0.876	0.997	2
			4183	836.6	21.50	21.02	0.858	0.958	
			4233	846.6	21.50	21.17	0.906	0.978	
Left	5	Rel 99 RMC 12.2 kbps	4132	826.4	21.50	20.94			
			4183	836.6	21.50	21.02	0.244	0.273	
			4233	846.6	21.50	21.17			
Right	5	Rel 99 RMC 12.2 kbps	4132	826.4	21.50	20.94			
			4183	836.6	21.50	21.02	0.103	0.115	
			4233	846.6	21.50	21.17			
Top	5	Rel 99 RMC 12.2 kbps	4132	826.4	21.50	20.94			
			4183	836.6	21.50	21.02	0.009	0.011	
			4233	846.6	21.50	21.17			
Bottom	5	Rel 99 RMC 12.2 kbps	4132	826.4	21.50	20.94			
			4183	836.6	21.50	21.02	0.143	0.160	
			4233	846.6	21.50	21.17			

10.3 LTE Band 2

Test Position	Dist. (mm)	Modulation	UL CH #	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas. Avg	Meas.	Scaled	
Front	5	QPSK	18700	1860	1	49	19.0	18.29			
			18700	1860	1	0	19.0	18.02			
			18700	1860	1	99	19.0	17.87			
			18900	1880	1	49	19.0	18.25			
			18900	1880	1	0	19.0	17.91			
			18900	1880	1	99	19.0	17.90			
			19100	1900	1	49	19.0	18.30	0.300	0.352	
			19100	1900	1	99	19.0	17.94			
			19100	1900	1	0	19.0	17.93			
			18700	1860	50	49	18.0	17.28			
			18700	1860	50	0	18.0	17.28			
			18700	1860	50	24	18.0	17.27			
			18900	1880	50	0	18.0	17.16			
			18900	1880	50	24	18.0	17.15			
			18900	1880	50	49	18.0	17.07			
			19100	1900	50	0	18.0	17.29	0.230	0.271	
			19100	1900	50	49	18.0	17.28			
			19100	1900	50	24	18.0	17.23			
			18700	1860	100	0	18.0	17.28			
			19100	1900	100	0	18.0	17.27			
18900	1880	100	0	18.0	17.10						
Rear	5	QPSK	18700	1860	1	49	19.0	18.29	0.604	0.711	
			18700	1860	1	0	19.0	18.02			
			18700	1860	1	99	19.0	17.87			
			18900	1880	1	49	19.0	18.25	0.676	0.803	
			18900	1880	1	0	19.0	17.91			
			18900	1880	1	99	19.0	17.90			
			19100	1900	1	49	19.0	18.30	0.804	0.945	3
			19100	1900	1	99	19.0	17.94			
			19100	1900	1	0	19.0	17.93			
			18700	1860	50	49	18.0	17.28			
			18700	1860	50	0	18.0	17.28			
			18700	1860	50	24	18.0	17.27			
			18900	1880	50	0	18.0	17.16			
			18900	1880	50	24	18.0	17.15			
			18900	1880	50	49	18.0	17.07			
			19100	1900	50	0	18.0	17.29	0.600	0.707	
			19100	1900	50	49	18.0	17.28			
			19100	1900	50	24	18.0	17.23			
			18700	1860	100	0	18.0	17.28	0.642	0.758	
			19100	1900	100	0	18.0	17.27			
18900	1880	100	0	18.0	17.10						
Left	5	QPSK	18700	1860	1	49	19.0	18.29			
			18700	1860	1	0	19.0	18.02			
			18700	1860	1	99	19.0	17.87			
			18900	1880	1	49	19.0	18.25			
			18900	1880	1	0	19.0	17.91			
			18900	1880	1	99	19.0	17.90			
			19100	1900	1	49	19.0	18.30	0.090	0.106	
			19100	1900	1	99	19.0	17.94			
			19100	1900	1	0	19.0	17.93			
			18700	1860	50	49	18.0	17.28			
			18700	1860	50	0	18.0	17.28			
			18700	1860	50	24	18.0	17.27			
			18900	1880	50	0	18.0	17.16			
			18900	1880	50	24	18.0	17.15			
			18900	1880	50	49	18.0	17.07			
			19100	1900	50	0	18.0	17.29	0.063	0.074	
			19100	1900	50	49	18.0	17.28			
			19100	1900	50	24	18.0	17.23			
			18700	1860	100	0	18.0	17.28			
			19100	1900	100	0	18.0	17.27			
18900	1880	100	0	18.0	17.10						

(Continued)

Test Position	Dist. (mm)	Modulation	UL CH #	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas. Avg	Meas.	Scaled	
Right	5	QPSK	18700	1860	1	49	19.0	18.29			
			18700	1860	1	0	19.0	18.02			
			18700	1860	1	99	19.0	17.87			
			18900	1880	1	49	19.0	18.25			
			18900	1880	1	0	19.0	17.91			
			18900	1880	1	99	19.0	17.90			
			19100	1900	1	49	19.0	18.30	0.113	0.133	
			19100	1900	1	99	19.0	17.94			
			19100	1900	1	0	19.0	17.93			
			18700	1860	50	49	18.0	17.28			
			18700	1860	50	0	18.0	17.28			
			18700	1860	50	24	18.0	17.27			
			18900	1880	50	0	18.0	17.16			
			18900	1880	50	24	18.0	17.15			
			18900	1880	50	49	18.0	17.07			
			19100	1900	50	0	18.0	17.29	0.082	0.097	
			19100	1900	50	49	18.0	17.28			
			19100	1900	50	24	18.0	17.23			
			18700	1860	100	0	18.0	17.28			
			19100	1900	100	0	18.0	17.27			
			18900	1880	100	0	18.0	17.10			
Top	5	QPSK	18700	1860	1	49	19.0	18.29			
			18700	1860	1	0	19.0	18.02			
			18700	1860	1	99	19.0	17.87			
			18900	1880	1	49	19.0	18.25			
			18900	1880	1	0	19.0	17.91			
			18900	1880	1	99	19.0	17.90			
			19100	1900	1	49	19.0	18.30	0.035	0.041	
			19100	1900	1	99	19.0	17.94			
			19100	1900	1	0	19.0	17.93			
			18700	1860	50	49	18.0	17.28			
			18700	1860	50	0	18.0	17.28			
			18700	1860	50	24	18.0	17.27			
			18900	1880	50	0	18.0	17.16			
			18900	1880	50	24	18.0	17.15			
			18900	1880	50	49	18.0	17.07			
			19100	1900	50	0	18.0	17.29	0.022	0.026	
			19100	1900	50	49	18.0	17.28			
			19100	1900	50	24	18.0	17.23			
			18700	1860	100	0	18.0	17.28			
			19100	1900	100	0	18.0	17.27			
			18900	1880	100	0	18.0	17.10			
Bottom	5	QPSK	18700	1860	1	49	19.0	18.29			
			18700	1860	1	0	19.0	18.02			
			18700	1860	1	99	19.0	17.87			
			18900	1880	1	49	19.0	18.25			
			18900	1880	1	0	19.0	17.91			
			18900	1880	1	99	19.0	17.90			
			19100	1900	1	49	19.0	18.30	0.554	0.651	
			19100	1900	1	99	19.0	17.94			
			19100	1900	1	0	19.0	17.93			
			18700	1860	50	49	18.0	17.28			
			18700	1860	50	0	18.0	17.28			
			18700	1860	50	24	18.0	17.27			
			18900	1880	50	0	18.0	17.16			
			18900	1880	50	24	18.0	17.15			
			18900	1880	50	49	18.0	17.07			
			19100	1900	50	0	18.0	17.29	0.420	0.495	
			19100	1900	50	49	18.0	17.28			
			19100	1900	50	24	18.0	17.23			
			18700	1860	100	0	18.0	17.28			
			19100	1900	100	0	18.0	17.27			
			18900	1880	100	0	18.0	17.10			

10.4 LTE Band 5

Test Position	Dist. (mm)	Modulation	UL CH #	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.			
							Tune-up limit	Meas. Avg	Meas.	Scaled				
Front	5	QPSK	20450	829	1	24	20.0	19.03						
			20450	829	1	0	20.0	19.00						
			20450	829	1	49	20.0	18.93						
			20525	836.5	1	24	20.0	19.01						
			20525	836.5	1	49	20.0	18.92						
			20525	836.5	1	0	20.0	18.88						
			20600	844	1	24	20.0	19.04	0.106	0.132				
			20600	844	1	0	20.0	18.89						
			20600	844	1	49	20.0	18.86						
			20450	829	25	24	19.0	18.02						
			20450	829	25	12	19.0	18.01						
			20450	829	25	0	19.0	18.00						
			20525	836.5	25	0	19.0	18.07	0.083	0.103				
			20525	836.5	25	12	19.0	18.05						
			20525	836.5	25	24	19.0	18.00						
			20600	844	25	0	19.0	18.06						
			20600	844	25	12	19.0	18.03						
			20600	844	25	24	19.0	17.96						
			Rear	5	QPSK	20450	829	1	24	20.0	19.03			
						20450	829	1	0	20.0	19.00			
20450	829	1				49	20.0	18.93						
20525	836.5	1				24	20.0	19.01						
20525	836.5	1				49	20.0	18.92						
20525	836.5	1				0	20.0	18.88						
20600	844	1				24	20.0	19.04	0.587	0.732	4			
20600	844	1				0	20.0	18.89						
20600	844	1				49	20.0	18.86						
20450	829	25				24	19.0	18.02						
20450	829	25				12	19.0	18.01						
20450	829	25				0	19.0	18.00						
20525	836.5	25				0	19.0	18.07	0.484	0.600				
20525	836.5	25				12	19.0	18.05						
20525	836.5	25				24	19.0	18.00						
20600	844	25				0	19.0	18.06						
20600	844	25				12	19.0	18.03						
20600	844	25				24	19.0	17.96						
Left	5	QPSK				20450	829	1	24	20.0	19.03			
						20450	829	1	0	20.0	19.00			
			20450	829	1	49	20.0	18.93						
			20525	836.5	1	24	20.0	19.01						
			20525	836.5	1	49	20.0	18.92						
			20525	836.5	1	0	20.0	18.88						
			20600	844	1	24	20.0	19.04	0.146	0.182				
			20600	844	1	0	20.0	18.89						
			20600	844	1	49	20.0	18.86						
			20450	829	25	24	19.0	18.02						
			20450	829	25	12	19.0	18.01						
			20450	829	25	0	19.0	18.00						
			20525	836.5	25	0	19.0	18.07	0.135	0.167				
			20525	836.5	25	12	19.0	18.05						
			20525	836.5	25	24	19.0	18.00						
			20600	844	25	0	19.0	18.06						
			20600	844	25	12	19.0	18.03						
			20600	844	25	24	19.0	17.96						
			20525	836.5	50	0	19.0	18.06						
			20450	829	50	0	19.0	18.04						
20600	844	50	0	19.0	18.01									

(Continued)

Test Position	Dist. (mm)	Modulation	UL CH #	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas. Avg	Meas.	Scaled	
Right	5	QPSK	20450	829	1	24	20.0	19.03			
			20450	829	1	0	20.0	19.00			
			20450	829	1	49	20.0	18.93			
			20525	836.5	1	24	20.0	19.01			
			20525	836.5	1	49	20.0	18.92			
			20525	836.5	1	0	20.0	18.88			
			20600	844	1	24	20.0	19.04	0.125	0.156	
			20600	844	1	0	20.0	18.89			
			20600	844	1	49	20.0	18.86			
			20450	829	25	24	19.0	18.02			
			20450	829	25	12	19.0	18.01			
			20450	829	25	0	19.0	18.00			
			20525	836.5	25	0	19.0	18.07	0.106	0.131	
			20525	836.5	25	12	19.0	18.05			
			20525	836.5	25	24	19.0	18.00			
			20600	844	25	0	19.0	18.06			
			20600	844	25	12	19.0	18.03			
			20600	844	25	24	19.0	17.96			
			20525	836.5	50	0	19.0	18.06			
			20450	829	50	0	19.0	18.04			
20600	844	50	0	19.0	18.01						
Top	5	QPSK	20450	829	1	24	20.0	19.03			
			20450	829	1	0	20.0	19.00			
			20450	829	1	49	20.0	18.93			
			20525	836.5	1	24	20.0	19.01			
			20525	836.5	1	49	20.0	18.92			
			20525	836.5	1	0	20.0	18.88			
			20600	844	1	24	20.0	19.04	0.005	0.006	
			20600	844	1	0	20.0	18.89			
			20600	844	1	49	20.0	18.86			
			20450	829	25	24	19.0	18.02			
			20450	829	25	12	19.0	18.01			
			20450	829	25	0	19.0	18.00			
			20525	836.5	25	0	19.0	18.07	0.004	0.005	
			20525	836.5	25	12	19.0	18.05			
			20525	836.5	25	24	19.0	18.00			
			20600	844	25	0	19.0	18.06			
			20600	844	25	12	19.0	18.03			
			20600	844	25	24	19.0	17.96			
			20525	836.5	50	0	19.0	18.06			
			20450	829	50	0	19.0	18.04			
20600	844	50	0	19.0	18.01						
Bottom	5	QPSK	20450	829	1	24	20.0	19.03			
			20450	829	1	0	20.0	19.00			
			20450	829	1	49	20.0	18.93			
			20525	836.5	1	24	20.0	19.01			
			20525	836.5	1	49	20.0	18.92			
			20525	836.5	1	0	20.0	18.88			
			20600	844	1	24	20.0	19.04	0.055	0.069	
			20600	844	1	0	20.0	18.89			
			20600	844	1	49	20.0	18.86			
			20450	829	25	24	19.0	18.02			
			20450	829	25	12	19.0	18.01			
			20450	829	25	0	19.0	18.00			
			20525	836.5	25	0	19.0	18.07	0.042	0.052	
			20525	836.5	25	12	19.0	18.05			
			20525	836.5	25	24	19.0	18.00			
			20600	844	25	0	19.0	18.06			
			20600	844	25	12	19.0	18.03			
			20600	844	25	24	19.0	17.96			
			20525	836.5	50	0	19.0	18.06			
			20450	829	50	0	19.0	18.04			
20600	844	50	0	19.0	18.01						

10.5 LTE Band 7

Test Position	Dist. (mm)	Modulation	UL CH #	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas. Avg	Meas.	Scaled	
Front	5	QPSK	20850	2510	1	49	21.5	20.92	0.420	0.480	
			20850	2510	1	99	21.5	20.65			
			20850	2510	1	0	21.5	20.50			
			21100	2535	1	49	21.5	20.91			
			21100	2535	1	99	21.5	20.88			
			21100	2535	1	0	21.5	20.62			
			21350	2560	1	49	21.5	20.91			
			21350	2560	1	0	21.5	20.77			
			21350	2560	1	99	21.5	20.67			
			20850	2510	50	49	20.5	20.15	0.357	0.387	
			20850	2510	50	24	20.5	19.97			
			20850	2510	50	0	20.5	19.70			
			21100	2535	50	49	20.5	20.06			
			21100	2535	50	24	20.5	20.03			
			21100	2535	50	0	20.5	19.96			
			21350	2560	50	24	20.5	20.03			
			21350	2560	50	49	20.5	19.89			
			21350	2560	50	0	20.5	19.81			
			21100	2535	100	0	20.5	19.99			
			20850	2510	100	0	20.5	19.90			
21350	2560	100	0	20.5	19.83						
Rear	5	QPSK	20850	2510	1	49	21.5	20.92	0.624	0.713	
			20850	2510	1	99	21.5	20.65			
			20850	2510	1	0	21.5	20.50			
			21100	2535	1	49	21.5	20.91	0.660	0.756	
			21100	2535	1	99	21.5	20.88			
			21100	2535	1	0	21.5	20.62			
			21350	2560	1	49	21.5	20.91	0.759	0.869	5
			21350	2560	1	0	21.5	20.77			
			21350	2560	1	99	21.5	20.67			
			20850	2510	50	49	20.5	20.15	0.488	0.529	
			20850	2510	50	24	20.5	19.97			
			20850	2510	50	0	20.5	19.70			
			21100	2535	50	49	20.5	20.06			
			21100	2535	50	24	20.5	20.03			
			21100	2535	50	0	20.5	19.96			
			21350	2560	50	24	20.5	20.03			
			21350	2560	50	49	20.5	19.89			
			21350	2560	50	0	20.5	19.81			
			21100	2535	100	0	20.5	19.99	0.487	0.548	
			20850	2510	100	0	20.5	19.90			
21350	2560	100	0	20.5	19.83						
Left	5	QPSK	20850	2510	1	49	21.5	20.92	0.135	0.154	
			20850	2510	1	99	21.5	20.65			
			20850	2510	1	0	21.5	20.50			
			21100	2535	1	49	21.5	20.91			
			21100	2535	1	99	21.5	20.88			
			21100	2535	1	0	21.5	20.62			
			21350	2560	1	49	21.5	20.91			
			21350	2560	1	0	21.5	20.77			
			21350	2560	1	99	21.5	20.67			
			20850	2510	50	49	20.5	20.15	0.104	0.113	
			20850	2510	50	24	20.5	19.97			
			20850	2510	50	0	20.5	19.70			
			21100	2535	50	49	20.5	20.06			
			21100	2535	50	24	20.5	20.03			
			21100	2535	50	0	20.5	19.96			
			21350	2560	50	24	20.5	20.03			
			21350	2560	50	49	20.5	19.89			
			21350	2560	50	0	20.5	19.81			
			21100	2535	100	0	20.5	19.99			
			20850	2510	100	0	20.5	19.90			
21350	2560	100	0	20.5	19.83						

(Continued)

Test Position	Dist. (mm)	Modulation	UL CH #	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.		
							Tune-up limit	Meas. Avg	Meas.	Scaled			
Right	5	QPSK	20850	2510	1	49	21.5	20.92	0.274	0.313			
			20850	2510	1	99	21.5	20.65					
			20850	2510	1	0	21.5	20.50					
			21100	2535	1	49	21.5	20.91					
			21100	2535	1	99	21.5	20.88					
			21100	2535	1	0	21.5	20.62					
			21350	2560	1	49	21.5	20.91					
			21350	2560	1	0	21.5	20.77					
			21350	2560	1	99	21.5	20.67					
			20850	2510	50	49	20.5	20.15			0.222	0.241	
			20850	2510	50	24	20.5	19.97					
			20850	2510	50	0	20.5	19.70					
			21100	2535	50	49	20.5	20.06					
			21100	2535	50	24	20.5	20.03					
			21100	2535	50	0	20.5	19.96					
			21350	2560	50	24	20.5	20.03					
			21350	2560	50	49	20.5	19.89					
			21350	2560	50	0	20.5	19.81					
			21100	2535	100	0	20.5	19.99					
			20850	2510	100	0	20.5	19.90					
21350	2560	100	0	20.5	19.83								
Top	5	QPSK	20850	2510	1	49	21.5	20.92	0.254	0.290			
			20850	2510	1	99	21.5	20.65					
			20850	2510	1	0	21.5	20.50					
			21100	2535	1	49	21.5	20.91					
			21100	2535	1	99	21.5	20.88					
			21100	2535	1	0	21.5	20.62					
			21350	2560	1	49	21.5	20.91					
			21350	2560	1	0	21.5	20.77					
			21350	2560	1	99	21.5	20.67					
			20850	2510	50	49	20.5	20.15			0.219	0.237	
			20850	2510	50	24	20.5	19.97					
			20850	2510	50	0	20.5	19.70					
			21100	2535	50	49	20.5	20.06					
			21100	2535	50	24	20.5	20.03					
			21100	2535	50	0	20.5	19.96					
			21350	2560	50	24	20.5	20.03					
			21350	2560	50	49	20.5	19.89					
			21350	2560	50	0	20.5	19.81					
			21100	2535	100	0	20.5	19.99					
			20850	2510	100	0	20.5	19.90					
21350	2560	100	0	20.5	19.83								
Bottom	5	QPSK	20850	2510	1	49	21.5	20.92	0.335	0.383			
			20850	2510	1	99	21.5	20.65					
			20850	2510	1	0	21.5	20.50					
			21100	2535	1	49	21.5	20.91					
			21100	2535	1	99	21.5	20.88					
			21100	2535	1	0	21.5	20.62					
			21350	2560	1	49	21.5	20.91					
			21350	2560	1	0	21.5	20.77					
			21350	2560	1	99	21.5	20.67					
			20850	2510	50	49	20.5	20.15			0.217	0.235	
			20850	2510	50	24	20.5	19.97					
			20850	2510	50	0	20.5	19.70					
			21100	2535	50	49	20.5	20.06					
			21100	2535	50	24	20.5	20.03					
			21100	2535	50	0	20.5	19.96					
			21350	2560	50	24	20.5	20.03					
			21350	2560	50	49	20.5	19.89					
			21350	2560	50	0	20.5	19.81					
			21100	2535	100	0	20.5	19.99					
			20850	2510	100	0	20.5	19.90					
21350	2560	100	0	20.5	19.83								

10.6 LTE Band 26

Test Position	Dist. (mm)	Modulation	UL CH #	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas. Avg	Meas.	Scaled	
Front	5	QPSK	26740	819	1	0	20.0	19.22	0.181	0.217	
			26740	819	1	24	20.0	19.16			
			26740	819	1	49	20.0	19.04			
			26740	819	25	12	19.0	18.19	0.148	0.178	
			26740	819	25	24	19.0	18.18			
			26740	819	25	0	19.0	18.17			
			26740	819	50	0	19.0	18.15			
Rear	5	QPSK	26740	819	1	0	20.0	19.22	0.597	0.714	6
			26740	819	1	24	20.0	19.16			
			26740	819	1	49	20.0	19.04			
			26740	819	25	12	19.0	18.19	0.478	0.576	
			26740	819	25	24	19.0	18.18			
			26740	819	25	0	19.0	18.17			
			26740	819	50	0	19.0	18.15			
Left	5	QPSK	26740	819	1	0	20.0	19.22	0.139	0.166	
			26740	819	1	24	20.0	19.16			
			26740	819	1	49	20.0	19.04			
			26740	819	25	12	19.0	18.19	0.119	0.143	
			26740	819	25	24	19.0	18.18			
			26740	819	25	0	19.0	18.17			
			26740	819	50	0	19.0	18.15			
Right	5	QPSK	26740	819	1	0	20.0	19.22	0.066	0.079	
			26740	819	1	24	20.0	19.16			
			26740	819	1	49	20.0	19.04			
			26740	819	25	12	19.0	18.19	0.052	0.063	
			26740	819	25	24	19.0	18.18			
			26740	819	25	0	19.0	18.17			
			26740	819	50	0	19.0	18.15			
Top	5	QPSK	26740	819	1	0	20.0	19.22	0.004	0.005	
			26740	819	1	24	20.0	19.16			
			26740	819	1	49	20.0	19.04			
			26740	819	25	12	19.0	18.19	0.003	0.003	
			26740	819	25	24	19.0	18.18			
			26740	819	25	0	19.0	18.17			
			26740	819	50	0	19.0	18.15			
Bottom	5	QPSK	26740	819	1	0	20.0	19.22	0.073	0.087	
			26740	819	1	24	20.0	19.16			
			26740	819	1	49	20.0	19.04			
			26740	819	25	12	19.0	18.19	0.059	0.071	
			26740	819	25	24	19.0	18.18			
			26740	819	25	0	19.0	18.17			
			26740	819	50	0	19.0	18.15			

10.7 Bluetooth

Test Position	Dist. (mm)	Mode	Ch #.	Freq. (MHz)	Power (dBm)		Scaled factor	1-g SAR (W/kg)		Plot No.
					Tune-up upper Power	Measured average Power		Meas.	Reported	
Front	5	DH5	0	2402	5.50	4.77	1.183			
			39	2441	5.50	5.21	1.069	0.012	0.013	7
			78	2480	5.50	4.54	1.247			
Rear	5	DH5	53	2402	5.50	4.77	1.183			
			66	2441	5.50	5.21	1.069	0.001	0.001	
			78	2480	5.50	4.54	1.247			
Left	5	DH5	53	2402	5.50	4.77	1.183			
			66	2441	5.50	5.21	1.069	0.000	0.000	
			78	2480	5.50	4.54	1.247			
Right	5	DH5	53	2402	5.50	4.77	1.183			
			66	2441	5.50	5.21	1.069	0.000	0.000	
			78	2480	5.50	4.54	1.247			
Top	5	DH5	53	2402	5.50	4.77	1.183			
			66	2441	5.50	5.21	1.069	0.004	0.004	
			78	2480	5.50	4.54	1.247			
Bottom	5	DH5	53	2402	5.50	4.77	1.183			
			66	2441	5.50	5.21	1.069	0.001	0.001	
			78	2480	5.50	4.54	1.247			

10.8 BTLE

Test Position	Dist. (mm)	Mode	Ch #.	Freq. (MHz)	Power (dBm)		Scaled factor	1-g SAR (W/kg)		Plot No.
					Tune-up upper Power	Measured average Power		Meas.	Reported	
Front	5	LE	37	2402	5.50	4.83	1.167			
			17	2440	5.50	5.32	1.042	0.008	0.009	
			39	2480	5.50	4.65	1.216			
Rear	5	LE	37	2402	5.50	4.83	1.167			
			17	2440	5.50	5.32	1.042	0.038	0.040	8
			39	2480	5.50	4.65	1.216			
Left	5	LE	37	2402	5.50	4.83	1.167			
			17	2440	5.50	5.32	1.042	0.000	0.000	
			39	2480	5.50	4.65	1.216			
Right	5	LE	37	2402	5.50	4.83	1.167			
			17	2440	5.50	5.32	1.042	0.023	0.024	
			39	2480	5.50	4.65	1.216			
Top	5	LE	37	2402	5.50	4.83	1.167			
			17	2440	5.50	5.32	1.042	0.001	0.001	
			39	2480	5.50	4.65	1.216			
Bottom	5	LE	37	2402	5.50	4.83	1.167			
			17	2440	5.50	5.32	1.042	0.000	0.000	
			39	2480	5.50	4.65	1.216			

10.9 WLAN 2.4GHz Band

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		Scaled factor	1-g SAR (W/kg)		Plot No.
					Tune-up upper Power	Measured average Power		Meas.	Reported	
Front	802.11b	5	1	2412	6.00	4.92	1.28			
			6	2437	6.00	5.38	1.15			
			11	2462	6.00	5.90	1.02	0.019	0.019	
Rear	802.11b	5	1	2412	6.00	4.92	1.28	0.040	0.051	
			6	2437	6.00	5.38	1.15	0.073	0.084	
			11	2462	6.00	5.90	1.02	0.085	0.087	9
Left	802.11b	5	1	2412	6.00	4.92	1.28			
			6	2437	6.00	5.38	1.15			
			11	2462	6.00	5.90	1.02	0.007	0.007	
Right	802.11b	5	1	2412	6.00	4.92	1.28			
			6	2437	6.00	5.38	1.15			
			11	2462	6.00	5.90	1.02	0.046	0.047	
Top	802.11b	5	1	2412	6.00	4.92	1.28			
			6	2437	6.00	5.38	1.15			
			11	2462	6.00	5.90	1.02	0.006	0.006	
Bottom	802.11b	5	1	2412	6.00	4.92	1.28			
			6	2437	6.00	5.38	1.15			
			11	2462	6.00	5.90	1.02	0.001	0.001	

OFDM was excluded from the following table according to KDB248227D01.

SAR is not required for the following 2.4 GHz OFDM conditions according to KDB248227D01.

- 1) When KDB447498D01 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Maximum tune-up tolerance limit		Maximum tune-up tolerance limit		OFDM scaled factor	Position	DSSS Reported SAR value [W/kg]	OFDM Estimated SAR value [W/kg]	Exclusion limit [W/kg]	Standalone SAR request
DSSS		OFDM							
[dBm]	[mW]	[dBm]	[mW]						
6.00	3.98	7.50	5.62	1.413	Front	0.085	0.120	< 1.2	No

Note(s):

- OFDM scaled factor = Maximum tune-up tolerance limit of OFDM [mW] / Maximum tune-up tolerance limit of DSSS [mW]
- Estimated SAR of OFDM= Reported SAR of DSSS[W/kg] · OFDM scaled factor

10.10 WLAN 5.3GHz Band

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		Scaled factor	1-g SAR (W/kg)		Plot No.
					Tune-up upper Power	Measured average Power		Meas.	Reported	
Front	11n-40	5	54	5270	8.30	8.08	1.05			
			62	5310	8.30	8.17	1.03	0.052	0.054	
Rear	11n-40	5	54	5270	8.30	8.08	1.05	0.295	0.310	
			62	5310	8.30	8.17	1.03	0.471	0.485	10
Left	11n-40	5	54	5270	8.30	8.08	1.05			
			62	5310	8.30	8.17	1.03	0.000	0.000	
Right	11n-40	5	54	5270	8.30	8.08	1.05			
			62	5310	8.30	8.17	1.03	0.337	0.347	
Top	11n-40	5	54	5270	8.30	8.08	1.05			
			62	5310	8.30	8.17	1.03	0.007	0.007	
Bottom	11n-40	5	54	5270	8.30	8.08	1.05			
			62	5310	8.30	8.17	1.03	0.006	0.006	

10.11 WLAN 5.6GHz Band

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		Scaled factor	1-g SAR (W/kg)		Plot No.
					Tune-up upper Power	Measured average Power		Meas.	Reported	
Front	11n-40	5	102	5510	9.60	8.57	1.27			
			110	5550	9.60	8.92	1.17			
			134	5670	9.60	9.40	1.05	0.041	0.043	
Rear	11n-40	5	102	5510	9.60	8.57	1.27	0.425	0.539	11
			110	5550	9.60	8.92	1.17	0.400	0.468	
			134	5670	9.60	9.40	1.05	0.338	0.354	
Left	11n-40	5	102	5510	9.60	8.57	1.27			
			110	5550	9.60	8.92	1.17			
			134	5670	9.60	9.40	1.05	0.006	0.006	
Right	11n-40	5	102	5510	9.60	8.57	1.27			
			110	5550	9.60	8.92	1.17			
			134	5670	9.60	9.40	1.05	0.321	0.336	
Top	11n-40	5	102	5510	9.60	8.57	1.27			
			110	5550	9.60	8.92	1.17			
			134	5670	9.60	9.40	1.05	0.007	0.007	
Bottom	11n-40	5	102	5510	9.60	8.57	1.27			
			110	5550	9.60	8.92	1.17			
			134	5670	9.60	9.40	1.05	0.002	0.002	

10.12 GSM850

Test Position	Dist. (mm)	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
					Tune-up limit	Meas.	Meas.	Scaled	
Front	5	GPRS GMSK 4 times slots	128	824.2	24.00	23.65			
			190	836.6	24.00	23.81	0.419	0.438	
			251	848.6	24.00	23.92			
Rear	5	GPRS GMSK 4 times slots	128	824.2	24.00	23.65	0.693	0.751	12
			190	836.6	24.00	23.81	0.667	0.697	
			251	848.6	24.00	23.92	0.541	0.551	
Left	5	GPRS GMSK 4 times slots	128	824.2	24.00	23.65			
			190	836.6	24.00	23.81	0.176	0.184	
			251	848.6	24.00	23.92			
Right	5	GPRS GMSK 4 times slots	128	824.2	24.00	23.65			
			190	836.6	24.00	23.81	0.263	0.275	
			251	848.6	24.00	23.92			
Top	5	GPRS GMSK 4 times slots	128	824.2	24.00	23.65			
			190	836.6	24.00	23.81	0.021	0.022	
			251	848.6	24.00	23.92			
Bottom	5	GPRS GMSK 4 times slots	128	824.2	24.00	23.65			
			190	836.6	24.00	23.81	0.142	0.148	
			251	848.6	24.00	23.92			

10.13 PCS1900

Test Position	Dist. (mm)	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
					Tune-up limit	Meas.	Meas.	Scaled	
Front	5	GPRS GMSK 4 times slots	512	1850.2	24.00	23.21			
			661	1880.0	24.00	23.28	0.254	0.300	
			810	1909.8	24.00	23.26			
Rear	5	GPRS GMSK 4 times slots	512	1850.2	24.00	23.21	0.314	0.377	
			661	1880.0	24.00	23.28	0.627	0.740	
			810	1909.8	24.00	23.26	0.801	0.950	13
Left	5	GPRS GMSK 4 times slots	512	1850.2	24.00	23.21			
			661	1880.0	24.00	23.28	0.048	0.057	
			810	1909.8	24.00	23.26			
Right	5	GPRS GMSK 4 times slots	512	1850.2	24.00	23.21			
			661	1880.0	24.00	23.28	0.084	0.100	
			810	1909.8	24.00	23.26			
Top	5	GPRS GMSK 4 times slots	512	1850.2	24.00	23.21			
			661	1880.0	24.00	23.28	0.024	0.029	
			810	1909.8	24.00	23.26			
Bottom	5	GPRS GMSK 4 times slots	512	1850.2	24.00	23.21			
			661	1880.0	24.00	23.28	0.405	0.478	
			810	1909.8	24.00	23.26			

10.14 Repeated measurement

According to KDB865664 D1.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Wireless Technologies	Test Configuration			Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio	Plot No.
	Transmit Antenna	Exposure	Position					Original	Repeated		
WCDMA Band 2	Main	Body	Rear	QPSK RMC12.2k	5	9400	1880	0.368	N/A	N/A	-
WCDMA Band 5	Main	Body	Rear	QPSK RMC12.2k	5	4233	846.6	0.906	0.899	1.008	14
LTE Band 2	Main	Body	Rear	QPSK RB1-49	5	19100	1900	0.804	0.801	1.004	15
LTE Band 5	Main	Body	Rear	QPSK RB1-24	5	20600	844	0.587	N/A	N/A	-
LTE Band 7	Main	Body	Rear	QPSK RB1-49	5	21350	2560	0.759	N/A	N/A	-
LTE Band 26	Main	Body	Rear	QPSK RB1-0	5	26740	819	0.597	N/A	N/A	-
Bluetooth	Main	Body	Front	DH5	5	39	2441	0.012	N/A	N/A	-
BTLE	Main	Body	Rear	LE	5	17	2440	0.038	N/A	N/A	-
WLAN 2.4 GHz	Main	Body	Rear	11b 1Mbps	5	11	2462	0.085	N/A	N/A	-
WLAN 5.3 GHz	Main	Body	Rear	11n-40 MCS0	5	62	5310	0.471	N/A	N/A	-
WLAN 5.6 GHz	Main	Body	Rear	11n-40 MCS0	5	102	5510	0.425	N/A	N/A	-
GSM850	Main	Body	Rear	GPRS GMSK 4 times slots	5	128	824.2	0.693	N/A	N/A	-
PCS1900	Main	Body	Rear	GPRS GMSK 4 times slots	5	810	1910	0.801	0.775	1.034	16

Note(s):

N/A: Repeated Measurement is not required since the original highest measured SAR for all band is < 0.80 W/kg.

SECTION11: Simultaneous Transmission SAR Analysis

Capable Transmit Configurations		
WCDMA	+	WLAN 2.4GHz
WCDMA	+	WLAN 5GHz
WCDMA	+	Bluetooth
WCDMA	+	BTLE(Bluetooth Low Energy)
LTE	+	WLAN 2.4GHz
LTE	+	WLAN 5GHz
LTE	+	Bluetooth
LTE	+	BTLE(Bluetooth Low Energy)

WCDMA and WLAN 2.4GHz

Sum of the SAR for WCDMA B2 & WLAN 2.4GHz

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	WCDMA B2	WLAN 2.4GHz		
Front	0.151	0.019	0.170	-
Rear	0.425	0.087	0.512	-
Left	0.039	0.007	0.046	-
Right	0.036	0.047	0.083	-
Top	0.013	0.006	0.019	-
Bottom	0.242	0.001	0.243	-

Sum of the SAR for WCDMA B5 & WLAN 2.4GHz

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	WCDMA B5	WLAN 2.4GHz		
Front	0.347	0.019	0.366	-
Rear	0.997	0.087	1.084	-
Left	0.273	0.007	0.280	-
Right	0.115	0.047	0.162	-
Top	0.011	0.006	0.017	-
Bottom	0.160	0.001	0.161	-

WCDMA and WLAN 5.3GHz

Sum of the SAR for WCDMA B2 & WLAN 5.3GHz

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	WCDMA B2	WLAN 5.3GHz		
Front	0.151	0.054	0.205	-
Rear	0.425	0.485	0.910	-
Left	0.039	0.000	0.039	-
Right	0.036	0.347	0.383	-
Top	0.013	0.007	0.020	-
Bottom	0.242	0.006	0.248	-

Sum of the SAR for WCDMA B5 & WLAN 5.3GHz

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	WCDMA B5	WLAN 5.3GHz		
Front	0.347	0.054	0.401	-
Rear	0.997	0.485	1.482	-
Left	0.273	0.000	0.273	-
Right	0.115	0.347	0.462	-
Top	0.011	0.007	0.018	-
Bottom	0.160	0.006	0.166	-

WCDMA and WLAN 5.6GHz

Sum of the SAR for WCDMA B2 & WLAN 5.6GHz

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	WCDMA B2	WLAN 5.6GHz		
Front	0.151	0.043	0.194	-
Rear	0.425	0.539	0.964	-
Left	0.039	0.006	0.045	-
Right	0.036	0.336	0.372	-
Top	0.013	0.007	0.020	-
Bottom	0.242	0.002	0.244	-

Sum of the SAR for WCDMA B5 & WLAN 5.6GHz

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	WCDMA B5	WLAN 5.6GHz		
Front	0.347	0.043	0.390	-
Rear	0.997	0.539	1.536	-
Left	0.273	0.006	0.279	-
Right	0.115	0.336	0.451	-
Top	0.011	0.007	0.018	-
Bottom	0.160	0.002	0.162	-

WCDMA and Bluetooth

Sum of the SAR for WCDMA B2 & Bluetooth

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	WCDMA B2	Bluetooth		
Front	0.151	0.013	0.164	-
Rear	0.425	0.001	0.426	-
Left	0.039	0.000	0.039	-
Right	0.036	0.000	0.036	-
Top	0.013	0.004	0.017	-
Bottom	0.242	0.001	0.243	-

Sum of the SAR for WCDMA B5 & Bluetooth

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	WCDMA B5	Bluetooth		
Front	0.347	0.013	0.360	-
Rear	0.997	0.001	0.998	-
Left	0.273	0.000	0.273	-
Right	0.115	0.000	0.115	-
Top	0.011	0.004	0.015	-
Bottom	0.160	0.001	0.161	-

WCDMA and BTLE

Sum of the SAR for WCDMA B2 & BTLE

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	WCDMA B2	BTLE		
Front	0.151	0.009	0.160	-
Rear	0.425	0.040	0.465	-
Left	0.039	0.000	0.039	-
Right	0.036	0.024	0.060	-
Top	0.013	0.001	0.014	-
Bottom	0.242	0.000	0.242	-

Sum of the SAR for WCDMA B5 & BTLE

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	WCDMA B5	BTLE		
Front	0.347	0.009	0.356	-
Rear	0.997	0.040	1.037	-
Left	0.273	0.000	0.273	-
Right	0.115	0.024	0.139	-
Top	0.011	0.001	0.012	-
Bottom	0.160	0.000	0.160	-

LTE and WLAN 2.4GHz

Sum of the SAR for LTE B2 & WLAN 2.4GHz

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	LTE B2	WLAN 2.4GHz		
Front	0.352	0.019	0.371	-
Rear	0.945	0.087	1.032	-
Left	0.106	0.007	0.113	-
Right	0.133	0.047	0.180	-
Top	0.041	0.006	0.047	-
Bottom	0.651	0.001	0.652	-

Sum of the SAR for LTE B5 & WLAN 2.4GHz

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	LTE B5	WLAN 2.4GHz		
Front	0.132	0.019	0.151	-
Rear	0.732	0.087	0.819	-
Left	0.182	0.007	0.189	-
Right	0.156	0.047	0.203	-
Top	0.006	0.006	0.012	-
Bottom	0.069	0.001	0.070	-

Sum of the SAR for LTE B7 & WLAN 2.4GHz

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	LTE B7	WLAN 2.4GHz		
Front	0.481	0.019	0.500	-
Rear	0.869	0.087	0.956	-
Left	0.154	0.007	0.161	-
Right	0.313	0.047	0.360	-
Top	0.290	0.006	0.296	-
Bottom	0.383	0.001	0.384	-

Sum of the SAR for LTE B26 & WLAN 2.4GHz

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	LTE B26	WLAN 2.4GHz		
Front	0.217	0.019	0.236	-
Rear	0.714	0.087	0.801	-
Left	0.166	0.007	0.173	-
Right	0.079	0.047	0.126	-
Top	0.005	0.006	0.011	-
Bottom	0.087	0.001	0.088	-

LTE and WLAN 5.3GHz

Sum of the SAR for LTE B2 & WLAN 5.3GHz

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	LTE B2	WLAN 5.3GHz		
Front	0.352	0.054	0.406	-
Rear	0.945	0.485	1.430	-
Left	0.106	0.000	0.106	-
Right	0.133	0.347	0.480	-
Top	0.041	0.007	0.048	-
Bottom	0.651	0.006	0.657	-

Sum of the SAR for LTE B5 & WLAN 5.3GHz

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	LTE B5	WLAN 5.3GHz		
Front	0.132	0.054	0.186	-
Rear	0.732	0.485	1.217	-
Left	0.182	0.000	0.182	-
Right	0.156	0.347	0.503	-
Top	0.006	0.007	0.013	-
Bottom	0.069	0.006	0.075	-

Sum of the SAR for LTE B7 & WLAN 5.3GHz

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	LTE B7	WLAN 5.3GHz		
Front	0.481	0.054	0.535	-
Rear	0.869	0.485	1.354	-
Left	0.154	0.000	0.154	-
Right	0.313	0.347	0.660	-
Top	0.290	0.007	0.297	-
Bottom	0.383	0.006	0.389	-

Sum of the SAR for LTE B26 & WLAN 5.3GHz

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	LTE B26	WLAN 5.3GHz		
Front	0.217	0.054	0.271	-
Rear	0.714	0.485	1.199	-
Left	0.166	0.000	0.166	-
Right	0.079	0.347	0.426	-
Top	0.005	0.007	0.012	-
Bottom	0.087	0.006	0.093	-

LTE and WLAN 5.6GHz

Sum of the SAR for LTE B2 & WLAN 5.6GHz

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	LTE B2	WLAN 5.6GHz		
Front	0.352	0.043	0.395	-
Rear	0.945	0.539	1.484	-
Left	0.106	0.006	0.112	-
Right	0.133	0.336	0.469	-
Top	0.041	0.007	0.048	-
Bottom	0.651	0.002	0.653	-

Sum of the SAR for LTE B5 & WLAN 5.6GHz

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	LTE B5	WLAN 5.6GHz		
Front	0.132	0.043	0.175	-
Rear	0.732	0.539	1.271	-
Left	0.182	0.006	0.188	-
Right	0.156	0.336	0.492	-
Top	0.006	0.007	0.013	-
Bottom	0.069	0.002	0.071	-

Sum of the SAR for LTE B7 & WLAN 5.6GHz

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	LTE B7	WLAN 5.6GHz		
Front	0.481	0.043	0.524	-
Rear	0.869	0.539	1.408	-
Left	0.154	0.006	0.160	-
Right	0.313	0.336	0.649	-
Top	0.290	0.007	0.297	-
Bottom	0.383	0.002	0.385	-

Sum of the SAR for LTE B26 & WLAN 5.6GHz

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	LTE B26	WLAN 5.6GHz		
Front	0.217	0.043	0.260	-
Rear	0.714	0.539	1.253	-
Left	0.166	0.006	0.172	-
Right	0.079	0.336	0.415	-
Top	0.005	0.007	0.012	-
Bottom	0.087	0.002	0.089	-

LTE and Bluetooth

Sum of the SAR for LTE B2 & Bluetooth

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	LTE B2	Bluetooth		
Front	0.352	0.013	0.365	-
Rear	0.945	0.001	0.946	-
Left	0.106	0.000	0.106	-
Right	0.133	0.000	0.133	-
Top	0.041	0.004	0.045	-
Bottom	0.651	0.001	0.652	-

Sum of the SAR for LTE B5 & Bluetooth

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	LTE B5	Bluetooth		
Front	0.132	0.013	0.145	-
Rear	0.732	0.001	0.733	-
Left	0.182	0.000	0.182	-
Right	0.156	0.000	0.156	-
Top	0.006	0.004	0.010	-
Bottom	0.069	0.001	0.070	-

Sum of the SAR for LTE B7 & Bluetooth

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	LTE B7	Bluetooth		
Front	0.481	0.013	0.494	-
Rear	0.869	0.001	0.870	-
Left	0.154	0.000	0.154	-
Right	0.313	0.000	0.313	-
Top	0.290	0.004	0.294	-
Bottom	0.383	0.001	0.384	-

Sum of the SAR for LTE B26 & Bluetooth

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	LTE B26	Bluetooth		
Front	0.217	0.013	0.230	-
Rear	0.714	0.001	0.715	-
Left	0.166	0.000	0.166	-
Right	0.079	0.000	0.079	-
Top	0.005	0.004	0.009	-
Bottom	0.087	0.001	0.088	-

LTE and BTLE

Sum of the SAR for LTE B2 & BTLE

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	LTE B2	BTLE		
Front	0.352	0.009	0.361	-
Rear	0.945	0.040	0.985	-
Left	0.106	0.000	0.106	-
Right	0.133	0.024	0.157	-
Top	0.041	0.001	0.042	-
Bottom	0.651	0.000	0.651	-

Sum of the SAR for LTE B5 & BTLE

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	LTE B5	BTLE		
Front	0.132	0.009	0.141	-
Rear	0.732	0.040	0.772	-
Left	0.182	0.000	0.182	-
Right	0.156	0.024	0.180	-
Top	0.006	0.001	0.007	-
Bottom	0.069	0.000	0.069	-

Sum of the SAR for LTE B7 & BTLE

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	LTE B7	BTLE		
Front	0.481	0.009	0.490	-
Rear	0.869	0.040	0.909	-
Left	0.154	0.000	0.154	-
Right	0.313	0.024	0.337	-
Top	0.290	0.001	0.291	-
Bottom	0.383	0.000	0.383	-

Sum of the SAR for LTE B26 & BTLE

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	LTE B26	BTLE		
Front	0.217	0.009	0.226	-
Rear	0.714	0.040	0.754	-
Left	0.166	0.000	0.166	-
Right	0.079	0.024	0.103	-
Top	0.005	0.001	0.006	-
Bottom	0.087	0.000	0.087	-

GSM and WLAN 2.4GHz

Sum of the SAR for GSM850 & WLAN 2.4GHz

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	GSM850	WLAN 2.4GHz		
Front	0.438	0.019	0.457	-
Rear	0.751	0.087	0.838	-
Left	0.184	0.007	0.191	-
Right	0.275	0.047	0.322	-
Top	0.022	0.006	0.028	-
Bottom	0.148	0.001	0.149	-

Sum of the SAR for PCS1900 & WLAN 2.4GHz

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	PCS1900	WLAN 2.4GHz		
Front	0.300	0.019	0.319	-
Rear	0.950	0.087	1.037	-
Left	0.057	0.007	0.064	-
Right	0.100	0.047	0.147	-
Top	0.029	0.006	0.035	-
Bottom	0.478	0.001	0.479	-

GSM and WLAN 5.3GHz

Sum of the SAR for GSM850 & WLAN 5.3GHz

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	GSM850	WLAN 5.3GHz		
Front	0.438	0.054	0.492	-
Rear	0.751	0.485	1.236	-
Left	0.184	0.000	0.184	-
Right	0.275	0.347	0.622	-
Top	0.022	0.007	0.029	-
Bottom	0.148	0.006	0.154	-

Sum of the SAR for PCS1900 & WLAN 5.3GHz

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	PCS1900	WLAN 5.3GHz		
Front	0.300	0.054	0.354	-
Rear	0.950	0.485	1.435	-
Left	0.057	0.000	0.057	-
Right	0.100	0.347	0.447	-
Top	0.029	0.007	0.036	-
Bottom	0.478	0.006	0.484	-

GSM and WLAN 5.6GHz

Sum of the SAR for GSM850 & WLAN 5.6GHz

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	GSM850	WLAN 5.6GHz		
Front	0.438	0.043	0.481	-
Rear	0.751	0.539	1.290	-
Left	0.184	0.006	0.190	-
Right	0.275	0.336	0.611	-
Top	0.022	0.007	0.029	-
Bottom	0.148	0.002	0.150	-

Sum of the SAR for PCS1900 & WLAN 5.6GHz

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	PCS1900	WLAN 5.6GHz		
Front	0.300	0.043	0.343	-
Rear	0.950	0.539	1.489	-
Left	0.057	0.006	0.063	-
Right	0.100	0.336	0.436	-
Top	0.029	0.007	0.036	-
Bottom	0.478	0.002	0.480	-

GSM and Bluetooth

Sum of the SAR for GSM850 & Bluetooth

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	GSM850	Bluetooth		
Front	0.438	0.013	0.451	-
Rear	0.751	0.001	0.752	-
Left	0.184	0.000	0.184	-
Right	0.275	0.000	0.275	-
Top	0.022	0.004	0.026	-
Bottom	0.148	0.001	0.149	-

Sum of the SAR for PCS1900 & Bluetooth

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	PCS1900	Bluetooth		
Front	0.300	0.013	0.313	-
Rear	0.950	0.001	0.951	-
Left	0.057	0.000	0.057	-
Right	0.100	0.000	0.100	-
Top	0.029	0.004	0.033	-
Bottom	0.478	0.001	0.479	-

GSM and BTLE

Sum of the SAR for GSM850 & BTLE

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	GSM850	BTLE		
Front	0.438	0.009	0.447	-
Rear	0.751	0.040	0.791	-
Left	0.184	0.000	0.184	-
Right	0.275	0.024	0.299	-
Top	0.022	0.001	0.023	-
Bottom	0.148	0.000	0.148	-

Sum of the SAR for PCS1900 & BTLE

Test Position	Mode		Sum of SAR (1g/Wkg)	Remarks
	PCS1900	BTLE		
Front	0.300	0.009	0.309	-
Rear	0.950	0.040	0.990	-
Left	0.057	0.000	0.057	-
Right	0.100	0.024	0.124	-
Top	0.029	0.001	0.030	-
Bottom	0.478	0.000	0.478	-

Note(s):

1. All Simultaneous transmission SAR analysis applies scaling in accordance with the scaled values documented in this report.
2. Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg.

SECTION12: Test instruments

Test Name	Local Id	Description	Manufacturer	Model	Serial	Calibration Date	Calibration Due date	Calibration Interval (month)
SAR	SSDA-08	Dipole Antenna	Schmid&Partner Engineering AG	D1900V2	5d169	2019/03/12	2020/03/31	12
SAR	MDA-07	Dipole Antenna	Schmid&Partner Engineering AG	D2450V2	713	2019/09/09	2020/09/30	12
SAR	MDA-19	Dipole Antenna	Schmid&Partner Engineering AG	D2600V2	1030	2019/03/14	2020/03/31	12
SAR	MDA-08	Dipole Antenna	Schmid&Partner Engineering AG	D5GHzV2	1020	2019/11/19	2020/11/30	12
SAR	SSDA-04	Dipole Antenna	Schmid&Partner Engineering AG	D835V2	4d149	2019/03/19	2020/03/31	12
SAR	COTS-MSAR-03	Dasy5	Schmid&Partner Engineering AG	DASY5	-	Pre check	Pre check	-
SAR	MHBBL600-10000	Head Simulating Liquid	Schmid & Partner Engineering AG	HBBL600-10000V6	SL AAH U16 BC	Pre check	Pre check	-
SAR	MNA-03	Vector Reflectometer	COPPER MOUNTAIN TECHNOLOGIES	PLANAR R140	30913	2019/04/01	2020/04/31	12
SAR	MDPK-03	Dielectric assessment kit	Schmid&Partner Engineering AG	DAK-3.5	0008	2019/04/09	2020/04/31	12
SAR	MOS-37	Digital thermometer	LKM electronic	DTM3000	-	2019/07/03	2020/07/31	12
SAR	COTS-MSAR-04	Dielectric assessment software	Schmid&Partner Engineering AG	DAK	-	-	-	-
SAR	MDAE-02	Data Acquisition Electronics	Schmid&Partner Engineering AG	DAE4	1369	2019/05/08	2020/05/31	12
SAR	MPB-08	Dosimetric E-Field Probe	Schmid&Partner Engineering AG	EX3DV4	3917	2019/05/15	2020/05/31	12
SAR	MPF-03	2mm Oval Flat Phantom	Schmid&Partner Engineering AG	QDOVA001BB	1203	2019/05/14	2020/05/31	12
SAR	MDH-04	Device holder	Schmid&Partner Engineering AG	Mounting device for transmitter	-	2019/11/28	2020/11/30	12
SAR	MOS-35	Digital thermometer	HANNA	Checktemp 4	-	2019/07/03	2020/07/31	12
SAR	MRBT-03	SAR robot	Schmid&Partner Engineering AG	TX60 Lspeag	F13/SPPLD1/A/01	2019/04/26	2020/04/31	12
SAR	MPB-09	Dosimetric E-Field Probe	Schmid&Partner Engineering AG	EX3DV4	3922	2019/11/20	2020/11/30	12
SAR	MPM-11	Dual Power Meter	AGILENT	E4419B	MY45102060	2019/08/02	2020/08/31	12
SAR	MPSE-15	Power sensor	AGILENT	E9301A	MY41498311	2019/08/02	2020/08/31	12
SAR	MPSE-16	Power sensor	AGILENT	E9301A	MY41498313	2019/08/02	2020/08/31	12
SAR	MRFA-24	Pre Amplifier	R&K	R&K CGA020M602-2633R	B30550	2019/06/17	2020/06/30	12
SAR	MSG-10	Signal Generator	AGILENT	N5181A	MY47421098	2019/11/25	2020/11/30	12
SAR	MAT-78	Attenuator	Telegartner	J01156A0011	42294119	Pre check	Pre check	-
SAR	MPSE-24	Power sensor	Anritsu Limited	MA24106A	1026164	2019/08/02	2020/08/31	12
SAR	MPSE-25	Power sensor	ANRITSU	MA24106A	1031504	2019/08/02	2020/08/31	12
SAR	COTS-MPSE-02	Software for MA24106A	Anritsu Limited	Anritsu PowerXpert	-	Pre check	Pre check	-
SAR	MHDC-21	Dual Directional Coupler	AGILENT	778D	MY52180243	Pre check	Pre check	-
SAR	MHDC-12	Dual Directional Coupler	HEWLETT PACKARD	772D	2839A0016	Pre check	Pre check	-
SAR	MMSL1900	Tissue simulation liquid (1900MHz,body)	Schmid&Partner Engineering AG	SL AAM 190 AA	-	Pre check	Pre check	-
SAR	MOS-46	Thermo meter	CUSTOM	CT-1310D	P0007674	2019/12/12	2020/12/31	12
Power	SURC-01	Radio Communication Analyzer	ANRITSU	MT8820C	6201274351	2019/08/09	2020/08/31	12
Power	MPM-16	Power Meter	AGILENT	8990B	MY51000271	2019/08/02	2020/08/31	12
Power	MAT-58	Attenuator(10dB)	Suhner	6810.19.A	-	2019/12/09	2020/12/31	12
Power	MAT-10	Attenuator(10dB)	Weinschel Corp	2	BL1173	2019/11/07	2020/11/30	12

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

SAR room is checked before every testing and ambient noise is <0.012W/kg

APPENDIX 1 : System Check

System check result 835MHz


Communication System: UID 0, #CW (0); Communication System Band: D835 (835.0 MHz); ; Duty Cycle: 1:1
Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.938 \text{ S/m}$; $\epsilon_r = 42.951$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(9.89, 9.89, 9.89) @ 835 MHz;
Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 0mm (Fix Surface)
Electronics: DAE4 Sn1369;
Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA001BB;Serial: TP:1203
Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)


Pin/250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 3.15 W/kg

Pin/250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 61.49 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 3.64 W/kg
SAR(1 g) = 2.4 W/kg; SAR(10 g) = 1.56 W/kg
Maximum value of SAR (measured) = 3.22 W/kg

Pin/250mW/Z Scan (1x1x31): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=5\text{mm}$
Maximum value of SAR (measured) = 2.12 W/kg

Ambient Temp. : 23.0 degree.C. Liquid Temp.; 22.1 degree.C.
Liquid temp. is kept within the 2 degree.C. during the test.
Date: 2020/01/07

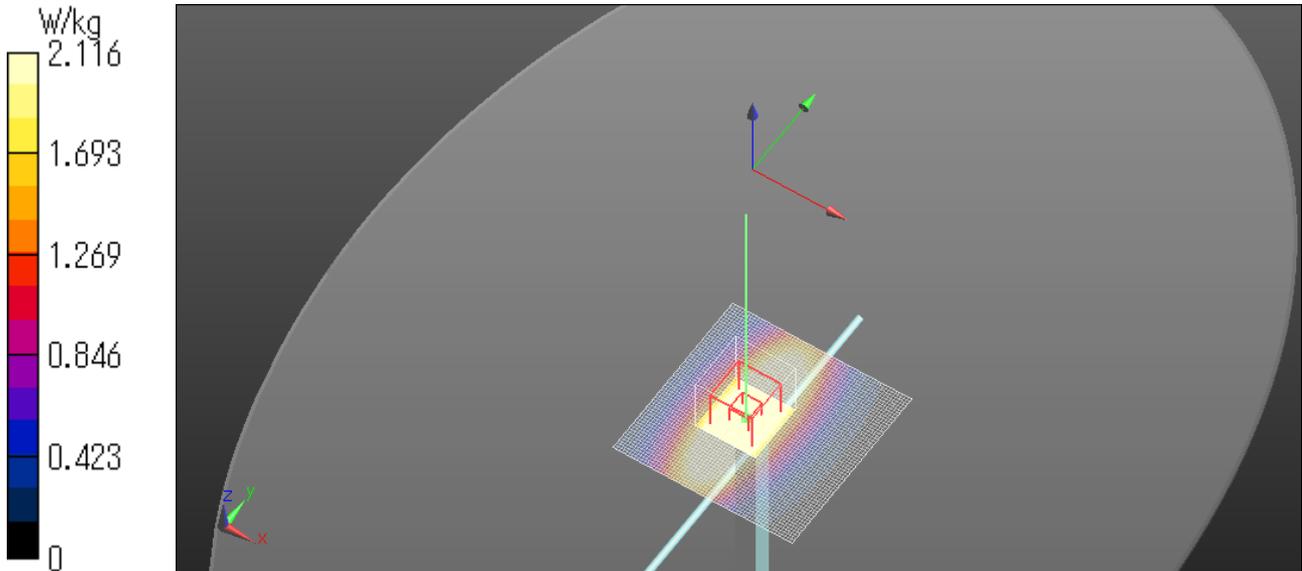

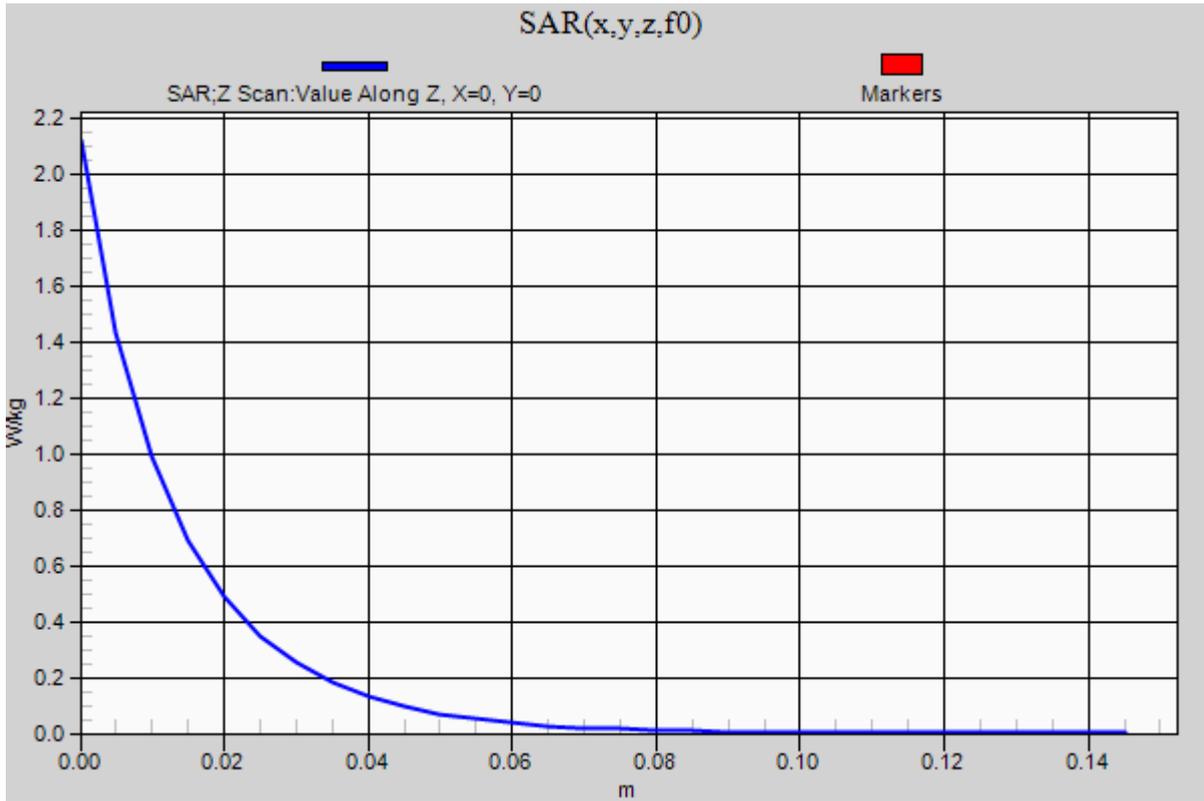

System check result 835MHz


Communication System: UID 0, #CW (0); Communication System Band: D835 (835.0 MHz); ; Duty Cycle: 1:1
Medium parameters used: $f = 835$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 41.627$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(9.89, 9.89, 9.89) @ 835 MHz;
Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 0mm (Fix Surface)
Electronics: DAE4 Sn1369;
Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA001BB;Serial: TP:1203
Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)


Pin/250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 3.29 W/kg

Pin/250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 63.15 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 3.84 W/kg
SAR(1 g) = 2.48 W/kg; SAR(10 g) = 1.61 W/kg
Maximum value of SAR (measured) = 3.37 W/kg

Pin/250mW/Z Scan (1x1x31): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 2.17 W/kg

Ambient Temp. : 23.0 degree.C. Liquid Temp.; 22.5 degree.C.
Liquid temp. is kept within the 2 degree.C. during the test.
Date: 2020/01/09

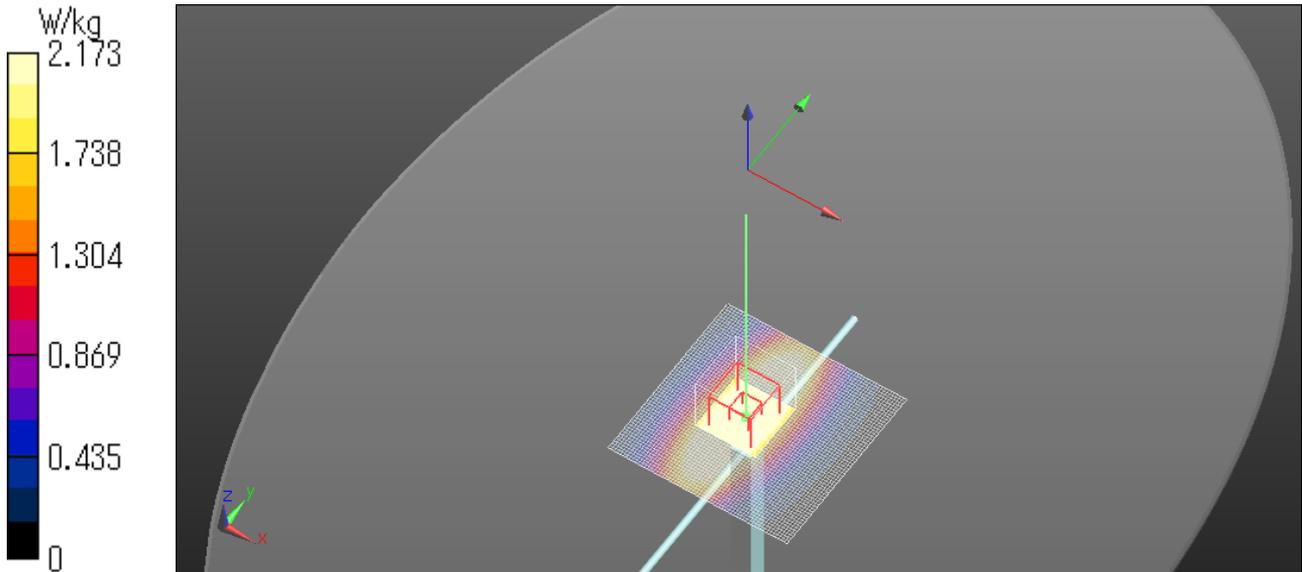

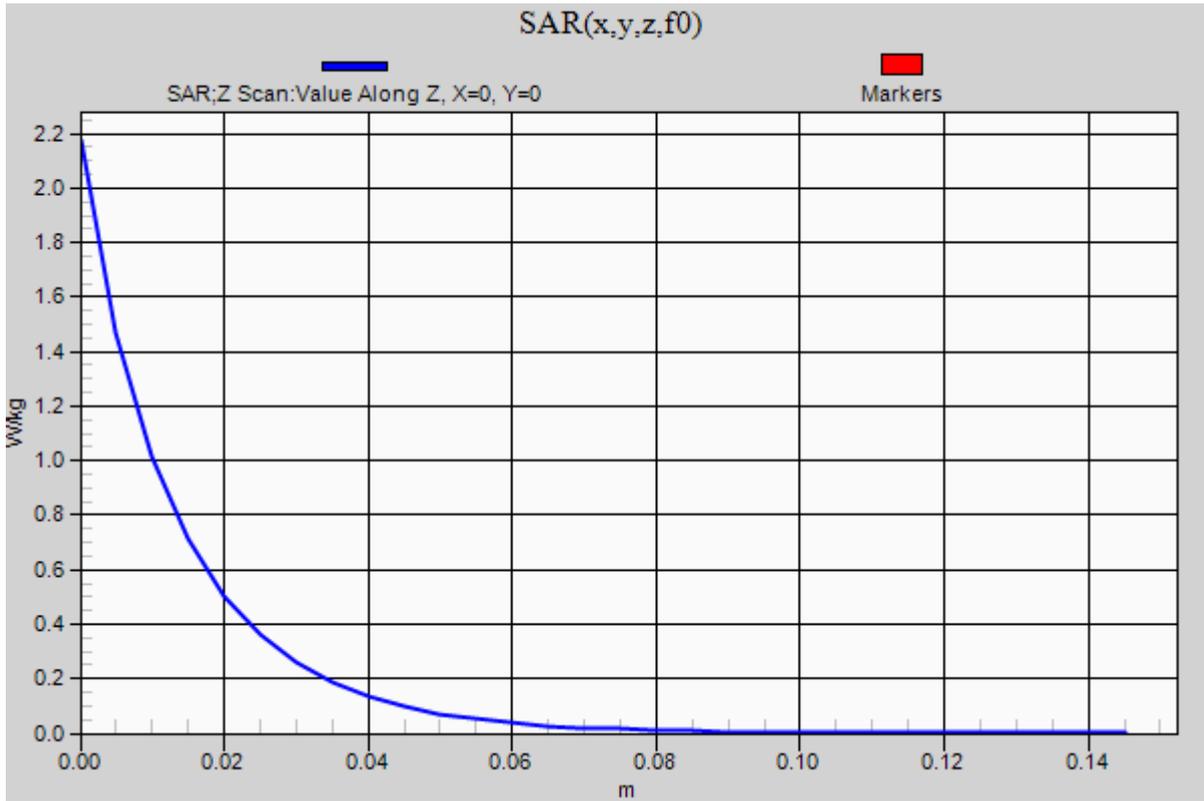

System check result 835MHz

Communication System: UID 0, #CW (0); Communication System Band: D835 (835.0 MHz); ; Duty Cycle: 1:1
Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.914 \text{ S/m}$; $\epsilon_r = 42.748$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration

Probe: EX3DV4 - SN3917; ConvF(9.89, 9.89, 9.89) @ 835 MHz;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1369;

Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA001BB;Serial: TP:1203


Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)


Pin/250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 3.30 W/kg

Pin/250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 63.70 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 3.81 W/kg
SAR(1 g) = 2.51 W/kg; SAR(10 g) = 1.66 W/kg
Maximum value of SAR (measured) = 3.36 W/kg

Pin/250mW/Z Scan_offset y=20mm 2 (1x1x21): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=5\text{mm}$
Maximum value of SAR (measured) = 1.20 W/kg

Ambient Temp. : 21.0 degree.C. Liquid Temp.; 20.8 degree.C.
Liquid temp. is kept within the 2 degree.C. during the test.
Date: 2020/01/14

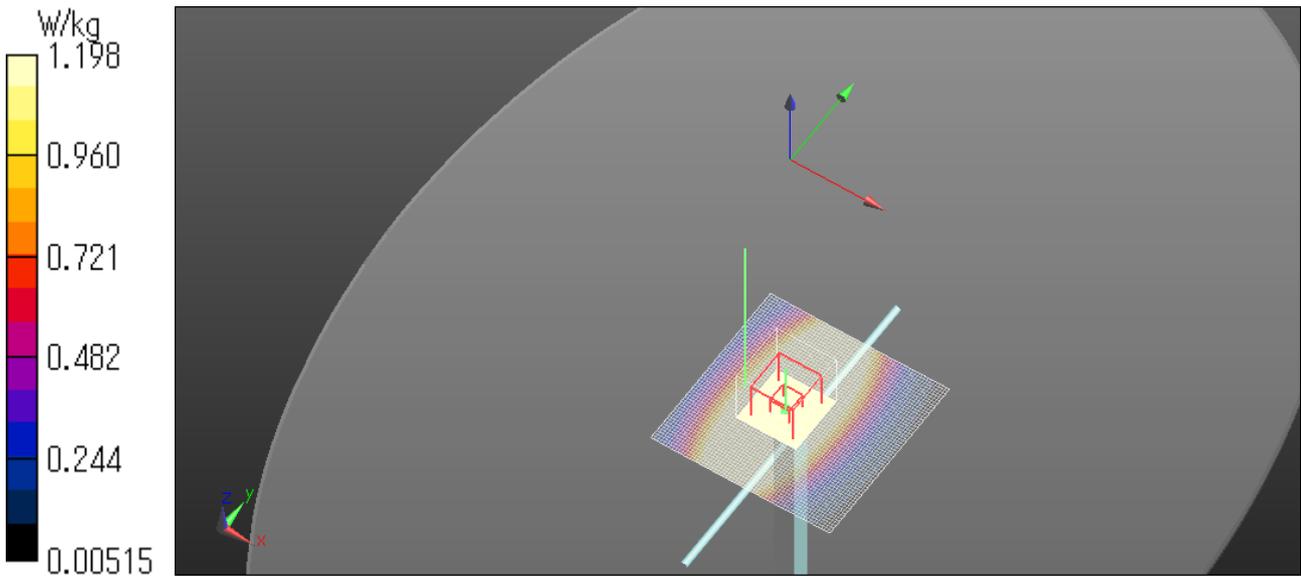

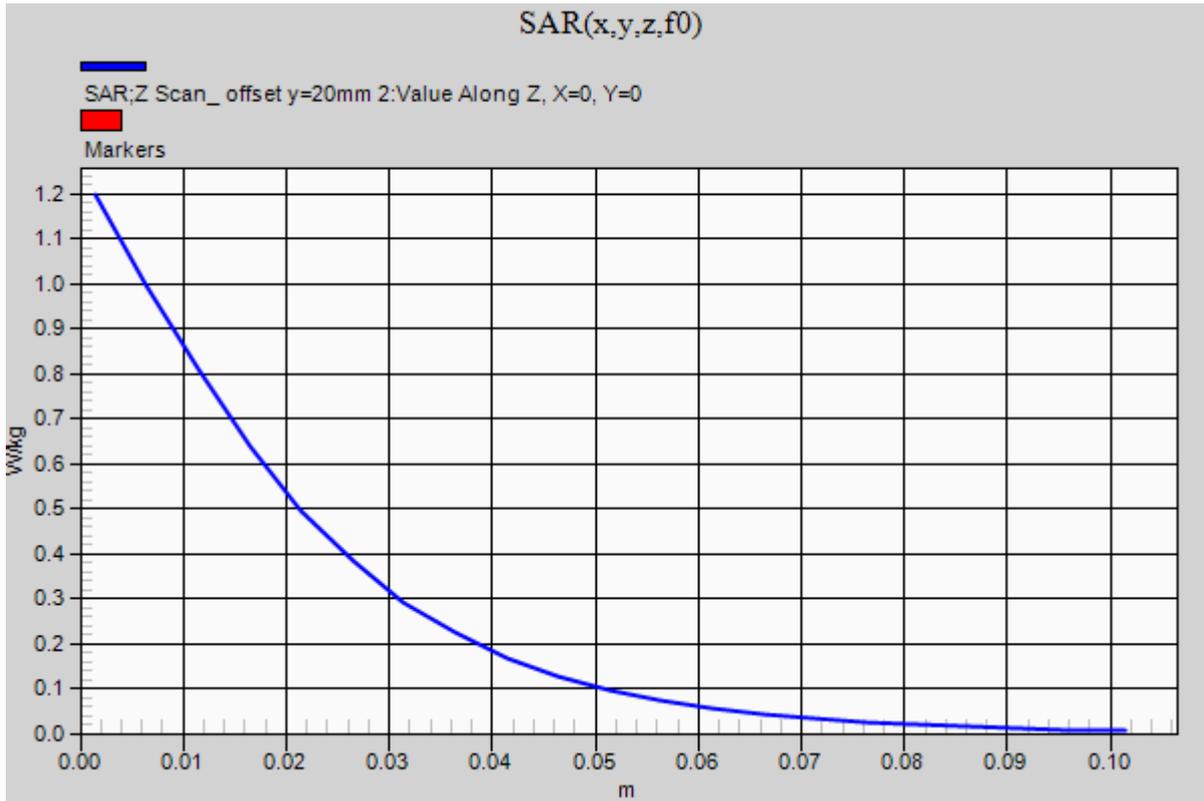

System check result 2600MHz

Communication System: UID 0, #CW (0); Communication System Band: D2600 (2600.0 MHz); ; Duty Cycle: 1:1
Medium parameters used: $f = 2600$ MHz; $\sigma = 1.945$ S/m; $\epsilon_r = 38.141$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration

Probe: EX3DV4 - SN3917; ConvF(7.2, 7.2, 7.2) @ 2600 MHz;

Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 0mm (Fix Surface)

Electronics: DAE4 Sn1369;

Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA001BB;Serial: TP:1203


Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)


Pin/250mW/Area Scan (81x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 26.5 W/kg

Pin/250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 120.0 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 32.1 W/kg
SAR(1 g) = 14.9 W/kg; SAR(10 g) = 6.67 W/kg
Maximum value of SAR (measured) = 25.3 W/kg

Pin/250mW/Z Scan (1x1x31): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 11.8 W/kg

Ambient Temp. : 22.0 degree.C. Liquid Temp.; 21.3 degree.C.
Liquid temp. is kept within the 2 degree.C. during the test.
Date: 2020/01/15

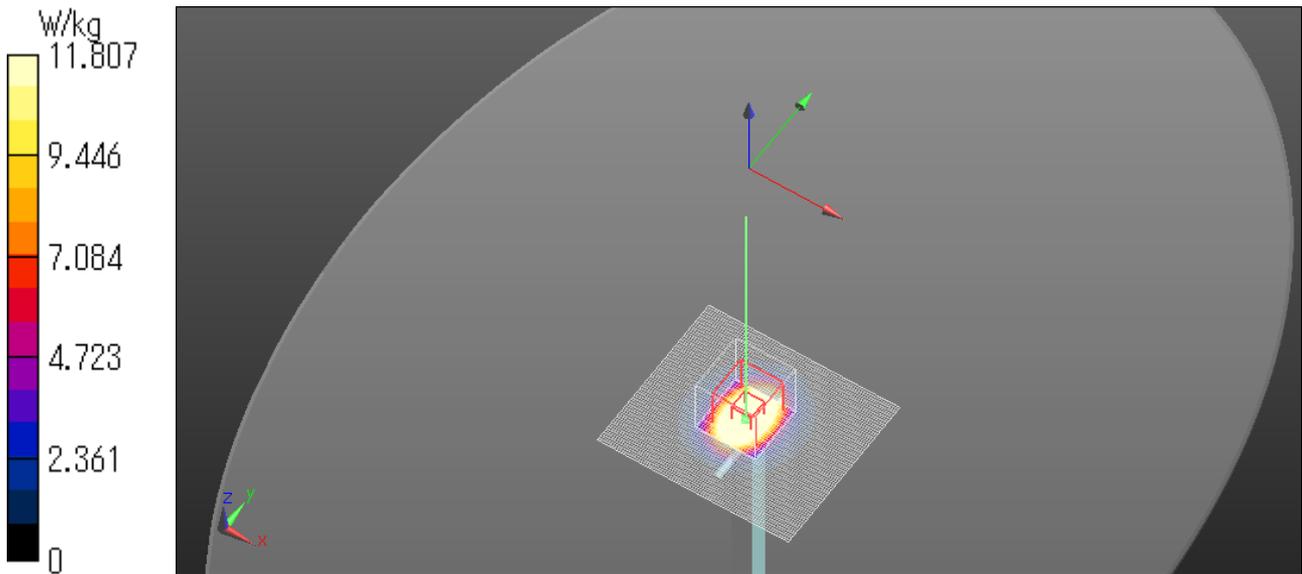

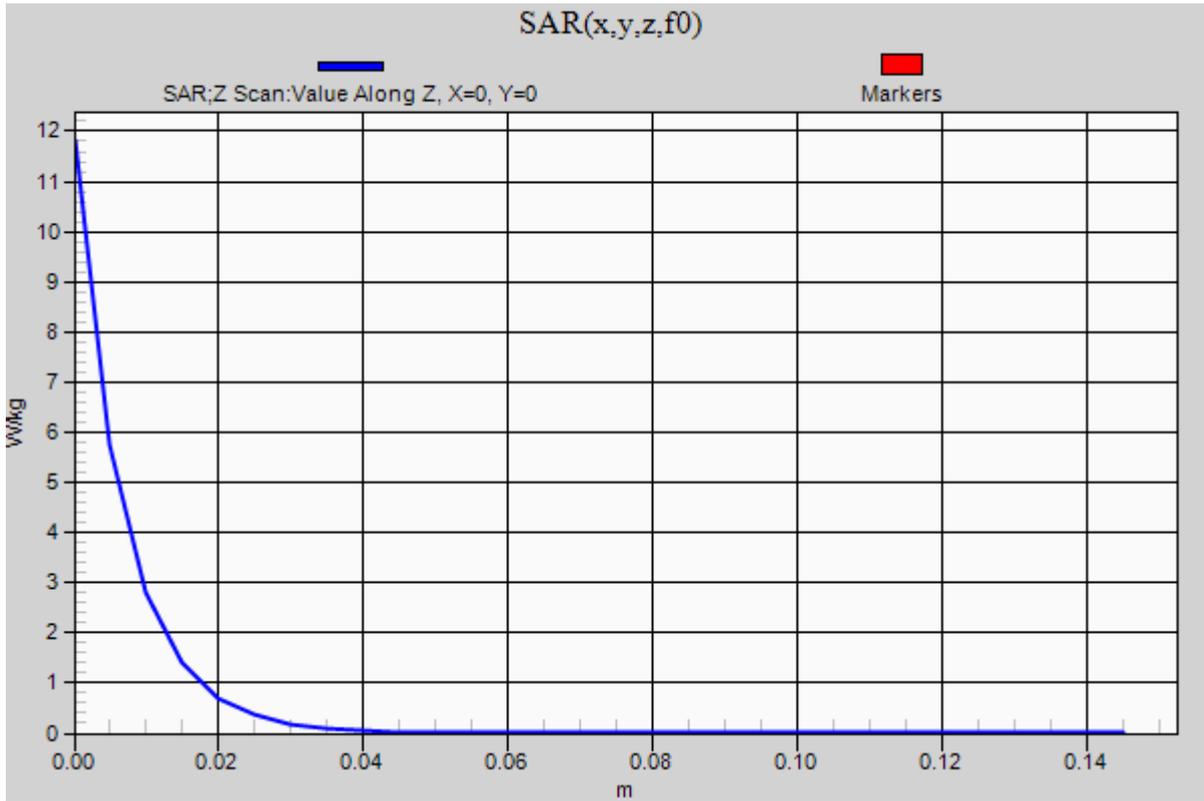

System check result 1900MHz

Communication System: UID 0, #CW (0); Communication System Band: D1900 (1900.0 MHz); ; Duty Cycle: 1:1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 39.369$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration

Probe: EX3DV4 - SN3917; ConvF(8.17, 8.17, 8.17) @ 1900 MHz;

Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 0mm (Fix Surface)

Electronics: DAE4 Sn1369;

Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA001BB;Serial: TP:1203


Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)


Pin/250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 16.4 W/kg

Pin/250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 112.7 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 20.4 W/kg
SAR(1 g) = 10.5 W/kg; SAR(10 g) = 5.44 W/kg
Maximum value of SAR (measured) = 16.8 W/kg

Pin/250mW/Z Scan (1x1x31): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 8.67 W/kg

Ambient Temp. : 22.0 degree.C. Liquid Temp.; 21.8 degree.C.
Liquid temp. is kept within the 2 degree.C. during the test.
Date: 2020/01/20

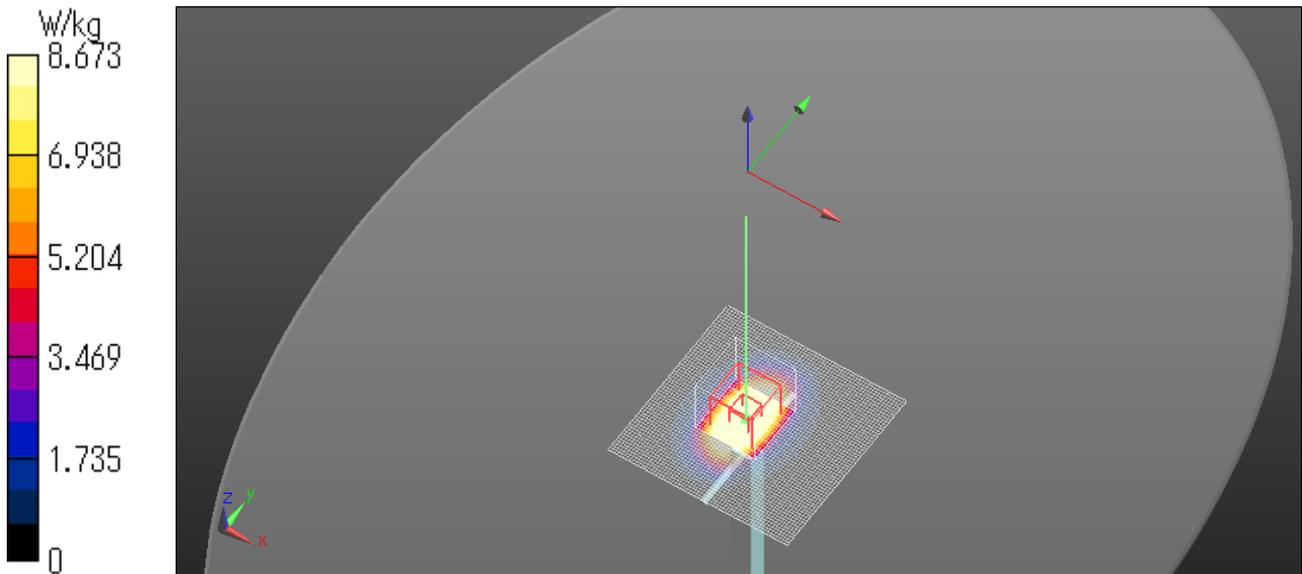

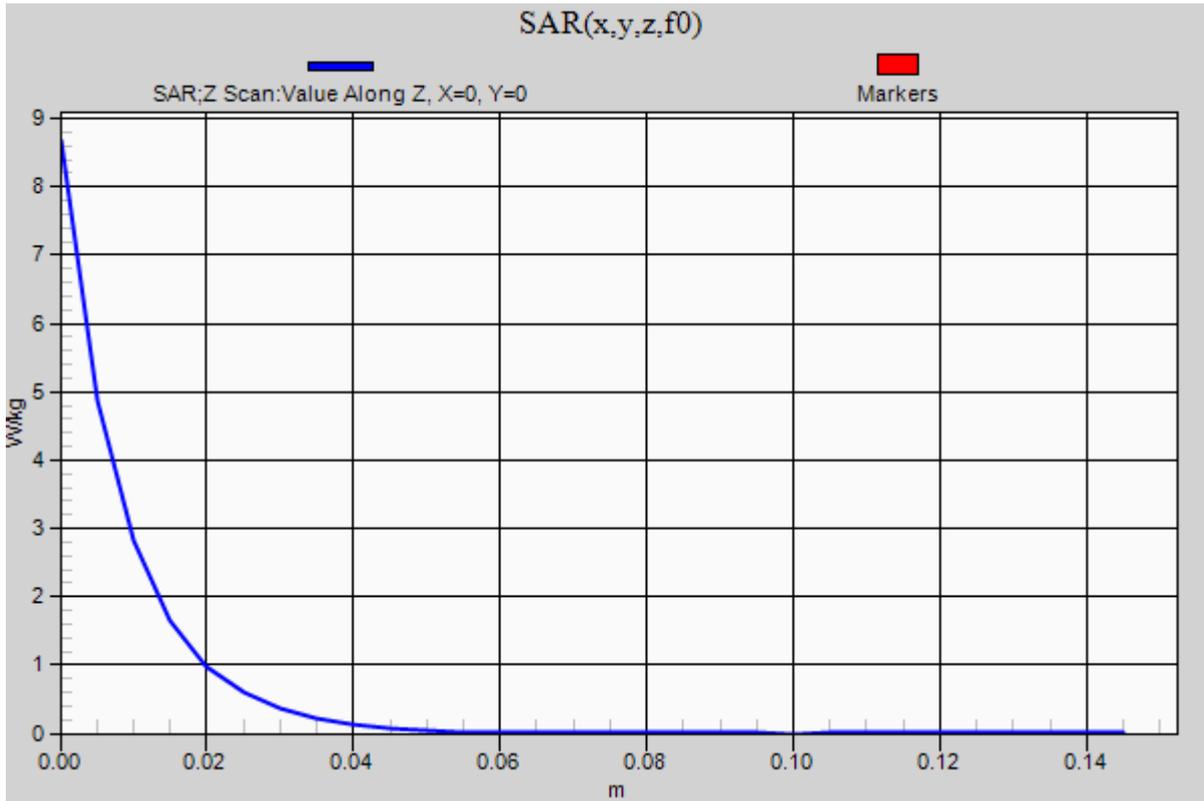

System check result 2450MHz


Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz); ; Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.798$ S/m; $\epsilon_r = 39.292$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(7.41, 7.41, 7.41) @ 2450 MHz;
Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 0mm (Fix Surface)
Electronics: DAE4 Sn1369;
Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA001BB;Serial: TP:1203
Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)


Pin/250mW/Area Scan (81x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 22.8 W/kg

Pin/250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 115.6 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 27.9 W/kg
SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.21 W/kg
Maximum value of SAR (measured) = 22.4 W/kg

Pin/250mW/Z Scan (1x1x31): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 10.7 W/kg

Ambient Temp. : 21.0 degree.C. Liquid Temp.; 19.8 degree.C.
Liquid temp. is kept within the 2 degree.C. during the test.
Date: 2020/01/21

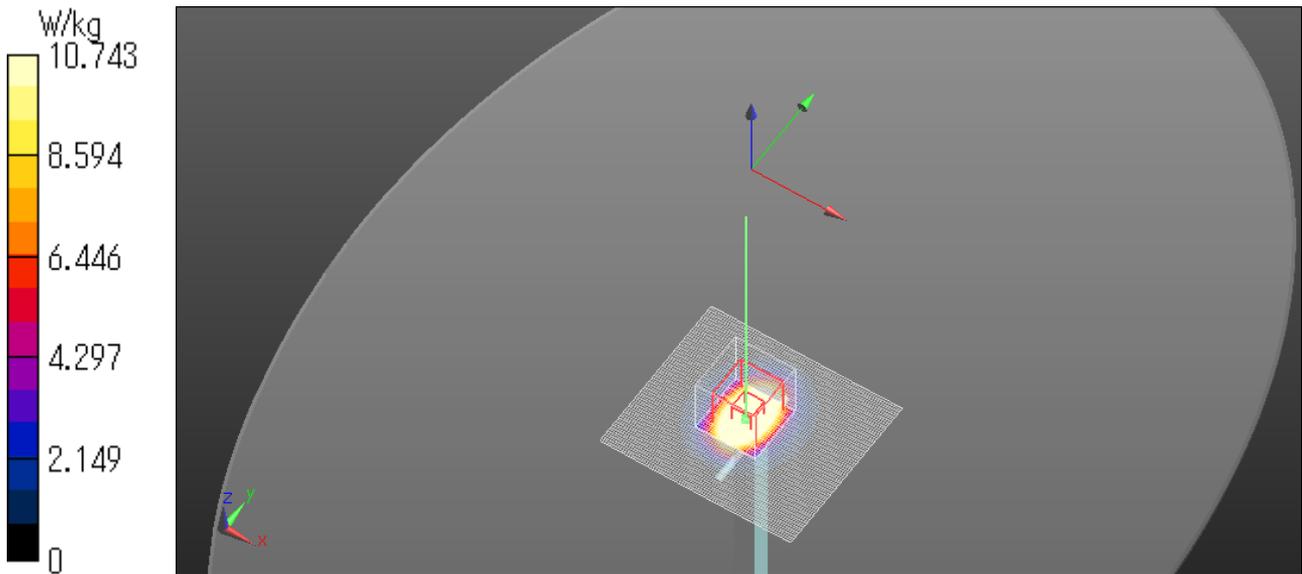

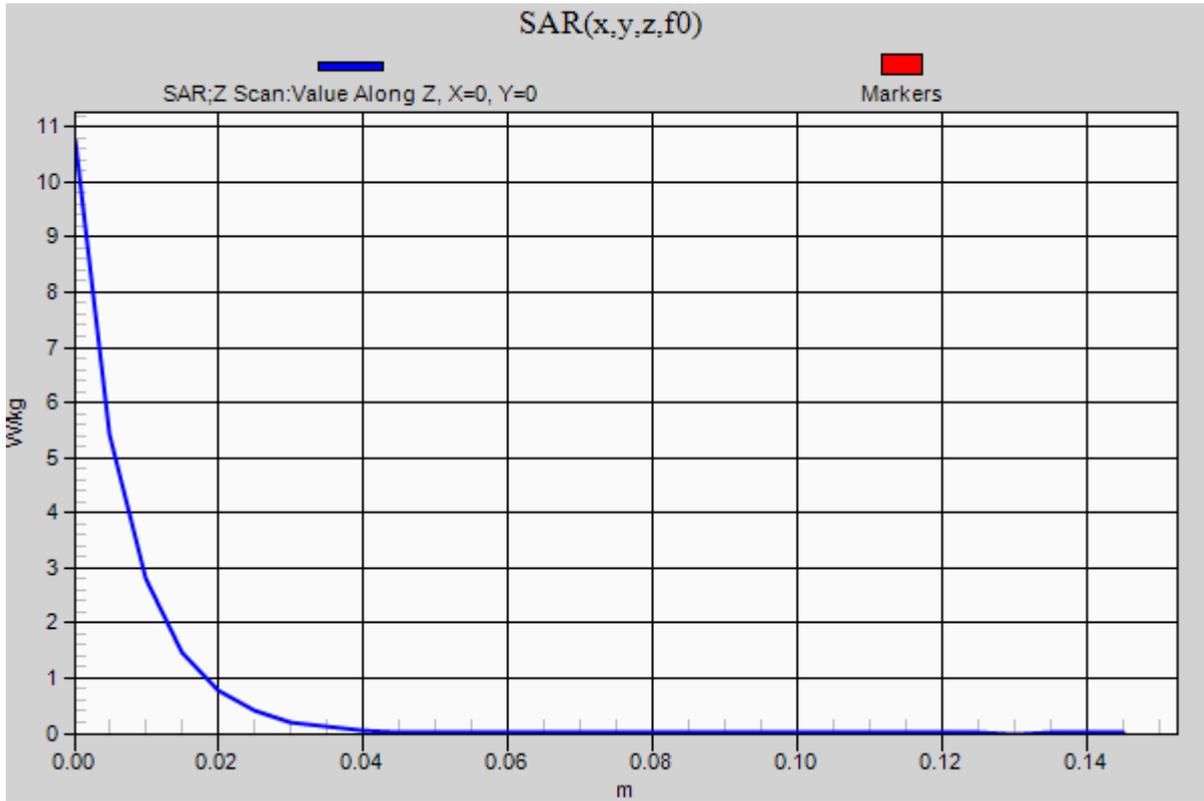

System check result 5250MHz

Communication System: UID 0, CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); ; Duty Cycle: 1:1
Medium parameters used: $f = 5250$ MHz; $\sigma = 4.571$ S/m; $\epsilon_r = 35.409$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration

Probe: EX3DV4 - SN3922; ConvF(5.4, 5.4, 5.4) @ 5250 MHz;

Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 0mm (Fix Surface)

Electronics: DAE4 Sn1369;

Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA001BB;Serial: TP:1203

Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)

Pin/100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 19.6 W/kg

Pin/100mW/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 75.72 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 34.5 W/kg

SAR(1 g) = 8.38 W/kg; SAR(10 g) = 2.4 W/kg


Maximum value of SAR (measured) = 19.9 W/kg


Pin/100mW/Z Scan (1x1x31): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 4.45 W/kg

Ambient Temp. : 22.0 degree.C. Liquid Temp.; 21.5 degree.C.

Liquid temp. is kept within the 2 degree.C. during the test.

Date: 2020/01/23

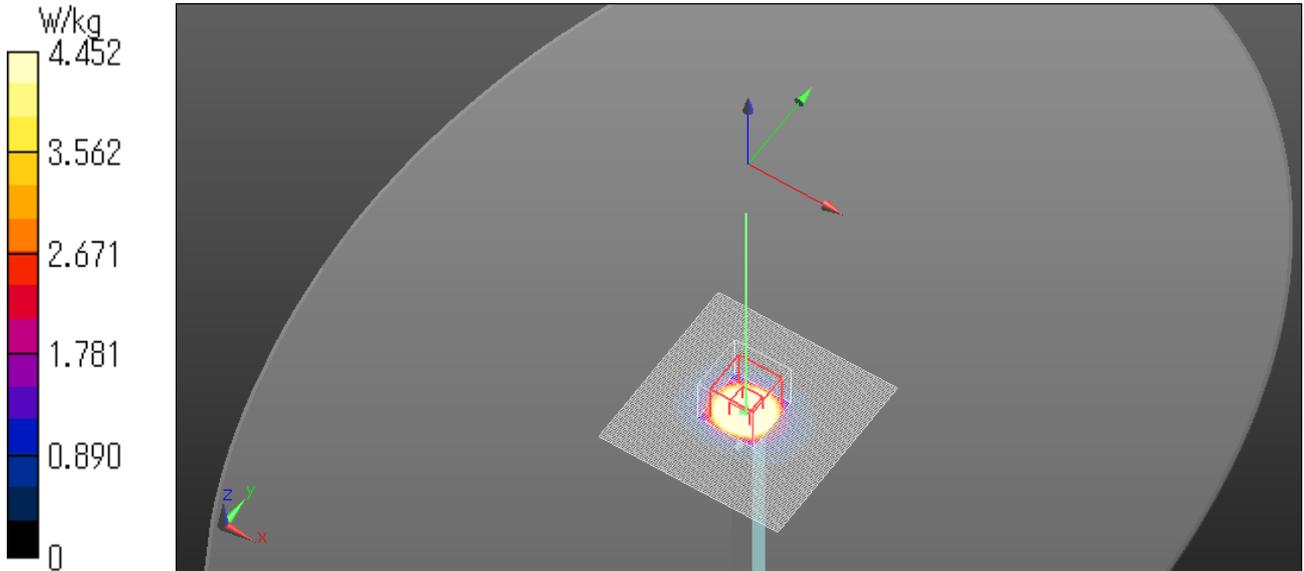

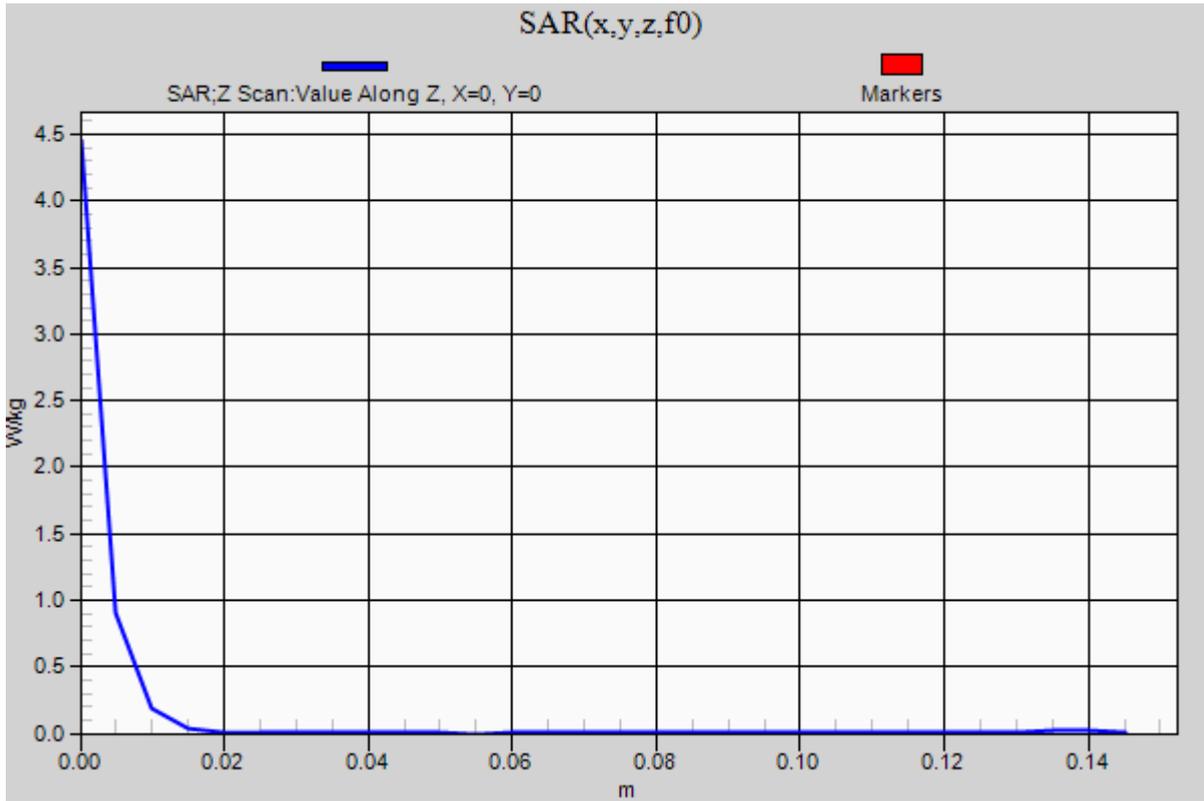

System check result 5600MHz


Communication System: UID 0, CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); ; Duty Cycle: 1:1
Medium parameters used: $f = 5600$ MHz; $\sigma = 4.91$ S/m; $\epsilon_r = 35.019$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
DASY5 Configuration
Probe: EX3DV4 - SN3922; ConvF(4.61, 4.61, 4.61) @ 5600 MHz;
Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 0mm (Fix Surface)
Electronics: DAE4 Sn1369;
Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA001BB;Serial: TP:1203
Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)

Pin/100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 22.9 W/kg

Pin/100mW/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 76.91 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 40.3 W/kg
SAR(1 g) = 9.03 W/kg; SAR(10 g) = 2.58 W/kg
Maximum value of SAR (measured) = 22.1 W/kg

Pin/100mW/Z Scan (1x1x31): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 4.31 W/kg

Ambient Temp. : 22.0 degree.C. Liquid Temp.; 21.1 degree.C.
Liquid temp. is kept within the 2 degree.C. during the test.
Date: 2020/01/24

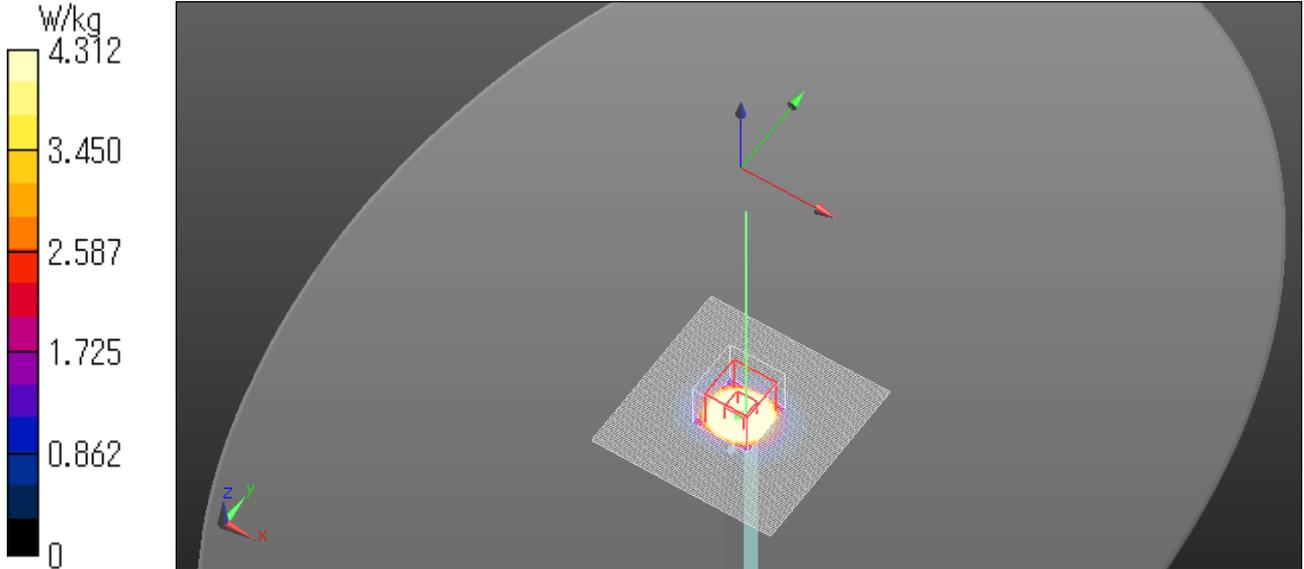

System check result 835MHz

Communication System: UID 0, #CW (0); Communication System Band: D835 (835.0 MHz); ; Duty Cycle: 1:1
Medium parameters used: $f = 835$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 40.112$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration

Probe: EX3DV4 - SN3917; ConvF(9.89, 9.89, 9.89) @ 835 MHz;

Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 0mm (Fix Surface)

Electronics: DAE4 Sn1369;

Phantom: SAM 20degree; Type: QD000P40CD;Serial: TP:1764

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

Pin/250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.34 W/kg

Pin/250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 64.34 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.87 W/kg

SAR(1 g) = 2.56 W/kg; SAR(10 g) = 1.68 W/kg

Maximum value of SAR (measured) = 3.42 W/kg



Pin/250mW/Z Scan (1x1x31): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 3.79 W/kg

Ambient Temp. : 22.0 degree.C. Liquid Temp.; 21.8 degree.C.

Liquid temp. is kept within the 2 degree.C. during the test.

Date: 2020/03/24

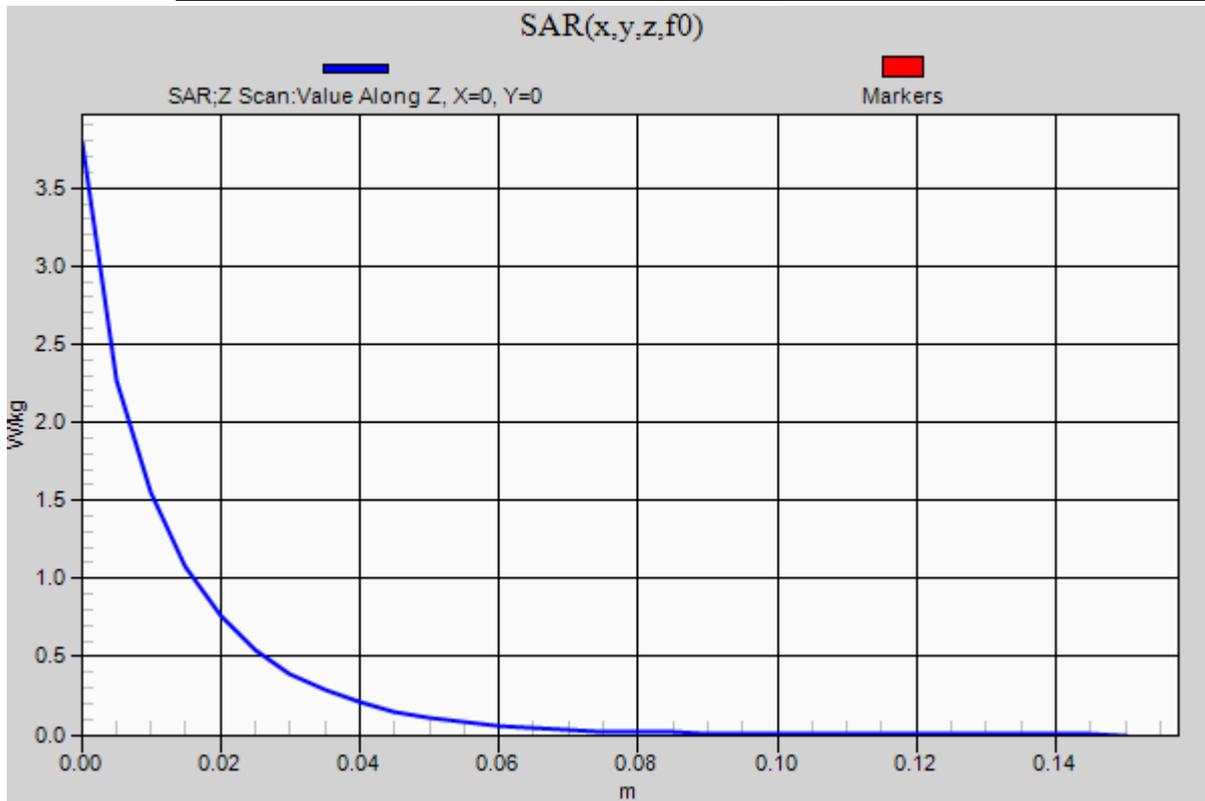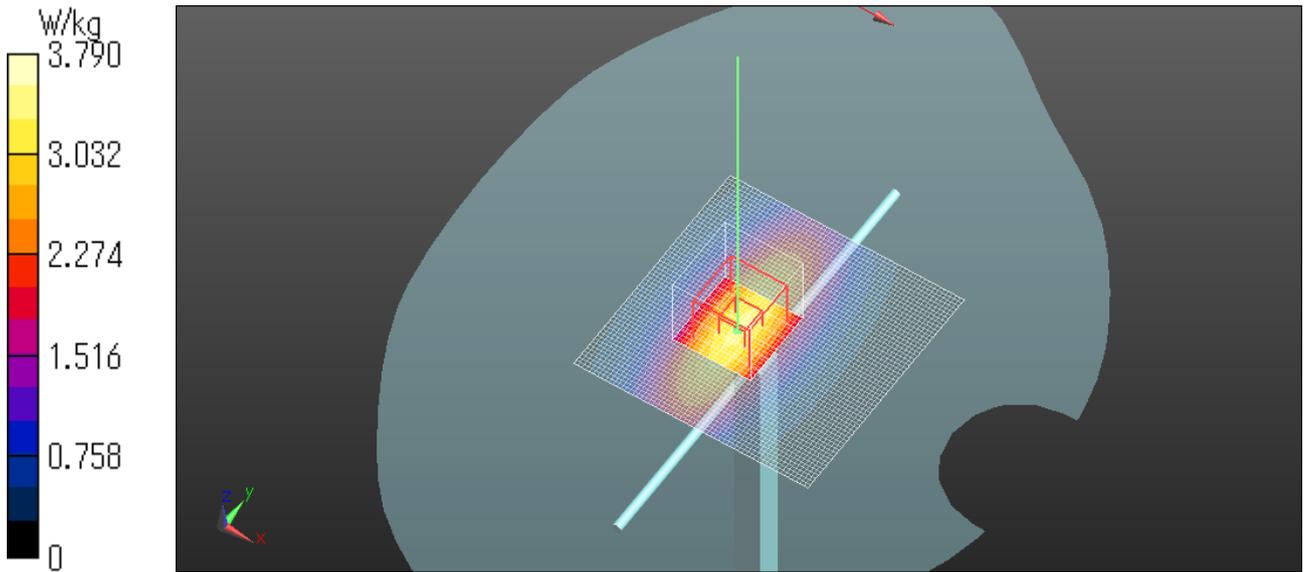

System check result 1900MHz

Communication System: UID 0, #CW (0); Communication System Band: D1900 (1900.0 MHz); ; Duty Cycle: 1:1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.415$ S/m; $\epsilon_r = 38.326$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration

Probe: EX3DV4 - SN3917; ConvF(8.17, 8.17, 8.17) @ 1900 MHz;

Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 0mm (Fix Surface)

Electronics: DAE4 Sn1369;

Phantom: SAM 20degree; Type: QD000P40CD; Serial: TP:1764

Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Pin/250mW 1900/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 15.7 W/kg

Pin/250mW 1900/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 108.8 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 19.3 W/kg

SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.21 W/kg

Maximum value of SAR (measured) = 15.8 W/kg



Pin/250mW 1900/Z Scan (1x1x31): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 16.8 W/kg

Ambient Temp. : 22.5 degree.C. Liquid Temp.; 22.0 degree.C.

Liquid temp. is kept within the 2 degree.C. during the test.

Date: 2020/03/26

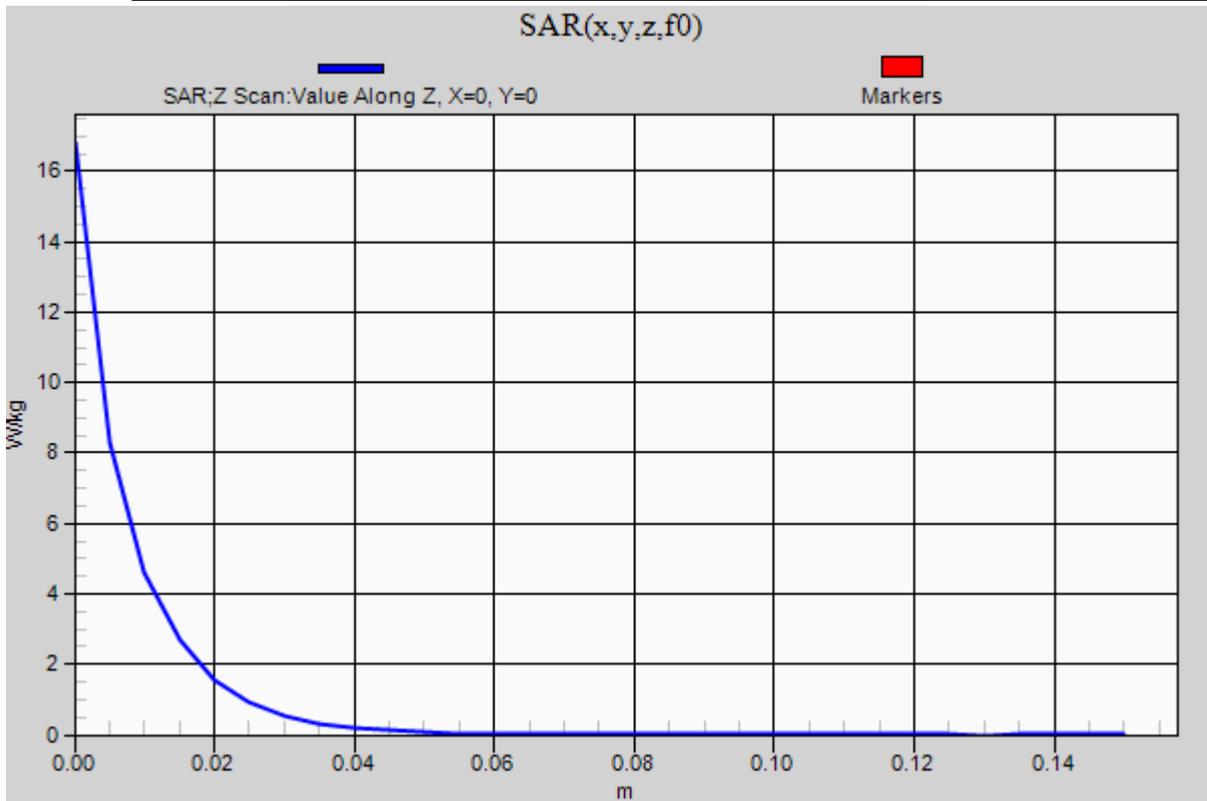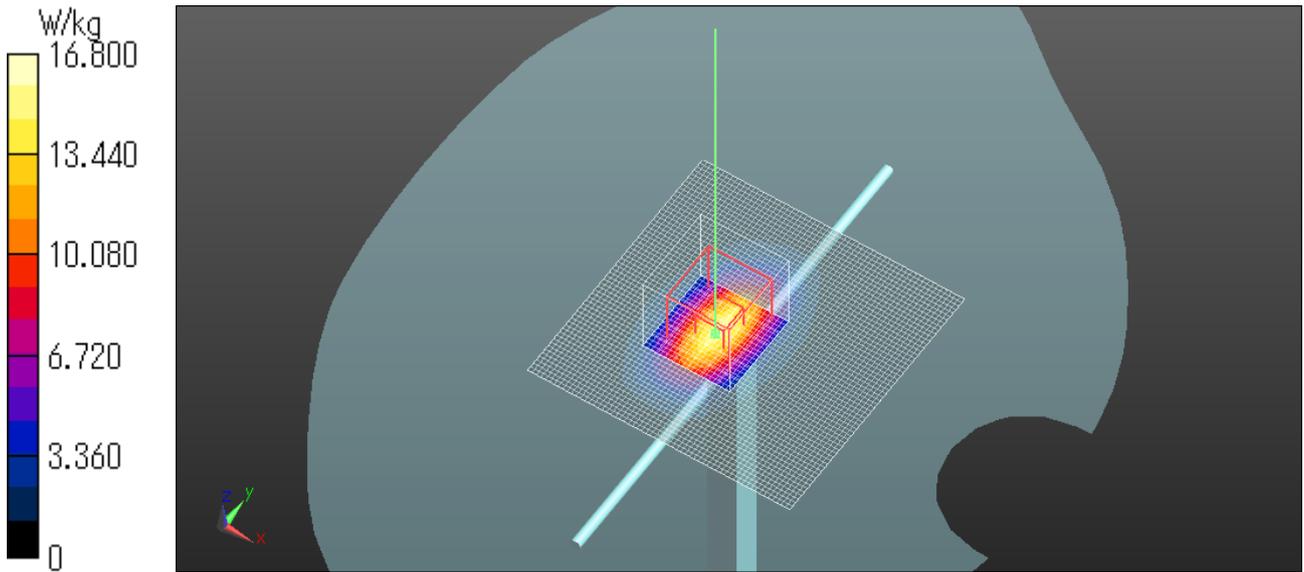

APPENDIX 2 : SAR Measurement data

Evaluation procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the E-field at a fixed location above the ear point or central position of flat phantom was used as a reference value for assessing the power drop.

Step 2: The SAR distribution at the exposed side of head or body position was measured at a distance of each device from the inner surface of the shell. The area covered the entire dimension of the antenna of EUT and the horizontal grid spacing was 15 mm x 15 mm, 12 mm x 12 mm or 10mm x 10mm. Based on these data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Around this point found in the Step 2 (area scan), a volume of 30mm x 30mm x 30mm or more was assessed by measuring 7 x 7 x 7 points at least for below 3GHz and a volume of 28 mm x 28mm x 22.5mm or more was assessed by measuring 8 x 8 x 6(ratio step method (*1)) points at least for 5GHz band.

And for any secondary peaks found in the Step2 which are within 2dB of maximum peak and not with this Step3 (Zoom scan) is repeated. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

(1). The data at the surface were extrapolated, since the center of the dipoles is 1mm(EX3DV4) away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm [4]. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

(2). The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x, y and z-directions) [4], [5]. The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.

(3). All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

***1. Ratio step method parameters used;**

The first measurement point: 2mm from the phantom surface, the initial grid separation: 2mm, subsequent graded grid ratio: 1.5

These parameters comply with the requirement of the KDB 865664D01.

Step 4: Re-measurement of the E-field at the same location as in Step 1.

Confirmation after SAR testing

It was checked that the power drift [W] is within +/-5%.The verification of power drift during the SAR test is that DASY5 system calculates the power drift by measuring the e-filed at the same location at beginning and the end of the scan measurement for each test position.

DASY5 system calculation Power drift value[dB] =20log(Ea)/(Eb)

Before SAR testing : Eb[V/m]

After SAR testing : Ea[V/m]

Limit of power drift[W] =+/-5%

X[dB]=10log[P]=10log(1.05/1)=10log(1.05)-10log(1)=0.212dB

from E-filed relations with power.

$p=E^2/\eta=E^2/$

Therefore, The correlation of power and the E-filed

$XdB=10log(P)=10log(E)^2=20log(E)$

Therefore,

The calculated power drift of DASY5 System must be the less than +/-0.212dB.

UL Japan, Inc.

Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999

Facsimile: +81 596 24 8124

Measurement data

WCDMA B2/Rear 5mm RMC12.2k 1880MHz

Communication System: UID 0, #WCDMA (0); Communication System Band: Band II; ; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.459$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(8.17, 8.17, 8.17) @ 1880 MHz;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369;
Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA001BB;Serial: TP:1203
Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)

WCDMA B2/Rear 5mm RMC12.2k 1880MHz/Area Scan (61x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.793 W/kg

WCDMA B2/Rear 5mm RMC12.2k 1880MHz/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.28 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.988 W/kg


SAR(1 g) = 0.368 W/kg; SAR(10 g) = 0.169 W/kg

Maximum value of SAR (measured) = 0.718 W/kg

Ambient Temp. : 22.0 degree.C. Liquid Temp.; 21.8 degree.C.

Liquid temp. is kept within the 2 degree.C. during the test.

Date: 2020/01/20

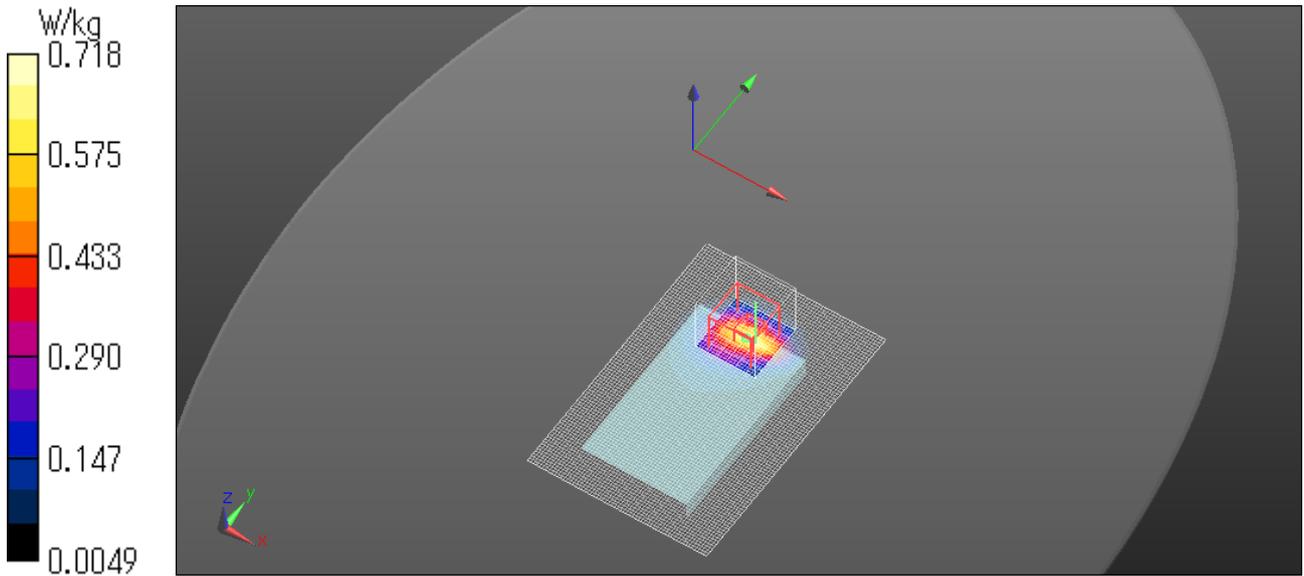

Plot No.:1

WCDMA B5/Rear 5mm RMC12.2k 826.4MHz

Communication System: UID 0, #WCDMA (0); Communication System Band: Band V; ; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 42.991$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration

Probe: EX3DV4 - SN3917; ConvF(9.89, 9.89, 9.89) @ 826.4 MHz;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1369;

Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA001BB;Serial: TP:1203

Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)

WCDMA B5/Rear 5mm RMC12.2k 826.4MHz/Area Scan (61x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.63 W/kg

WCDMA B5/Rear 5mm RMC12.2k 826.4MHz/Zoom Scan (7x7x7) (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 39.90 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.90 W/kg


SAR(1 g) = 0.876 W/kg; SAR(10 g) = 0.527 W/kg

Maximum value of SAR (measured) = 1.42 W/kg

Ambient Temp. : 23.0 degree.C. Liquid Temp.; 22.1 degree.C.

Liquid temp. is kept within the 2 degree.C. during the test.

Date: 2020/01/08

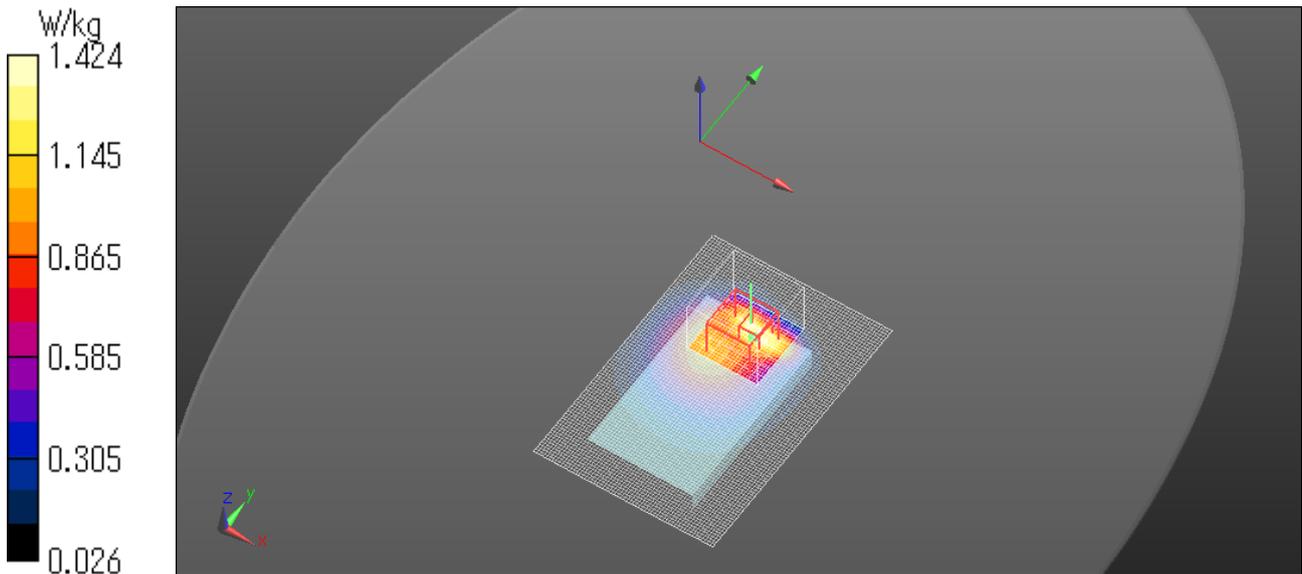

Plot No.:2

LTE B2/Rear 5mm QPSK 1900MHz RB1-49

Communication System: UID 0, #Generic LTE (0); Communication System Band: Band 2, E-UTRA/FDD (1850.0 - 1910.0 MHz); ; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 39.369$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration

Probe: EX3DV4 - SN3917; ConvF(8.17, 8.17, 8.17) @ 1900 MHz;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1369;

Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA001BB;Serial: TP:1203

Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)

LTE B2/Rear 5mm QPSK 1900MHz RB1-49/Area Scan (61x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.52 W/kg

LTE B2/Rear 5mm QPSK 1900MHz RB1-49/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 33.43 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.03 W/kg


SAR(1 g) = 0.804 W/kg; SAR(10 g) = 0.372 W/kg

Maximum value of SAR (measured) = 1.50 W/kg

Ambient Temp. : 22.0 degree.C. Liquid Temp.; 21.8 degree.C.

Liquid temp. is kept within the 2 degree.C. during the test.

Date: 2020/01/20

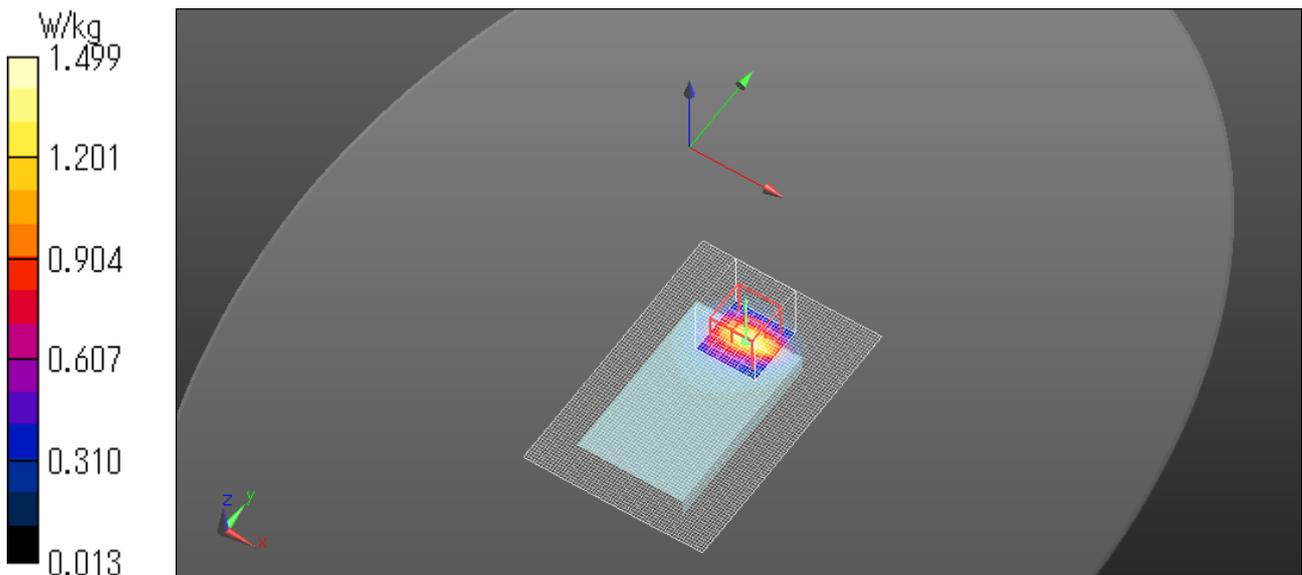

Plot No.:3

LTE B5/Rear 5mm QPSK 844MHz RB1-24

Communication System: UID 0, #Generic LTE (0); Communication System Band: Band 5, E-UTRA/FDD (824.0 - 849.0 MHz); ; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 844$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration

Probe: EX3DV4 - SN3917; ConvF(9.89, 9.89, 9.89) @ 844 MHz;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1369;

Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA001BB;Serial: TP:1203

Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)

LTE B5/Rear 5mm QPSK 844MHz RB1-24/Area Scan (61x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.08 W/kg

LTE B5/Rear 5mm QPSK 844MHz RB1-24/Zoom Scan (7x7x7) (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 34.08 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.32 W/kg


SAR(1 g) = 0.587 W/kg; SAR(10 g) = 0.337 W/kg

Maximum value of SAR (measured) = 0.991 W/kg

Ambient Temp. : 23.0 degree.C. Liquid Temp.; 22.5 degree.C.

Liquid temp. is kept within the 2 degree.C. during the test.

Date: 2020/01/09

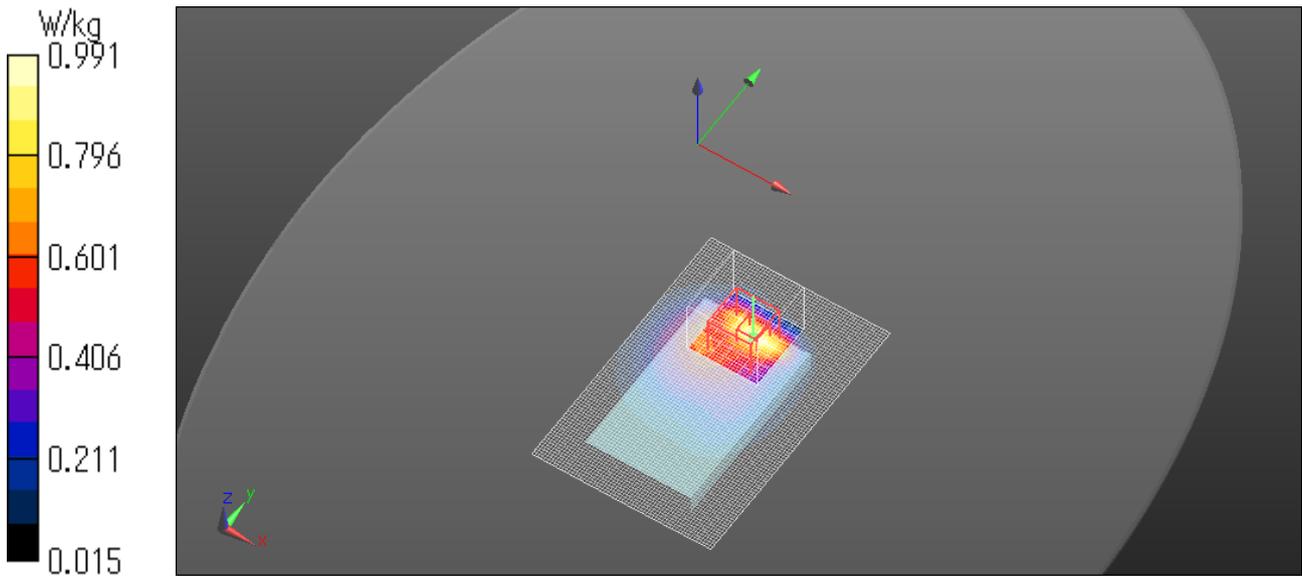

Plot No.:4

LTE B7/Rear 5mm QPSK 2560MHz RB1-49

Communication System: UID 0, #Generic LTE (0); Communication System Band: Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz); ; Duty Cycle: 1:1

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.909$ S/m; $\epsilon_r = 38.254$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration

Probe: EX3DV4 - SN3917; ConvF(7.2, 7.2, 7.2) @ 2560 MHz;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1369;

Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA001BB;Serial: TP:1203

Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)

LTE B7/Rear 5mm QPSK 2560MHz RB1-49/Area Scan (81x111x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.72 W/kg

LTE B7/Rear 5mm QPSK 2560MHz RB1-49/Zoom Scan (7x7x7) (9x9x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.36 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.16 W/kg


SAR(1 g) = 0.759 W/kg; SAR(10 g) = 0.300 W/kg

Maximum value of SAR (measured) = 1.61 W/kg

Ambient Temp. : 21.0 degree.C. Liquid Temp.; 20.8 degree.C.

Liquid temp. is kept within the 2 degree.C. during the test.

Date: 2020/01/17

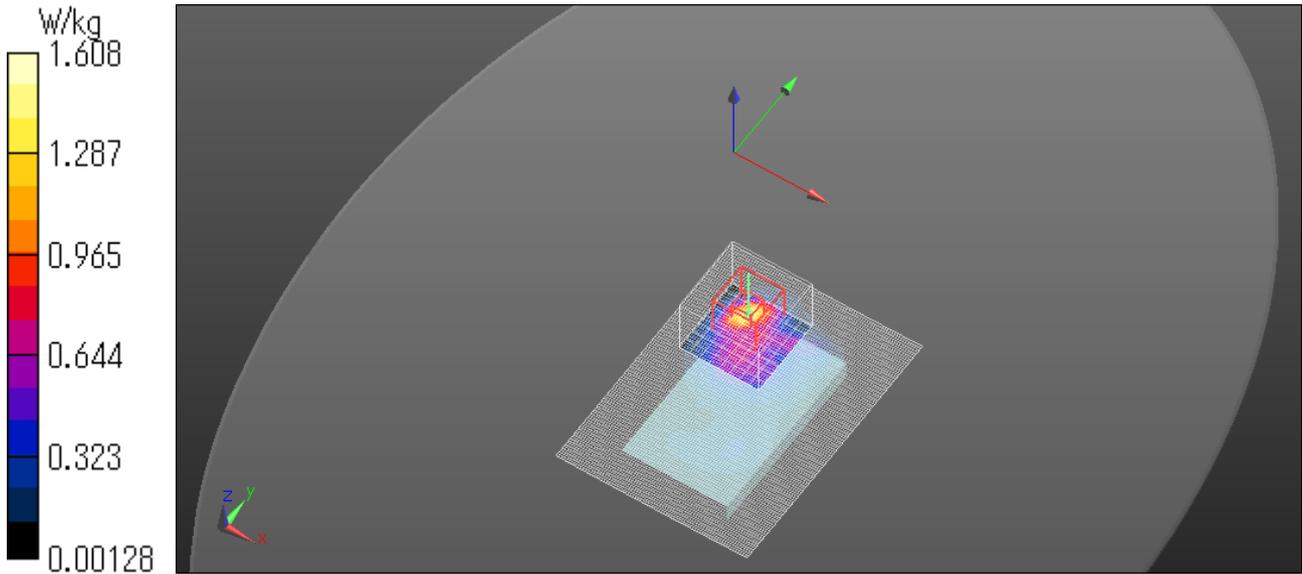

Plot No.:5

LTE B26/Rear 5mm QPSK 819MHz RB1-0

Communication System: UID 0, #Generic LTE (0); Communication System Band: Band 26, E-UTRA/FDD (814.0 - 849.0 MHz); ; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 819$ MHz; $\sigma = 0.907$ S/m; $\epsilon_r = 42.808$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration

Probe: EX3DV4 - SN3917; ConvF(9.89, 9.89, 9.89) @ 819 MHz;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1369;

Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA001BB;Serial: TP:1203

Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)

LTE B26/Rear 5mm QPSK 819MHz RB1-0/Area Scan (61x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.12 W/kg

LTE B26/Rear 5mm QPSK 819MHz RB1-0/Zoom Scan (7x7x7) (7x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 34.04 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.34 W/kg


SAR(1 g) = 0.597 W/kg; SAR(10 g) = 0.358 W/kg

Maximum value of SAR (measured) = 0.982 W/kg

Ambient Temp. : 21.0 degree.C. Liquid Temp.; 21.0 degree.C.

Liquid temp. is kept within the 2 degree.C. during the test.

Date: 2020/01/15

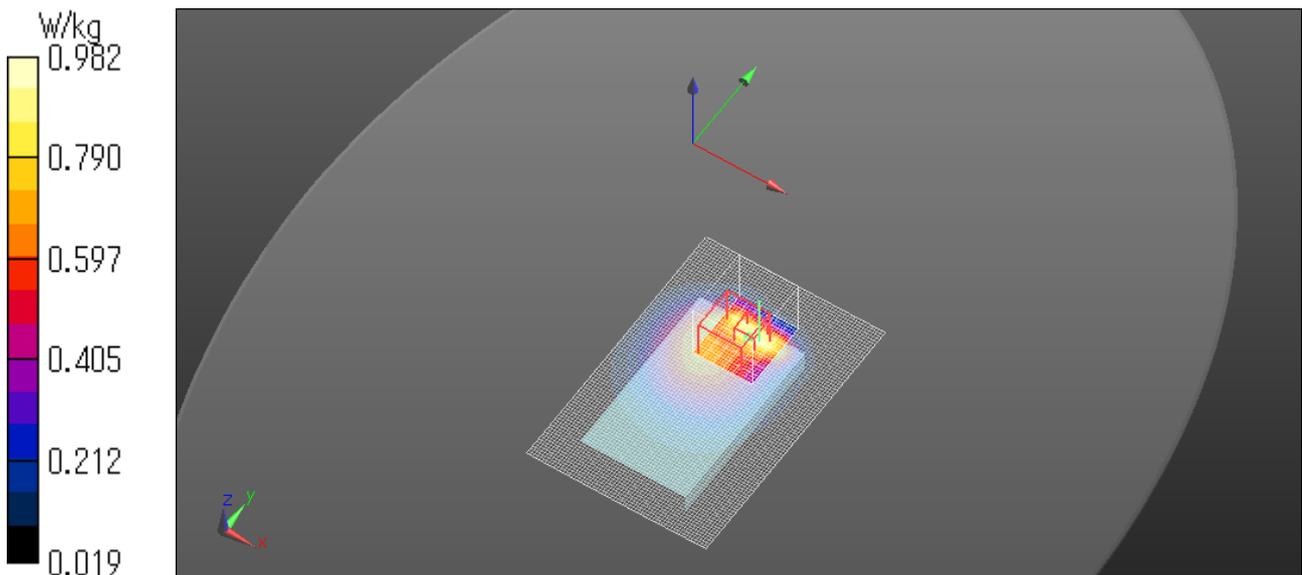

Plot No.:6


Bluetooth/Front 5mm DH5 2441MHz

Communication System: UID 0, #Bluetooth (0); Communication System Band: Bluetooth; ; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.791$ S/m; $\epsilon_r = 39.294$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(7.41, 7.41, 7.41) @ 2441 MHz;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369;
Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA001BB;Serial: TP:1203
Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)

Bluetooth/Front 5mm DH5 2441MHz/Area Scan (81x111x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0277 W/kg

Bluetooth/Front 5mm DH5 2441MHz/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.0450 W/kg
SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00535 W/kg
Maximum value of SAR (measured) = 0.0215 W/kg

Ambient Temp. : 21.0 degree.C. Liquid Temp.; 19.8 degree.C.
Liquid temp. is kept within the 2 degree.C. during the test.
Date: 2020/01/22

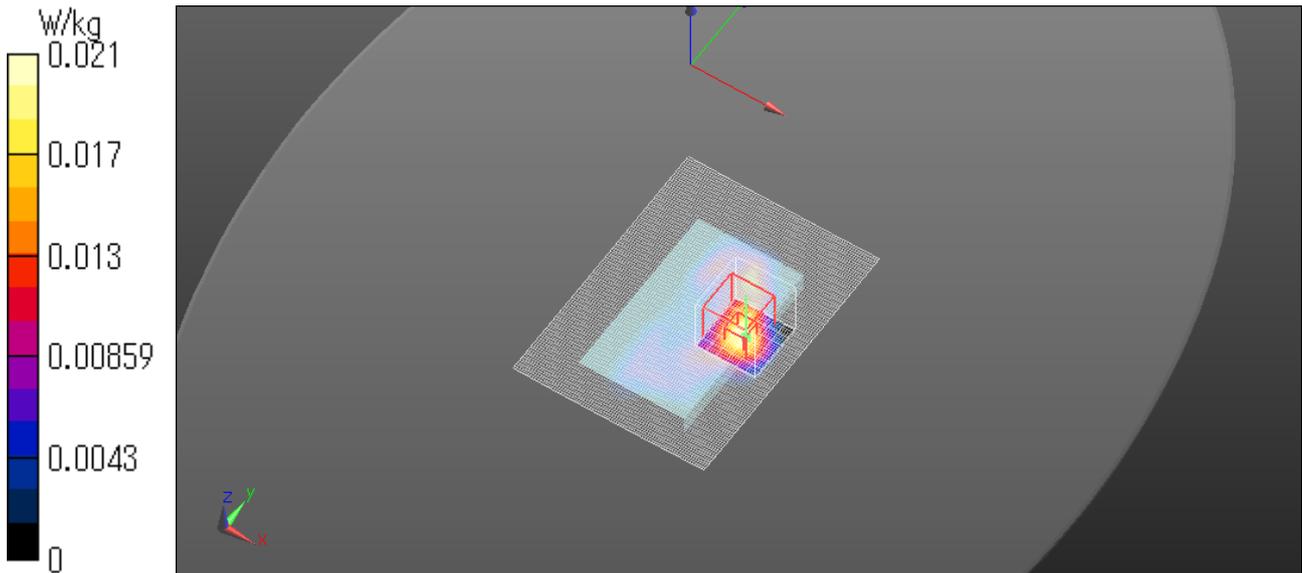

Plot No.:7


BTLE/Rear 5mm 2440MHz

Communication System: UID 0, #Bluetooth (0); Communication System Band: BTLE; ; Duty Cycle: 1:1
Medium parameters used: $f = 2440$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 39.295$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(7.41, 7.41, 7.41) @ 2440 MHz;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369;
Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA001BB;Serial: TP:1203
Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)

BTLE/Rear 5mm 2440MHz/Area Scan (81x111x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.121 W/kg

BTLE/Rear 5mm 2440MHz/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 6.263 V/m; Power Drift = 0.13 dB
Peak SAR (extrapolated) = 0.154 W/kg
SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.017 W/kg
Maximum value of SAR (measured) = 0.0778 W/kg

Ambient Temp. : 22.0 degree.C. Liquid Temp.; 20.5 degree.C.
Liquid temp. is kept within the 2 degree.C. during the test.
Date: 2020/01/23

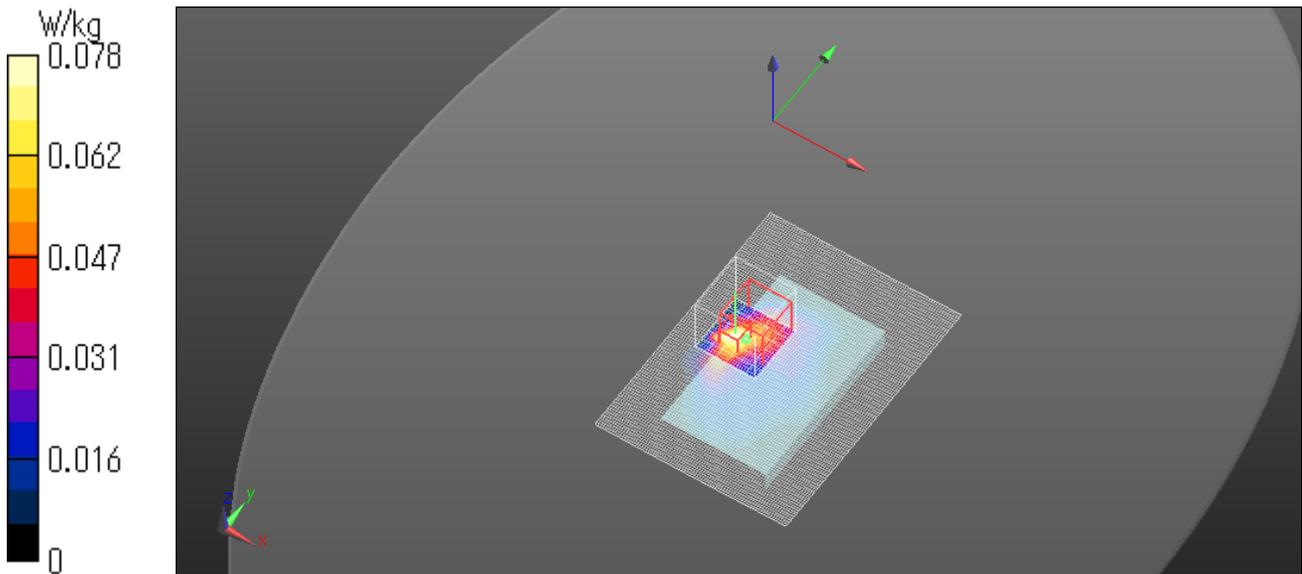

Plot No.:8

WLAN 11b 1Mbps/Rear 5mm 2462MHz

Communication System: UID 0, #WLAN 11a/b/g/n (0); Communication System Band: 11b/g/n (2.4G); ; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.809$ S/m; $\epsilon_r = 39.287$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration

Probe: EX3DV4 - SN3917; ConvF(7.41, 7.41, 7.41) @ 2462 MHz;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1369;

Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA001BB;Serial: TP:1203

Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)

WLAN 11b/Rear 5mm 2462MHz/Area Scan (81x111x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.247 W/kg

WLAN 11b/Rear 5mm 2462MHz/Zoom Scan (7x7x7) (9x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.13 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.266 W/kg


SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.174 W/kg

Ambient Temp. : 21.0 degree.C. Liquid Temp.; 19.8 degree.C.

Liquid temp. is kept within the 2 degree.C. during the test.

Date: 2020/01/22

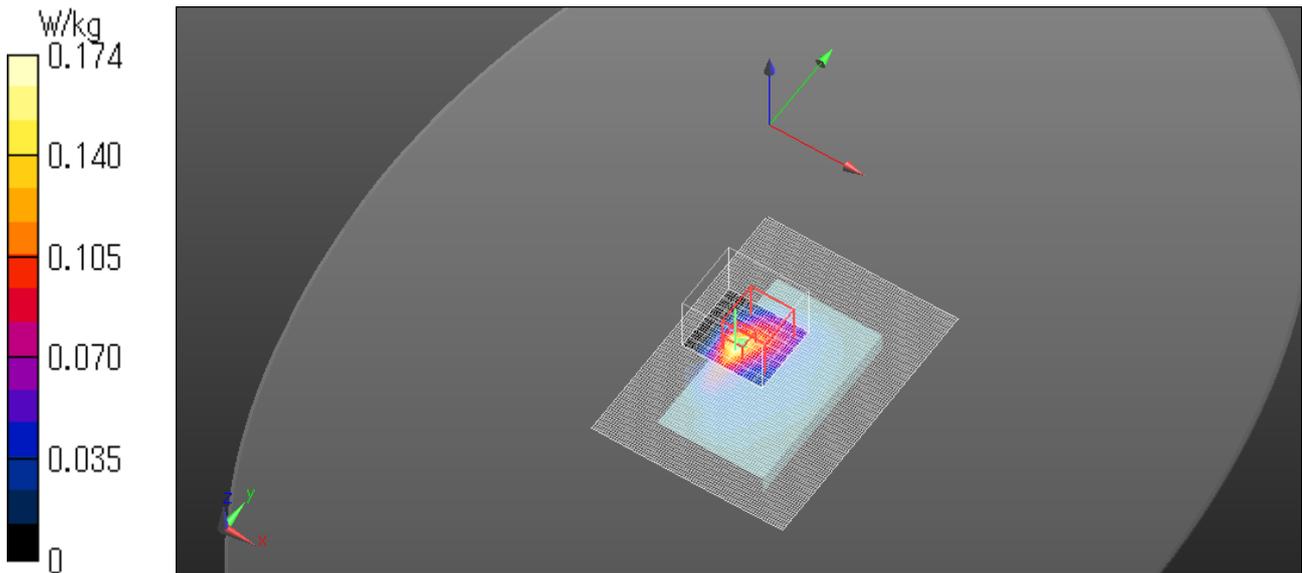

Plot No.:9

WLAN 5.3G 11n-40 MCS0/Rear 5mm 5310MHz

Communication System: UID 0, #WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W52 53); ; Duty Cycle: 1:1

Medium parameters used: $f = 5310$ MHz; $\sigma = 4.7$ S/m; $\epsilon_r = 35.337$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration

Probe: EX3DV4 - SN3922; ConvF(5.4, 5.4, 5.4) @ 5310 MHz;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1369;

Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA001BB;Serial: TP:1203

Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)

WLAN 5.3G 11n40 MCS0/Rear 5mm 5310MHz/Area Scan (101x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.06 W/kg

WLAN 5.3G 11n40 MCS0/Rear 5mm 5310MHz/Zoom Scan (7x7x7) (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 17.13 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 2.14 W/kg


SAR(1 g) = 0.471 W/kg; SAR(10 g) = 0.120 W/kg

Maximum value of SAR (measured) = 1.29 W/kg

Ambient Temp. : 22.0 degree.C. Liquid Temp.; 21.5 degree.C.

Liquid temp. is kept within the 2 degree.C. during the test.

Date: 2020/01/23

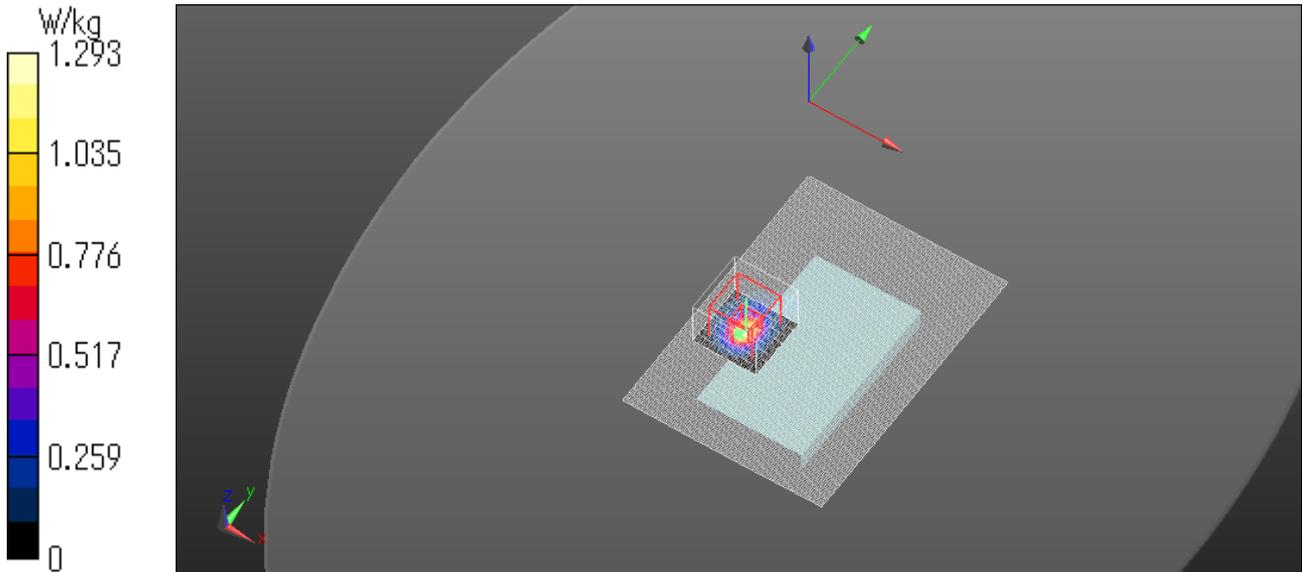

Plot No.:10

WLAN 5.6G 11n-40 MCS0/Rear 5mm 5510MHz

Communication System: UID 0, #WLAN 11a/b/g/n (0); Communication System Band: 11a/n (W56); ; Duty Cycle: 1:1
Medium parameters used: $f = 5510$ MHz; $\sigma = 4.868$ S/m; $\epsilon_r = 35.285$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration

Probe: EX3DV4 - SN3922; ConvF(4.61, 4.61, 4.61) @ 5510 MHz;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1369;

Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA001BB;Serial: TP:1203

Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)

WLAN 5.6G 11n40 MCS0/Rear 5mm 5510MHz/Area Scan (101x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.925 W/kg

WLAN 5.6G 11n40 MCS0/Rear 5mm 5510MHz/Zoom Scan (7x7x7) (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 16.95 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.98 W/kg


SAR(1 g) = 0.425 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 1.10 W/kg

Ambient Temp. : 22.0 degree.C. Liquid Temp.; 21.1 degree.C.

Liquid temp. is kept within the 2 degree.C. during the test.

Date: 2020/01/24

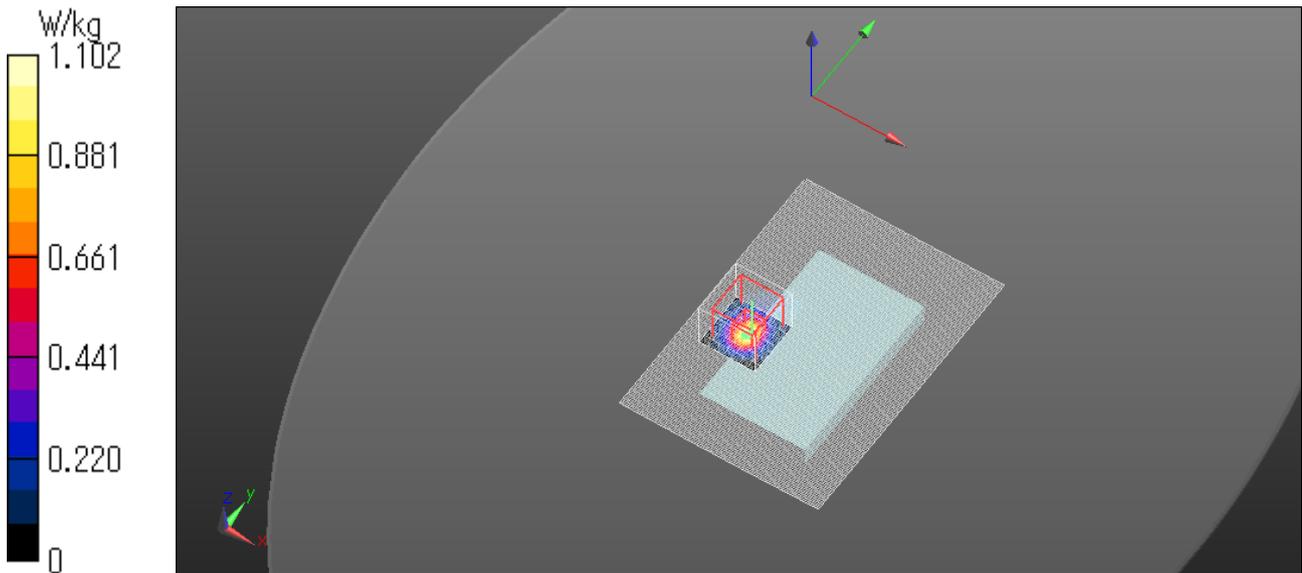

Plot No.:11


GSM850/Rear 5mm GPRS GMSK 4 times slots 824.2MHz

Communication System: UID 0, #Generic GSM (0); Communication System Band: GSM 850 (824.0 - 849.0 MHz); ; Duty Cycle: 1:2.09991
Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 40.149$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(9.89, 9.89, 9.89) @ 824.2 MHz;
Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369;
Phantom: SAM 20degree; Type: QD000P40CD;Serial: TP:1764
Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

GSM850/Rear 5mm GPRS 4up L ch/Area Scan (61x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.02 W/kg

GSM850/Rear 5mm GPRS 4up L ch/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 33.24 V/m; Power Drift = 0.11 dB
Peak SAR (extrapolated) = 1.77 W/kg
SAR(1 g) = 0.693 W/kg; SAR(10 g) = 0.355 W/kg
Maximum value of SAR (measured) = 1.27 W/kg

Ambient Temp. : 22.0 degree.C. Liquid Temp.; 21.8 degree.C.
Liquid temp. is kept within the 2 degree.C. during the test.
Date: 2020/03/24

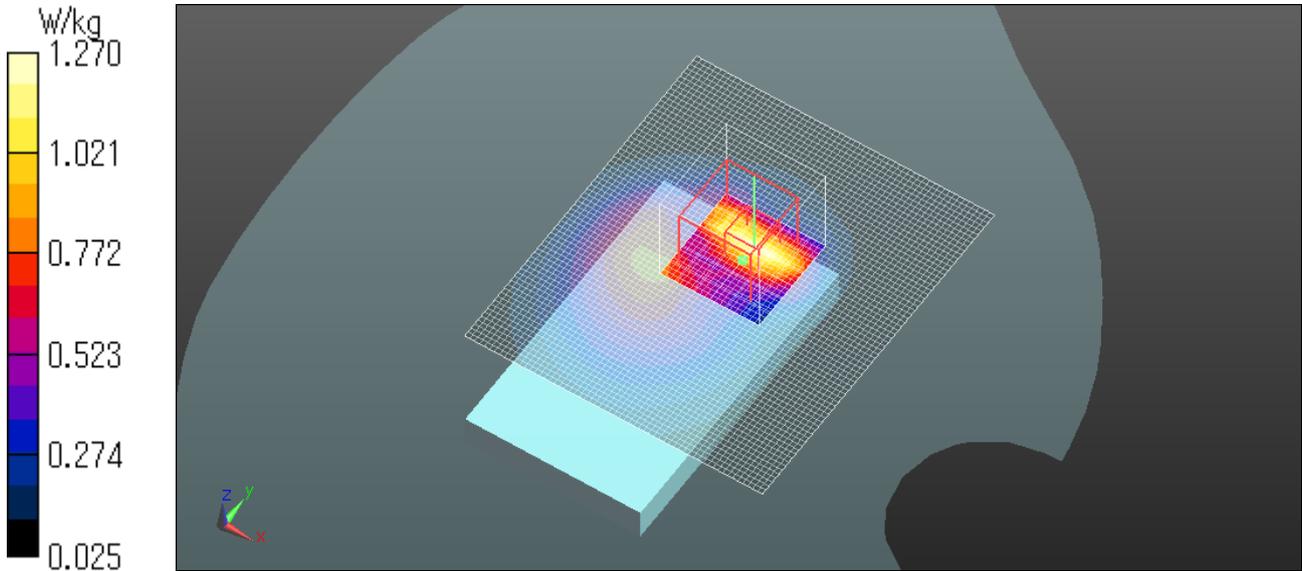

Plot No.:12

PCS1900/Rear 5mm GPRS GMSK 4 times slots 1909.8MHz

Communication System: UID 0, #Generic GSM (0); Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); ; Duty Cycle: 1:2.09991

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.421$ S/m; $\epsilon_r = 38.327$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration

Probe: EX3DV4 - SN3917; ConvF(8.17, 8.17, 8.17) @ 1909.8 MHz;

Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1369;

Phantom: SAM 20degree; Type: QD000P40CD;Serial: TP:1764

Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

PCS1900/Rear 5mm GPRS 4up H ch/Area Scan (61x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.60 W/kg

PCS1900/Rear 5mm GPRS 4up H ch/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.66 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.00 W/kg


SAR(1 g) = 0.801 W/kg; SAR(10 g) = 0.369 W/kg

Maximum value of SAR (measured) = 1.45 W/kg

Ambient Temp. : 22.5 degree.C. Liquid Temp.; 22.0 degree.C.

Liquid temp. is kept within the 2 degree.C. during the test.

Date: 2020/03/26

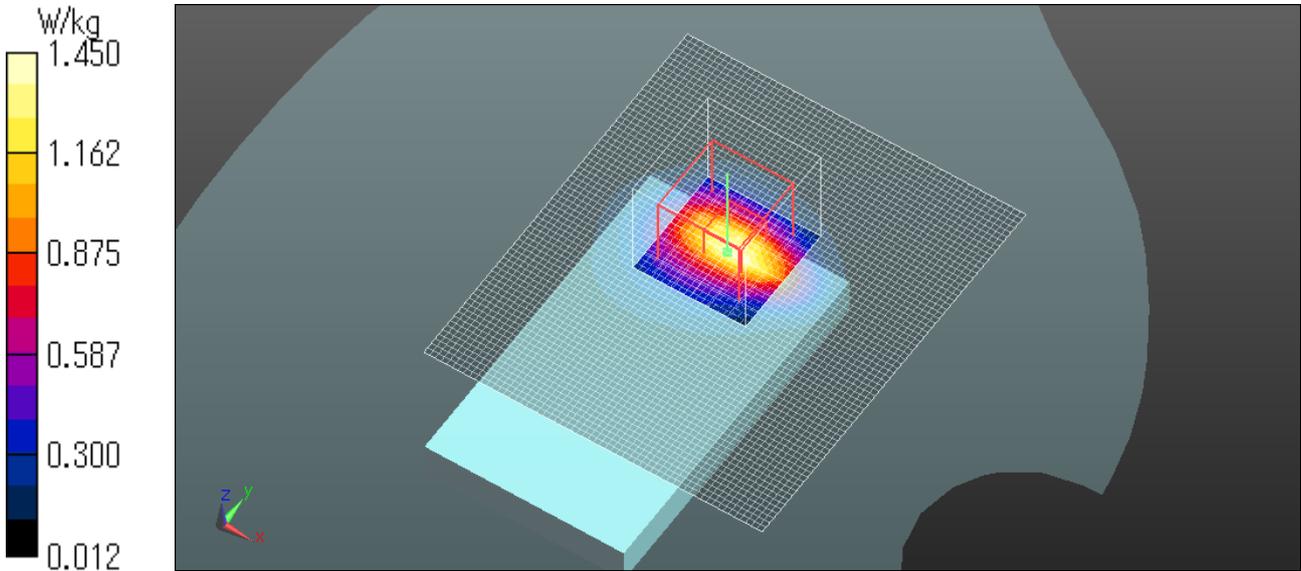

Plot No.:13


Repeat WCDMA B5/Rear 5mm RMC12.2k 846.6MHz

Communication System: UID 0, #WCDMA (0); Communication System Band: Band V; ; Duty Cycle: 1:1
Medium parameters used: $f = 847$ MHz; $\sigma = 0.941$ S/m; $\epsilon_r = 42.92$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(9.89, 9.89, 9.89) @ 846.6 MHz;
Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369;
Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA001BB;Serial: TP:1203
Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)

Repeat WCDMA B5/Rear 5mm RMC12.2k 846.6MHz/Area Scan (61x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.66 W/kg

Repeat WCDMA B5/Rear 5mm RMC12.2k 846.6MHz/Zoom Scan (7x7x7) (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 41.56 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 1.97 W/kg
SAR(1 g) = 0.899 W/kg; SAR(10 g) = 0.521 W/kg
Maximum value of SAR (measured) = 1.49 W/kg

Ambient Temp. : 23.0 degree.C. Liquid Temp.; 22.1 degree.C.
Liquid temp. is kept within the 2 degree.C. during the test.
Date: 2020/01/08

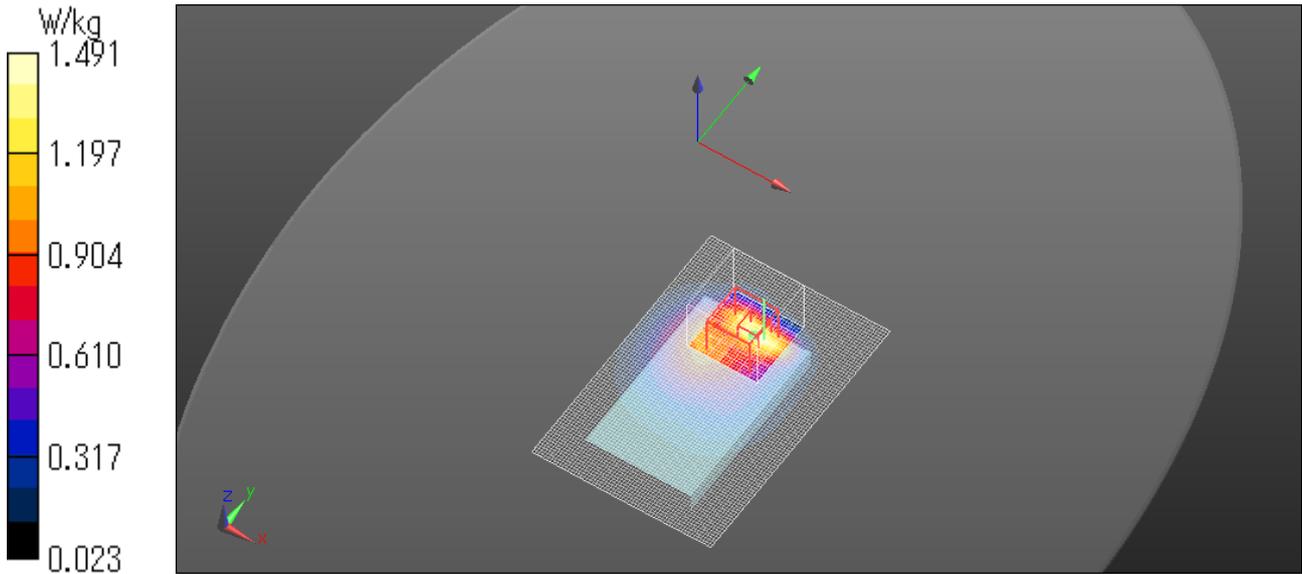

Plot No.:14

Repeat LTE B2/Rear 5mm QPSK 1900MHz RB1-49

Communication System: UID 0, #Generic LTE (0); Communication System Band: Band 2, E-UTRA/FDD (1850.0 - 1910.0 MHz); ; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.409$ S/m; $\epsilon_r = 39.369$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration

Probe: EX3DV4 - SN3917; ConvF(8.17, 8.17, 8.17) @ 1900 MHz;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1369;

Phantom: ELI v5.0 (20deg probe tilt); Type: QDOVA001BB;Serial: TP:1203

Measurement SW: DASY52, Version 52.10 (3);SEMCAD X Version 14.6.13 (7474)

Repeat LTE B2/Rear 5mm QPSK 1900MHz RB1-49/Area Scan (61x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.67 W/kg

Repeat LTE B2/Rear 5mm QPSK 1900MHz RB1-49/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 34.14 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.13 W/kg


SAR(1 g) = 0.801 W/kg; SAR(10 g) = 0.366 W/kg

Maximum value of SAR (measured) = 1.55 W/kg

Ambient Temp. : 21.0 degree.C. Liquid Temp.; 20.0 degree.C.

Liquid temp. is kept within the 2 degree.C. during the test.

Date: 2020/01/21

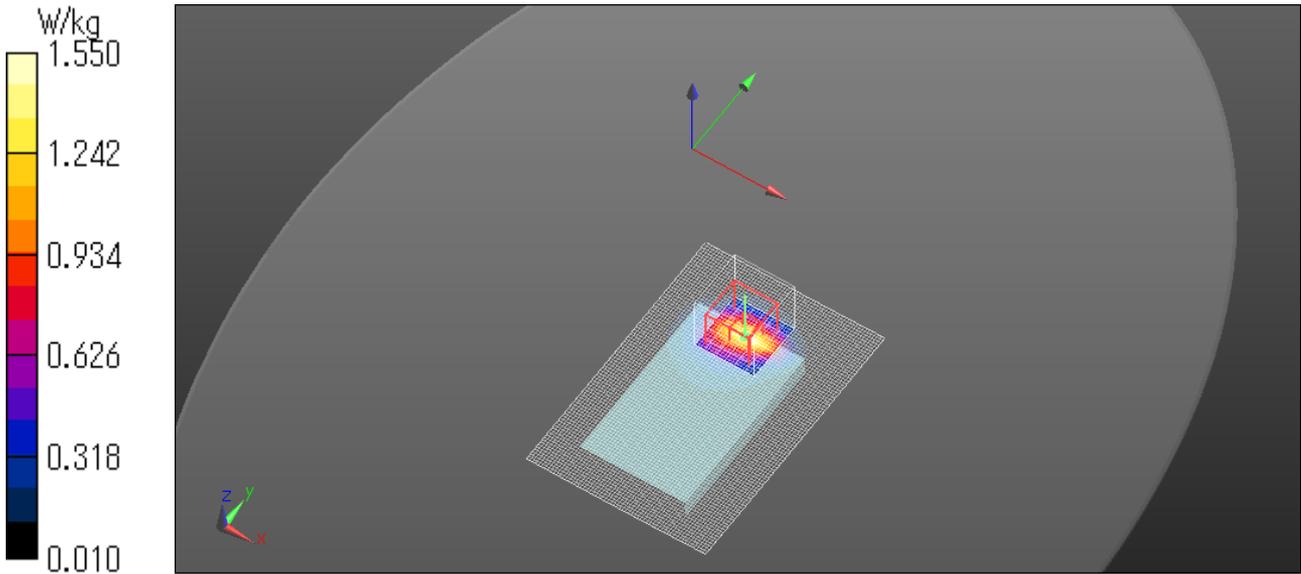

Plot No.:15


Repeat PCS1900/Rear 5mm GPRS GMSK 4 times slots 1909.8MHz

Communication System: UID 0, #Generic GSM (0); Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); ;
Duty Cycle: 1:2.09991
Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.421$ S/m; $\epsilon_r = 38.327$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
DASY5 Configuration
Probe: EX3DV4 - SN3917; ConvF(8.17, 8.17, 8.17) @ 1909.8 MHz;
Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1369;
Phantom: SAM 20degree; Type: QD000P40CD; Serial: TP:1764
Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

PCS1900/Rear 5mm GPRS 4up H ch re/Area Scan (61x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.39 W/kg

PCS1900/Rear 5mm GPRS 4up H ch re/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 31.82 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 1.95 W/kg
SAR(1 g) = 0.775 W/kg; SAR(10 g) = 0.356 W/kg
Maximum value of SAR (measured) = 1.40 W/kg


Ambient Temp. : 22.5 degree.C. Liquid Temp.; 22.0 degree.C.
Liquid temp. is kept within the 2 degree.C. during the test.
Date: 2020/03/26

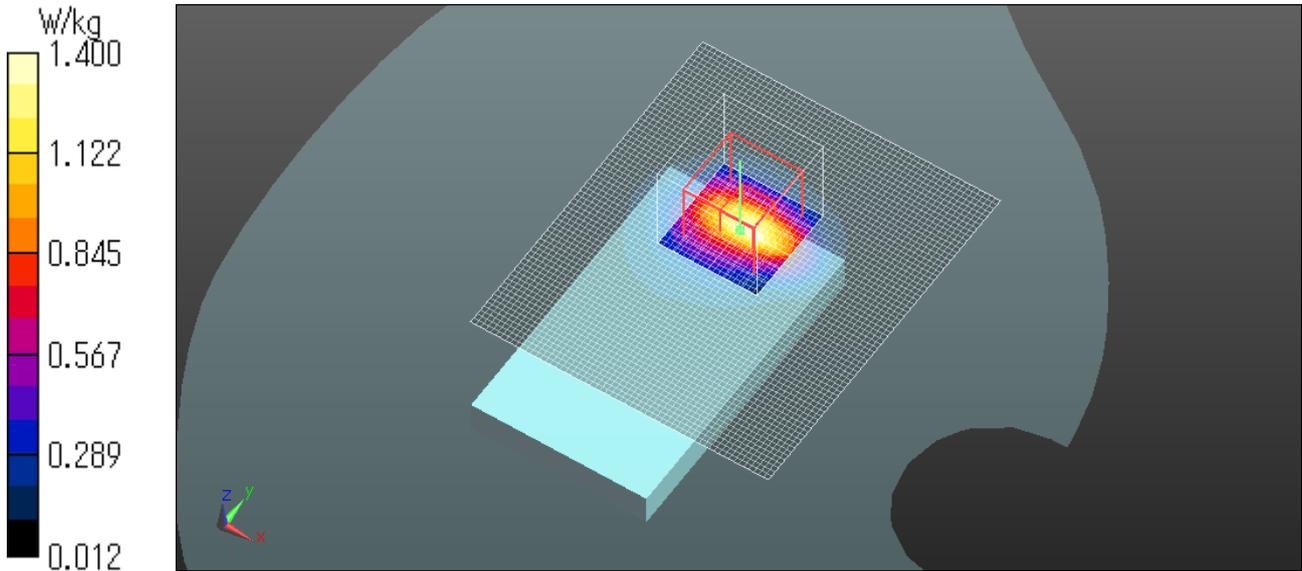

Plot No.:16

APPENDIX 3 : System specifications

Configuration and peripherals

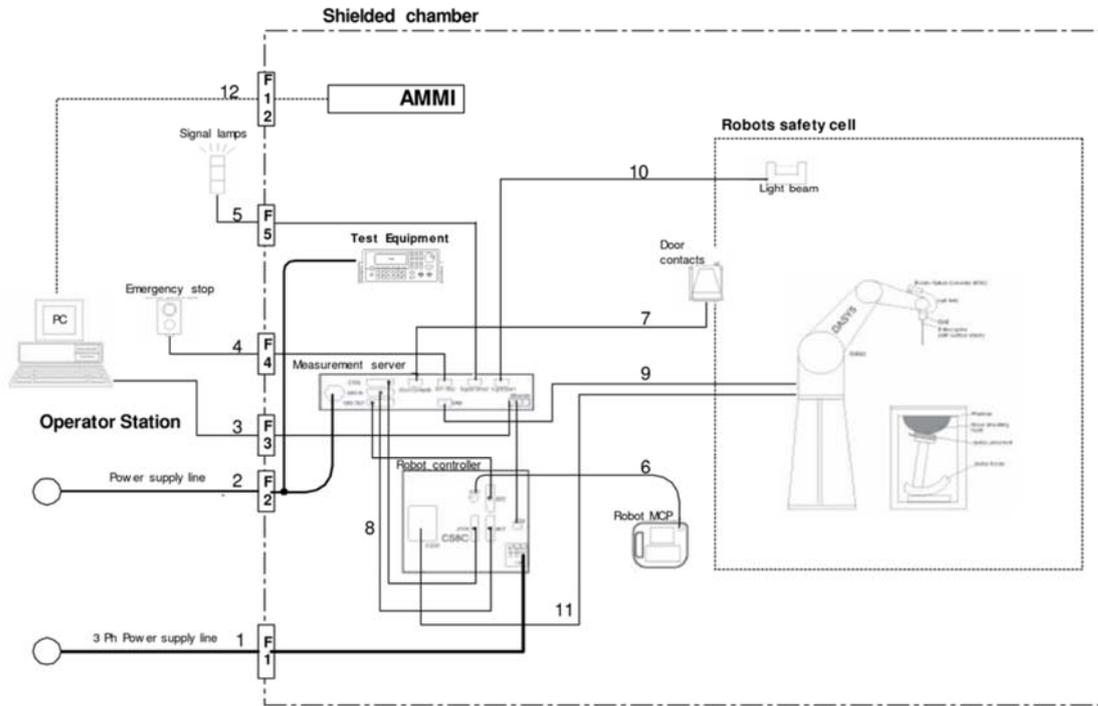

The DASYS system for performing compliance tests consist of the following items:
Our system is DASY6; however, it behaves as DASY5.

- a) A standard high precision 6-axis robot (Stäubli RX family) with controller and software.
An arm extension for accommodating the data acquisition electronics (DAE).
- b) An isotropic field probe optimized and calibrated for the targeted measurement.
- c) A data acquisition electronic (DAE), which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- d) The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection.
The EOC is connected to the measurement server.
- e) The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- f) The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- g) A computer running Windows 10 or 7 and the DASY5/6 software.
- h) Remote control with teaches pendant and additional circuitry for robot safety such as warning lamps, etc.
- i) The phantom, the device holder and other accessories according to the targeted measurement.

Specifications

a) Robot TX60L

Number of Axes	:	6
Nominal Load	:	2 kg
Maximum Load	:	5kg
Reach	:	920mm
Repeatability	:	+/-0.03mm
Control Unit	:	CS8c
Programming Language	:	VAL3
Weight	:	52.2kg
Manufacture	:	Stäubli Robotics

b) E-Field Probe

Model	:	EX3DV4
Construction	:	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycol ether)
Frequency	:	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	:	+/-0.3 dB in HSL (rotation around probe axis) +/-0.5 dB in tissue material (rotation normal probe axis)
Dynamic Range	:	10uW/g to > 100 mW/g; Linearity +/-0.2 dB(noise: typically < 1uW/g)
Dimensions	:	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	:	Highprecision dosimetric measurement in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6GHz with precision of better 30%.
Manufacture	:	Schmid & Partner Engineering AG



EX3DV4 E-field Probe

c)Data Acquisition Electronic (DAE4)

Features	:	Signal amplifier, multiplexer, A/D converter and control logic Serial optical link for communication with DASY5 embedded system (fully remote controlled) Two step probe touch detector for mechanical surface detection and emergency robot stop
Measurement Range	:	-100 to +300 mV (16 bit resolution and two range settings: 4mV, 400mV)
Input Offset voltage	:	< 5 μ V (with auto zero)
Input Resistance	:	200 M Ω
Input Bias Current	:	< 50 fA
Battery Power	:	> 10 h of operation (with two 9.6 V NiMH accus)
Dimension	:	60 x 60 x 68 mm
Manufacture	:	Schmid & Partner Engineering AG

d)Electro-Optic Converter (EOC)

Version	:	EOC 61
Description	:	for TX60 robot arm, including proximity sensor
Manufacture	:	Schmid & Partner Engineering AG

e)DASY5 Measurement server

Features	:	Intel ULV Celeron 400MHz 128MB chip disk and 128MB RAM 16 Bit A/D converter for surface detection system Vacuum Fluorescent Display Robot Interface Serial link to DAE (with watchdog supervision) Door contact port (Possibility to connect a light curtain) Emergency stop port (to connect the remote control) Signal lamps port Light beam port Three Ethernet connection ports Two USB 2.0 Ports Two serial links Expansion port for future applications
Dimensions (L x W x H)	:	440 x 241 x 89 mm
Manufacture	:	Schmid & Partner Engineering AG

f) Light Beam Switches

Version	:	LB5
Dimensions (L x H)	:	110 x 80 mm
Thickness	:	12 mm
Beam-length	:	80 mm
Manufacture	:	Schmid & Partner Engineering AG

g)Software

Item	:	Dosimetric Assessment System DASY5
Type No.	:	SD 000 401A, SD 000 402A
Software version No.	:	DASY52, Version 52.6 (1)
Manufacture / Origin	:	Schmid & Partner Engineering AG

h)Robot Control Unit

Weight	:	70 Kg
AC Input Voltage	:	selectable
Manufacturer	:	Stäubli Robotics

i)Phantom and Device Holder

Phantom

Type	:	SAM Twin Phantom V4.0
Description	:	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.
Material	:	Vinylester, glass fiber reinforced (VE-GF)
Shell Material	:	Fiberglass
Thickness	:	2.0 +/-0.2 mm
Dimensions	:	Length: 1000 mm Width: 500 mm Height: adjustable feet
Volume	:	Approx. 25 liters
Manufacture	:	Schmid & Partner Engineering AG

Type	:	2mm Flat phantom ELI4.0 or 5
Description	:	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209 Part II and all known tissue simulating liquids. ELI4 has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is supported by software version DASY4.5 and higher and is compatible with all SPEAG dosimetric probes and dipoles.
Material	:	Vinylester, glass fiber reinforced (VE-GF)
Shell Thickness	:	2.0 ± 0.2 mm (sagging: <1%)
Filling Volume	:	approx. 30 liters
Dimensions	:	Major ellipse axis: 600 mm Minor axis: 400 mm
Manufacture	:	Schmid & Partner Engineering AG

Device Holder

In combination with the Twin SAM Phantom V4.0/V4.0c or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).

Material	:	POM
-----------------	---	-----

Laptio Extensions kit

Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.). It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin-SAM, ELI4 Phantoms.

Material	:	POM, Acrylic glass, Foam
-----------------	---	--------------------------

Urethane

For this measurement, the urethane foam was used as device holder.

j) Simulated Tissues (Liquid)

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Product identifier

Trade name	Broad Band Tissue Simulation Liquid HBBL600-1000V6, MBBL600-6000V6, HU16B, MU16B
Manufacturer/Supplier	Schmid & Partner Engineering AG

Declarable components:

CAS: 107-21-1 EINECS: 203-473-3 Reg.nr.: 01-2119456816-28-0000	Ethenediol STOT RE 2, H373; Acute Tox. 4, H302	< 5.2%
CAS: 68608-26-4 EINECS: 271-781-5 Reg.nr.: 01-2119527859-22-0000	Sodium petroleum sulfonate Eye Irrit. 2, H319	< 2.9%
CAS: 107-41-5 EINECS: 203-489-0 Reg.nr.: 01-2119539582-35-0000	Hexylene Glycol / 2-Methyl-pentane-2,4-diol Skin Irrit. 2, H315; Eye Irrit. 2, H319	< 2.9%
CAS: 68920-66-1 NLP: 500-236-9 Reg.nr.: 01-2119489407-26-0000	Alkoxylated alcohol, > C₁₆ Aquatic Chronic 2, H411; Skin Irrit. 2, H315; Eye Irrit. 2, H319	< 2.0%

System Check Dipole SAR Calibration Certificate -Dipole 835MHz(D835V2,S/N:4d149)

Calibration Laboratory of
 Schmid & Partner
 Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client **UL Japan (Vitec)**

Certificate No: **D835V2-4d149_Mar19**

CALIBRATION CERTIFICATE

Object: **D835V2 - SN:4d149**

Calibration procedure(s): **QA CAL-05.v11
 Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**

Calibration date: **March 13, 2019**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19
Reference Probe EX3DV4	SN: 7349	31-Dec-18 (No. EX3-7349_Dec18)	Dec-19
DAE4	SN: 601	04-Oct-18 (No. DAE4-601_Oct18)	Oct-19

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	07-Oct-15 (in house check Feb-19)	In house check: Oct-20
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-18)	In house check: Oct-20
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-18)	In house check: Oct-19

	Name	Function	Signature
Calibrated by:	Manu Seitz	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: March 18, 2019

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	41.9 ± 6 %	0.91 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.39 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.50 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.56 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.21 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.3 ± 6 %	1.01 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.46 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.51 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW Input power	1.61 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.27 W/kg ± 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.6 Ω - 5.3 j Ω
Return Loss	- 25.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.3 Ω - 7.1 j Ω
Return Loss	- 22.2 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.391 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

DASY5 Validation Report for Head TSL

Date: 13.03.2019

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d149


Communication System: UID 0 - CW; Frequency: 835 MHz
Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.91 \text{ S/m}$; $\epsilon_r = 41.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:


- Probe: EX3DV4 - SN7349; ConvF(10, 10, 10) @ 835 MHz; Calibrated: 31.12.2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.10.2018
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 62.30 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 3.61 W/kg
SAR(1 g) = 2.39 W/kg; SAR(10 g) = 1.56 W/kg
Maximum value of SAR (measured) = 3.20 W/kg

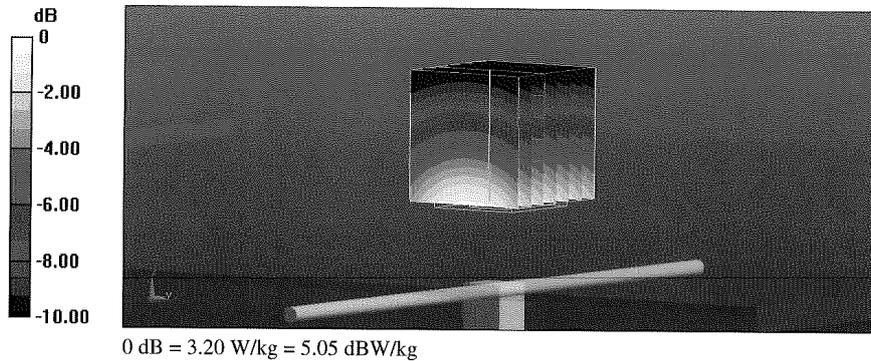

Impedance Measurement Plot for Head TSL

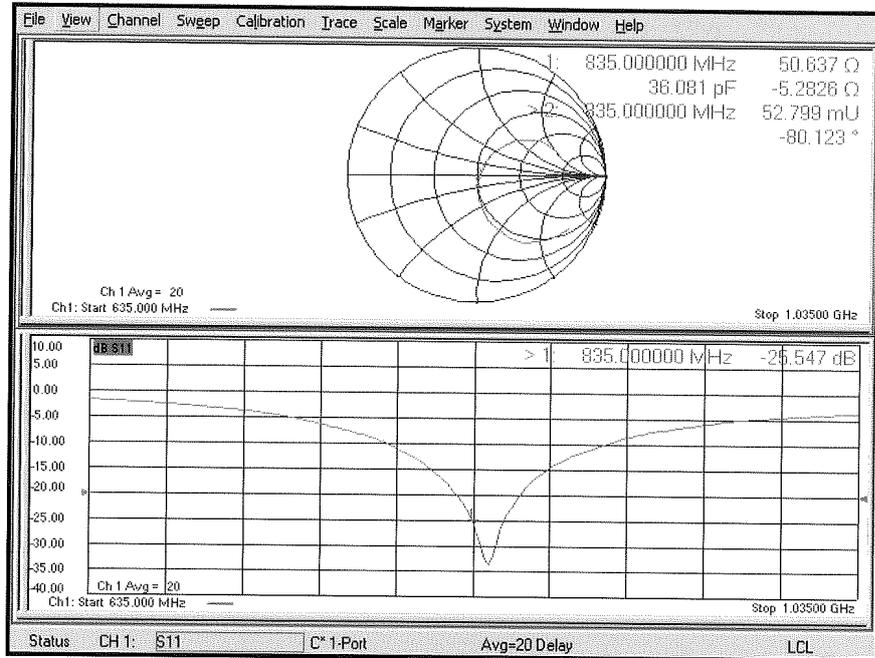

DASY5 Validation Report for Body TSL

Date: 13.03.2019

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d149


Communication System: UID 0 - CW; Frequency: 835 MHz
Medium parameters used: $f = 835$ MHz; $\sigma = 1.01$ S/m; $\epsilon_r = 54.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:


- Probe: EX3DV4 - SN7349; ConvF(10.15, 10.15, 10.15) @ 835 MHz; Calibrated: 31.12.2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.10.2018
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 60.01 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 3.61 W/kg
SAR(1 g) = 2.46 W/kg; SAR(10 g) = 1.61 W/kg
Maximum value of SAR (measured) = 3.24 W/kg

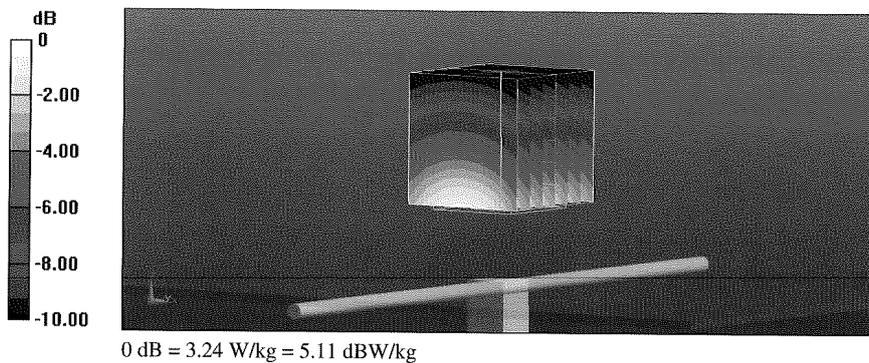

Impedance Measurement Plot for Body TSL

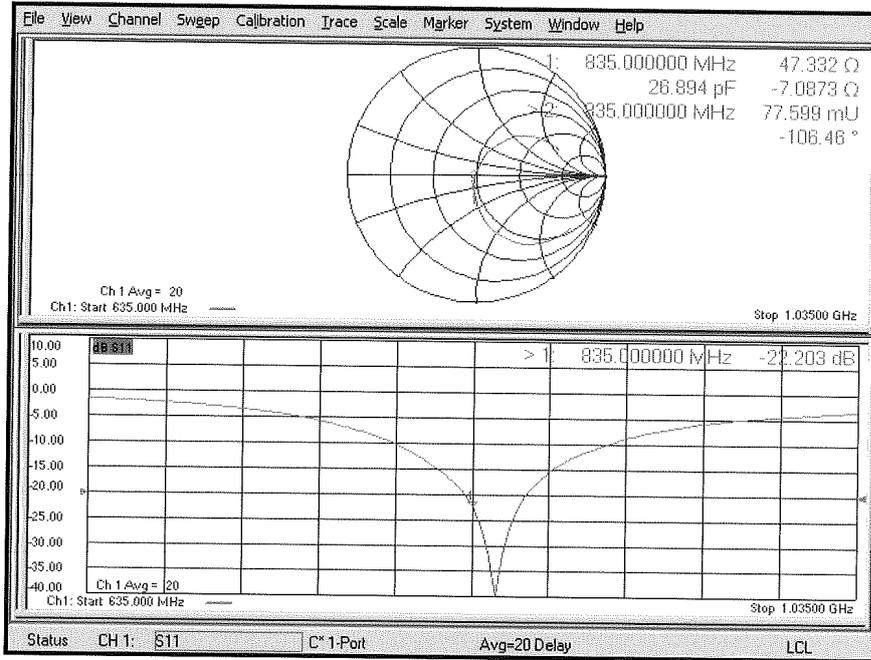

System Check Dipole SAR Calibration Certificate -Dipole 1900MHz(D1900V2,S/N:5d169)

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client **UL Japan (Vitec)**

Certificate No: D1900V2-5d169_Mar19

CALIBRATION CERTIFICATE

Object **D1900V2 - SN:5d169**

Calibration procedure(s) **QA CAL-05.v11
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**

Calibration date: **March 12, 2019**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19
Reference Probe EX3DV4	SN: 7349	31-Dec-18 (No. EX3-7349_Dec18)	Dec-19
DAE4	SN: 601	04-Oct-18 (No. DAE4-601_Oct18)	Oct-19
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	07-Oct-15 (in house check Feb-19)	In house check: Oct-20
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-18)	In house check: Oct-20
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-18)	In house check: Oct-19

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: March 14, 2019

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	41.1 ± 6 %	1.37 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.87 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	40.2 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.16 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	20.9 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.7 ± 6 %	1.48 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.87 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	40.2 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.22 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.1 W/kg ± 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.6 Ω + 3.8 j Ω
Return Loss	- 27.8 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.9 Ω + 5.3 j Ω
Return Loss	- 24.7 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.202 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

DASY5 Validation Report for Head TSL

Date: 11.03.2019

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d169


Communication System: UID 0 - CW; Frequency: 1900 MHz
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:


- Probe: EX3DV4 - SN7349; ConvF(8.26, 8.26, 8.26) @ 1900 MHz; Calibrated: 31.12.2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.10.2018
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 110.3 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 18.2 W/kg
SAR(1 g) = 9.87 W/kg; SAR(10 g) = 5.16 W/kg
Maximum value of SAR (measured) = 15.3 W/kg

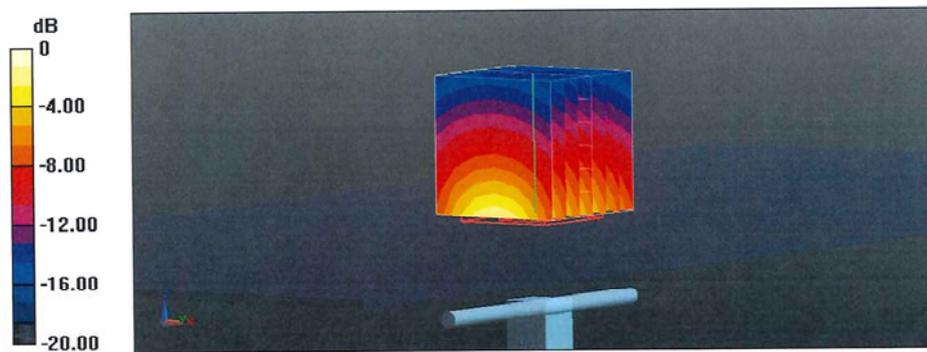

Impedance Measurement Plot for Head TSL

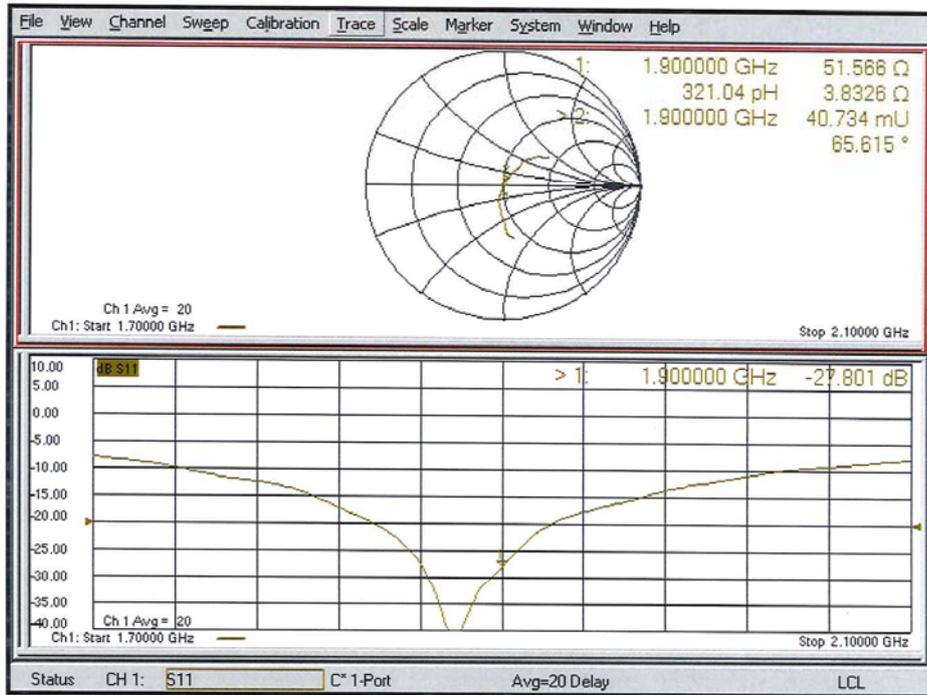

DASY5 Validation Report for Body TSL

Date: 12.03.2019

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d169


Communication System: UID 0 - CW; Frequency: 1900 MHz
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.48$ S/m; $\epsilon_r = 53.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:


- Probe: EX3DV4 - SN7349; ConvF(8.23, 8.23, 8.23) @ 1900 MHz; Calibrated: 31.12.2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.10.2018
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 105.2 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 17.5 W/kg
SAR(1 g) = 9.87 W/kg; SAR(10 g) = 5.22 W/kg
Maximum value of SAR (measured) = 15.0 W/kg

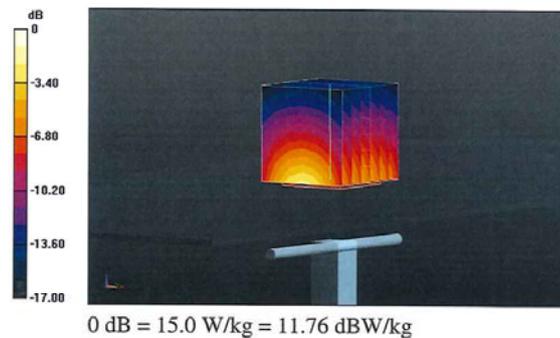

Impedance Measurement Plot for Body TSL

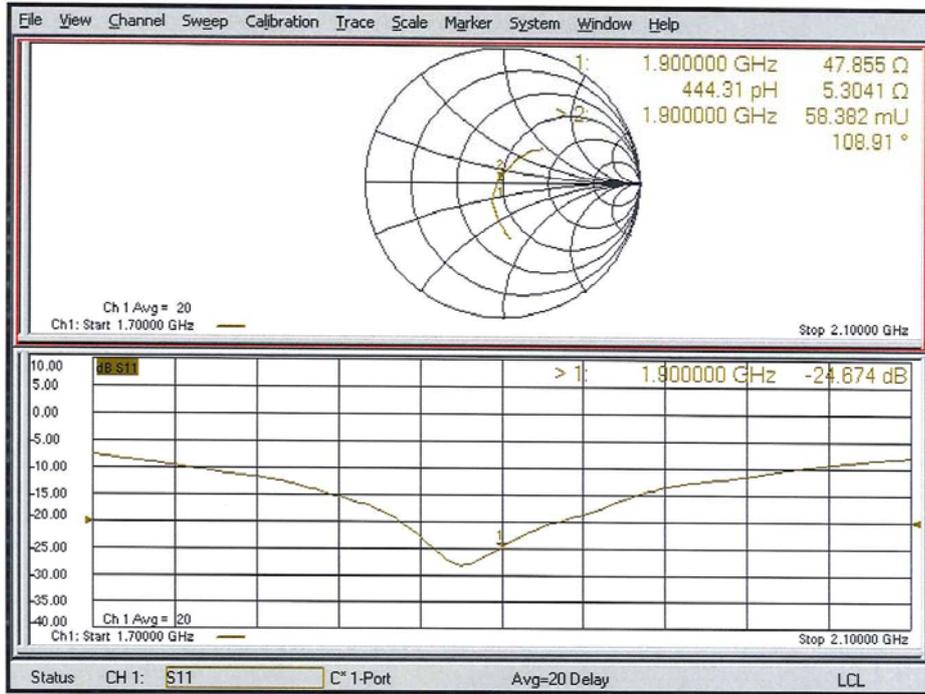

System Check Dipole SAR Calibration Certificate -Dipole 2450MHz (D2450V2 S/N:713)

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **UL Japan (KYCOM)**

Certificate No: **D2450V2-713_Sep19**

CALIBRATION CERTIFICATE

Object: **D2450V2 - SN:713**

Calibration procedure(s): **QA CAL-05.v11
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**

Calibration date: **September 09, 2019**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	03-Apr-19 (No. 217-02892/02893)	Apr-20
Power sensor NRP-Z91	SN: 103244	03-Apr-19 (No. 217-02892)	Apr-20
Power sensor NRP-Z91	SN: 103245	03-Apr-19 (No. 217-02893)	Apr-20
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-19 (No. 217-02894)	Apr-20
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-19 (No. 217-02895)	Apr-20
Reference Probe EX3DV4	SN: 7349	29-May-19 (No. EX3-7349_May19)	May-20
DAE4	SN: 601	30-Apr-19 (No. DAE4-601_Apr19)	Apr-20
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Feb-19)	In house check: Oct-20
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-18)	In house check: Oct-20
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-18)	In house check: Oct-19

Calibrated by:	Name Leif Klysner	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature

Issued: September 13, 2019

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL tissue simulating liquid
ConvF sensitivity in TSL / NORM x,y,z
N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- e) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	37.9 ± 6 %	1.86 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.7 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	53.5 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.35 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	25.1 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	50.7 ± 6 %	2.04 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.3 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	51.6 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.18 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	24.3 W/kg ± 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.5 Ω + 1.6 j Ω
Return Loss	- 28.6 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.6 Ω + 4.0 j Ω
Return Loss	- 27.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.159 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

DASY5 Validation Report for Head TSL

Date: 09.09.2019

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:713


Communication System: UID 0 - CW; Frequency: 2450 MHz
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 37.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.9, 7.9, 7.9) @ 2450 MHz; Calibrated: 29.05.2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2019
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.2(1504); SEMCAD X 14.6.12(7470)


Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 118.4 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 27.2 W/kg
SAR(1 g) = 13.7 W/kg; SAR(10 g) = 6.35 W/kg
Maximum value of SAR (measured) = 22.5 W/kg

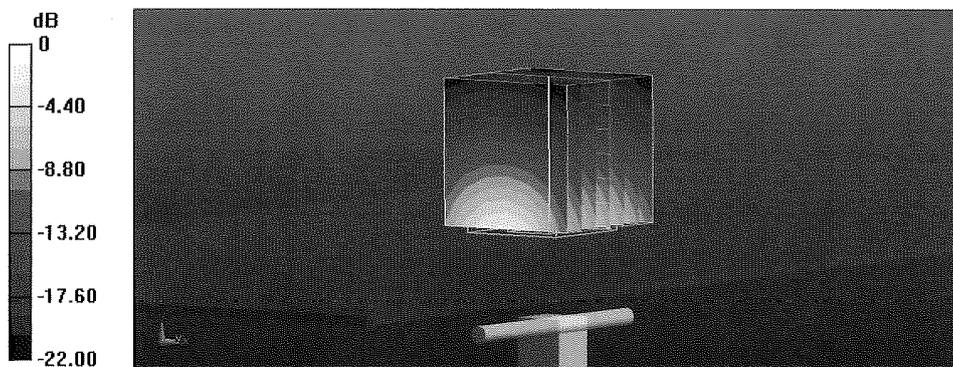

0 dB = 22.5 W/kg = 13.52 dBW/kg

Impedance Measurement Plot for Head TSL

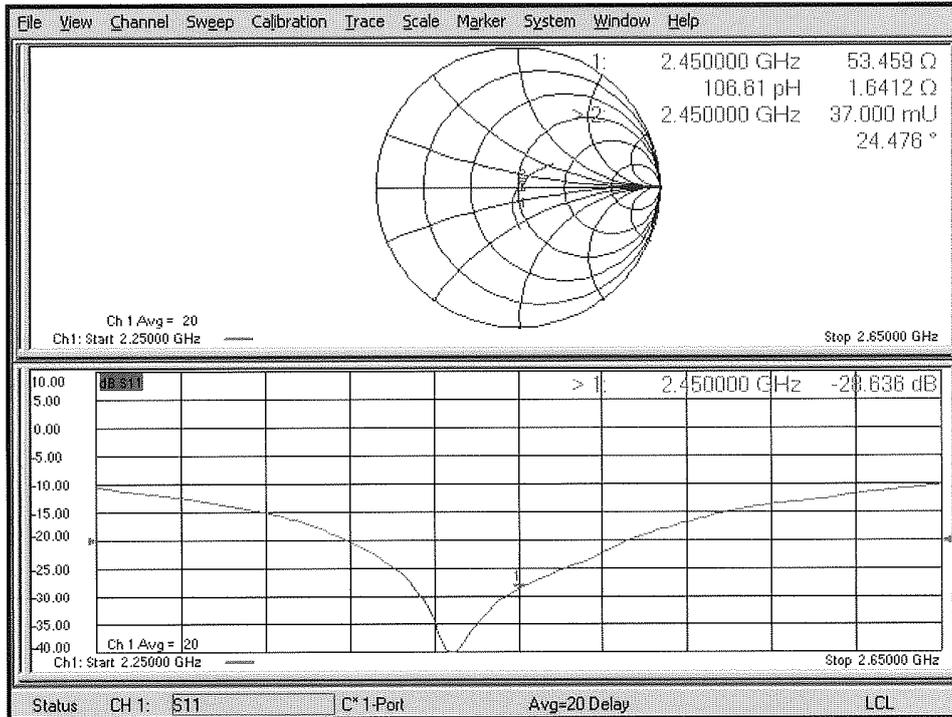

DASY5 Validation Report for Body TSL

Date: 09.09.2019

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:713


Communication System: UID 0 - CW; Frequency: 2450 MHz
Medium parameters used: $f = 2450$ MHz; $\sigma = 2.04$ S/m; $\epsilon_r = 50.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.94, 7.94, 7.94) @ 2450 MHz; Calibrated: 29.05.2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.04.2019
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.2(1504); SEMCAD X 14.6.12(7470)


Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 109.7 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 26.6 W/kg
SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.18 W/kg
Maximum value of SAR (measured) = 21.9 W/kg

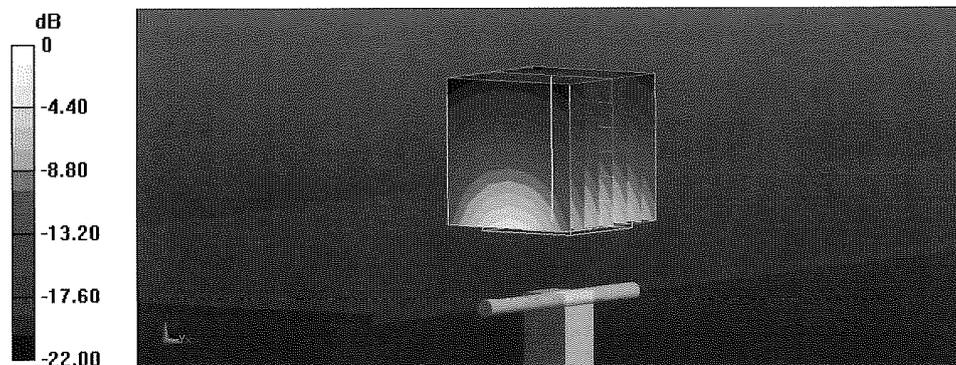

0 dB = 21.9 W/kg = 13.40 dBW/kg

Impedance Measurement Plot for Body TSL

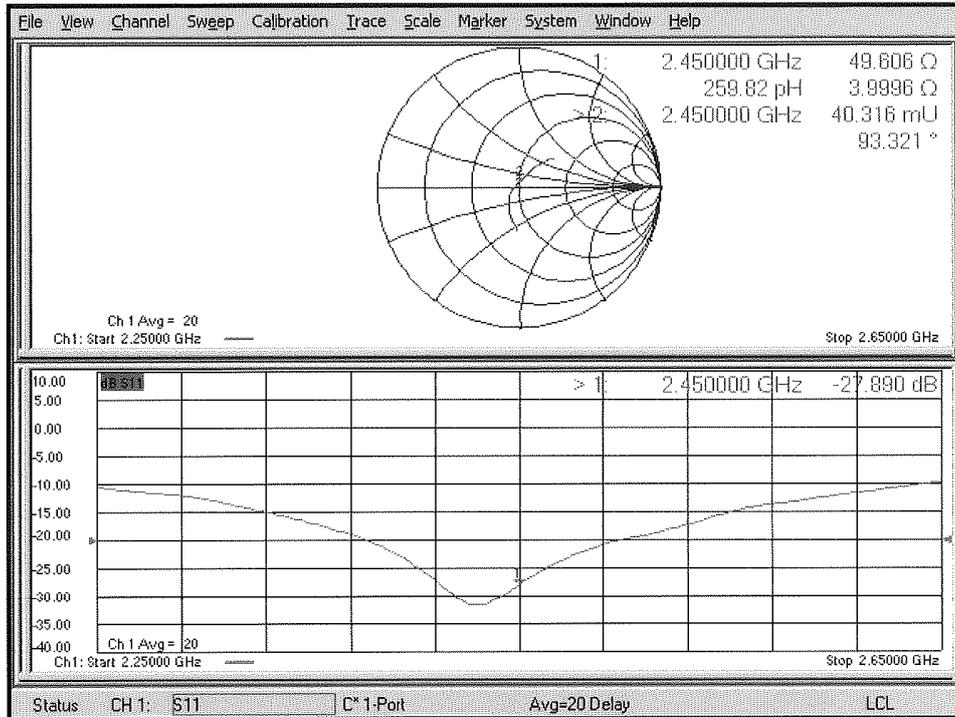

System Check Dipole SAR Calibration Certificate -Dipole 2600MHz(D2600V2,S/N: 1030)

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client **UL Japan (Vitec)**

Certificate No: **D2600V2-1030_Mar19**

CALIBRATION CERTIFICATE

Object **D2600V2 - SN:1030**

Calibration procedure(s) **QA CAL-05.v11
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**

Calibration date: **March 14, 2019**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: 5058 (20k)	04-Apr-18 (No. 217-02682)	Apr-19
Type-N mismatch combination	SN: 5047.2 / 06327	04-Apr-18 (No. 217-02683)	Apr-19
Reference Probe EX3DV4	SN: 7349	31-Dec-18 (No. EX3-7349_Dec18)	Dec-19
DAE4	SN: 601	04-Oct-18 (No. DAE4-601_Oct18)	Oct-19

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	07-Oct-15 (in house check Feb-19)	In house check: Oct-20
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-18)	In house check: Oct-20
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-18)	In house check: Oct-20
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-18)	In house check: Oct-19

	Name	Function	Signature
Calibrated by:	Manu Seitz	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: March 15, 2019

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.