



Test Report

Report No.: MTi220902005-08E3

Date of issue: 2022-09-21

Applicant: Anker Innovations Limited

Product: Wireless Headphone

Model(s): A3027, A3030

FCC ID 2AOKB-A3027

Shenzhen Microtest Co., Ltd.
<http://www.mtitest.com>

This test report is valid for the tested samples only. It cannot be reproduced except in full without prior written consent of Shenzhen Microtest Co., Ltd.

Tel:(86-755)88850135

Fax: (86-755) 88850136

<http://www.mtitest.com>

E-mail:mti@51mti.com

Address: 101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China.



Table of Contents

1 GENERAL DESCRIPTION	4
1.1 FEATURE OF EQUIPMENT UNDER TEST (EUT).....	4
1.2 OPERATION CHANNEL LIST	5
1.3 TEST CHANNEL LIST	5
1.4 ANCILLARY EQUIPMENT LIST.....	5
1.5 DESCRIPTION OF SUPPORT UNITS	5
1.6 EUT OPERATION MODE	5
2 SUMMARY OF TEST RESULT	6
3 TEST FACILITIES AND ACCREDITATIONS.....	7
3.1 TEST LABORATORY	7
3.2 ENVIRONMENTAL CONDITIONS	7
3.3 MEASUREMENT UNCERTAINTY.....	7
3.4 TEST SOFTWARE	7
4 LIST OF TEST EQUIPMENT.....	8
5 TEST RESULT.....	9
5.1 ANTENNA REQUIREMENT	9
5.1.1 Standard requirement.....	9
5.1.2 EUT Antenna.....	9
5.2 CONDUCTED EMISSION	9
5.2.1 Limits.....	9
5.2.2 Test setup.....	10
5.2.3 Test procedure.....	11
5.2.4 Test results.....	12
5.3 RADIATED EMISSIONS	13
5.3.1 Limit.....	13
5.3.2 Test Procedure	13
5.3.3 Test Setup.....	14
5.3.4 Test Result	15
5.4 FIELD STRENGTH OF FUNDAMENTAL EMISSIONS	18
5.4.1 Limits:.....	18
5.4.2 Test Setup:.....	18
5.4.3 Test Procedures	19
5.4.4 Test Result	19
5.5 20dB BANDWIDTH	20
5.5.1 Limit.....	20
5.5.2 Requirement	20
5.5.3 Test Procedure	20
5.5.4 Test results.....	21
5.6 FREQUENCY STABILITY.....	22
5.6.1 Limit.....	22
5.6.2 Test Procedure	22
5.6.3 Test result.....	22



Test Result Certification	
Applicant:	Anker Innovations Limited
Address:	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hongkong
Manufacturer:	Anker Innovations Limited
Address:	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hongkong
Factory:	Senmai Electronic Limited
Address:	No. 5 Shuiling Road, Zhouwu Industrial Zone, Dongcheng District, Dongguan City
Product description	
Product name:	Wireless Headphone
Trademark:	Soundcore
Model name:	A3027
Serial Model:	A3030
Standards:	FCC Part 15.225
Test method:	ANSI C63.10:2013
Date of Test	
Date of test:	2022-09-09 ~ 2022-09-21
Test result:	Pass

Note: This report updates the NFC module. Based on the original test report MTi201224024-03E3.
After evaluation, all items are retested.

Test Engineer :

(David Lee)

Reviewed By: :

(Leon Chen)

Approved By: :

(Tom Xue)



1 General description

1.1 Feature of equipment under test (EUT)

Product name:	Wireless Headphone
Model name:	A3027
Series model:	A3030
Difference of series model:	All the model are the same circuit and RF module, except the model No..
Operating frequency:	13.56MHz
Modulation type:	ASK
Antenna Tpye:	FPC antenna
Maximum Field Strength:	52.79dB μ V/m at 3 meter
Hardware Version:	D
Software Version:	V1.1
Power Supply:	DC 3.7V from battery
Battery:	DC 3.7V 720mAh
Adapter information:	N/A



1.2 Operation channel list

Channel	Frequency (MHz)
01	13.56

1.3 Test channel list

Channel	Frequency (MHz)
01	13.56

1.4 Ancillary equipment list

Equipment	Model	S/N	Manufacturer	Certificate type
/	/	/	/	/

1.5 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
/	/	/	/	/	/
/	/	/	/	/	/

Note:

- (1)The support equipment was authorized by Declaration of Confirmation.
- (2)For detachable type I/O cable should be specified the length in cm in **『Length』** column.

1.6 EUT operation mode

During testing, the EUT is operated in a keeping TX mode.



2 SUMMARY OF TEST RESULT

Test procedures according to the technical standards:

No.	Standard Section	Test Item	Result	Remark
1	15.203	Antenna Requirement	Pass	
2	15.207	Conducted Emission	N/A	
3	15.225(d)/15.209	Radiated Emissions	Pass	
4	15.227(a)(b)(c)/15.205	Field Strength of Fundamental Emissions	Pass	
5	15.215	20dB Bandwidth	Pass	
6	15.225(e)	Frequency Tolerance	Pass	



3 Test Facilities and Accreditations

3.1 Test laboratory

Test Laboratory	Shenzhen Microtest Co., Ltd
Location	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao' an District, Shenzhen, Guangdong, China.
FCC Registration No.:	FCC Registration No.: 448573

3.2 Environmental conditions

Temperature:	15°C~35°C
Humidity	20%~75%
Atmospheric pressure	98kPa~101kPa

3.3 Measurement uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

3.4 Test software

Software Name	Manufacturer	Model	Version
RF Test System	Shenzhen JS tonsend co., ltd	JS1120-3	2.5.77.0418



4 List of test equipment

Equipment No.	Equipment Name	Manufacturer	Model	Serial No.	Calibration date	Due date
MTI-E043	EMI Test Receiver	Rohde&schwarz	ESCI7	101166	2022/05/05	2023/05/04
MTI-E044	TRILOG Broadband Antenna	schwarab eck	VULB 9163	9163-133 8	2021/05/30	2023/05/29
MTI-E047	Amplifier	Hewlett-Packard	8447F	3113A061 50	2022/05/05	2023/05/04
MTI-E089	ESG Vector Signal Generator	Agilent	N5182A	MY49060 455	2022/05/05	2023/05/04
MTI-E058	ESG Series Analog Signal Generator	Agilent	E4421B	GB40051 240	2022/05/05	2023/05/04
MTI-E062	PXA Signal Analyzer	Agilent	N9030A	MY51350 296	2022/05/05	2023/05/04
MTI-E078	Synthesized Sweeper	Agilent	83752A	3610A019 57	2022/05/05	2023/05/04
MTI-E079	DC Power Supply	Agilent	E3632A	MY40027 695	2022/05/05	2023/05/04
MTI-E045	Double Ridged Broadband Horn Antenna	schwarab eck	BBHA 9120 D	9120D-22 78	2021/05/30	2023/05/29
MTI-E021	EMI Test Receiver	Rohde&schwarz	ESCS30	100210	2022/05/05	2023/05/04
MTI-E022	Pulse Limiter	Schwarzb eck	VSTD 9561-F	00679	2022/05/05	2023/05/04
MTI-E023	Artificial mains network	Schwarzb eck	NSLK 8127	NSLK 8127 #841	2022/05/05	2023/05/04
MTI-E046	Active Loop Antenna	Schwarzb eck	FMZB 1519 B	00044	2021/05/30	2023/05/29
MTI-E048	Amplifier	Agilent	8449B	3008A024 00	2022/05/05	2023/05/04
MTI-E072	Thermometer Clock Humidity Monitor	-	HTC-1	/	2022/05/05	2023/05/04
Note: the calibration interval of the above test instruments is 12 or 24 months and the calibrations are traceable to international system unit (SI).						



5 Test Result

5.1 Antenna requirement

5.1.1 Standard requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device

5.1.2 EUT Antenna

The antenna FPC antenna, which was permanently affixed to the device and un-replaced, complies with 15.203.

5.2 Conducted emission

5.2.1 Limits

FREQUENCY (MHz)	Class B (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00


Note

(1)The tighter limit applies at the band edges.

(2)The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.



5.2.2 Test setup

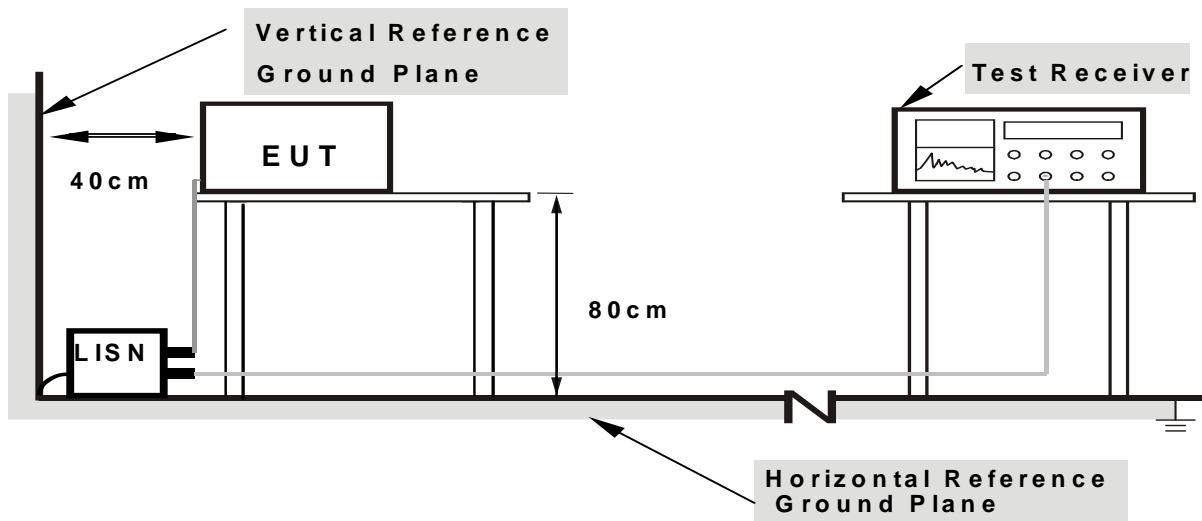

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes



5.2.3 Test procedure

a. EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

b. The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- c. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- d. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- e. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- f. LISN at least 80 cm from nearest part of EUT chassis.

For the actual test configuration, please refer to the related Item –EUT Test Photos.



5.2.4 Test results

Note: Not applicable. Because the product does not TX when it is charged, so this item not applicable.



5.3 Radiated Emissions

5.3.1 Limit

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μ V/m)
0.009 - 0.490	2400/F(kHz)
0.490 - 1.705	24000/F(kHz)
1.705 - 30.0	30
30 - 88	100
88 - 216	150
216 - 960	200
Above 960	500

Note1: For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Note2: For above 1000 MHz, limit field strength of harmonics: 54dB_{UV}/m@3m (AV) and 74dB_{UV}/m@3m (Peak).

5.3.2 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented. The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto


Detector function = peak

Trace = max hold




5.3.3 Test Setup

Radiated emission test-up frequency below 30MHz

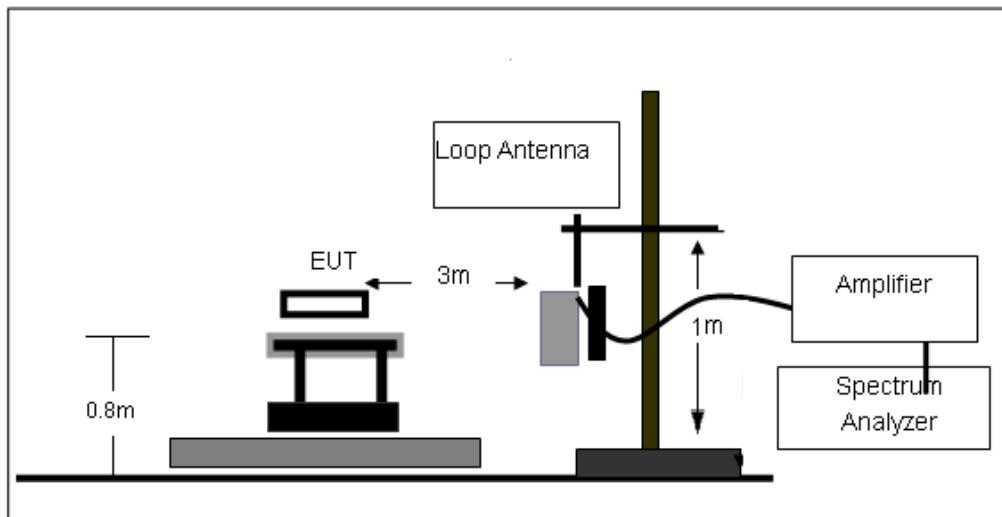

Radiated emission test-up frequency 30MHz~1GHz

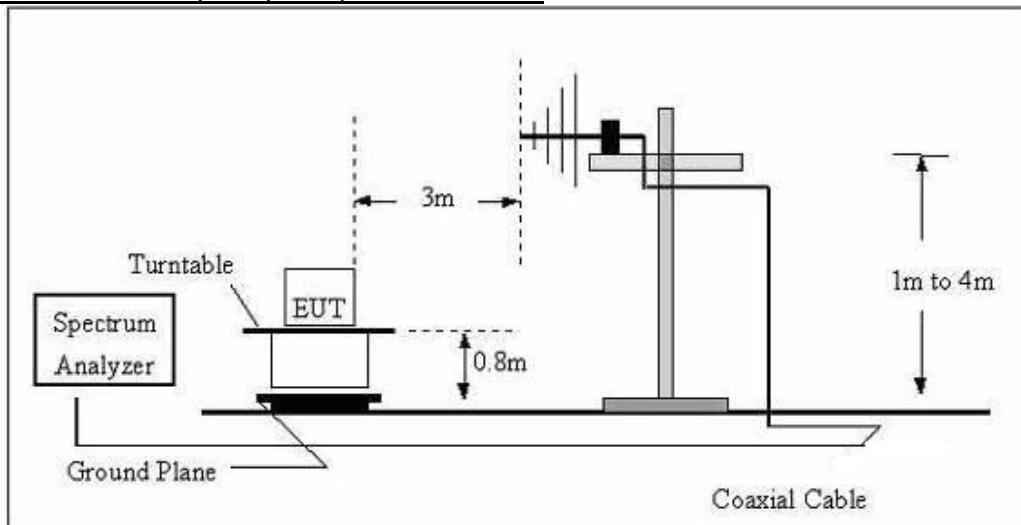



5.3.4 Test Result


9 kHz-30MHz

No.	Freq.	Level	Factor	Measurement	Limit	Margin
	MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB
1	0.0360	24.03	22.19	46.22	117.62	-71.40
2	0.0832	20.51	21.12	41.63	110.9	-69.27
3	0.1171	26.98	22.34	49.32	106.7	-57.38
4	1.2053	19.43	22.03	41.46	66.02	-24.56
5	1.4734	15.25	22.17	37.41	64.32	-26.91
6	1.7572	11.81	22.01	33.82	69.5	-35.68



30MHz – 1GHz


EUT:	Wireless Headphone	Model Name:	A3027
Pressure:	1010 hPa	Phase:	H
Test Mode :	NFC	Test Voltage :	DC 3.7V from battery

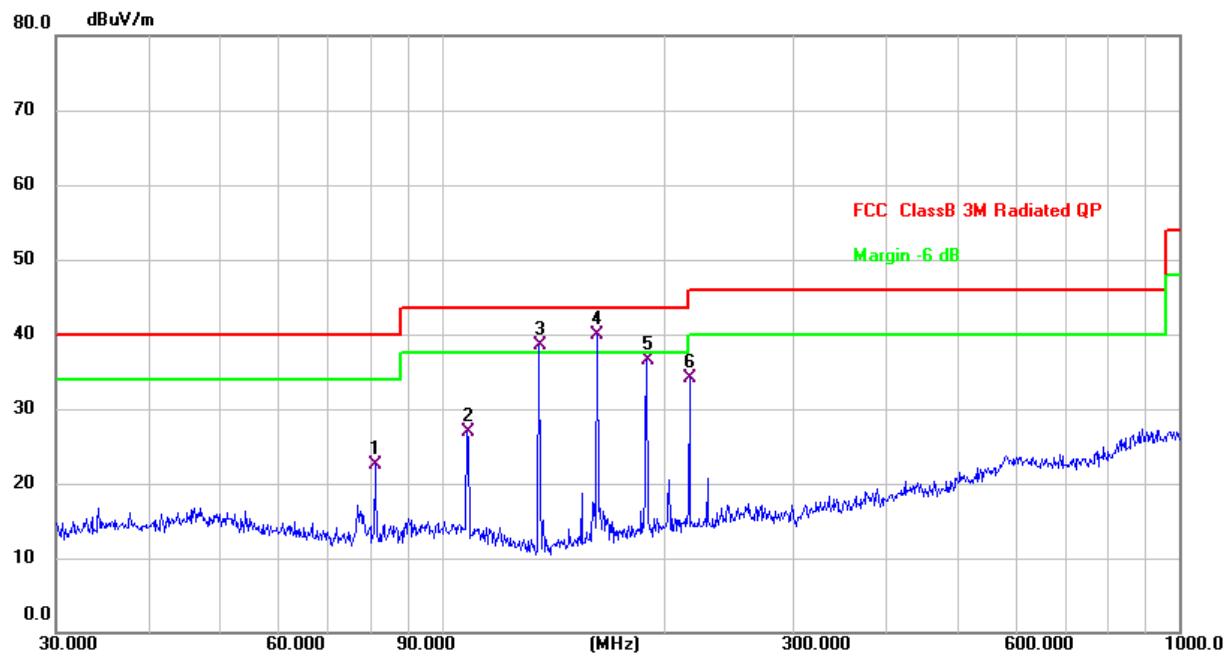

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Over Detector
1		81.2117	34.17	-11.59	22.58	40.00	-17.42	QP
2		108.2667	37.53	-10.64	26.89	43.50	-16.61	QP
3	!	135.5062	51.33	-12.83	38.50	43.50	-5.00	QP
4	*	162.6105	51.75	-11.82	39.93	43.50	-3.57	QP
5		189.7385	47.22	-10.67	36.55	43.50	-6.95	QP
6		216.7828	43.49	-9.38	34.11	46.00	-11.89	QP



EUT:	Wireless Headphone	Model Name:	A3027
Pressure:	1010 hPa	Phase:	V
Test Mode :	NFC	Test Voltage :	DC 3.7V from battery

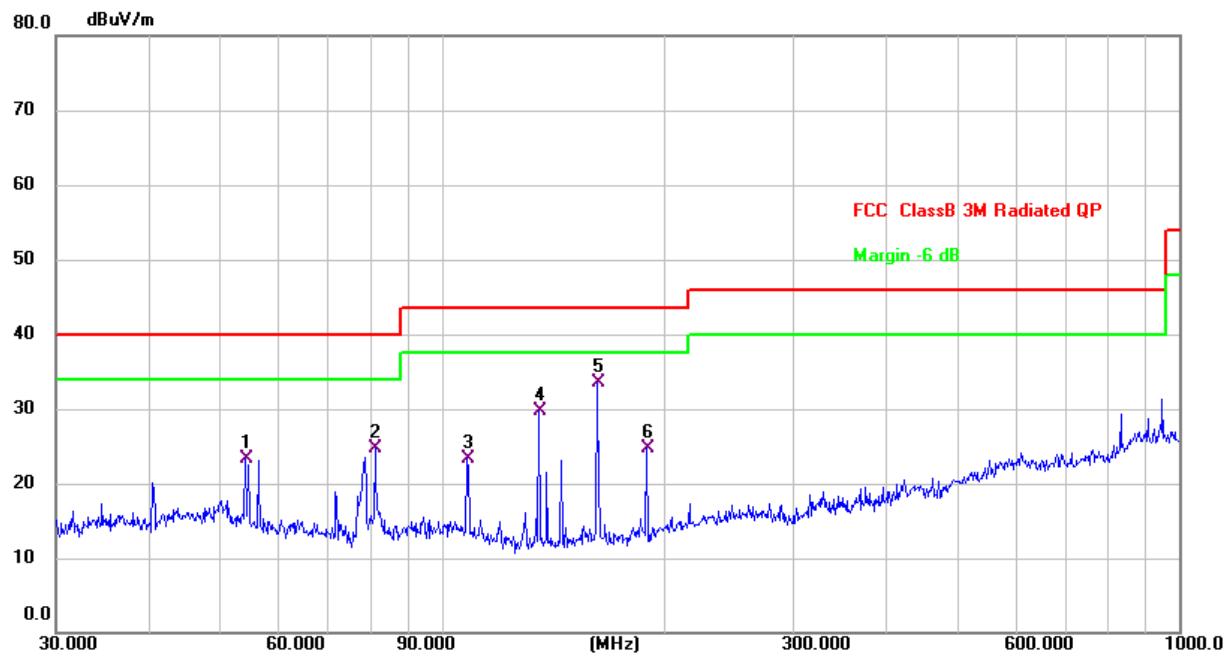

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Over
			Level dBuV	Factor dB	ment dBuV/m		
1	54.2610	33.51	-10.11	23.40	40.00	-16.60	QP
2	81.2117	36.30	-11.59	24.71	40.00	-15.29	QP
3	108.2667	33.98	-10.64	23.34	43.50	-20.16	QP
4	135.5062	42.53	-12.83	29.70	43.50	-13.80	QP
5 *	162.6106	45.26	-11.82	33.44	43.50	-10.06	QP
6	189.7385	35.46	-10.67	24.79	43.50	-18.71	QP



5.4 Field Strength of Fundamental Emissions

5.4.1 Limits:

According to FCC section 15.225, for <30 MHz, Radiated emissions were measured according to ANSI C63.4. The EUT was set to transmit at the highest output power. The EUT was set 10 meter away from the measuring antenna. The loop antenna was positioned 1 meter above the ground from the center of the loop. The measuring bandwidth was set to 10 KHz. (Note: During testing the receive antenna was rotated about its axis to maximize the emission from the EUT)

There was no detected Restricted bands and Radiated suprious emission below 30MHz. The 30m limit was converted to 3m Limit using square factor(x) as it was found by measurements as follows;
 $3 \text{ m Limit(dBuV/m)} = 20\log(X) + 40\log(30/3) = 20\log(15848) + 40\log(30/3) = 124 \text{ dBuV}$

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:


Frequency range (MHz)	Field Strength@30m		Field Strength@3m
	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$	dBuV/m
Below 13.110	30	29.5	69.5
13.110 ~ 13.410	106	40.5	80.5
13.410 ~ 13.553	334	50.5	90.5
13.553 ~13.567	15.848	84	124
13.567 ~ 13.710	334	50.5	90.5
13.710 ~14.010	106	40.5	80.5
Above 14.010	30	29.5	69.5

Note:

1. Field Strength ($\text{dB}\mu\text{V/m}$) = $20 * \log[\text{Field Strength } (\mu\text{V/m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.

5.4.2 Test Setup:

Radiated emission test-up frequency below 30MHz

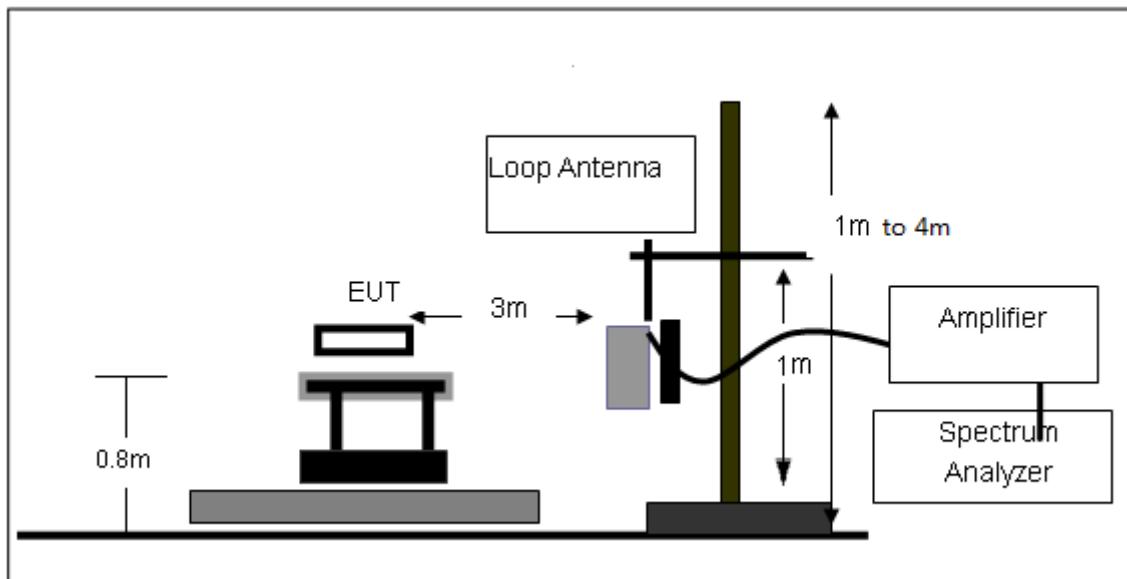



5.4.3 Test Procedures

As the radiation test, set the RBW=10kHz VBW=30kHz, observed the outside band of 13.110 MHz to 14.010 MHz, than mark the higher-level emission for comparing with the FCC rules.

5.4.4 Test Result

Maximum Field Strength:

13.553 MHz – 13.567 MHz					
Frequency (MHz)	Level dB _u V	Factor dB _u V/m	Result @3m (dB _u V/m)	Limit @3m dB _u V/m	Margin dB
13.56	32.31	20.48	52.79	124	-71.21

13.410 MHz – 13.553 MHz and 13.567 MHz – 13.710 MHz					
Frequency (MHz)	Level dB _u V	Factor dB _u V/m	Result @3m (dB _u V/m)	Limit @3m dB _u V/m	Margin dB
13.52	23.17	20.45	43.61	90.5	-46.89
13.63	24.23	20.51	44.74	90.5	-45.76

13.110 MHz – 13.410 MHz and 13.710 MHz – 14.010 MHz					
Frequency (MHz)	Level dB _u V	Factor dB _u V/m	Result @3m (dB _u V/m)	Limit @3m dB _u V/m	Margin dB
13.36	21.61	20.51	42.12	80.5	-38.38
13.95	22.41	20.48	42.89	80.5	-37.61



5.5 **20dB bandwidth**

5.5.1 **Limit**

Operation within the band 13.110 MHz to 14.010 MHz

5.5.2 **Requirement**

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that 20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equip compliance with the 20dB attenuation specification may base on measurement at the intentional radiator's antenna output terminal unless the intentional radiator uses a permanently attached antenna, in which case compliance shall be.

Demonstrated by measuring the radiated emissions.

5.5.3 **Test Procedure**

The 20dB bandwidth is measured with a spectrum analyzer connected via a receiver antenna placed near the EUT while the EUT is operating in transmission mode.

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth

RBW \geq 1% of the 20 dB bandwidth

VBW \geq RBW

Sweep = auto

Detector function = peak


Trace = max hold



5.5.4 Test results

EUT:	Wireless Headphone	Model Name:	A3027
Pressure:	1012 hPa	Test Voltage :	DC 3.7V from battery
Test Mode :	TX Mode		

The test plot as follows:

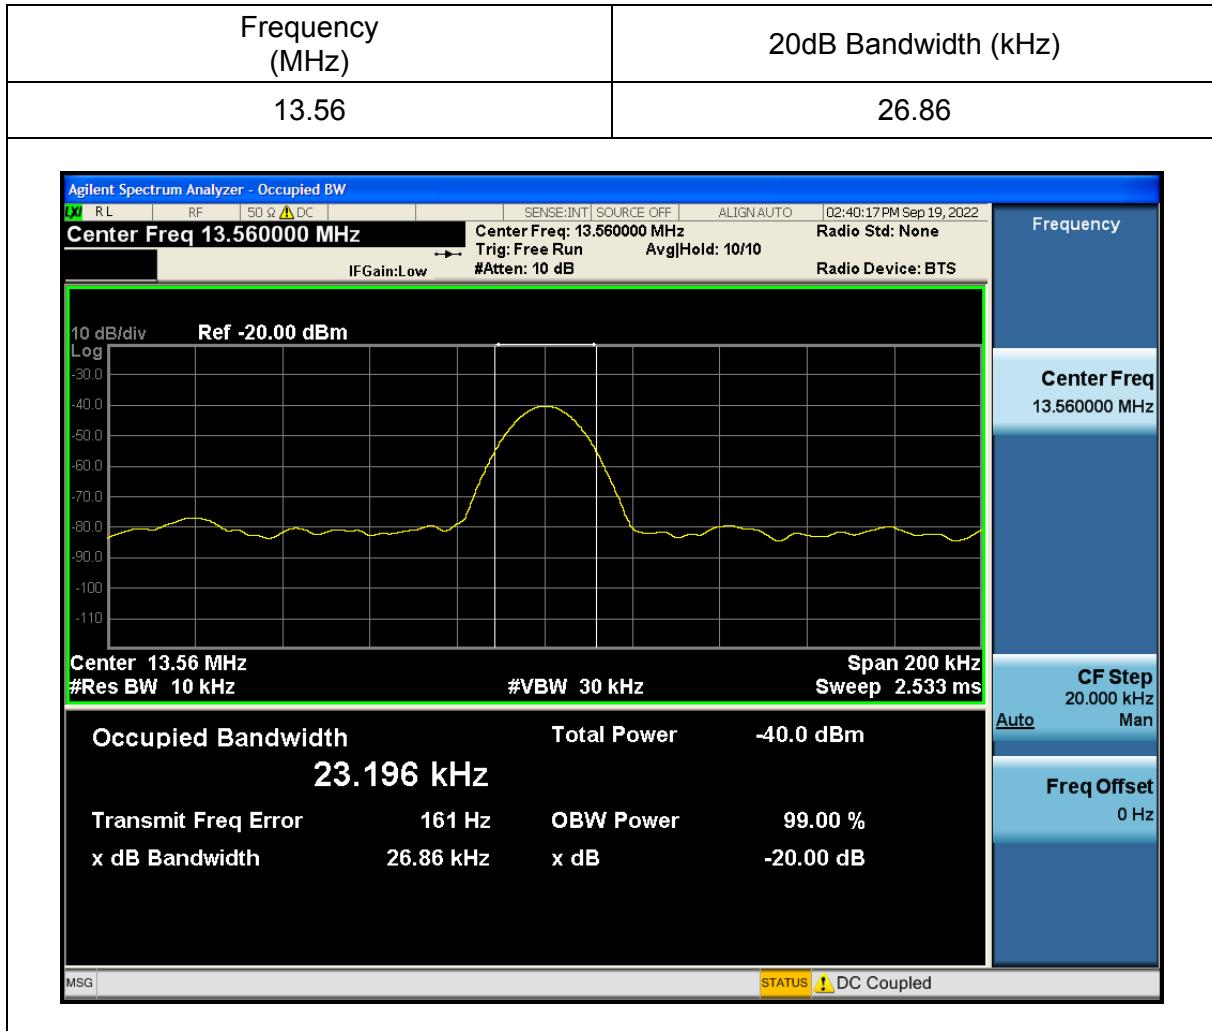



5.6 Frequency stability

5.6.1 Limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to + 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

5.6.2 Test Procedure

1. The test is performed in a Temperature Chamber.

5.6.3 Test result

Voltage (Vdc)	Temp. (°C)	Frequency (MHz)	Deviation (%)	Limit (%)
3.70	-20	13.56056643	0.004%	+/-0.01%
3.70	-10	13.56022937	0.002%	
3.70	0	13.56028183	0.002%	
3.70	10	13.56024212	0.002%	
3.70	20	13.56041444	0.003%	
3.70	30	13.5603597	0.003%	
3.70	40	13.56015955	0.001%	
3.70	50	13.5606017	0.004%	
3.33	20	13.56020706	0.002%	
4.07	20	13.56050219	0.004%	



Photographs of the Test Setup

Radiated emission – Below 30MHz



Radiated emission – Below 1GHz





Photographs of the EUT

See the Appendix - EUT Photos.

----END OF REPORT----