

FCC Test Report

Report No.: AGC01110230541FE03

FCC ID : 2AOKB-A3035

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Wireless Headphone

BRAND NAME : soundcore

MODEL NAME : A3035

APPLICANT: Anker Innovations Limited

DATE OF ISSUE : Jun. 12, 2023

STANDARD(S) : FCC Part 15.247

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 75

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jun. 12, 2023	Valid	Initial Release



TABLE OF CONTENTS

1.	VERIFICATION OF CONFORMITY	5
2.	GENERAL INFORMATION	6
	2.1. PRODUCT DESCRIPTION	6
	2.2. TABLE OF CARRIER FREQUENCYS	6
	2.3. RECEIVER INPUT BANDWIDTH	7
	2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE	7
	2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR	7
	2.6. RELATED SUBMITTAL(S) / GRANT (S)	8
	2.7. TEST METHODOLOGY	8
	2.8. SPECIAL ACCESSORIES	8
	2.9. EQUIPMENT MODIFICATIONS	
	2.10. ANTENNA REQUIREMENT	8
3.	MEASUREMENT UNCERTAINTY	9
4.	DESCRIPTION OF TEST MODES	.10
5.	SYSTEM TEST CONFIGURATION	. 11
	5.1. CONFIGURATION OF EUT SYSTEM	. 11
	5.2. EQUIPMENT USED IN TESTED SYSTEM	. 11
	5.3. SUMMARY OF TEST RESULTS	. 11
6.	TEST FACILITY	.12
7.	PEAK OUTPUT POWER	. 13
	7.1. MEASUREMENT PROCEDURE	. 13
	7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
	7.3. LIMITS AND MEASUREMENT RESULT	14
8.	20DB BANDWIDTH	.19
	8.1. MEASUREMENT PROCEDURE	. 19
	8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	. 19
	8.3. LIMITS AND MEASUREMENT RESULTS	20
9.	CONDUCTED SPURIOUS EMISSION	25
Sta	9.1. MEASUREMENT PROCEDURE y report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspectio amp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test resented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test re	on esults

Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	25
9.3. MEASUREMENT EQUIPMENT USED	25
9.4. LIMITS AND MEASUREMENT RESULT	25
10. RADIATED EMISSION	46
10.1. MEASUREMENT PROCEDURE	46
10.2. TEST SETUP	48
10.3. LIMITS AND MEASUREMENT RESULT	49
10.4. TEST RESULT	49
11. NUMBER OF HOPPING FREQUENCY	67
11.1. MEASUREMENT PROCEDURE	67
11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	67
11.3. MEASUREMENT EQUIPMENT USED	67
11.4. LIMITS AND MEASUREMENT RESULT	67
12. TIME OF OCCUPANCY (DWELL TIME)	68
12.1. MEASUREMENT PROCEDURE	68
12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	68
12.3. MEASUREMENT EQUIPMENT USED	68
12.4. LIMITS AND MEASUREMENT RESULT	68
13. FREQUENCY SEPARATION	72
13.1. MEASUREMENT PROCEDURE	72
13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	72
13.3. MEASUREMENT EQUIPMENT USED	72
13.4. LIMITS AND MEASUREMENT RESULT	72
14. LINE CONDUCTED EMISSION TEST	73
14.1. LIMITS OF LINE CONDUCTED EMISSION TEST	73
14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	73
14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	74
14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	74
14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	74
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	75
APPENDIX B: PHOTOGRAPHS OF EUT	75



Page 5 of 75



1. VERIFICATION OF CONFORMITY

Applicant	Anker Innovations Limited		
Address	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hongkong		
Manufacturer	Anker Innovations Limited		
Address	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hongkong		
Product Designation	Wireless Headphone		
Brand Name	soundcore		
Test Model	A3035		
Date of receipt of test item	May 31, 2023		
Date of test	May 31, 2023 to Jun. 12, 2023		
Deviation	No any deviation from the test method		
Condition of Test Sample	Normal		
Test Result	Pass		
Report Template	AGCRT-US-BR/RF		

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC PART 15.247.

Alan Duan
(Project Engineer)

Reviewed By

Calvin Liu
(Reviewer)

Approved By

Max Zhang
(Authorized Officer)

Jun. 12, 2023

Jun. 12, 2023



Page 6 of 75

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as "Wireless Headphone". It is designed by way of utilizing the GFSK, Pi/4 DQPSK and 8DPSK technology to achieve the system operation.

A major technical description of EUT is described as following

· · · · · · · · · · · · · · · · · · ·				
Operation Frequency	2.402 GHz to 2.480 GHz			
RF Output Power	11.098dBm (Max)			
Bluetooth Version	V5.3			
Modulation	BR ⊠GFSK, EDR ⊠π /4-DQPSK, ⊠8DPSK BLE □GFSK 1Mbps □GFSK 2Mbps			
Number of channels	79			
Hardware Version	D			
Software Version	V1.1.9			
Antenna Designation	PCB Antenna (Comply with requirements of the FCC part 15.203)			
Antenna Gain	3.1dBi			
Power Supply	DC 3.72V by battery			

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency		
	0	2402 MHz		
	1	2403 MHz		
	:	:		
	38	2440 MHz		
2402~2480MHz	39	2441 MHz		
	40	2442 MHz		
	·	:		
	77	2479 MHz		
	78	2480 MHz		



Report No.: AGC01110230541FE03 Page 7 of 75

2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHz, in every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally, the type of connection (e.g. single of multi slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also, the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a hopping sequence in data mode:

40, 21, 44, 23, 04, 15, 66, 56, 19, 78, 07, 28, 69, 55,

36, 45, 05, 13, 43, 74, 57, 35, 67, 76, 02, 34, 54, 63,

42, 11, 30, 06, 64, 25, 75, 48, 17, 33, 58, 01, 29, 14,

51, 72, 03, 31, 50, 61, 77, 18, 10, 47, 12, 68, 08, 49,

20, 00, 73, 09, 16, 60, 71, 41, 24, 53, 38, 26, 46, 37,

65, 32, 70, 52, 27, 59, 22, 62, 39

2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:

- 1. LAP/UAP of the master of the connection.
- 2. Internal master clock.

The LAP (lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24MSB's of the 48BD_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For behavior action with other units only offset is used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30). In most case it is implemented as 28 bits counter. For the deriving of the hopping sequence the entire. LAP (24 bits),4LSB's(4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended.



Report No.: AGC01110230541FE03 Page 8 of 75

The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer (and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.

2.6. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AOKB-A3035** filing to comply with the FCC PART 15.247 requirements.

2.7. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

2.8. SPECIAL ACCESSORIES

Refer to section 5.2.

2.9. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.10. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



Page 9 of 75

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty	
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$	
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$	
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$	
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$	
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$	
Uncertainty of spurious emissions, conducted	$U_c = \pm 2.7 \%$	
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$	




4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel π/4-DQPSK
5	Middle channel π/4-DQPSK
6	High channel π/4-DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	Hopping mode GFSK
11	Hopping mode π/4-DQPSK
12	Hopping mode 8DPSK

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

Software Setting

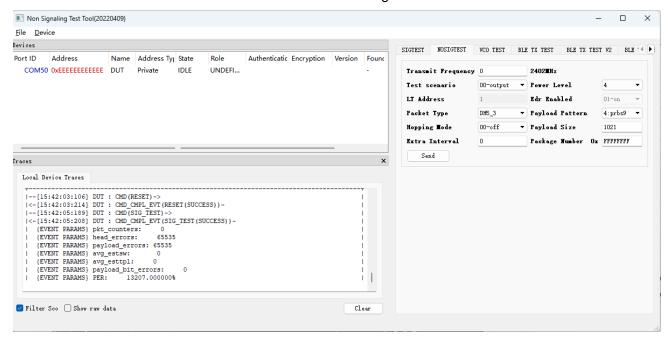




Page 11 of 75

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Radiated Emission Configure:



5.2. EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Wireless Headphone	A3035	2AOKB-A3035	EUT
2	iPod	MGG82ZP/A	N/A	AE

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT	
15.247 (b)(1)	Peak Output Power	Compliant	
15.247 (a)(1)	20 dB Bandwidth	Compliant	
15.247 (d)	Conducted Spurious Emission	Compliant	
15.209	Radiated Emission	Compliant	
15.247 (a)(1)(iii)	Number of Hopping Frequency	Compliant	
15.247 (a)(1)(iii)	Time of Occupancy	Compliant	
15.247 (a)(1)	Frequency Separation	Compliant	
15.207	Conducted Emission Not applicab		

Note: The BT function cannot transmit when charging.



Page 12 of 75

6. TEST FACILITY

Test Site Attestation of Global Compliance (Shenzhen) Co., Ltd	
Location 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Com Fuhai Street, Bao'an District, Shenzhen, Guangdong, China	
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Feb. 18, 2023	Feb. 17, 2024
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Aug. 04, 2022	Aug. 03, 2023
2.4GHz Filter	EM Electronics	N/A	N/A	Mar. 18, 2022	Mar. 19, 2024
Attenuator	ZHINAN	E-002	N/A	Aug. 04, 2022	Aug. 03, 2024
Horn Antenna	SCHWARZBEC	BBHA9170	768	Oct. 31, 2021	Oct. 30, 2023
Active Loop Antenna (9K-30Mhz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS	3117	00034609	Apr. 23, 2023	Apr. 22, 2024
Double-Ridged Waveguide Horn	ETS	3117	00154520	Sep. 06, 2021	Sep. 05, 2023
Preamplifier Assembly	ETS	3117PA	00225134	Sep. 01, 2022	Sep. 02, 2024
Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-49 4	Jan. 05, 2023	Jan. 04, 2025
Test software	FARA	EZ-EMC (Ver RA-03A)	N/A	N/A	N/A



Page 13 of 75

7. PEAK OUTPUT POWER

7.1. MEASUREMENT PROCEDURE


For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW > 20 dB bandwidth of the emission being measured.
- 4. VBW ≥RBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

PEAK POWER TEST SETUP

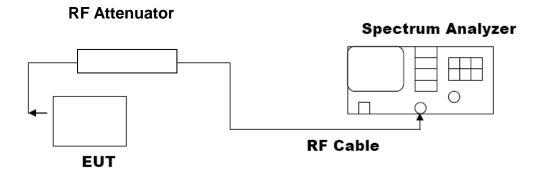




7.3. LIMITS AND MEASUREMENT RESULT


Test Data of Conducted Output Power						
Test Mode	Test Channel (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2402	10.848	≨ 21	Pass		
GFSK	2441	10.983	⊴ 21	Pass		
	2480	11.000	≨ 21	Pass		
π /4-DQPSK	2402	10.886	≨ 21	Pass		
	2441	11.062	⊴ 21	Pass		
	2480	11.088	≨ 21	Pass		
8DPSK	2402	10.876	≨ 21	Pass		
	2441	10.976	 \$21	Pass		
	2480	11.098	≨ 21	Pass		

Test Graphs of Conducted Output Power





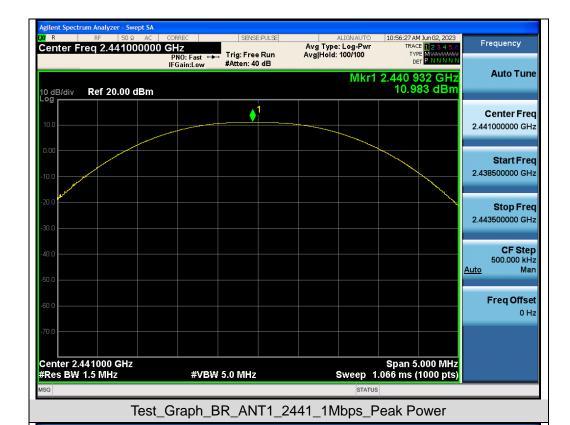

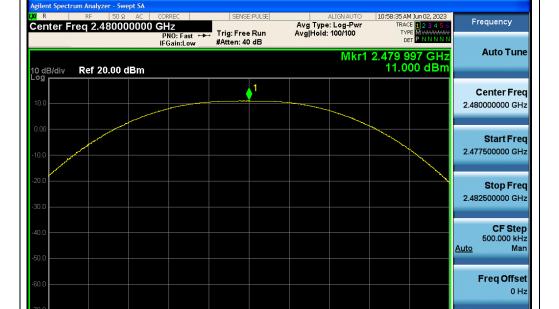

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_BR_ANT1_2480_1Mbps_Peak Power

#VBW 5.0 MHz

Span 5.000 MHz Sweep 1.066 ms (1000 pts)

Center 2.480000 GHz #Res BW 1.5 MHz






















Page 19 of 75

8. 20DB BANDWIDTH

8.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel
 The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
 bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

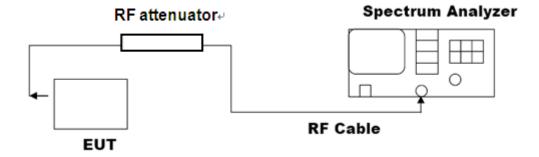




8.3. LIMITS AND MEASUREMENT RESULTS

Test Data of Occupied Bandwidth and -20dB Bandwidth						
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-20dB Bandwidth (MHz)	Limits	Pass or Fail	
GFSK	2402	0.930	1.038	N/A	Pass	
	2441	0.904	1.013	N/A	Pass	
	2480	0.921	1.031	N/A	Pass	
π /4-DQPSK	2402	1.147	1.195	N/A	Pass	
	2441	1.141	1.186	N/A	Pass	
	2480	1.144	1.186	N/A	Pass	
8DPSK	2402	1.144	1.236	N/A	Pass	
	2441	1.140	1.192	N/A	Pass	
	2480	1.142	1.226	N/A	Pass	

Test Graphs of Occupied Bandwidth and -20 Bandwidth

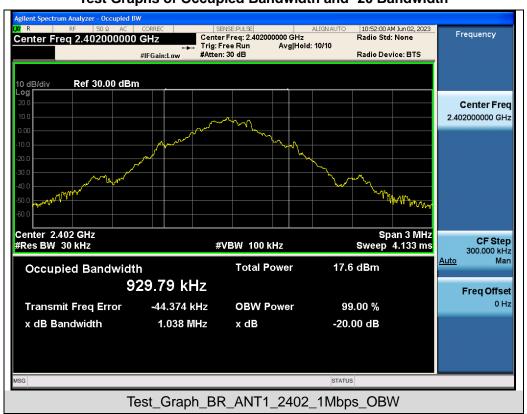





Test_Graph_BR_ANT1_2480_1Mbps_OBW





Test_Graph_EDR_ANT1_2441_2Mbps_OBW





Test_Graph_EDR_ANT1_2402_3Mbps_OBW





Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 25 of 75

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- 3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
 RBW = 100 kHz; VBW= 300 kHz; Sweep = auto; Detector function = peak.
- 4. Set SPA Trace 1 Max hold, then View.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2

9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT						
Amuliachia Limita	Measurement Result					
Applicable Limits	Test Data	Criteria				
In any 100 kHz Bandwidth Outside the	At least -20dBc than the limit					
frequency band in which the spread spectrum	Specified on the BOTTOM	PASS				
intentional radiator is operating, the radio frequency	Channel					
power that is produce by the intentional radiator shall						
be at least 20 dB below that in 100KHz bandwidth						
within the band that contains the highest level of the						
desired power.	At least -20dBc than the limit	PASS				
In addition, radiation emissions which fall in the	Specified on the TOP Channel	PASS				
restricted bands, as defined in §15.205(a), must also						
comply with the radiated emission limits specified						
in§15.209(a))						



Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_BR_ANT1_2402_1Mbps_Lower Band Emissions

Freq Offset 0 Hz

Span 3.000 MHz Sweep 2.000 ms (30000 pts)



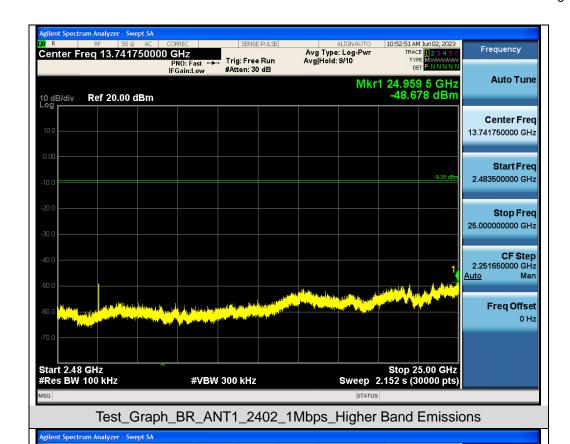

Frequency Avg Type: Log-Pwi Avg|Hold: 10/10 Center Freq 2.441000000 GHz Trig: Free Run #Atten: 30 dB IFGain:Low **Auto Tune** Mkr1 2.440 960 7 GHz 10.800 dBm 10 dB/div Ref 20.00 dBm Center Freq 2.441000000 GHz Start Freq 2.439500000 GHz Stop Freq 2.442500000 GHz **CF Step** 300,000 kHz Auto


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_BR_ANT1_2441_1Mbps_Reference Level

#VBW 300 kHz

Center 2.441000 GHz #Res BW 100 kHz



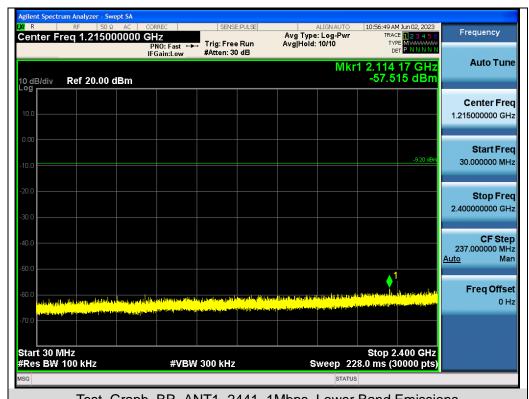















Test_Graph_BR_ANT1_2480_1Mbps_Higher Band Emissions





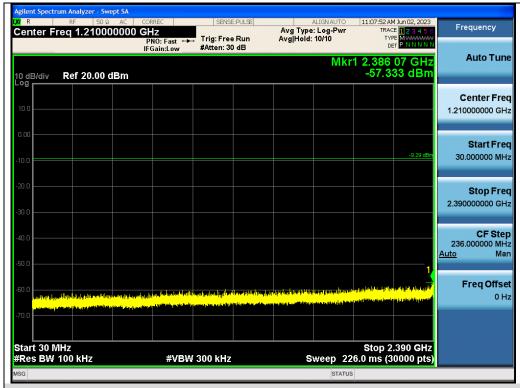















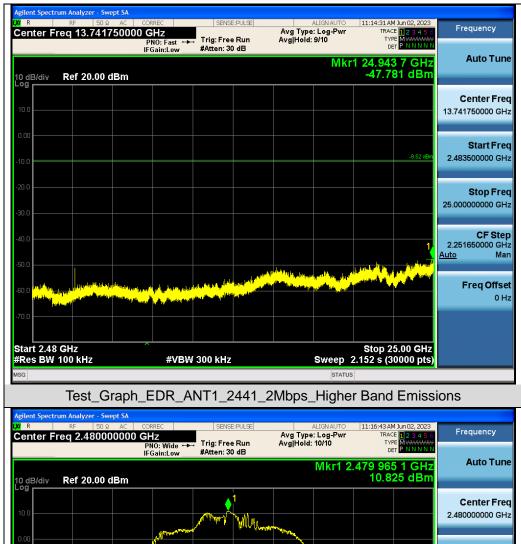



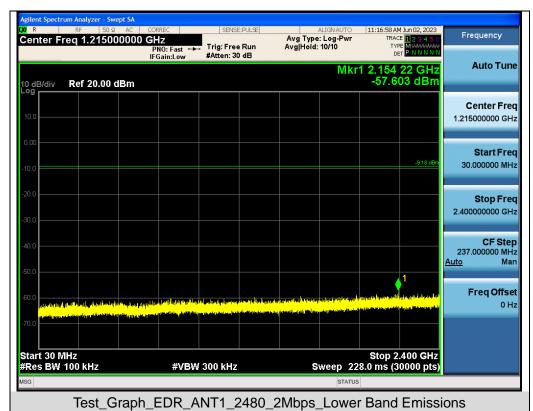























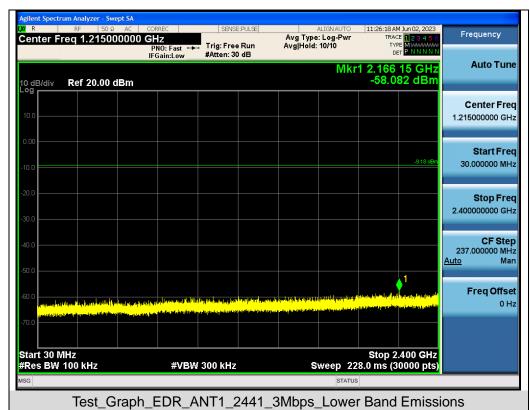







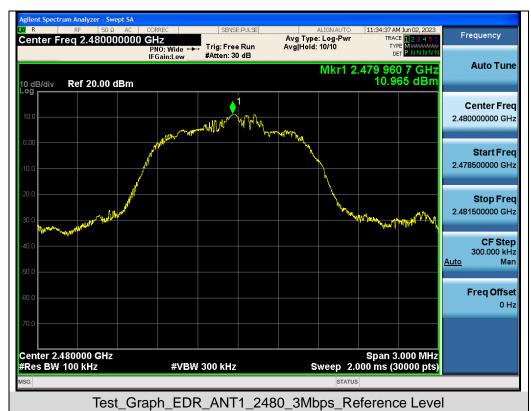

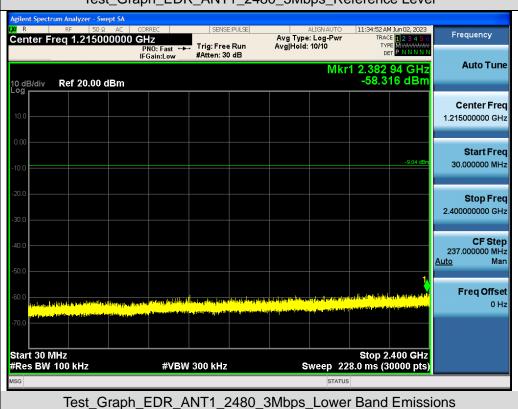




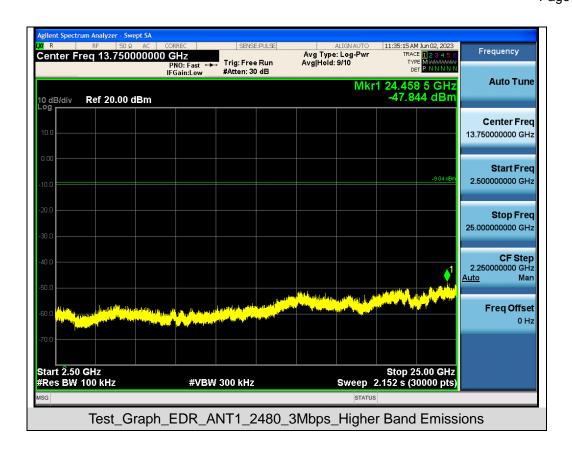





Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands

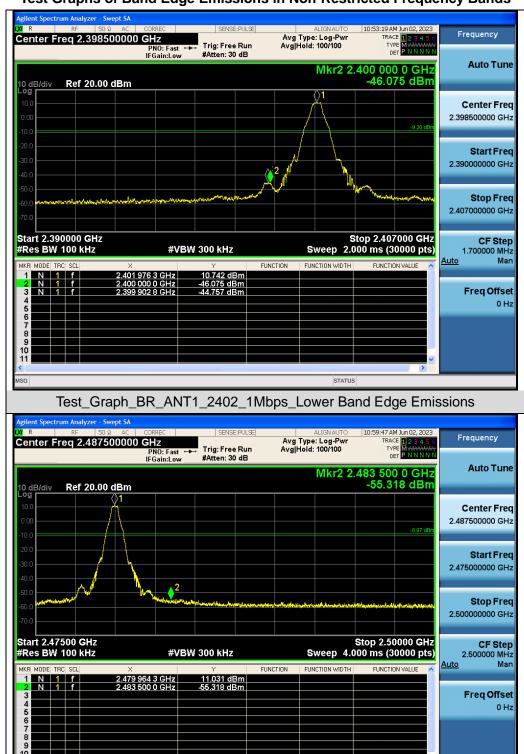

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_BR_ANT1_2480_1Mbps_Higher Band Edge Emissions





Test_Graph_BR_HOP_ANT1_NA_1Mbps_Lower Band Edge Emissions



0 Hz





Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_EDR_ANT1_2480_2Mbps_Higher Band Edge Emissions

2.475000000 GHz

Stop 2.50000 GHz Sweep 4.000 ms (30000 pts)

FUNCTION VALUE

FUNCTION WIDTH

Stop Freq 2.500000000 GHz

CF Step

Man

2.500000 MHz

Freq Offset 0 Hz

<u>Auto</u>





Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_EDR_HOP_ANT1_NA_2Mbps_Higher Band Edge Emissions

FUNCTION

#VBW 300 kHz

Start 2.47500 GHz

#Res BW 100 kHz





Test_Graph_EDR_ANT1_2480_3Mbps_Higher Band Edge Emissions

Stop Freq 2.500000000 GHz

CF Step

Man

2.500000 MHz

Freq Offset 0 Hz


<u>Auto</u>

Stop 2.50000 GHz Sweep 4.000 ms (30000 pts)

FUNCTION VALUE

FUNCTION WIDTH



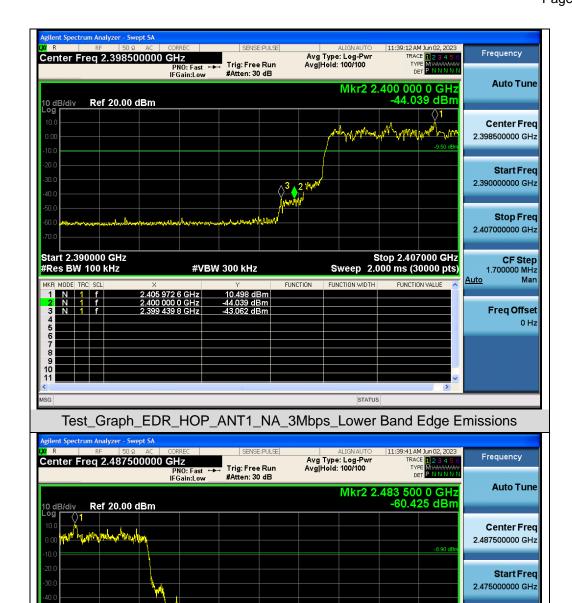

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_EDR_HOP_ANT1_NA_3Mbps_Higher Band Edge Emissions

FUNCTION

#VBW 300 kHz

Start 2.47500 GHz

#Res BW 100 kHz



Report No.: AGC01110230541FE03

Page 46 of 75

10. RADIATED EMISSION

10.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



Report No.: AGC01110230541FE03

Page 47 of 75

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz
Start ~Stop Frequency	1MHz/3MHz for Peak, 1MHz/3MHz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP




10.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

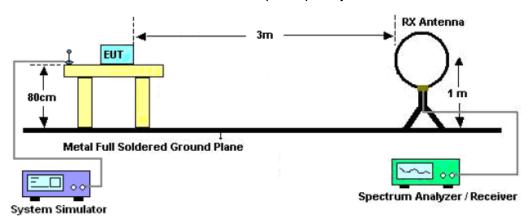

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

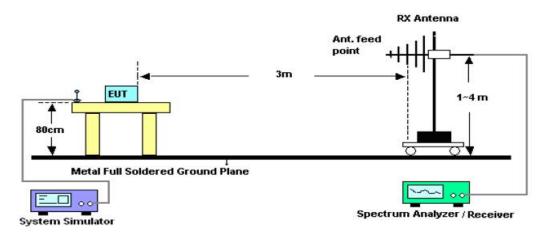

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

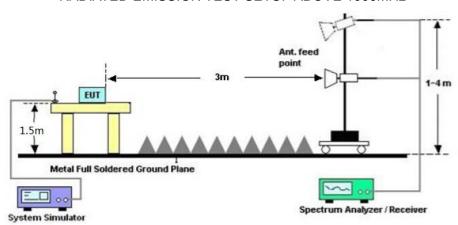

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Report No.: AGC01110230541FE03

Page 49 of 75

10.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

10.4. TEST RESULT


Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



Radiated emission from 30MHz to 1000MHz

EUT	Wireless Headphone	Model Name	A3035
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna	Horizontal

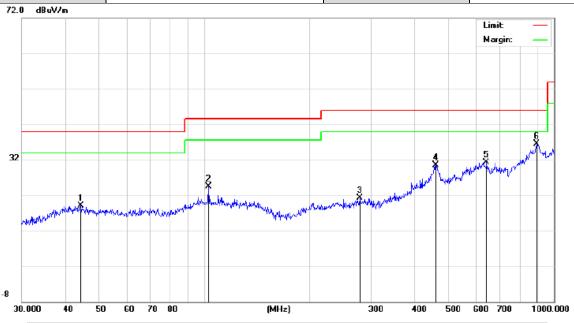


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		44.2752	5.48	13.60	19.08	40.00	-20.92	peak
2		102.7192	8.47	16.09	24.56	43.50	-18.94	peak
3		278.0668	5.49	15.79	21.28	46.00	-24.72	peak
4		459.1144	4.36	26.21	30.57	46.00	-15.43	peak
5		640.6110	6.02	25.25	31.27	46.00	-14.73	peak
6	*	890.7278	5.86	30.64	36.50	46.00	-9.50	peak

RESULT: PASS



EUT	Wireless Headphone	Model Name	A3035
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna	Vertical

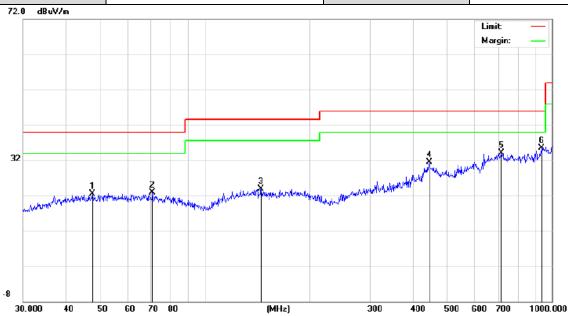

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		47.4918	5.48	16.97	22.45	40.00	-17.55	peak
2		70.8315	5.86	16.99	22.85	40.00	-17.15	peak
3		145.3506	5.66	18.20	23.86	43.50	-19.64	peak
4		443.2943	5.49	25.95	31.44	46.00	-14.56	peak
5		716.6820	5.43	28.68	34.11	46.00	-11.89	peak
6	*	935.5463	5.11	30.40	35.51	46.00	-10.49	peak

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. All test modes had been pre-tested. The mode 9 is the worst case and recorded in the report.



Report No.: AGC01110230541FE03 Page 52 of 75

Radiated emission above 1GHz

EUT	Wireless Headphone	Model Name	A3035
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	46.29	0.08	46.37	74	-27.63	peak
4804.000	37.84	0.08	37.92	54	-16.08	AVG
7206.000	41.05	2.21	43.26	74	-30.74	peak
7206.000	32.46	2.21	34.67	54	-19.33	AVG
Remark:						
actor = Anter	nna Factor + Cable	Loss – Pre-	amplifier.			

EUT	Wireless Headphone	Model Name	A3035
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4804.000	46.25	0.08	46.33	74	-27.67	peak	
4804.000	37.48	80.0	37.56	54	-16.44	AVG	
7206.000	41.02	2.21	43.23	74	-30.77	peak	
7206.000	32.48	2.21	34.69	54	-19.31	AVG	
emark:							
emark:							
actor = Anter	nna Factor + Cable	Loss - Pre-	amplifier.				



Report No.: AGC01110230541FE03

Page 53 of 75

EUT	Wireless Headphone	Model Name	A3035
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 8	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882.000	46.25	0.14	46.39	74	-27.61	peak
4882.000	37.41	0.14	37.55	54	-16.45	AVG
7323.000	42.15	2.36	44.51	74	-29.49	peak
7323.000	31.56	2.36	33.92	54	-20.08	AVG

Remark

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	Wireless Headphone	Model Name	A3035
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 8	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	- Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882.000	46.28	0.14	46.42	74	-27.58	peak
4882.000	37.54	0.14	37.68	54	-16.32	AVG
7323.000	41.05	2.36	43.41	74	-30.59	peak
7323.000	32.15	2.36	34.51	54	-19.49	AVG
Remark:						

Factor = Antenna Factor + Cable Loss - Pre-amplifier.



Report No.: AGC01110230541FE03 Page 54 of 75

EUT	Wireless Headphone	Model Name	A3035
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4960.000	47.54	0.22	47.76	74	-26.24	peak
4960.000	37.54	0.22	37.76	54	-16.24	AVG
7440.000	42.15	2.64	44.79	74	-29.21	peak
7440.000	32.46	2.64	35.1	54	-18.9	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	Wireless Headphone	Model Name	A3035
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.28	0.22	46.5	74	-27.5	peak
4960.000	38.54	0.22	38.76	54	-15.24	AVG
7440.000	41.05	2.64	43.69	74	-30.31	peak
7440.000	32.94	2.64	35.58	54	-18.42	AVG
Pomork:						
emark:						
actor = Anter	nna Factor + Cable	Loss - Pre-	amplifier.			

RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


All test modes had been tested. The 8DPSK modulation is the worst case and recorded in the report.




Test result for band edge emission at restricted bands

EUT	Wireless Headphone	Model Name	A3035
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Test Graph for Peak Measurement

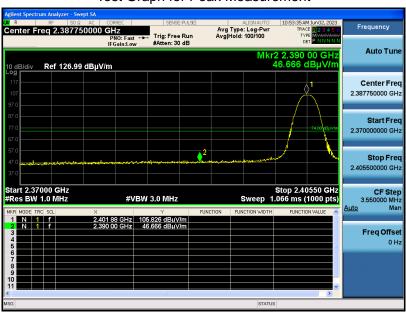

Test Graph for Average Measurement

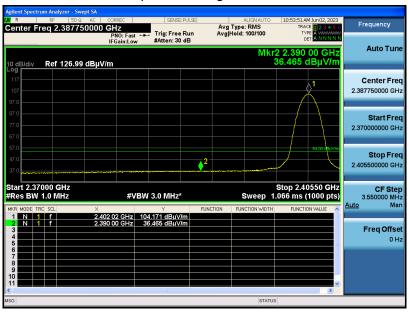


RESULT: PASS




EUT	Wireless Headphone	Model Name	A3035
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Test Graph for Peak Measurement

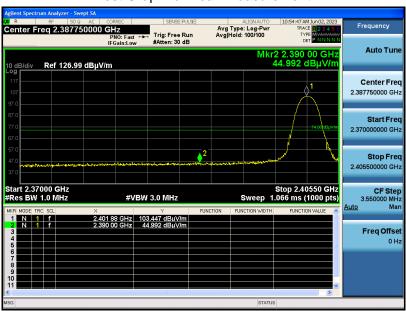

Test Graph for Average Measurement

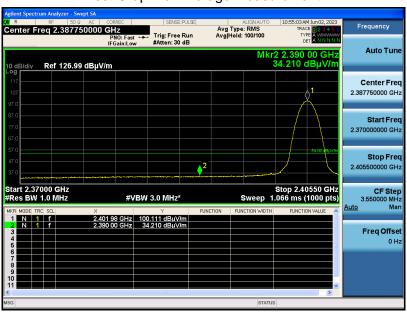



EUT	Wireless Headphone	Model Name	A3035
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Test Graph for Peak Measurement




Test Graph for Average Measurement





EUT	Wireless Headphone	Model Name	A3035
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Test Graph for Peak Measurement

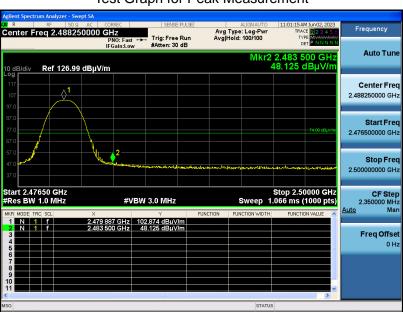


Test Graph for Average Measurement






EUT	Wireless Headphone	Model Name	A3035
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Horizontal

Test Graph for Peak Measurement

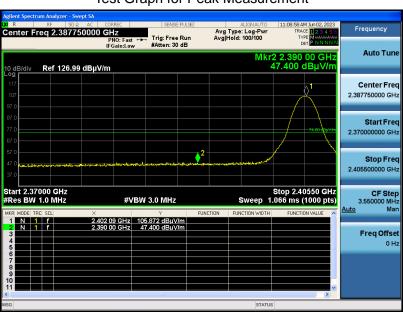


Test Graph for Average Measurement

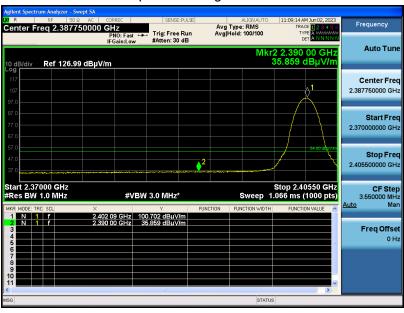




EUT	Wireless Headphone	Model Name	A3035
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Vertical

Test Graph for Peak Measurement

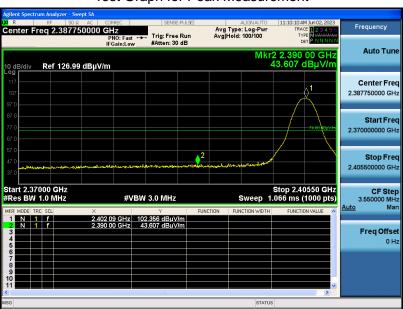


Test Graph for Average Measurement

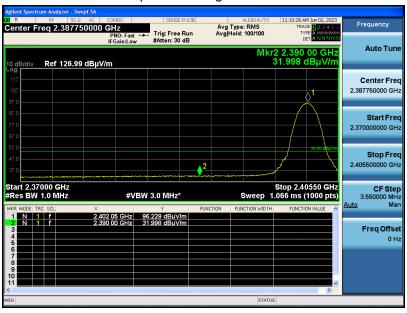




EUT	Wireless Headphone	Model Name	A3035
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna	Horizontal

Test Graph for Peak Measurement

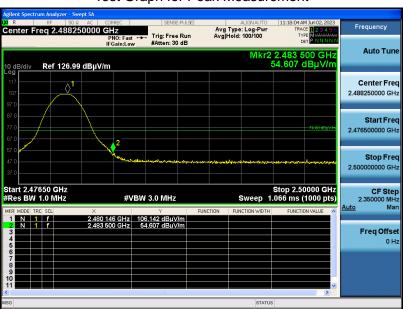


Test Graph for Average Measurement

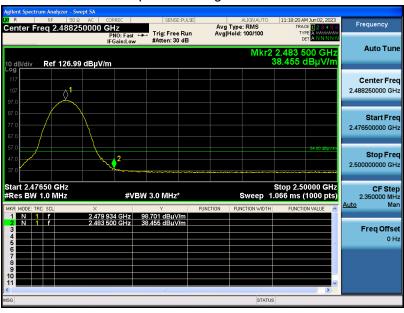



EUT	Wireless Headphone	Model Name	A3035
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna	Vertical

Test Graph for Peak Measurement

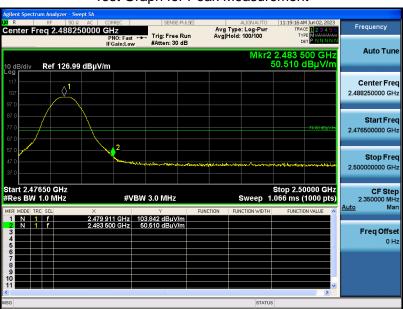


Test Graph for Average Measurement






EUT	Wireless Headphone	Model Name	A3035
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna	Horizontal

Test Graph for Peak Measurement

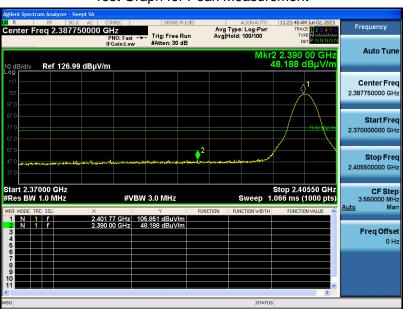


Test Graph for Average Measurement

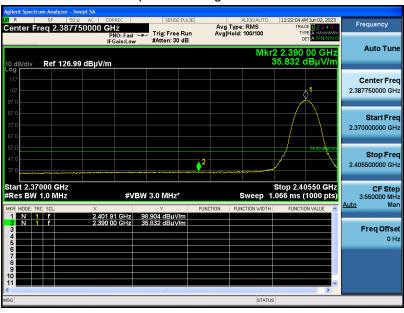




EUT	Wireless Headphone	Model Name	A3035
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna	Vertical

Test Graph for Peak Measurement

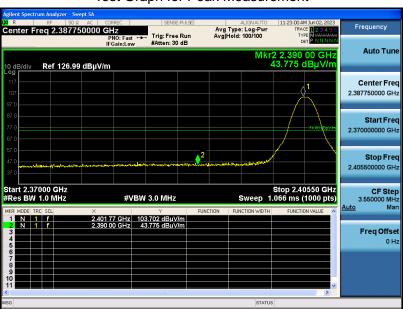


Test Graph for Average Measurement

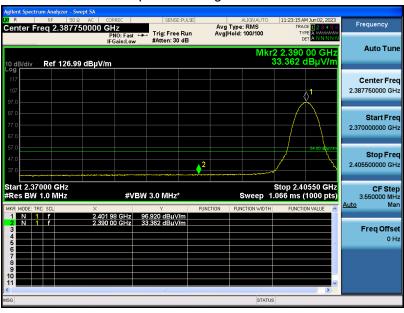




EUT	Wireless Headphone	Model Name	A3035
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna	Horizontal

Test Graph for Peak Measurement

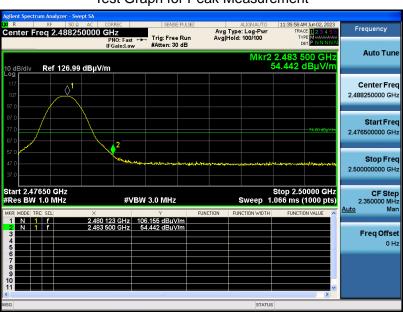


Test Graph for Average Measurement

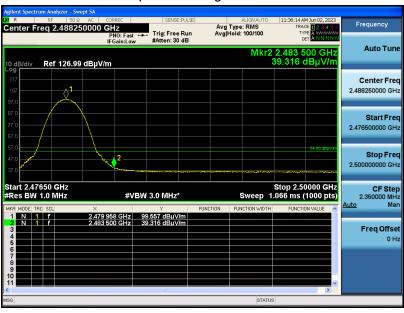




EUT	Wireless Headphone	Model Name	A3035
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna	Vertical

Test Graph for Peak Measurement

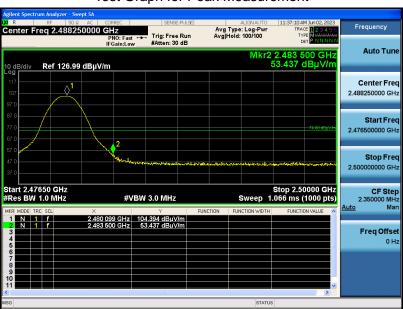

Test Graph for Average Measurement

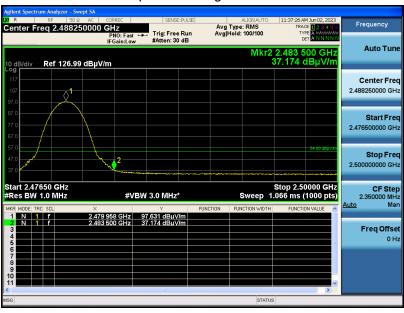

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



11. NUMBER OF HOPPING FREQUENCY

11.1. MEASUREMENT PROCEDURE

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- 2. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 3. VBW > RBW. Sweep: Auto. Detector function: Peak. Trace: Max hold.
- 4. Allow the trace to stabilize.

11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2

11.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

11.4. LIMITS AND MEASUREMENT RESULT

Test Data of Number of Hopping Frequency				
Test Mode Number of Hopping Frequency Limits Pass or Fail				
GFSK Hopping	79	>=15	Pass	

Test Graphs of Number of Hopping Frequency



Note: The GFSK modulation is the worst case and recorded in the report.



Report No.: AGC01110230541FE03

Page 68 of 75

12. TIME OF OCCUPANCY (DWELL TIME)

12.1. MEASUREMENT PROCEDURE

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span: Zero span, centered on a hopping channel.
- 2. RBW shall be ≤channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel.
- 3. Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- 4. Detector function: Peak. Trace: Max hold.
- 5. Use the marker-delta function to determine the transmit time per hop.
- 6. Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

(Number of hops in the period specified in the requirements) = (number of hops on spectrum analyzer) \times (period specified in the requirements / analyzer sweep time)

7. The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements.

12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

Same as described in section 8.2

12.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

12.4. LIMITS AND MEASUREMENT RESULT

Test Data of Dwell Time					
Channel	Time of Pulse for DH5 (ms)	Number of hops in the period specified in the requirements	Sweep Time (ms)	Limit (ms)	Pass or Fail
2402	0.402	41.0*4	65.928	400	Pass
2441	0.402	35.0*4	56.280	400	Pass
2480	0.403	43.0*4	69.316	400	Pass

Note: The GFSK modulation is the worst case and recorded in the report.