

Test Report

Report No.: MTi220919007-01E2

Date of issue: 2022-12-05

Applicant: Anker Innovations Limited

Product: USB-C Portable Magnetic Charger For Apple Watch

Model(s): A8804

FCC ID: 2AOKB-A8804A

Shenzhen Microtest Co., Ltd.

<http://www.mtitest.com>

Instructions

1. This test report shall not be partially reproduced without the written consent of the laboratory.
2. The test results in this test report are only responsible for the samples submitted
3. This test report is invalid without the seal and signature of the laboratory.
4. This test report is invalid if transferred, altered, or tampered with in any form without authorization.
5. Any objection to this test report shall be submitted to the laboratory within 15 days from the date of receipt of the report.

Contents

1	General Description	5
1.1	Description of the EUT	5
1.2	Description of test modes	5
1.3	Description of support units	6
2	Measurement uncertainty	6
3	Test facilities and accreditations.....	7
3.1	Test laboratory	7
4	List of test equipment	8
5	Test result	9
5.2	Test setup	10
5.3	Test Procedures.....	11
5.4	Equipment Approval Considerations item 5 b) of KDB 680106 D01 v03r01	11
5.5	Test results	13
	Photographs of the Test Setup.....	20
	Photographs of the EUT.....	20

Test Result Certification	
Applicant:	Anker Innovations Limited
Address:	Room 1318-19, Hollywood Plaza 610 Nathan Road, Mongkok, Kowloon, Hong Kong
Manufacturer:	Anker Innovations Limited
Address:	Room 1318-19, Hollywood Plaza 610 Nathan Road, Mongkok, Kowloon, Hong Kong
Product description	
Product name:	USB-C Portable Magnetic Charger For Apple Watch
Trademark:	ANKER
Model name:	A8804
Series Model:	N/A
Standards:	FCC CFR 47 PART 1, § 1.1310
Test method:	KDB 680106 v03r01
Date of Test	
Date of test:	2022-10-17 ~ 2022-12-05
Test result:	Pass

Test Engineer :

Yanice Xie

(Yanice Xie)

Reviewed By: :

Leon Chen

(Leon Chen)

Approved By: :

Tom Xue

(Tom Xue)

1 General Description

1.1 Description of the EUT

Product name:	USB-C Portable Magnetic Charger For Apple Watch
Model name:	A8804
Series Model:	N/A
Model difference:	N/A
Electrical rating:	Input: DC 5V 1A Output: 5W Max
Accessories:	N/A
Hardware version:	V1.1
Software version:	V1.0
RF specification:	
Operation frequency:	Apple Watch Frequency: 326.5 kHz Fast Charging(5W): 1.778 MHz
Modulation type:	ASK
Antenna type:	Coil Antenna

1.2 Description of test modes

All the test modes were carried out with the EUT in normal operation, the final test mode of the EUT was the worst test mode for emission test, which was shown in this report and defined as:

No.	Emission test modes
Mode 1	Wireless Output (3W+Apple Watch326.5kHz)
Mode 2	Wireless Output (5W+Apple Watch1.778MHz)
Mode 3	Stand-by

1.3 Description of support units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support equipment list			
Description	Model	Serial No.	Manufacturer
Watch 3	/	/	Apple
Watch 7	/	/	Apple
Adapter	HW-090200CH0	/	Huizhou BYD Electronics Co., Ltd.
Support cable list			
Description	Length (m)	From	To
/	/	/	/

2 Measurement uncertainty

Parameter	Expanded Uncertainty
Magnetic field measurement (9kHz~30MHz)	$\pm 7.8\%$
Electric field measurements (9kHz~30MHz)	$\pm 7.8\%$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

3 Test facilities and accreditations

3.1 Test laboratory

Test laboratory:	Shenzhen Microtest Co., Ltd.
Test site location:	101, No. 7, Zone 2, Xinxing Industrial Park, Fuhai Avenue, Xinhe Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Telephone:	(86-755)88850135
Fax:	(86-755)88850136
CNAS Registration No.:	CNAS L5868
FCC Registration No.:	448573

4 List of test equipment

No.	Equipment	Manufacturer	Model	Serial No.	Cal. date	Cal. Due
MTI-E115	Electric and Magnetic Field Probe – Analyzer	Narda	EHP-200A	101166	2022/08/15	2023/08/14

5 Test result

5.1.1 Requirement

§1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of FCC part 2.1093 of this chapter.

Table 1 to §1.1310(e)(1) - Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1500			f/300	<6
1500-100000			5	<6
(ii) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1500			f/1500	<30
1500-100000			1.0	<30

f = frequency in MHz


* = Plane-wave equivalent power density

Note 1: Occupational/controlled exposure limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.



Note 2: General population/uncontrolled exposure limits apply in situations in which the general public may be exposed, or in which persons who are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

5.2 Test setup

For mobile exposure conditions:

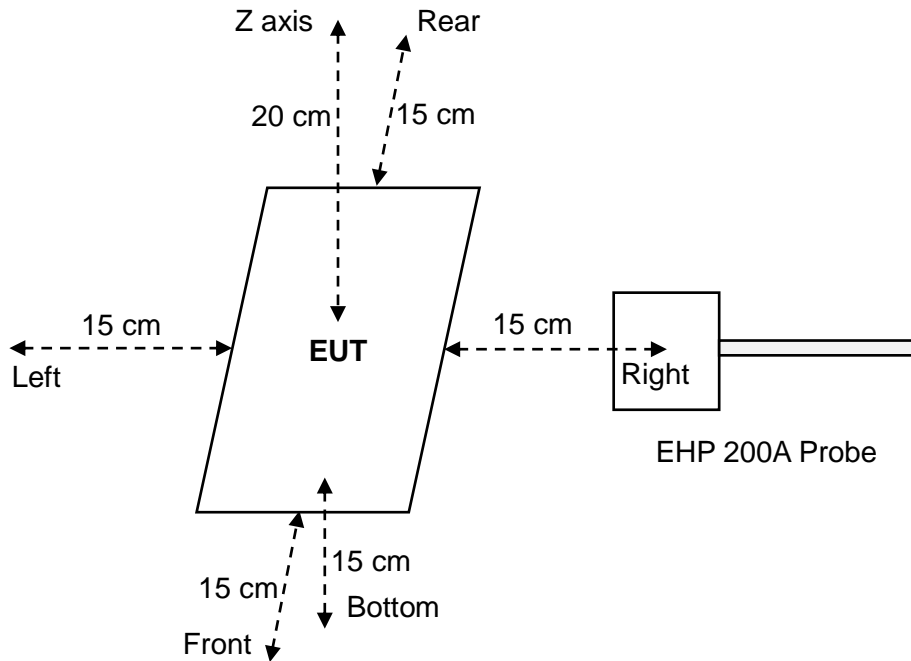

For portable exposure conditions:

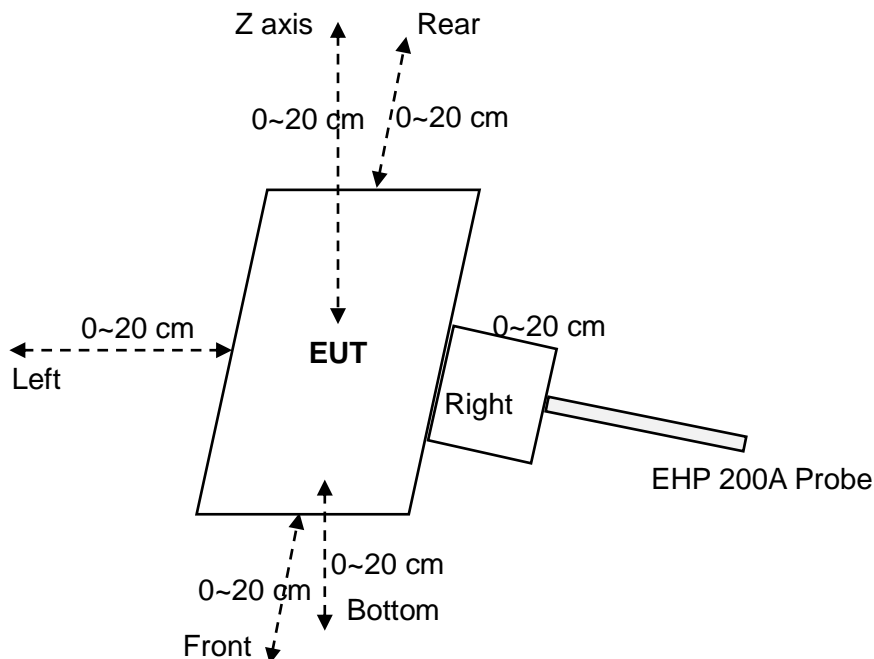

Notes: The EHP 200A Probe has a diameter of 8.5cm and a radius of 4.25cm.

5.3 Test Procedures

For mobile exposure conditions:

- a. The RF exposure test was performed in anechoic chamber.
- b. E and H-field measurements should be made with the center of the probe at a distance of 15 cm surrounding the EUT and 20 cm above the top surface of the primary/client pair.
- c. The highest emission level was recorded and compared with limit.
- d. The EUT was measured according to the dictates of KDB 680106 v03r01.

For portable exposure conditions:

- a. The RF exposure test was performed in anechoic chamber.
- b. Perform H-field measurements for each edge/top surface of the host/client pair at every 2 cm, starting from as close as possible out to 20 cm
- c. The highest emission level was recorded and compared with limit.
- d. The EUT was measured according to the dictates of TCB Workshop "41-Part-18-&-Wireless-Power-Transfer - April 27, 2022"

Notes: The EUT was setted to transmit continuously with the duty cycle of 100%.

5.4 Equipment Approval Considerations item 5 b) of KDB 680106 D01 v03r01

Requirement	Device
1. Power transfer frequency is less than 1 MHz.	No. The operating frequencies: Tx: 326.5 kHz Tx: 1.778MHz
2. Output power from each primary coil is less than or equal to 15 watts	Yes. The maximum output power: 5W
3. The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.	Yes. The EUT have one source primary coil.
4. Client device is placed directly in contact with the transmitter.	Yes. The client device is placed directly in contact with the transmitter.
5. Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	No.Both mobile and portable exposure conditions apply.
6. The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.	Yes, the H-field measurements for each edge/top surface of the host/client pair at every 2 cm, starting from as close as possible out to 20 cm were also evaluated for portable use condition.

5.5 Test results

For portable exposure condition:

- (1). The portable test modes have covered the considerations of the mobile test, only record the test data of the portable conditions in this report.
- (2) Operating modes with client device (1 %, 50%, 99% battery status of client device) have been test, only show the data of worst case of 1% battery status of client device.

Test condition 1: Mode 1 operating mode with client device (1 % battery status of client device) -test distance: 0-4cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0513	1.63	22.35%
	Left	0.0505		
	Right	0.0505		
	Front	0.3643		
	Rear	0.1696		
	Bottom	0.0505		

Test condition 2: Mode 1 operating mode with client device (1 % battery status of client device) - Test distance 6cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0568	1.63	6.99%
	Left	0.0505		
	Right	0.0488		
	Front	0.1140		
	Rear	0.0505		
	Bottom	0.0505		

Test condition 3: Mode 1 operating mode with client device (1 % battery status of client device)
- Test distance 8cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0528	1.63	5.79%
	Left	0.0536		
	Right	0.0505		
	Front	0.0944		
	Rear	0.0518		
	Bottom	0.0501		

Test condition 4: Mode 1 operating mode with client device (1 % battery status of client device)
- Test distance 10cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0513	1.63	3.28%
	Left	0.0505		
	Right	0.0535		
	Front	0.0505		
	Rear	0.0505		
	Bottom	0.0505		

Test condition 5: Mode 1 operating mode with client device (1 % battery status of client device)
- Test distance 12cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0531	1.63	3.26%
	Left	0.0504		
	Right	0.0501		
	Front	0.0531		
	Rear	0.0523		
	Bottom	0.0525		

Test condition 6: Mode 1 operating mode with client device (1 % battery status of client device)
- Test distance 14cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0528	1.63	3.24%
	Left	0.0505		
	Right	0.0517		
	Front	0.0488		
	Rear	0.0517		
	Bottom	0.0488		

Test condition 7: Mode 1 operating mode with client device (1 % battery status of client device)
- Test distance 16cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0513	1.63	3.19%
	Left	0.0520		
	Right	0.0505		
	Front	0.0505		
	Rear	0.0517		
	Bottom	0.0505		

Test condition 8: Mode 1 operating mode with client device (1 % battery status of client device)
- Test distance 18cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0505	1.63	3.17%
	Left	0.0517		
	Right	0.0505		
	Front	0.0501		
	Rear	0.0505		
	Bottom	0.0505		

Test condition 9: Mode 1 operating mode with client device (1 % battery status of client device)
- Test distance 20cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0494	1.63	3.13%
	Left	0.0505		
	Right	0.0501		
	Front	0.0494		
	Rear	0.0510		
	Bottom	0.0488		

Test condition 1: Mode 2 operating mode with client device (1 % battery status of client device)
-test distance: 0-4cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0600	1.63	3.68%
	Left	0.0596		
	Right	0.0575		
	Front	0.0575		
	Rear	0.0574		
	Bottom	0.0575		

Test condition 2: Mode 2 operating mode with client device (1 % battery status of client device)
- Test distance 6cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0567	1.63	3.65%
	Left	0.0595		
	Right	0.0567		
	Front	0.0574		
	Rear	0.0567		
	Bottom	0.0586		

Test condition 3: Mode 2 operating mode with client device (1 % battery status of client device)
- Test distance 8cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0574	1.63	3.62%
	Left	0.0584		
	Right	0.0574		
	Front	0.0590		
	Rear	0.0567		
	Bottom	0.0567		

Test condition 4: Mode 2 operating mode with client device (1 % battery status of client device)
- Test distance 10cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0575	1.63	3.61%
	Left	0.0588		
	Right	0.0575		
	Front	0.0567		
	Rear	0.0574		
	Bottom	0.0574		

Test condition 5: Mode 2 operating mode with client device (1 % battery status of client device)
- Test distance 12cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0567	1.63	3.60%
	Left	0.0575		
	Right	0.0555		
	Front	0.0567		
	Rear	0.0586		
	Bottom	0.0575		

Test condition 6: Mode 2 operating mode with client device (1 % battery status of client device)
- Test distance 14cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0567	1.63	3.59%
	Left	0.0574		
	Right	0.0585		
	Front	0.0575		
	Rear	0.0567		
	Bottom	0.0567		

Test condition 7: Mode 2 operating mode with client device (1 % battery status of client device)
- Test distance 16cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0574	1.63	3.58%
	Left	0.0567		
	Right	0.0583		
	Front	0.0574		
	Rear	0.0581		
	Bottom	0.0567		

Test condition 8: Mode 2 operating mode with client device (1 % battery status of client device)
- Test distance 18cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0567	1.63	3.53%
	Left	0.0575		
	Right	0.0567		
	Front	0.0556		
	Rear	0.0554		
	Bottom	0.0534		

Test condition 9: Mode 2 operating mode with client device (1 % battery status of client device)
- Test distance 20cm

Antenna	Probe Position	H-field (A/m)		
		Measurement	Limit	Max. Percentage (%)
1	Z axis	0.0567	1.63	3.48%
	Left	0.0554		
	Right	0.0552		
	Front	0.0531		
	Rear	0.0523		
	Bottom	0.0547		

Photographs of the Test Setup

See the Appendix - Test Setup Photos.

Photographs of the EUT

See the Appendix - EUT Photos.

----End of Report----