

FCC TEST REPORT

Client Name : Anker Innovations Limited
Address : Room 1318-19, Hollywood Plaza, 610 Nathan Road,
Mongkok, Kowloon, Hongkong
Product Name : Smart Lock Touch & Wi-Fi
Date : Mar. 09, 2021



Shenzhen Anbotek Compliance Laboratory Limited

Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Description of Test Modes.....	5
1.5. List of channels.....	5
1.6. Description Of Test Setup.....	6
1.7. Test Equipment List.....	7
1.8. Measurement Uncertainty.....	8
1.9. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	10
4. Radiation Spurious Emission and Band Edge.....	15
4.1. Test Standard and Limit.....	15
4.2. Test Setup.....	15
4.3. Test Procedure.....	16
4.4. Test Data.....	17
5. Maximum Peak Output Power Test.....	25
5.1. Test Standard and Limit.....	25
5.2. Test Setup.....	25
5.3. Test Procedure.....	25
5.4. Test Data.....	25
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	28
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	30
APPENDIX III -- INTERNAL PHOTOGRAPH.....	34

TEST REPORT

Applicant : Anker Innovations Limited
Manufacturer : Anker Innovations Limited
Product Name : Smart Lock Touch & Wi-Fi
Model No. : T8520
Trade Mark : eufy SECURITY
Rating(s) : Input: DC 5V, 2A(DC 3.63V, 10000 mAh battery inside)

Test Standard(s) : FCC Part15 Subpart C, Section 15.247

Test Method(s) : ANSI C63.10: 2013, KDB558074 D01 DTS Meas Guidance v05r02

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt Jul. 08, 2020
Date of Test Jul. 08, 2020~Mar. 03, 2021

Prepared By *Yilia Zhong*

(Engineer / Yilia Zhong)

Reviewer *Bibo Zhang*

(Supervisor / Bibo Zhang)

Approved & Authorized Signer *Kingkong Jin*

(Manager / Kingkong Jin)

1. General Information

1.1. Client Information

Applicant	:	Anker Innovations Limited
Address	:	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hongkong
Manufacturer	:	Anker Innovations Limited
Address	:	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hongkong

1.2. Description of Device (EUT)

Product Name	:	Smart Lock Touch & Wi-Fi
Model No.	:	T8520
Trade Mark	:	eufy SECURITY
Test Power Supply	:	AC 120V, 60Hz for adapter / AC 240V, 60Hz for adapter DC 3.63V battery inside
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Product Description	Operation Frequency:	WiFi 2.4G: 802.11b/ g/ n(HT20) 2412-2462MHz BT: 2402-2480MHz
	Number of Channel:	WiFi 2.4G: 11 Channels for 802.11b/ g/ n(HT20) BLE: 40 Channels
	Modulation Type:	WiFi 2.4G: 802.11b CCK; 802.11g/n OFDM BLE: GFSK
	Antenna Type:	BT: FPC Antenna WiFi 2.4G: FPC Antenna
	Antenna Gain(Peak):	0 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2) This report is for BLE module.		

1.3. Auxiliary Equipment Used During Test

Adapter	:	Manufacturer: Anker Innovations Limited
		M/N: A2613
		Input: 100-240V 50-60Hz 1.8A
		Output: 5V --- 2.4A/ 9V --- 3A/ 15V --- 3A/ 20V --- 3A

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description	
Mode 1	CH00	TX+ Charging Mode/TX Only
Mode 2	CH19	
Mode 3	CH39	

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2)The data rate was set in 1Mbps for radiated emission due to the highest RF output power.



1.5. List of channels

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
00	2402	09	2420	18	2438	27	2456	36	2474
01	2404	10	2422	19	2440	28	2458	37	2476
02	2406	11	2424	20	2442	29	2460	38	2478
03	2408	12	2426	21	2444	30	2462	39	2480
04	2410	13	2428	22	2446	31	2464		
05	2412	14	2430	23	2448	32	2466		
06	2414	15	2432	24	2450	33	2468		
07	2416	16	2434	25	2452	34	2470		
08	2418	17	2436	26	2454	35	2472		

Note:

- 1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
- 2. EUT built-in battery-powered, fully-charged battery use of the test battery.

1.6. Description Of Test Setup

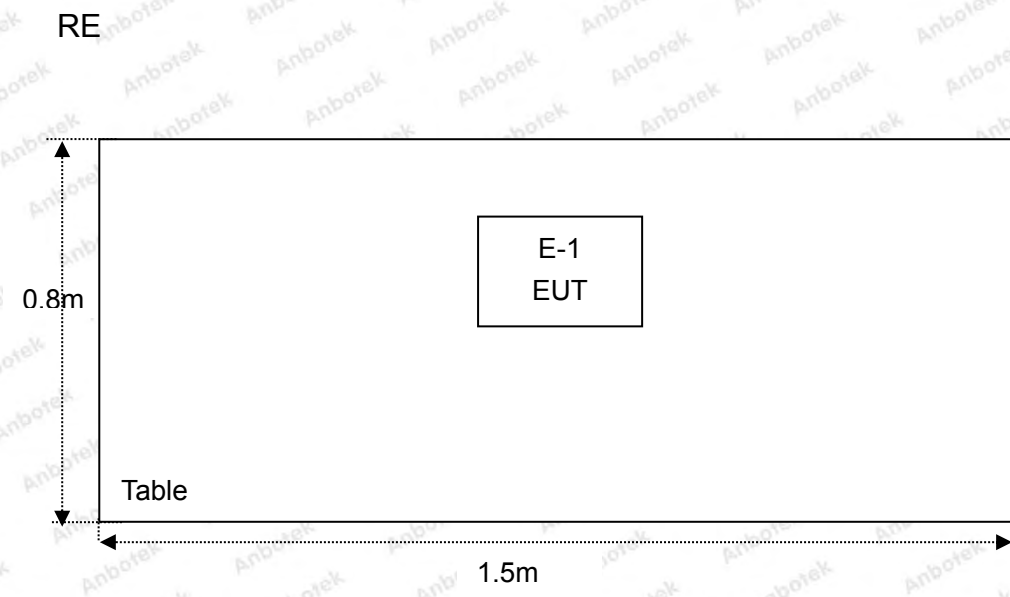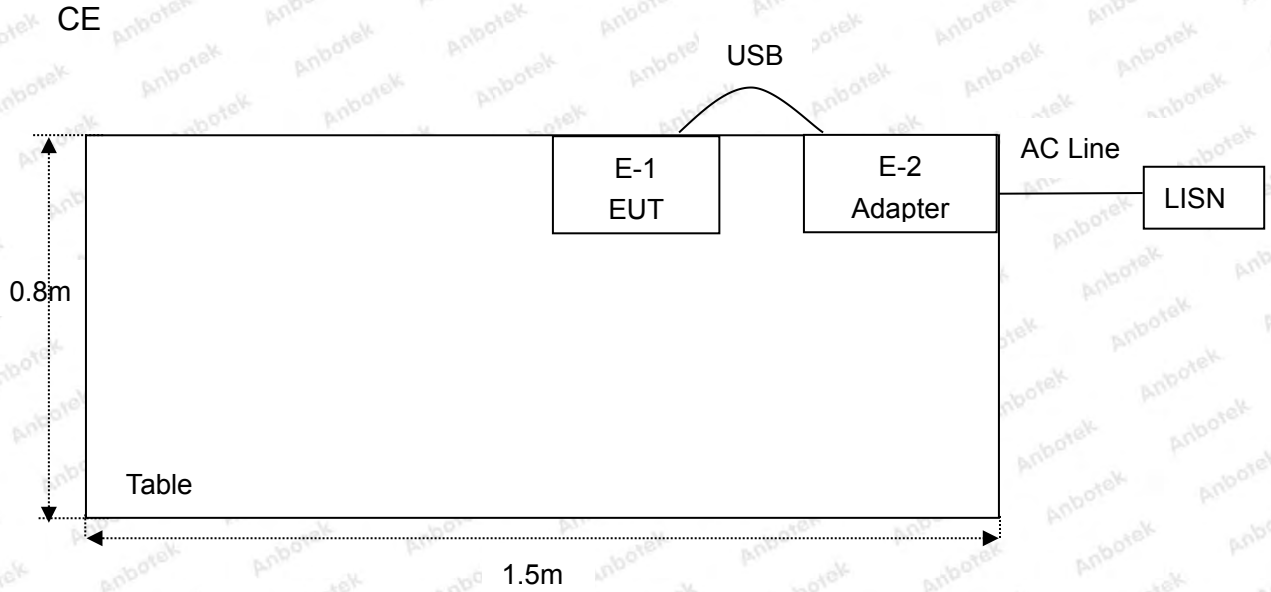

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 26, 2020	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 26, 2020	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 26, 2020	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 26, 2020	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30D	KD17503	Oct. 26, 2020	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 02, 2020	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 02, 2020	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 02, 2020	2 Year
10.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Nov. 02, 2020	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 26, 2020	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 26, 2020	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Oct. 26, 2020	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Oct. 26, 2020	1 Year
16.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 26, 2020	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 26, 2020	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 26, 2020	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	Oct. 26, 2020	1 Year

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 30, 2020.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, September 30, 2020.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results

Standard Section	Test Item	Result
15.207	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.247(b)(3)	Conducted Peak Output Power	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		

This is a Class II application of the device, the difference between the original device and current one described as following:

(1) Changing a few parts of the main board.

Based on the change made to the device, the spurious emission test items were performed and the conducted power quotes the data of the original report 18220WC00093901.


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

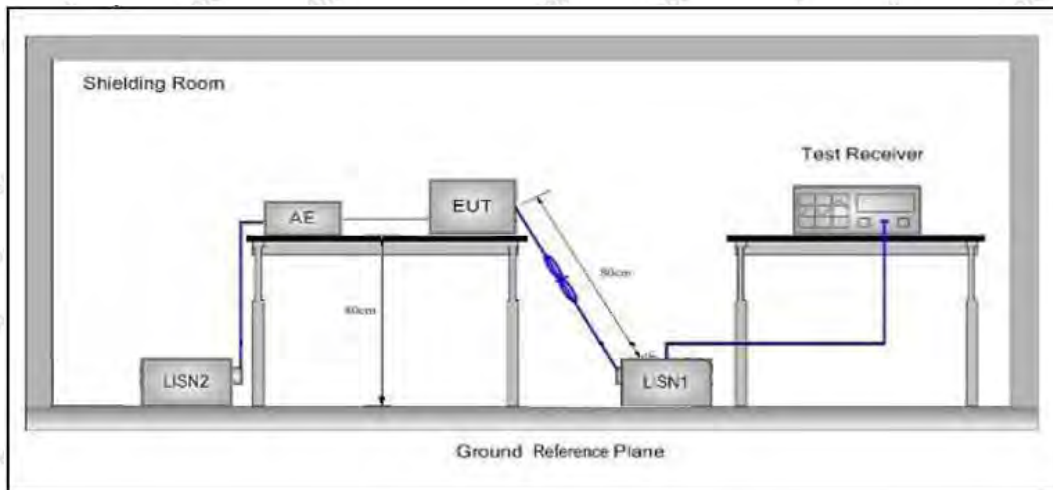

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.


3.4. Test Data

Please to see the following pages.

During the test, pre-scan all the modes, and found Low channel(TX+Charging Mode) which is the worst case, only the worst case is recorded in the report.

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Mode 1
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Live Line
 Tem.: 22.4°C Hum.: 49%

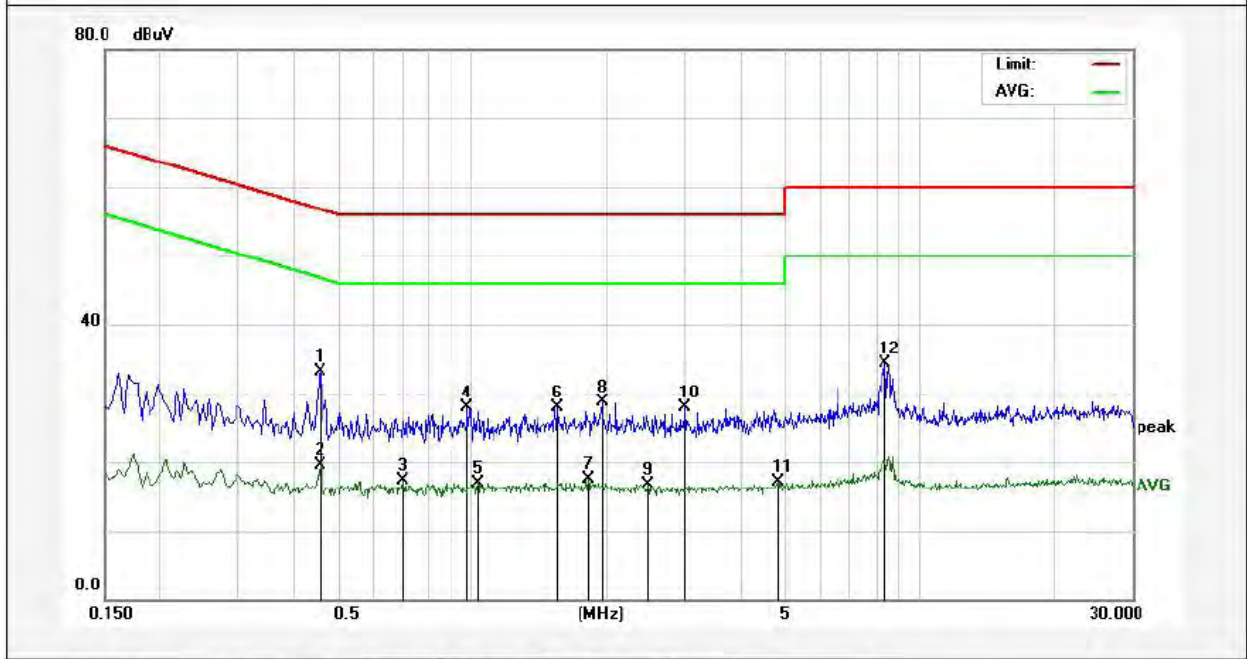

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.4580	13.21	19.96	33.17	56.73	-23.56	QP	
2	0.4580	-0.50	19.96	19.46	46.73	-27.27	AVG	
3	0.6980	-2.73	20.04	17.31	46.00	-28.69	AVG	
4	0.9740	7.71	20.11	27.82	56.00	-28.18	QP	
5	1.0300	-3.12	20.12	17.00	46.00	-29.00	AVG	
6	1.5500	7.71	20.13	27.84	56.00	-28.16	QP	
7	1.8220	-2.67	20.14	17.47	46.00	-28.53	AVG	
8	1.9540	8.60	20.14	28.74	56.00	-27.26	QP	
9	2.4780	-3.35	20.15	16.80	46.00	-29.20	AVG	
10	2.9980	7.80	20.16	27.96	56.00	-28.04	QP	
11	4.8380	-3.00	20.20	17.20	46.00	-28.80	AVG	
12	8.3740	14.06	20.30	34.36	60.00	-25.64	QP	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Mode 1
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Neutral Line
 Tem.: 22.4°C Hum.: 49%

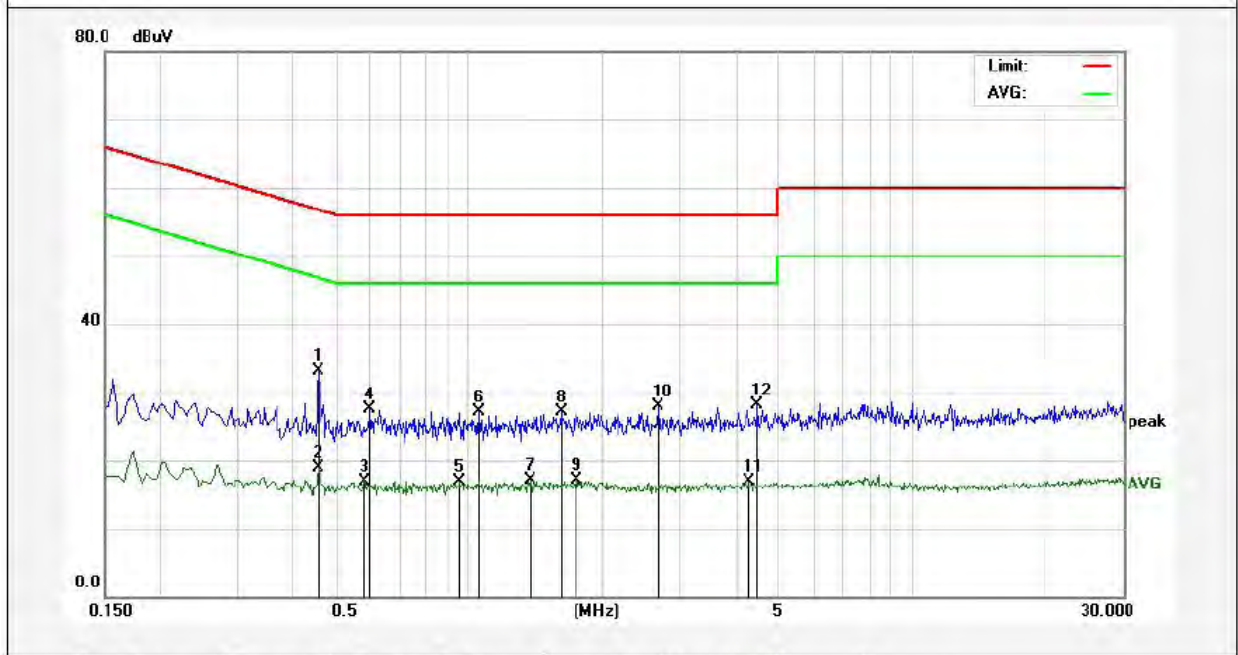

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.4580	13.11	19.96	33.07	56.73	-23.66	QP	
2	0.4580	-1.01	19.96	18.95	46.73	-27.78	AVG	
3	0.5820	-3.00	20.00	17.00	46.00	-29.00	AVG	
4	0.5980	7.52	20.01	27.53	56.00	-28.47	QP	
5	0.9580	-3.13	20.11	16.98	46.00	-29.02	AVG	
6	1.0500	6.99	20.12	27.11	56.00	-28.89	QP	
7	1.3740	-3.03	20.13	17.10	46.00	-28.90	AVG	
8	1.6140	6.96	20.13	27.09	56.00	-28.91	QP	
9	1.7460	-3.06	20.13	17.07	46.00	-28.93	AVG	
10	2.6780	7.66	20.15	27.81	56.00	-28.19	QP	
11	4.2780	-3.33	20.19	16.86	46.00	-29.14	AVG	
12	4.4940	7.92	20.19	28.11	56.00	-27.89	QP	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Mode 1
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Live Line
 Tem.: 22.4°C Hum.: 49%

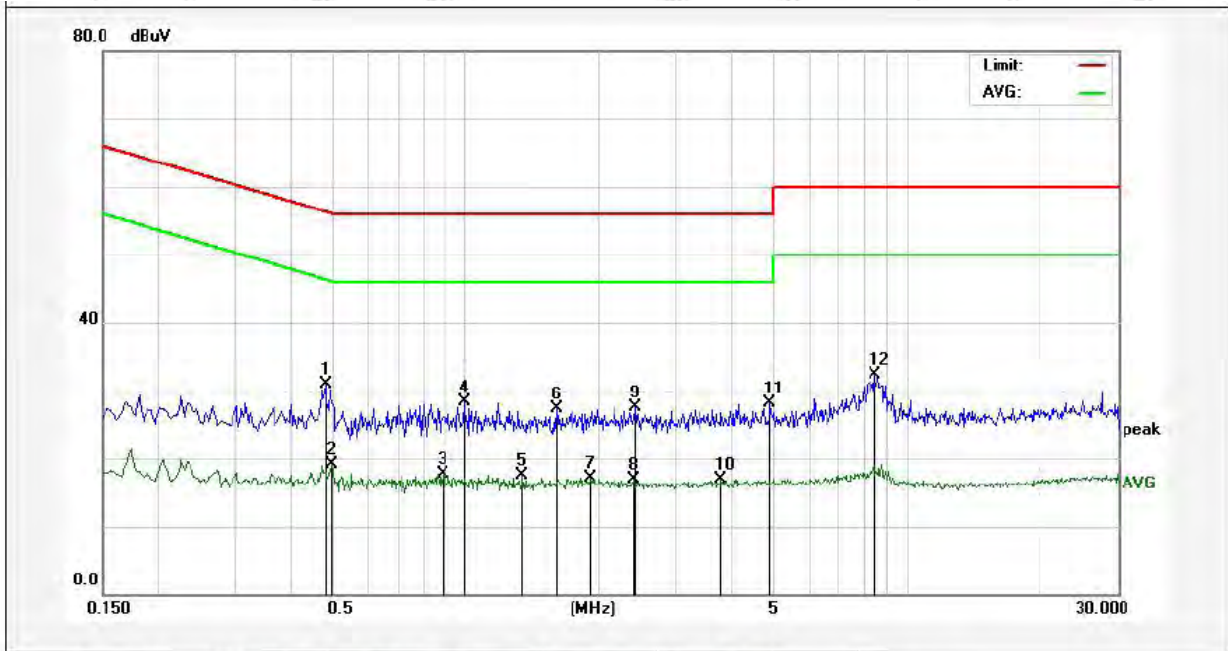

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.4820	10.91	19.97	30.88	56.30	-25.42	QP	
2	0.4980	-0.94	19.98	19.04	46.03	-26.99	AVG	
3	0.8860	-2.31	20.09	17.78	46.00	-28.22	AVG	
4	0.9940	8.19	20.12	28.31	56.00	-27.69	QP	
5	1.3420	-2.62	20.13	17.51	46.00	-28.49	AVG	
6	1.6060	7.23	20.13	27.36	56.00	-28.64	QP	
7	1.9220	-3.04	20.14	17.10	46.00	-28.90	AVG	
8	2.3980	-3.22	20.15	16.93	46.00	-29.07	AVG	
9	2.4260	7.37	20.15	27.52	56.00	-28.48	QP	
10	3.7940	-3.27	20.18	16.91	46.00	-29.09	AVG	
11	4.8820	7.88	20.20	28.08	56.00	-27.92	QP	
12	8.4340	11.98	20.30	32.28	60.00	-27.72	QP	

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: Mode 1
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Neutral Line
 Tem.: 22.4°C Hum.: 49%

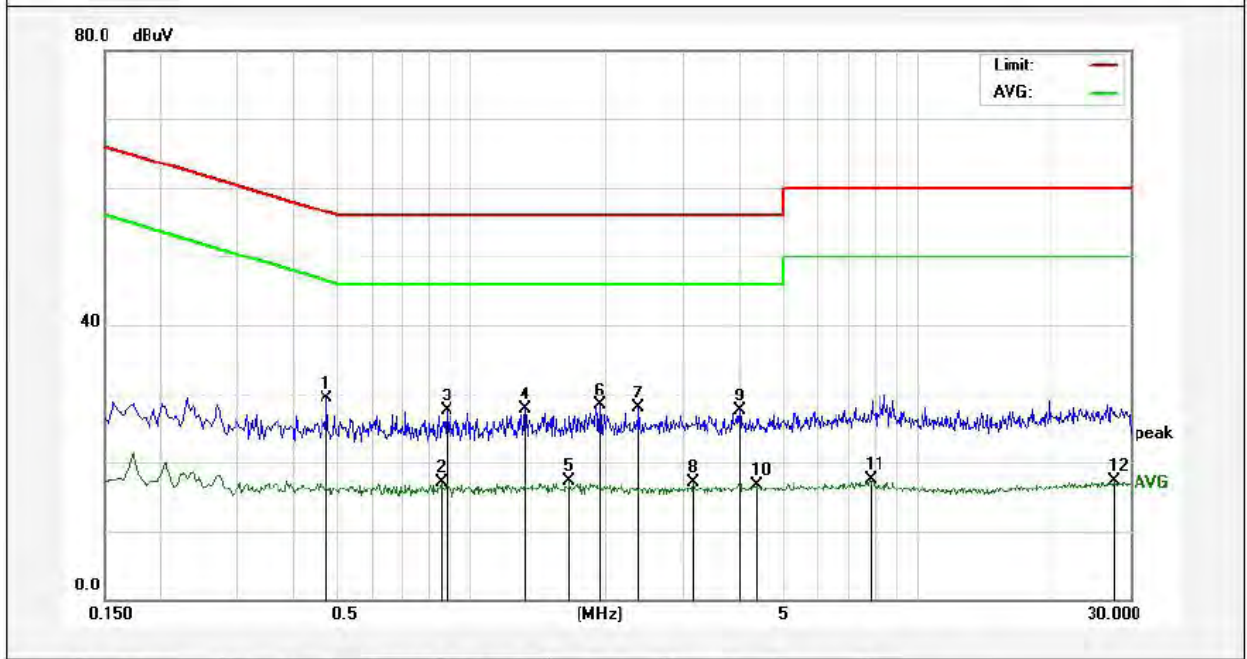

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.4740	9.38	19.97	29.35	56.44	-27.09	QP	
2	0.8540	-3.06	20.08	17.02	46.00	-28.98	AVG	
3	0.8820	7.41	20.09	27.50	56.00	-28.50	QP	
4	1.3180	7.59	20.13	27.72	56.00	-28.28	QP	
5	1.6540	-2.92	20.13	17.21	46.00	-28.79	AVG	
6	1.9460	8.17	20.14	28.31	56.00	-27.69	QP	
7	2.3740	7.84	20.15	27.99	56.00	-28.01	QP	
8	3.1420	-3.06	20.16	17.10	46.00	-28.90	AVG	
9	4.0020	7.37	20.18	27.55	56.00	-28.45	QP	
10	4.3620	-3.50	20.19	16.69	46.00	-29.31	AVG	
11	7.8460	-2.80	20.28	17.48	50.00	-32.52	AVG	
12	27.6660	-2.92	20.27	17.35	50.00	-32.65	AVG	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
-		74.0	Peak	3	

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

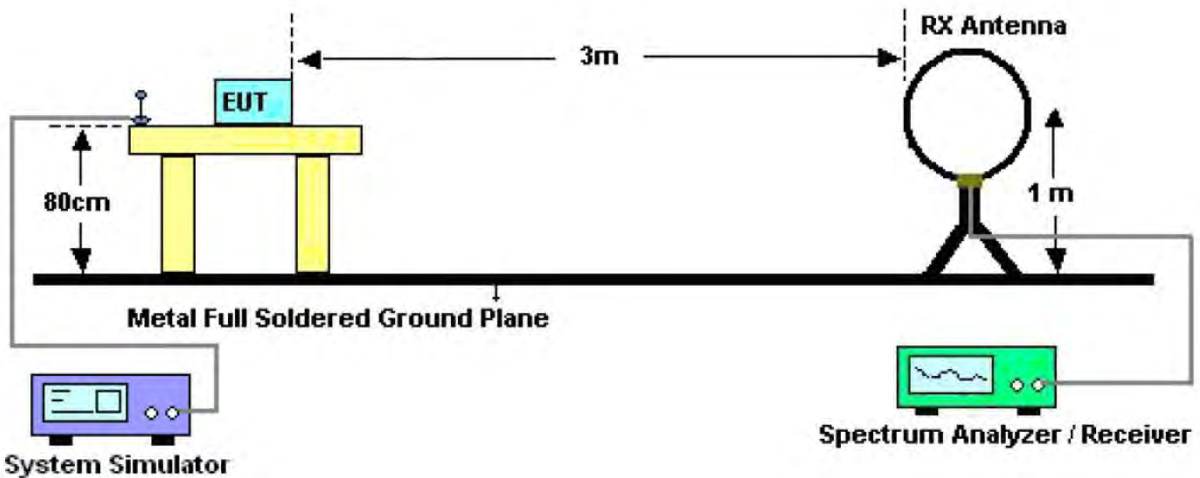


Figure 1. Below 30MHz

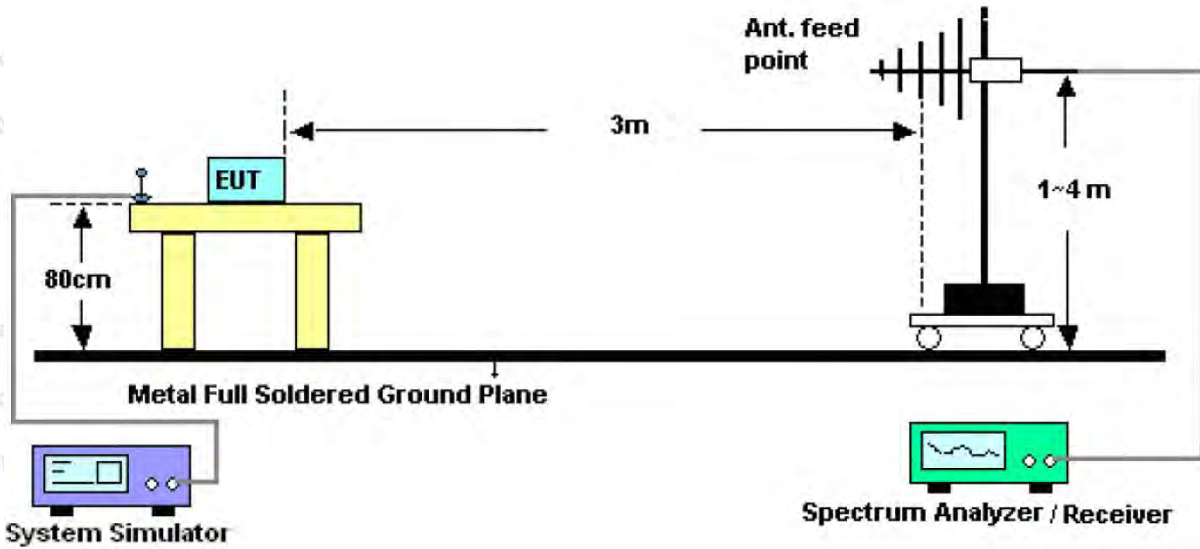


Figure 2. 30MHz to 1GHz

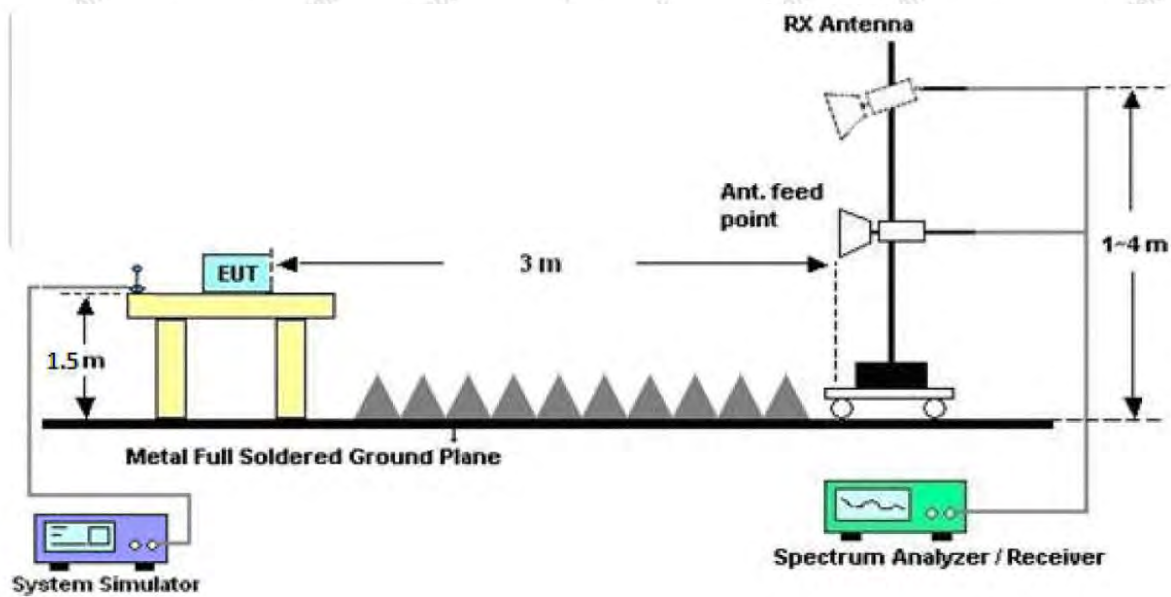


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW =1MHz, VBW =1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW =1MHz, VBW =10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data


PASS

During the test, pre-scan all the modes, and found the Middle channel(TX only Mode) which is the worst case, only the worst case is recorded in the report.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Results (30~1000MHz)


Test Mode: Mode 2
 Power Source: DC 3.63V battery inside
 Polarization: Horizontal
 Temp.(°C)/Hum.(%RH): 23.2°C/50%RH

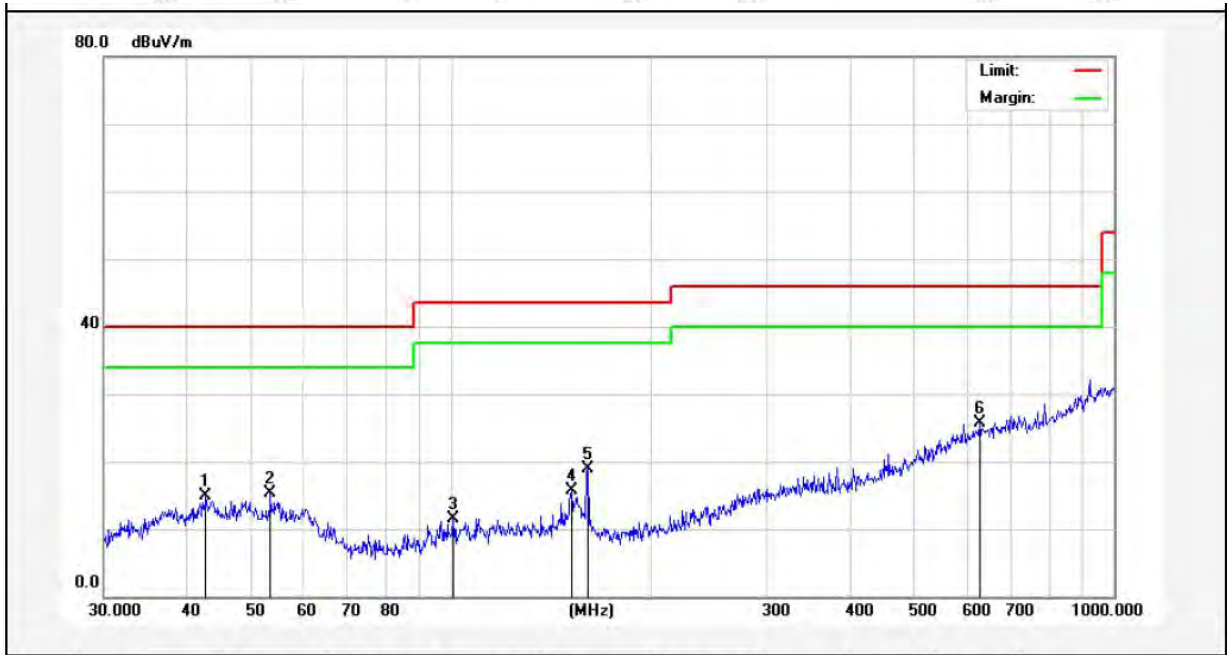

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	42.7496	29.60	-14.61	14.99	40.00	-25.01	QP	100	0	
2	53.5052	31.25	-16.02	15.23	40.00	-24.77	QP	100	360	
3	100.9339	31.12	-19.54	11.58	43.50	-31.92	QP	100	0	
4	152.1297	36.67	-20.92	15.75	43.50	-27.75	QP	100	360	
5	160.9088	40.60	-21.75	18.85	43.50	-24.65	QP	100	0	
6	627.2738	32.55	-6.79	25.76	46.00	-20.24	QP	100	360	

Test Results (30~1000MHz)

Test Mode: Mode 2
 Power Source: DC 3.63V battery inside
 Polarization: Vertical
 Temp.(°C)/Hum.(%RH): 23.2°C/50%RH

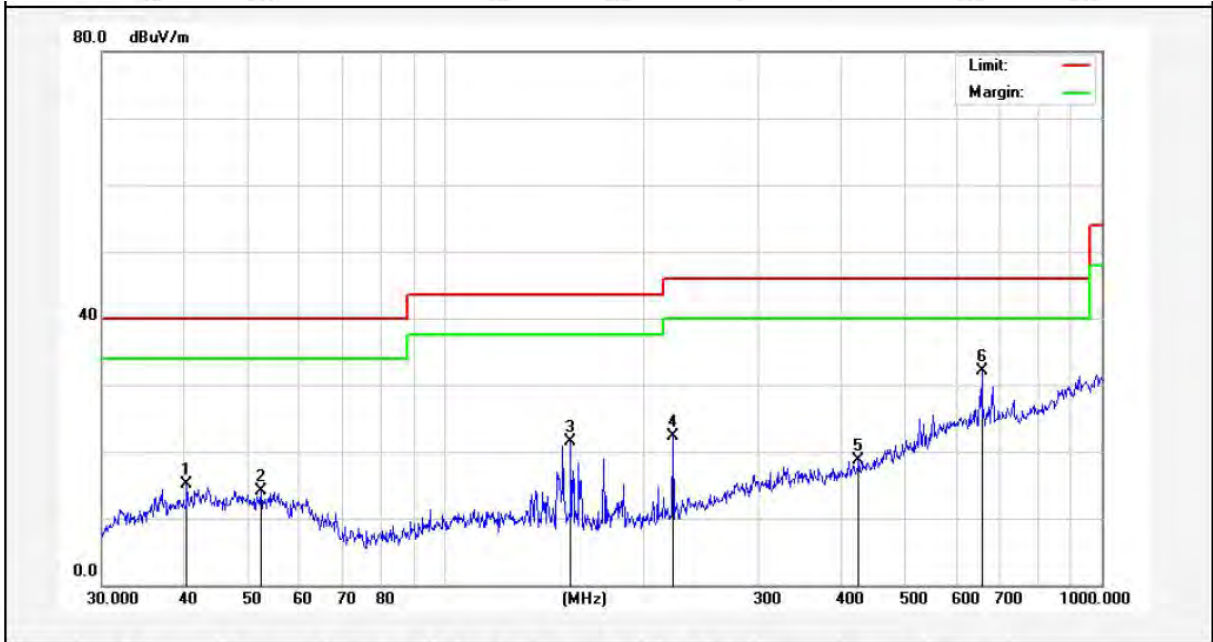

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	40.4172	28.63	-13.62	15.01	40.00	-24.99	QP	100	0	
2	52.3912	29.66	-15.65	14.01	40.00	-25.99	QP	100	360	
3	155.3644	41.18	-19.65	21.53	43.50	-21.97	QP	100	0	
4	222.1698	38.61	-16.35	22.26	46.00	-23.74	QP	100	360	
5	426.5210	29.50	-10.73	18.77	46.00	-27.23	QP	100	0	
6	656.5300	38.88	-6.71	32.17	46.00	-13.83	QP	100	360	

Test Results (1GHz-25GHz)

Test Mode: CH00					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4804.00	38.91	34.04	6.58	34.09	45.44	74.00	-28.56	V
7206.00	32.89	37.11	7.73	34.50	43.23	74.00	-30.77	V
9608.00	32.42	39.31	9.23	34.79	46.17	74.00	-27.83	V
12010.00	*					74.00		V
14412.00	*					74.00		V
4804.00	43.52	34.04	6.58	34.09	50.05	74.00	-23.95	H
7206.00	34.79	37.11	7.73	34.50	45.13	74.00	-28.87	H
9608.00	31.99	39.31	9.23	34.79	45.74	74.00	-28.26	H
12010.00	*					74.00		H
14412.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4804.00	27.42	34.04	6.58	34.09	33.95	54.00	-20.05	V
7206.00	21.40	37.11	7.73	34.50	31.74	54.00	-22.26	V
9608.00	20.38	39.31	9.23	34.79	34.13	54.00	-19.87	V
12010.00	*					54.00		V
14412.00	*					54.00		V
4804.00	31.82	34.04	6.58	34.09	38.35	54.00	-15.65	H
7206.00	23.68	37.11	7.73	34.50	34.02	54.00	-19.98	H
9608.00	20.24	39.31	9.23	34.79	33.99	54.00	-20.01	H
12010.00	*					54.00		H
14412.00	*					54.00		H

Test Results (1GHz-25GHz)

Test Mode: CH19					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4880.00	37.77	34.38	6.69	34.09	44.75	74.00	-29.25	V
7320.00	32.14	37.22	7.78	34.53	42.61	74.00	-31.39	V
9760.00	31.75	39.46	9.35	34.80	45.76	74.00	-28.24	V
12200.00	*					74.00		V
14640.00	*					74.00		V
4880.00	42.16	34.38	6.69	34.09	49.14	74.00	-24.86	H
7320.00	33.94	37.22	7.78	34.53	44.41	74.00	-29.59	H
9760.00	31.21	39.46	9.35	34.80	45.22	74.00	-28.78	H
12200.00	*					74.00		H
14640.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4880.00	26.52	34.38	6.69	34.09	33.50	54.00	-20.50	V
7320.00	20.79	37.22	7.78	34.53	31.26	54.00	-22.74	V
9760.00	19.83	39.46	9.35	34.80	33.84	54.00	-20.16	V
12200.00	*					54.00		V
14640.00	*					54.00		V
4880.00	30.80	34.38	6.69	34.09	37.78	54.00	-16.22	H
7320.00	22.99	37.22	7.78	34.53	33.46	54.00	-20.54	H
9760.00	19.60	39.46	9.35	34.80	33.61	54.00	-20.39	H
12200.00	*					54.00		H
14640.00	*					54.00		H

Test Results (1GHz-25GHz)





Test Mode: CH39					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4960.00	37.04	34.72	6.79	34.09	44.46	74.00	-29.54	V
7440.00	31.65	37.34	7.82	34.57	42.24	74.00	-31.76	V
9920.00	31.31	39.62	9.46	34.81	45.58	74.00	-28.42	V
12400.00	*					74.00		V
14880.00	*					74.00		V
4960.00	41.27	34.72	6.79	34.09	48.69	74.00	-25.31	H
7440.00	33.38	37.34	7.82	34.57	43.97	74.00	-30.03	H
9920.00	30.71	39.62	9.46	34.81	44.98	74.00	-29.02	H
12400.00	*					74.00		H
14880.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4960.00	25.98	34.72	6.79	34.09	33.40	54.00	-20.60	V
7440.00	20.42	37.34	7.82	34.57	31.01	54.00	-22.99	V
9920.00	19.51	39.62	9.46	34.81	33.78	54.00	-20.22	V
12400.00	*					54.00		V
14880.00	*					54.00		V
4960.00	30.19	34.72	6.79	34.09	37.61	54.00	-16.39	H
7440.00	22.58	37.34	7.82	34.57	33.17	54.00	-20.83	H
9920.00	19.23	39.62	9.46	34.81	33.50	54.00	-20.50	H
12400.00	*					54.00		H
14880.00	*					54.00		H

Remark:

1. Level =Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. “*” means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Radiated Band Edge:

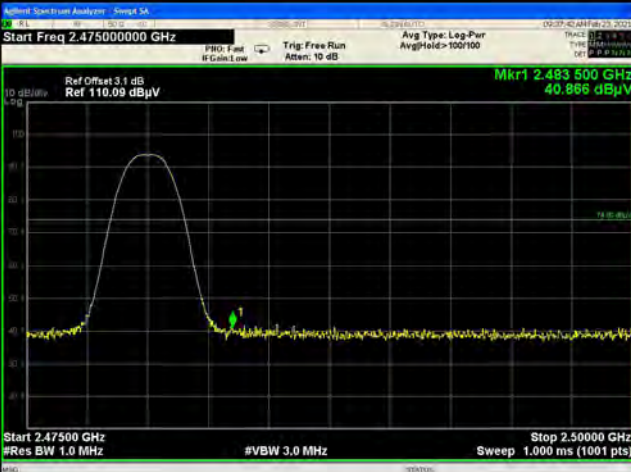Test Mode: CH00	Test channel: Lowest
Peak Value(Vertical)	Peak Value(Horizontal)
Average Value(Vertical)	Average Value(Horizontal)

Test Mode: CH39	Test channel: Highest
 <p>Agilent Spectrum Analyzer - Screenshot 54 Start Freq 2.475000000 GHz Ref Offset 3.1 dB Ref 110.09 dBµV Mkr1 2.483500 GHz 40.888 dBµV Start 2.47500 GHz #Res BW 1.0 MHz #VBW 3.0 MHz Stop 2.50000 GHz Sweep 1.000 ms (1001 pts)</p>	 <p>Agilent Spectrum Analyzer - Screenshot 54 Marker 1 2.483500000000 GHz Ref Offset 3.1 dB Ref 110.09 dBµV Mkr1 2.483500 GHz 39.615 dBµV Start 2.47500 GHz #Res BW 1.0 MHz #VBW 3.0 MHz Stop 2.50000 GHz Sweep 1.000 ms (1001 pts)</p>
Peak Value(Vertical)	Peak Value(Horizontal)
 <p>Agilent Spectrum Analyzer - Screenshot 54 Start Freq 2.475000000 GHz Ref Offset 3.1 dB Ref 110.09 dBµV Mkr1 2.483500 GHz 31.193 dBµV Start 2.47500 GHz #Res BW 1.0 MHz #VBW 270 Hz Stop 2.50000 GHz Sweep 93.27 ms (1001 pts)</p>	 <p>Agilent Spectrum Analyzer - Screenshot 54 Start Freq 2.475000000 GHz Ref Offset 3.1 dB Ref 110.09 dBµV Mkr1 2.483500 GHz 30.913 dBµV Start 2.47500 GHz #Res BW 1.0 MHz #VBW 270 Hz Stop 2.50000 GHz Sweep 93.27 ms (1001 pts)</p>
Average Value(Vertical)	Average Value(Horizontal)

Remark:


- Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor

5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(3)
Test Limit	30dBm

5.2. Test Setup



5.3. Test Procedure

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.


1. Set the RBW \geq DTS bandwidth.
2. Set the VBW \geq 3*RBW.
3. Set the span \geq 3*RBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.

5.4. Test Data


Test Item	: Max. peak output power	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 3.63V battery inside	Temperature	: 24°C
Test Result	: PASS	Humidity	: 55%RH

Channel Frequency (MHz)	Peak Power output (dBm)	Limit (dBm)	Results
2402	7.492	30	PASS
2440	7.075	30	PASS
2480	6.488	30	PASS


Note: For pre-scan, the power is the same as the data in the original report 18220WC00093901.

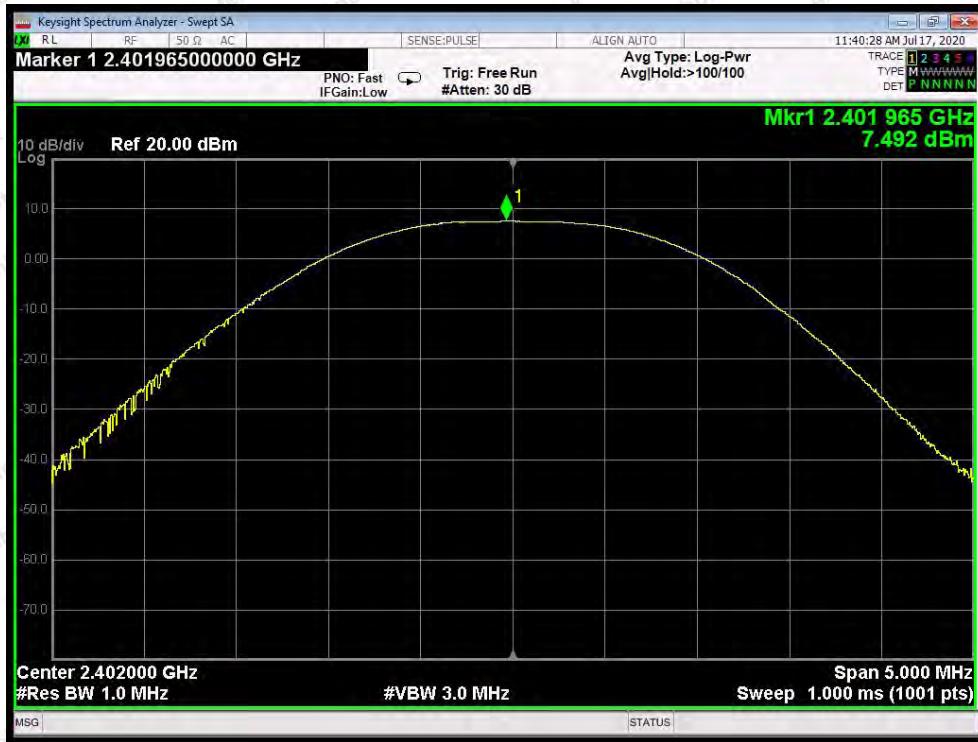

CH: Low

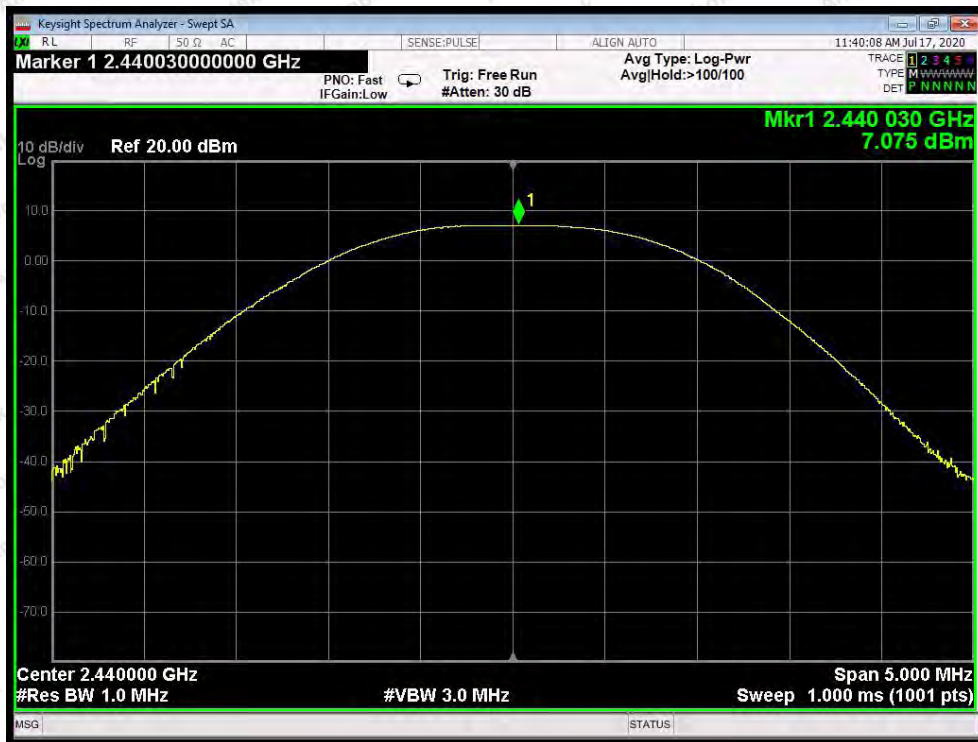

CH: Middle

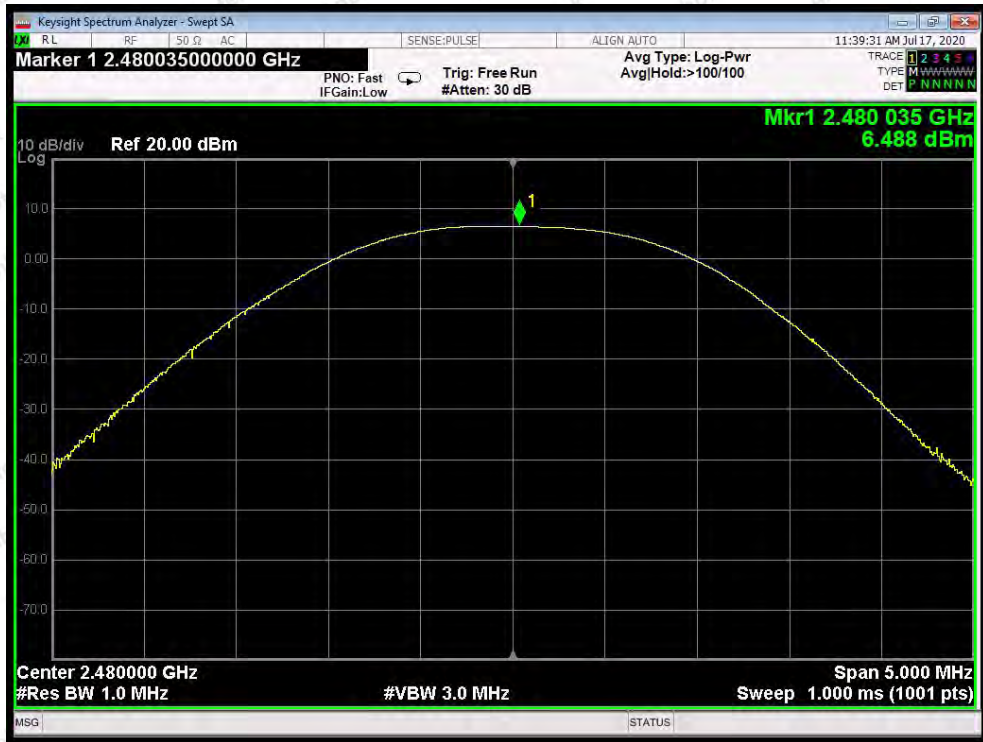


CH: High


APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement



Photo of Radiation Emission Test

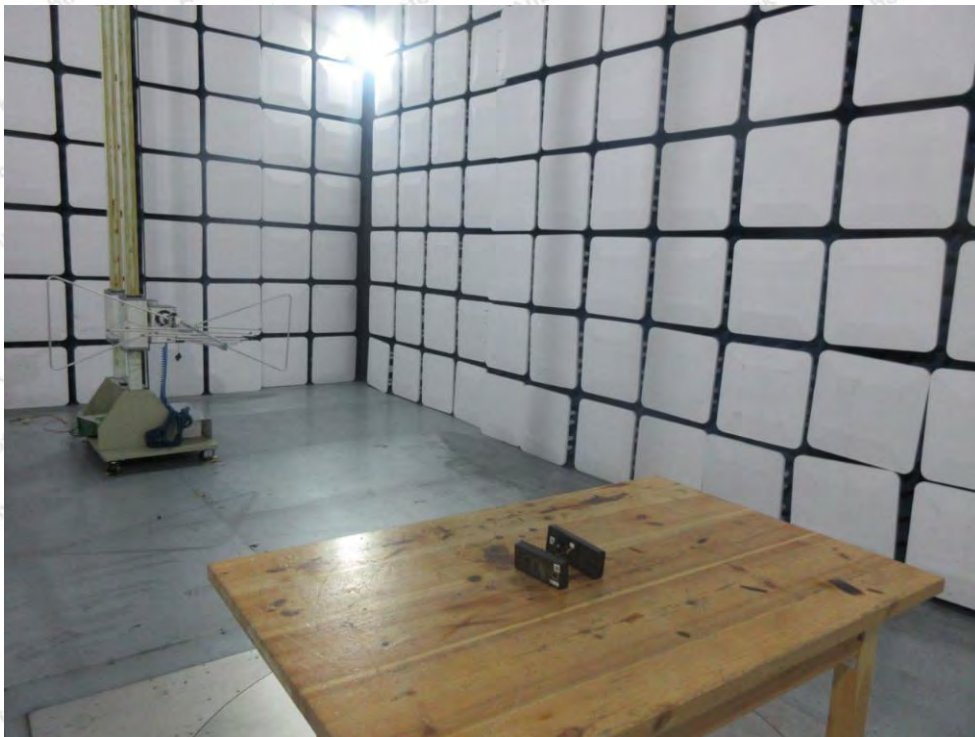

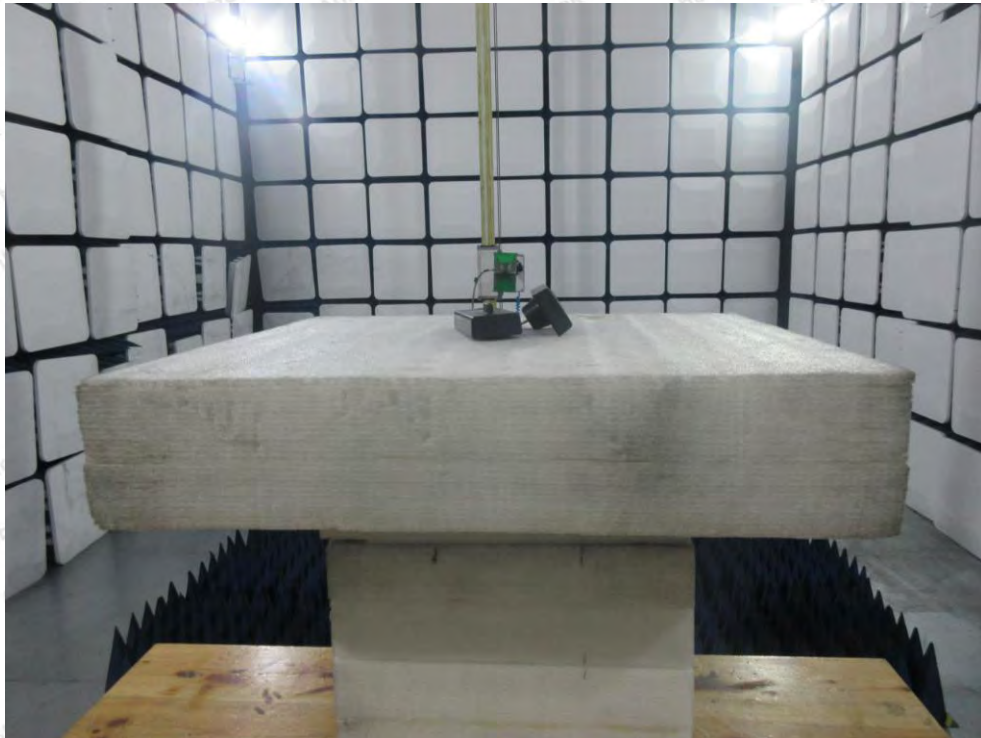

APPENDIX II -- EXTERNAL PHOTOGRAPH














APPENDIX III -- INTERNAL PHOTOGRAPH






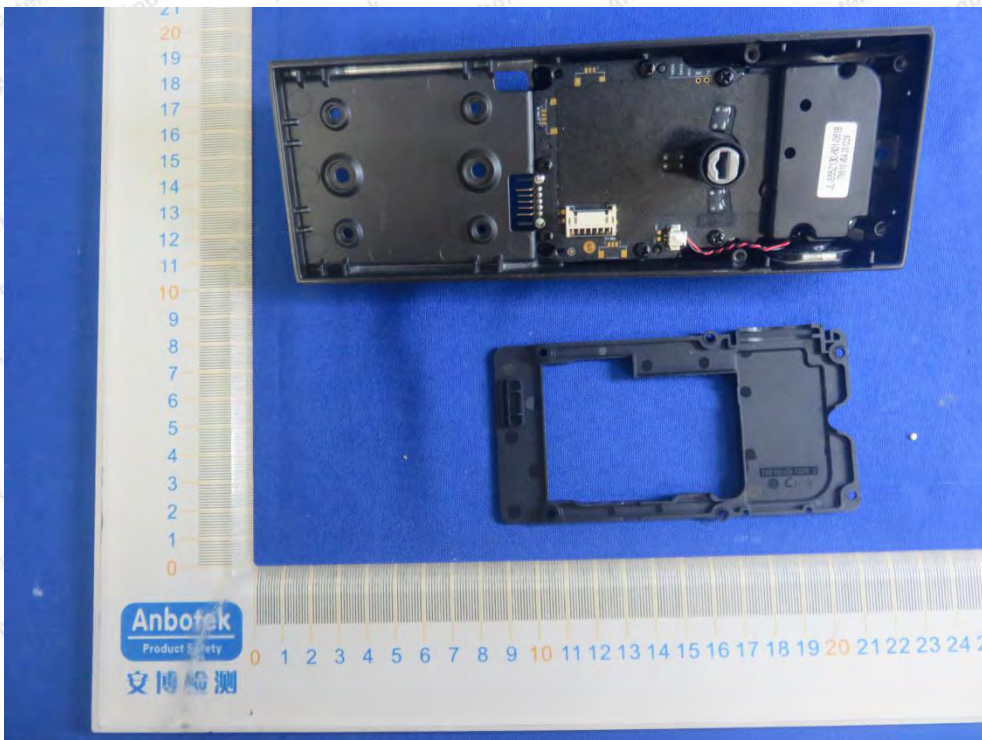


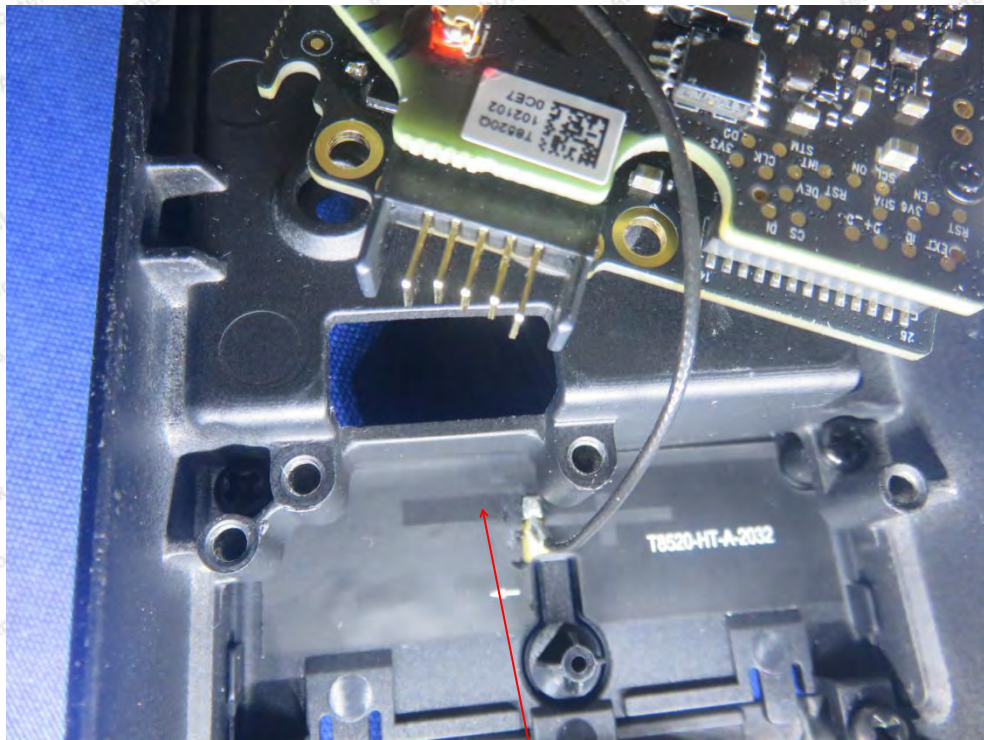
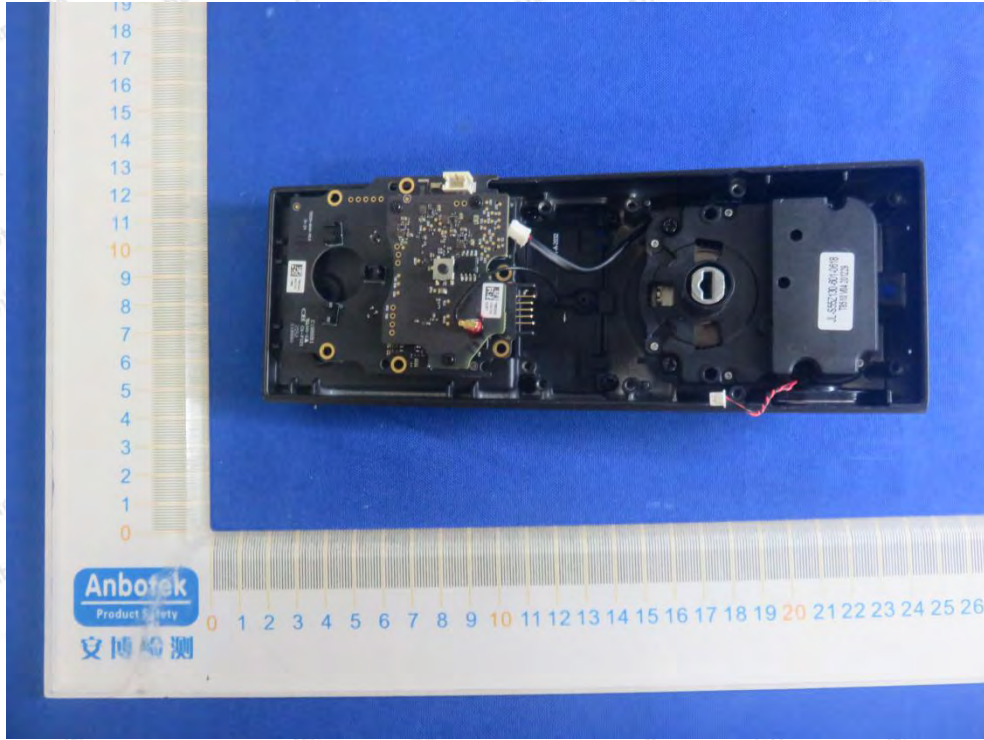




BT & WIFI ANT

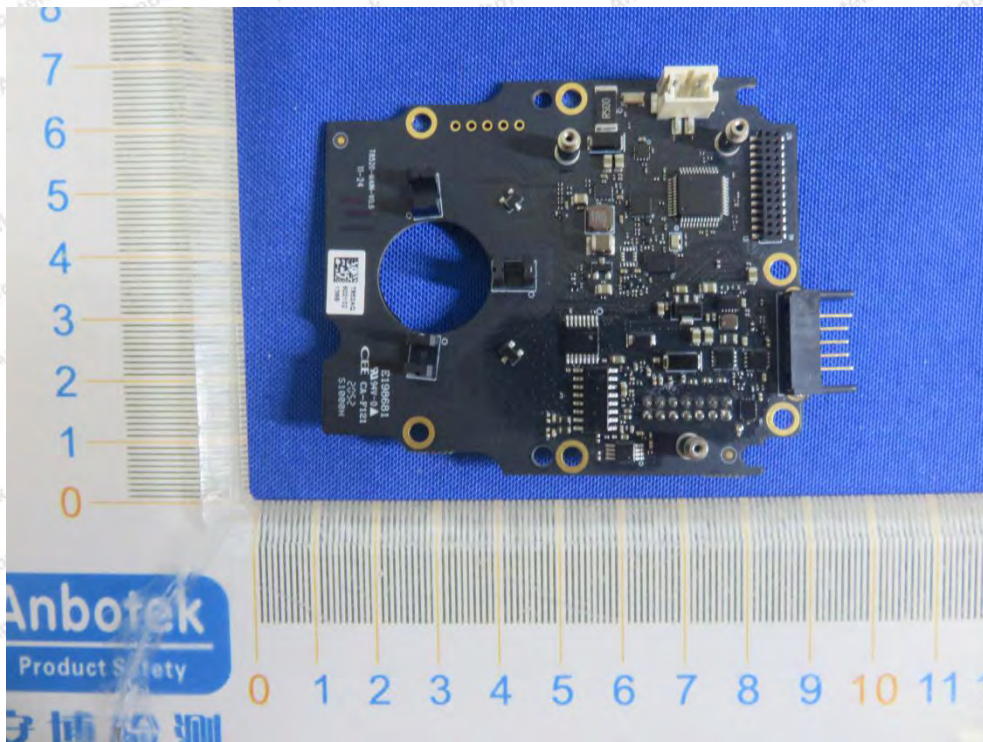
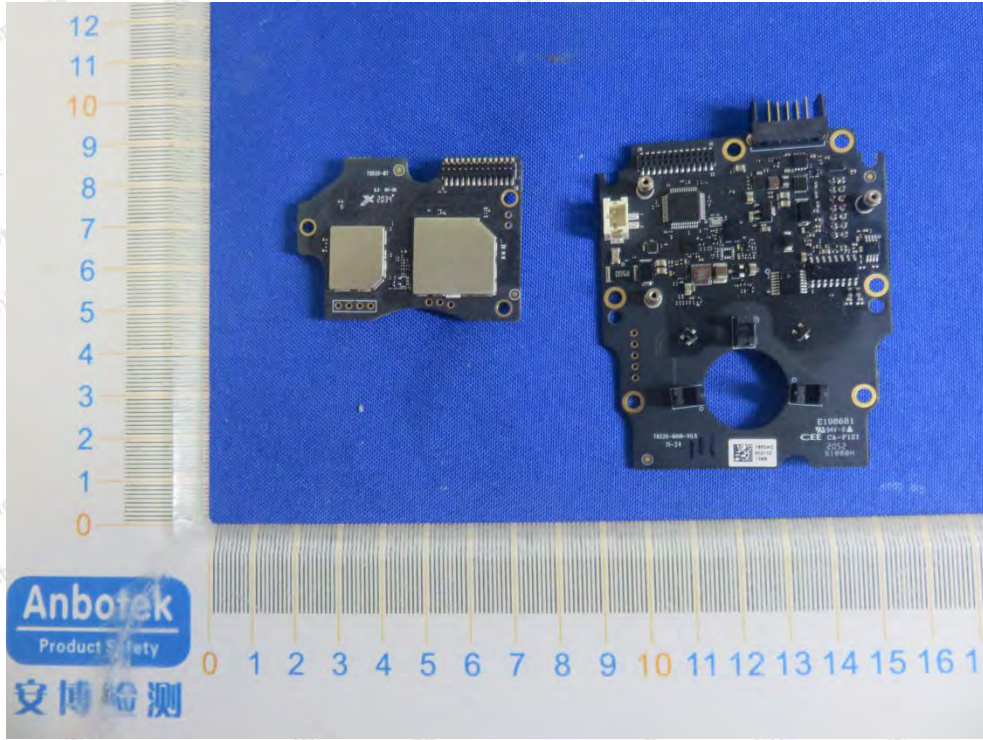


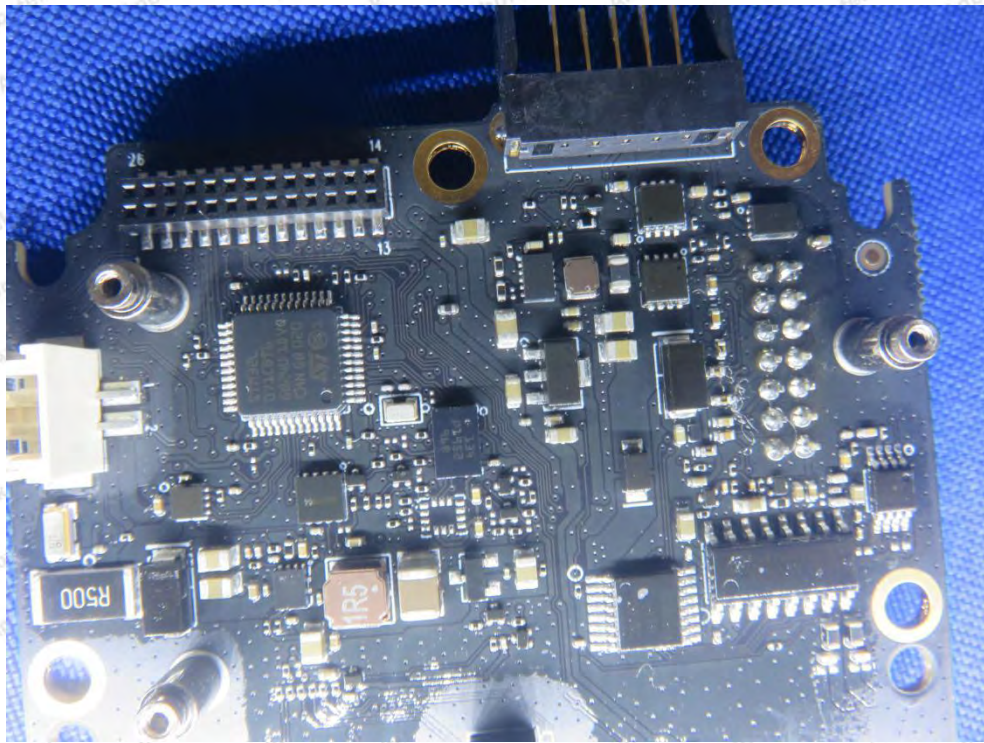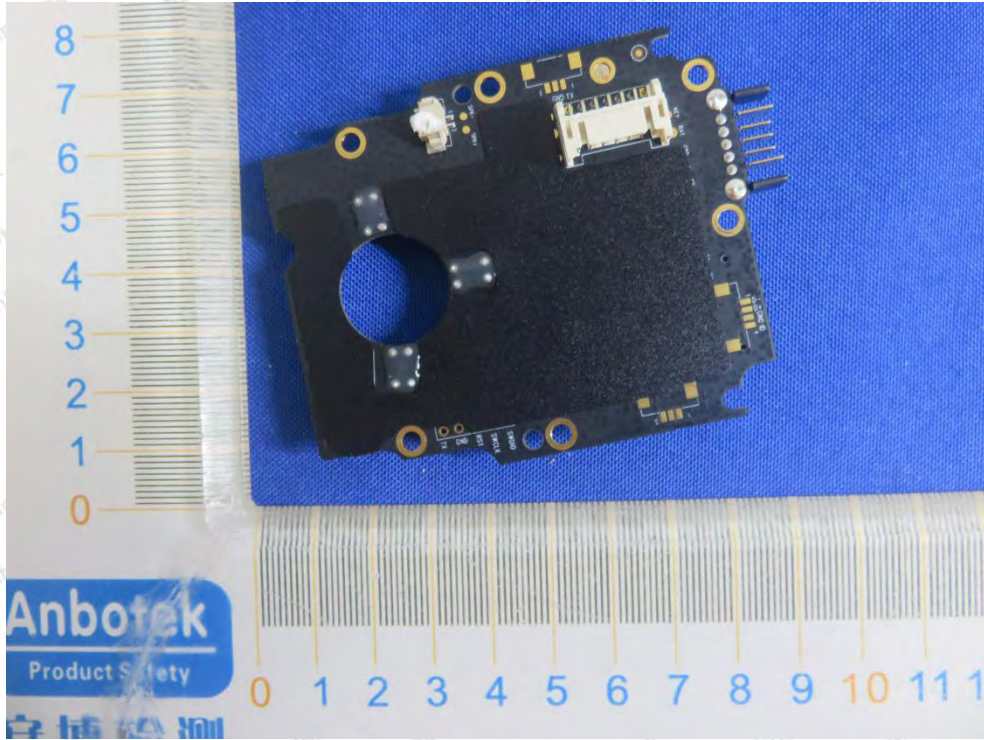


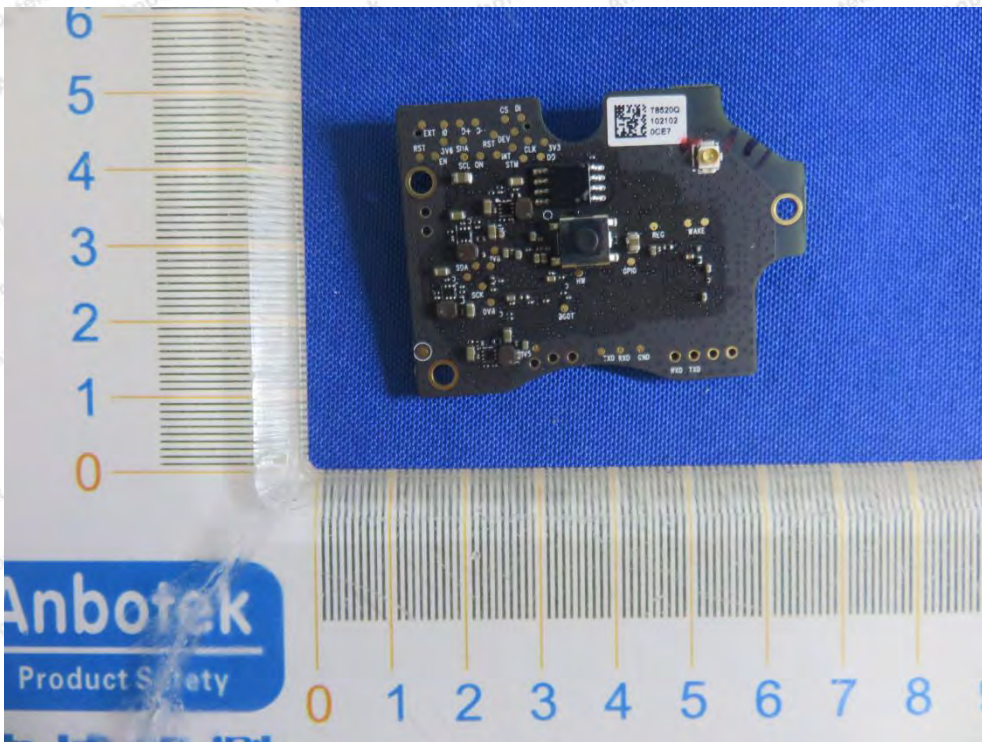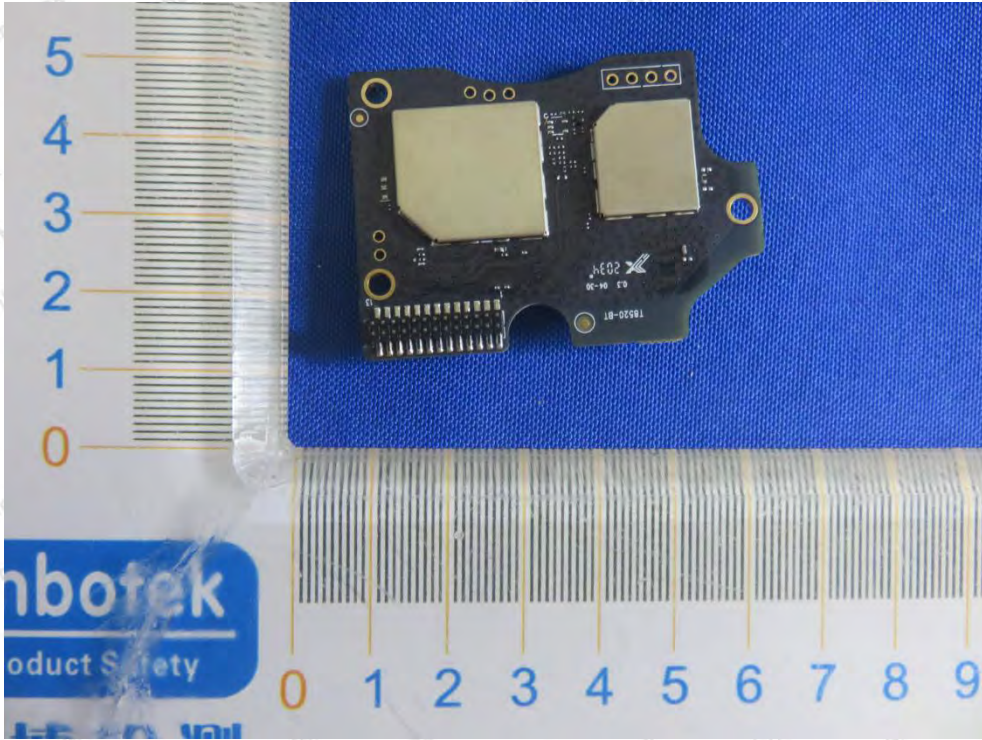

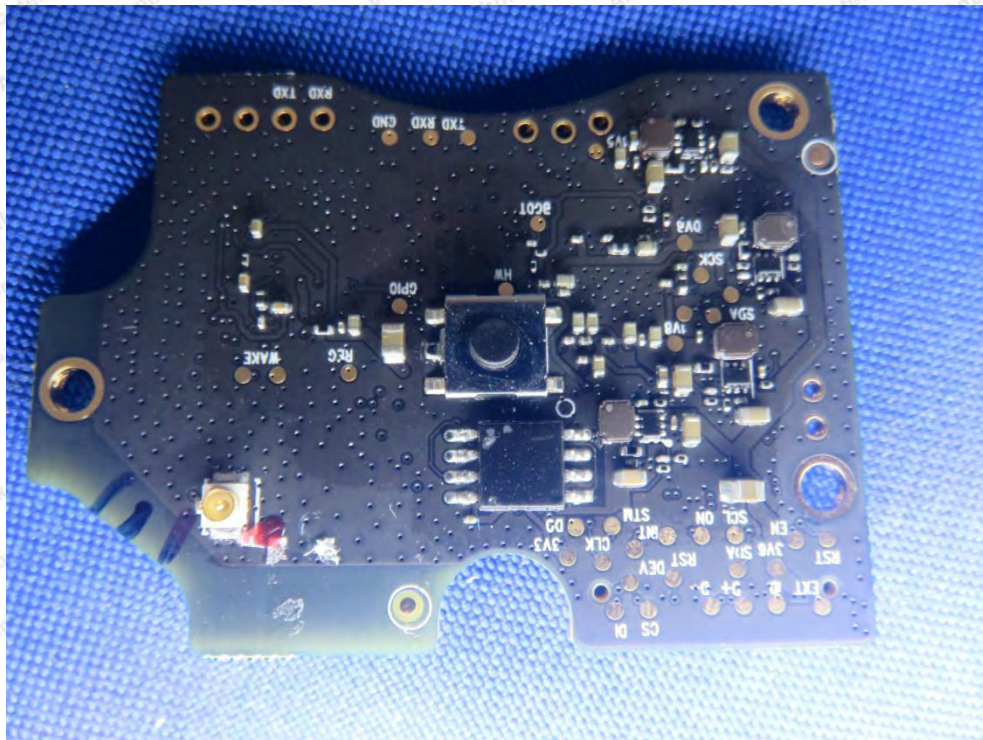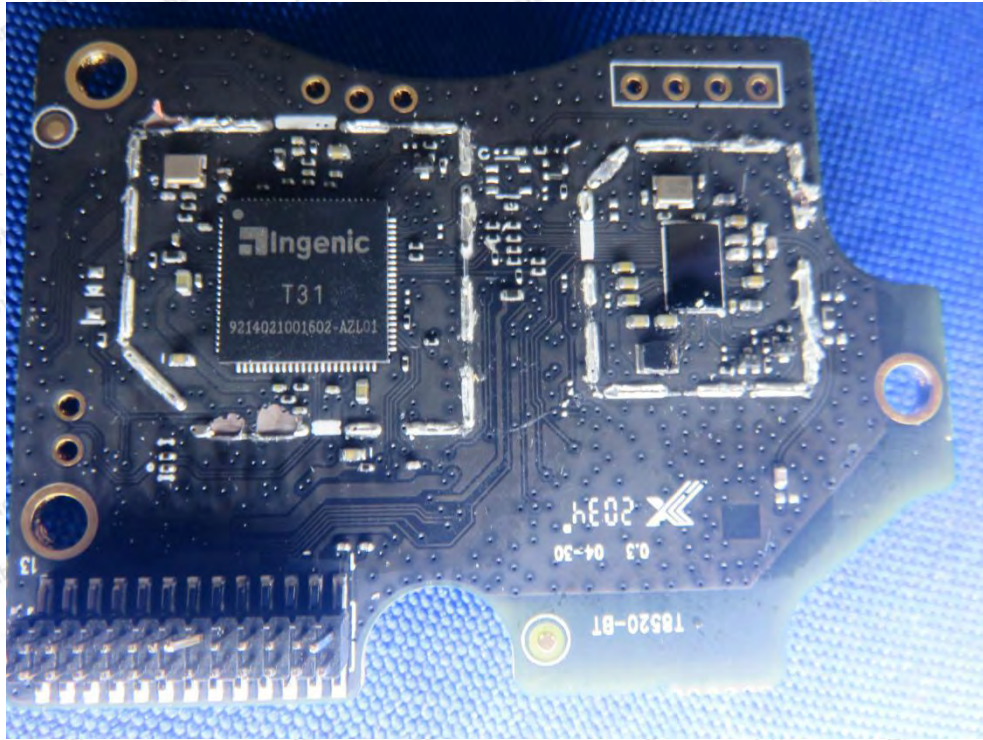

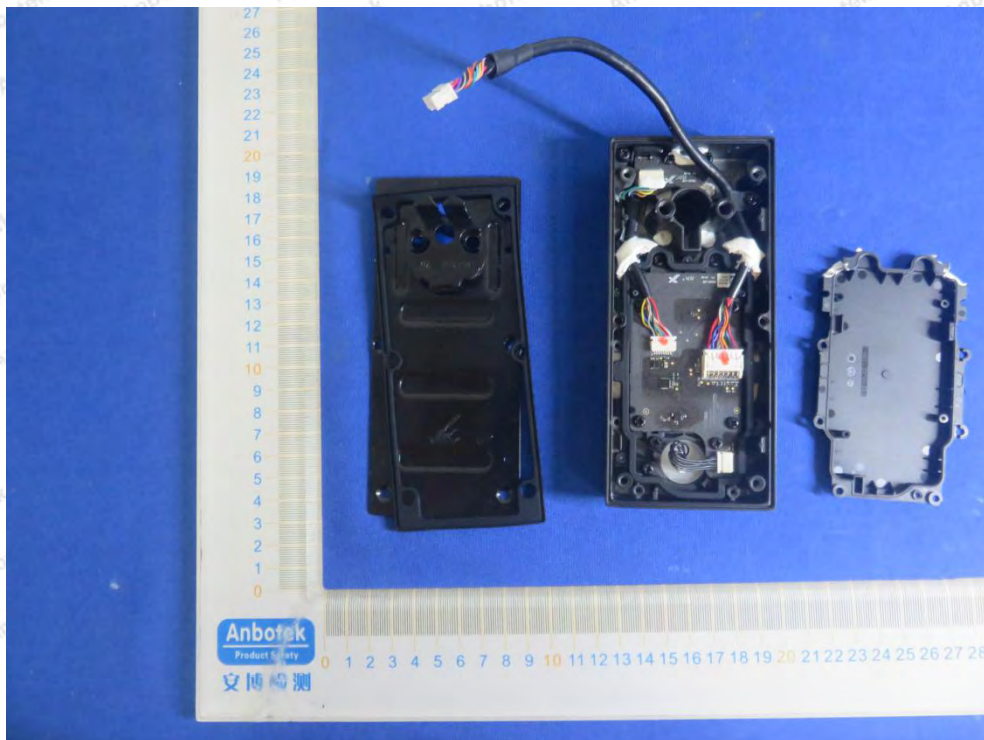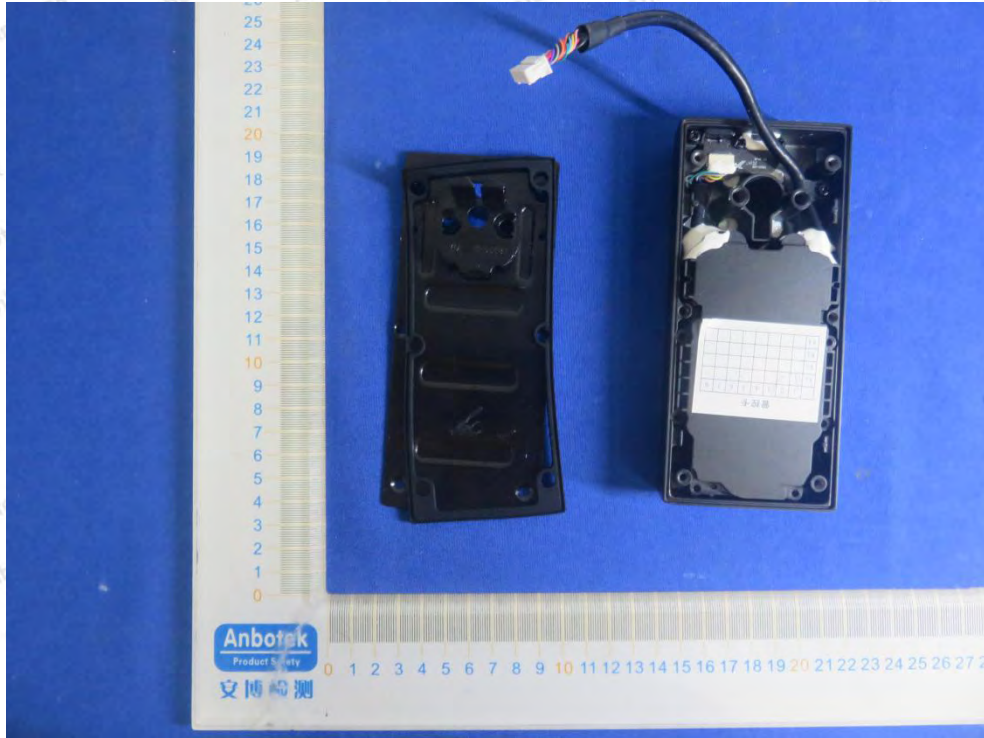

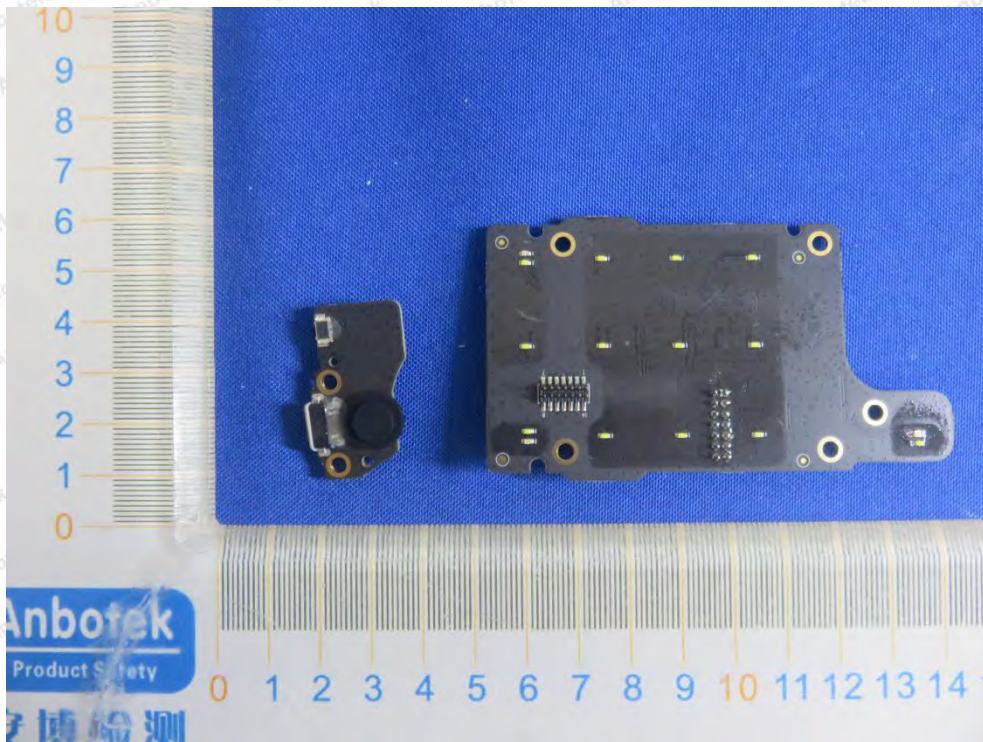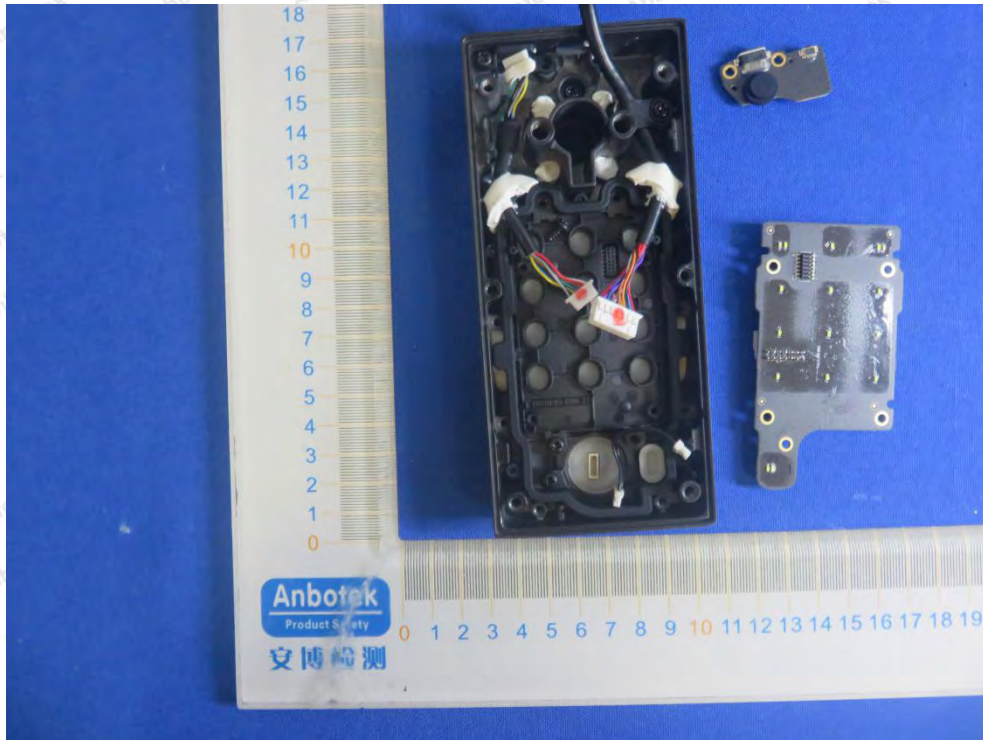

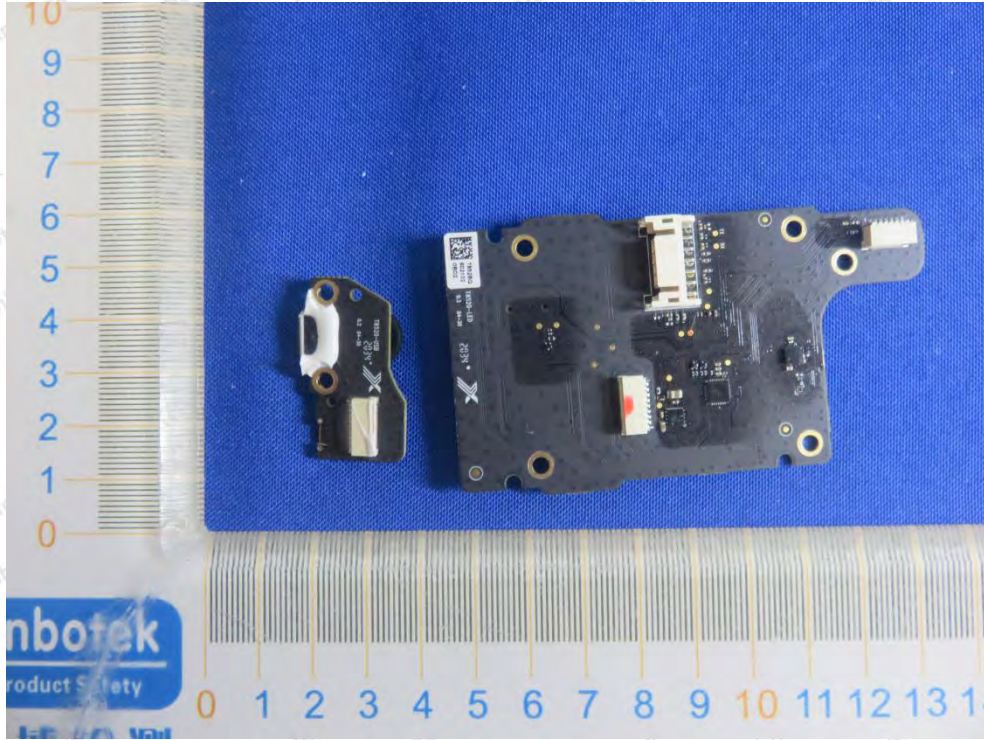

----- End of Report -----