

FCC/IC REPORT

Applicant: Remote Tech LLC

Address of Applicant: 310 ALDER RD, DOVER DE 19904 USA

Equipment Under Test (EUT)

Product Name: keyless transmitter

Model No.: RT-HK14B

FCC ID: 2AOKM-HK1

Canada IC: 24223-HK1

Applicable standards: FCC CFR Title 47 Part 15 Subpart C,15.231
RSS-Gen Issue 5 April 2018
RSS-210 Issue 9 August 2016,Annex A

Date of sample receipt: 25 Sep., 2018

Date of Test: 25 Sep., to 30 Sep., 2018

Date of report issue: 08 Oct., 2018

Test Result: PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

| Version No. | Date | Description |
|-------------|---------------|-------------|
| 00 | 08 Oct., 2018 | Original |
| | | |
| | | |
| | | |
| | | |

Prepared By:

Carrey Chen

Test Engineer

Date:

08 Oct., 2018

Check By:

Wimer Zhang

Project Engineer

Date:

08 Oct., 2018

3 Contents

| | Page |
|---|-----------|
| 1 COVER PAGE..... | 1 |
| 2 VERSION | 2 |
| 3 CONTENTS | 3 |
| 4 TEST SUMMARY..... | 4 |
| 5 GENERAL INFORMATION..... | 5 |
| 5.1 CLIENT INFORMATION..... | 5 |
| 5.2 GENERAL DESCRIPTION OF E.U.T..... | 5 |
| 5.3 TEST MODE | 5 |
| 5.4 DESCRIPTION OF SUPPORT UNITS..... | 5 |
| 5.5 LABORATORY FACILITY..... | 6 |
| 5.6 LABORATORY LOCATION | 6 |
| 5.7 MEASUREMENT UNCERTAINTY..... | 6 |
| 5.8 TEST INSTRUMENTS LIST..... | 7 |
| 6 TEST RESULTS AND MEASUREMENT DATA..... | 8 |
| 6.1 ANTENNA REQUIREMENT | 8 |
| 6.2 RADIATED EMISSION | 9 |
| 6.2.1 Field Strength Of The Fundamental Signal..... | 11 |
| 6.2.2 Spurious Emissions | 15 |
| 6.3 20DB BANDWIDTH..... | 20 |
| 6.4 DURATION TIME..... | 22 |
| 6.5 FREQUENCY STABILITY | 24 |
| 7 TEST SETUP PHOTOS..... | 26 |
| 8 EUT CONSTRUCTIONAL PHOTOS..... | 27 |

4 Test Summary

| Test Item | Section in CFR 47 | | Result |
|--|-------------------|--------------------------------------|--------|
| | FCC | IC | |
| Antenna requirement | 15.203 | RSS-GEN 6.8 | Pass |
| Field strength of the fundamental signal | 15.231 (b) | RSS-210 Annex A Section A.1.2 (a) | Pass |
| Spurious emissions | 15.231 (b)/15.209 | RSS-210 Annex A Section A.1.2 (b) | Pass |
| 20dB and 99% Bandwidth | 15.231 (c) | RSS-210 A.1.3 RSS-GEN 6.7 | Pass |
| Duration time | 15.231 (a1) | RSS-210 Annex A Section A.1.1 (a) | Pass |
| Frequency stability | / | RSS-GEN 6.11 8.11 | Pass |
| Conducted Emission | 15.207 | RSS-GEN 8.8 | N/A |

Remarks:
N/A: The EUT not applicable of the test item.
Pass: The EUT complies with the essential requirements in the standard.
TEST ACCORDING TO ANSI C63.4:2014 AND ANSI C63.10:2013.

5 General Information

5.1 Client Information

| | |
|--------------------------|----------------------------------|
| Applicant: | Remote Tech LLC |
| Address of Applicant: | 310 ALDER RD, DOVER DE 19904 USA |
| Manufacturer: | Remote Tech LLC |
| Address of Manufacturer: | 310 ALDER RD, DOVER DE 19904 USA |

5.2 General Description of E.U.T.

| | |
|----------------------|------------------------|
| Product Name: | keyless transmitter |
| Model No.: | RT-HK14B |
| Operation Frequency: | 315MHz |
| Channel numbers: | 1 |
| Modulation type: | FSK |
| Antenna Type: | PCB antenna |
| Antenna gain: | 0 dBi |
| Power supply: | DC 3V (CR2032 battery) |

5.3 Test mode

| | | | |
|--|--|-------|-------|
| Transmitting mode: | Keep the EUT in transmitting mode with modulation (new battery used) | | |
| Pre-Test Mode: | | | |
| CCIS has verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows: | | | |
| Axis | X | Y | Z |
| Field Strength(dBuV/m) | 69.48 | 67.25 | 66.34 |
| Final Test Mode: | | | |
| According to ANSI C63.4 standards, the test results are both the "worst case" and "worst setup": X axis (see the test setup photo) | | | |

5.4 Description of Support Units

| |
|-----|
| N/A |
|-----|

5.5 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Registration No.: 727551**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The Registration No. is 727551.

- **IC - Registration No.: 10106A-1**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.6 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
 Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
 Bao'an District, Shenzhen, Guangdong, China
 Tel: +86-755-23118282, Fax: +86-755-23116366
 Email: info@ccis-cb.com, Website: http://www.ccis-cb.com

5.7 Measurement Uncertainty


| Parameters | Expanded Uncertainty |
|-------------------------------------|----------------------|
| Conducted Emission (9kHz ~ 30MHz) | ±2.22 dB (k=2) |
| Radiated Emission (9kHz ~ 30MHz) | ±2.76 dB (k=2) |
| Radiated Emission (30MHz ~ 1000MHz) | ±4.28 dB (k=2) |
| Radiated Emission (1GHz ~ 18GHz) | ±5.72 dB (k=2) |
| Radiated Emission (18GHz ~ 40GHz) | ±2.88 dB (k=2) |

5.8 Test Instruments list

| Radiated Emission: | | | | | |
|------------------------------|-----------------|---------------|--------------------|----------------------|--------------------------|
| Test Equipment | Manufacturer | Model No. | Serial No. | Cal. Date (mm-dd-yy) | Cal. Due date (mm-dd-yy) |
| 3m SAC | SAEMC | 9m*6m*6m | 966 | 07-22-2017 | 07-21-2020 |
| BiConiLog Antenna | SCHWARZBECK | VULB9163 | 497 | 03-16-2018 | 03-15-2019 |
| Horn Antenna | SCHWARZBECK | BBHA9120D | 916 | 03-16-2018 | 03-15-2019 |
| Horn Antenna | SCHWARZBECK | BBHA9120D | 1805 | 06-22-2017 | 06-21-2020 |
| Horn Antenna | SCHWARZBECK | BBHA 9170 | BBHA9170582 | 11-21-2017 | 11-20-2018 |
| Loop Antenna | SCHWARZBECK | FMZB 1519 B | 00044 | 04-28-2018 | 04-27-2019 |
| EMI Test Software | AUDIX | E3 | Version: 6.110919b | | |
| Pre-amplifier | HP | 8447D | 2944A09358 | 03-07-2018 | 03-06-2019 |
| Pre-amplifier | CD | PAP-1G18 | 11804 | 03-07-2018 | 03-06-2019 |
| Spectrum analyzer | Rohde & Schwarz | FSP30 | 101454 | 03-07-2018 | 03-06-2019 |
| Spectrum analyzer | Rohde & Schwarz | FSP40 | 100363 | 11-21-2017 | 11-20-2018 |
| EMI Test Receiver | Rohde & Schwarz | ESRP7 | 101070 | 03-07-2018 | 03-06-2019 |
| Simulated Station | Anritsu | MT8820C | 6201026545 | 03-07-2018 | 03-06-2019 |
| Cable | ZDECL | Z108-NJ-NJ-81 | 1608458 | 03-07-2018 | 03-06-2019 |
| Cable | MICRO-COAX | MFR64639 | K10742-5 | 03-07-2018 | 03-06-2019 |
| Cable | SUHNER | SUCOFLEX100 | 58193/4PE | 03-07-2018 | 03-06-2019 |
| DC Power Supply | XinNuoEr | WYK-10020K | 1409050110020 | 10-31-2017 | 10-30-2018 |
| Temperature Humidity Chamber | HengPu | HPGDS-500 | 20140828008 | 09-24-2017 | 09-23-2018 |
| | | | | 09-24-2018 | 09-23-2019 |



6 Test results and Measurement Data

6.1 Antenna requirement
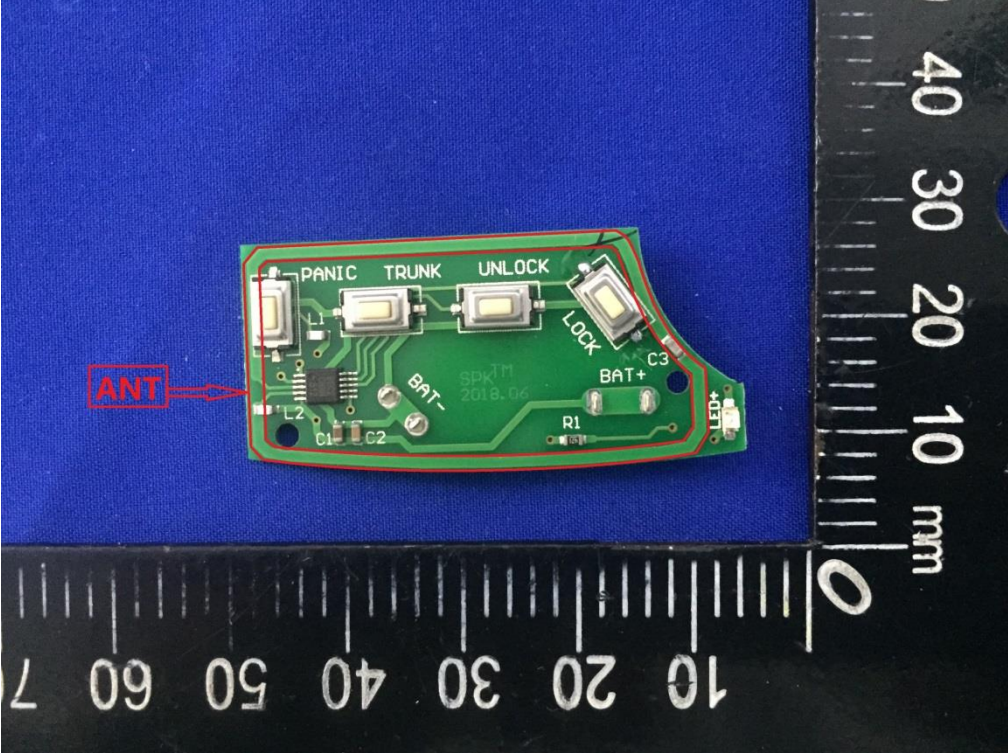
| | |
|--|-----------------------------|
| Standard requirement: | FCC Part15 C Section 15.203 |
| <p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> | |
| E.U.T Antenna: | |
| <p>The EUT make use of an PCB antenna, The typical gain of the antenna is 0 dBi.</p> | |
|  | |


6.2 Radiated Emission

| | | | | | |
|--|--|------------|--------------------|--------|------------------|
| Test Requirement: | FCC Part15 C Section 15.231 (b)/15.209 RSS-210 Annex A Section A.1.2 (a)(b) | | | | |
| Test Method: | ANSI C63.10:2013 | | | | |
| Test Frequency Range: | 30MHz to 3500MHz | | | | |
| Test site: | Measurement Distance: 3m (Semi-Anechoic Chamber) | | | | |
| Receiver setup: | Frequency | Detector | RBW | VBW | Remark |
| | 30MHz-1GHz | Quasi-peak | 120kHz | 300kHz | Quasi-peak Value |
| | Above 1GHz | Peak | 1MHz | 3MHz | Peak Value |
| Limit: (Field strength of the fundamental signal) | Frequency | | Limit (dBuV/m @3m) | | Remark |
| | 315MHz | | 75.62 | | Average Value |
| | | | 95.62 | | Peak Value |
| Limit: (Spurious Emissions) | Frequency | | Limit (dBuV/m @3m) | | Remark |
| | 30MHz-88MHz | | 40.0 | | Quasi-peak Value |
| | 88MHz-216MHz | | 43.5 | | Quasi-peak Value |
| | 216MHz-960MHz | | 46.0 | | Quasi-peak Value |
| | 960MHz-1GHz | | 54.0 | | Quasi-peak Value |
| | Above 1GHz | | 54.0 | | Average Value |
| | | | 74.0 | | Peak Value |
| Or The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level whichever limit permits higher field strength. | | | | | |
| Test Procedure: | <p>a. The EUT was placed on the top of a rotating table 0.8m(below 1GHz) /1.5m(above 1GHz) above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> | | | | |
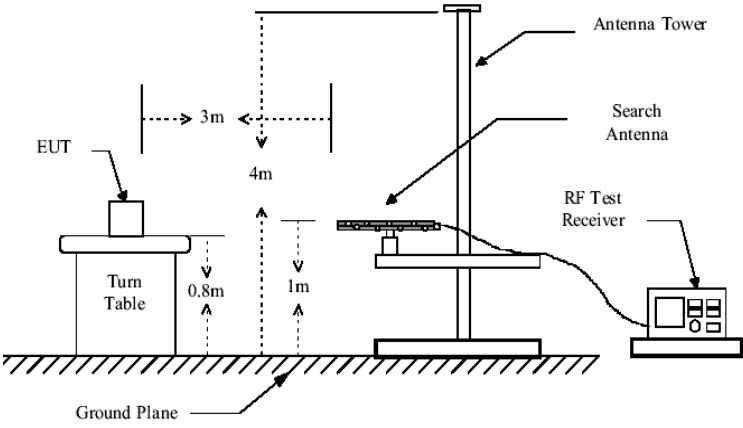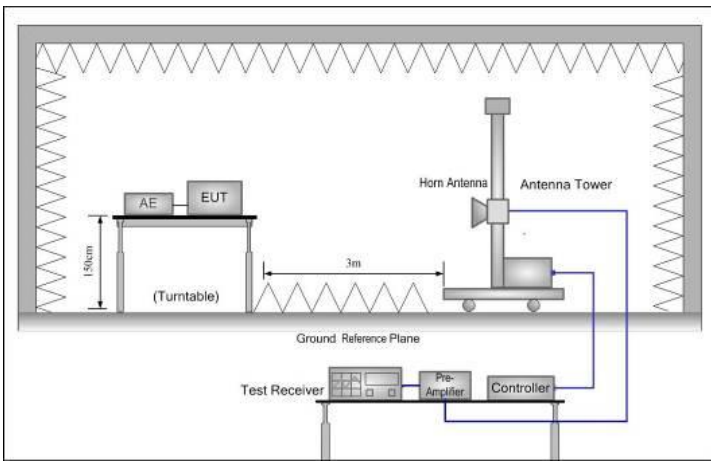
| | |
|--------------------------|--|
| <p>Test setup:</p> | <p>Below 1GHz</p>  <p>Above 1GHz</p>  |
| <p>Test Instruments:</p> | <p>Refer to section 5.7 for details</p> |
| <p>Test mode:</p> | <p>Refer to section 5.3 for details</p> |
| <p>Test results:</p> | <p>Pass</p> |


6.2.1 Field Strength Of The Fundamental Signal

| Peak value | | | | | | | | |
|-----------------|-------------------|-----------------------|-----------------|-------------------|-------------------|-------------------|-----------------|--------------|
| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor(dB) | PK Level (dBuV/m) | AV Limit (dBuV/m) | Over Limit (dB) | Polarization |
| 315 | 44.83 | 13.92 | 2.99 | 0.00 | 61.74 | 75.62 | -13.88 | Vertical |
| 315 | 52.57 | 13.92 | 2.99 | 0.00 | 69.48 | 75.62 | -6.14 | Horizontal |

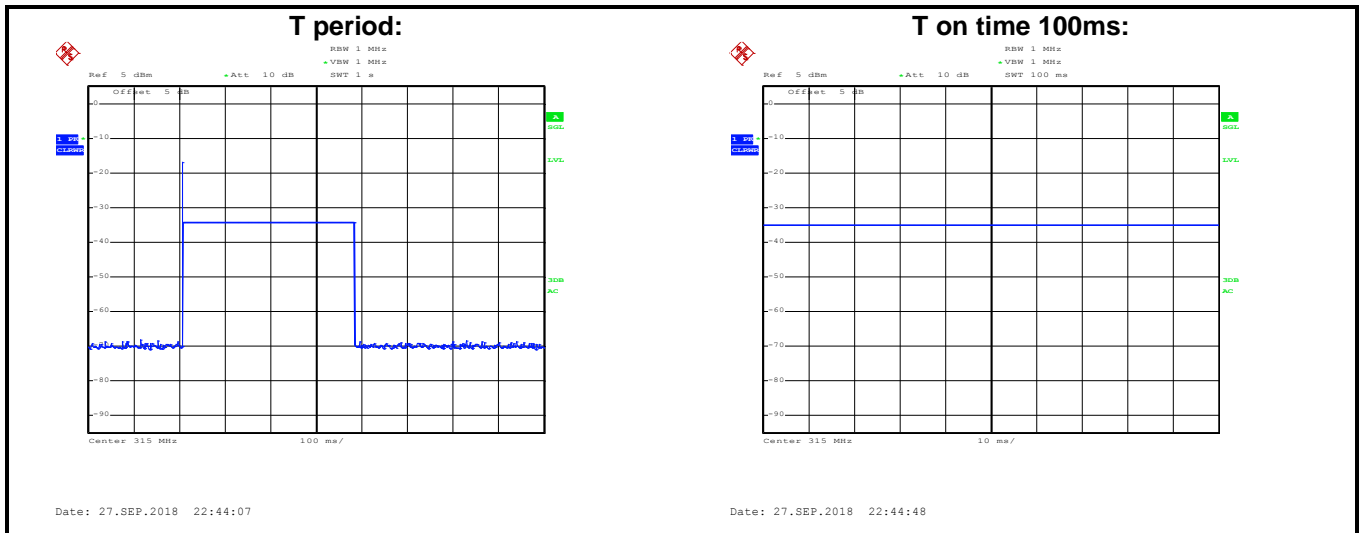

Test Plots:

| | | | |
|------------------------|---------------------|-----------------------|----------------------|
| Product Name: | keyless transmitter | Product Model: | RT-HK14B |
| Test By: | Carey | Test mode: | Tx mode |
| Test Frequency: | 315 MHz | Polarization: | Vertical |
| Test Voltage: | DC 3V | Environment: | Temp: 24°C Humi: 57% |

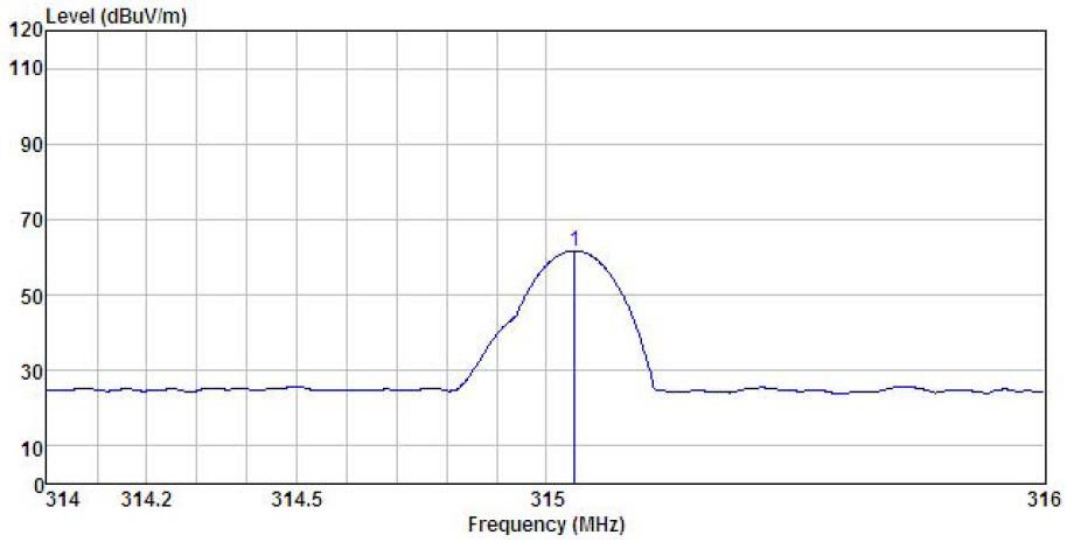


Remark : X

| | Read | Antenna | Cable | Preamp | Limit | Over | |
|------|---------|---------|-------|--------|--------|--------|--------------|
| Freq | Level | Factor | Loss | Factor | Level | Line | Limit Remark |
| MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB |
| 1 | 315.056 | 44.83 | 13.92 | 2.99 | 0.00 | 61.74 | ----- |

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.*

| | | | |
|------------------------|---------------------|-----------------------|----------------------|
| Product Name: | keyless transmitter | Product Model: | RT-HK14B |
| Test By: | Carey | Test mode: | Tx mode |
| Test Frequency: | 315 MHz | Polarization: | Horizontal |
| Test Voltage: | DC 3V | Environment: | Temp: 24°C Huni: 57% |

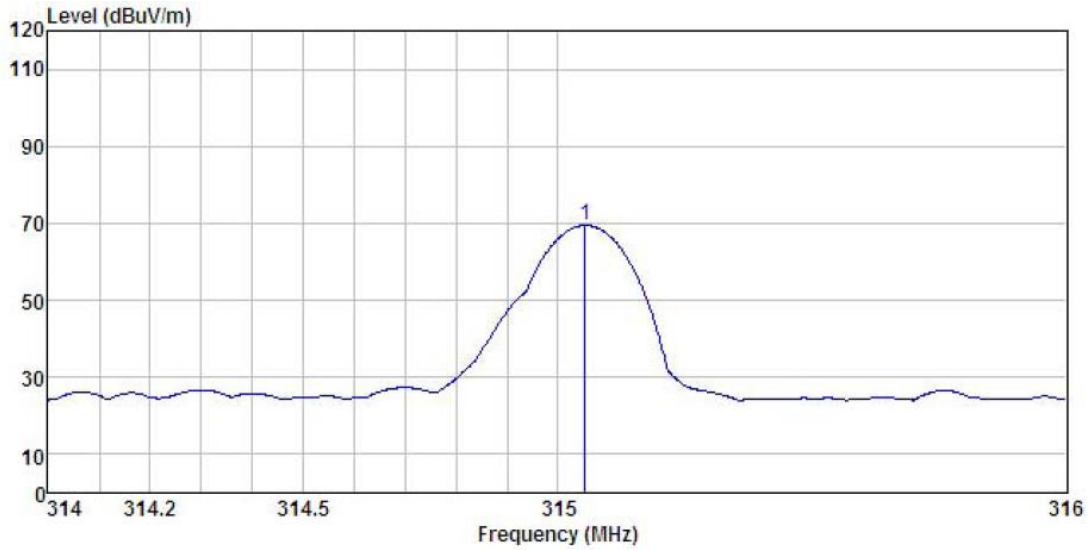

Remark : X

| | Read Freq | Antenna Level | Cable Factor | Preamp Loss | Level | Limit | Over | Remark |
|---|-----------|---------------|--------------|-------------|-------|--------|-------|--------|
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dB | |
| 1 | 315.052 | 52.57 | 13.92 | 2.99 | 0.00 | 69.48 | ----- | |

Remark:


1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.

6.2.2 Spurious Emissions

| Below 1GHz (30MHz-1000MHz) | | | | | | | | |
|----------------------------|---------------------|-----------------------|-----------------|--------------------|-------------------|-------------------|-----------------|--------------|
| Peak value | | | | | | | | |
| Frequency (MHz) | Read Level (dBuV/m) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | PK Level (dBuV/m) | AV Limit (dBuV/m) | Over Limit (dB) | polarization |
| 631.688 | 16.31 | 19.59 | 3.89 | 0.00 | 39.79 | 55.62 | -15.83 | Vertical |
| 945.440 | 17.09 | 22.39 | 4.16 | 0.00 | 43.64 | 55.62 | -11.98 | Vertical |
| 631.688 | 16.42 | 19.59 | 3.89 | 0.00 | 39.90 | 55.62 | -15.72 | Horizontal |
| 945.440 | 16.83 | 22.39 | 4.16 | 0.00 | 43.38 | 55.62 | -12.24 | Horizontal |

Test Plots:

| | | | |
|------------------------|---------------------|-----------------------|----------------------|
| Product Name: | keyless transmitter | Product Model: | RT-HK14B |
| Test By: | Carey | Test mode: | Tx mode |
| Test Frequency: | 30 MHz ~ 1 GHz | Polarization: | Vertical |
| Test Voltage: | DC 3V | Environment: | Temp: 24°C Humi: 57% |

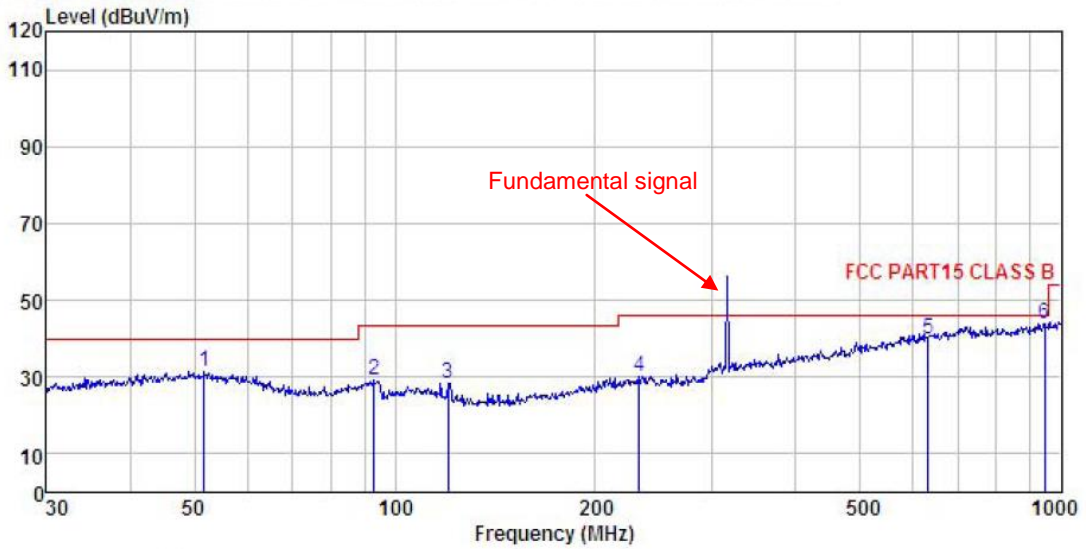


Remark :

| | Freq | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Level | Limit | Over | Remark |
|---|---------|------------|----------------|------------|---------------|--------|--------|--------|--------|
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 51.662 | 16.34 | 13.80 | 1.27 | 0.00 | 31.41 | 40.00 | -8.59 | QP |
| 2 | 93.113 | 16.86 | 10.55 | 2.02 | 0.00 | 29.43 | 43.50 | -14.07 | QP |
| 3 | 120.277 | 15.97 | 10.16 | 2.17 | 0.00 | 28.30 | 43.50 | -15.20 | QP |
| 4 | 232.532 | 14.77 | 12.72 | 2.83 | 0.00 | 30.32 | 46.00 | -15.68 | QP |
| 5 | 631.688 | 16.31 | 19.59 | 3.89 | 0.00 | 39.79 | | | Peak |
| 6 | 945.440 | 17.09 | 22.39 | 4.16 | 0.00 | 43.64 | | | Peak |

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|------------------------|---------------------|-----------------------|----------------------|
| Product Name: | keyless transmitter | Product Model: | RT-HK14B |
| Test By: | Carey | Test mode: | Tx mode |
| Test Frequency: | 30 MHz ~ 1 GHz | Polarization: | Horizontal |
| Test Voltage: | DC 3V | Environment: | Temp: 24°C Humi: 57% |

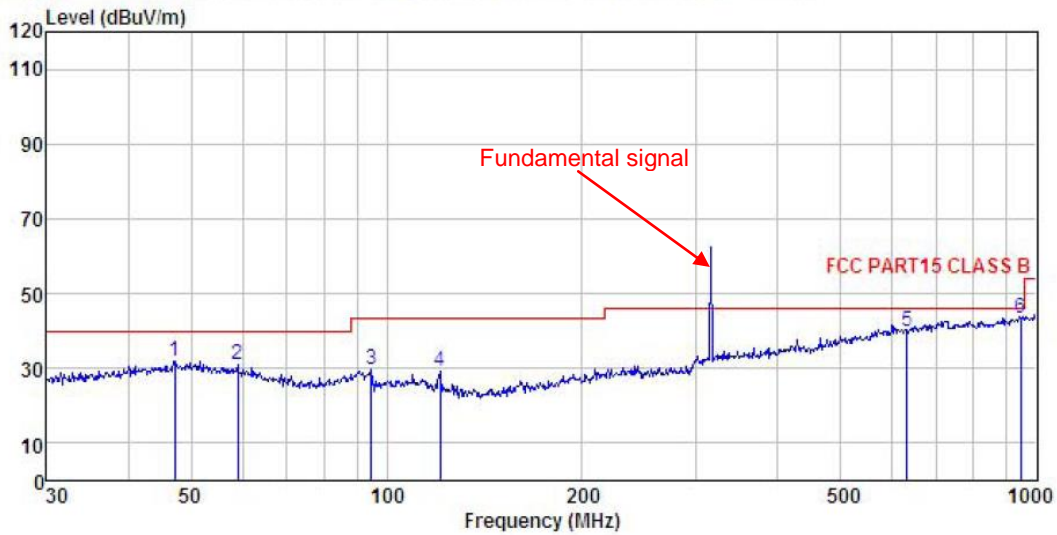


Remark :

| | Freq | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Level | Limit Line | Over Limit | Remark |
|---|---------|------------|----------------|------------|---------------|--------|------------|------------|--------|
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 47.160 | 16.82 | 13.88 | 1.27 | 0.00 | 31.97 | 40.00 | -8.03 | QP |
| 2 | 59.025 | 17.04 | 12.55 | 1.38 | 0.00 | 30.97 | 40.00 | -9.03 | QP |
| 3 | 94.760 | 17.03 | 10.83 | 2.01 | 0.00 | 29.87 | 43.50 | -13.63 | QP |
| 4 | 120.699 | 17.08 | 10.09 | 2.18 | 0.00 | 29.35 | 43.50 | -14.15 | QP |
| 5 | 631.688 | 16.42 | 19.59 | 3.89 | 0.00 | 39.90 | | | Peak |
| 6 | 945.440 | 16.83 | 22.39 | 4.16 | 0.00 | 43.38 | | | Peak |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|------------------------|---------------------|-----------------------|----------------------|
| Product Name: | keyless transmitter | Product Model: | RT-HK14B |
| Test By: | Carey | Test mode: | Tx mode |
| Test Frequency: | 1 GHz ~ 5.0 GHz | Polarization: | Vertical |
| Test Voltage: | DC 3V | Environment: | Temp: 24°C Humi: 57% |

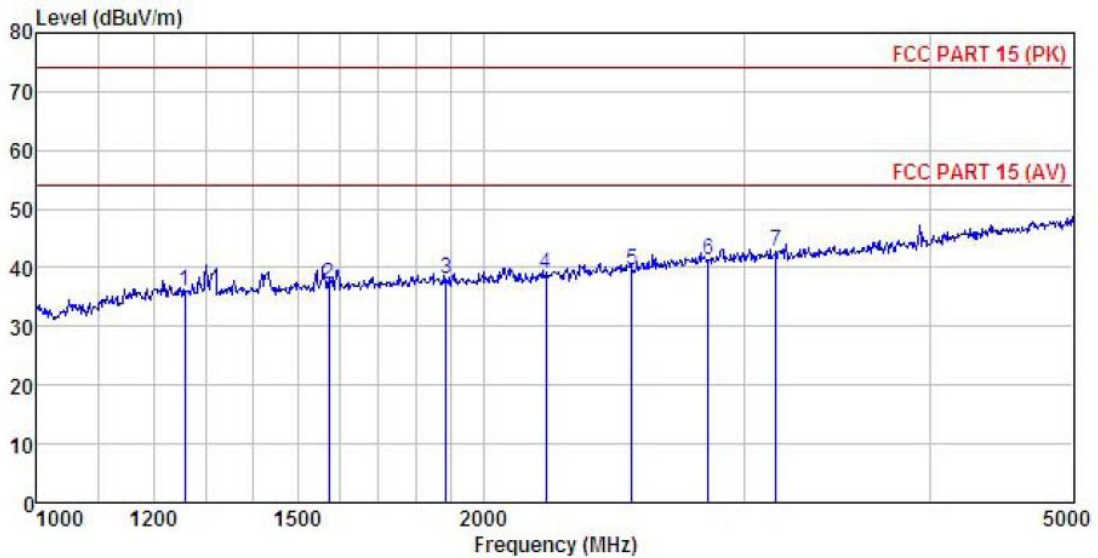


Remark :

| | Freq | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Level | Limit | Over | Remark |
|---|----------|------------|----------------|------------|---------------|--------|--------|--------|--------|
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 1258.788 | 46.61 | 24.51 | 3.41 | 41.05 | 35.93 | 74.00 | -38.07 | Peak |
| 2 | 1574.380 | 46.78 | 25.40 | 3.82 | 41.03 | 37.19 | 74.00 | -36.81 | Peak |
| 3 | 1888.396 | 46.73 | 26.16 | 4.22 | 41.41 | 38.16 | 74.00 | -35.84 | Peak |
| 4 | 2203.912 | 46.40 | 26.93 | 4.50 | 41.68 | 38.85 | 74.00 | -35.15 | Peak |
| 5 | 2518.887 | 46.06 | 27.65 | 4.85 | 41.90 | 39.51 | 74.00 | -34.49 | Peak |
| 6 | 2837.478 | 46.60 | 28.30 | 5.18 | 41.63 | 41.34 | 74.00 | -32.66 | Peak |
| 7 | 3150.399 | 47.33 | 28.70 | 5.40 | 41.43 | 42.92 | 74.00 | -31.08 | Peak |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|------------------------|---------------------|-----------------------|----------------------|
| Product Name: | keyless transmitter | Product Model: | RT-HK14B |
| Test By: | Carey | Test mode: | Tx mode |
| Test Frequency: | 1 GHz ~5.0 GHz | Polarization: | Horizontal |
| Test Voltage: | DC 3V | Environment: | Temp: 24°C Huni: 57% |

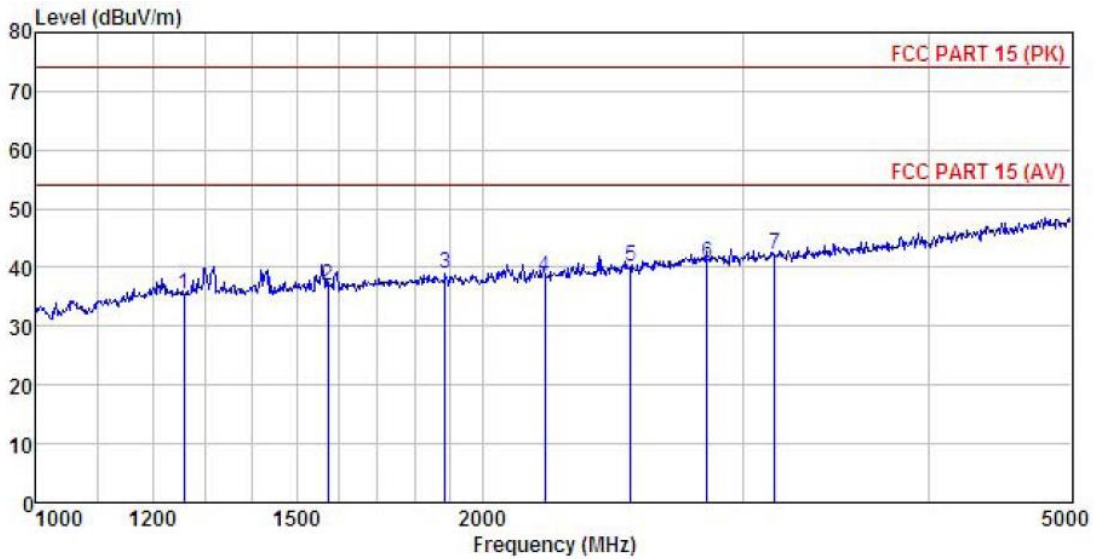


Remark :

| | Freq | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Level | Limit Line | Over Limit | Remark |
|---|----------|------------|----------------|------------|---------------|--------|------------|------------|--------|
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 1258.788 | 46.07 | 24.51 | 3.41 | 41.05 | 35.39 | 74.00 | -38.61 | Peak |
| 2 | 1574.380 | 46.50 | 25.40 | 3.82 | 41.03 | 36.91 | 74.00 | -37.09 | Peak |
| 3 | 1888.396 | 47.40 | 26.16 | 4.22 | 41.41 | 38.83 | 74.00 | -35.17 | Peak |
| 4 | 2203.912 | 45.93 | 26.93 | 4.50 | 41.68 | 38.38 | 74.00 | -35.62 | Peak |
| 5 | 2518.887 | 46.69 | 27.65 | 4.85 | 41.90 | 40.14 | 74.00 | -33.86 | Peak |
| 6 | 2837.478 | 46.11 | 28.30 | 5.18 | 41.63 | 40.85 | 74.00 | -33.15 | Peak |
| 7 | 3150.399 | 46.65 | 28.70 | 5.40 | 41.43 | 42.24 | 74.00 | -31.76 | Peak |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

6.3 20dB Bandwidth

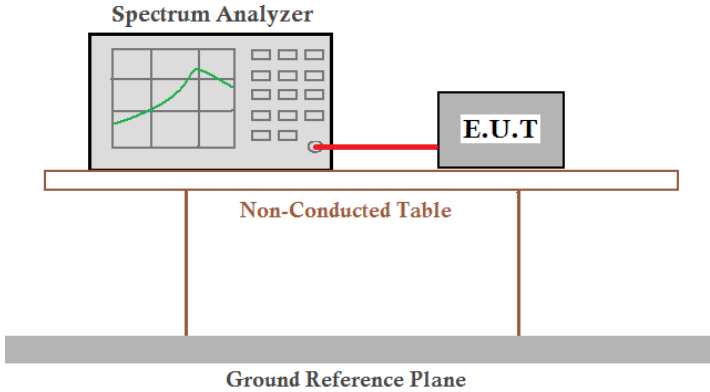
| | |
|-------------------|--|
| Test Requirement: | FCC Part15 C Section 15.231 (c) RSS-210 Annex A Section A.1.3 |
| Test Method: | ANSI C63.10:2013 |
| Receiver setup: | RBW=1kHz, VBW=3kHz, detector: Peak |
| Limit: | The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier. |
| Test Procedure: | <ol style="list-style-type: none"> 1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT. 2. Set the EUT to proper test channel. 3. Max hold the radiated emissions, mark the peak power frequency point and the -20dB upper and lower frequency points. 4. Read 20dB bandwidth. |
| Test setup: |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. The table is supported by two vertical legs and sits on a Ground Reference Plane, which is represented by a thick grey bar at the bottom.</p> |
| Test Instruments: | Refer to section 5.7 for details |
| Test mode: | Refer to section 5.3 for details |
| Test results: | Passed |

Measurement Data:


| 20dB bandwidth (MHz) | Limit (MHz) | 99% Occupy Bandwidth (MHz) | Results |
|----------------------|-------------|----------------------------|---------|
| 0.089 | 0.7875 | 0.085 | Passed |

Note: 20dB bandwidth Limit= Fundamental frequency×0.25%=315×0.25%=0.7875MHz

Test plot as follows:

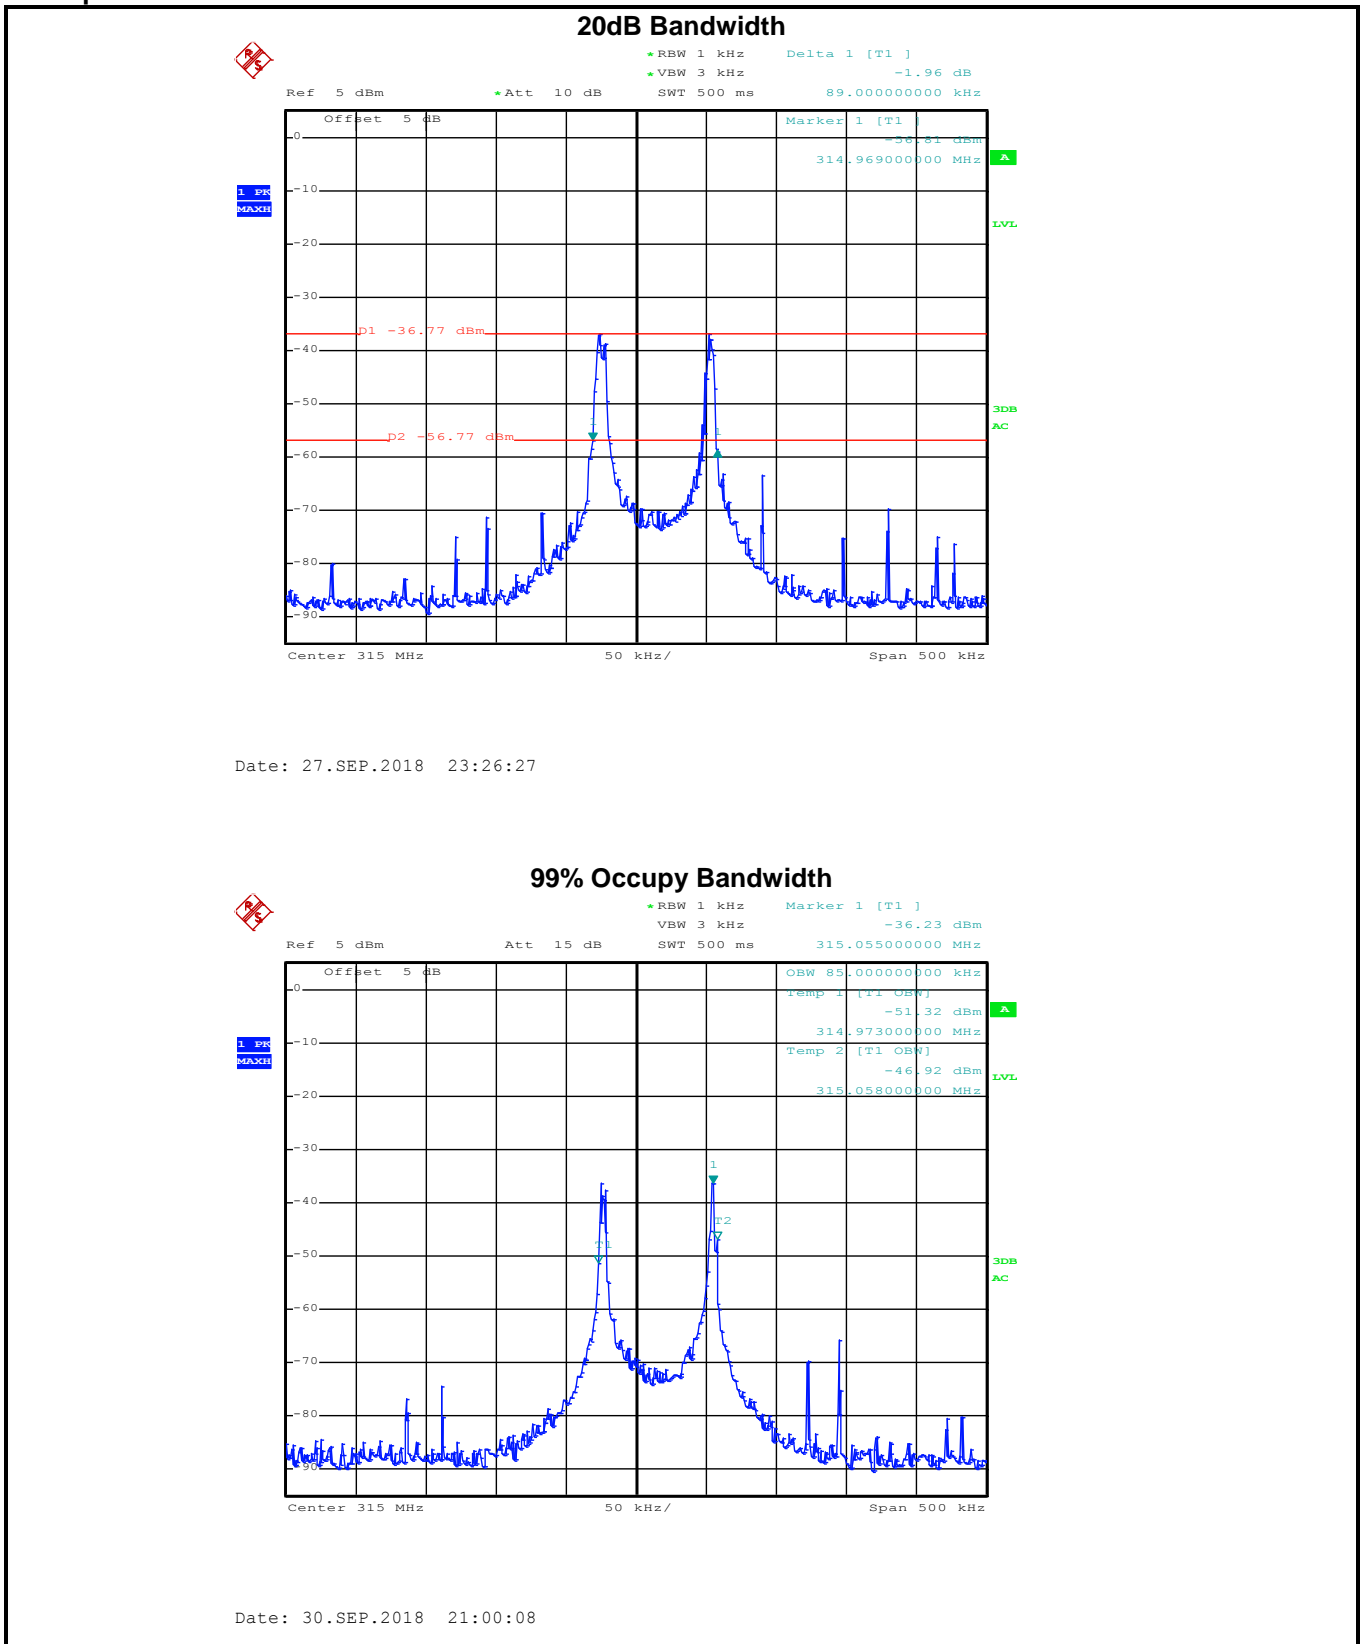


6.4 Duration Time
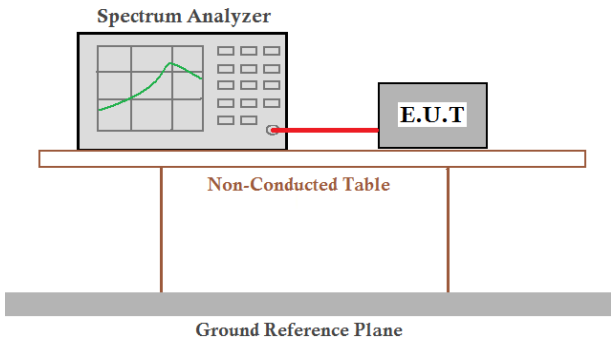
| | |
|-------------------|---|
| Test Requirement: | FCC Part15 C Section 15.231 (a) RSS-210 Annex A Section A.1.1 (a) |
| Test Method: | ANSI C63.10: 2013 |
| Receiver setup: | RBW=1MHz, VBW=1MHz, span=0Hz, detector: Peak |
| Limit: | Not more than 5 seconds |
| Test mode: | Transmitting mode |
| Test Procedure: | <ol style="list-style-type: none"> 1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT. 2. Set the EUT to proper test channel. 3. Single scan the transmission, and read the transmission time. |
| Test setup: |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 5.8 for details |
| Test mode: | Refer to section 5.3 for details |
| Test results: | Passed |

Measurement Data

| Duration time (second) | Limit (second) | Result |
|------------------------|----------------|--------|
| 0.416 | <5.0 | Pass |

Test plot as follows:

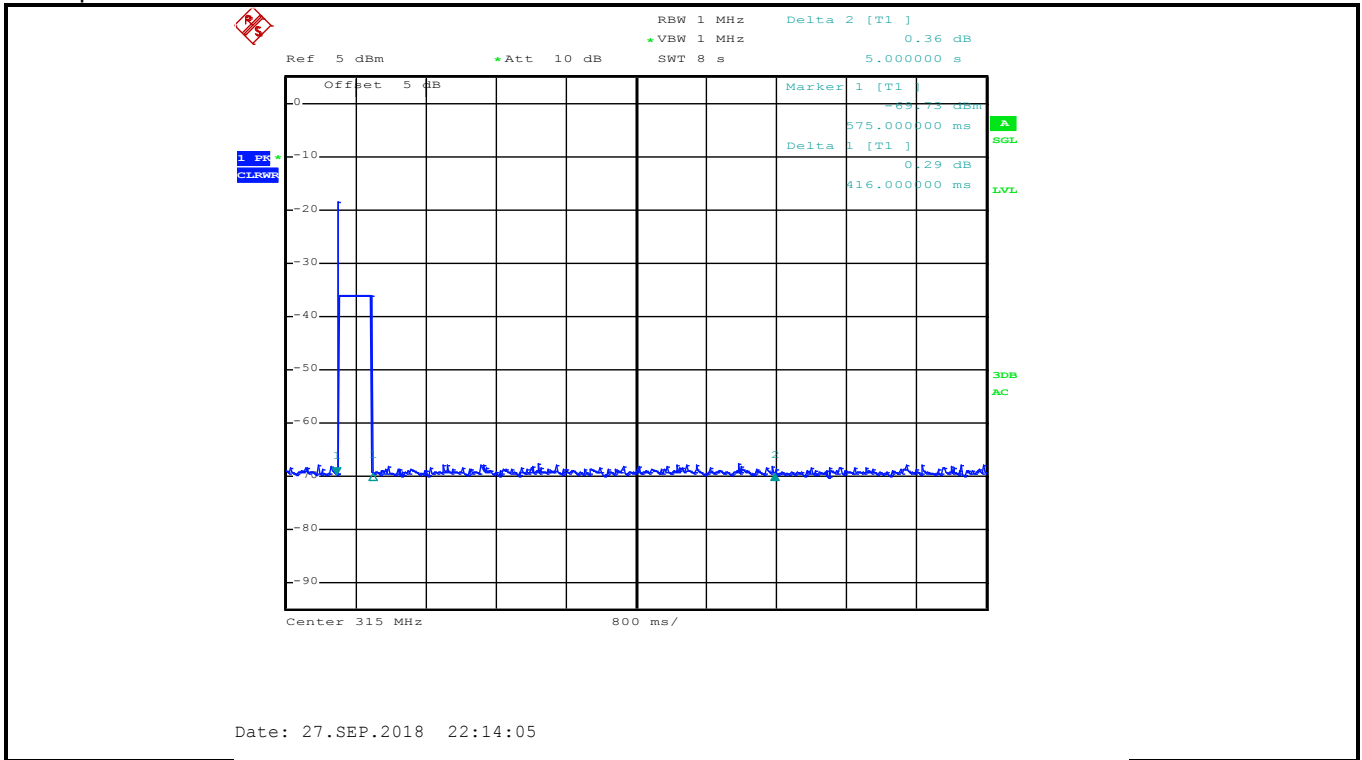

6.5 Frequency Stability

| | |
|-------------------|---|
| Test Requirement: | RSS-GEN Section 8.11 |
| Test Method: | RSS-GEN Section 6.11 |
| Limit: | kept within at least the central 80% of its permitted operating frequency band. |
| Test setup: | <div style="text-align: center;"> <p>The diagram shows a 'Spectrum analyzer' box on the left with a small graph icon. A line connects it to a box labeled 'Att.'. Another line connects 'Att.' to a larger box labeled 'Temperature Chamber'. Inside the chamber is a box labeled 'EUT'. Below the chamber is a box labeled 'Variable Power Supply', with a line connecting it to the 'EUT' box.</p> </div> <p>Note : Measurement setup for testing on Antenna connector</p> |
| Test procedure: | <ol style="list-style-type: none"> 1. The EUT is installed in an environment test chamber with external power source. 2. Set the chamber to operate at 50 centigrade and external power source to output at nominal voltage of EUT. 3. A sufficient stabilization period at each temperature is used prior to each frequency measurement. 4. When temperature is stabled, measure the frequency stability. 5. The test shall be performed under -20 to 50 centigrade and 85 to 115 percent of the nominal voltage. Change setting of chamber and external power source to complete all conditions. |
| Test Instruments: | Refer to section 5.7 for details |
| Test mode: | Refer to section 5.3 for details |
| Test results: | Passed |

Measurement Data:

Voltage vs. Frequency Stability

| Test conditions | | Measurement Frequency (MHz) | Limit (MHz) |
|-----------------|-------------|-----------------------------|-------------|
| Temp(°C) | Voltage(ac) | | |
| 20 | 3.2V | 314.976 | 281 ~ 449 |
| | 3.0V | 314.971 | |
| | 2.5V | 314.969 | |

Note: EUT stops working when the supply voltage is lower than DC 2.5V.

Temperature vs. Frequency Stability

| Test conditions | | Frequency(MHz) | Limit (MHz) |
|-----------------|----------|----------------|-------------|
| Voltage(dc) | Temp(°C) | | |
| 3.0 V | -20 | 314.976 | 281 ~ 449 |
| | -10 | 314.974 | |
| | 0 | 314.973 | |
| | 10 | 314.972 | |
| | 20 | 314.971 | |
| | 30 | 314.968 | |
| | 40 | 314.967 | |
| | 50 | 314.963 | |

Test plot as follows (worst case):

