

FCC/IC REPORT

Applicant: Remote Tech LLC

Address of Applicant: 310 ALDER RD, DOVER DE 19904 USA

Equipment Under Test (EUT)

Product Name: smart key

Model No.: RT-TYAB3, RT-TYAB4T, RT-TYAB4H, RT-TY4AC

FCC ID: 2AOKM-TY8

Canada IC: 24223-TY8

FCC CFR Title 47 Part 15 Subpart C Section 15.231

Applicable standards: RSS-Gen Issue 5 5 March 2019

RSS-210 Issue 10 December 2019 Annex A Section A.1.1

Date of sample receipt: 19 Jun., 2020

Date of Test: 19 Jun., to 28 Jul., 2020

Date of report issue: 10 Sep., 2020

Test Result: PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.


This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	30 Jul., 2020	Original
01	10 Sep., 2020	Update Page 1, 6, 10, 12, 13, 21

Prepared By:

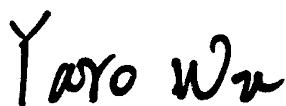

Date:

10 Sep., 2020

Test Engineer

Check By:



Date:

10 Sep., 2020

Project Engineer

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS.....	3
4 TEST SUMMARY.....	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST MODE	5
5.4 DESCRIPTION OF SUPPORT UNITS.....	5
5.5 MEASUREMENT UNCERTAINTY.....	5
5.6 ADDITIONS TO, DEVIATIONS, OR EXCLUSIONS FROM THE METHOD.....	5
5.7 LABORATORY FACILITY.....	6
5.8 LABORATORY LOCATION	6
5.9 TEST INSTRUMENTS LIST.....	6
6 TEST RESULTS AND MEASUREMENT DATA.....	7
6.1 ANTENNA REQUIREMENT.....	7
6.2 RADIATED EMISSION	8
6.2.1 Field Strength Of The Fundamental Signal.....	10
6.2.2 Spurious Emissions	14
6.3 BANDWIDTH	19
6.4 DURATION TIME	21
6.5 FREQUENCY STABILITY	23
7 TEST SETUP PHOTOS.....	26
8 EUT CONSTRUCTIONAL PHOTOS.....	27

4 Test Summary

Test Item	Test Standard Section		Result
	FCC	IC	
Antenna requirement	15.203	RSS-GEN 6.8	Pass
Field strength of the fundamental signal	15.231 (b)	RSS-210 Annex A Section A.1.2 (a)	Pass
Spurious emissions	15.231 (b)/15.209	RSS-210 Annex A Section A.1.2 (b)	Pass
20dB Bandwidth	15.231 (c)	RSS-210 Annex A Section A.1.3	Pass
Duration time	15.231 (a)(1)	RSS-210 Annex A Section A.1.1 (a)	Pass
Frequency stability	/	RSS-GEN Section 8.11	Pass
Conducted Emission	15.207	RSS-GEN Section 8.8	N/A

Remarks:

1. Pass: The EUT complies with the essential requirements in the standard.
2. N/A: The EUT not applicable of the test item.
3. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB (provided by the customer).

Test Method:	ANSI C63.4-2014 ANSI C63.10-2013
---------------------	-------------------------------------

5 General Information

5.1 Client Information

Applicant:	Remote Tech LLC
Address:	310 ALDER RD, DOVER DE 19904 USA
Manufacturer:	Remote Tech LLC
Address:	310 ALDER RD, DOVER DE 19904 USA

5.2 General Description of E.U.T.

Product Name:	smart key
Model No.:	RT-TYAB3, RT-TYAB4T, RT-TYAB4H, RT-TY4AC
Operation Frequency:	314.3MHz
Channel numbers:	1
Modulation type:	FSK
Antenna Type:	PCB antenna
Antenna gain:	0 dBi
Power supply:	DC 3V (CR2032 battery)
Remark:	Model No.: RT-TYAB3, RT-TYAB4T, RT-TYAB4H, RT-TY4AC, were identical inside, the electrical circuit design, layout, components used and internal wiring, only the shell and model is different, the PCB funtion is the same.
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

5.3 Test mode

Transmitting mode:	Keep the EUT in transmitting mode with modulation (new battery used)							
Pre-Test Mode:								
CCIS has verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:								
Axis	Frequency	X	Y	Z				
Field Strength(dBuV/m)	314.3MHz	76.77	75.16	74.94				
Final Test Mode:								
According to ANSI C63.4 standards, the test results are both the "worst case" and "worst setup": X axis (see the test setup photo)								

5.4 Description of Support Units

N/A

5.5 Measurement Uncertainty

Parameters	Expanded Uncertainty
Radiated Emission (9kHz ~ 30MHz)	±3.12 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.32 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.16 dB (k=2)
Radiated Emission (18GHz ~ 40GHz)	±3.20 dB (k=2)

5.6 Additions to, deviations, or exclusions from the method

No

5.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1211**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

- **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.8 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.

Address: No.110~116, Building B, Jinyuan Business Building, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755-23118282, Fax: +86-755-23116366


Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>

5.9 Test Instruments list

Radiated Emission:						
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)	
3m SAC	SAEMC	9m*6m*6m	966	07-22-2017	07-21-2020	
				07-22-2020	07-21-2023	
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-18-2020	03-17-2021	
Broadband Antenna	SCHWARZBECK	VUBA9117	359	06-22-2017	06-21-2020	
				06-22-2020	06-21-2023	
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-18-2020	03-17-2021	
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-22-2017	06-21-2020	
				06-22-2020	06-21-2023	
Horn Antenna	SCHWARZBECK	BBHA9170	582	11-18-2019	11-17-2020	
Loop Antenna	SCHWARZBECK	FMZB1519 B	00044	03-18-2020	03-17-2021	
EMI Test Software	AUDIX	E3	Version: 6.110919b			
Pre-amplifier	HP	8447D	2944A09358	03-18-2020	03-17-2021	
Pre-amplifier	CD	PAP-1G18	11804	03-18-2020	03-17-2021	
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-18-2020	03-17-2021	
Spectrum analyzer	Rohde & Schwarz	FSP40	100363	11-18-2019	11-17-2021	
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-18-2020	03-17-2021	
Simulated Station	Anritsu	MT8820C	6201026545	03-18-2020	03-17-2021	
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-18-2020	03-17-2021	
Cable	MICRO-COAX	MFR64639	K10742-5	03-18-2020	03-17-2021	
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-18-2020	03-17-2021	
DC Power Supply	XinNuoEr	WYK-10020K	1409050110020	09-25-2020	09-24-2021	
Temperature Humidity Chamber	HengPu	HPGDS-500	20140828008	11-01-2019	10-31-2020	

6 Test results and Measurement Data

6.1 Antenna requirement

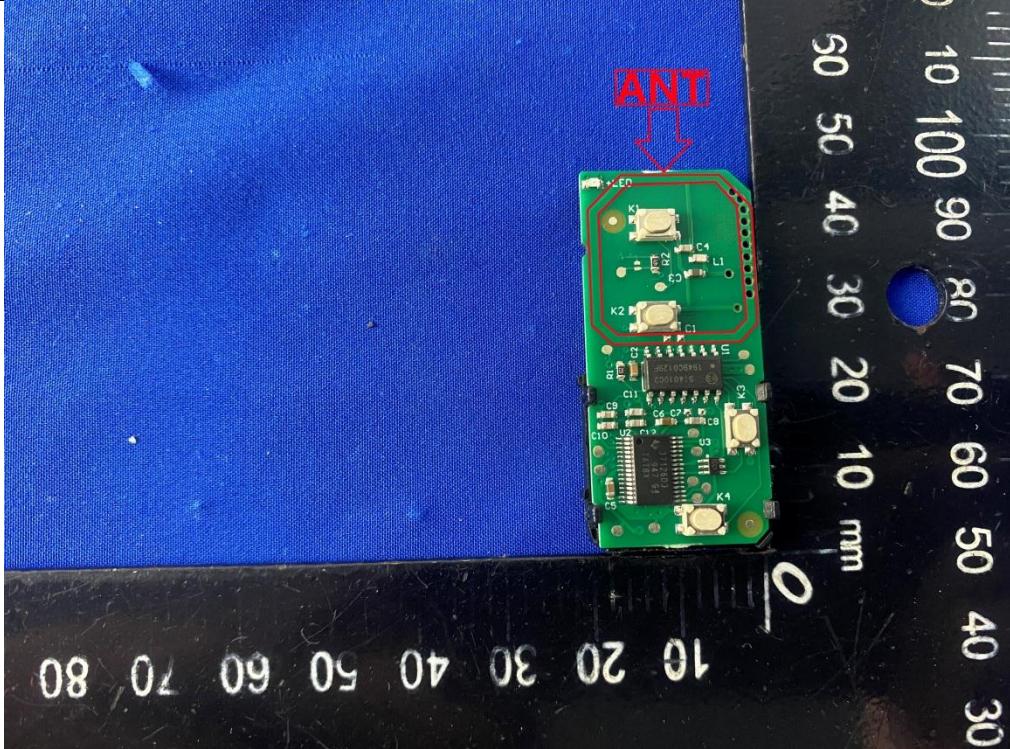
Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	The EUT make use of a PCB antenna, The typical gain of the antenna is 0 dBi. 

6.2 Radiated Emission


Test Requirement:	FCC Part15 C Section 15.231(a) and 15.209 RSS-210 Annex A Section A.1.2								
Test Frequency Range:	30MHz to 3500MHz								
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)								
Receiver setup:	Frequency	Detector	RBW	VBW	Remark				
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value				
Limit: (Field strength of the fundamental signal)	Above 1GHz	Peak	1MHz	3MHz	Peak Value				
	Frequency	Limit (dBuV/m @3m)		Remark					
Limit: (Spurious Emissions)	312.1MHz	75.45		Average Value					
		95.45		Peak Value					
Limit: (Spurious Emissions)	314.3 MHz	75.58		Average Value					
		95.58		Peak Value					
Or The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level whichever limit permits higher field strength.									
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8m(below 1GHz) /1.5m(above 1GHz) above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 								

Test setup:

Below 1GHz

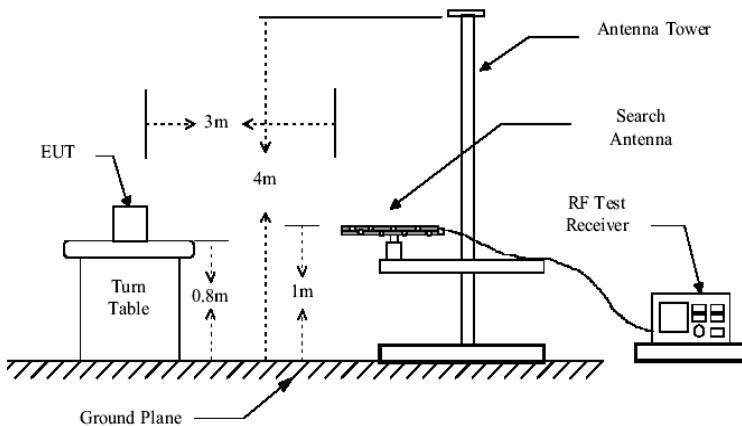

Above 1GHz

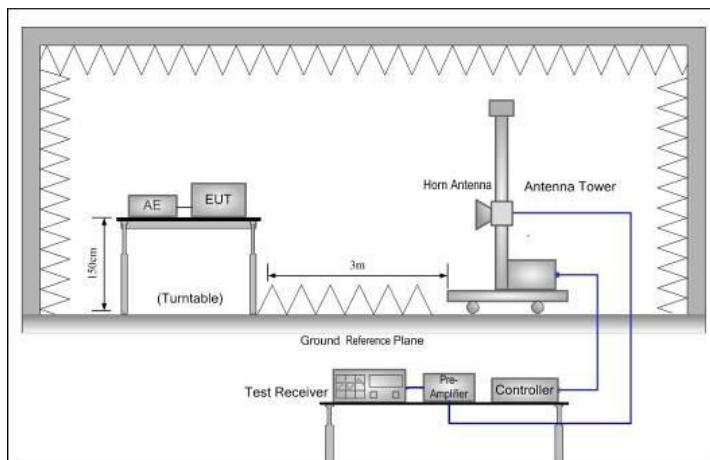

Test Instruments:

Refer to section 5.9 for details

Test mode:

Refer to section 5.3 for details


Test results:

Pass

6.2.1 Field Strength Of The Fundamental Signal


314.3MHz:

Peak value										
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization		
314.3	48.06	18.73	2.98	0.00	69.77	95.58	-25.81	Vertical		
314.3	55.06	18.73	2.98	0.00	76.77	95.58	-18.81	Horizontal		
Average value										
Frequency (MHz)	Level (dBuV/m)		Duty Cycle factor	Average value (dBuV/m)		Limit Line (dBuV/m)	Over Limit (dB)	Polarization		
314.3	69.77		-5.57	64.20		75.58	-11.38	Vertical		
314.3	76.77		-5.57	71.20		75.58	-4.68	Horizontal		
Calculate Formula:	Duty cycle factor = $20\log(\text{Duty cycle})$									
	Duty cycle = $T \text{ on time}/100 \text{ milliseconds or period, whichever is less}$									
Test data:	$T \text{ on time} = (27*0.76)(\text{ms}) + (22*1.46)(\text{ms}) = 52.64 \text{ (ms)}$									
	$T \text{ period} = 600(\text{ms}) > 100(\text{ms})$									
	Duty cycle = 52.64%									
	Duty cycle factor = $20\log(\text{Duty cycle}) = -5.57$									

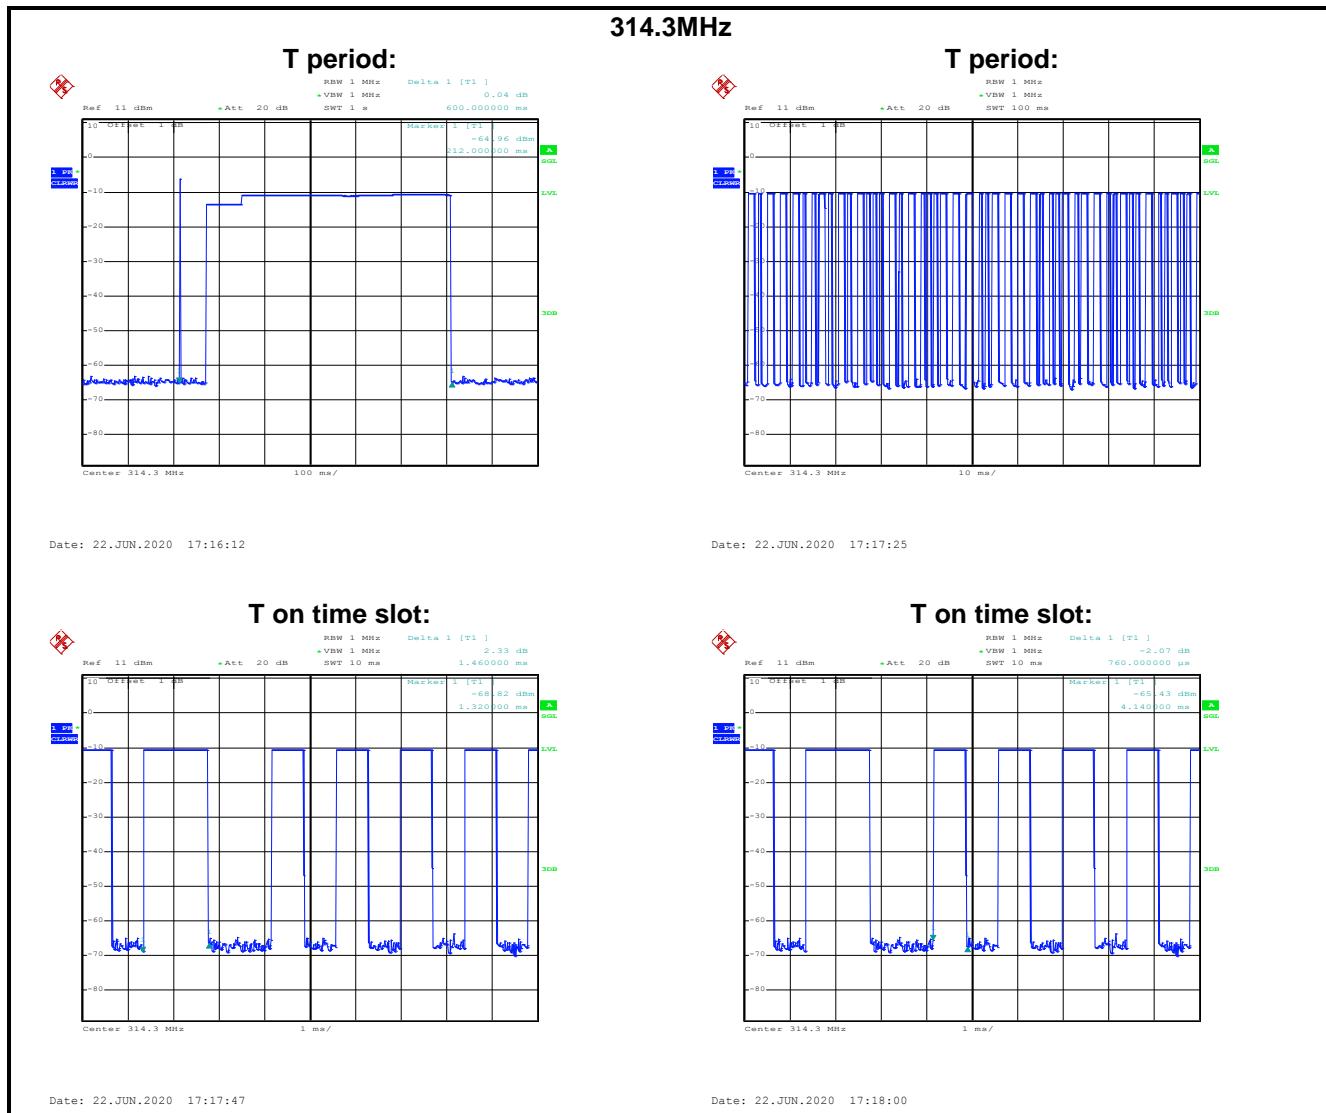

Test Plots:

Product Name:	smart key	Product Model:	RT-TYAB3
Test By:	Yaro	Test mode:	Tx mode
Test Frequency:	314.3 MHz	Polarization:	Vertical
Test Voltage:	DC 3V	Environment:	Temp: 24°C Huni: 57%

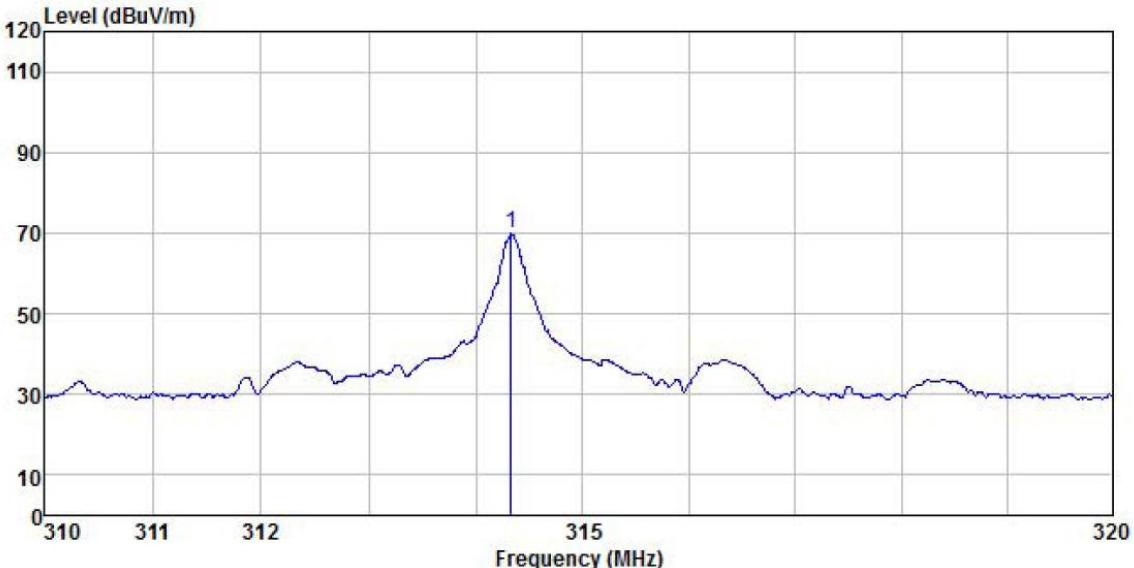


The graph displays the measured signal level over a frequency range from 310 MHz to 320 MHz. A prominent peak is observed at 314.331 MHz, reaching a level of about 48.06 dBuV/m. The baseline level is relatively stable around 30 dBuV/m.

	Read	Antenna	Cable	Aux	Preampl	Limit	Over	Over
Freq	Level	Factor	Loss	Preampl Factor	Level	Line	Line	Remark
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	314.331	48.06	18.73	2.98	0.00	0.00	69.77	-----

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.

Product Name:	smart key	Product Model:	RT-TYAB3
Test By:	Yaro	Test mode:	Tx mode
Test Frequency:	314.3 MHz	Polarization:	Horizontal
Test Voltage:	DC 3V	Environment:	Temp: 24°C Huni: 57%

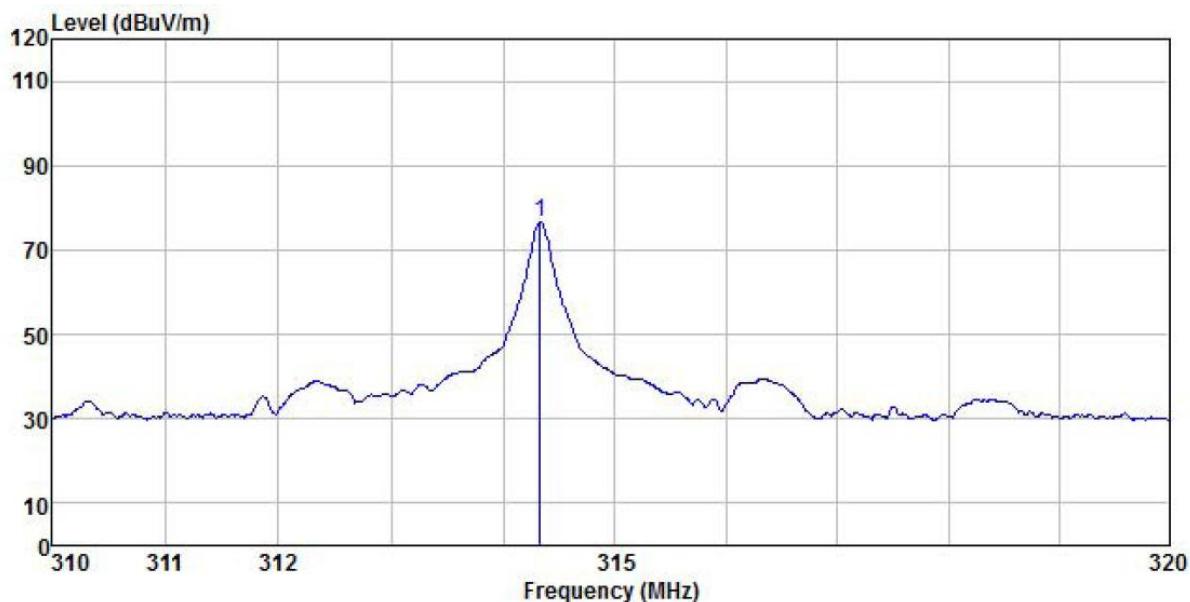

Freq	ReadAntenna Level	Cable Loss	Aux Preamplifier Factor	Limit Level	Line Limit	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	314.331	55.06	18.73	2.98	0.00	0.00	76.77


Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.


6.2.2 Spurious Emissions

Below 1GHz (30MHz-1000MHz)								
Peak value								
Frequency (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
628.70	17.54	20.02	3.89	0.00	41.45	75.58	-34.13	Vertical
942.13	16.39	22.77	4.13	0.00	43.29	75.58	-32.29	Vertical
629.48	20.19	20.02	3.89	0.00	44.10	75.58	-31.48	Horizontal
945.44	21.09	22.79	4.16	0.00	48.04	75.58	-27.54	Horizontal
Average value								
Frequency (MHz)	Level (dBuV/m)	Duty cycle factor	Average value (dBuV/m)		Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
628.70	41.45	-5.57	35.88		55.62	-19.74	Vertical	
942.13	43.29	-5.57	37.72		55.62	-17.90	Vertical	
629.48	44.10	-5.57	38.53		55.62	-17.09	Horizontal	
945.44	48.04	-5.57	42.47		55.62	-13.15	Horizontal	

Remark: Average value=Peak value + Duty Cycle Factor.

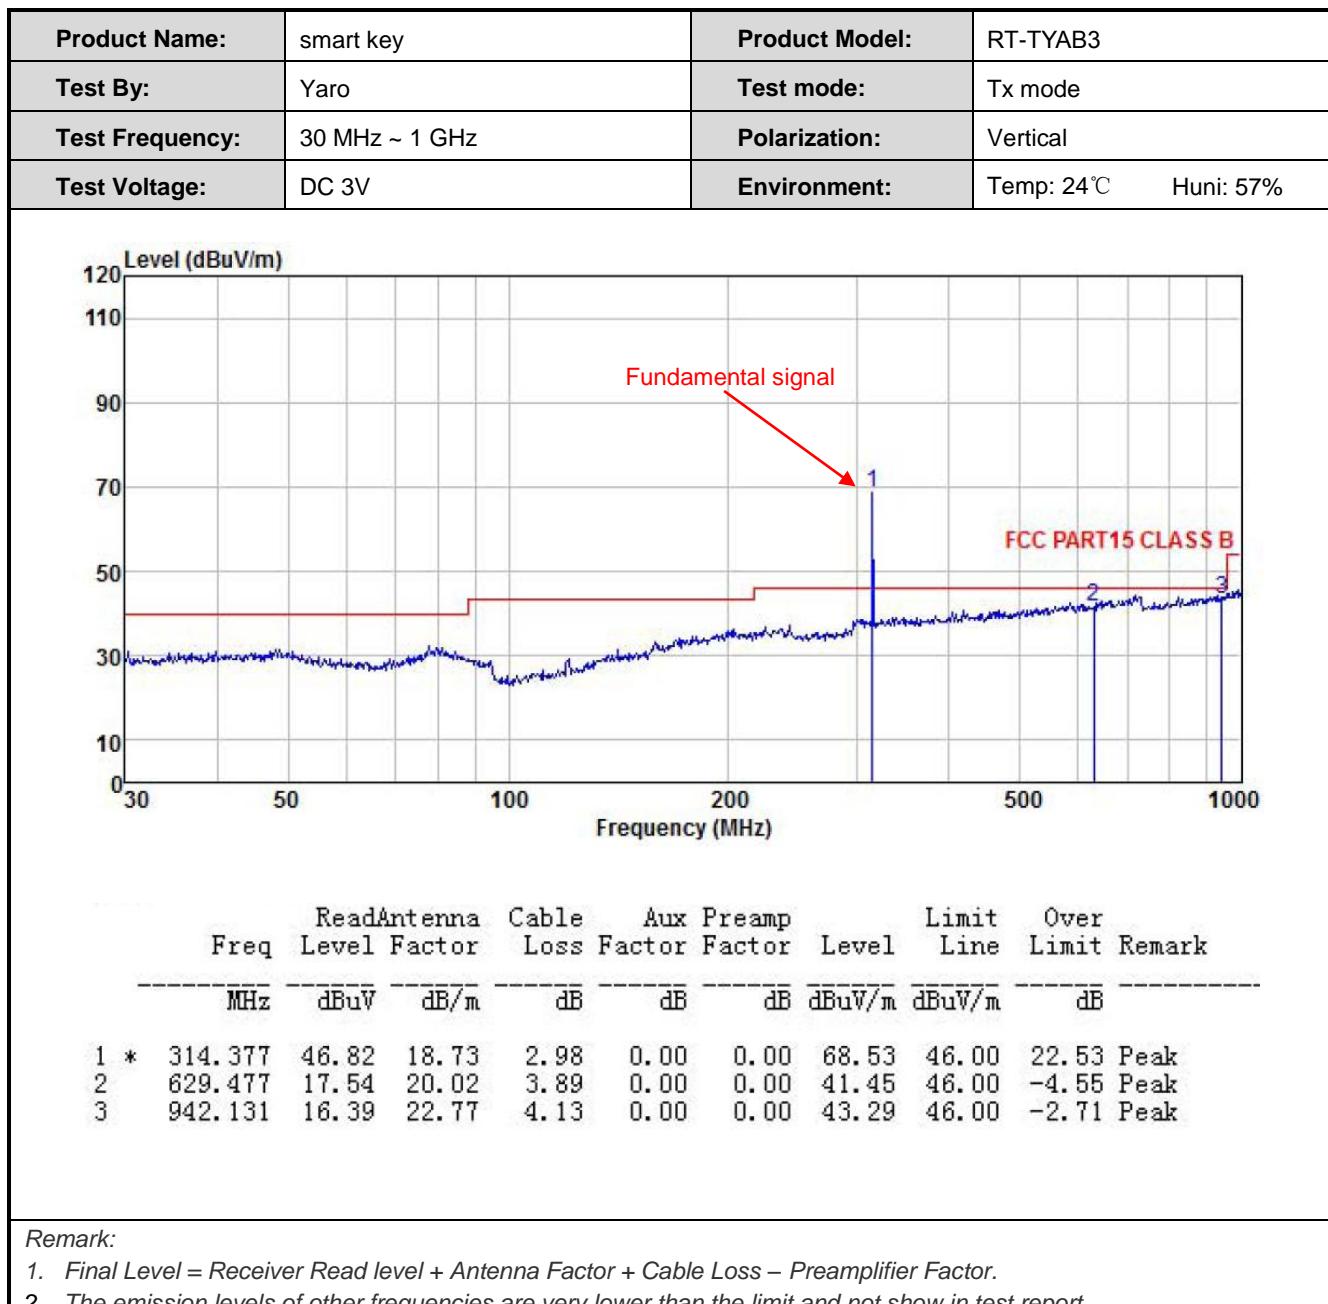Test Plots:**314.3MHz:**

Product Name:	smart key	Product Model:	RT-TYAB3
Test By:	Yaro	Test mode:	Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	DC 3V	Environment:	Temp: 24°C Huni: 57%

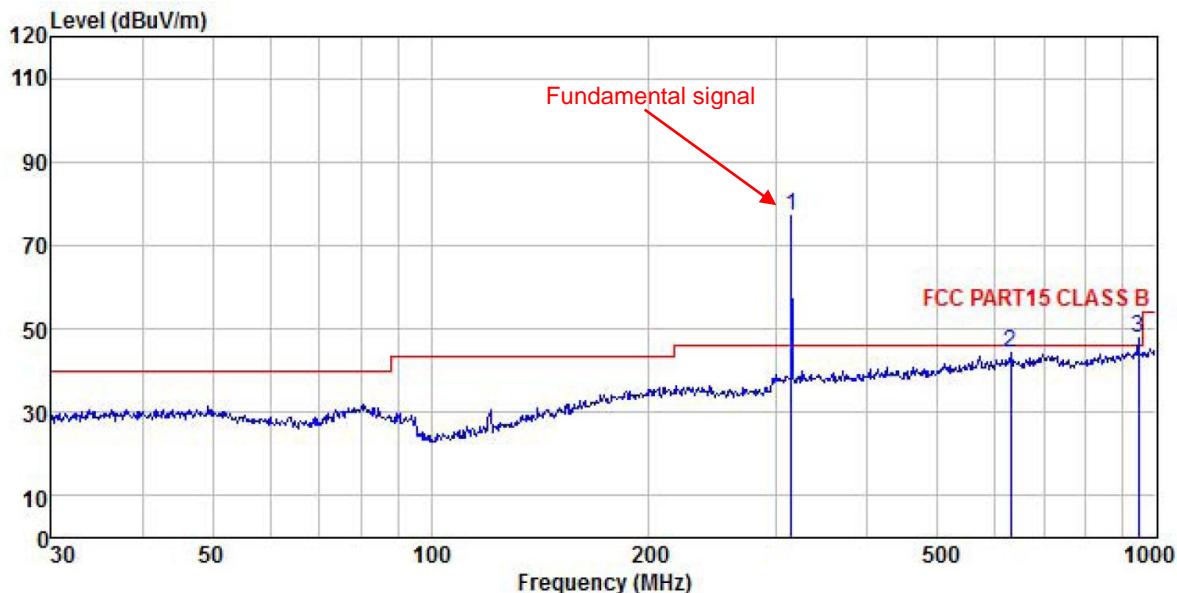


Freq MHz	Read	Antenna	Cable	Aux	Preampl	Limit Line dBuV/m	Over Limit dB	Remark
	Level	Factor	Loss	Factor	Factor			
1 * 314.377	55.19	18.73	2.98	0.00	0.00	76.02	46.00	30.90 Peak
2 629.477	20.19	20.02	3.89	0.00	0.00	44.10	46.00	-1.90 Peak
3 * 945.440	21.09	22.79	4.16	0.00	0.00	48.04	46.00	2.04 Peak

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	smart key	Product Model:	RT-TYAB3																																																																																										
Test By:	Yaro	Test mode:	Tx mode																																																																																										
Test Frequency:	1 GHz ~ 5 GHz	Polarization:	Vertical																																																																																										
Test Voltage:	DC 3V	Environment:	Temp: 24°C Huni: 57%																																																																																										
<table border="1"> <thead> <tr> <th>Freq</th> <th>ReadAntenna Level</th> <th>Antenna Factor</th> <th>Cable Loss</th> <th>Aux Factor</th> <th>Preamp Factor</th> <th>Limit Level</th> <th>Over Line</th> <th>Over Limit</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1260.816</td> <td>46.52</td> <td>24.62</td> <td>3.02</td> <td>1.24</td> <td>41.05</td> <td>34.35</td> <td>74.00</td> <td>-39.65 Peak</td> </tr> <tr> <td>2</td> <td>1576.916</td> <td>46.75</td> <td>24.94</td> <td>3.40</td> <td>1.39</td> <td>41.03</td> <td>35.45</td> <td>74.00</td> <td>-38.55 Peak</td> </tr> <tr> <td>3</td> <td>1891.438</td> <td>47.05</td> <td>25.59</td> <td>3.80</td> <td>1.55</td> <td>41.42</td> <td>36.57</td> <td>74.00</td> <td>-37.43 Peak</td> </tr> <tr> <td>4</td> <td>2203.912</td> <td>46.44</td> <td>26.56</td> <td>4.09</td> <td>1.64</td> <td>41.68</td> <td>37.05</td> <td>74.00</td> <td>-36.95 Peak</td> </tr> <tr> <td>5</td> <td>2522.945</td> <td>47.08</td> <td>27.35</td> <td>4.41</td> <td>1.71</td> <td>41.90</td> <td>38.65</td> <td>74.00</td> <td>-35.35 Peak</td> </tr> <tr> <td>6</td> <td>2832.915</td> <td>46.88</td> <td>28.05</td> <td>4.69</td> <td>1.84</td> <td>41.63</td> <td>39.83</td> <td>74.00</td> <td>-34.17 Peak</td> </tr> <tr> <td>7</td> <td>3150.399</td> <td>46.60</td> <td>28.50</td> <td>5.02</td> <td>1.98</td> <td>41.43</td> <td>40.67</td> <td>74.00</td> <td>-33.33 Peak</td> </tr> </tbody> </table>				Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Level	Over Line	Over Limit	Remark	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB		1	1260.816	46.52	24.62	3.02	1.24	41.05	34.35	74.00	-39.65 Peak	2	1576.916	46.75	24.94	3.40	1.39	41.03	35.45	74.00	-38.55 Peak	3	1891.438	47.05	25.59	3.80	1.55	41.42	36.57	74.00	-37.43 Peak	4	2203.912	46.44	26.56	4.09	1.64	41.68	37.05	74.00	-36.95 Peak	5	2522.945	47.08	27.35	4.41	1.71	41.90	38.65	74.00	-35.35 Peak	6	2832.915	46.88	28.05	4.69	1.84	41.63	39.83	74.00	-34.17 Peak	7	3150.399	46.60	28.50	5.02	1.98	41.43	40.67	74.00	-33.33 Peak
Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Limit Level	Over Line	Over Limit	Remark																																																																																				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB																																																																																					
1	1260.816	46.52	24.62	3.02	1.24	41.05	34.35	74.00	-39.65 Peak																																																																																				
2	1576.916	46.75	24.94	3.40	1.39	41.03	35.45	74.00	-38.55 Peak																																																																																				
3	1891.438	47.05	25.59	3.80	1.55	41.42	36.57	74.00	-37.43 Peak																																																																																				
4	2203.912	46.44	26.56	4.09	1.64	41.68	37.05	74.00	-36.95 Peak																																																																																				
5	2522.945	47.08	27.35	4.41	1.71	41.90	38.65	74.00	-35.35 Peak																																																																																				
6	2832.915	46.88	28.05	4.69	1.84	41.63	39.83	74.00	-34.17 Peak																																																																																				
7	3150.399	46.60	28.50	5.02	1.98	41.43	40.67	74.00	-33.33 Peak																																																																																				
<p>Remark:</p> <ol style="list-style-type: none"> Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor. The emission levels of other frequencies are very lower than the limit and not show in test report. 																																																																																													

Product Name:	smart key	Product Model:	RT-TYAB3
Test By:	Yaro	Test mode:	Tx mode
Test Frequency:	1 GHz ~ 5 GHz	Polarization:	Horizontal
Test Voltage:	DC 3V	Environment:	Temp: 24°C Huni: 57%

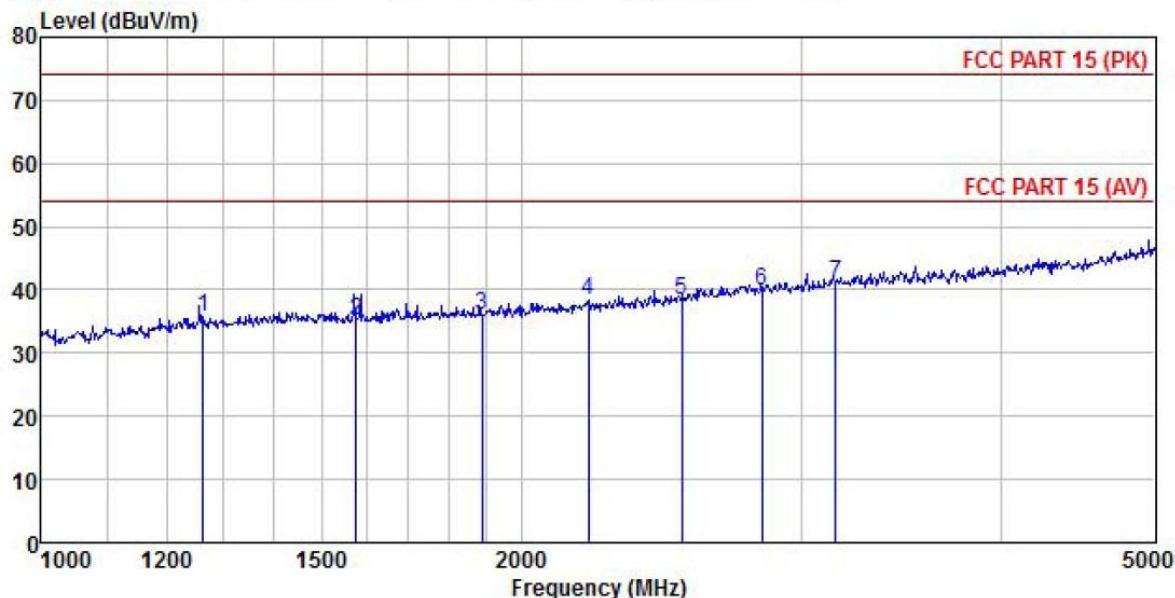

Freq MHz	Read	Antenna	Cable	Aux	Preamp	Limit Line dBuV/m	Over Line dBuV/m	Over Limit dB	Remark
	Level dBuV	Factor	Loss dB	Factor	Factor				
1 1262.847	47.75	24.64	3.03	1.24	41.05	35.61	74.00	-38.39	Peak
2 1576.916	46.45	24.94	3.40	1.39	41.03	35.15	74.00	-38.85	Peak
3 1891.438	46.57	25.59	3.80	1.55	41.42	36.09	74.00	-37.91	Peak
4 2203.912	47.87	26.56	4.09	1.64	41.68	38.48	74.00	-35.52	Peak
5 2522.945	46.78	27.35	4.41	1.71	41.90	38.35	74.00	-35.65	Peak
6 2832.915	46.94	28.05	4.69	1.84	41.63	39.89	74.00	-34.11	Peak
7 3150.399	46.97	28.50	5.02	1.98	41.43	41.04	74.00	-32.96	Peak

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

6.3 Bandwidth

Test Requirement:	FCC Part15 C Section 15.231 (c) RSS-210 Annex A Section A.1.3
Receiver setup:	RBW=1kHz, VBW=3kHz, detector: Peak
Limit:	The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.
Test Procedure:	<ol style="list-style-type: none"> 1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT. 2. Set the EUT to proper test channel. 3. Max hold the radiated emissions, mark the peak power frequency point and the -20dB upper and lower frequency points. 4. Read 20dB bandwidth.
Test setup:	<p>The diagram illustrates the test setup. A Spectrum Analyzer is positioned at the top left, showing a green waveform on its screen. A red line extends from the analyzer to a gray rectangular box labeled "E.U.T". This entire assembly rests on a light-colored rectangular platform labeled "Non-Conducted Table". Below the table is a dark gray horizontal bar labeled "Ground Reference Plane".</p>
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Measurement Data:

314.3MHz:


20dB bandwidth (MHz)	Limit (MHz)	99% Occupy Bandwidth (MHz)	Results
0.0096	0.78575	0.0106	Passed

Note: 20dB bandwidth Limit= Fundamental frequency×0.25%=314.3×0.25%=0.78575MHz

Test plot as follows:

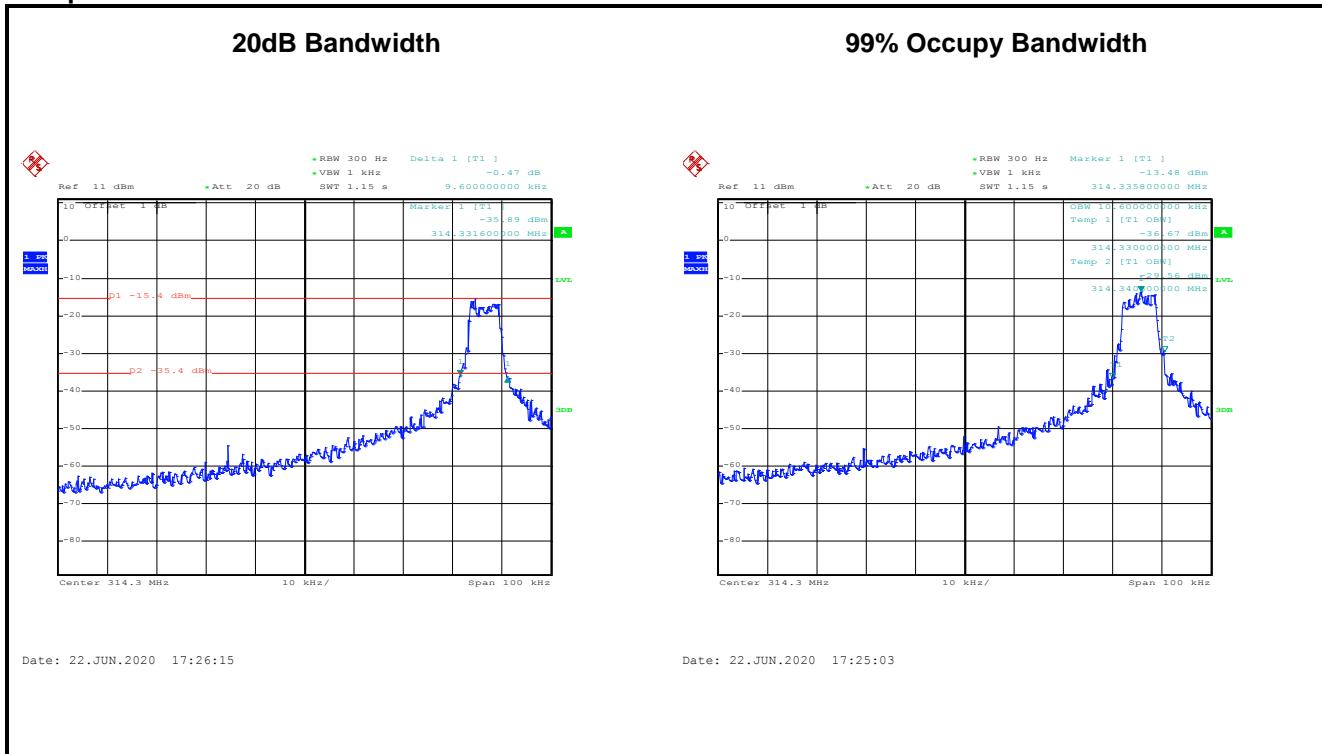

6.4 Duration Time

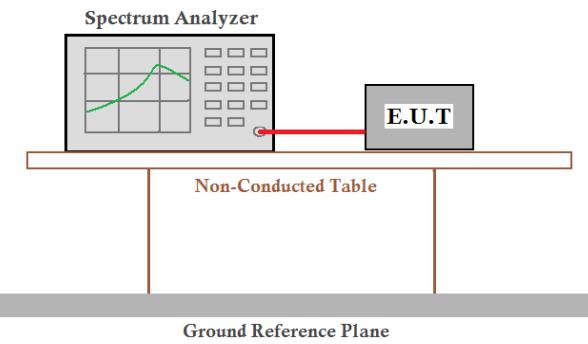
Test Requirement:	FCC Part15 C Section 15.231 (a) (1) RSS-210 Annex A Section A.1.1 (a)
Receiver setup:	RBW=100kHz, VBW=300kHz, span=0Hz, detector: Peak
Limit:	Not more than 5 seconds
Test mode:	Transmitting mode
Test Procedure:	<ol style="list-style-type: none"> According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT. Set the EUT to proper test channel. Single scan the transmission, and read the transmission time.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is positioned above a Non-Conducted Table. An E.U.T (Equipment Under Test) is placed on the table. A red line connects the Spectrum Analyzer to the E.U.T, representing a coaxial cable. The entire setup rests on a horizontal ground reference plane.</p>
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data


314.3MHz:

Duration time (second)	Limit (second)	Result
1.500	<5.0	Pass

Test plot as follows:

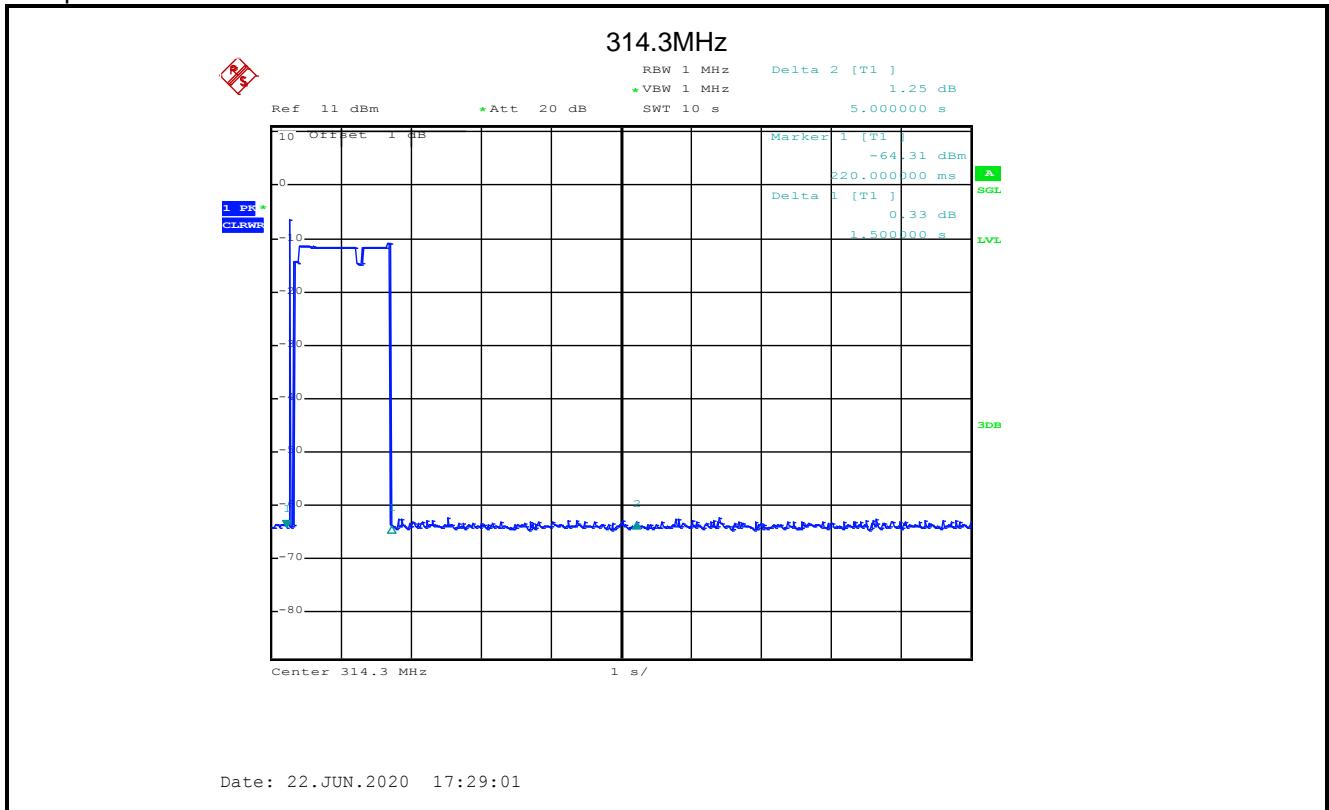

6.5 Frequency Stability

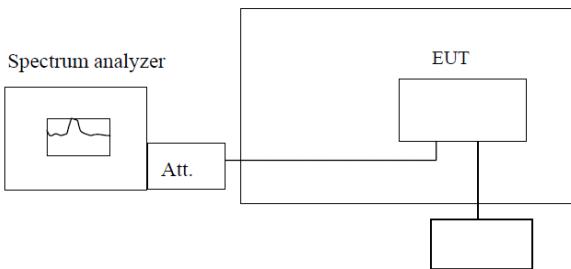Test Requirement:	RSS-GEN Section 8.11
Limit:	kept within at least the central 80% of its permitted operating frequency band.
Test setup:	<p style="text-align: center;">Temperature Chamber</p>  <p style="text-align: center;">Note : Measurement setup for testing on Antenna connector</p>
Test procedure:	<ol style="list-style-type: none"> 1. The EUT is installed in an environment test chamber with external power source. 2. Set the chamber to operate at 50 centigrade and external power source to output at nominal voltage of EUT. 3. A sufficient stabilization period at each temperature is used prior to each frequency measurement. 4. When temperature is stabled, measure the frequency stability. 5. The test shall be performed under -30 to 50 centigrade and 85 to 115 percent of the nominal voltage. Change setting of chamber and external power source to complete all conditions.
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data:**314.3MHz:**

Voltage vs. Frequency Stability


Test conditions		Measurement Frequency (MHz)	Limit (MHz)
Temp(°C)	Voltage(ac)		
20	3.2V	314.3358	281 ~ 449
	3.0V	314.3346	
	2.5V	314.3344	

Note: EUT stops working when the supply voltage is lower than DC 2.5V.

Temperature vs. Frequency Stability

Test conditions		Frequency(MHz)	Limit (MHz)
Voltage(dc)	Temp(°C)		
3 V	-20	314.3342	281 ~ 449
	-10	314.3346	
	0	314.3354	
	10	314.3351	
	20	314.3343	
	30	314.3342	
	40	314.3349	
	50	314.3347	

Test plot as follows (worst case):

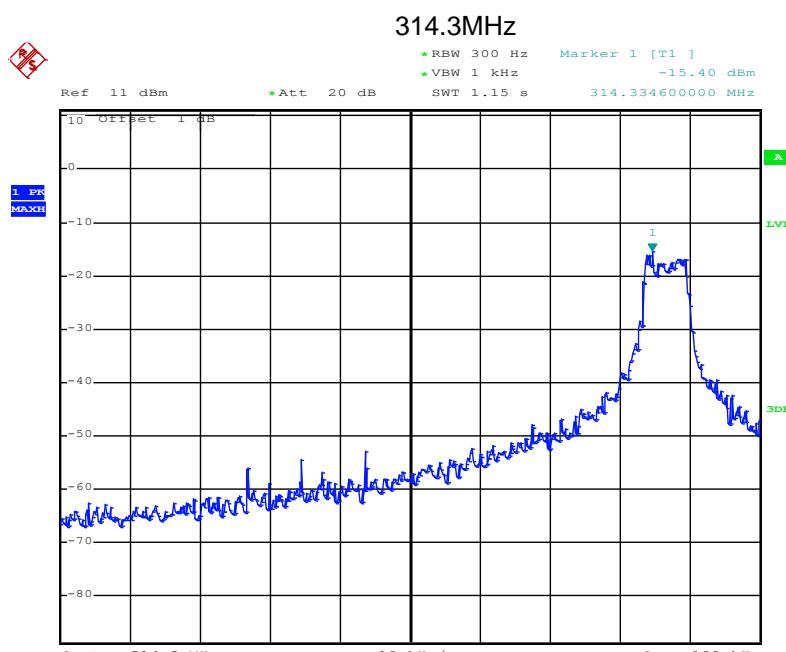

Date: 22.JUN.2020 17:26:27