
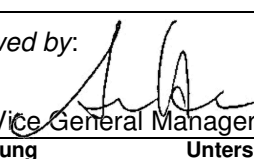


Prüfbericht-Nr.: <i>Test Report No.:</i>	50117953 001	Auftrags-Nr.: <i>Order No.:</i>	114069148	Seite 1 von 25 <i>Page 1 of 25</i>
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	4-Sep-2017	
Auftraggeber: <i>Client:</i>	Shenghuo Technology Ltd. 11thFloor, No. 31, Sec. 3, Zhongshan N. Rd., Zhongshan Dist., Taipei City 10461, Taiwan			
Prüfgegenstand: <i>Test item:</i>	CLIPSULIN			
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	C3			
Auftrags-Inhalt: <i>Order content:</i>	FCC Part15C Test report			
Prüfgrundlage: <i>Test specification:</i>	FCC 47CFR Part 15: Subpart C Section 15.249			
Wareneingangsdatum: <i>Date of receipt:</i>	10-Dec-2017			
Prüfmuster-Nr.: <i>Test sample No.:</i>	A000642285-001 A000642285-002			
Prüfzeitraum: <i>Testing period:</i>	13-Dec-2017 – 18-Dec-2017			
Ort der Prüfung: <i>Place of testing:</i>	EMC Laboratory Taipei			
Prüflaboratorium: <i>Testing laboratory:</i>	TUV Rheinland Taiwan Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
Report date / tested by:		kontrolliert von / reviewed by:		
2018-01-18 SamC.J. Kuo/Engineer		2018-01-18 Arvin Ho/Vice General Manager		
Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>
				
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet				
Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT

RESULT: *Passed*

5.1.2 FIELD STRENGTH OF FUNDAMENTAL

RESULT: *Passed*

5.1.3 99% BANDWIDTH

RESULT: *Passed*

5.1.4 SPURIOUS EMISSION

RESULT: *Passed*

5.2.1 SPURIOUS EMISSION

RESULT: *Passed*

6.1.1 ELECTROMAGNETIC FIELDS

RESULT: *Passed*

Contents

1.	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS.....	5
2.	TEST SITES	6
2.1	TEST FACILITY.....	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	7
2.3	TRACEABILITY	8
2.4	CALIBRATION	8
2.5	MEASUREMENT UNCERTAINTY	8
3.	GENERAL PRODUCT INFORMATION.....	9
3.1	PRODUCT FUNCTION AND INTENDED USE	9
3.2	RATINGS AND SYSTEM DETAILS.....	9
3.3	INDEPENDENT OPERATION MODES.....	10
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.5	SUBMITTED DOCUMENTS.....	10
4.	TEST SET-UP AND OPERATION MODES.....	11
4.1	PRINCIPLE OF CONFIGURATION SELECTION	11
4.2	TEST OPERATION AND TEST SOFTWARE.....	11
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	11
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	12
4.5	TEST SETUP DIAGRAM	12
5.	TEST RESULTS	14
5.1	TRANSMITTER REQUIREMENT & TEST SUITES.....	14
5.1.1	<i>Antenna Requirement</i>	<i>14</i>
5.1.2	<i>Field strength of fundamental.....</i>	<i>15</i>
5.1.3	<i>99% Bandwidth</i>	<i>16</i>
5.1.4	<i>Spurious Emission</i>	<i>19</i>
5.2	RECEIVER REQUIREMENT	20
5.2.1	<i>Spurious Emission</i>	<i>20</i>
6.	SAFETY HUMAN EXPOSURE	21
6.1	RADIO FREQUENCY EXPOSURE COMPLIANCE	21
6.1.1	<i>Electromagnetic Fields.....</i>	<i>21</i>
7.	PHOTOGRAPHS OF THE TEST SET-UP.....	22

8.	LIST OF TABLES	25
9.	LIST OF PHOTOGRAPHS.....	25

1. General Remarks

1.1 Complementary Materials

These attachments are integral parts of this test report. :

Appendix P: Photo Documentation

(File Name: 50117953APPENDIXP)

Appendix D: Test Result of Radiated Emissions

(File Name: 50117953APPENDIXD)

Test Specifications

The following standards were applied

Table 1: Applied Standard and Test Levels

Radio
FCC 47CFR Part 15: Subpart C Section 15.249 ANSI C63.10:2013 FCC KDB Publication 447498 D01 v06

2. Test Sites

2.1 Test Facility

TUV Rheinland Taiwan Ltd.
Taipei Office

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

FCC Registration No.: 340738
IC Canada Registration No.: 9465A-1
TAF Accredited NCC Test Lab. No.:0759
TAF ISO17025 Certification effective periods: 2016-Jul-1st to 2019-Jun-30th



Testing Laboratory
0759

2.2 List of Test and Measurement Instruments

Table 2: List of Test and Measurement Equipment

Kind of Equipment	Manu-facturer	Type	S/N	Last Calibration	Next Calibration
Test Software	Farad	EZ_EMG	Ver. TUV3A1	N/A	N/A
EMI Test Receiver	R&S	ESCI 7	100797	2016/12/30	2017/12/30
Spectrum Analyzer	R&S	FSV 40	100921	2017/05/02	2018/05/01
Spectrum Analyzer	Agilent	N9010A	MY53470241	2017/05/23	2018/05/22
Preamplifier (30MHz -1GHz)	HP	8447D	2944A06641	2017/08/14	2018/08/14
Preamplifier (18 GHz -40 GHz)	COM-POWER	PAM-840	461257	2016/12/01	2017/12/31
Pre-Amplifier (1GHz~18GHz)	EM Electronics	EM01G18G	060558	2017/07/28	2018/07/28
Bilog Antenna	TESEQ	CBL6111D	29804	2017/08/18	2018/08/18
Horn Antenna	ETS-Lindgren	3117	201918	2017/08/18	2018/08/18
Horn Antenna (18GHz~40GHz)	COM-POWER	AH-840	101031	2017/11/28	2018/11/28
Loop Antenna	Schwarzbeck	FMZB 1513	1513-076	2017/06/14	2018/06/14
EMI Test Receiver	R&S	ESCI7	100797	2016/12/30	2017/12/30
Temp. & Humid. Chamber	Giant Force	GCT-099-40-S	MAF0103-007	2017/03/09	2019/03/09
LISN (1 phase)	R&S	ENV216	101243	2017/06/18	2018/06/18
LISN	R&S	ENV216	101262	2017/06/22	2018/06/21

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements are ± 3 dB.

Table 3: Emission Measurement Uncertainty

Parameter	Uncertainty
RF power, conducted	± 1.5 dB
Adjacent channel power	± 3 dB
Radiated emission of transmitter, valid up to 26 GHz	± 6 dB
Radiated emission of receiver, valid up to 26 GHz	± 6 dB
Temperature	± 2 °C
Humidity	± 10 %

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a CLIPSULIN. It contains a Bluetooth BLE compatible module enabling the user to communicate data through a Wireless interface.
For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 Ratings and System Details

Table 4: Basic Information of EUT

Item	EUT information
Kind of Equipment	CLIPSULIN
Type Identification	C3
Brand Name	DIABNEXT
FCC ID	2AOKVCS03

Table 5: Technical Specification of EUT

Technical Specification	Value
Operating Frequencies	2402-2480MHz
Channel Spacing	2 MHz
Channel number	40
Operation Voltage	3.7Vdc
Modulation	GFSK
Antenna gain	2.93dBi

3.3 Independent Operation Modes

Basic operation modes are:

- A. Transmitting
 - 1. Low channel
 - 2. Middle channel
 - 3. High channel
- B. Receiving
 - 1. Low channel
 - 2. Middle channel
 - 3. High channel

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum emission level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Setup for testing: Test samples are provided with a USB interface which makes it possible to control them through a test software installed on a notebook computer.

This software, nRFgo was running on the laptop computer connected to the EUT.

The samples were used as follows:

Conducted: A000642285-001

Radiation: A000642285-002

Full test was applied on all test modes, but only worst case was shown

4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:


Description	Manufacturer	Model No.	Serial No.
Notebook(EMC-06)	Lenovo	TP00048A	PB-0F8B2

4.4 Countermeasures to achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.


4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

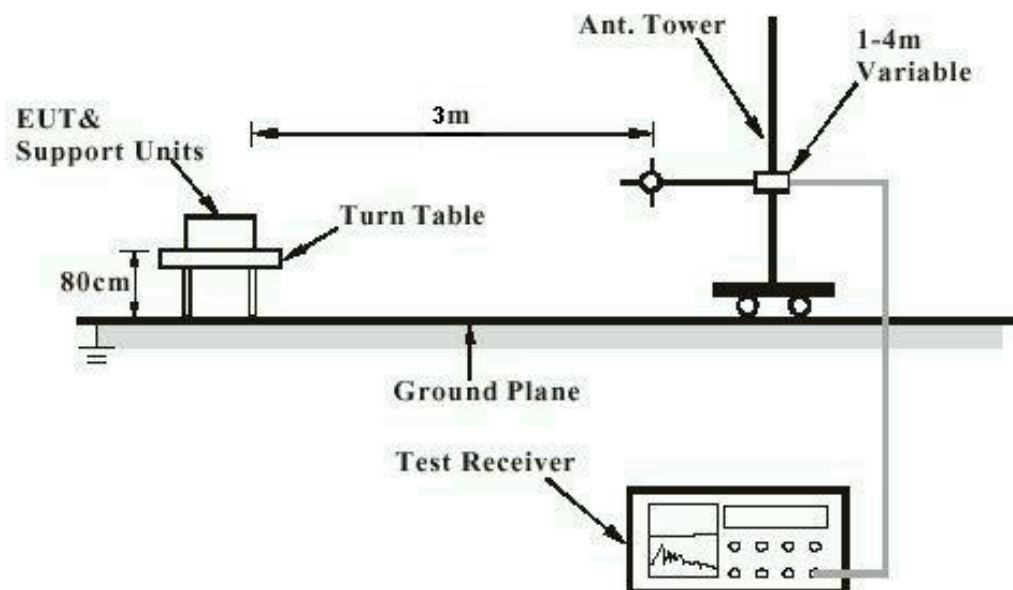

Note: Measurements above 1 GHz are done with a table height of 1.5m

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)

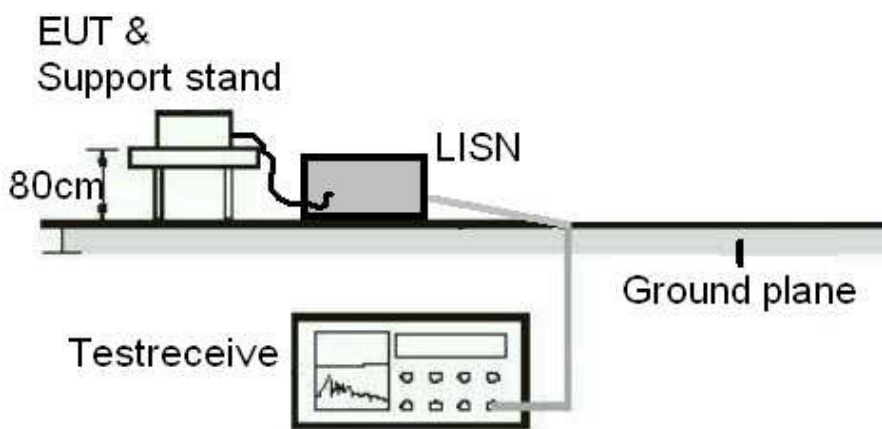

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Passed**

Standard : LP0002(2016): 2.2
Part 15.203 and RSS-Gen 7.1.4
Requirement : use of approved antennas only

The antenna is a Chip Antenna soldered to the PCB with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.

Refer to EUT photo for details.

5.1.2 Field strength of fundamental

RESULT:
Passed

Test standard : FCC Part 15.249(a), RSS-210 B.10
 LP0002: 3.10.2.2
 Basic standard : ANSI C63.10:2013
 Kind of test site : Semi-Anechoic Chamber

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A
 Atmospheric pressure : 100-103 kPa

In the table below the maximum results found are reported.

For graphics of results of frequencies tested, please refer to Appendix D.

Table 6: Test result of Field strength of fundamental

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Antenna orientation	Detector or calculated value
2402	64.46	114	Horizontal	Peak
2402	61.98	94		Average
2402	76.77	114	Vertical	Peak
2402	73.64	94		Average
2440	64.83	114	Horizontal	Peak
2440	62.22	94		Average
2440	76.61	114	Vertical	Peak
2440	73.84	94		Average
2480	63.83	114	Horizontal	Peak
2480	60.59	94		Average
2480	76.98	114	Vertical	Peak
2480	74.31	94		Average

5.1.3 99% Bandwidth

RESULT:**Passed**

Test standard : RSS-Gen
Basic standard : ANSI C63.10:2013,
Kind of test site : Semi-Anechoic Chamber

Test setup

Test Channel : Low/ Middle/ High
Operation Mode : A


Ambient temperature : 22-26 °C
Relative humidity : 50-65 %
Atmospheric pressure : 100-103 kPa

Table 7: Test result of 99% Bandwidth,

Channel	Channel Frequency (MHz)	99% Bandwidth (kHz)
Low Channel	2402	950.79
Mid Channel	2440	924.74
High Channel	2480	950.79


Test Plot of 99% Bandwidth

Low Channel

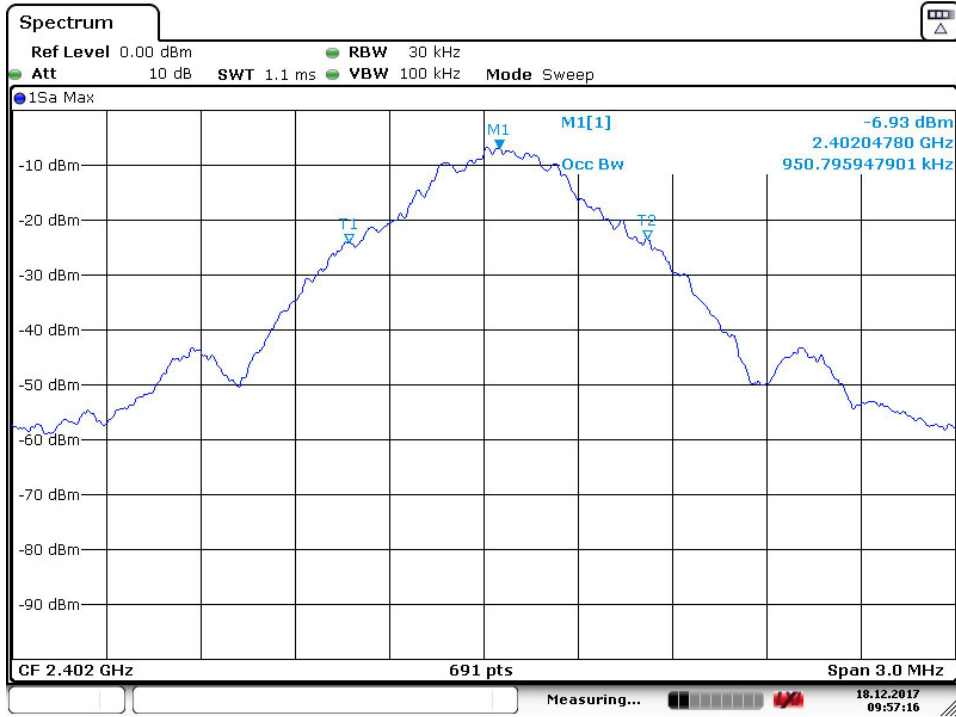

Date: 18.DEC.2017 09:57:16

Middle Channel

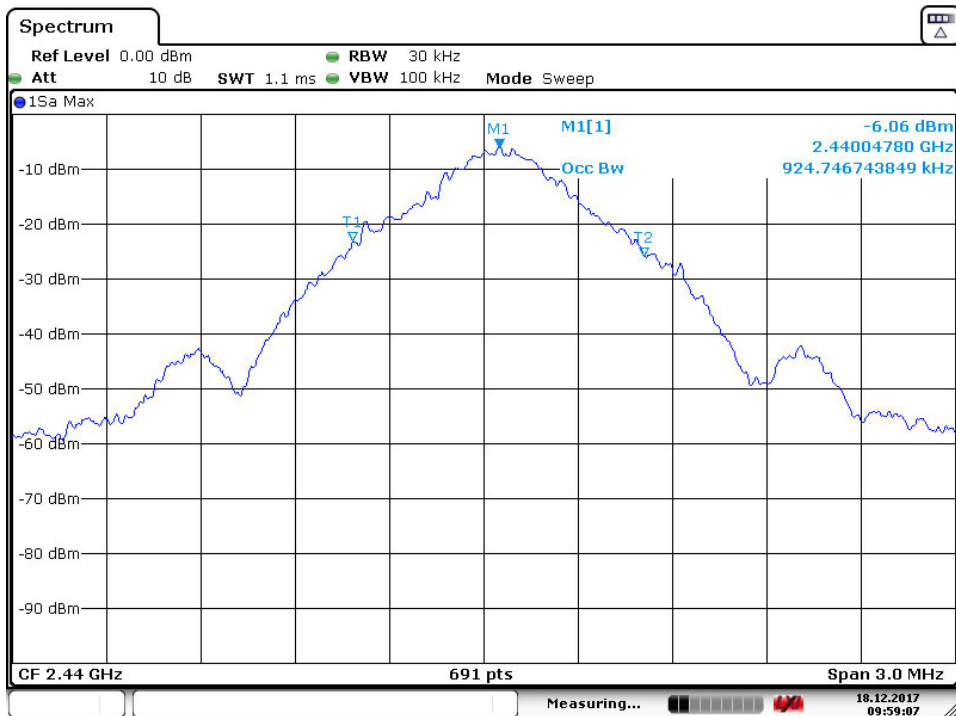

Date: 18.DEC.2017 09:59:07

5.1.4 Spurious Emission

RESULT:**Passed**

Test standard	:	FCC part 15.249(d), FCC 15.205, FCC 15.209, RSS-210 2.2, RSS-210 B.10(b), RSS-Gen 7.2.1
Basic standard	:	LP0002(2016): 2.8
Limits	:	ANSI C63.10:2013
	:	Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a), must comply with the radiated emission limits specified in FCC 15.209(a). Emission radiated outside the specified frequency bands must comply with the radiated emission limits specified in FCC 15.209(a) and FCC 15.249(a).
Kind of test site	:	3m Semi-Anechoic Chamber

Test setup

Test Channel	:	Low/ Middle/ High
Operation mode	:	A

Remark: Testing was carried out within frequency range 30MHz to the tenth harmonic.

For details refer to Appendix D.

The Radiated Emissions testing was performed in the X, Y and Z axis orientation. The worst-case Axis orientation is recorded in this test report. Due to the small size of the product and that there are no inductive components of significant size, 9kHz to 30MHz frequency range is not tested based on technical judgment.

5.2 Receiver Requirement

5.2.1 Spurious Emission

RESULT: **Passed**

Test standard	:	FCC part 15.249(d), FCC 15.205, FCC 15.209, RSS-210 2.2, RSS-210 B.10(b), RSS-Gen 7.2.1 LP0002(2016): 2.8
Basic standard	:	ANSI C63.10:2013
Limits	:	Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a), must comply with the radiated emission limits specified in FCC 15.209(a). Emission radiated outside the specified frequency bands must comply with the radiated emission limits specified in FCC 15.209(a) and FCC 15.249(a).
Kind of test site	:	3m Semi-Anechoic Chamber

Test setup

Test Channel	:	Low/ Middle/ High
Operation mode	:	B

Remark: Testing was carried out within frequency range 30MHz to the tenth harmonic.

For details refer to Appendix D.

The Radiated Emissions testing was performed in the X, Y and Z axis orientation. The X Axis orientation is the worst-case and recorded in this test report. Due to the small size of the product and that there are no inductive components of significant size, 9kHz to 30MHz frequency range is not tested based on technical judgment.

6. Safety Human exposure

6.1 Radio Frequency Exposure Compliance

6.1.1 Electromagnetic Fields

RESULT:**Passed**

Test standard : FCC KDB Publication 447498 D01 v06

FCC:


Since maximum peak output power of the transmitter is $0.7\text{mW} < 10\text{mW}$, hence the EUT is excluded from SAR evaluation according to FCC KDB publication 447498: Mobile Portable RF Exposure

Peak Conducted power


2402	Read Power(dBm)	-1.62
2440	Read Power(dBm)	-1.57
2480	Read Power(dBm)	-1.54

7. Photographs of the Test Set-Up

Photograph 1: Set-up for Spurious Emissions (Front View)

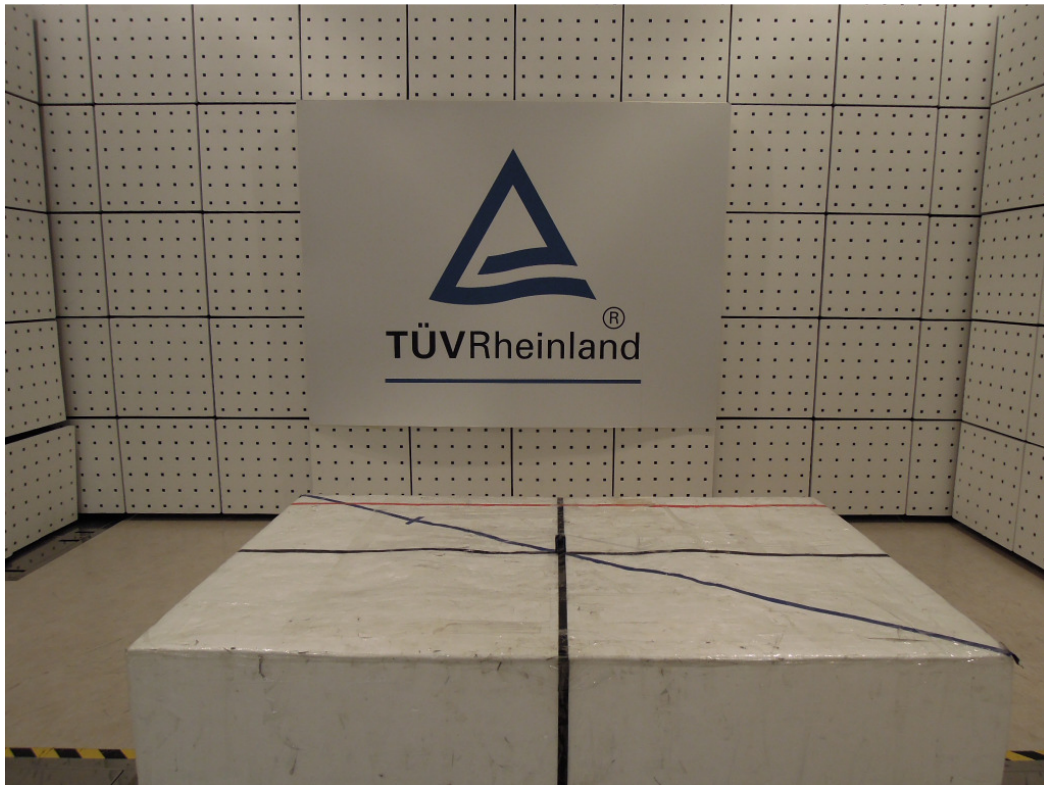


Photograph 2: Set-up for Spurious Emissions (Back View 1)

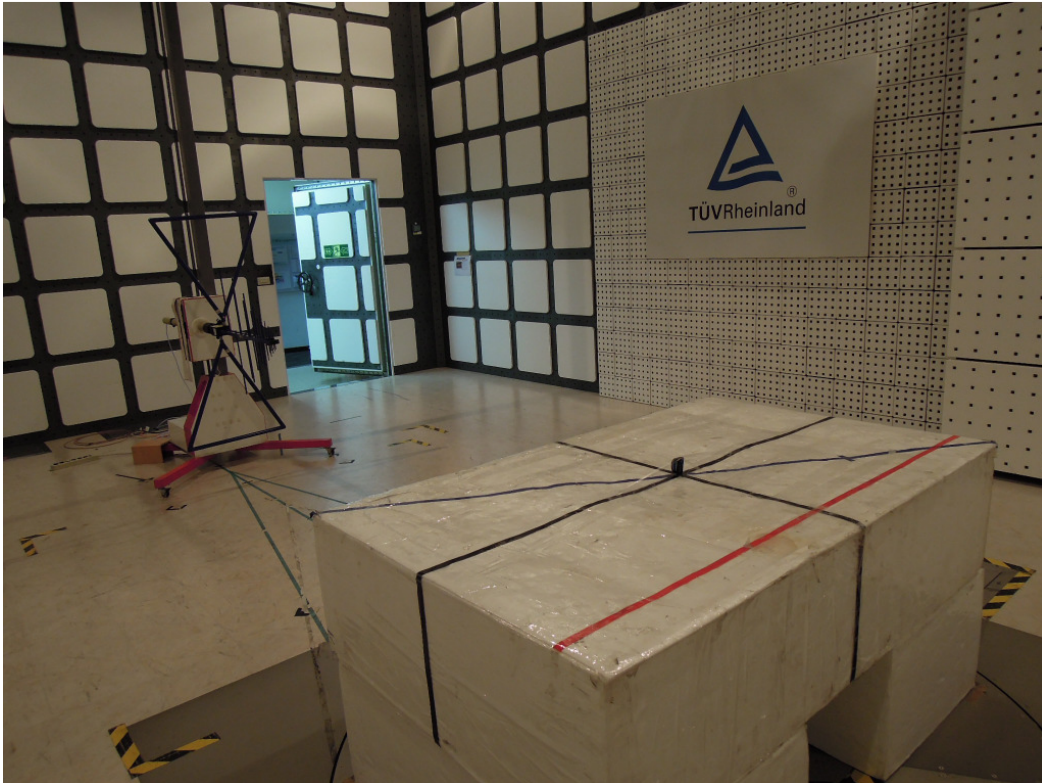

Photograph 3: Set-up for Spurious Emissions (Back View 2)



Photograph 4: Set-up for Conducted test

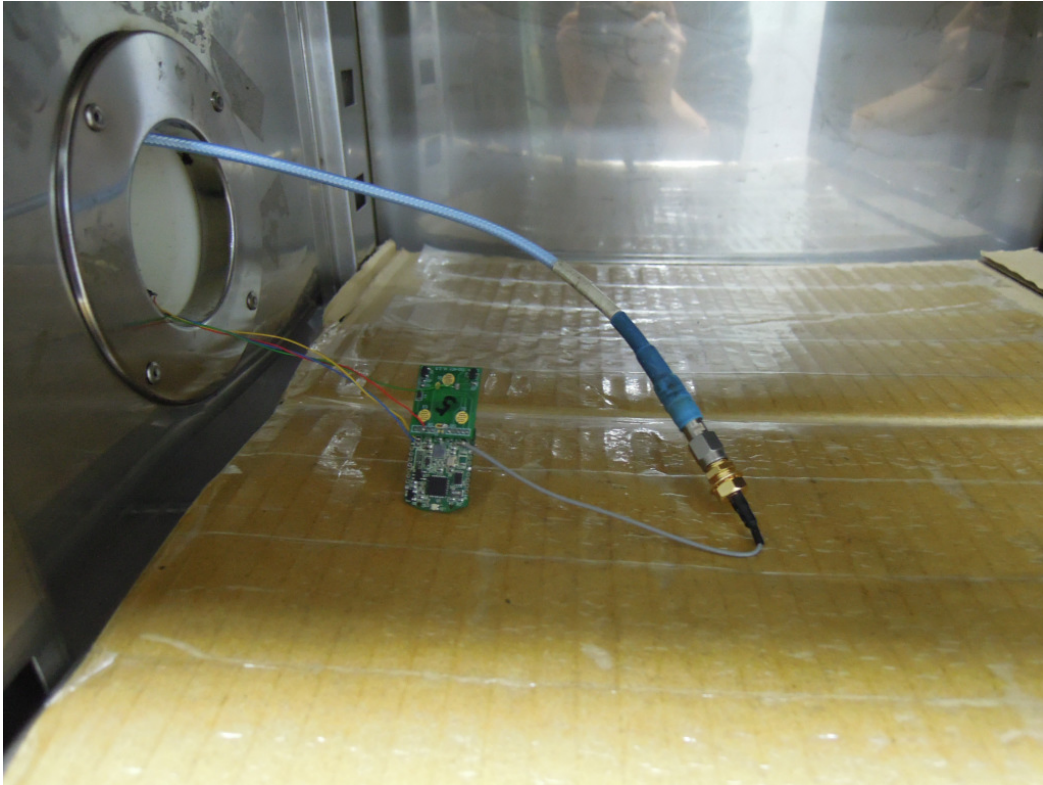

8. List of Tables

Table 1: Applied Standard and Test Levels	5
Table 2: List of Test and Measurement Equipment	7
Table 3: Emission Measurement Uncertainty.....	8
Table 4: Basic Information of EUT	9
Table 5: Technical Specification of EUT	9
Table 6: Test result of Field strength of fundamental.....	15
Table 7: Test result of 99% Bandwidth,.....	16

9. List of Photographs

Photograph 1: Set-up for Spurious Emissions (Front View).....	22
Photograph 2: Set-up for Spurious Emissions (Back View 1)	23
Photograph 3: Set-up for Spurious Emissions (Back View 2)	23
Photograph 4: Set-up for Conducted test.....	24