

FCC Test Report

Product Name	Remote controller
Model No.	RXT9000 series
FCC ID.	2A00W- RXT9000

Applicant	TOTO USA, Inc.
Address	5351 E. Jurupa St., Ontario, CA 91761

Date of Receipt	Aug. 17, 2017
Issued Date	Sep. 19, 2017
Report No.	1780351R-RFUSP01V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Test Report

Issued Date: Sep. 19, 2017

Report No.: 1780351R-RFUSP01V00



Product Name	Remote controller
Applicant	TOTO USA, Inc.
Address	5351 E. Jurupa St., Ontario, CA 91761
Manufacturer	SMK Corporation
Model No.	RXT9000 series
FCC ID.	2A00W- RXT9000
EUT Rated Voltage	DC 2.2-3.3V(Power by battery)
EUT Test Voltage	DC 3V(Power by battery)
Trade Name	TOTO
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2016 ANSI C63.4: 2014, ANSI C63.10: 2013 KDB 558074 D01 DTS Meas Guidance v04
Test Result	Complied

Documented By : Jinn Chen
(Senior Adm. Specialist / Jinn Chen)

Tested By : Steven Tsai
(Assistant Engineer / Steven Tsai)

Approved By : [Signature]
(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. EUT Description.....	5
1.2. Operational Description.....	7
1.3. Tested System Details.....	8
1.4. Configuration of Tested System	8
1.5. EUT Exercise Software	8
1.6. Test Facility	9
1.7. List of Test Equipment.....	10
2. CONDUCTED EMISSION	11
2.1. Test Setup	11
2.2. Limits.....	11
2.3. Test Procedure	12
2.4. Uncertainty	12
2.5. Test Result of Conducted Emission.....	13
3. PEAK POWER OUTPUT	14
3.1. Test Setup	14
3.2. Limit	14
3.3. Test Procedure	14
3.4. Uncertainty	14
3.5. Test Result of Peak Power Output.....	15
4. RADIATED EMISSION	16
4.1. Test Setup	16
4.2. Limits.....	17
4.3. Test Procedure	18
4.4. Uncertainty	19
4.5. Test Result of Radiated Emission.....	20
5. RF ANTENNA CONDUCTED TEST	24
5.1. Test Setup	24
5.2. Limits.....	24
5.3. Test Procedure	24
5.4. Uncertainty	24
5.5. Test Result of RF Antenna Conducted Test.....	25
6. BAND EDGE	26
6.1. Test Setup	26
6.2. Limit	27
6.3. Test Procedure	27
6.4. Uncertainty	28
6.5. Test Result of Band Edge	29
7. 6DB BANDWIDTH	33
7.1. Test Setup	33
7.2. Limits.....	33
7.3. Test Procedure	33
7.4. Uncertainty	33
7.5. Test Result of 6dB Bandwidth.....	34
8. POWER DENSITY	37
8.1. Test Setup	37
8.2. Limits.....	37
8.3. Test Procedure	37
8.4. Uncertainty	37
8.5. Test Result of Power Density	38
9. DUTY CYCLE	41
9.1. Test Setup	41

9.2.	Test Procedure	41
9.3.	Uncertainty	41
9.4.	Test Result of Duty Cycle.....	42
10.	EMI REDUCTION METHOD DURING COMPLIANCE TESTING	43
	Attachment 1: EUT Test Photographs	
	Attachment 2: EUT Detailed Photographs	

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Remote controller
Trade Name	TOTO
Model No.	RXT9000 series
FCC ID.	2A00W- RXT9000
Frequency Range	2405 – 2480MHz
Channel Number	16CH
Type of Modulation	DSSS(O-QPSK)
Antenna Type	Inverted F Antenna (Print Antenna)
Channel Control	Auto
Antenna Gain	Refer to the table “Antenna List”

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	TOTO LTD.	N/A	Inverted F Antenna (Print Antenna)	0.5dBi

Note: The antenna of EUT is conforming to FCC 15.203.

Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 11:	2405 MHz	Channel 12:	2410 MHz	Channel 13:	2415 MHz	Channel 14:	2420 MHz
Channel 15:	2425 MHz	Channel 16:	2430 MHz	Channel 17:	2435 MHz	Channel 18:	2440 MHz
Channel 19:	2445 MHz	Channel 20:	2450 MHz	Channel 21:	2455 MHz	Channel 22:	2460 MHz
Channel 23:	2465 MHz	Channel 24:	2470 MHz	Channel 25:	2475 MHz	Channel 26:	2480 MHz

Note:

1. The EUT is a Remote controller with a built-in 2.4GHz transmitter.
2. These tests were conducted on a sample for the purpose of demonstrating compliance of 2.4GHz transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.

Test Mode	Mode 1: Transmit
-----------	------------------


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
N/A				

Signal Cable Type	Signal cable Description
N/A	

1.4. Configuration of Tested System

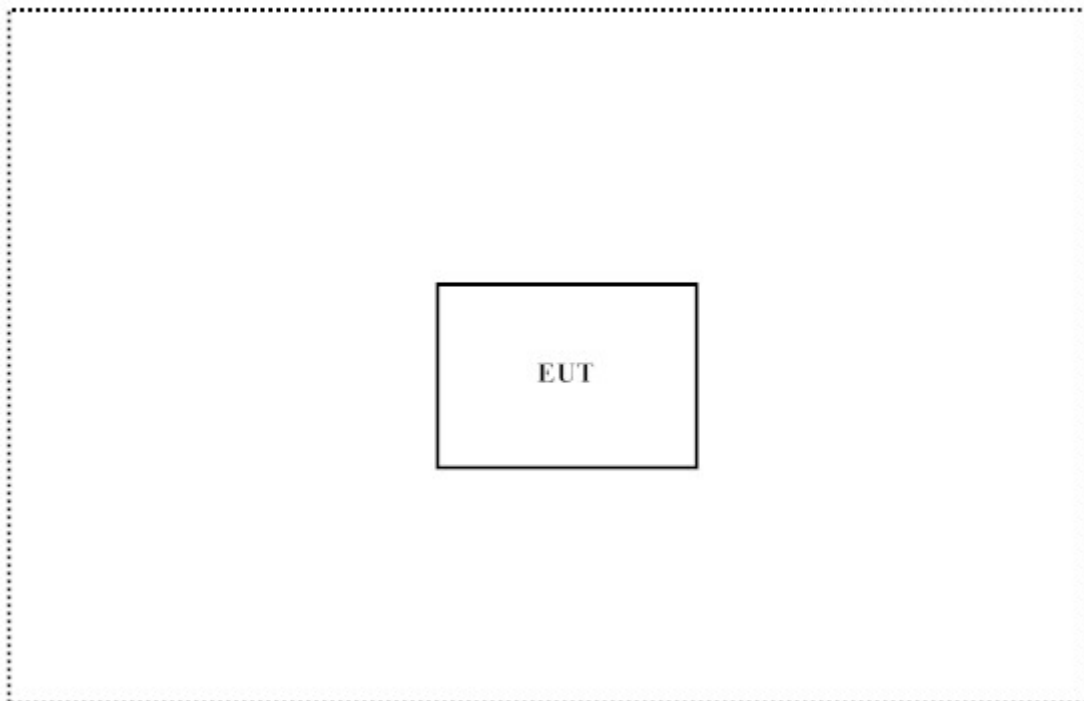

1.5. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.4.
- (2) Press the button on the EUT.
- (3) Configure the test mode, the test channel.
- (4) Start the continuous Transmit.
- (5) Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from DEKRA Testing and Certification Co., Ltd. Web Site:

<http://www.dekra.com.tw/english/about/certificates.aspx?bval=5>

The address and introduction of DEKRA Testing and Certification Co., Ltd. laboratories can be founded in our Web site: http://www.dekra.com.tw/index_en

Site Description: Accredited by TAF
Accredited Number: 3023

Site Name: DEKRA Testing and Certification Co., Ltd.
Site Address: No.159, Sec. 2, Wenhua 1st Rd., Linkou Dist.,
New Taipei City 24457, Taiwan.
TEL: 886-2-2602-7968 / FAX : 866-2-2602-3286
E-Mail : info.tw@dekra.com

FCC Accreditation Number: TW3023

1.7. List of Test Equipment

For Conduction measurements /ASR1

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
	EMI Test Receiver	R&S	ESR7	101601	2017.01.06	2018.01.05
	Two-Line V-Network	R&S	ENV216	101306	2017.02.16	2018.02.15
	Two-Line V-Network	R&S	ENV216	101307	2017.03.17	2018.03.16
	Coaxial Cable	Quietek	RG400_BNC	RF001	2017.05.24	2018.05.23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : QuieTek EMI 2.0 V2.1.113

For Conducted measurements /ASR4

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Spectrum Analyzer	R&S	FSV30	103464	2017.01.09	2018.01.08
X	Power Meter	Anritsu	ML2496A	1548003	2016.12.15	2017.12.14
X	Power Sensor	Anritsu	MA2411B	1531024	2016.12.15	2017.12.14
X	Power Sensor	Anritsu	MA2411B	1531025	2016.12.15	2017.12.14
	Bluetooth Tester	R&S	CBT	101238	2017.01.03	2018.01.02

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : QuieTek Conduction Test System V8.0.110

For Radiated measurements /ACB1


	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Loop Antenna	TESEQ	HLA6121	37133	2016.03.18	2018.03.17
X	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-674	2017.02.13	2018.02.12
X	Horn Antenna	ETS-Lindgren	3117	00203800	2016.10.13	2017.10.12
X	Horn Antenna	Com-Power	AH-840	101087	2017.05.24	2018.05.23
X	Pre-Amplifier	EMCI	EMC001330	980316	2017.05.16	2018.05.15
X	Pre-Amplifier	EMCI	EMC051835SE	980311	2017.05.17	2018.05.16
X	Pre-Amplifier	EMCI	EMC05820SE	980310	2017.05.17	2018.05.16
X	Pre-Amplifier	EMCI	EMC184045SE	980314	2017.05.17	2018.05.16
X	Filter	MICRO TRONICS	BRM50702	G249	2017.08.11	2018.08.10
	Filter	MICRO TRONICS	BRM50716	G187	2017.08.16	2018.08.15
X	EMI Test Receiver	R&S	ESR7	101602	2016.12.15	2017.12.14
X	Spectrum Analyzer	R&S	FSV40	101148	2017.01.24	2018.01.23
X	Coaxial Cable	SUHNER	SUCOFLEX 106	RF002	2017.05.25	2018.05.24
X	Mircoflex Cable	HUBER SUHNER	SUCOFLEX 102	MY3381/2	2017.08.11	2018.08.10

Note:

1. Loop Antenna is calibrated every two year, the other equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : QuieTek EMI 2.0 V2.1.113

2. Conducted Emission

2.1. Test Setup

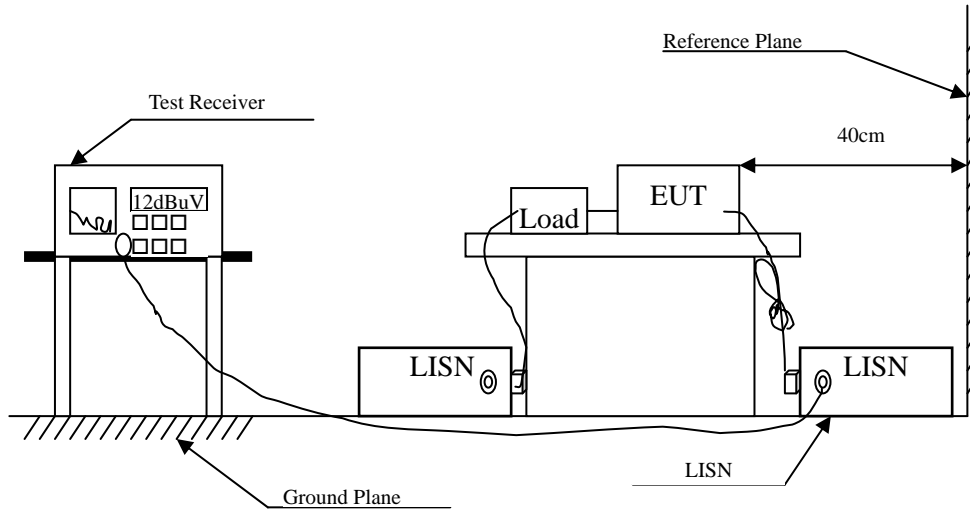

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure

The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

The EUT was setup to ANSI C63.4, 2014; tested to DTS test procedure of FCC KDB-558074 for compliance to FCC 47CFR Subpart C requirements.

2.4. Uncertainty


±2.35dB

2.5. Test Result of Conducted Emission

Owing to the battery operation of EUT, this test item is not performed.

3. Peak Power Output

3.1. Test Setup

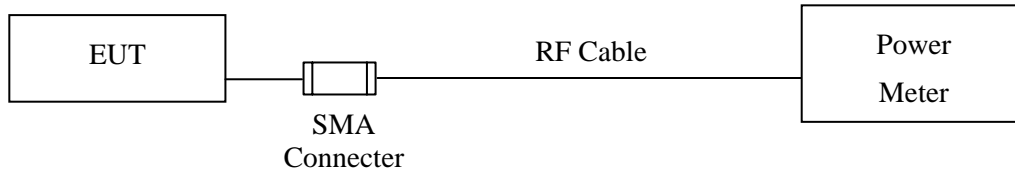

3.2. Limit

The maximum peak power shall be less 1Watt.

3.3. Test Procedure

Tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using KDB 558074 section 9.1.3 PKPM1 Peak power meter method.

3.4. Uncertainty

± 0.86 dB

3.5. Test Result of Peak Power Output


Product : Remote controller
Test Item : Peak Power Output
Test Mode : Mode 1: Transmit
Test Date : 2017/09/07

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 11	2405.00	-0.14	1 Watt= 30 dBm	Pass
Channel 18	2440.00	-0.11	1 Watt= 30 dBm	Pass
Channel 26	2480.00	-0.25	1 Watt= 30 dBm	Pass


4. Radiated Emission

4.1. Test Setup


Radiated Emission Under 30MHz

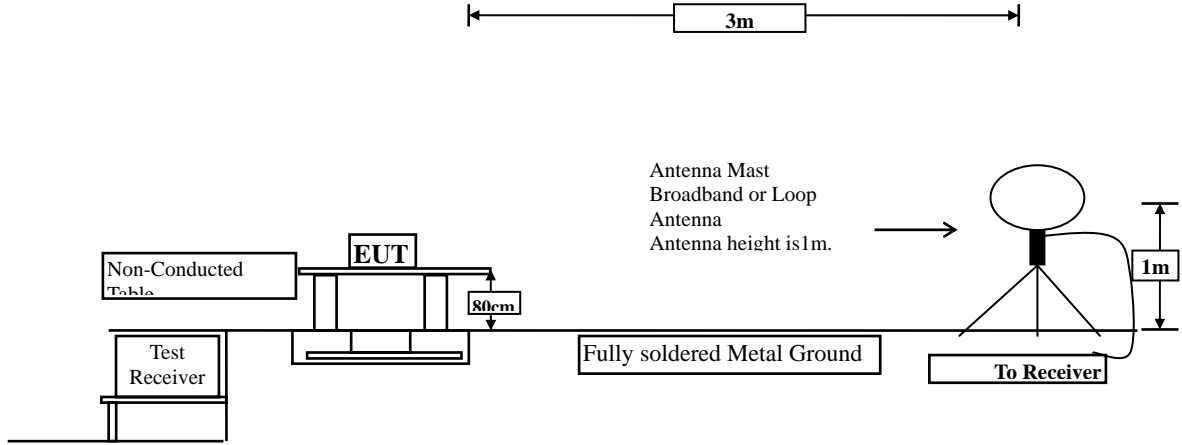

Radiated Emission Below 1GHz

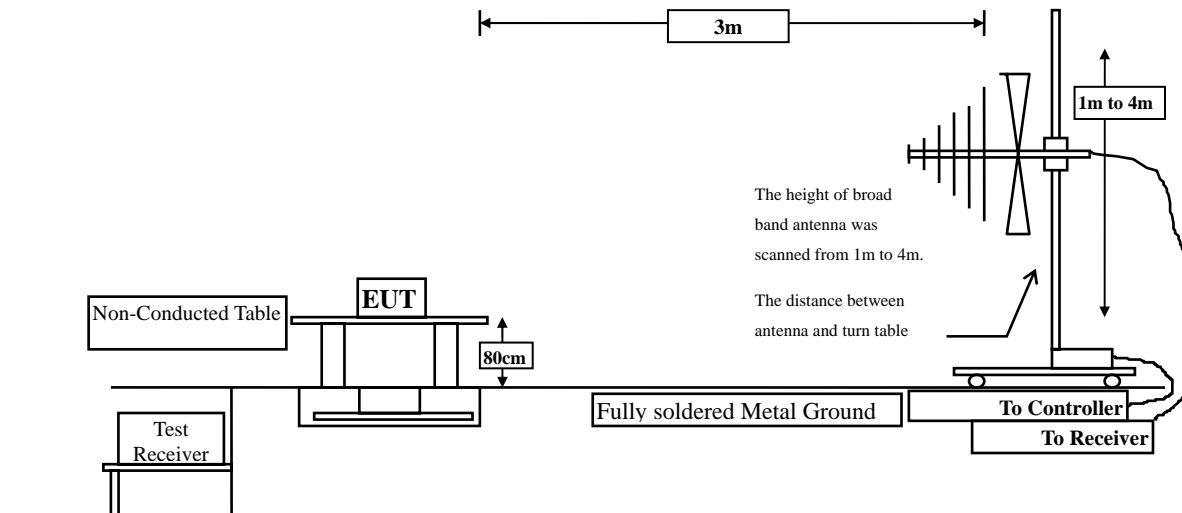

Radiated Emission Above 1GHz

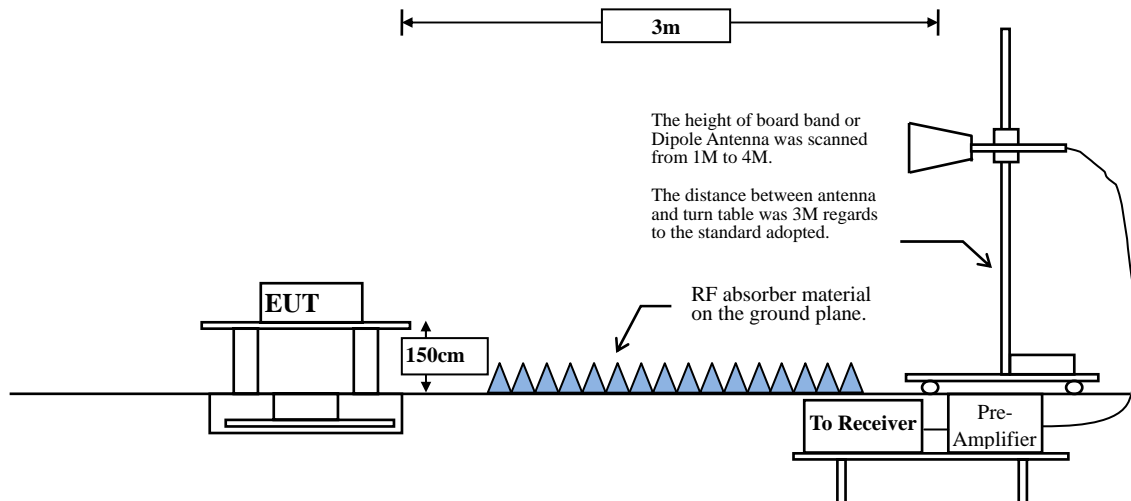

4.2. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remarks:
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

RBW and VBW Parameter setting:

According to KDB 558074 section 12.2.4. Peak power measurement procedure

RBW = as specified in Table 1.

$VBW \geq 3 \times RBW$.

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to KDB 558074 section 12.2.5. Average power measurement procedure

RBW = 1MHz.

VBW = 10Hz, when duty cycle ≥ 98 %

$VBW \geq 1/T$, when duty cycle < 98 %

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)

2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.15.4	100	--	--	10

Note: Duty Cycle Refer to Section 9

4.4. Uncertainty

Horizontal polarization :

30-300MHz: ± 4.08 dB ; 300M-1GHz: ± 3.86 dB ; 1-18GHz: ± 3.77 dB ; 18-40GHz: ± 3.98 dB

Vertical polarization :

30-300MHz: ± 4.81 dB ; 300M-1GHz: ± 3.87 dB ; 1-18GHz: ± 3.83 dB ; 18-40GHz: ± 3.98 dB

4.5. Test Result of Radiated Emission

Product : Remote controller
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit(2405MHz)
 Test Date : 2017/09/08

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4810.000	-6.116	61.860	55.744	-18.256	74.000
7215.000	-3.103	57.500	54.397	-19.603	74.000
9620.000	-0.709	51.570	50.861	-23.139	74.000
Average					
Detector:					
4810.000	-6.116	51.530	45.414	-8.586	54.000
7215.000	-3.103	46.090	42.987	-11.013	54.000
Vertical					
Peak Detector:					
4810.000	-6.116	57.770	51.654	-22.346	74.000
7215.000	-3.103	56.850	53.747	-20.253	74.000
9620.000	-0.709	50.780	50.071	-23.929	74.000
Average					
Detector:					
--					54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Remote controller
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit (2440MHz)
 Test Date : 2017/09/08

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4880.000	-6.069	61.450	55.381	-18.619	74.000
7320.000	-3.027	54.320	51.293	-22.707	74.000
9760.000	-0.527	51.720	51.192	-22.808	74.000
Average Detector:					
4880.000	-6.069	51.600	45.531	-8.469	54.000
Vertical					
Peak Detector:					
4880.000	-6.069	56.640	50.571	-23.429	74.000
7320.000	-3.027	53.750	50.723	-23.277	74.000
9760.000	-0.527	52.770	52.242	-21.758	74.000
Average Detector:					
--					54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Remote controller
 Test Item : Harmonic Radiated Emission
 Test Mode : Mode 1: Transmit (2480MHz)
 Test Date : 2017/09/08

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4960.000	-6.055	62.520	56.465	-17.535	74.000
7440.000	-2.861	55.160	52.298	-21.702	74.000
9920.000	-0.306	54.250	53.944	-20.056	74.000
Average					
Detector:					
4960.000	-6.055	52.820	46.765	-7.235	54.000
Vertical					
Peak Detector:					
4960.000	-6.055	55.160	49.105	-24.895	74.000
7440.000	-2.861	56.140	53.278	-20.722	74.000
9920.000	-0.306	52.410	52.104	-21.896	74.000
Average					
Detector:					
--					54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Remote controller
 Test Item : General Radiated Emission
 Test Mode : Mode 1: Transmit (2440MHz)
 Test Date : 2017/08/23


Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
79.203	-15.468	37.379	21.911	-18.089	40.000
166.362	-11.084	30.014	18.930	-24.570	43.500
558.580	-5.035	31.220	26.185	-19.815	46.000
665.420	-3.537	31.081	27.544	-18.456	46.000
890.348	-0.445	30.732	30.287	-15.713	46.000
994.377	0.795	30.839	31.634	-22.366	54.000
Vertical					
74.986	-14.605	46.928	32.323	-7.677	40.000
96.072	-16.699	53.666	36.967	-6.533	43.500
190.261	-13.634	35.016	21.382	-22.118	43.500
441.899	-7.050	30.925	23.875	-22.125	46.000
744.145	-2.196	31.245	29.049	-16.951	46.000
932.522	0.032	31.119	31.152	-14.848	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

5. RF Antenna Conducted Test

5.1. Test Setup

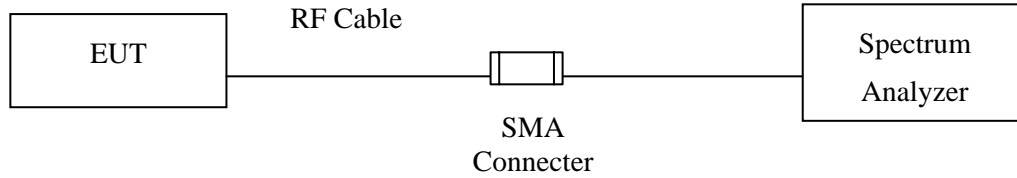

5.2. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.3. Test Procedure

The EUT was tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.

5.4. Uncertainty

±1.23dB

5.5. Test Result of RF Antenna Conducted Test

Product : Remote controller
Test Item : RF Antenna Conducted Test
Test Mode : Mode 1: Transmit
Test Date : 2017/08/29

Figure Channel 11:

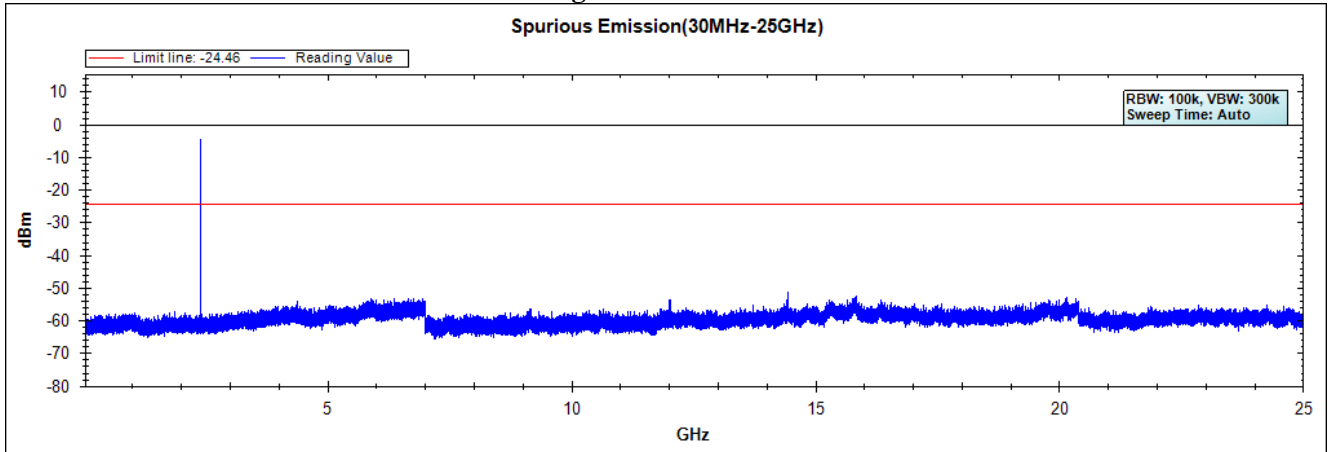


Figure Channel 18:


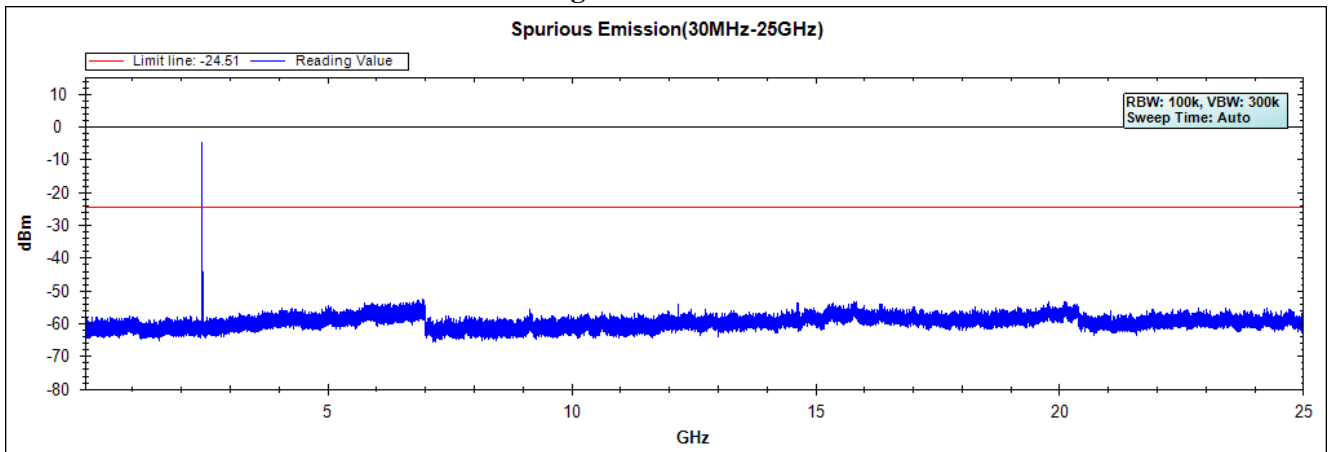


Figure Channel 26:

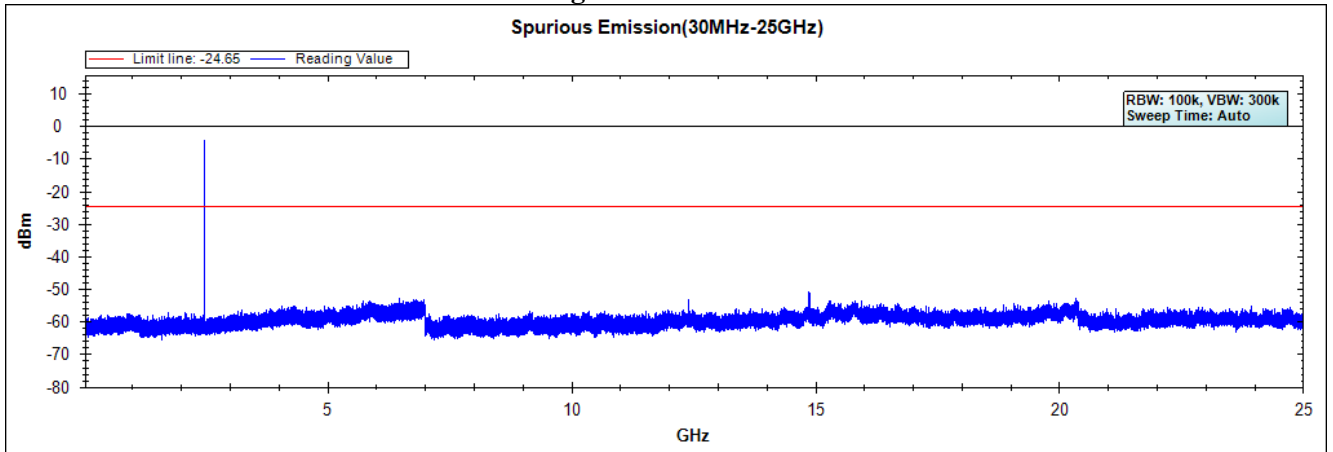


Note: The above test pattern is synthesized by multiple of the frequency range.


6. Band Edge

6.1. Test Setup

RF Conducted Measurement

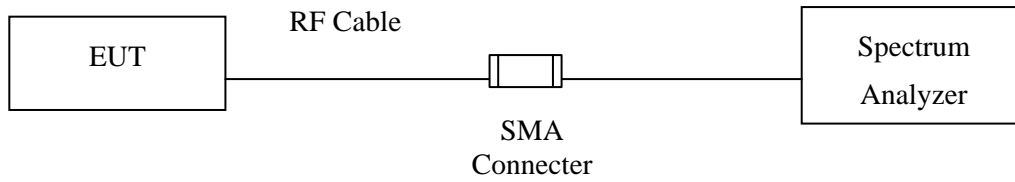

RF Radiated Measurement:

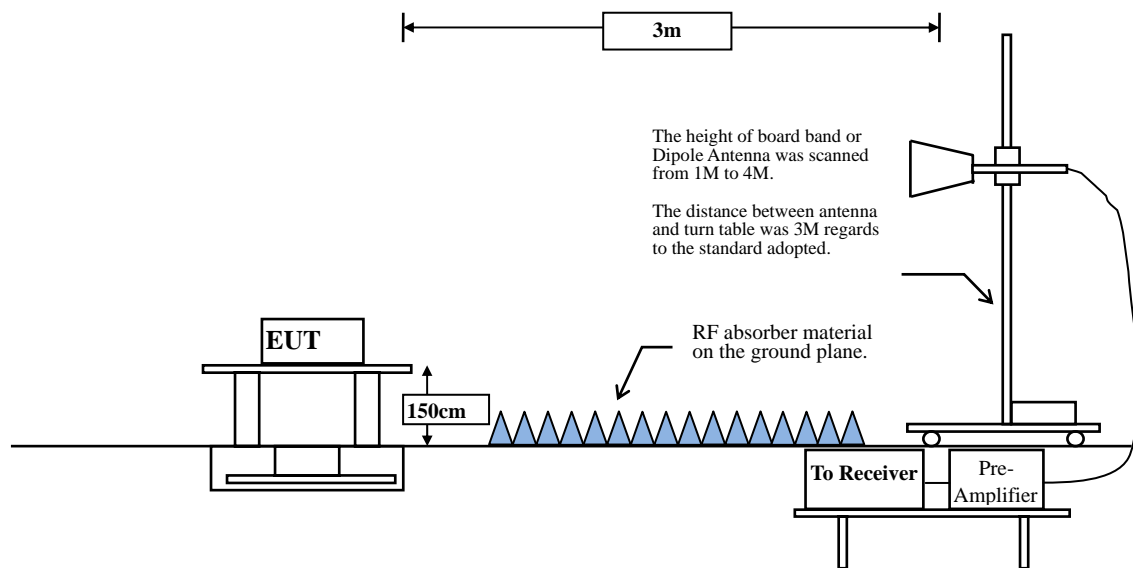

6.2. Limit

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.

RBW and VBW Parameter setting:

According to KDB 558074 section 12.2.4. Peak power measurement procedure

RBW = as specified in Table 1.

$VBW \geq 3 \times RBW$.

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to KDB 558074 section 12.2.5. Average power measurement procedure

RBW = 1MHz.

VBW = 10Hz, when duty cycle $\geq 98\%$

$VBW \geq 1/T$, when duty cycle $< 98\%$

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)

2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.15.4	100	--	--	10

Note: Duty Cycle Refer to Section 9

6.4. Uncertainty

Conducted: $\pm 1.23\text{dB}$

Radiated:

Horizontal polarization : 1-18GHz: $\pm 3.77\text{dB}$

Vertical polarization : 1-18GHz : $\pm 3.83\text{dB}$

6.5. Test Result of Band Edge

Product : Remote controller
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit
 Test Date : 2017/08/23

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2355.217	10.119	38.137	48.256	74.00	54.00	Pass
11 (Peak)	2390.000	10.262	36.583	46.845	74.00	54.00	Pass
11 (Peak)	2400.000	10.304	44.461	54.764	--	--	Pass
11 (Peak)	2404.493	10.322	84.294	94.616	--	--	--
11 (Average)	2373.188	10.195	24.801	34.995	74.00	54.00	Pass
11 (Average)	2390.000	10.262	24.451	34.713	74.00	54.00	Pass
11 (Average)	2400.000	10.304	33.458	43.761	--	--	Pass
11 (Average)	2405.072	10.324	82.080	92.404	--	--	--

Figure Channel 11: Horizontal (Peak)


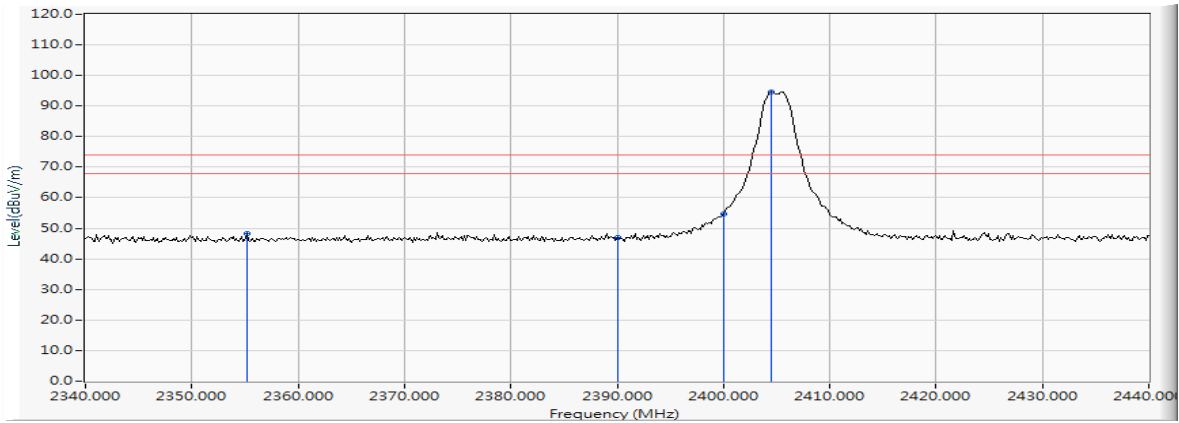


Figure Channel 11: Horizontal (Average)

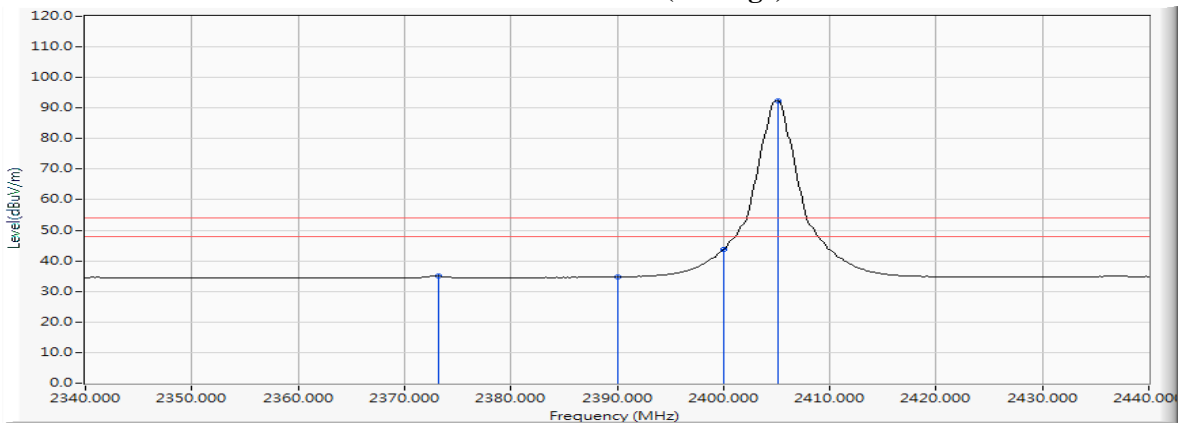

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Remote controller
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit
 Test Date : 2017/08/23

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2388.841	10.257	38.257	48.514	74.00	54.00	Pass
11 (Peak)	2390.000	10.262	35.323	45.585	74.00	54.00	Pass
11 (Peak)	2400.000	10.304	39.482	49.785	--	--	Pass
11 (Peak)	2404.493	10.322	73.291	83.613	--	--	--
11 (Average)	2390.000	10.262	24.298	34.560	74.00	54.00	Pass
11 (Average)	2400.000	10.304	26.845	37.148	--	--	Pass
11 (Average)	2405.072	10.324	71.071	81.395	--	--	--

Figure Channel 11: Vertical (Peak)


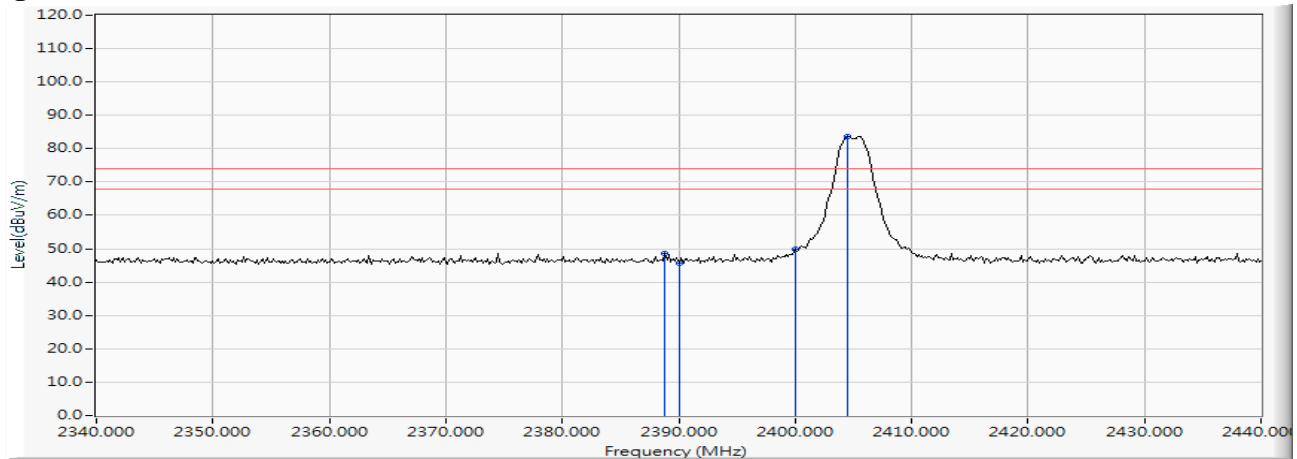


Figure Channel 11: Vertical (Average)

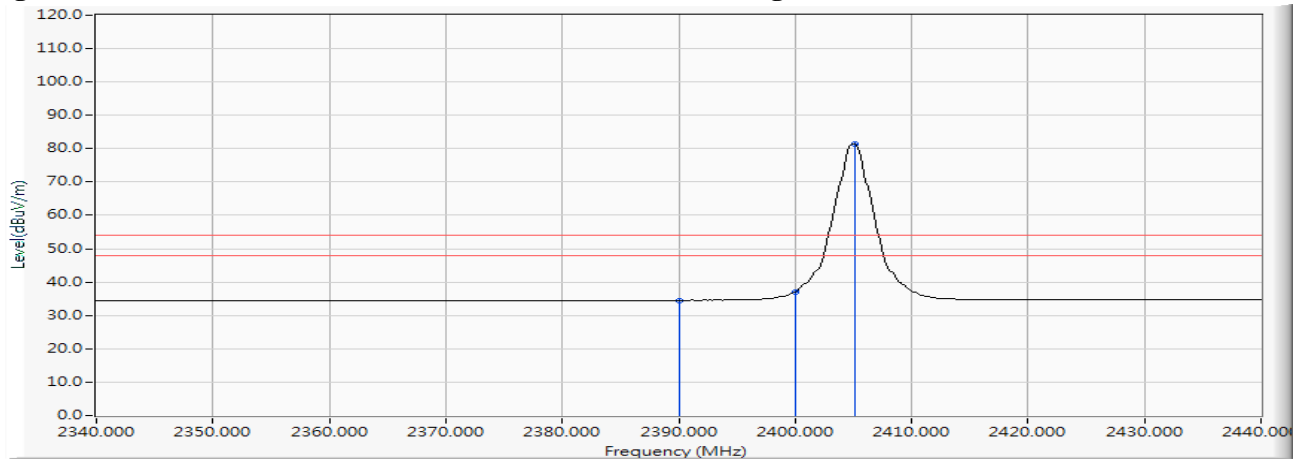

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Remote controller
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit
 Test Date : 2017/08/23

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
26 (Peak)	2480.457	10.630	83.168	93.798	--	--	--
26 (Peak)	2483.500	10.640	50.548	61.189	74.00	54.00	Pass
26 (Average)	2480.022	10.628	80.999	91.627	--	--	--
26 (Average)	2483.500	10.640	38.948	49.589	74.00	54.00	Pass

Figure Channel 26: Horizontal (Peak)


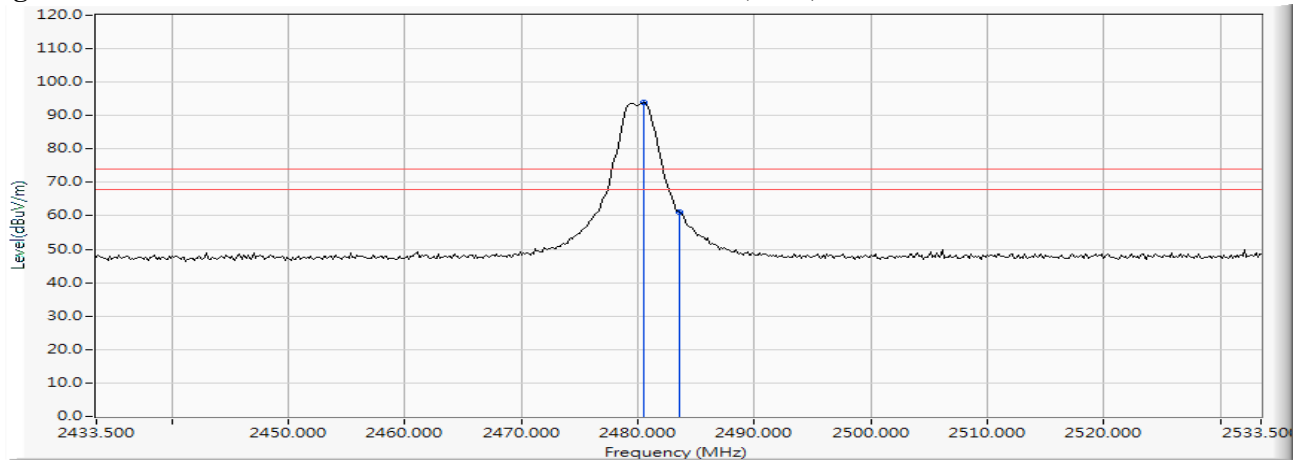


Figure Channel 26: Horizontal (Average)

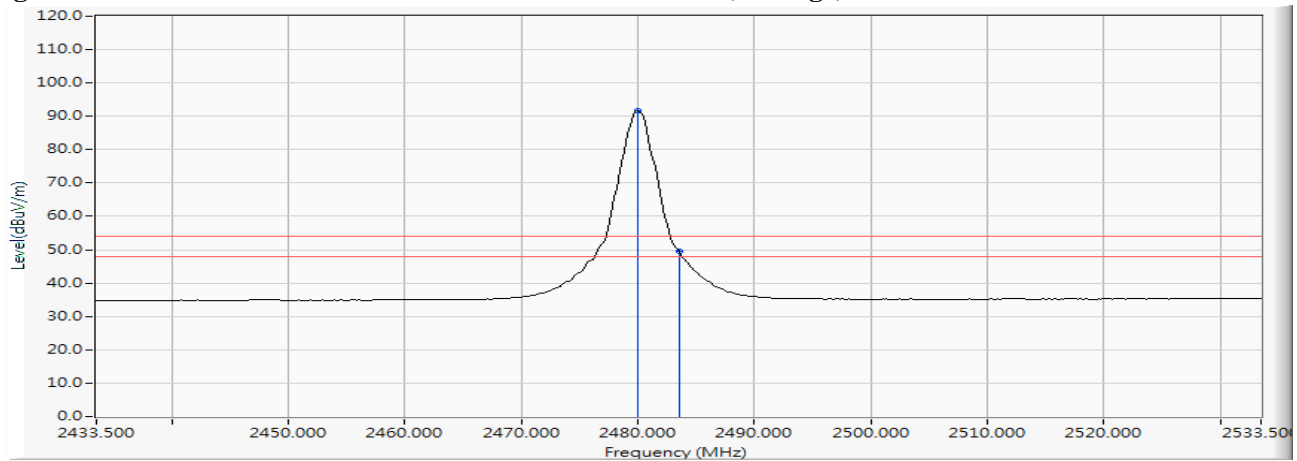

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Remote controller
 Test Item : Band Edge
 Test Mode : Mode 1: Transmit
 Test Date : 2017/08/23

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
26 (Peak)	2480.457	10.630	74.535	85.165	--	--	--
26 (Peak)	2483.500	10.640	43.242	53.883	74.00	54.00	Pass
26 (Average)	2480.022	10.628	72.346	82.974	--	--	--
26 (Average)	2483.500	10.640	32.485	43.126	74.00	54.00	Pass

Figure Channel 26: Vertical (Peak)


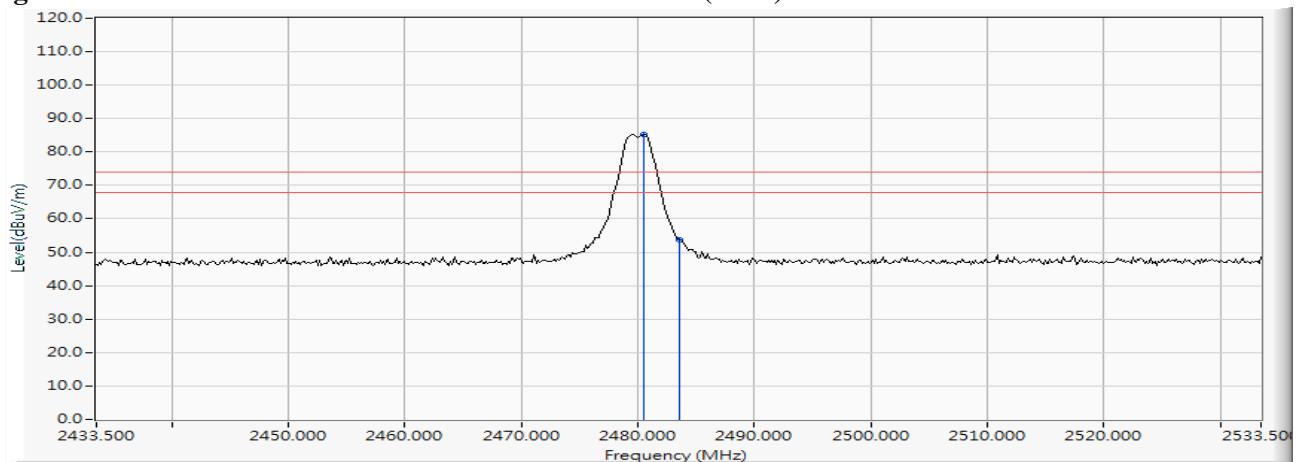


Figure Channel 26: Vertical (Average)

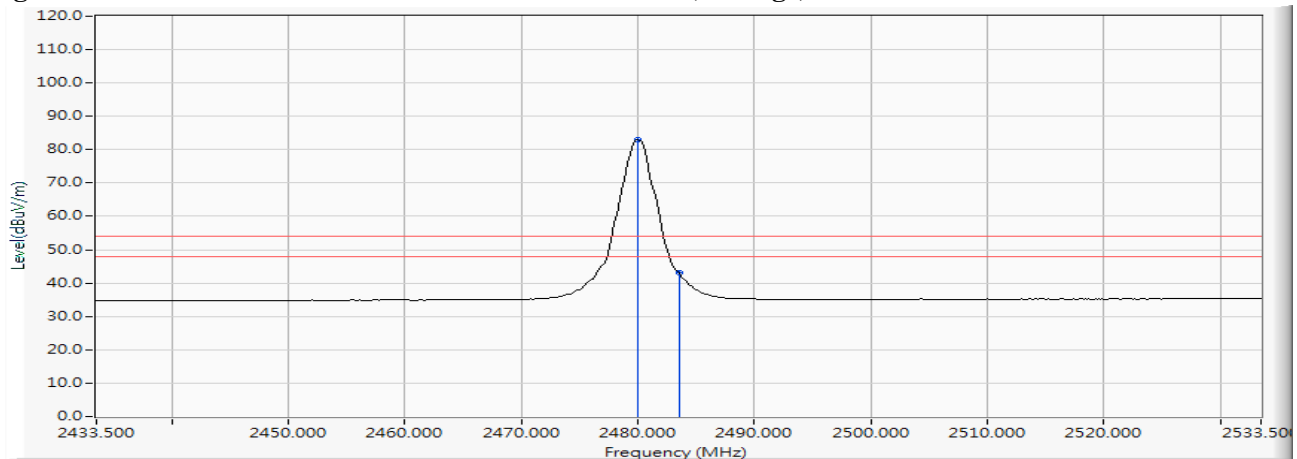


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

7. 6dB Bandwidth

7.1. Test Setup

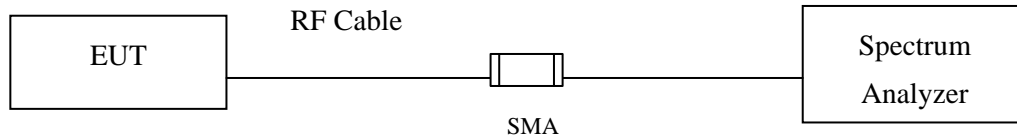

7.2. Limits

The minimum bandwidth shall be at least 500 kHz.

7.3. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 1-5% of the emission bandwidth, $VBW \geq 3 * RBW$

7.4. Uncertainty


$\pm 279.2 \text{ Hz}$

7.5. Test Result of 6dB Bandwidth

Product : Remote controller
 Test Item : 6dB Bandwidth Data
 Test Mode : Mode 1: Transmit (2402MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2405	1660	>500	Pass

Figure Channel 11:

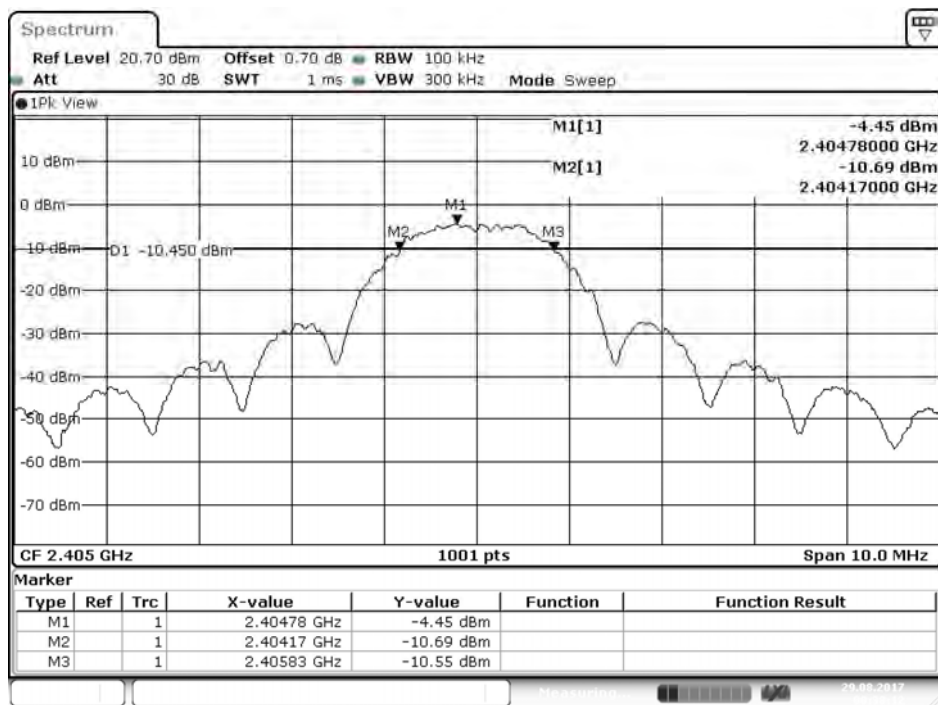


Date: 29.AUG.2017 00:38:12

Product : Remote controller
 Test Item : 6dB Bandwidth Data
 Test Mode : Mode 1: Transmit (2440MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
18	2440	1650	>500	Pass

Figure Channel 18:

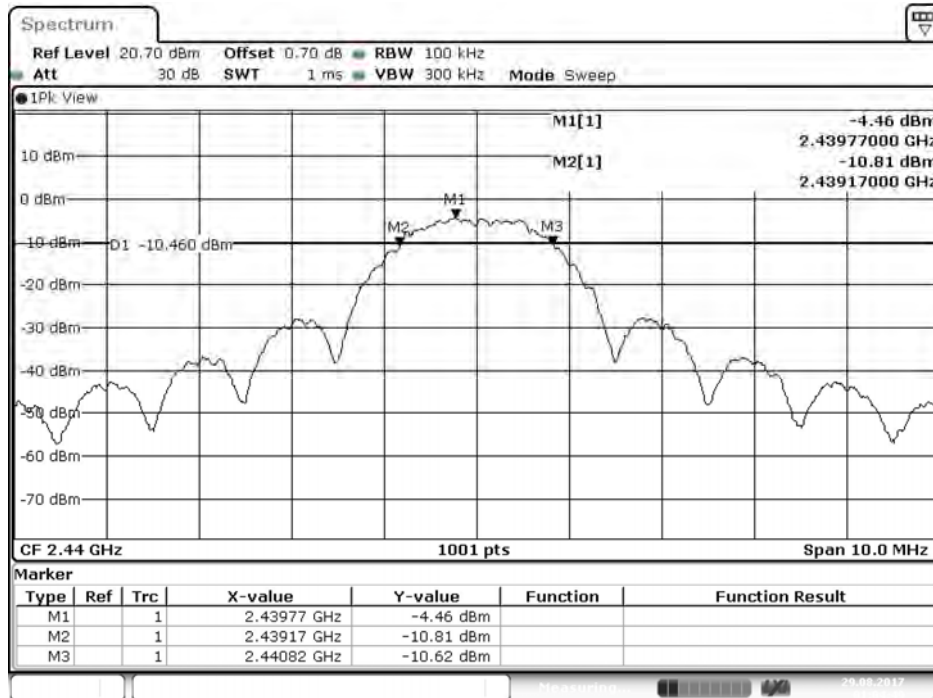


Date: 29.AUG.2017 01:04:50

Product : Remote controller
 Test Item : 6dB Bandwidth Data
 Test Mode : Mode 1: Transmit (2480MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
26	2480	1650	>500	Pass


Figure Channel 26:

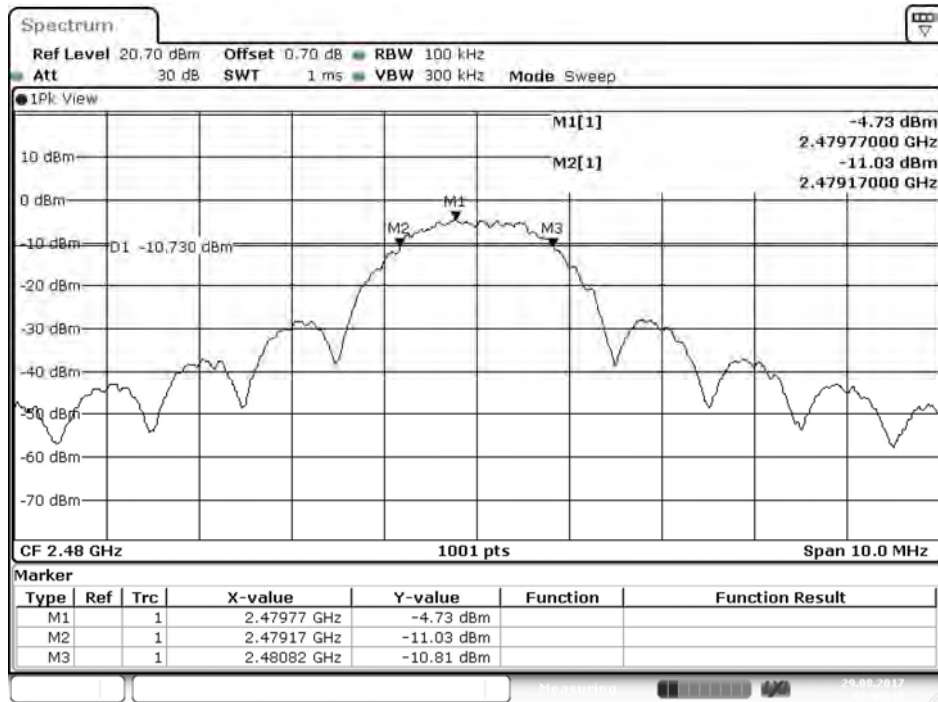

Date: 29.AUG.2017 01:09:11

8. Power Density

8.1. Test Setup

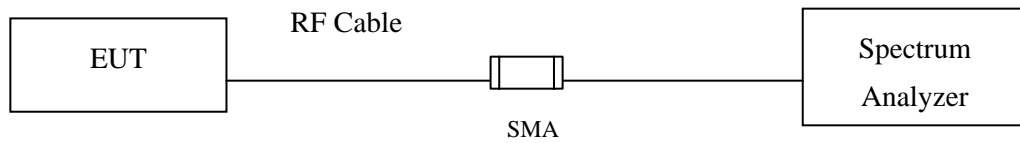

8.2. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

8.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013, the maximum power spectral density using KDB 558074 section 10.2 PKPSD (peak PSD) method.

8.4. Uncertainty


$\pm 1.23\text{dB}$

8.5. Test Result of Power Density

Product : Remote controller
 Test Item : Power Density Data
 Test Mode : Mode 1: Transmit (2402MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
11	2405	-4.46	≤ 8dBm	Pass

Figure Channel 11:

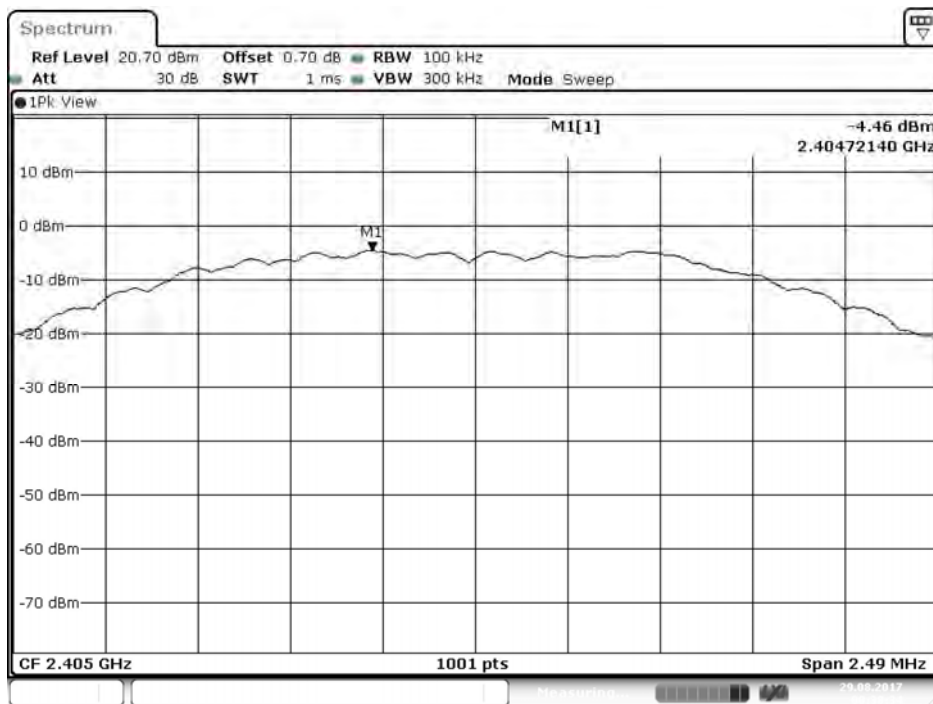


Date: 29.AUG.2017 00:38:34

Product : Remote controller
 Test Item : Power Density Data
 Test Mode : Mode 1: Transmit (2440MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
18	2440	-4.51	≤ 8dBm	Pass

Figure Channel 18:

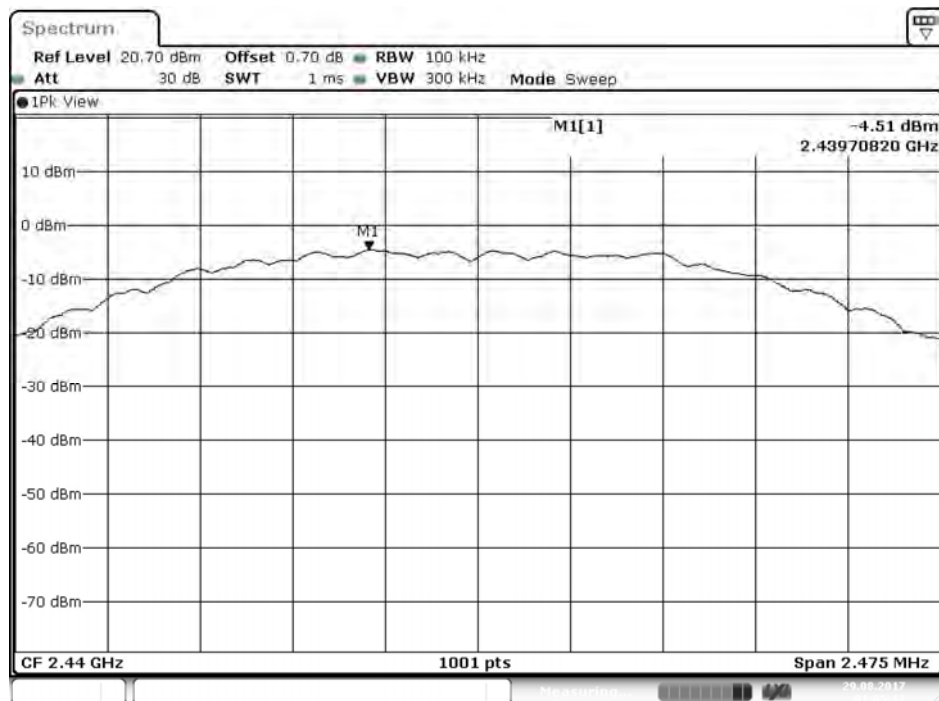


Date: 29.AUG.2017 01:05:12

Product : Remote controller
 Test Item : Power Density Data
 Test Mode : Mode 1: Transmit (2480MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
26	2480	-4.65	≤ 8dBm	Pass


Figure Channel 26:

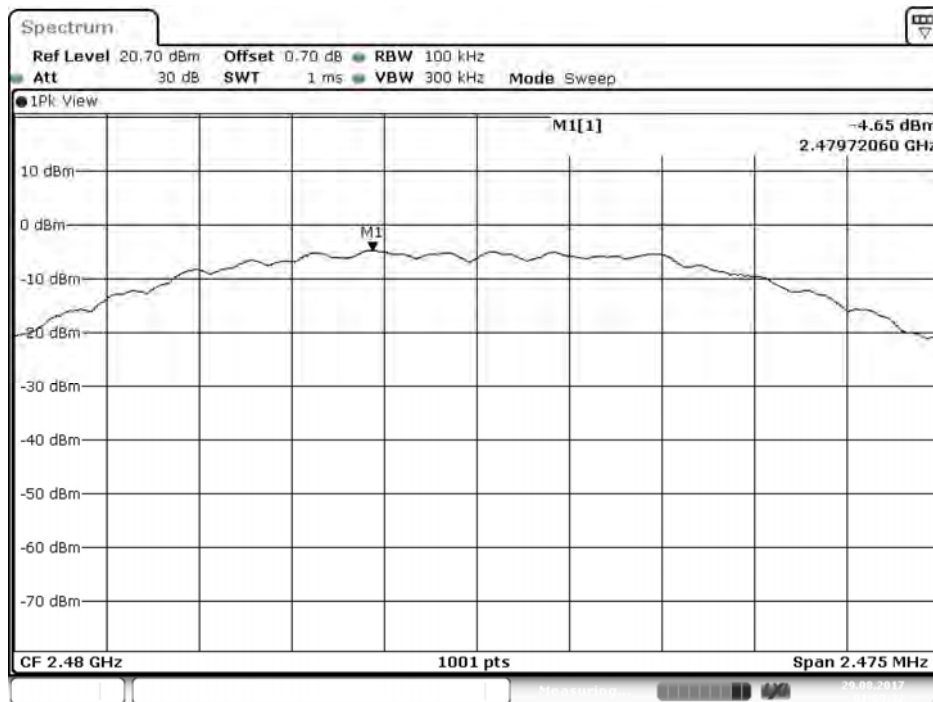

Date: 29.AUG.2017 01:09:32

9. Duty Cycle

9.1. Test Setup

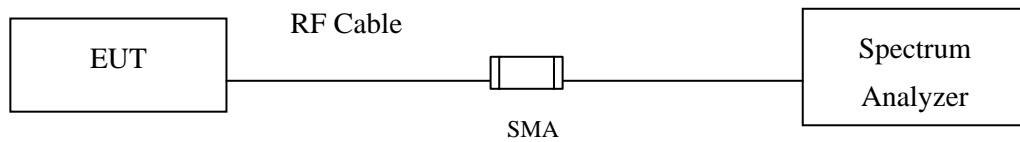

9.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

9.3. Uncertainty

$\pm 2.31\text{msec}$

9.4. Test Result of Duty Cycle

Product : Remote controller
 Test Item : Duty Cycle
 Test Mode : Mode 1: Transmit


Duty Cycle Formula:

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff})$$

$$\text{Duty Factor} = 10 \text{ Log} (1/\text{Duty Cycle})$$

Results:

2.4GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
802.15.4	--	--	100	0

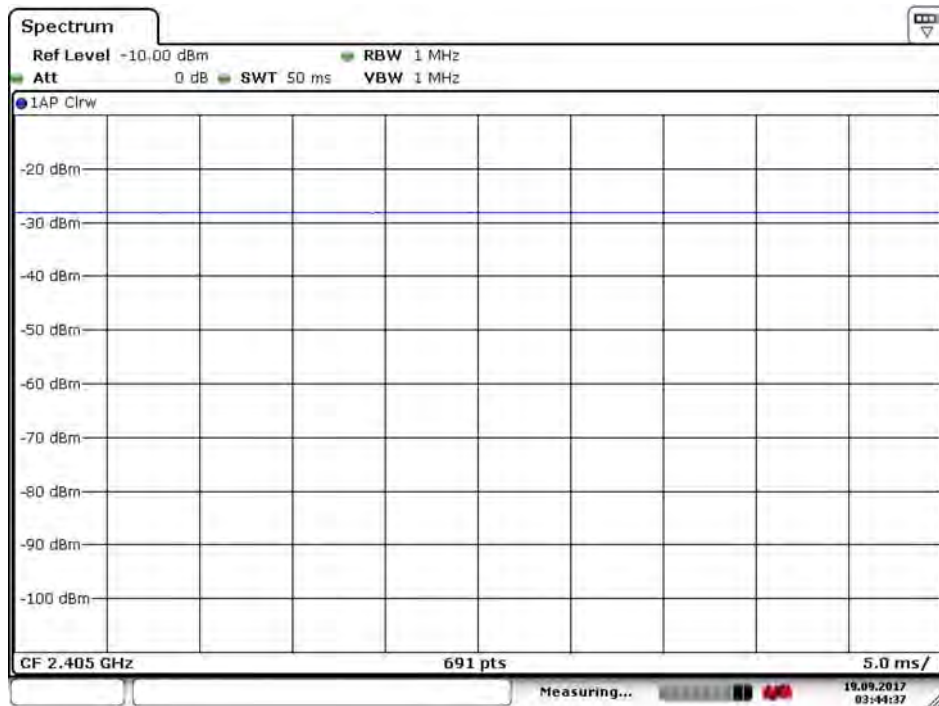

Date: 19.SEP.2017 03:44:37

10. EMI Reduction Method During Compliance Testing

No modification was made during testing.