

# FCC PART 15.247

## TEST REPORT

For

### Changzhou Shincobroad Electronics Co.,Ltd

No.8 West Taihu Road, Xinbei District, Changzhou, China 213022

**FCC ID: 2AOP9-55SVL01**

<b>Report Type:</b> Original Report	<b>Product Type:</b> 55" 4K ULTRA HD TV
<b>Test Engineer:</b> <u>Aaron Wang</u>	<i>Aaron Wang</i>
<b>Report Number:</b> <u>RKSA180112001-00A</u>	
<b>Report Date:</b> <u>2018-02-02</u>	
<b>Reviewed By:</b> <u>Oscar Ye</u> RF Leader	<i>Oscar Ye</i>
<b>Prepared By:</b>	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EQUIPMENT MODIFICATIONS .....	7
EUT EXERCISE SOFTWARE .....	7
SUPPORT EQUIPMENT LIST AND DETAILS .....	10
EXTERNAL I/O CABLE.....	10
BLOCK DIAGRAM OF TEST SETUP .....	10
<b>SUMMARY OF TEST RESULTS.....</b>	<b>12</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>13</b>
<b>FCC §1.1310 &amp; §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....</b>	<b>14</b>
APPLICABLE STANDARD .....	14
CALCULATED DATA:.....	14
<b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>	<b>15</b>
APPLICABLE STANDARD .....	15
ANTENNA CONNECTOR CONSTRUCTION .....	15
<b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>16</b>
APPLICABLE STANDARD .....	16
EUT SETUP.....	16
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE .....	16
CORRECTED FACTOR & MARGIN CALCULATION .....	17
TEST RESULTS SUMMARY.....	17
TEST DATA .....	17
<b>FCC §15.209, §15.205 &amp; §15.247(d) - SPURIOUS EMISSIONS.....</b>	<b>20</b>
APPLICABLE STANDARD .....	20
EUT SETUP .....	20
EMI TEST RECEIVER SETUP.....	21
TEST PROCEDURE .....	21
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	21
TEST RESULTS SUMMARY .....	21
TEST DATA .....	22
<b>FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....</b>	<b>51</b>
APPLICABLE STANDARD .....	51
TEST PROCEDURE .....	51
TEST DATA .....	51
<b>FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....</b>	<b>65</b>

---

APPLICABLE STANDARD .....	65
TEST PROCEDURE .....	65
TEST DATA .....	65
<b>FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....</b>	<b>67</b>
APPLICABLE STANDARD .....	67
TEST PROCEDURE .....	67
TEST DATA .....	67
<b>FCC §15.247(e) - POWER SPECTRAL DENSITY .....</b>	<b>76</b>
APPLICABLE STANDARD .....	76
TEST PROCEDURE .....	76
TEST DATA .....	76

FUNNIAL

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Applicant	Changzhou Shincobroad Electronics Co.,Ltd
Tested Model	55SVL01
Series Model	55CSV02
Model Difference	Model name
Product Type	55" 4K ULTRA HD TV
Dimension	49.2" (W) x 28.7" (H) x 3.7" (D)
Power Supply	AC 100-240V

*\*All measurement and test data in this report was gathered from production sample serial number: 20180108001 (Assigned by the BACL. The EUT supplied by the applicant was received on 2018-01-08)*

### Objective

This report is prepared on behalf of Changzhou Shincobroad Electronics Co.,Ltd in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

No related Submittal(s)/Grant(s)

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB558074 D01 DTS Meas Guidance v04.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

### Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

Channel list for 802.11b, 802.11g and 802.11n-HT20 mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	/	/
6	2437	/	/
7	2442	/	/

EUT was tested with Channel 1, 6 and 11.

Channel list for 802.11n-HT40 mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	8	2447
4	2427	9	2452
5	2432	/	/
6	2437	/	/
7	2442	/	/

EUT was tested with Channel 3, 6 and 9.

For Conducted Test:

802.11b & 802.11g: each transmit chains were tested

802.11n: each transmit chains were tested

For Radiated Test:

802.11b & 802.11g, SISO for each transmit chain

For 802.11n: MIMO for two transmit chains

**Equipment Modifications**

No modification was made to the EUT tested.

**EUT Exercise Software**


RF test tool : SecureCRT

Pre-scan with all the data rates, and the worst case was performed as below:

Mode	Data rate	Power level		
		Chain 0	Chain 1	
		Low/Middle/High channel	Low channel	Middle/High channel
802.11b	1 Mbps	13	7	10
802.11g	6 Mbps	13	8	11
802.11n-HT20	MCS0	14	8	11
802.11n-HT40	MCS0	9	4	7


Duty Cycle:

802.11b Mode Middle Channel

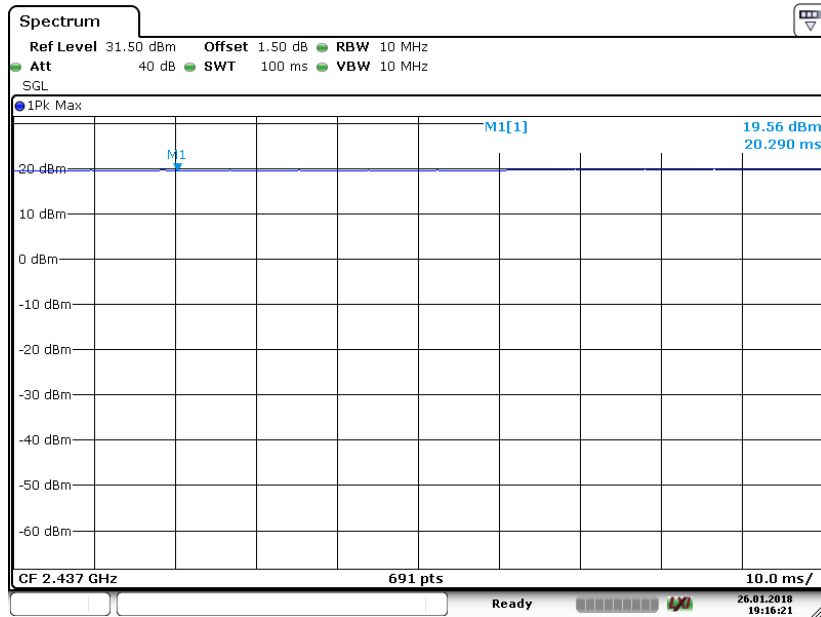

Date: 26 JAN 2018 19:16:21


802.11g Mode Middle Channel

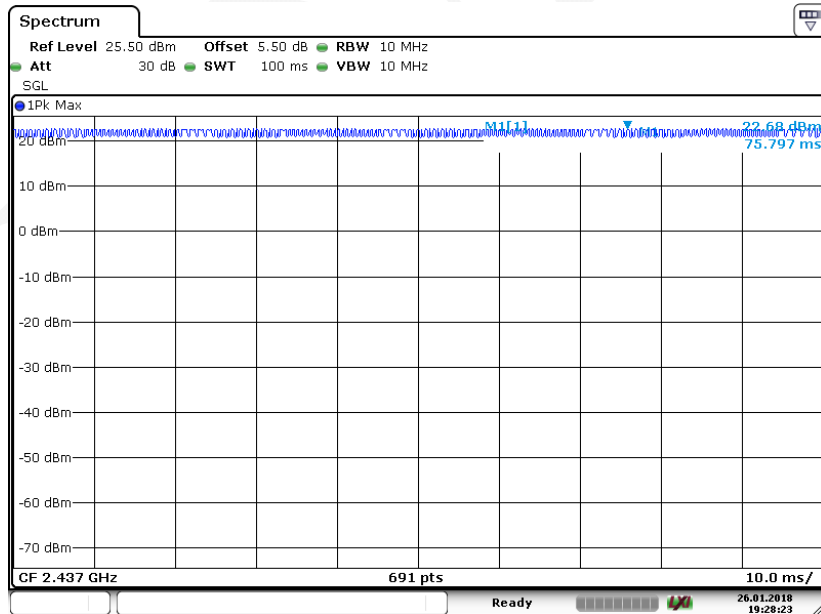

Date: 26 JAN 2018 19:28:23




### 802.11n-HT20 Mode Middle Channel

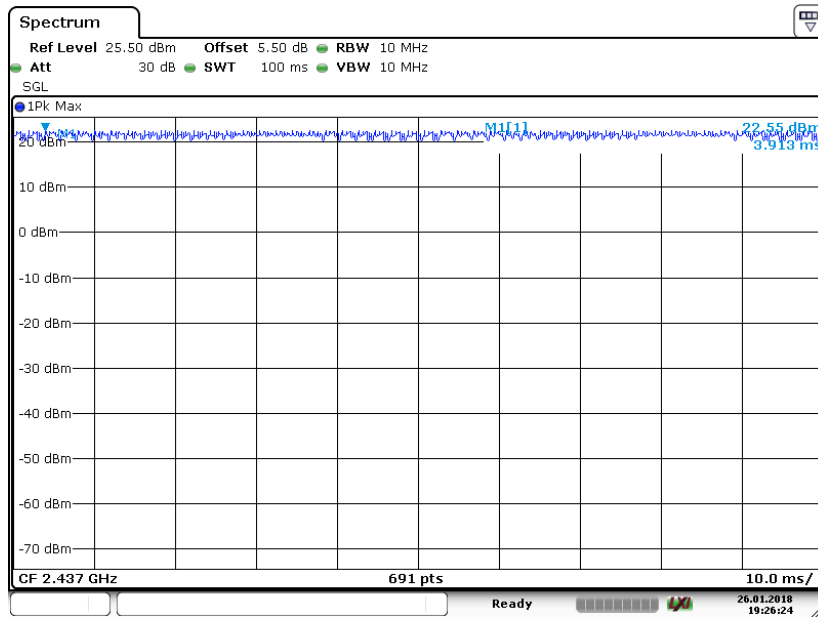

Date: 26 JAN 2018 19:26:25

### 802.11n-HT40 Mode Middle Channel

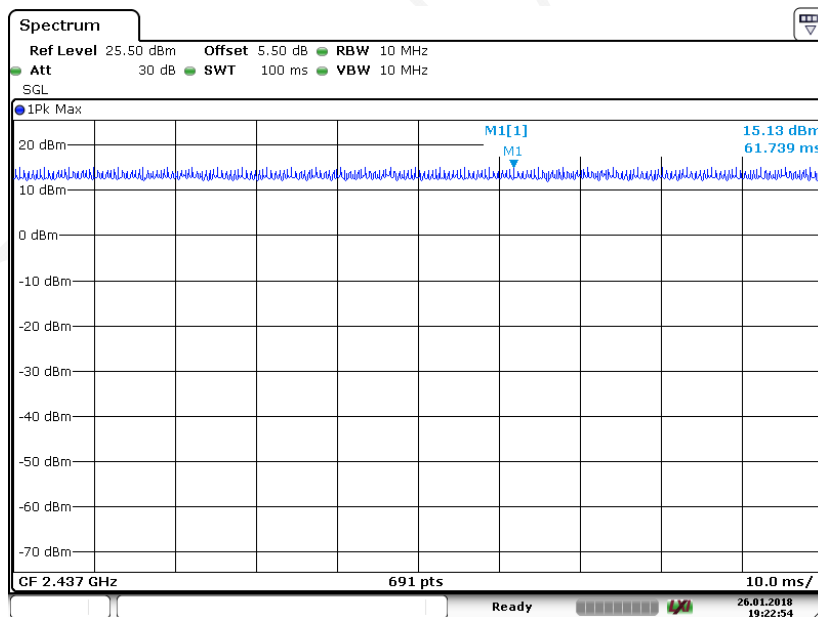

Date: 26 JAN 2018 19:22:55

Mode	Duty Cycle	T(ms)	1/T(kHz)	10log(1/x)
802.11b	100.00%	/	/	0.00
802.11g	100.00%	/	/	0.00
802.11n-HT20	100.00%	/	/	0.00
802.11n-HT40	100.00%	/	/	0.00

Note: “x” means the Duty Cycle.

**Support Equipment List and Details**


Manufacturer	Description	Model	Serial Number
DELL	Notebook	GX620	D65874152
DELL	Adapter	LA65NS0-00	DF263
Shincobroad	Control Board	/	/

**External I/O Cable**


Cable Description	Length (m)	From Port	To
VGA Cable	0.8	EUT	Control Board

**Block Diagram of Test Setup**


For Conducted Emissions:

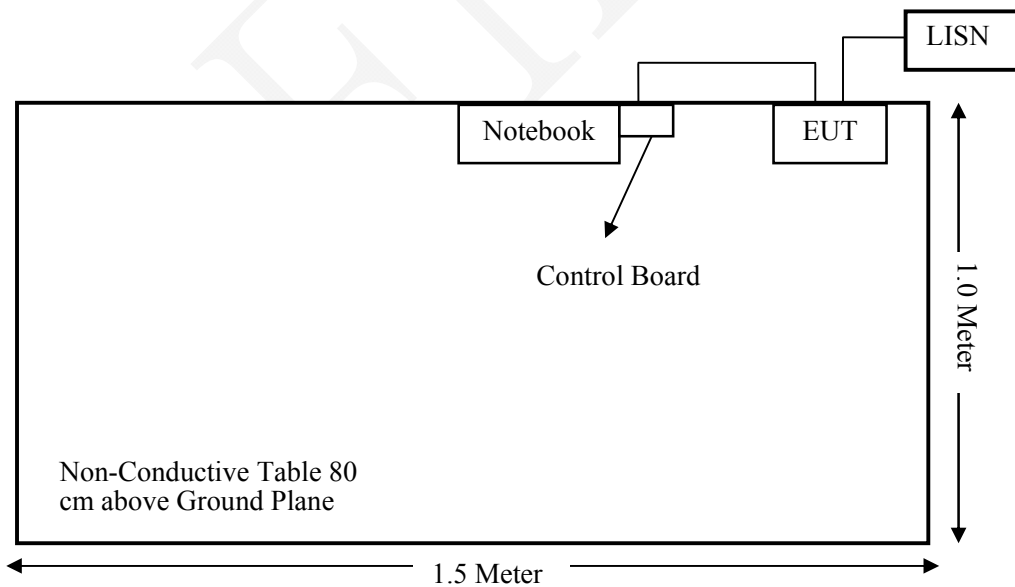

For Radiated Emissions(Below 1GHz):

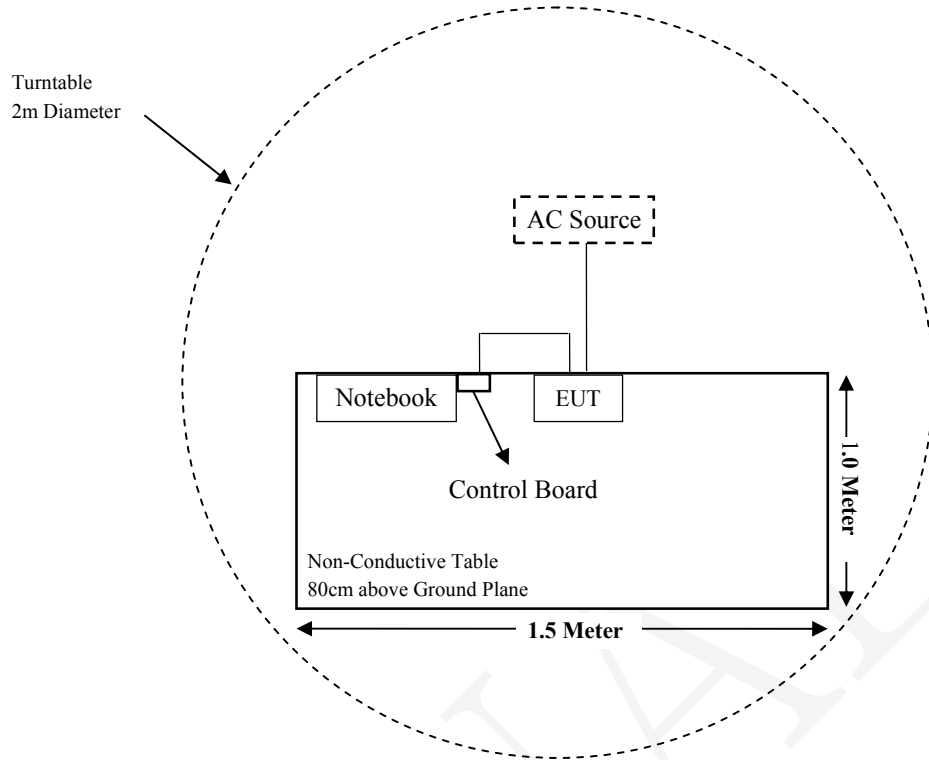

For Radiated Emissions(Above 1GHz):

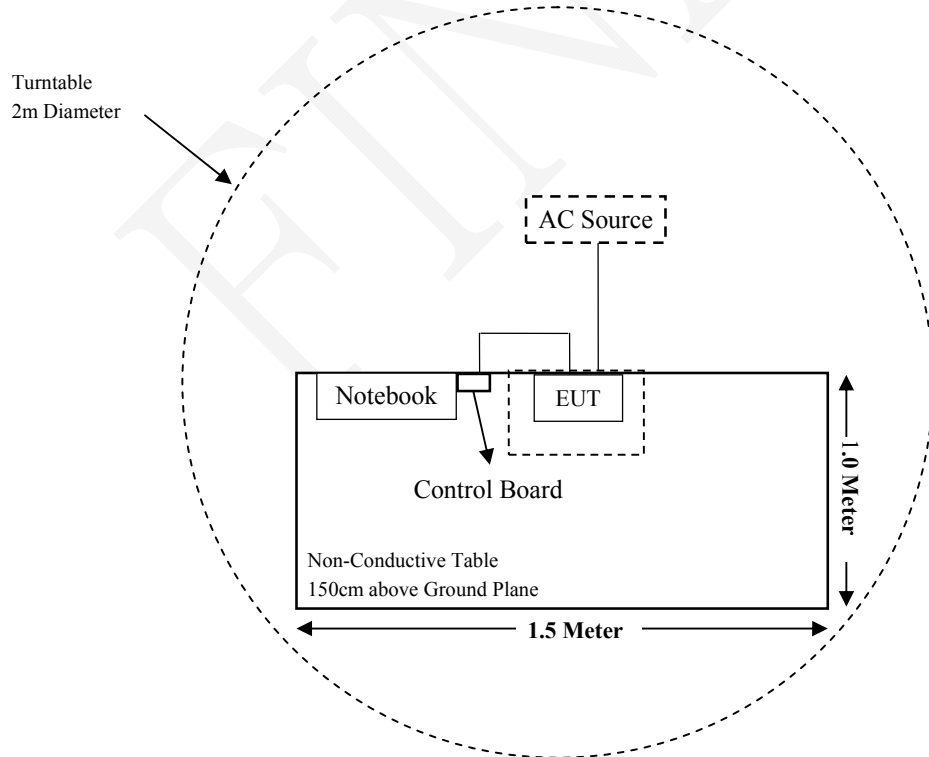

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Radiated Emission Test (Chamber 1#)</b>					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2017-11-12	2018-11-11
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2017-08-15	2018-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2017-08-15	2018-08-14
<b>Radiated Emission Test (Chamber 2#)</b>					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2017-08-27	2018-08-26
ETS-LINDGREN	Horn Antenna	3115	6229	2016-01-11	2019-01-10
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-10-18	2019-10-17
SINOSCITE	Band Reject Filter	BSF2402-2480MN-0898	/	2017-08-05	2018-08-04
Narda	Pre-amplifier	AFS42-00101800	2001270	2017-12-12	2018-12-11
Heatsink Required	Amplifier	QLW-18405536-J0	15964001009	2017-12-12	2018-12-11
Narda	Attenuator/10dB	10dB	/	2017-12-12	2018-12-11
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2017-08-15	2018-08-14
<b>RF Conducted Test</b>					
Rohde & Schwarz	FSV40 Signal Analyzer	FSV40	101116	2017-07-22	2018-07-21
Narda	Attenuator/2dB	2dB	/	2017-12-12	2018-12-11
Agilent	Power Meter	N1912A	MY5000492	2017-11-18	2018-11-17
Agilent	Power Sensor	N1921A	MY54210024	2017-11-18	2018-11-17
Shincobroad	RF Cable	/	/	/	/
<b>Conducted Emission Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2017-11-12	2018-11-11
Rohde & Schwarz	LISN	ESH3-Z5	862770/011	2017-11-12	2018-11-11
BACL	Auto test Software	BACL-EMC	CE001	/	/
Narda	Attenuator/6dB	10690812-2	26850-6	2018-01-10	2019-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2017-08-15	2018-08-14

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

### Applicable Standard

According to §2.1091 and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission’s guideline.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; \* = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

### Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$  = power density (in appropriate units, e.g. mW/cm<sup>2</sup>);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

### Calculated Data:

Mode	Frequency (MHz)	Antenna Gain		Tune-up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )
		(dBi)	(numeric)	(dBm)	(mW)			
802.11b	2412-2462	1.20	1.32	17.00	50.12	20	0.0131	1.0
802.11g		1.20	1.32	17.00	50.12	20	0.0131	1.0
802.11n-HT20		1.20	1.32	20.00	100.00	20	0.0262	1.0
802.11n-HT40	2422-2452	1.20	1.32	17.00	50.12	20	0.0131	1.0

**Result:** The device meet FCC MPE at 20 cm distance.

## **FCC §15.203 - ANTENNA REQUIREMENT**

### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
  - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **Antenna Connector Construction**

<b>Chain</b>	<b>Antenna Type</b>	<b>Max. Antenna Gain</b>
0	PIFA	1.2 dBi
1	PIFA	1.2 dBi


**Result:** Compliance.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC§15.207

### EUT Setup

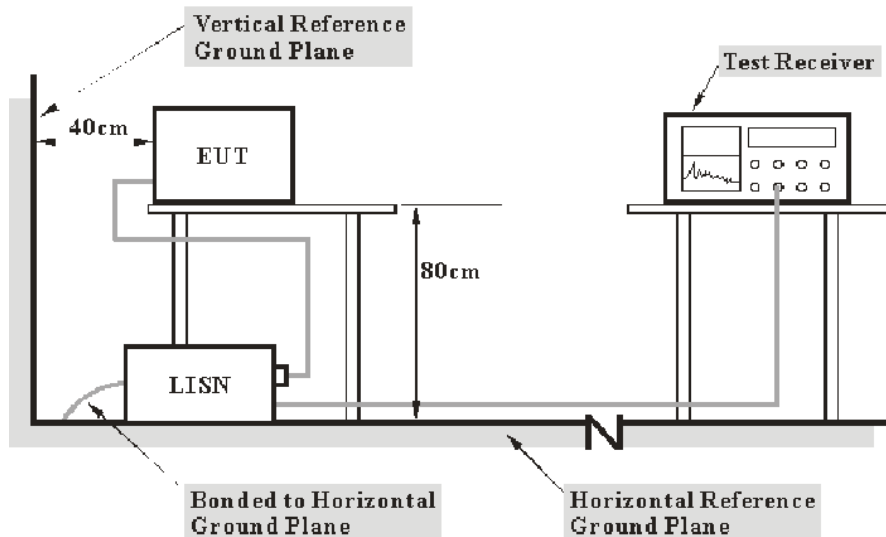

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 30 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.



### Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Corrected Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Reading}$$

### Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

#### Test Data


##### Environmental Conditions

<b>Temperature:</b>	20.2 °C
<b>Relative Humidity:</b>	51 %
<b>ATM Pressure:</b>	101.3 kPa

*The testing was performed by Aaron Wang on 2018-01-23.*


EUT operation mode: Transmitting in low channel of 802.11n-HT20 mode (worst case)

AC 120V/60 Hz, Line

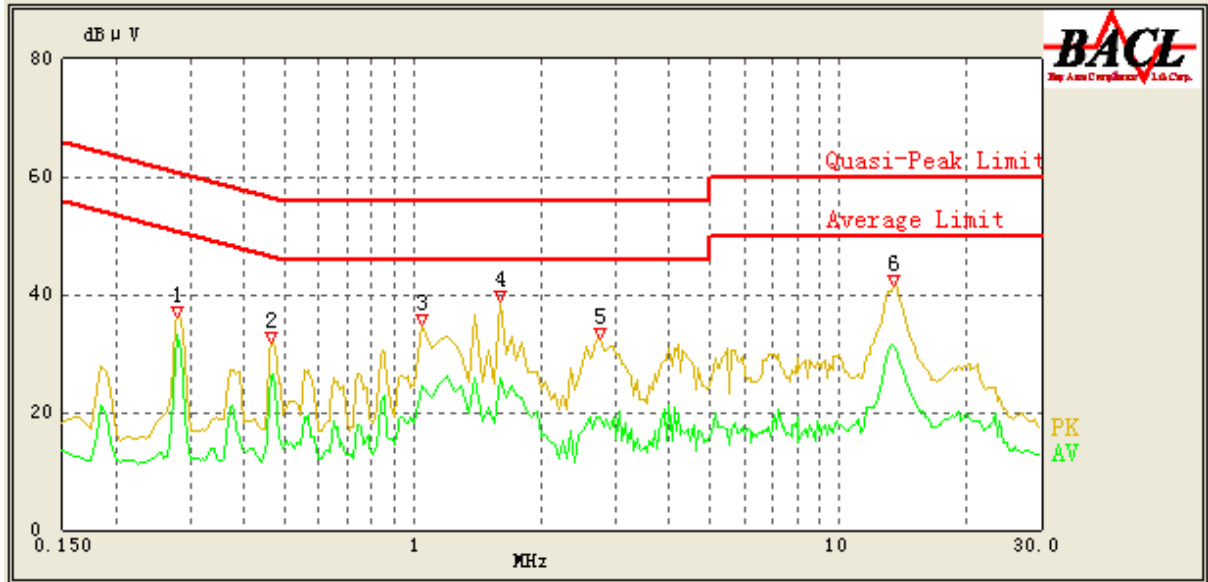

Frequency (MHz)	Reading (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Correction (dB)	Limit (dBμV)	Margin (dB)	Comment
0.280	36.15	QP	9.000	L1	16.03	62.29	26.14	Compliance
0.280	33.14	AV	9.000	L1	16.03	52.29	19.15	Compliance
0.465	31.89	QP	9.000	L1	16.07	57.00	25.11	Compliance
0.465	25.70	AV	9.000	L1	16.07	47.00	21.30	Compliance
1.050	34.70	QP	9.000	L1	15.88	56.00	21.30	Compliance
1.050	24.46	AV	9.000	L1	15.88	46.00	21.54	Compliance
1.600	38.98	QP	9.000	L1	15.86	56.00	17.02	Compliance
1.600	25.68	AV	9.000	L1	15.86	46.00	20.32	Compliance
2.750	32.57	QP	9.000	L1	15.85	56.00	23.43	Compliance
2.750	19.06	AV	9.000	L1	15.85	46.00	26.94	Compliance
13.500	41.52	QP	9.000	L1	16.16	60.00	18.48	Compliance
13.500	31.01	AV	9.000	L1	16.16	50.00	18.99	Compliance

**AC 120V/60 Hz, Neutral**

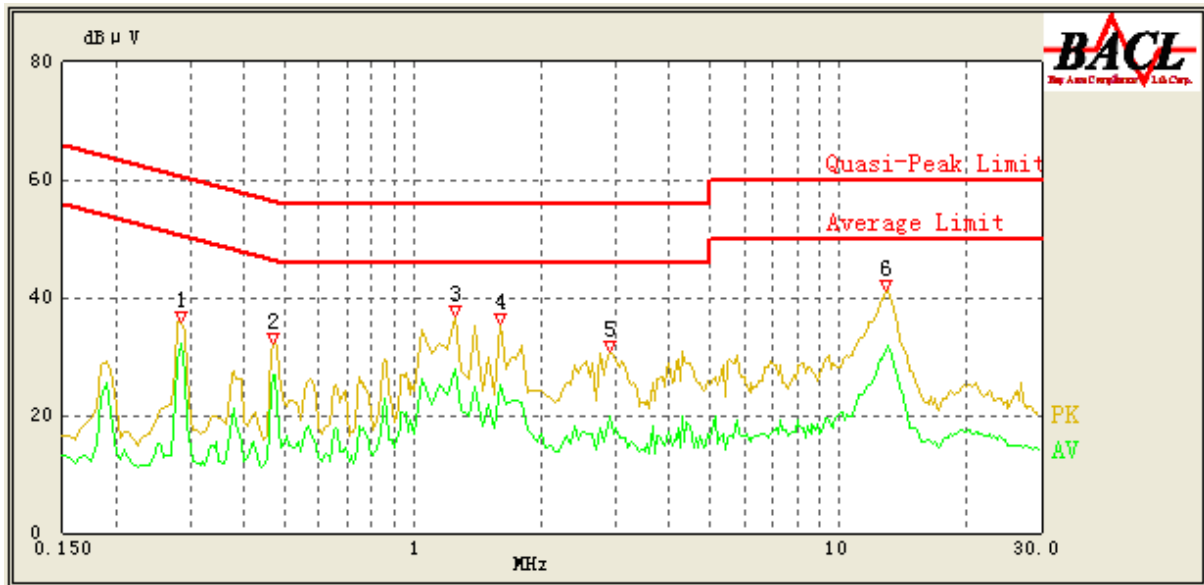

Frequency (MHz)	Reading (dBµV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Correction (dB)	Limit (dBµV)	Margin (dB)	Comment
0.285	35.71	QP	9.000	N	16.07	62.14	26.43	Compliance
0.285	32.07	AV	9.000	N	16.07	52.14	20.07	Compliance
0.470	32.06	QP	9.000	N	16.10	56.86	24.80	Compliance
0.470	26.72	AV	9.000	N	16.10	46.86	20.14	Compliance
1.250	36.72	QP	9.000	N	15.93	56.00	19.28	Compliance
1.250	27.68	AV	9.000	N	15.93	46.00	18.32	Compliance
1.600	35.41	QP	9.000	N	15.92	56.00	20.59	Compliance
1.600	25.09	AV	9.000	N	15.92	46.00	20.91	Compliance
2.900	30.95	QP	9.000	N	15.90	56.00	25.05	Compliance
2.900	19.78	AV	9.000	N	15.90	46.00	26.22	Compliance
12.900	41.20	QP	9.000	N	16.00	60.00	18.80	Compliance
13.000	31.70	AV	9.000	N	16.00	50.00	18.30	Compliance

**Note:**

- 1) Corr.=LISN VDF (Voltage Division Factor) + Cable Loss
- 2) Margin = Limit – Reading


**FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**

**Applicable Standard**


FCC §15.247 (d); §15.209; §15.205;

**EUT Setup**

**Below 1 GHz:**

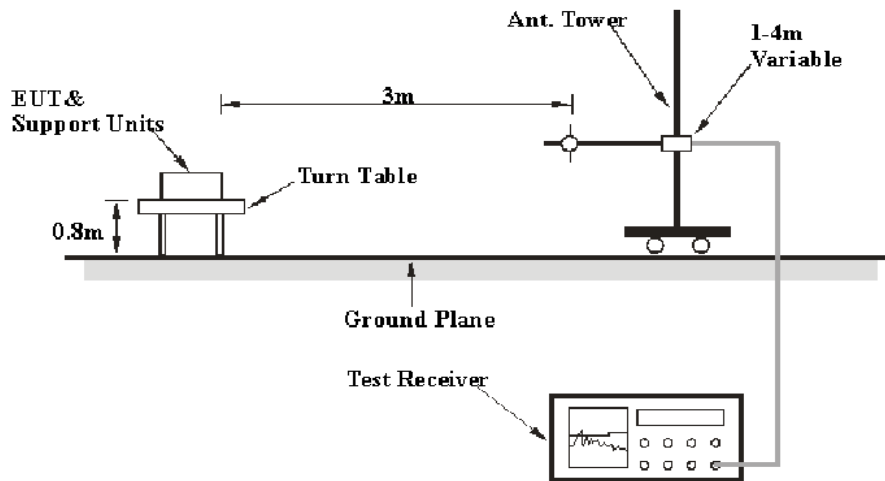

**Above 1GHz:**

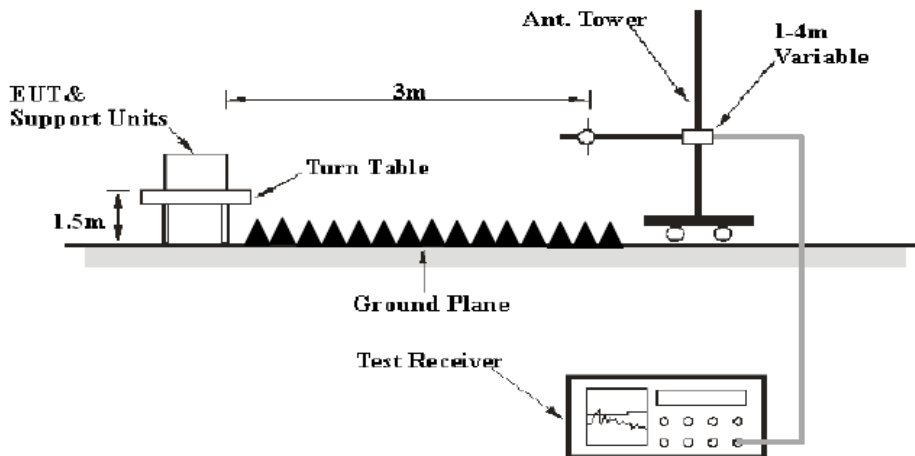

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

## EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection mode for frequencies above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

**Test Data**

**Environmental Conditions**


<b>Temperature:</b>	24.8 °C
<b>Relative Humidity:</b>	51 %
<b>ATM Pressure:</b>	101.2 kPa

The testing was performed by Aaron Wang on 2018-01-20 to 2018-01-22.

**Spurious Emission Test:**

**30MHz-1GHz:**

Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case high channel of 802.11n-HT20 mode in X-axis of orientation was recorded

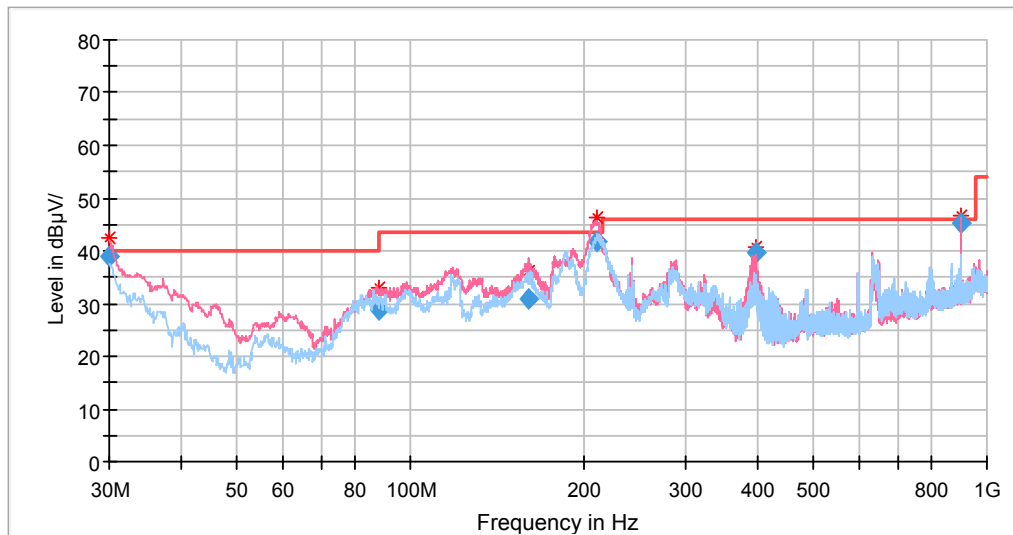

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	QuasiPeak (dB µ V/m)	Height (cm)	Polar (H/V)				
30.014355	38.82	101.0	V	0.0	-4.4	40.00	1.18
88.318010	28.71	199.0	V	1.0	-17.9	43.50	14.79
160.134620	31.02	199.0	V	85.0	-13.2	43.50	12.48
210.436450	41.75	101.0	V	200.0	-12.7	43.50	1.75
396.564290	39.78	199.0	V	169.0	-8.7	46.00	6.22
904.724040	45.39	101.0	V	181.0	0.3	46.00	0.61

**1GHz-18GHz**

**802.11b Mode (Worst case: Chain 0):**


(Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded.)

Note:

1. This test was performed with the 2.4-2.4835GHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor  
 Corrected Amplitude = Corrected Factor + Reading  
 Margin = Limit – Corrected. Amplitude

**Low Channel: 2412MHz**


Full Spectrum

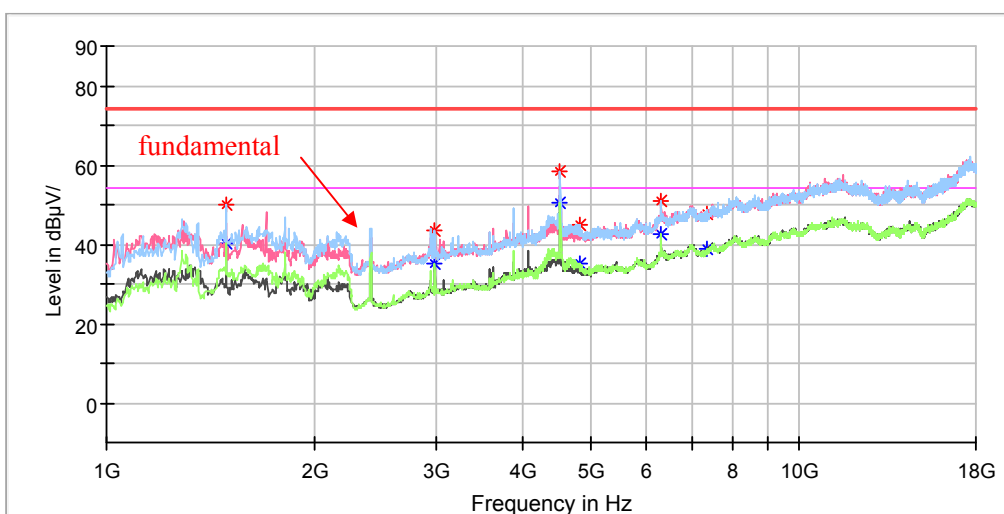

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1489.600000	49.81	---	150.0	V	171.0	-8.1	74.00	24.19
1489.600000	---	40.01	150.0	V	171.0	-8.1	54.00	13.99
2982.200000	43.46	---	200.0	H	169.0	-2.1	74.00	30.54
2982.200000	---	35.34	200.0	H	169.0	-2.1	54.00	18.66
4522.400000	58.38	---	250.0	H	69.0	1.9	74.00	15.62
4522.400000	---	50.60	250.0	H	69.0	1.9	54.00	3.40
4824.000000	---	34.96	150.0	H	147.0	2.5	54.00	19.04
4824.000000	44.67	---	150.0	H	147.0	2.5	74.00	29.33
6331.200000	50.91	---	250.0	H	121.0	7.4	74.00	23.09
6331.200000	---	42.33	250.0	H	121.0	7.4	54.00	11.67
7236.000000	47.87	---	200.0	H	331.0	10.0	74.00	26.13
7236.000000	---	38.75	200.0	H	331.0	10.0	54.00	15.25

**Middle Channel: 2437MHz**

Full Spectrum

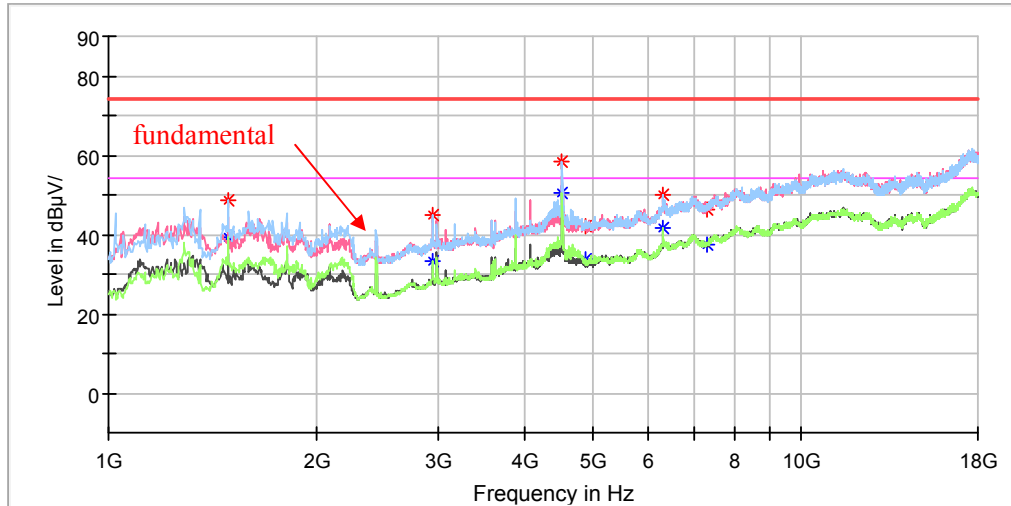


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1489.600000	48.62	---	150.0	H	167.0	-8.1	74.00	25.38
1489.600000	---	39.10	150.0	H	167.0	-8.1	54.00	14.90
2938.000000	45.04	---	200.0	V	224.0	-2.3	74.00	28.96
2938.000000	---	33.41	200.0	V	224.0	-2.3	54.00	20.59
4522.400000	58.44	---	250.0	H	168.0	1.9	74.00	15.56
4522.400000	---	50.65	250.0	H	168.0	1.9	54.00	3.35
4874.000000	42.26	---	200.0	H	230.0	2.6	74.00	31.74
4874.000000	---	33.60	200.0	H	230.0	2.6	54.00	20.40
6331.200000	50.20	---	150.0	H	123.0	7.4	74.00	23.80
6331.200000	---	41.41	150.0	H	123.0	7.4	54.00	12.59
7311.000000	---	37.33	250.0	H	261.0	10.0	54.00	16.67
7311.000000	46.33	---	250.0	H	261.0	10.0	74.00	27.67



**High Channel: 2462MHz**

Full Spectrum

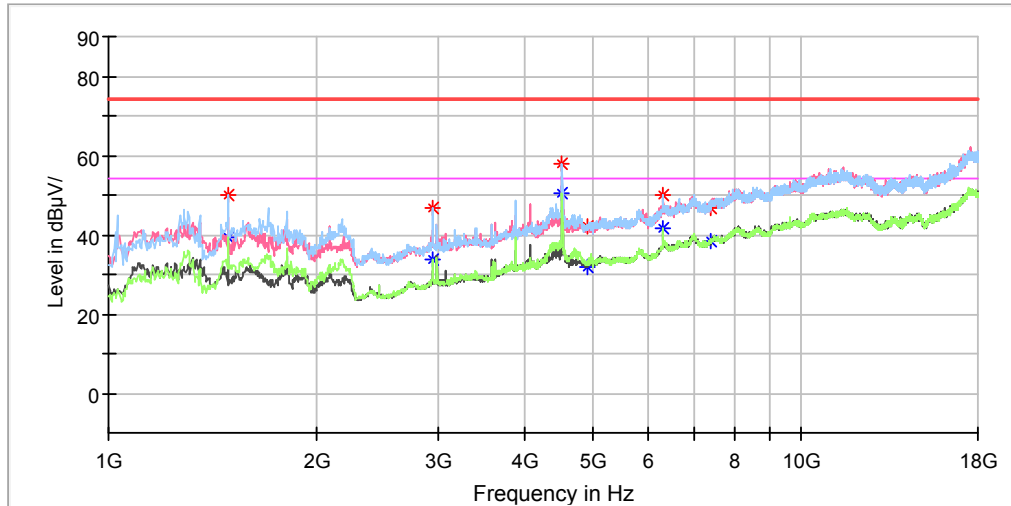

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1489.600000	49.85	---	200.0	V	170.0	-8.1	74.00	24.15
1489.600000	---	39.44	200.0	V	170.0	-8.1	54.00	14.56
2938.000000	46.95	---	250.0	H	224.0	-2.3	74.00	27.05
2938.000000	---	33.51	250.0	H	224.0	-2.3	54.00	20.49
4522.400000	57.71	---	200.0	H	170.0	1.9	74.00	16.29
4522.400000	---	50.25	200.0	H	170.0	1.9	54.00	3.75
4924.000000	---	32.06	150.0	H	12.0	2.7	54.00	21.94
4924.000000	42.04	---	150.0	H	12.0	2.7	74.00	31.96
6331.200000	50.08	---	200.0	H	121.0	7.4	74.00	23.92
6331.200000	---	41.67	200.0	H	121.0	7.4	54.00	12.33
7386.000000	46.96	---	150.0	H	321.0	10.1	74.00	27.04
7386.000000	---	38.23	150.0	H	321.0	10.1	54.00	15.77

**802.11g Mode(Worst case: Chain 0):**


(Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded.)

Note:

1. This test was performed with the 2.4-2.4835GHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor  
 Corrected Amplitude = Corrected Factor + Reading  
 Margin = Limit – Corrected. Amplitude

**Low Channel: 2412MHz**


Full Spectrum

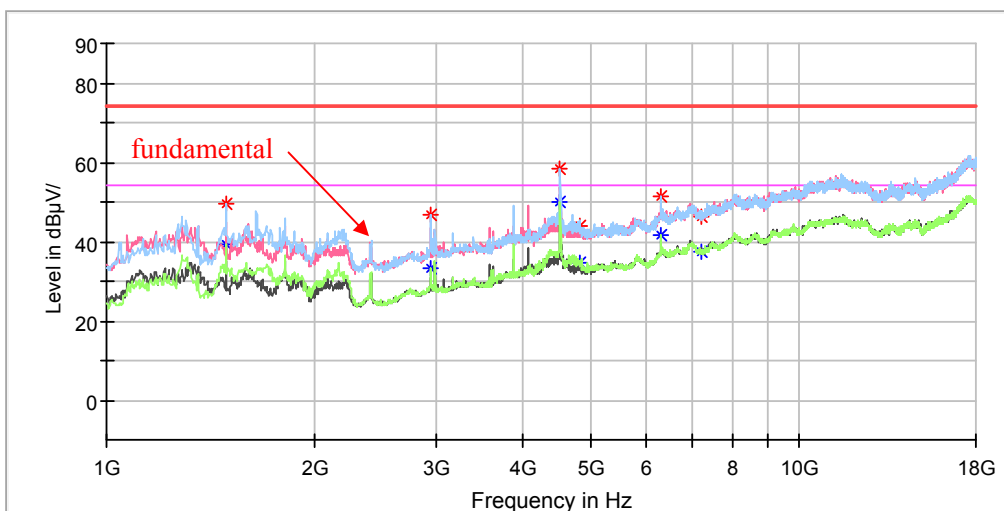

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1489.600000	49.51	---	200.0	H	170.0	-8.1	74.00	24.49
1489.600000	---	39.16	200.0	H	170.0	-8.1	54.00	14.84
2938.000000	46.69	---	150.0	V	178.0	-2.3	74.00	27.31
2938.000000	---	33.31	150.0	V	178.0	-2.3	54.00	20.69
4522.400000	58.22	---	200.0	H	170.0	1.9	74.00	15.78
4522.400000	---	49.78	200.0	H	170.0	1.9	54.00	4.22
4824.000000	43.88	---	150.0	H	182.0	2.5	74.00	30.12
4824.000000	---	34.71	150.0	H	77.0	2.5	54.00	19.29
6331.200000	51.55	---	250.0	H	121.0	7.4	74.00	22.45
6331.200000	---	41.41	250.0	H	121.0	7.4	54.00	12.59
7236.000000	---	37.30	150.0	H	31.0	9.8	54.00	16.70
7236.000000	46.47	---	150.0	H	31.0	9.8	74.00	27.53

**Middle Channel: 2437MHz**


Full Spectrum

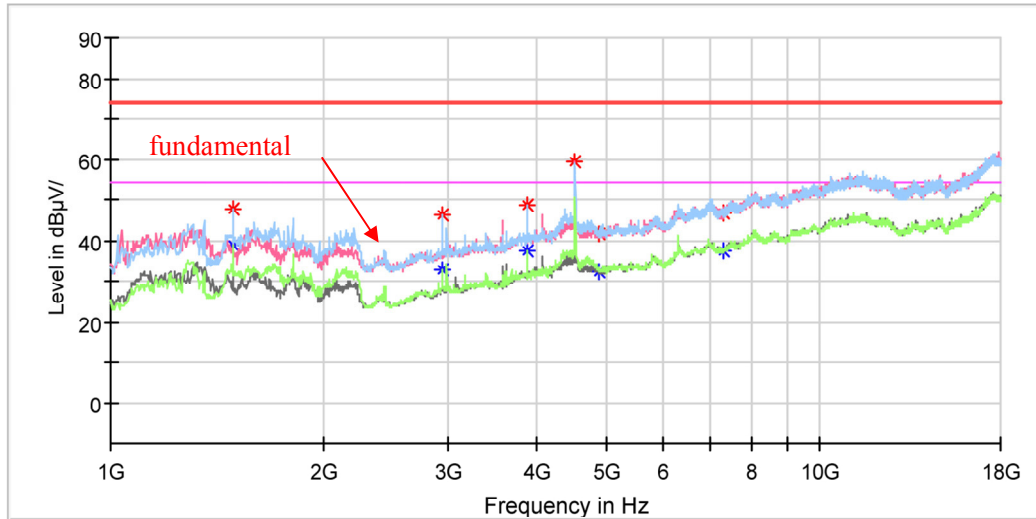

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1489.600000	47.68	---	200.0	V	170.0	-8.1	74.00	26.32
1489.600000	---	38.62	200.0	V	170.0	-8.1	54.00	15.38
2938.000000	46.51	---	250.0	H	228.0	-2.3	74.00	27.49
2938.000000	---	33.02	250.0	H	228.0	-2.3	54.00	20.98
3866.200000	48.58	---	150.0	H	217.0	0.4	74.00	25.42
3866.200000	---	37.43	150.0	H	217.0	0.4	54.00	16.57
4522.400000	58.22	---	200.0	H	170.0	1.9	74.00	15.78
4522.400000	---	49.78	200.0	H	170.0	1.9	54.00	4.22
4874.000000	---	32.52	200.0	H	60.0	2.6	54.00	21.48
4874.000000	41.75	---	200.0	H	60.0	2.6	74.00	32.25
7311.000000	46.75	---	200.0	H	237.0	10.0	74.00	27.25
7311.000000	---	37.39	200.0	H	237.0	10.0	54.00	16.61

**High Channel: 2462MHz**

Full Spectrum

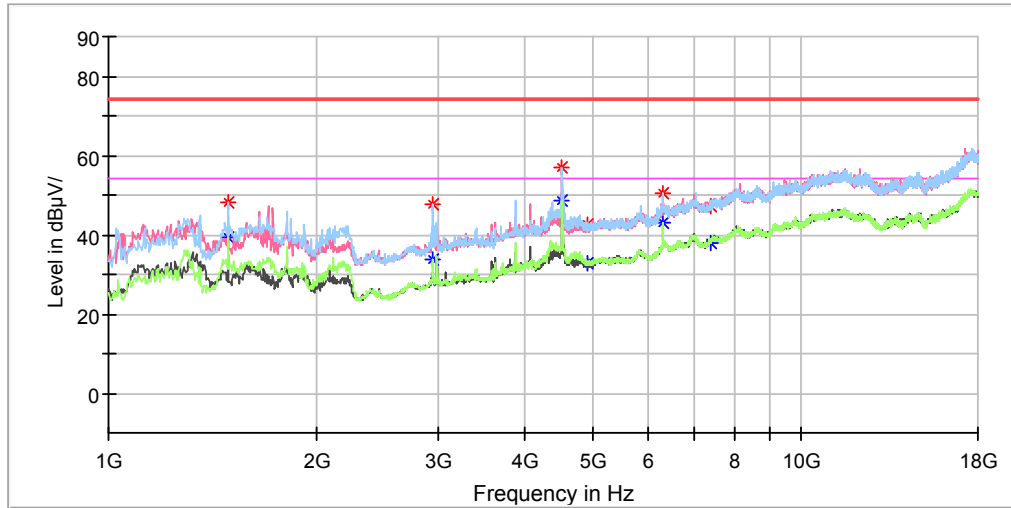

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1489.600000	48.35	---	200.0	V	170.0	-8.1	74.00	25.65
1489.600000	---	39.47	200.0	V	170.0	-8.1	54.00	14.53
2938.000000	47.45	---	250.0	H	229.0	-2.3	74.00	26.55
2938.000000	---	33.58	250.0	H	229.0	-2.3	54.00	20.42
4522.400000	57.20	---	200.0	H	170.0	1.9	74.00	16.80
4522.400000	---	48.83	200.0	H	170.0	1.9	54.00	5.17
4924.000000	42.33	---	250.0	H	192.0	2.8	74.00	31.67
4924.000000	---	32.84	250.0	H	192.0	2.8	54.00	21.16
6331.200000	50.28	---	150.0	H	116.0	7.4	74.00	23.72
6331.200000	---	43.18	150.0	H	116.0	7.4	54.00	10.82
7386.000000	47.41	---	200.0	H	230.0	10.1	74.00	26.59
7386.000000	---	38.09	200.0	H	230.0	10.1	54.00	15.91


**802.11n-HT20 Mode(Chain0+Chain1):**

Note:

1. This test was performed with the 2.4-2.4835GHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor  
 Corrected Amplitude = Corrected Factor + Reading  
 Margin = Limit – Corrected. Amplitude

**Low Channel: 2412MHz**


Full Spectrum

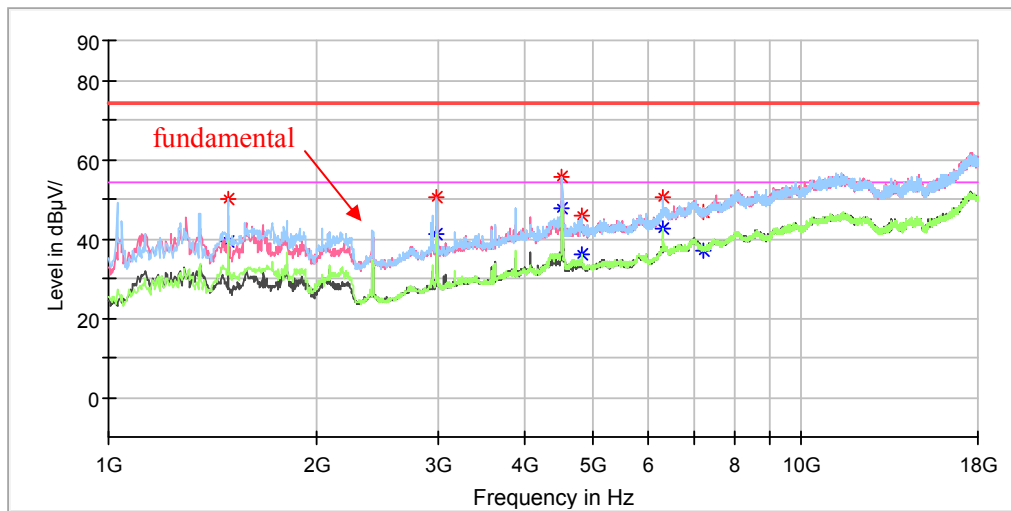

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1489.600000	49.83	---	200.0	H	172.0	-8.1	74.00	24.17
1489.600000	---	39.37	200.0	H	172.0	-8.1	54.00	14.63
2982.200000	50.58	---	250.0	V	179.0	-2.1	74.00	23.42
2982.200000	---	41.38	250.0	V	179.0	-2.1	54.00	12.62
4522.400000	---	47.84	150.0	H	233.0	1.9	54.00	6.16
4522.400000	55.49	---	150.0	H	233.0	1.9	74.00	18.51
4824.000000	---	36.11	200.0	H	185.0	2.5	54.00	17.89
4824.000000	45.92	---	200.0	H	185.0	2.5	74.00	28.08
6331.200000	50.61	---	150.0	H	126.0	7.4	74.00	23.39
6331.200000	---	42.78	150.0	H	126.0	7.4	54.00	11.22
7236.000000	---	36.86	200.0	H	226.0	9.8	54.00	17.14
7236.000000	46.97	---	200.0	H	226.0	9.8	74.00	27.03

**Middle Channel: 2437MHz**


Full Spectrum

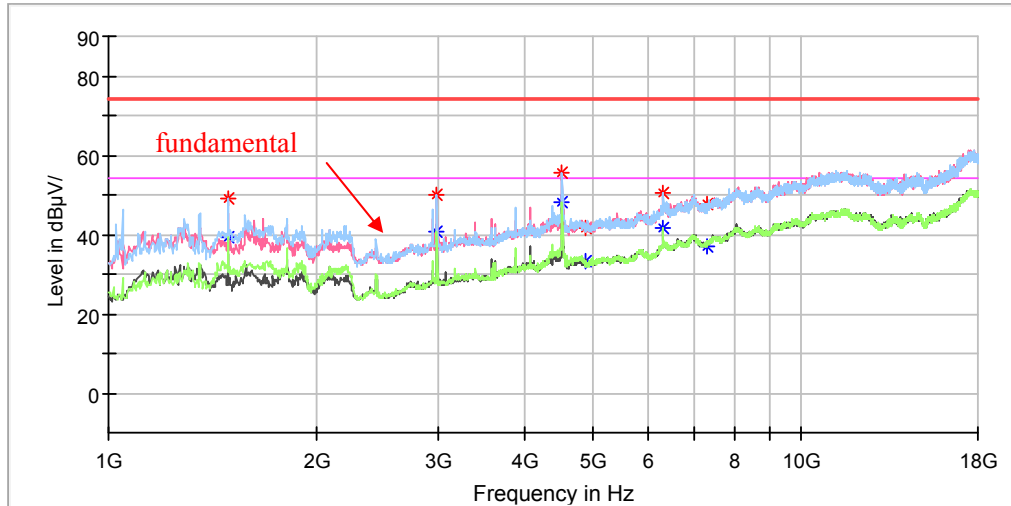

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1489.600000	48.97	---	150.0	H	108.0	-8.1	74.00	25.03
1489.600000	---	39.08	200.0	H	167.0	-8.1	54.00	14.92
2982.200000	50.21	---	200.0	V	145.0	-2.1	74.00	23.79
2982.200000	---	40.89	200.0	V	145.0	-2.1	54.00	13.11
4522.400000	55.76	---	150.0	H	228.0	1.9	74.00	18.24
4522.400000	---	48.35	150.0	H	228.0	1.9	54.00	5.65
4874.000000	41.85	---	200.0	H	131.0	2.6	74.00	32.15
4874.000000	---	33.23	150.0	H	170.0	2.6	54.00	20.77
6331.200000	50.42	---	150.0	H	121.0	7.4	74.00	23.58
6331.200000	---	41.84	150.0	H	121.0	7.4	54.00	12.16
7311.000000	47.57	---	150.0	H	99.0	10.0	74.00	26.43
7311.000000	---	37.00	200.0	H	297.0	10.0	54.00	17.00

**High Channel: 2462MHz**

Full Spectrum

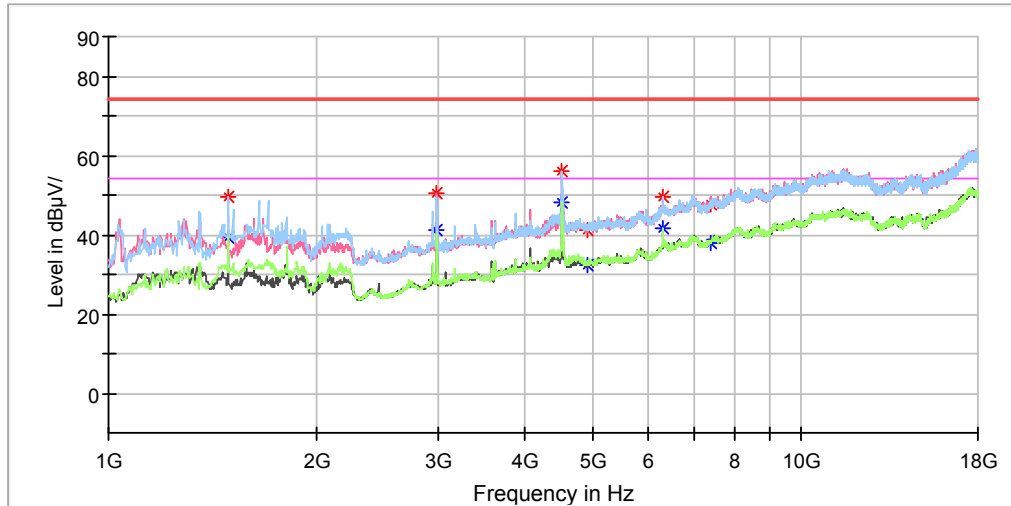

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1489.600000	49.43	---	150.0	H	108.0	-8.1	74.00	24.57
1489.600000	---	39.19	150.0	H	108.0	-8.1	54.00	14.81
2982.200000	50.43	---	200.0	V	179.0	-2.1	74.00	23.57
2982.200000	---	41.20	200.0	V	179.0	-2.1	54.00	12.80
4522.400000	56.23	---	200.0	H	163.0	1.9	74.00	17.77
4522.400000	---	47.95	150.0	H	233.0	1.9	54.00	6.05
4924.000000	---	32.54	150.0	H	170.0	2.7	54.00	21.46
4924.000000	41.38	---	150.0	H	170.0	2.7	74.00	32.62
6331.200000	49.38	---	150.0	H	121.0	7.4	74.00	24.62
6331.200000	---	41.60	150.0	H	121.0	7.4	54.00	12.40
7386.000000	47.56	---	200.0	H	306.0	10.1	74.00	26.44
7386.000000	---	37.98	150.0	H	16.0	10.1	54.00	16.02


**802.11n-HT40 Mode(Chain0+Chain1):**

Note:

1. This test was performed with the 2.4-2.4835GHz band reject filter.
2. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor  
 Corrected Amplitude = Corrected Factor + Reading  
 Margin = Limit – Corrected. Amplitude

**Low Channel: 2422MHz**

Full Spectrum

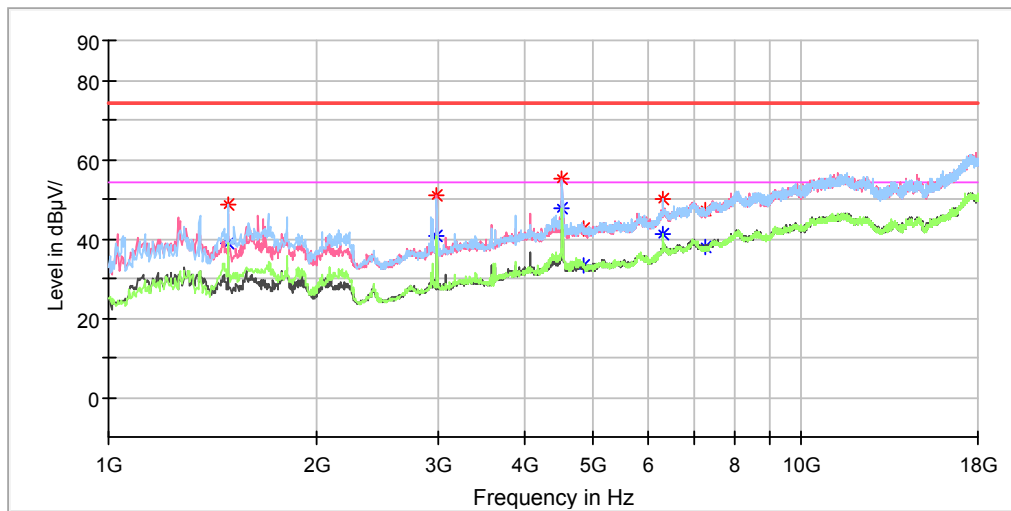


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1489.600000	48.74	---	150.0	H	172.0	-8.1	74.00	25.26
1489.600000	---	38.83	150.0	H	172.0	-8.1	54.00	15.17
2982.200000	51.14	---	200.0	V	179.0	-2.1	74.00	22.86
2982.200000	---	40.69	200.0	V	179.0	-2.1	54.00	13.31
4522.400000	55.31	---	150.0	H	140.0	1.9	74.00	18.69
4522.400000	---	47.55	150.0	H	140.0	1.9	54.00	6.45
4844.000000	---	33.42	200.0	H	99.0	2.6	54.00	20.58
4844.000000	42.68	---	200.0	H	99.0	2.6	74.00	31.32
6331.200000	50.14	---	150.0	H	116.0	7.4	74.00	23.86
6331.200000	---	40.99	150.0	H	116.0	7.4	54.00	13.01
7266.000000	47.00	---	200.0	H	67.0	9.9	74.00	27.00
7266.000000	---	37.80	200.0	H	67.0	9.9	54.00	16.20



**Middle Channel: 2437MHz**


Full Spectrum

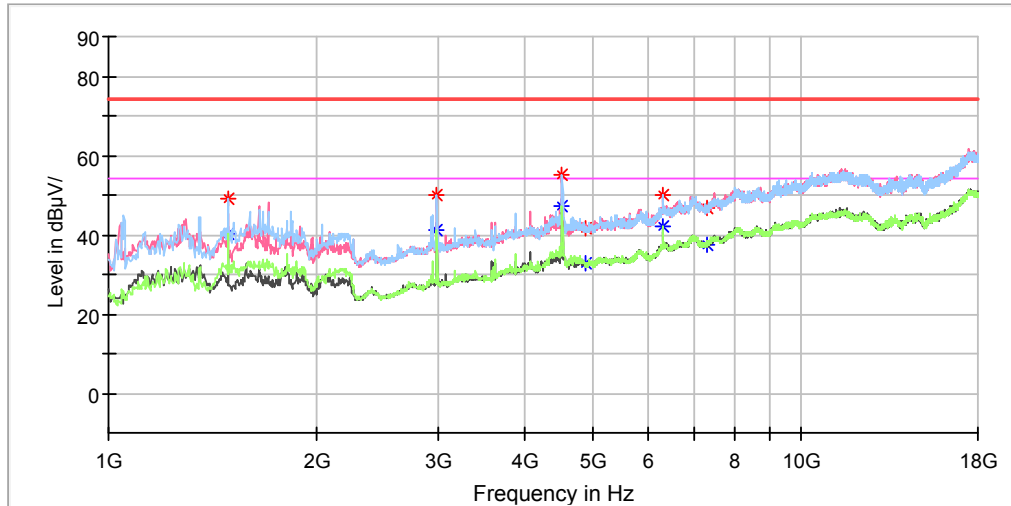

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1489.600000	48.92	---	150.0	V	170.0	-8.1	74.00	25.08
1489.600000	---	40.05	150.0	V	170.0	-8.1	54.00	13.95
2982.200000	50.15	---	200.0	H	140.0	-2.1	74.00	23.85
2982.200000	---	40.96	200.0	H	140.0	-2.1	54.00	13.04
4522.400000	55.08	---	150.0	H	199.0	1.9	74.00	18.92
4522.400000	---	47.44	150.0	H	199.0	1.9	54.00	6.56
4874.000000	---	32.92	200.0	H	125.0	2.6	54.00	21.08
4874.000000	41.62	---	200.0	H	125.0	2.6	74.00	32.38
6331.200000	49.81	---	150.0	H	121.0	7.4	74.00	24.19
6331.200000	---	41.86	150.0	H	121.0	7.4	54.00	12.14
7313.800000	46.51	---	200.0	H	319.0	10.0	74.00	27.49
7313.800000	---	37.66	200.0	H	319.0	10.0	54.00	16.34

**High Channel: 2452MHz**

Full Spectrum

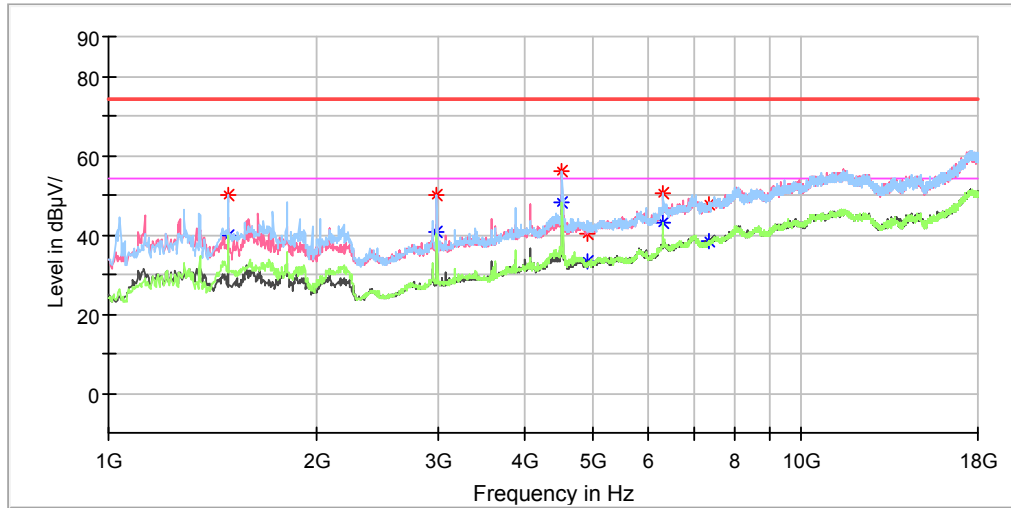


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1489.600000	49.96	---	200.0	H	168.0	-8.1	74.00	24.04
1489.600000	---	39.82	200.0	H	168.0	-8.1	54.00	14.18
2982.200000	49.91	---	250.0	V	179.0	-2.1	74.00	24.09
2982.200000	---	40.81	250.0	V	179.0	-2.1	54.00	13.19
4522.400000	55.88	---	200.0	H	163.0	1.9	74.00	18.12
4522.400000	---	47.99	200.0	H	163.0	1.9	54.00	6.01
4904.000000	40.30	---	150.0	H	230.0	2.7	74.00	33.70
4904.000000	---	33.32	150.0	H	230.0	2.7	54.00	20.68
6331.200000	50.45	---	250.0	H	121.0	7.4	74.00	23.55
6331.200000	---	42.94	250.0	H	121.0	7.4	54.00	11.06
7356.000000	47.46	---	150.0	H	225.0	10.0	74.00	26.54
7356.000000	---	38.55	150.0	H	225.0	10.0	54.00	15.45

**18GHz-25GHz**


Pre-scan with 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 modes of operation in the X,Y and Z axes of orientation, the worst case high channel of 802.11n-HT20 mode in X-axis of orientation was recorded

**Horizontal**

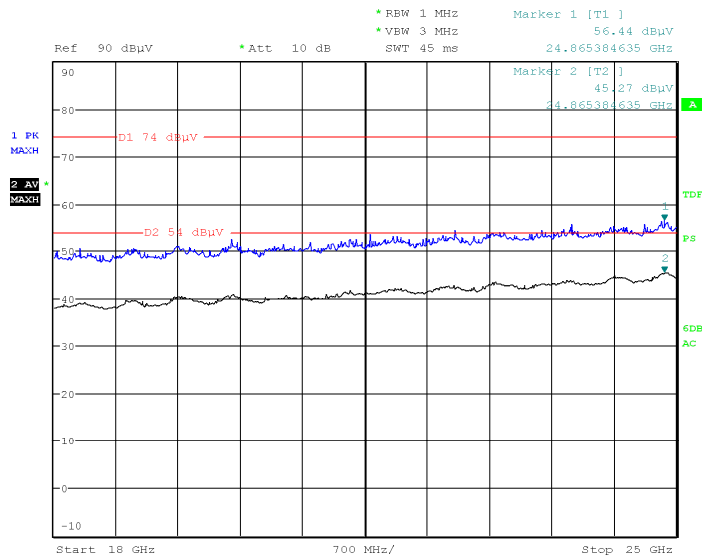

Date: 22.JAN.2018 13:52:52

**Vertical**

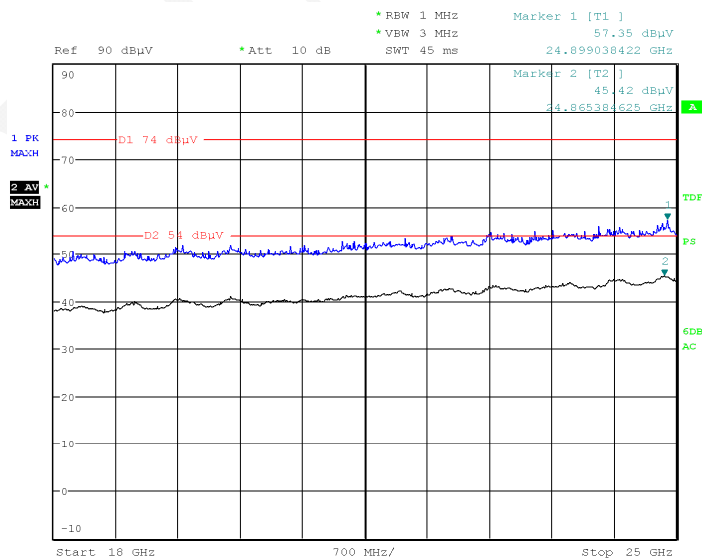

Date: 22.JAN.2018 13:35:25

**Fundamental Test & Restricted Bands Emissions Test:**

Note:

1. Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
2. Corrected Amplitude = Corrected Factor + Reading
3. Margin = Limit - Corrected. Amplitude

**802.11b Mode (Chain 0):** (Pre-scan in the X,Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2412.00	---	95.41	186	H	92	5.1	/	/
2412.00	98.79	---	186	H	92	5.1	/	/
2390.00	---	39.77	170	H	137	5.1	54	14.23
2390.00	48.48	---	170	H	137	5.1	74	25.52
Middle Channel: 2437MHz								
2437.00	97.93	---	195	H	159	5.2	/	/
2437.00	---	95.86	195	H	159	5.2	/	/
High Channel: 2462MHz								
2462.00	---	96.89	201	H	117	5.2	/	/
2462.00	99.39	---	201	H	117	5.2	/	/
2483.50	---	40.23	147	H	57	5.3	54	13.77
2483.50	50.12	---	147	H	57	5.3	74	23.88

**802.11b Mode (Chain 1):** (Pre-scan in the X,Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2412.00	---	99.89	237	H	49	5.1	/	/
2412.00	102.76	---	237	H	49	5.1	/	/
2390.00	---	42.13	201	H	47	5.1	54	11.87
2390.00	51.33	---	201	H	47	5.1	74	22.67
Middle Channel: 2437MHz								
2437.00	103.17	---	221	H	309	5.2	/	/
2437.00	---	101.37	221	H	309	5.2	/	/
High Channel: 2462MHz								
2462.00	---	101.79	147	H	271	5.2	/	/
2462.00	103.67	---	147	H	271	5.2	/	/
2483.50	---	43.51	166	H	349	5.3	54	10.49
2483.50	53.21	---	166	H	349	5.3	74	20.79

**802.11g Mode (Chain 0):** (Pre-scan in the X,Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2412.00	---	94.36	239	H	258	5.1	/	/
2412.00	102.16	---	239	H	258	5.1	/	/
2390.00	---	39.33	205	H	222	5.1	54	14.67
2390.00	50.47	---	205	H	222	5.1	74	23.53
Middle Channel: 2437MHz								
2437.00	---	93.86	194	H	15	5.2	/	/
2437.00	101.37	---	194	H	15	5.2	/	/
High Channel: 2462MHz								
2462.00	---	93.69	204	H	95	5.2	/	/
2462.00	101.58	---	204	H	95	5.2	/	/
2483.50	---	40.47	190	H	131	5.3	54	13.53
2483.50	53.41	---	190	H	131	5.3	74	20.59

**802.11g Mode (Chain 1):** (Pre-scan in the X,Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2412.00	---	90.77	153	H	251	5.1	/	/
2412.00	98.05	---	153	H	251	5.1	/	/
2390.00	---	41.48	207	H	323	5.1	54	12.52
2390.00	54.66	---	207	H	323	5.1	74	19.34
Middle Channel: 2437MHz								
2437.00	98.49	---	173	H	19	5.2	/	/
2437.00	---	91.52	173	H	19	5.2	/	/
High Channel: 2462MHz								
2462.00	---	92.81	225	H	123	5.2	/	/
2462.00	100.51	---	225	H	123	5.2	/	/
2483.50	---	45.39	236	H	109	5.3	54	8.61
2483.50	58.93	---	236	H	109	5.3	74	15.07

**802.11n-HT20 Mode (Chain0+Chain1):** (Pre-scan in the X,Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2412.00	---	93.61	242	H	136	5.1	/	/
2412.00	101.10	---	242	H	136	5.1	/	/
2390.00	---	43.50	155	H	29	5.1	54	10.50
2390.00	58.89	---	155	H	29	5.1	74	15.11
Middle Channel: 2437MHz								
2437.00	99.77	---	206	H	161	5.2	/	/
2437.00	---	92.47	206	H	161	5.2	/	/
High Channel: 2462MHz								
2462.00	---	93.93	176	H	140	5.2	/	/
2462.00	101.78	---	176	H	140	5.2	/	/
2483.50	---	46.75	241	H	202	5.3	54	7.25
2483.50	60.32	---	241	H	202	5.3	74	13.68

**802.11n-HT40 Mode (Chain0+Chain1):** (Pre-scan in the X,Y and Z axes of orientation, the worst case in Y-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2422MHz								
2412.00	---	89.60	150	H	216	5.1	/	/
2412.00	95.78	---	150	H	216	5.1	/	/
2390.00	---	45.49	167	H	88	5.1	54	8.51
2390.00	57.98	---	167	H	88	5.1	74	16.02
Middle Channel: 2437MHz								
2437.00	96.11	---	235	H	187	5.2	/	/
2437.00	---	89.47	235	H	187	5.2	/	/
High Channel: 2452MHz								
2462.00	---	89.00	161	H	161	5.2	/	/
2462.00	96.22	---	161	H	161	5.2	/	/
2483.50	---	47.50	243	H	110	5.3	54	6.50
2483.50	60.57	---	243	H	110	5.3	74	13.43


### Conducted Spurious Emissions at Antenna Port

#### Chain0: 802.11b Low Channel

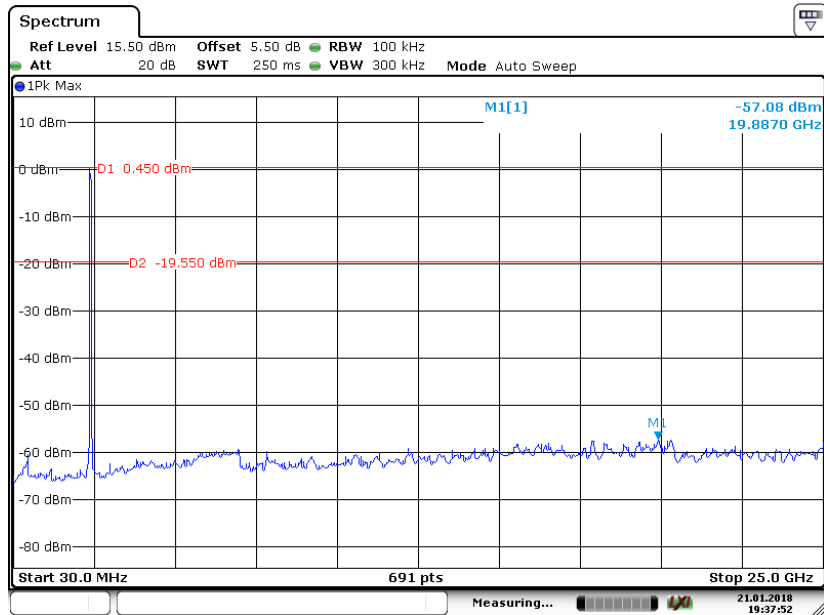


Date: 21 JAN 2018 19:37:52

#### Chain0: 802.11b Middle Channel

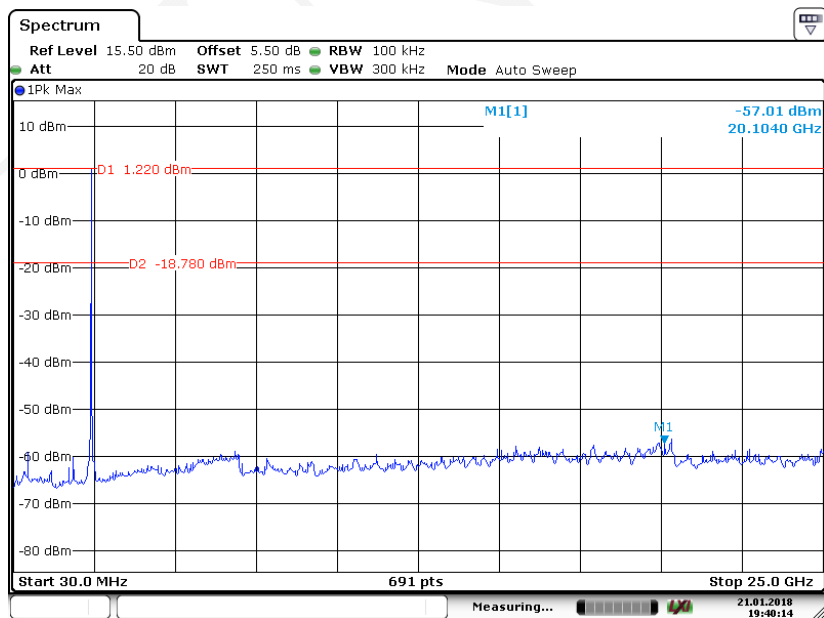


Date: 21 JAN 2018 19:40:14

### Chain0: 802.11b High Channel

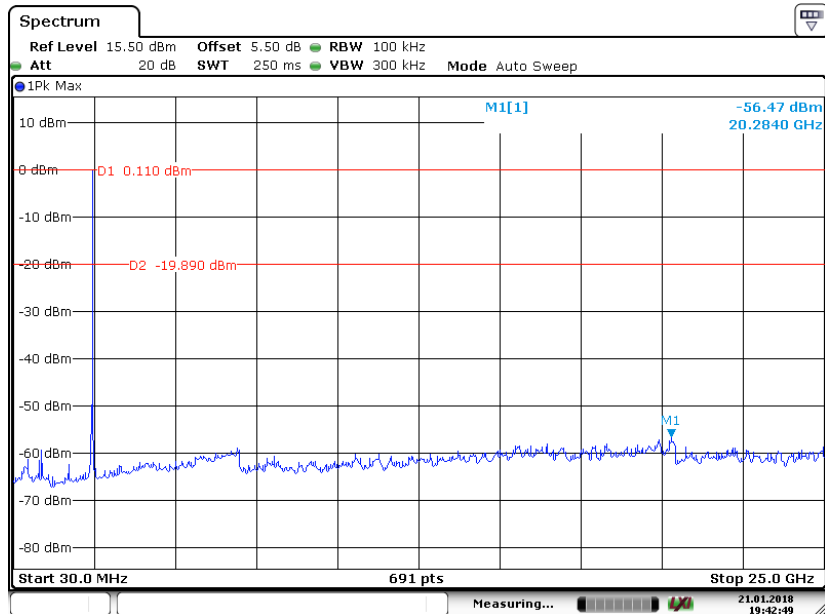

Date: 21 JAN 2018 19:42:49


### Chain0: 802.11g Low Channel

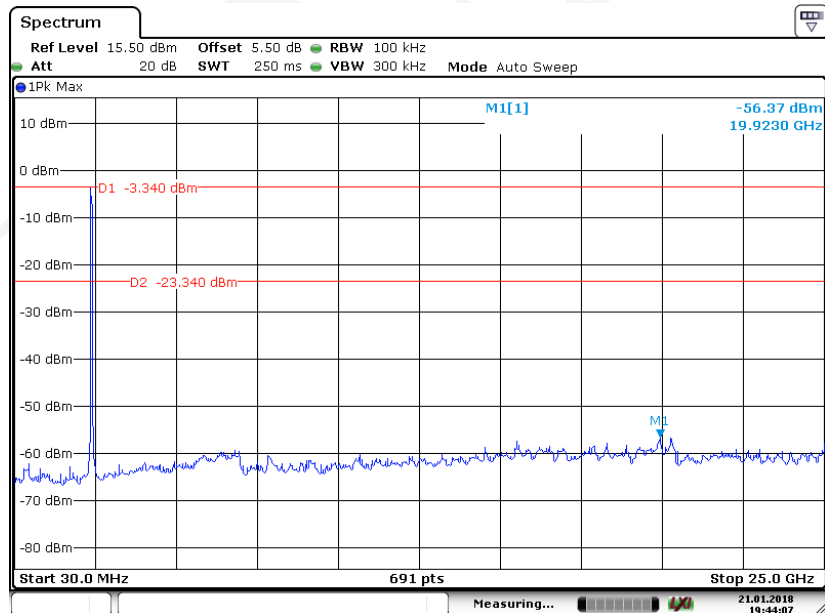

Date: 21 JAN 2018 19:44:07




### Chain0: 802.11g Middle Channel

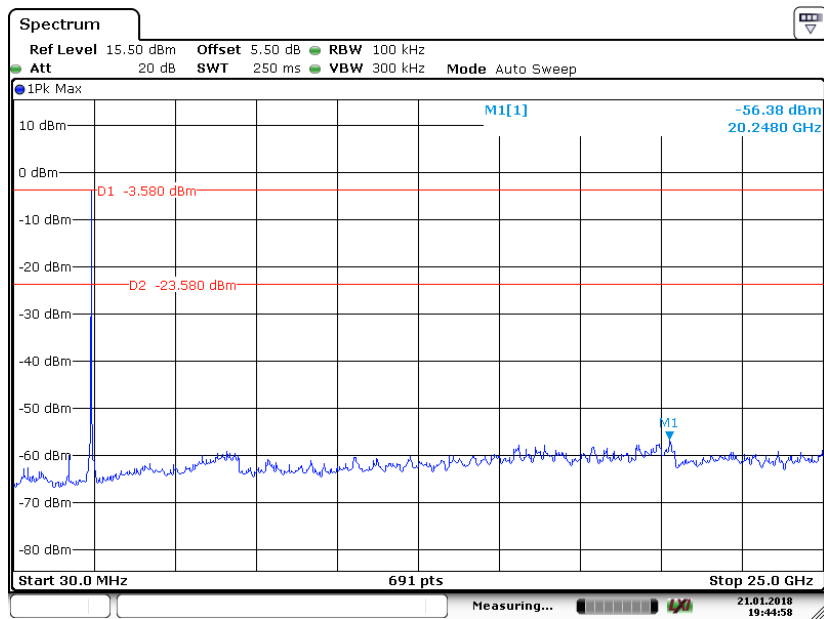


Date:21 JAN 2018 19:44:58

### Chain0: 802.11g High Channel

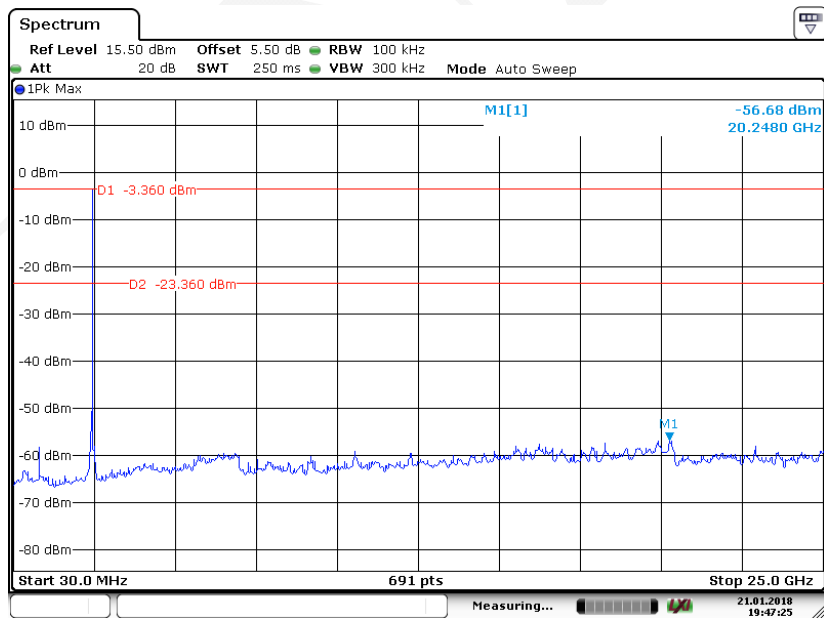


Date:21 JAN 2018 19:47:25


### Chain0: 802.11n-HT20 Low Channel

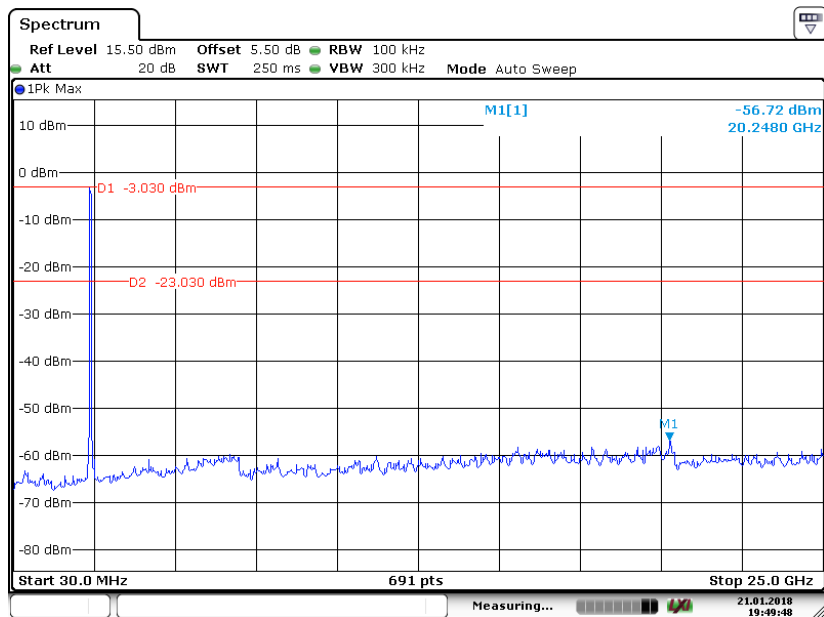

### Chain0: 802.11n-HT20 Middle Channel

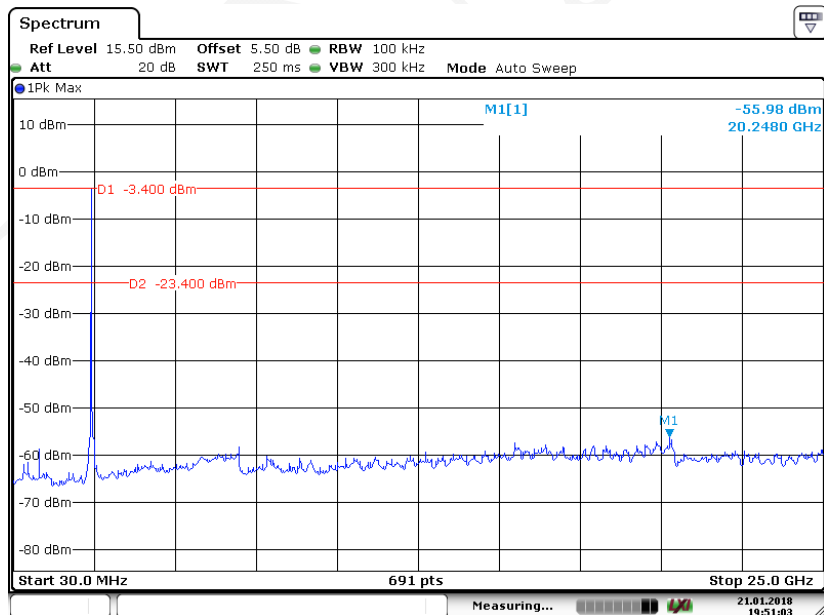


### Chain0: 802.11n-HT20 High Channel

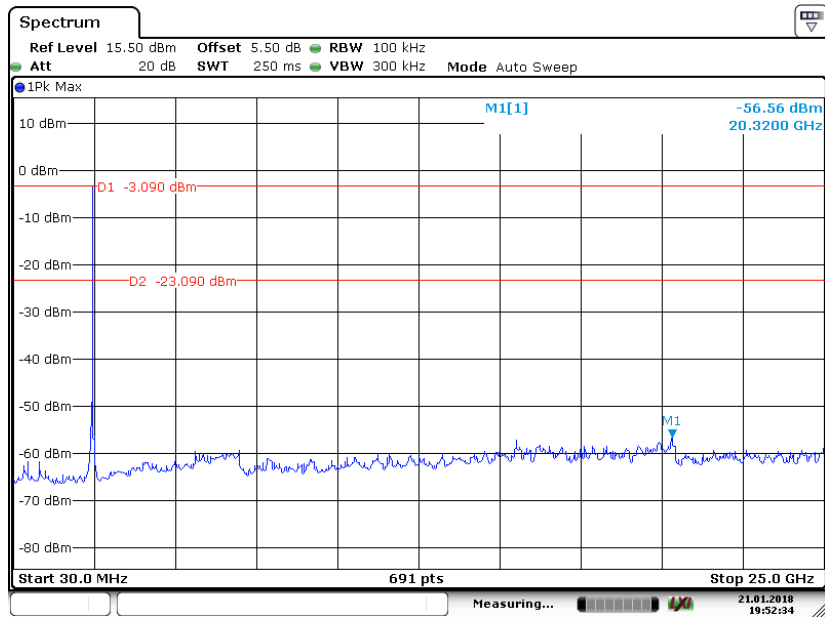


Date: 21 JAN 2018 19:52:34

### Chain0: 802.11n-HT40 Low Channel

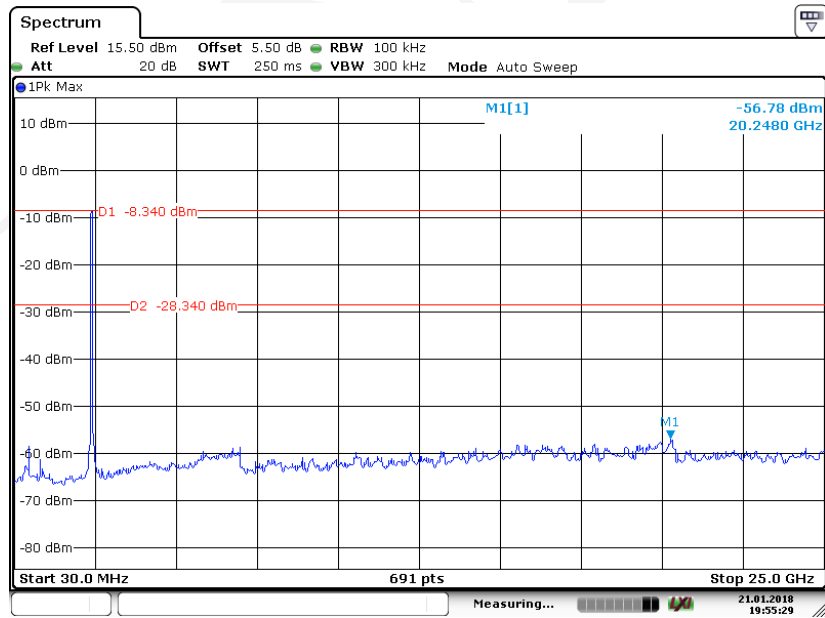


Date: 21 JAN 2018 19:55:29

### Chain0: 802.11n-HT40 Middle Channel

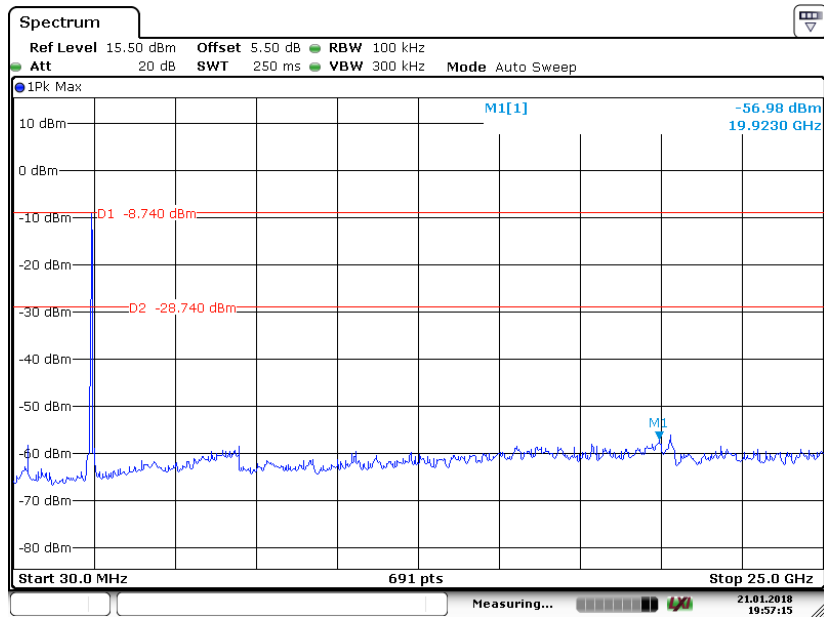


Date:21 JAN 2018 19:57:14

### Chain0: 802.11n-HT40 High Channel

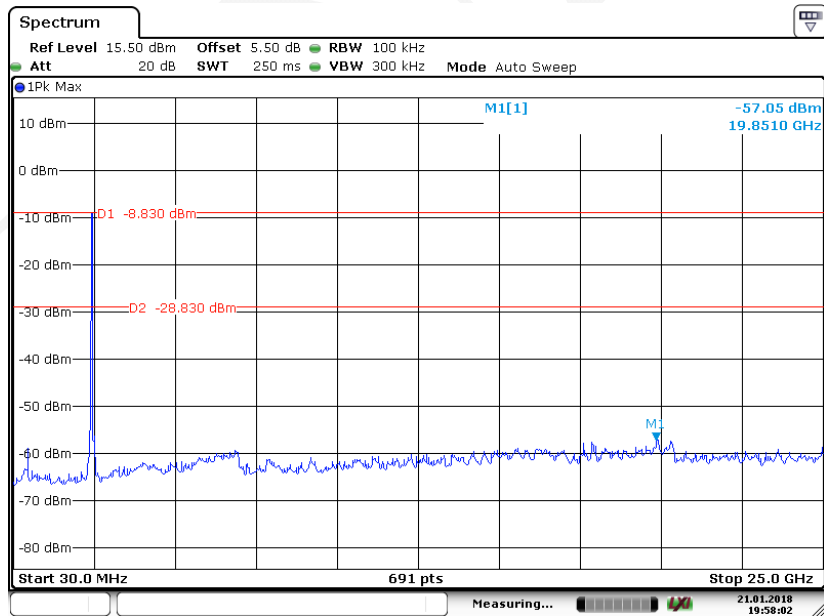


Date:21 JAN 2018 19:58:02


### Chain1: 802.11b Low Channel

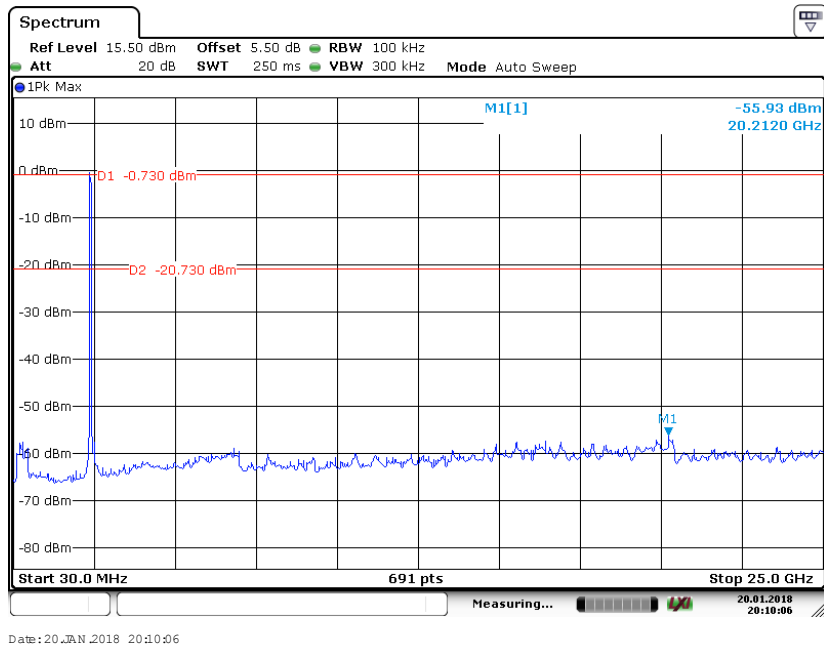

### Chain1: 802.11b Middle Channel

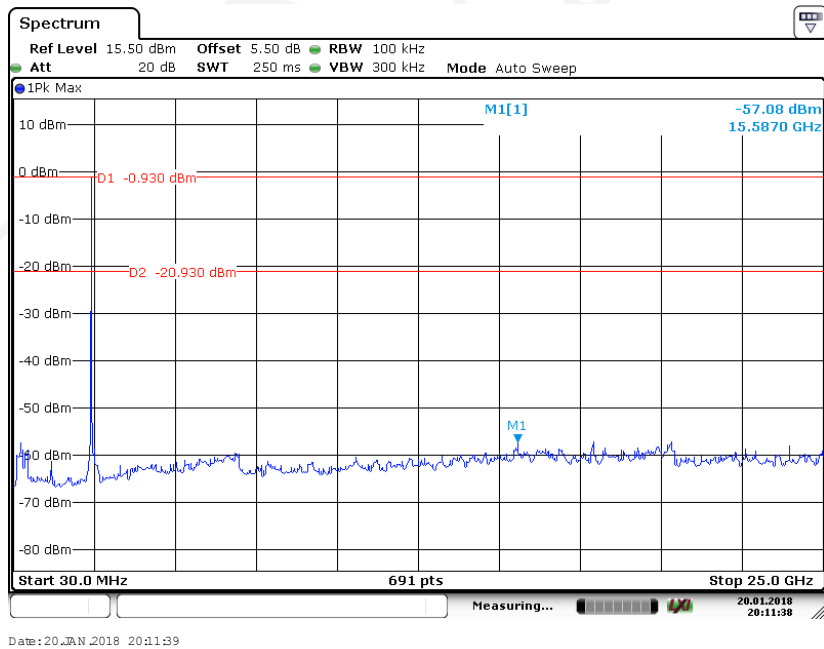


### Chain1: 802.11b High Channel

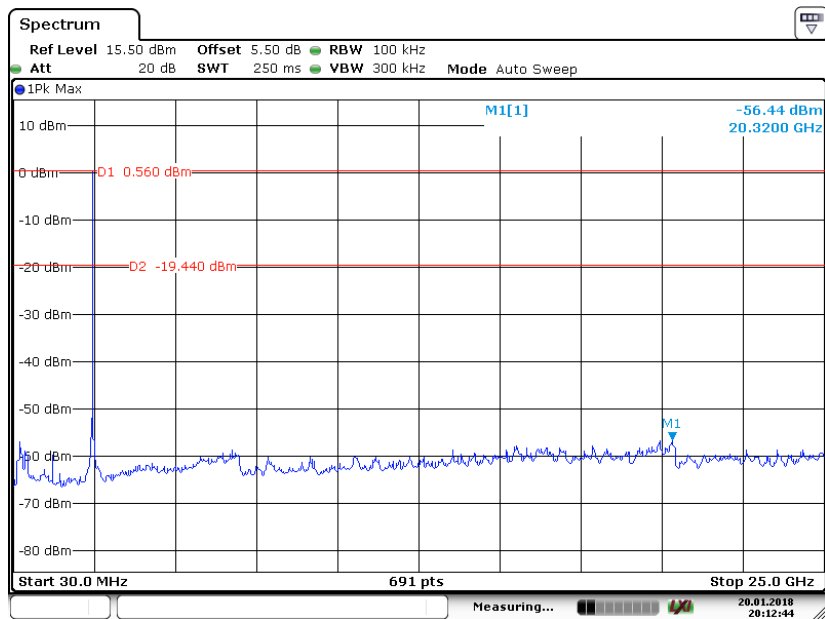


Date: 20 JAN 2018 20:12:45

### Chain1: 802.11g Low Channel

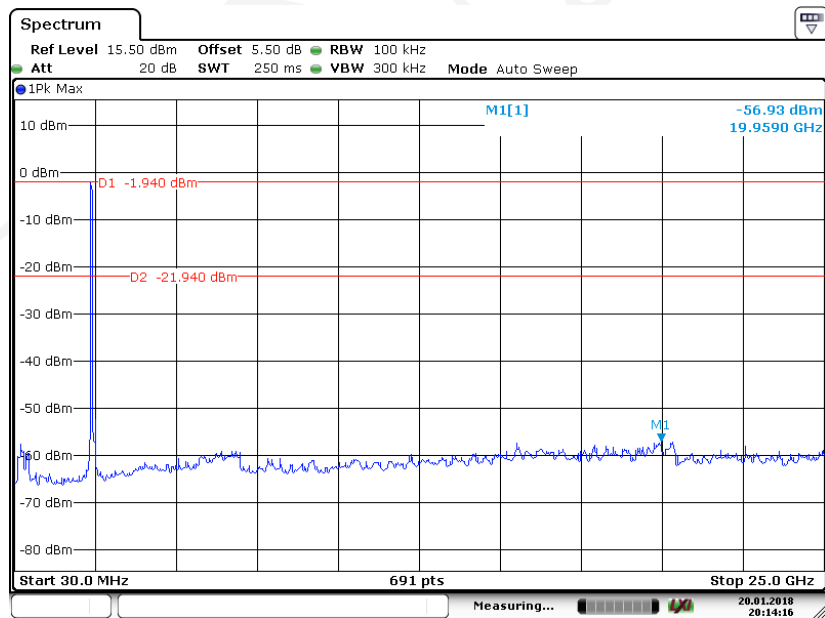


Date: 20 JAN 2018 20:14:15

### Chain1: 802.11g Middle Channel

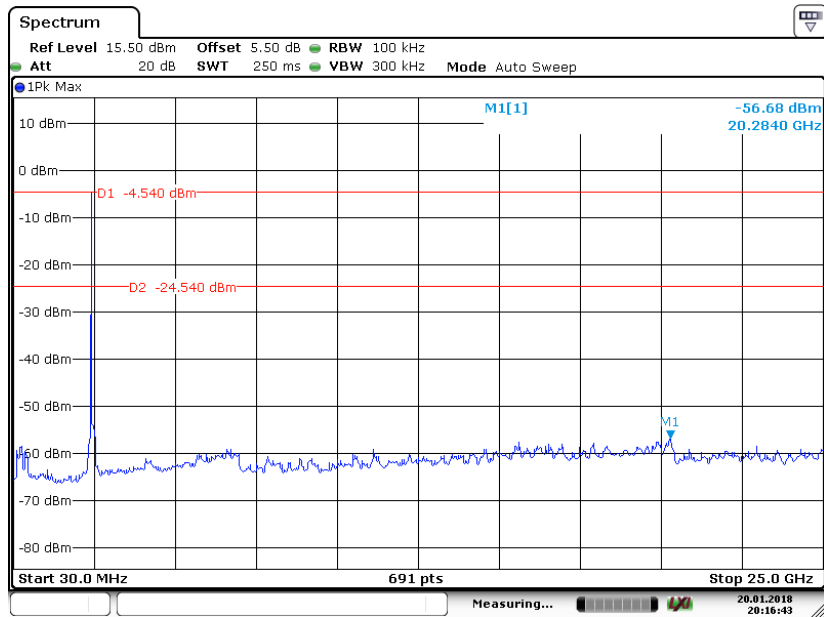


Date:20.JAN.2018 20:16:43

### Chain1: 802.11g High Channel

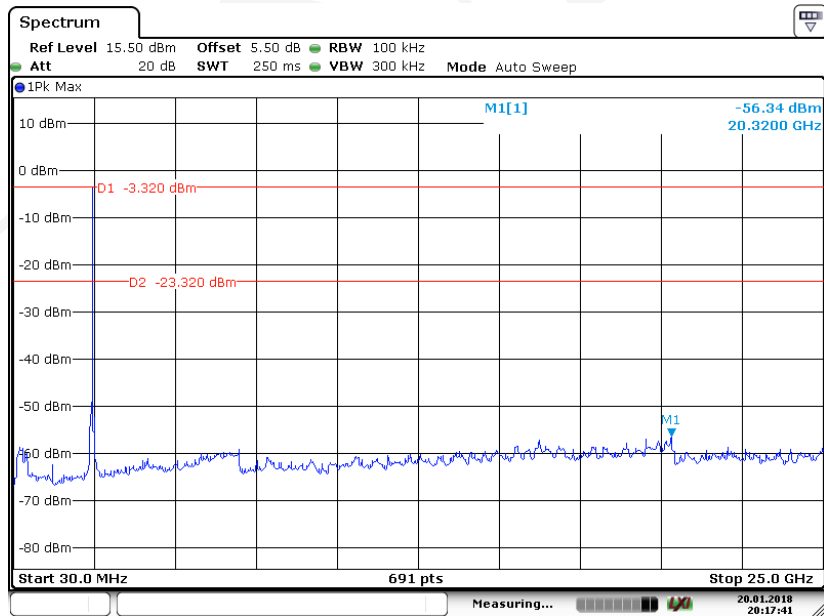


Date:20.JAN.2018 20:17:41

### Chain1: 802.11n-HT20 Low Channel

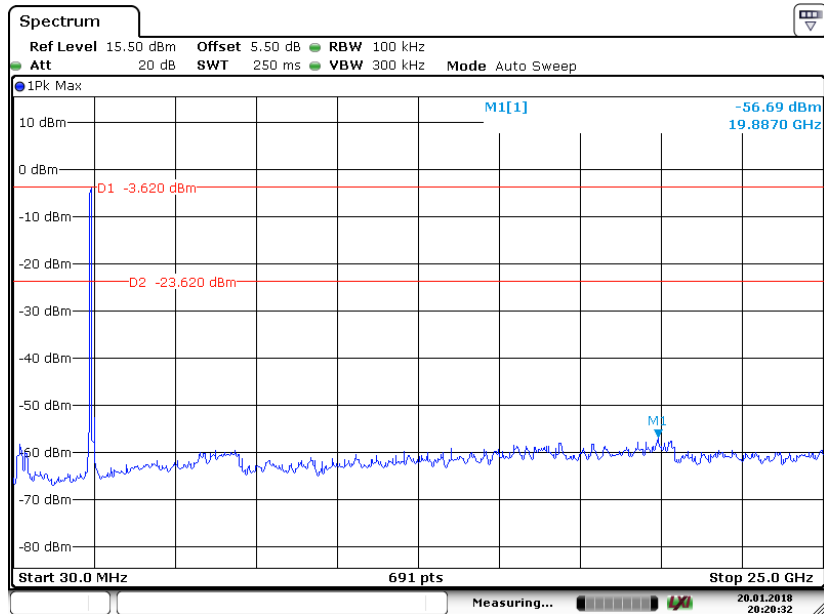

Date: 20 JAN 2018 20:20:32


### Chain1: 802.11n-HT20 Middle Channel

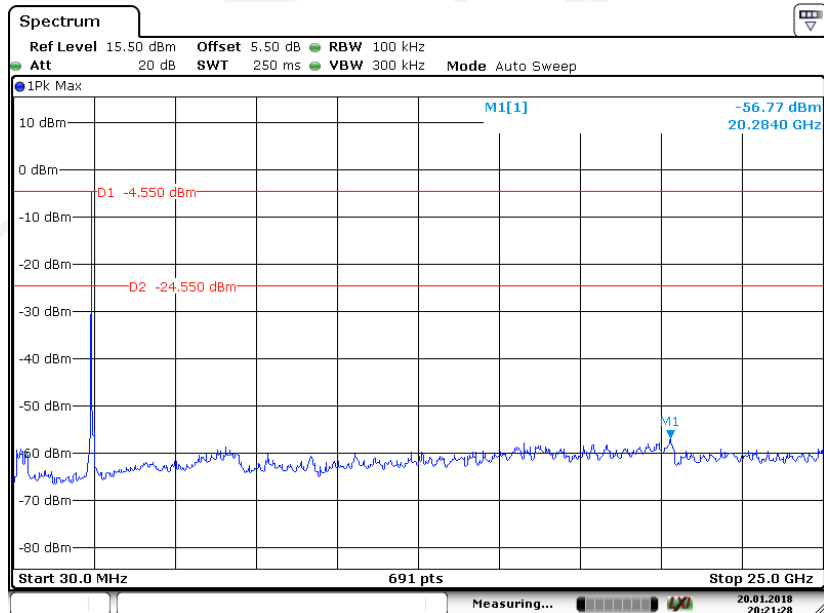

Date: 20 JAN 2018 20:21:28




### Chain1: 802.11n-HT20 High Channel

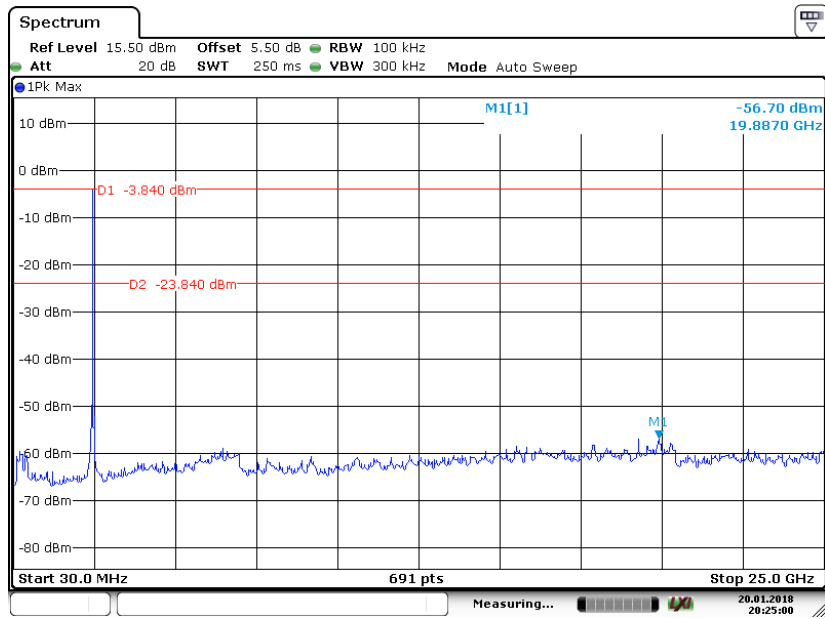


Date: 20 JAN 2018 20:25:01

### Chain1: 802.11n-HT40 Low Channel

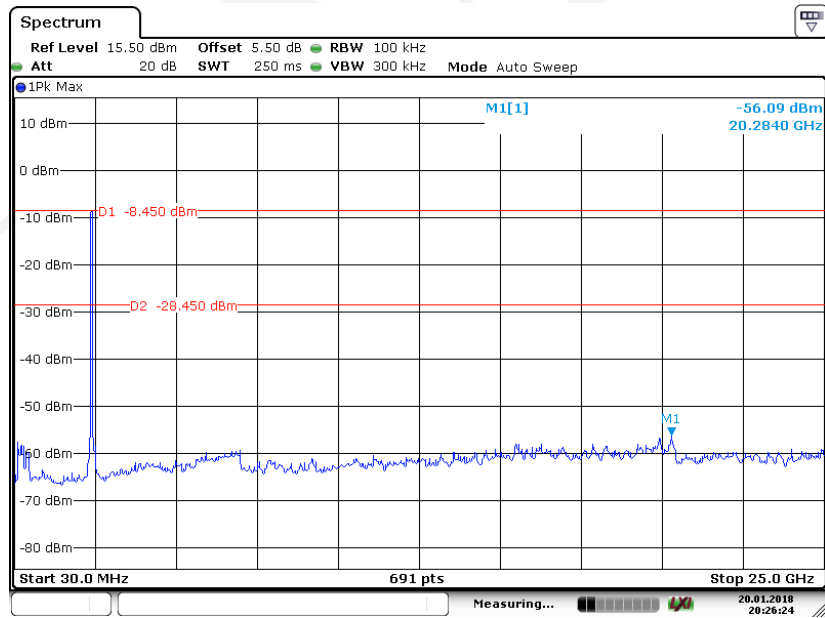


Date: 20 JAN 2018 20:26:24

### Chain1: 802.11n-HT40 Middle Channel

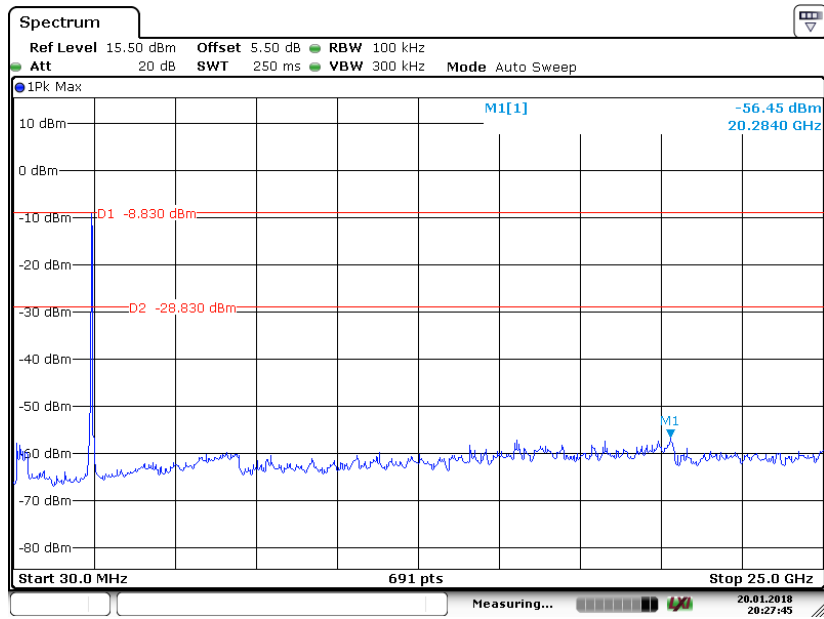

Date:20 JAN 2018 20:27:44

### Chain1: 802.11n-HT40 High Channel

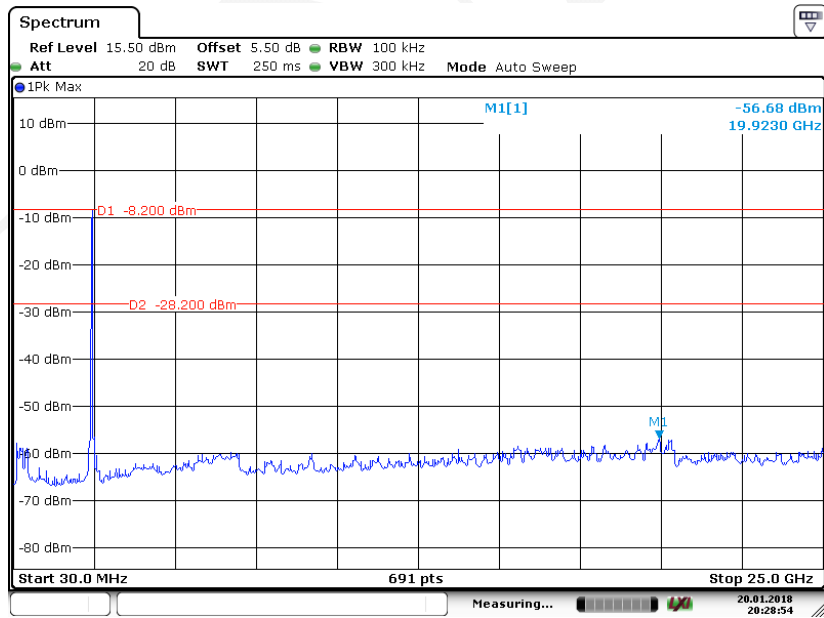

Date:20 JAN 2018 20:28:54

## FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

### Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### Test Procedure

According to KDB558074 D01 DTS Meas Guidance v04 sub-clause 8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



### Test Data

#### Environmental Conditions

<b>Temperature:</b>	24.8 °C
<b>Relative Humidity:</b>	51 %
<b>ATM Pressure:</b>	101.1 kPa


*The testing was performed by Aaron Wang on 2018-01-20 to 2018-01-21*

**Test Result:** Pass.

EUT operation mode: Transmitting


Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)		Limit (kHz)
		Chain0	Chain1	
802.11b mode				
Low	2412	9.07	9.07	≥500
Middle	2437	9.07	9.07	≥500
High	2462	9.07	9.07	≥500
802.11g mode				
Low	2412	15.72	15.07	≥500
Middle	2437	15.85	15.07	≥500
High	2462	15.72	15.07	≥500
802.11n-HT20 mode				
Low	2412	16.02	15.11	≥500
Middle	2437	16.28	15.41	≥500
High	2462	16.24	15.07	≥500
802.11n-HT40 mode				
Low	2422	35.06	35.06	≥500
Middle	2437	35.08	35.08	≥500
High	2452	35.10	35.10	≥500

### Chain0: 802.11b Low Channel

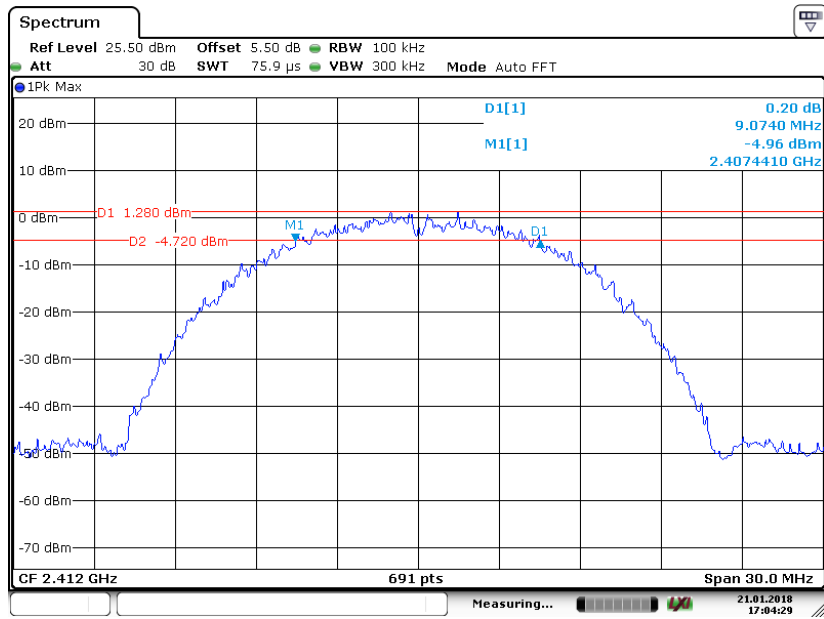


Date: 21 JAN 2018 17:04:29

### Chain0: 802.11b Middle Channel

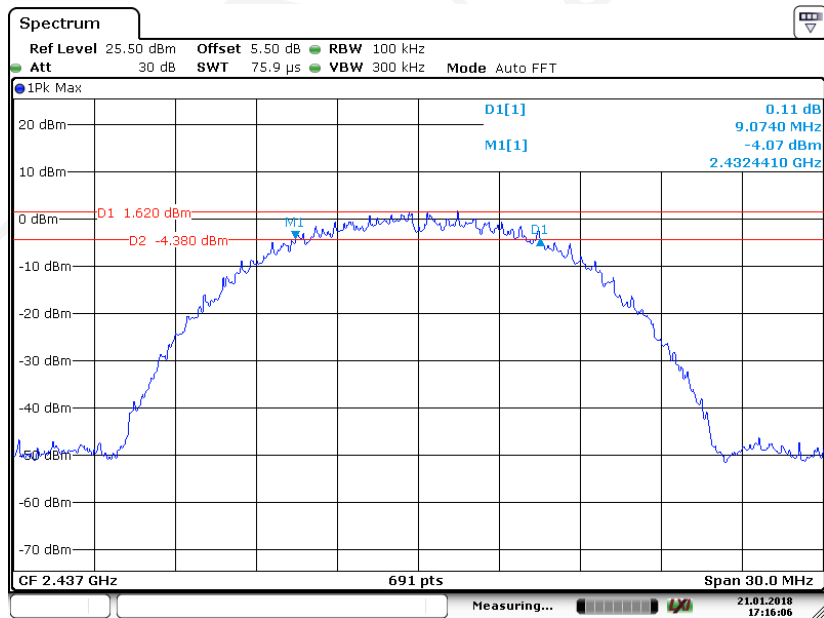


Date: 21 JAN 2018 17:16:06

**Chain0: 802.11b High Channel**

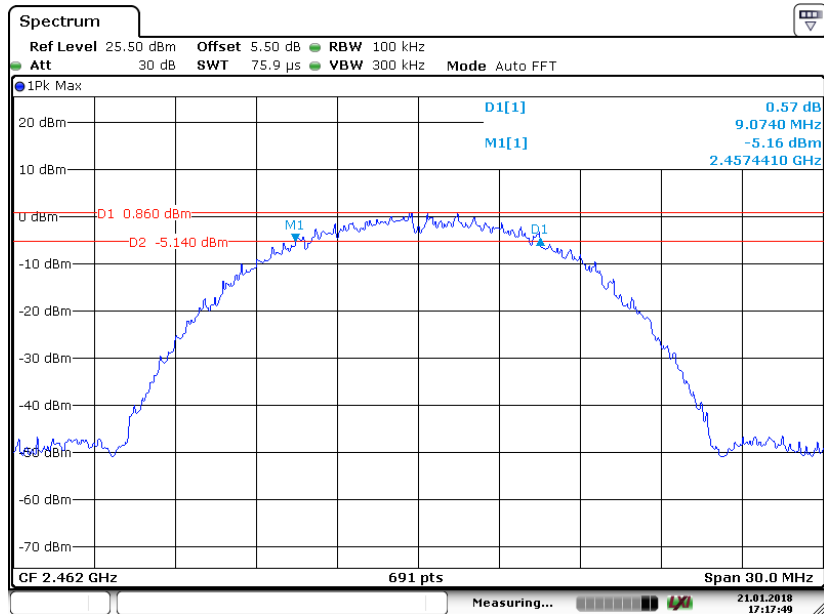


Date: 21 JAN 2018 17:17:49

**Chain0: 802.11g Low Channel**

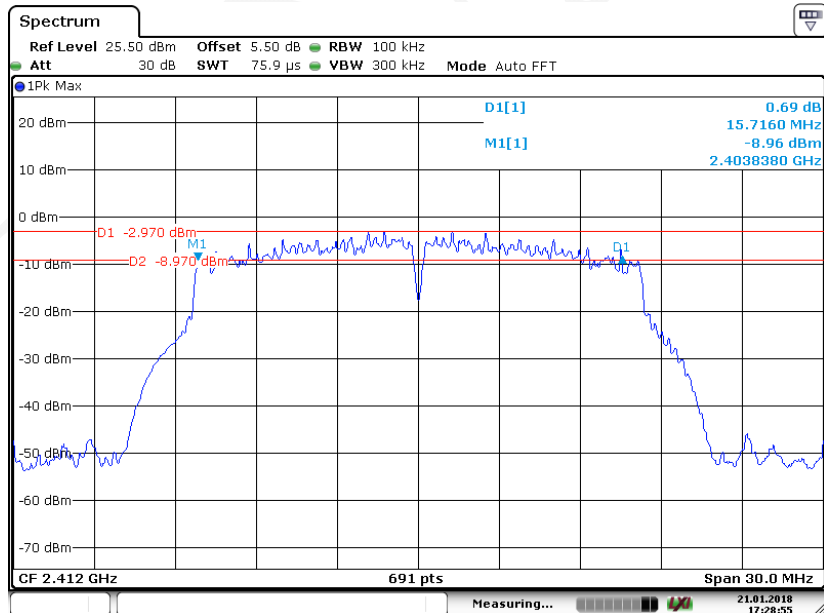


Date: 21 JAN 2018 17:28:55

### Chain0: 802.11g Middle Channel

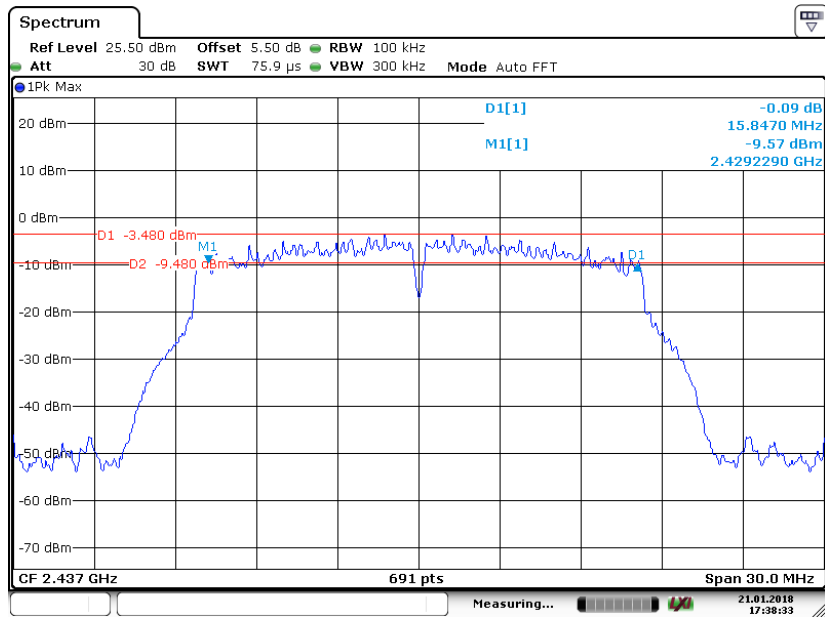


Date: 21 JAN 2018 17:38:33

### Chain0: 802.11g High Channel

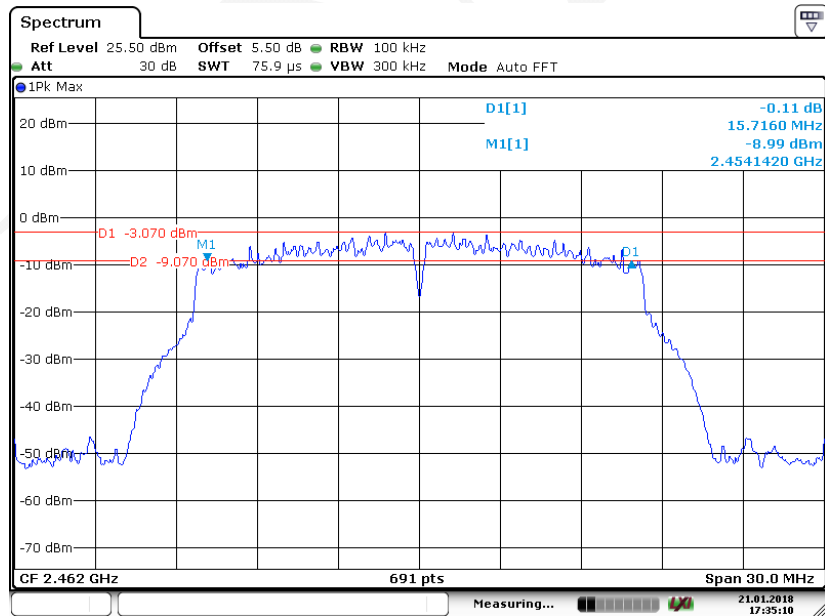


Date: 21 JAN 2018 17:35:10

**Chain0: 802.11n-HT20 Low Channel**

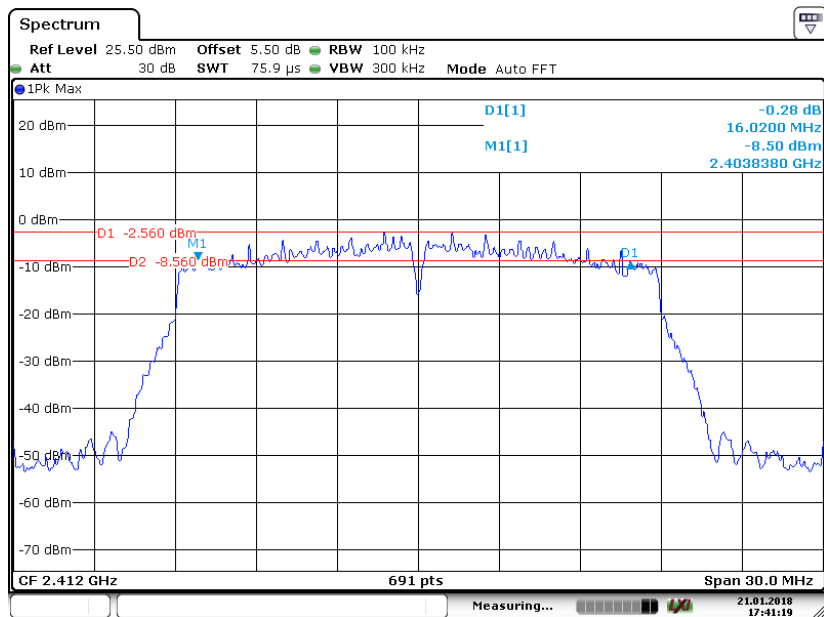

Date: 21 JAN 2018 17:41:19


**Chain0: 802.11n-HT20 Middle Channel**

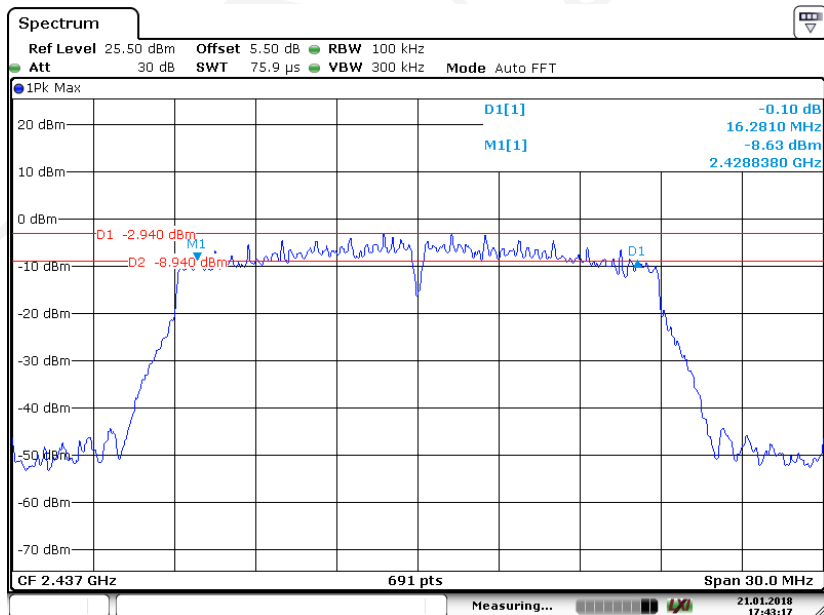

Date: 21 JAN 2018 17:43:17




**Chain0: 802.11n-HT20 High Channel**

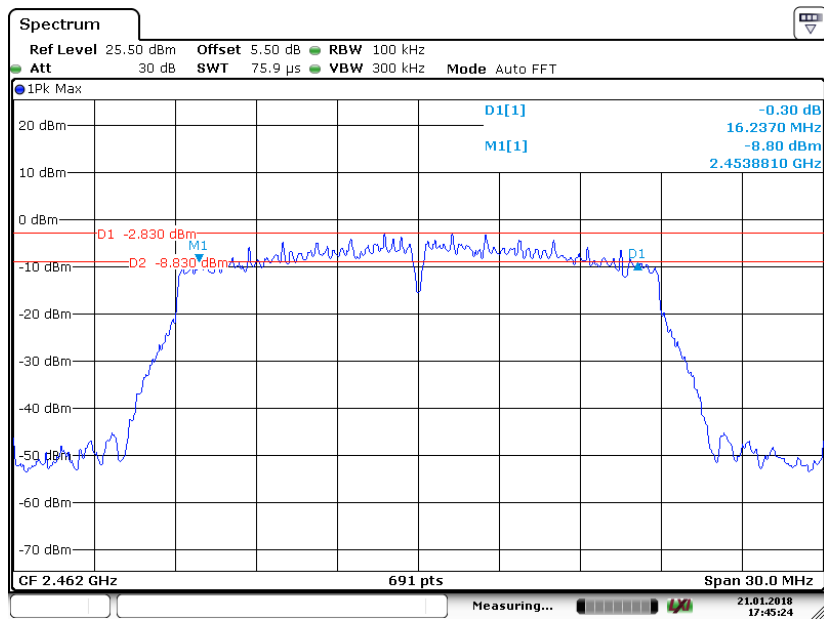


Date:21 JAN 2018 17:45:24

**Chain0: 802.11n-HT40 Low Channel**

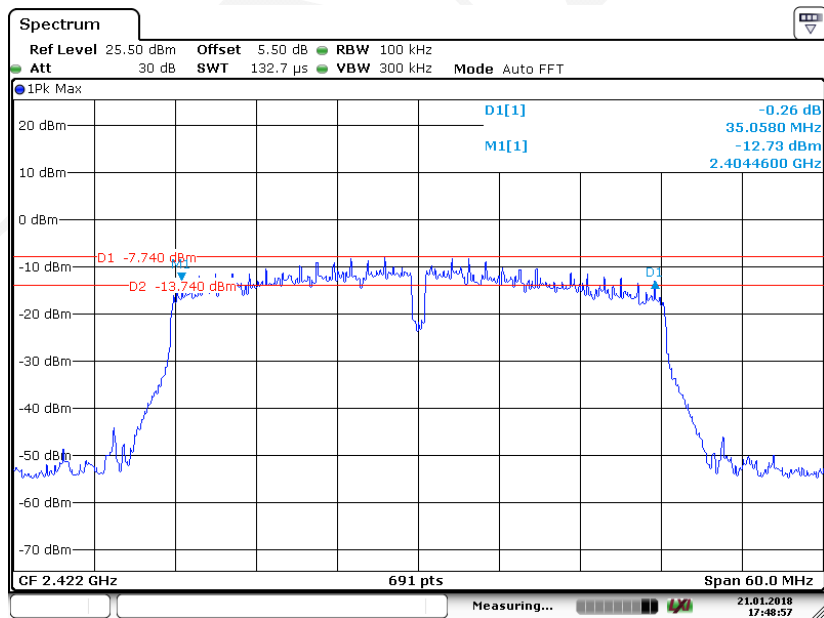


Date:21 JAN 2018 17:48:58

### Chain0: 802.11n-HT40 Middle Channel

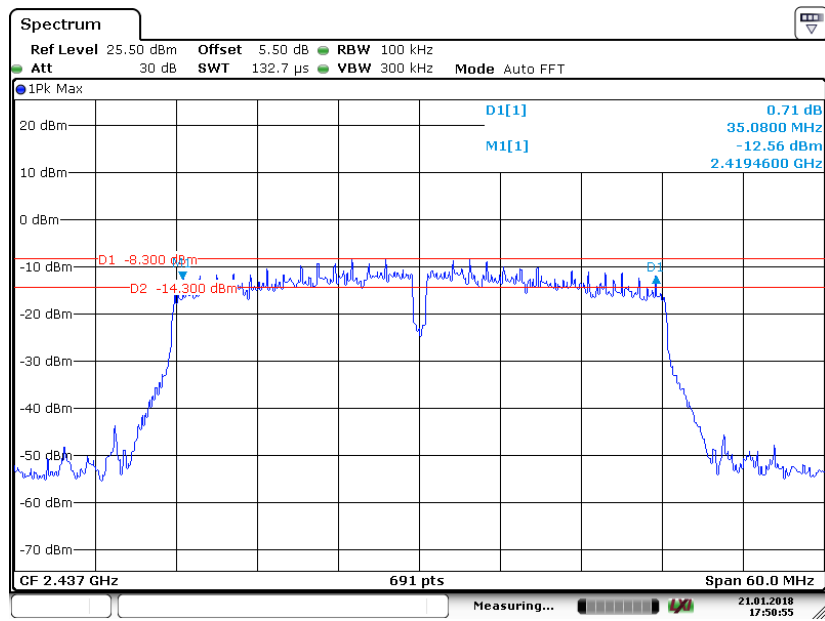


Date:21 JAN 2018 17:50:56

### Chain0: 802.11n-HT40 High Channel

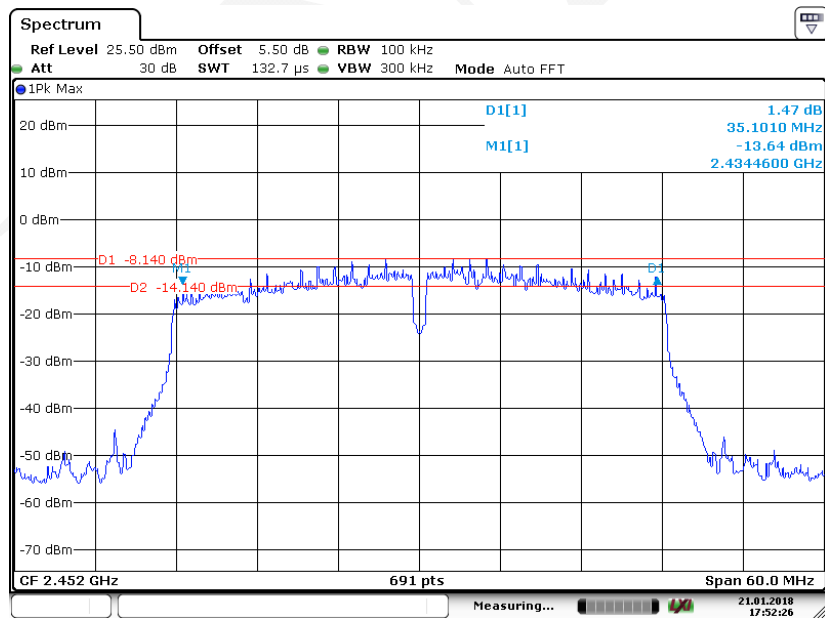


Date:21 JAN 2018 17:52:26

### Chain1: 802.11b Low Channel

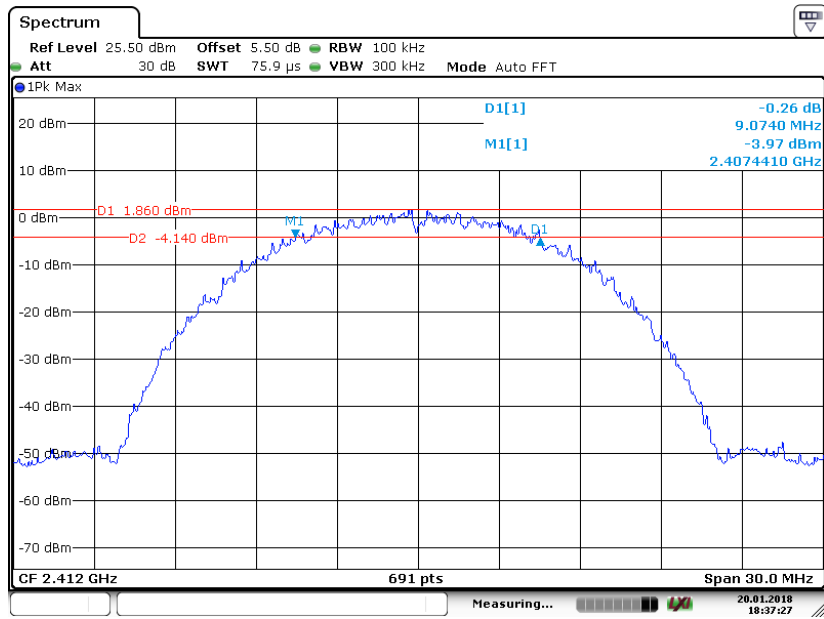


Date: 20 JAN 2018 18:37:28

### Chain1: 802.11b Middle Channel

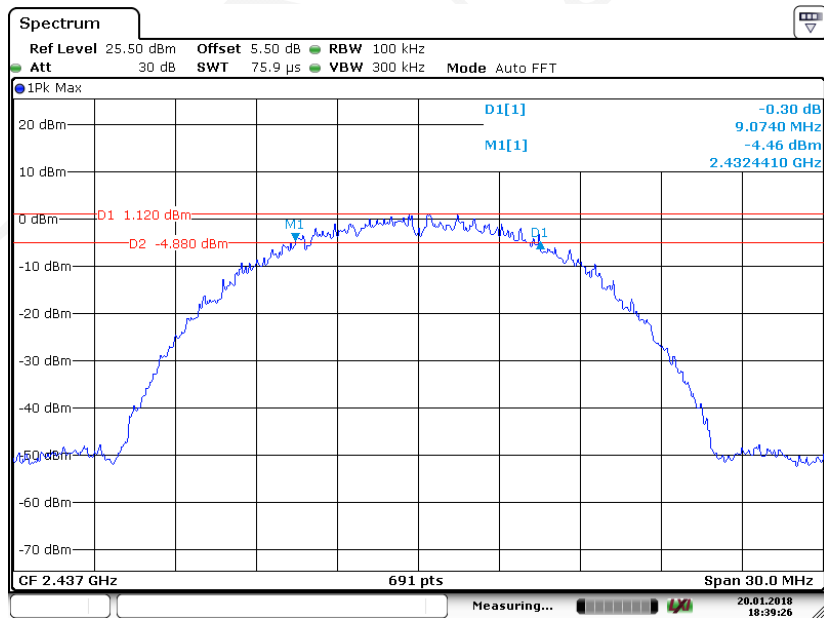


Date: 20 JAN 2018 18:39:26

**Chain1: 802.11b High Channel**

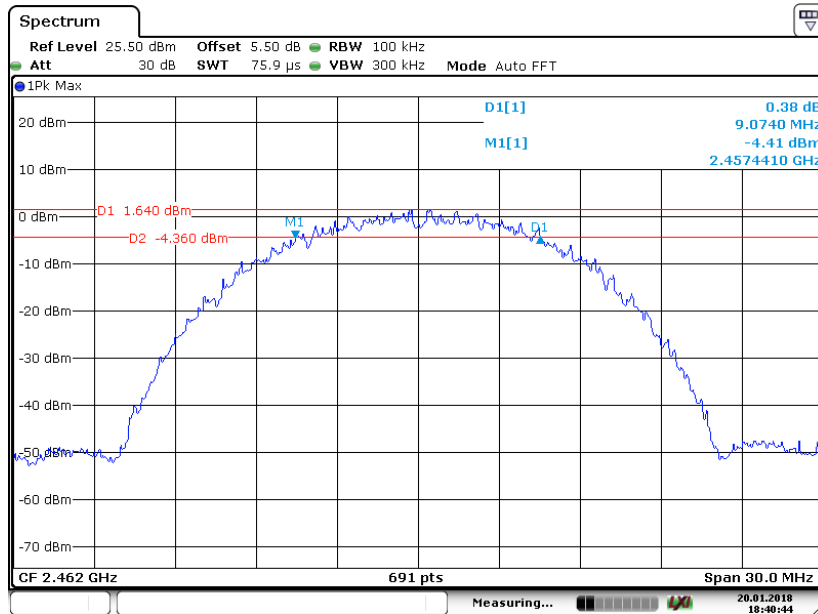


Date: 20 JAN 2018 18:40:44

**Chain1: 802.11g Low Channel**

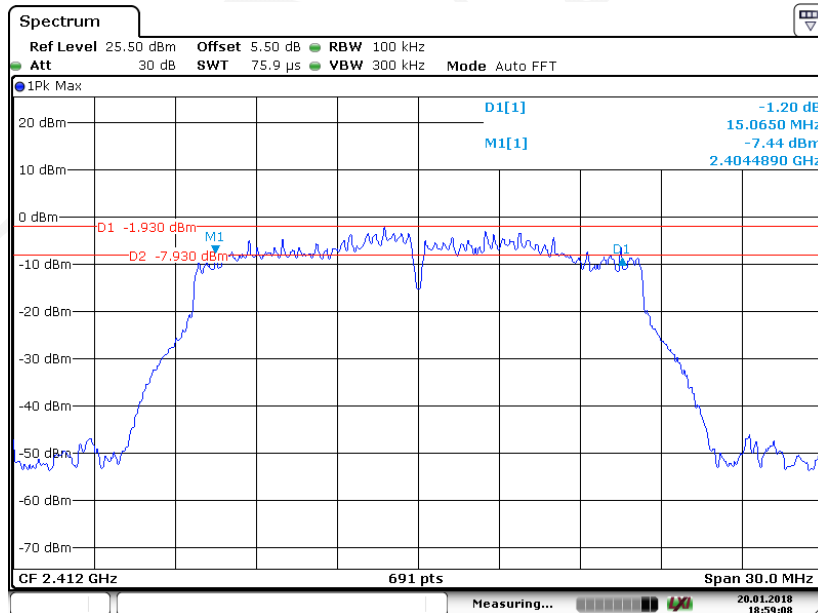


Date: 20 JAN 2018 18:59:09

### Chain1: 802.11g Middle Channel

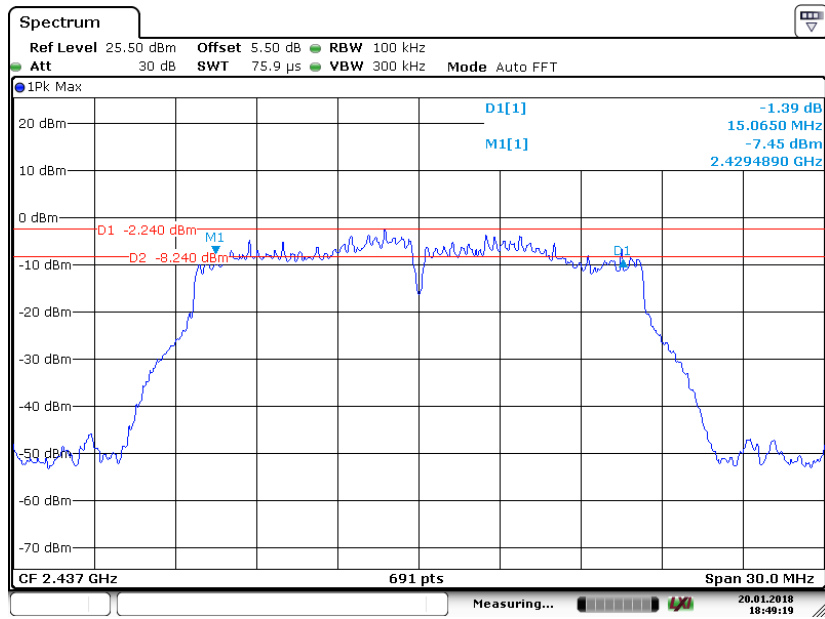


Date: 20 JAN 2018 18:49:20

### Chain1: 802.11g High Channel

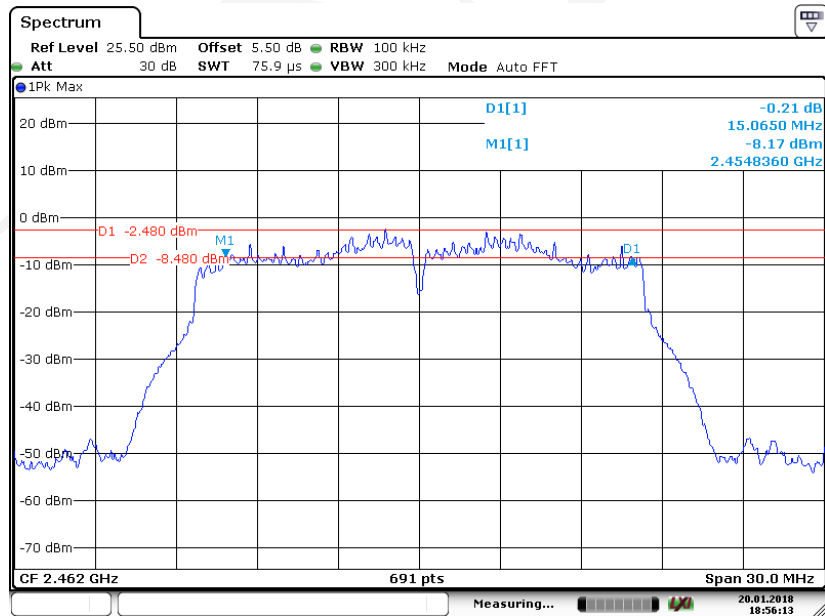


Date: 20 JAN 2018 18:56:13

### Chain1: 802.11n-HT20 Low Channel

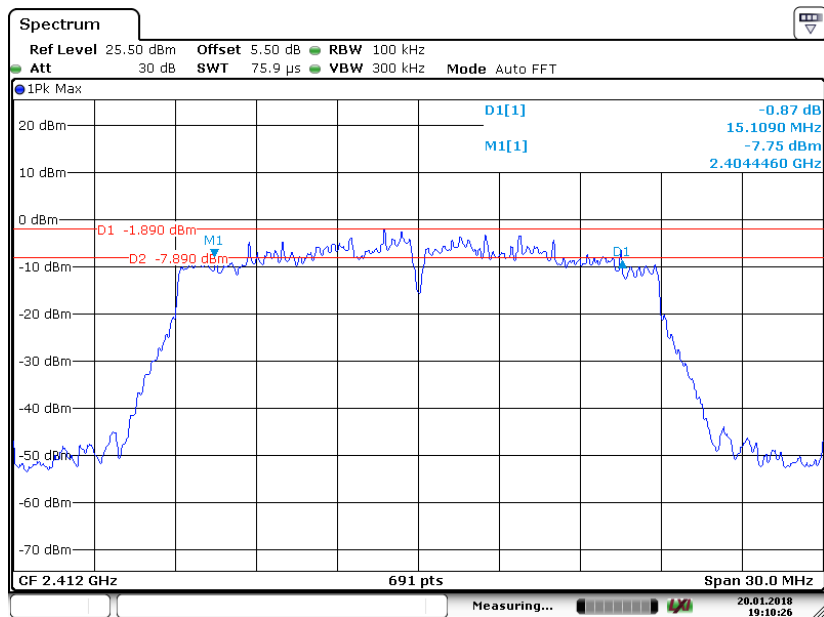


Date: 20 JAN 2018 19:10:26

### Chain1: 802.11n-HT20 Middle Channel

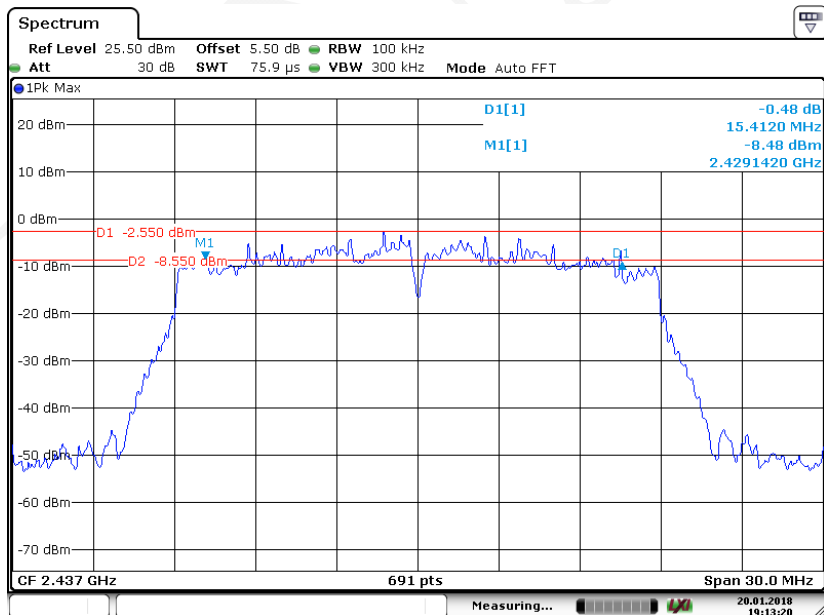


Date: 20 JAN 2018 19:13:21

**Chain1: 802.11n-HT20 High Channel**

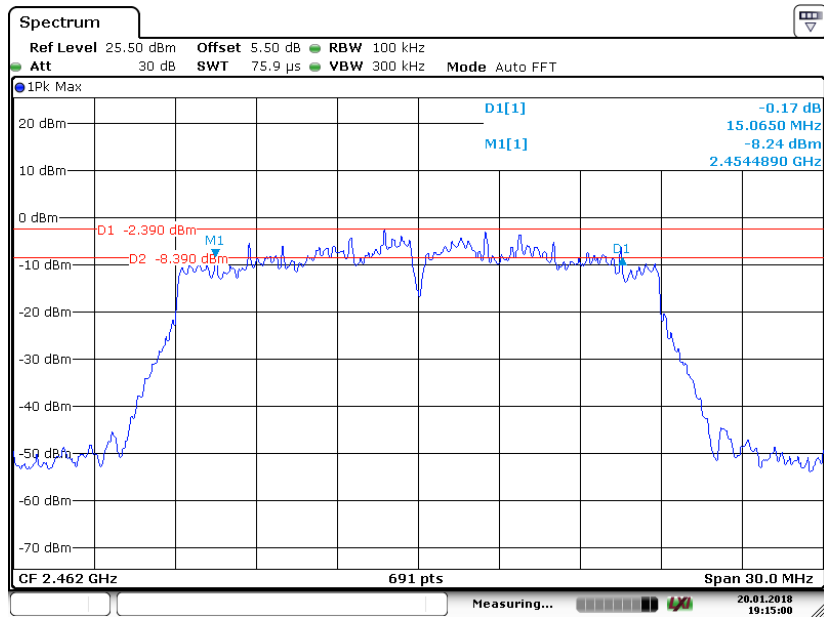


Date:20 JAN 2018 19:15:00

**Chain1: 802.11n-HT40 Low Channel**

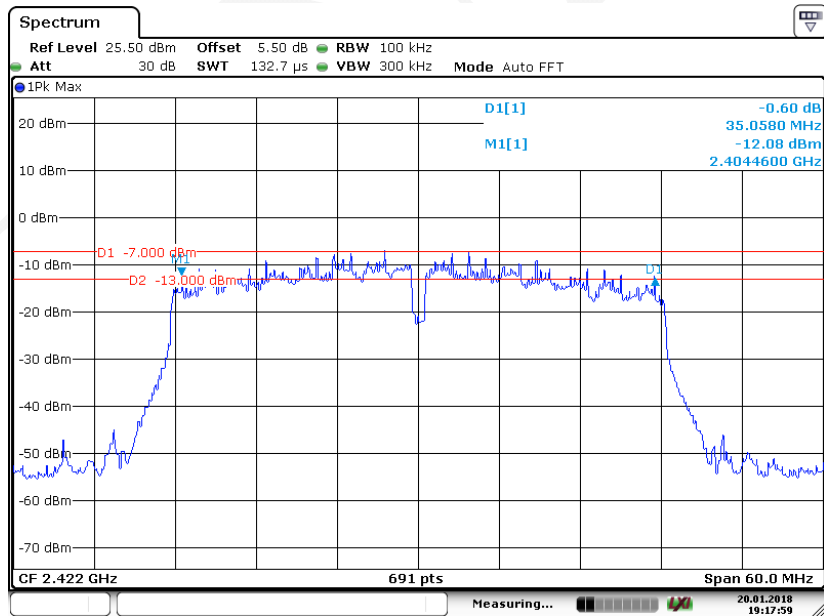


Date:20 JAN 2018 19:17:59

**Chain1: 802.11n-HT40 Middle Channel**

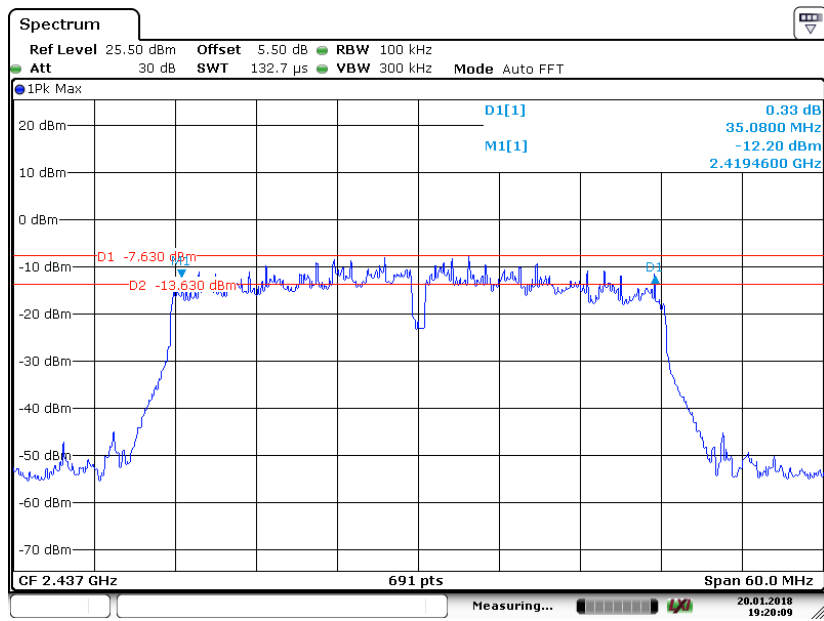

Date:20.JAN.2018 19:20:09

**Chain1: 802.11n-HT40 High Channel**

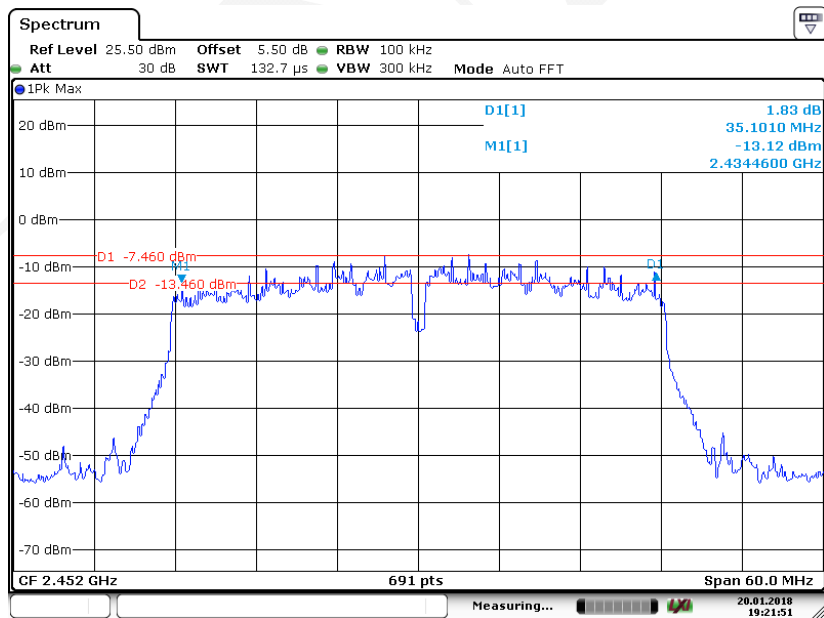

Date:20.JAN.2018 19:21:51



## **FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER**

### **Applicable Standard**

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### **Test Procedure**

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	24.5 °C
<b>Relative Humidity:</b>	51 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Aaron Wang on 2018-01-20 to 2018-01-21*

*EUT operation mode: Transmitting*

Test mode	Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)			Limit (dBm)	Result
			Chain0	Chain1	Total		
802.11b	Low	2412	16.93	16.71	/	30	Pass
	Middle	2437	16.66	16.36	/	30	Pass
	High	2462	16.70	16.63	/	30	Pass
802.11g	Low	2412	16.25	16.68	/	30	Pass
	Middle	2437	16.25	16.20	/	30	Pass
	High	2462	16.14	16.15	/	30	Pass
802.11n-HT20	Low	2412	16.23	16.57	19.41	30	Pass
	Middle	2437	16.20	16.00	19.11	30	Pass
	High	2462	16.10	15.98	19.05	30	Pass
802.11n-HT40	Low	2422	13.54	13.93	16.75	30	Pass
	Middle	2437	13.43	13.51	16.48	30	Pass
	High	2452	13.53	13.49	16.52	30	Pass

Note: The total output power= $10\log_{10}(10^{(Chain\ 0/10)}+10^{(Chain\ 1/10)})$

## **FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**

### **Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### **Test Procedure**

According to KDB558074 D01 DTS Meas Guidance v04 sub-clause 13.2 and ANSI C63.10-2013 clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### **Test Data**

#### **Environmental Conditions**


<b>Temperature:</b>	24.6°C
<b>Relative Humidity:</b>	51 %
<b>ATM Pressure:</b>	101.1 kPa

*The testing was performed by Aaron Wang on 2018-01-20 to 2018-01-21.*

**Test Result:** *Compliance*


**Band Edge**

**Chain0: 802.11b Mode Left Side**

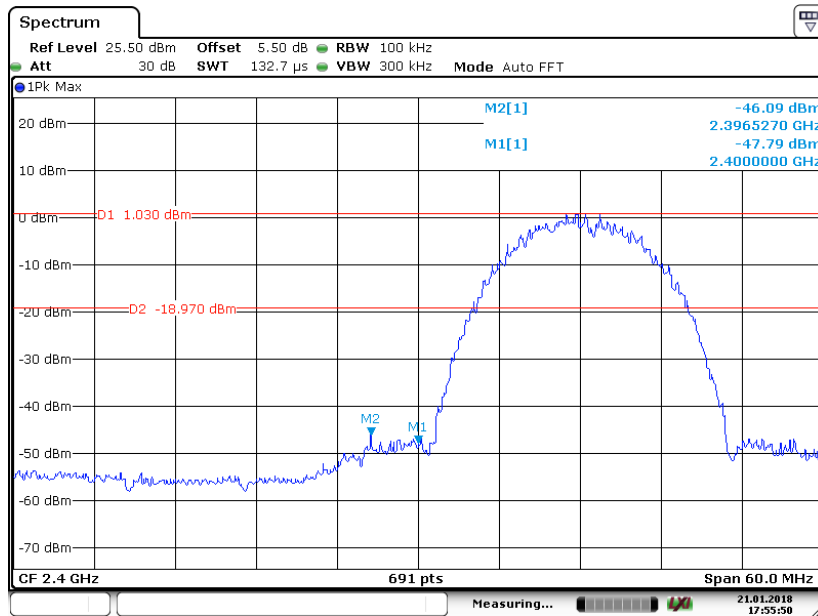


Date: 21 JAN 2018 17:55:50

**Chain0: 802.11b Mode Right Side**

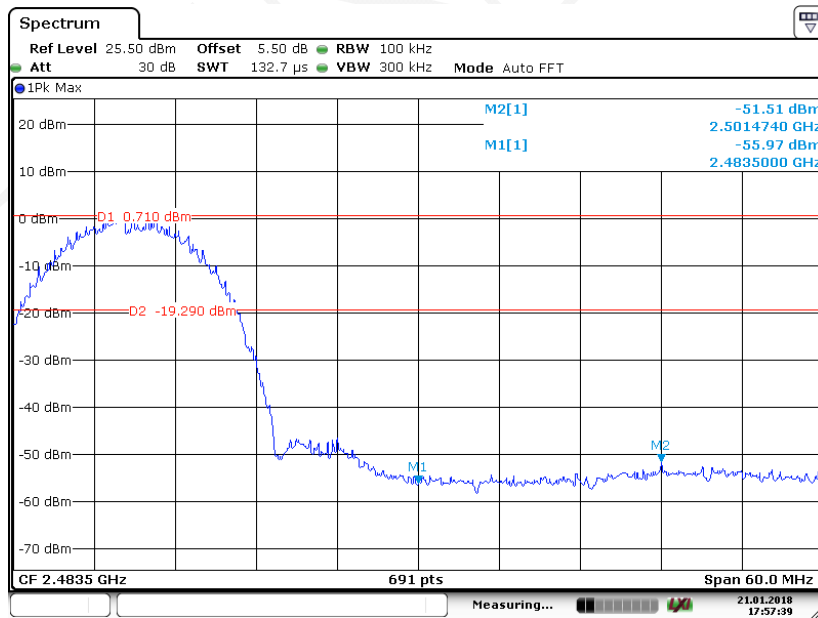


Date: 21 JAN 2018 17:57:39


**Chain0: 802.11g Mode Left Side**

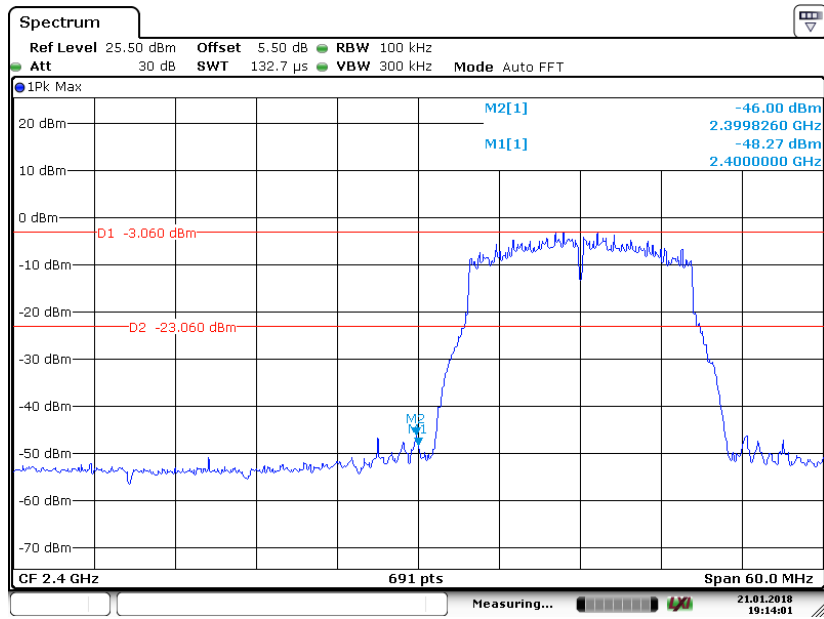

**Chain0: 802.11g Mode Right Side**

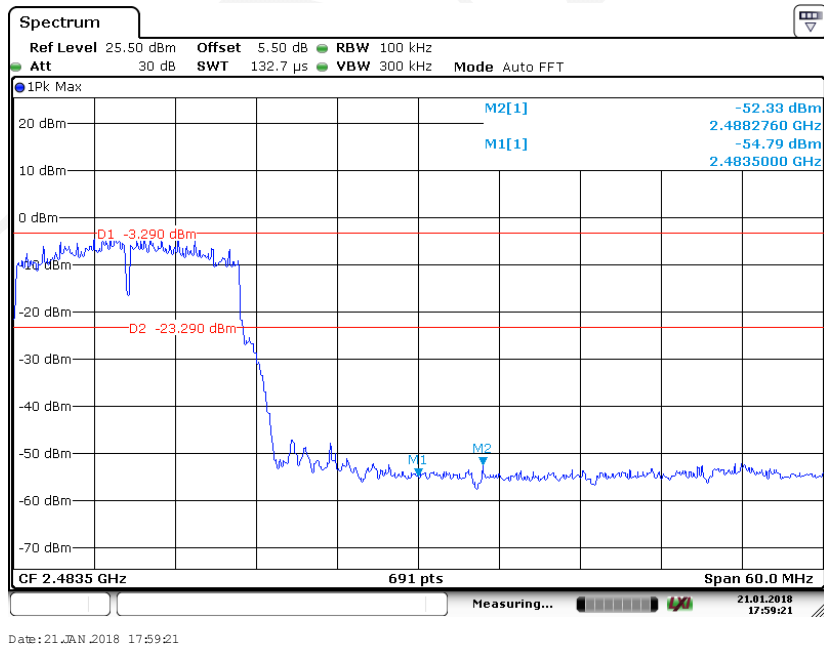


**Chain0: 802.11n-HT20 Mode Left Side**

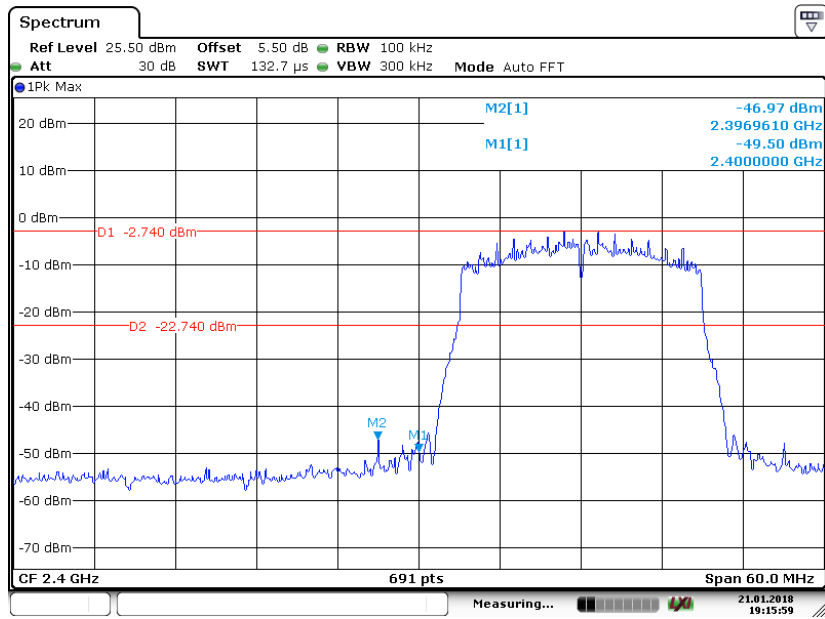


Date: 21 JAN 2018 19:15:59

**Chain0: 802.11n-HT20 Mode Right Side**

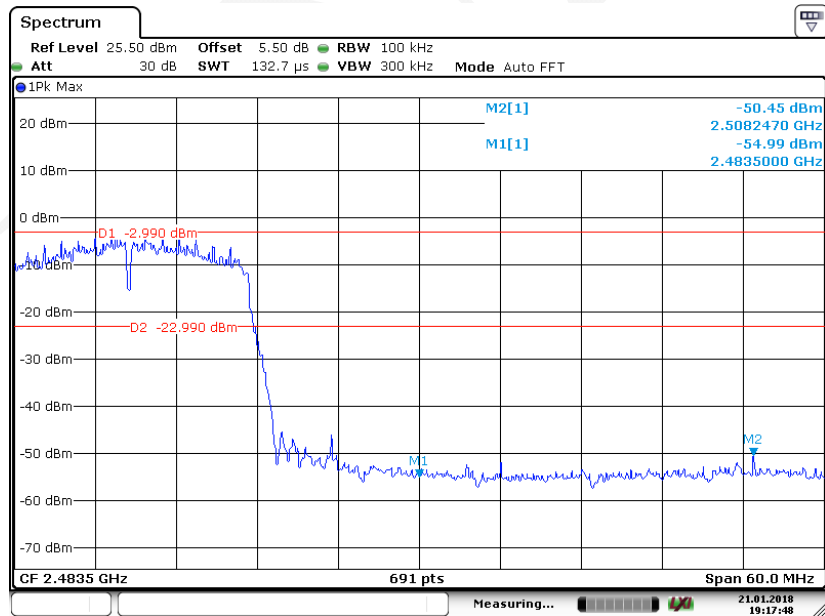


Date: 21 JAN 2018 19:17:49

### Chain0: 802.11n-HT40 Mode Left Side

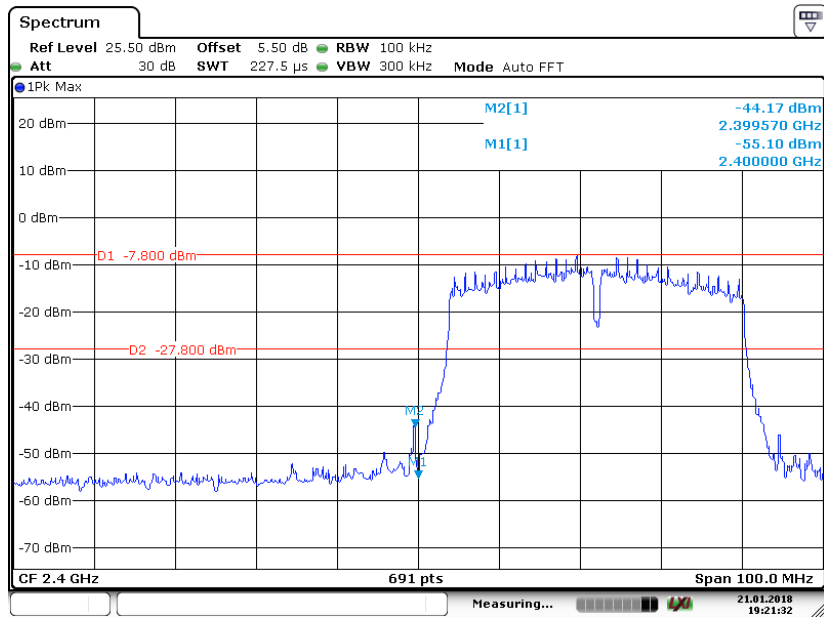


Date:21 JAN 2018 19:21:32

### Chain0: 802.11n-HT40 Mode Right Side

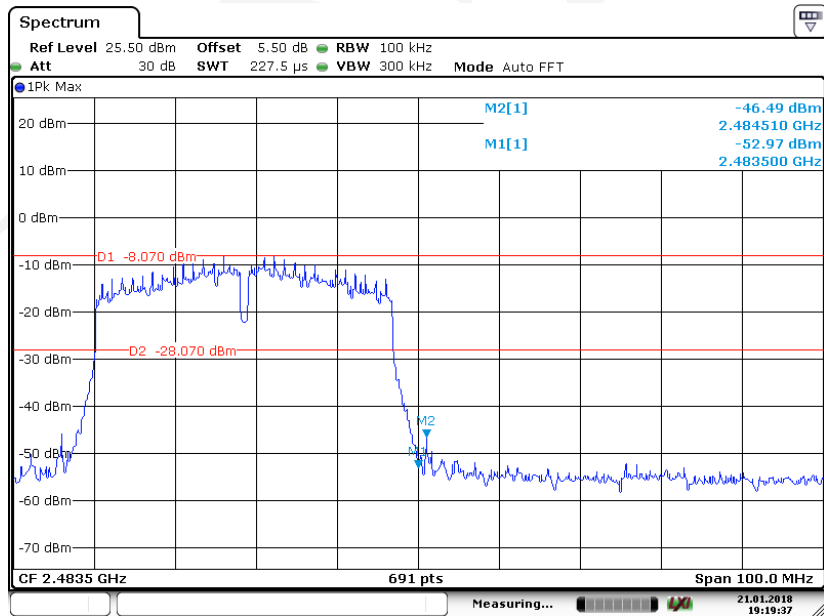


Date:21 JAN 2018 19:19:37

**Chain1: 802.11b Mode Left Side**

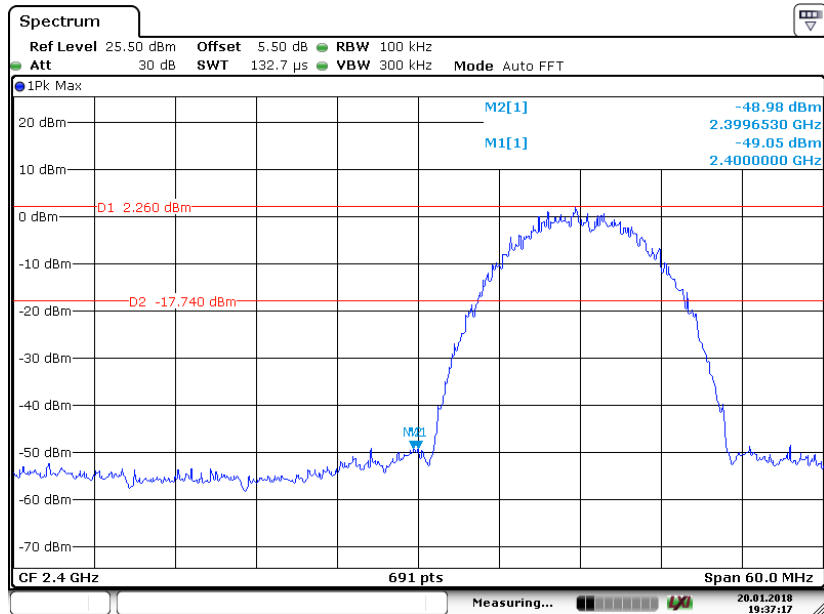

Date: 20 JAN 2018 19:37:17


**Chain1: 802.11b Mode Right Side**

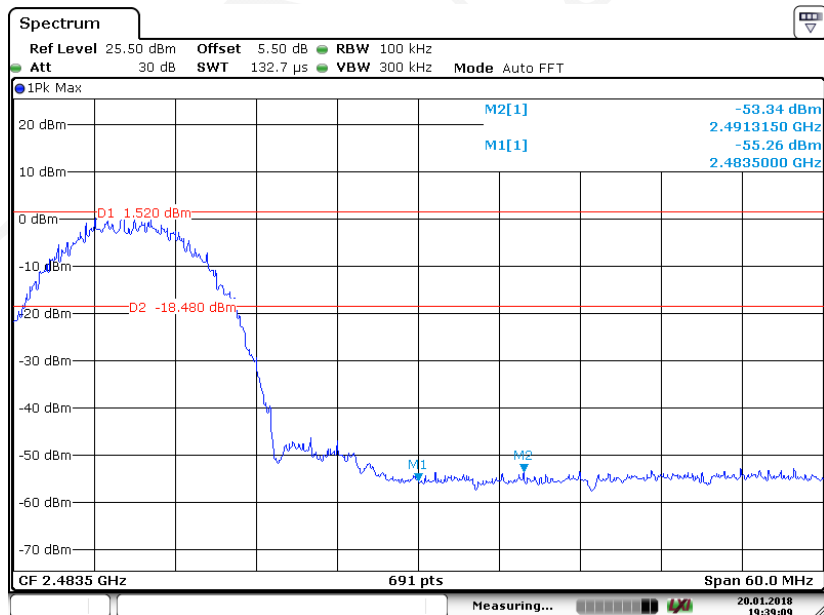


Date: 20 JAN 2018 19:39:10




**Chain1: 802.11g Mode Left Side**

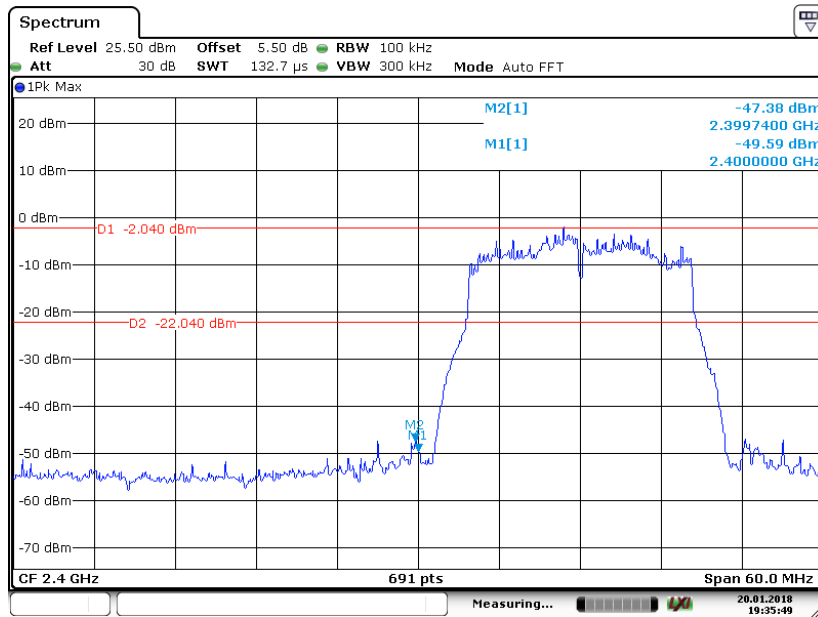

**Chain1: 802.11g Mode Right Side**

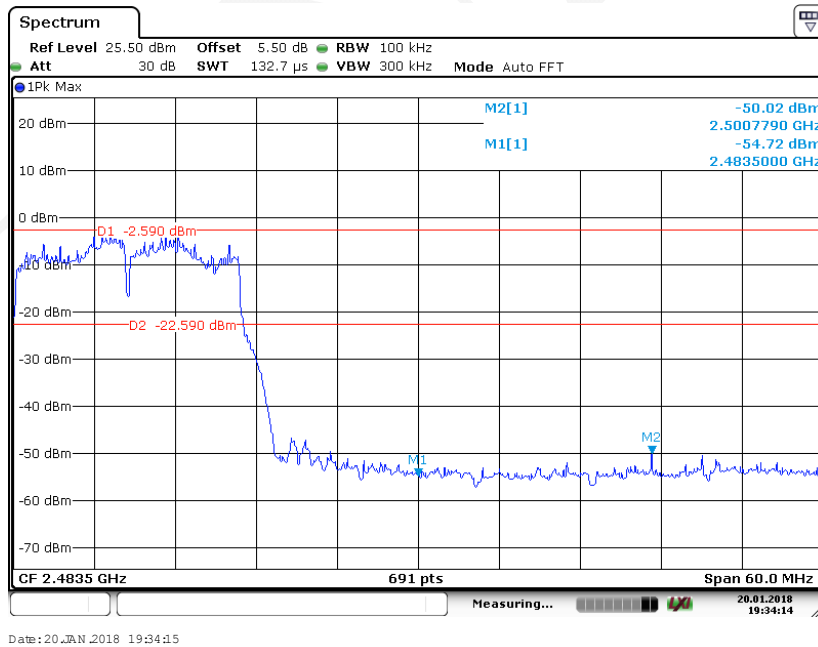


**Chain1: 802.11n-HT20 Mode Left Side**

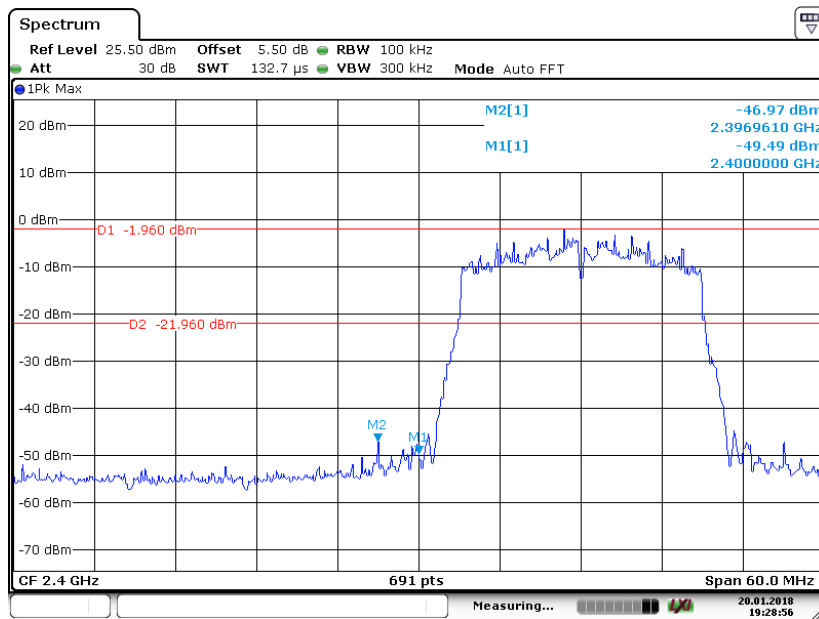


Date: 20 JAN 2018 19:28:56

**Chain1: 802.11n-HT20 Mode Right Side**

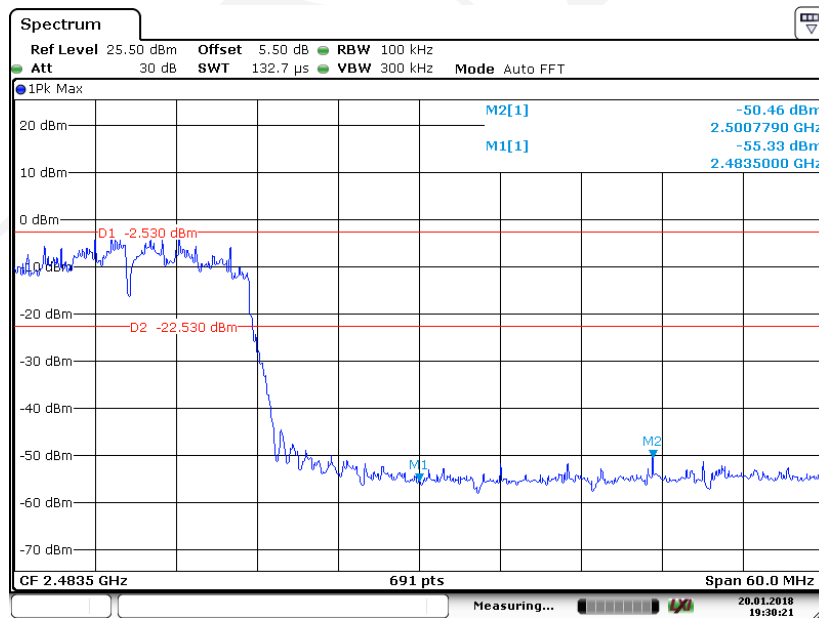


Date: 20 JAN 2018 19:30:22

### Chain1: 802.11n-HT40 Mode Left Side

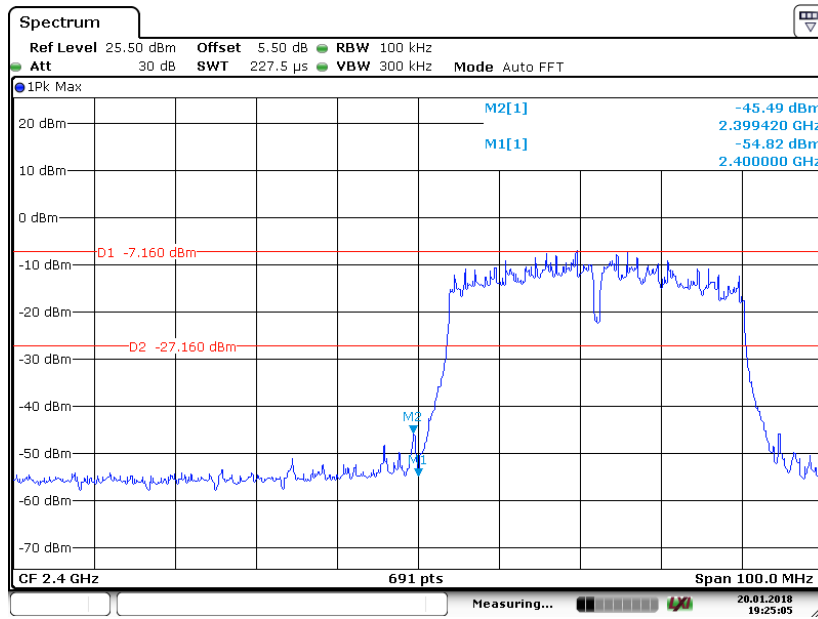

### Chain1: 802.11n-HT40 Mode Right Side

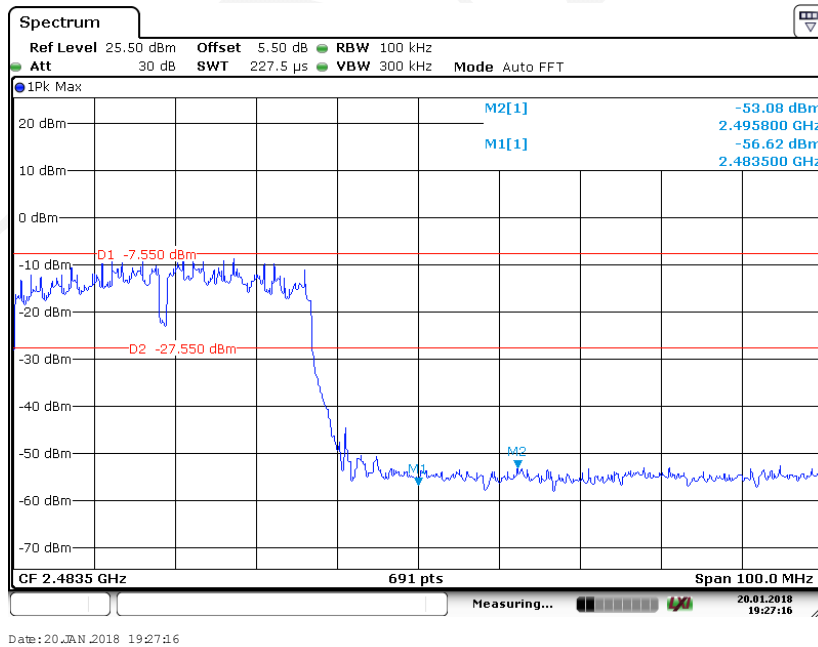

## **FCC §15.247(e) - POWER SPECTRAL DENSITY**

### **Applicable Standard**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### **Test Procedure**

According to KDB558074 D01 DTS Meas Guidance v04. sub-clause 10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
3. Set the VBW  $\geq 3 \times \text{RBW}$ .
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	24.6°C
<b>Relative Humidity:</b>	51 %
<b>ATM Pressure:</b>	101.1 kPa

*The testing was performed by Aaron Wang on 2018-01-20 to 2018-01-21.*

*EUT operation mode: Transmitting*

**Test Result:** Pass


Channel	Frequency (MHz)	PSD (dBm/3kHz)			Limit (dBm/3kHz)
		Chain0	Chain1	Total	
802.11b mode					
Low	2412	0.51	2.17	/	≤8
Middle	2437	1.39	0.73	/	≤8
High	2462	0.50	1.84	/	≤8
802.11g mode					
Low	2412	-17.85	-16.62	/	≤8
Middle	2437	-18.20	-17.86	/	≤8
High	2462	-17.87	-17.71	/	≤8
802.11n-HT20 mode					
Low	2412	-17.81	-16.43	-14.06	≤8
Middle	2437	-17.95	-16.89	-14.38	≤8
High	2462	-17.61	-17.13	-14.35	≤8
802.11n-HT40 mode					
Low	2422	-21.54	-20.42	-17.93	≤8
Middle	2437	-22.99	-21.88	-19.39	≤8
High	2452	-22.43	-21.95	-19.17	≤8

Note:

The total PSD= $10 \cdot \log_{10}(10^{(\text{Chain 0}/10)} + 10^{(\text{Chain 1}/10)})$


Chain0:

### 802.11b Low Channel

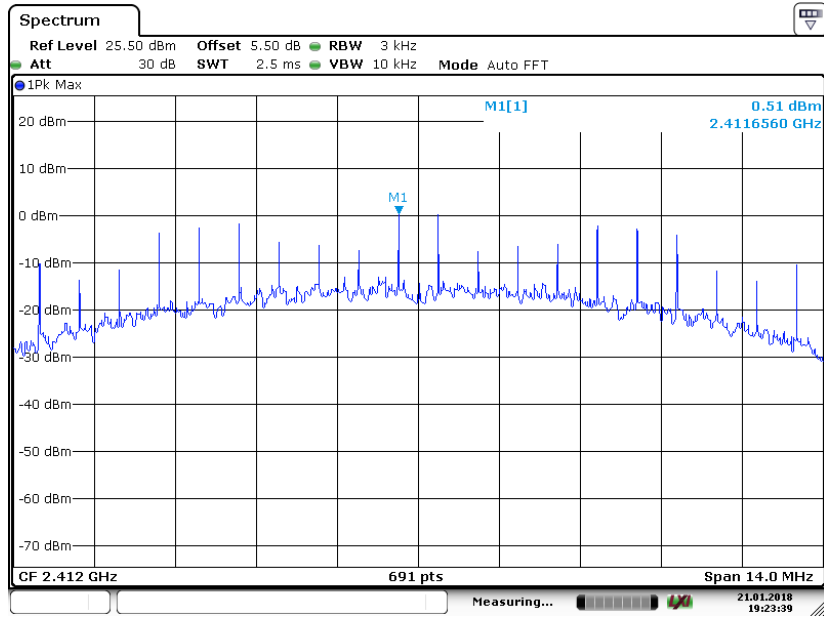


Date: 21 JAN 2018 19:23:39

### 802.11b Middle Channel

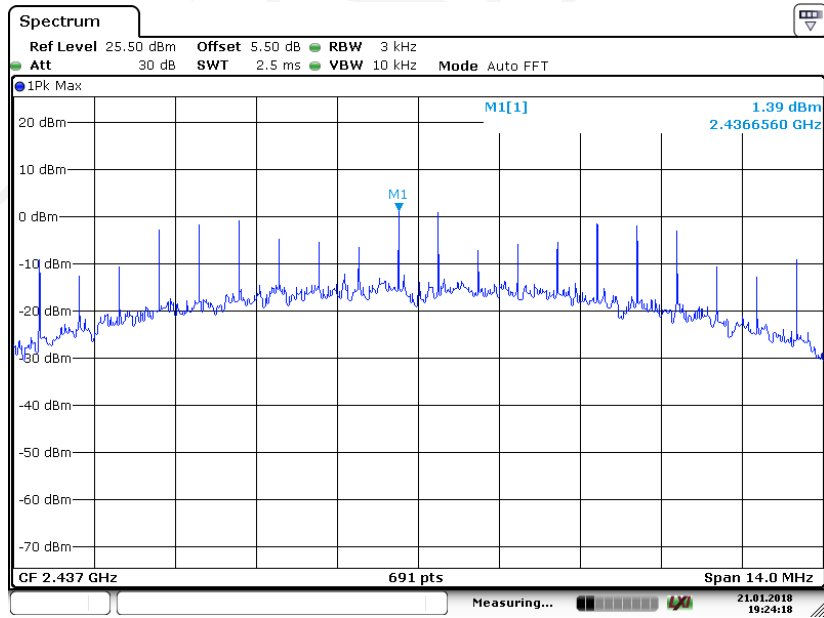


Date: 21 JAN 2018 19:24:18


### 802.11b High Channel

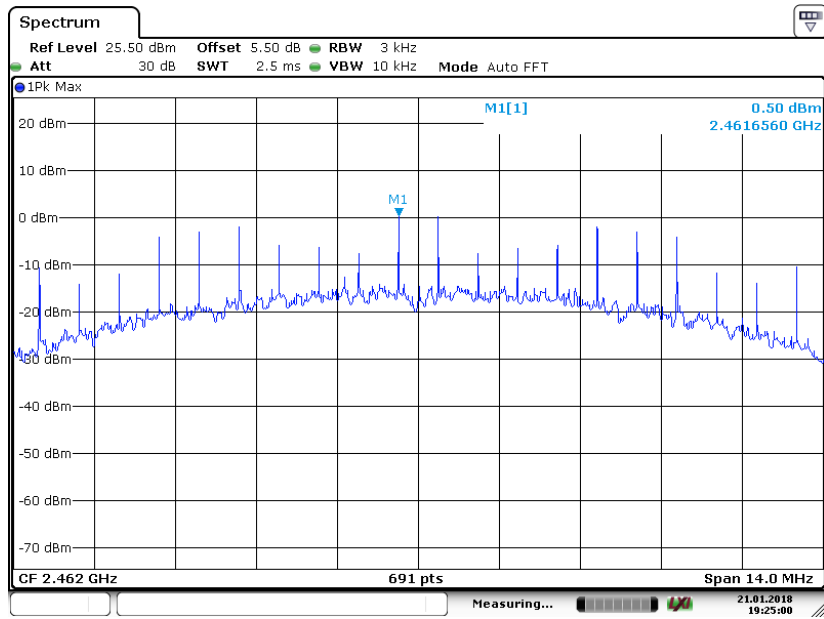

### 802.11g Low Channel

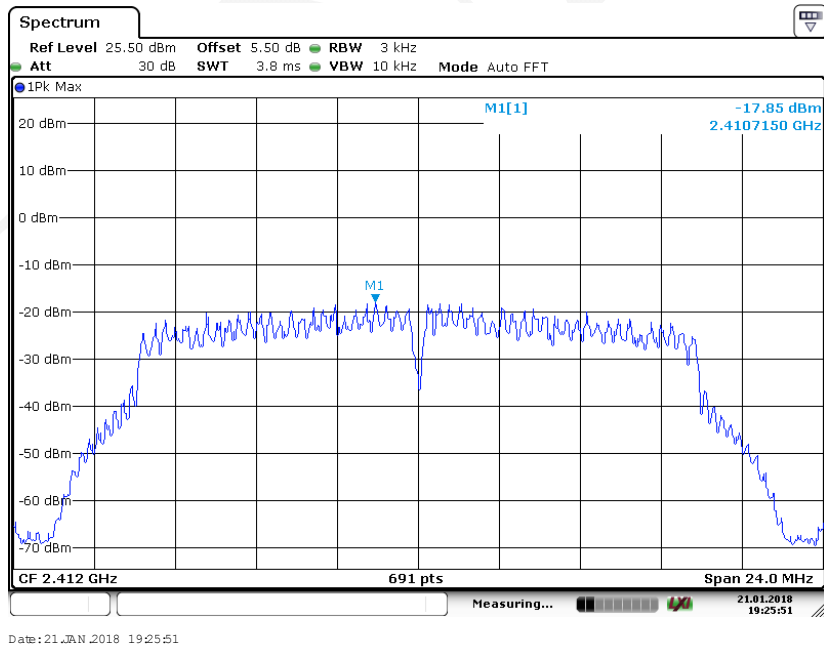


### 802.11g Middle Channel

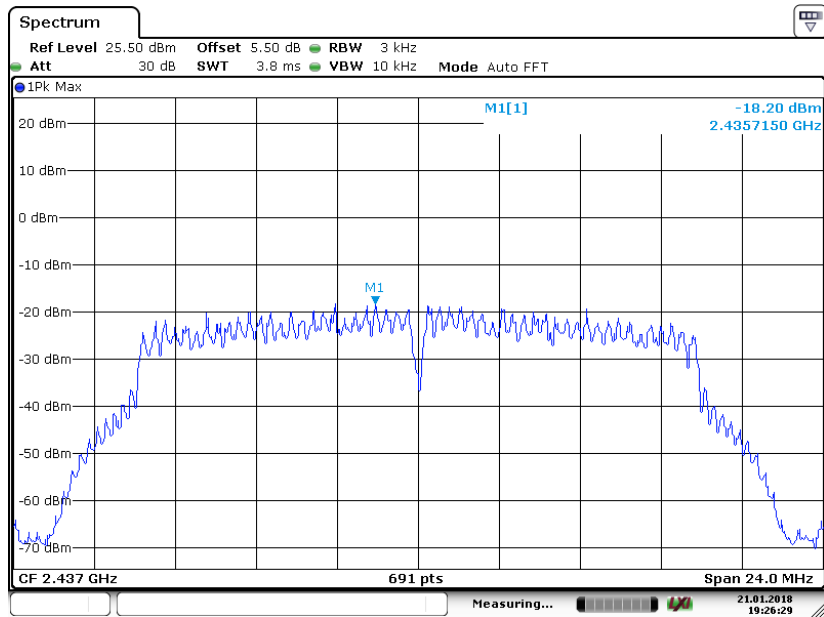

Date:21 JAN 2018 19:26:29


### 802.11g High Channel

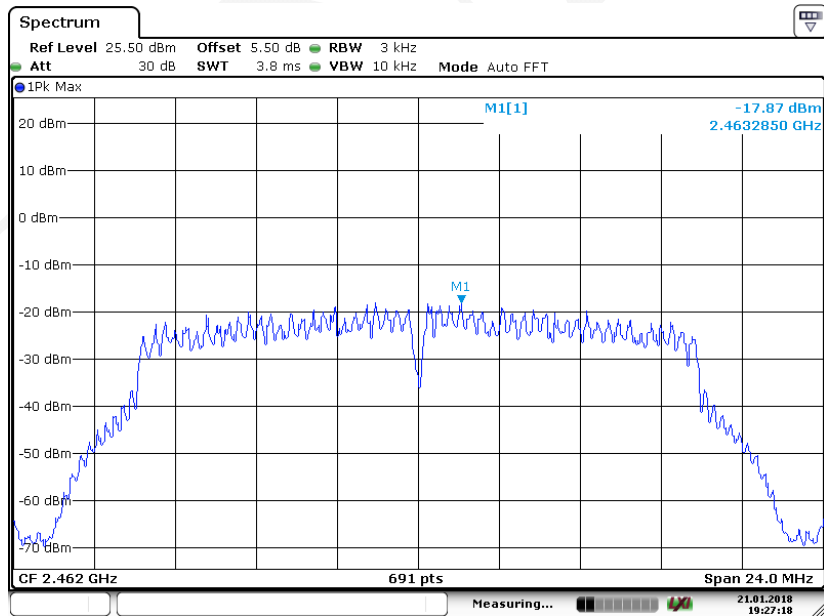

Date:21 JAN 2018 19:27:18




### 802.11n-HT20 Low Channel

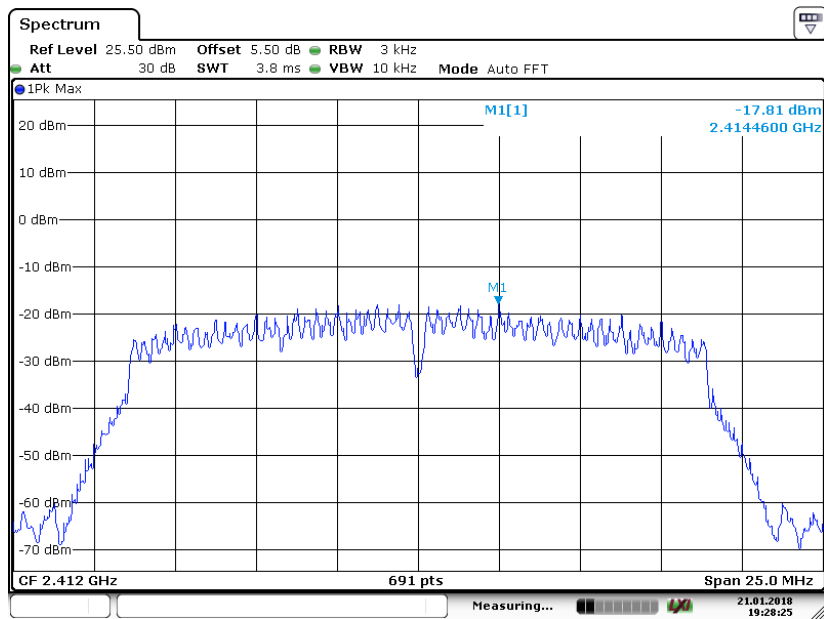


Date: 21 JAN 2018 19:28:25

### 802.11n-HT20 Middle Channel

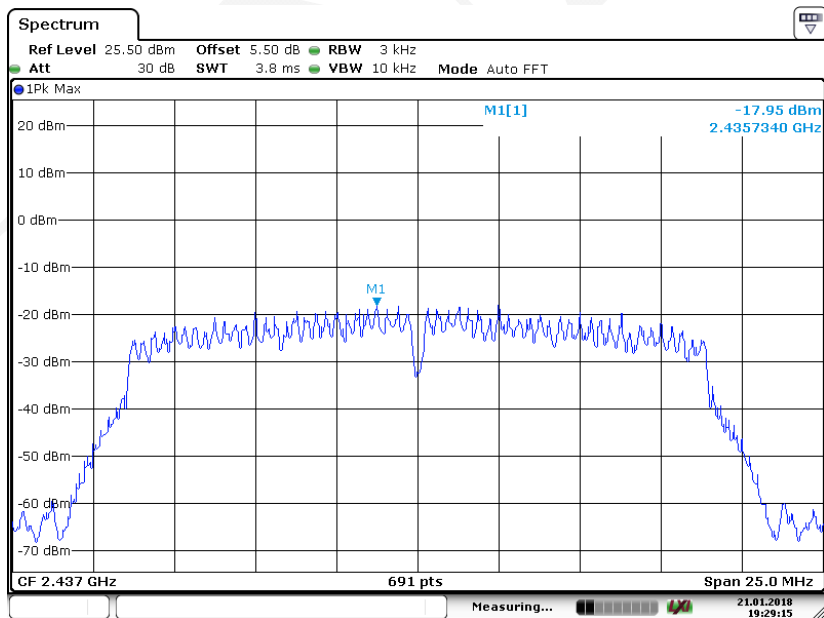


Date: 21 JAN 2018 19:29:15

### 802.11n-HT20 High Channel

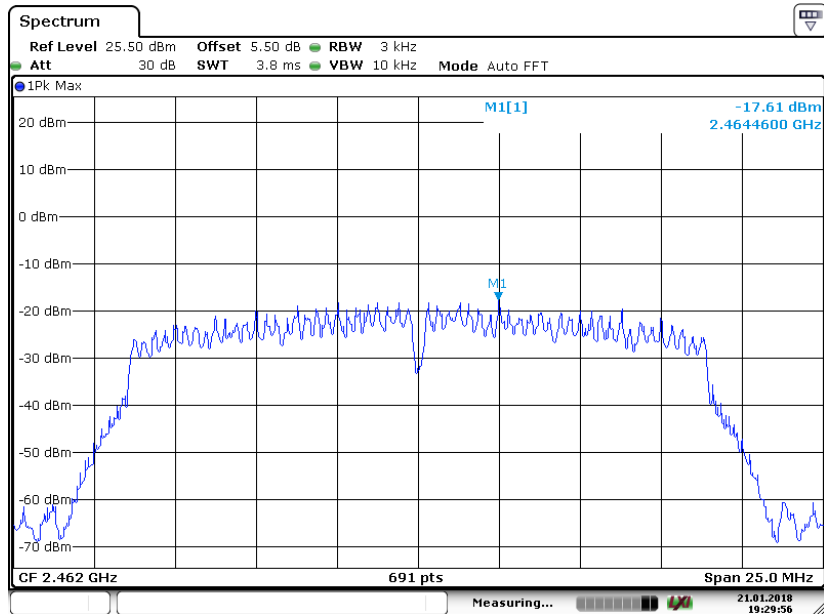


Date: 21 JAN 2018 19:29:57

### 802.11n-HT40 Low Channel

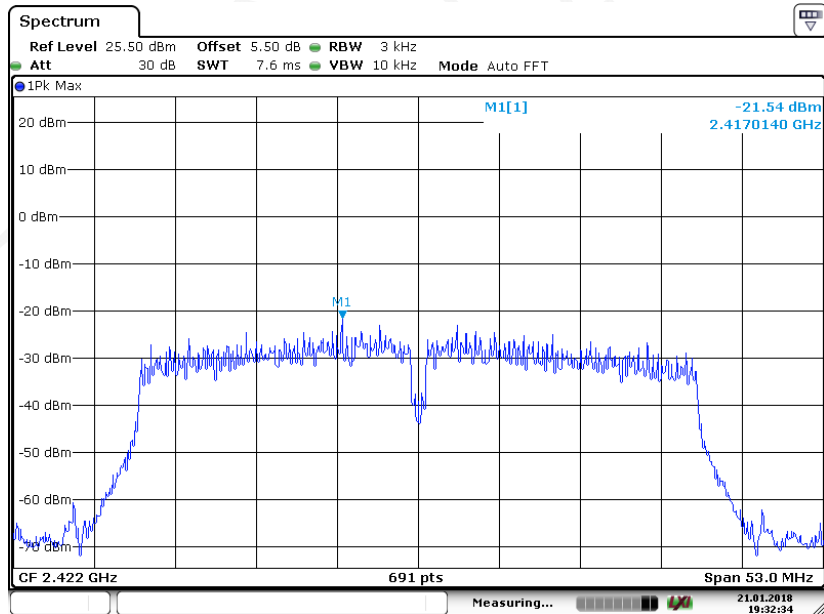


Date: 21 JAN 2018 19:32:34

### 802.11n-HT40 Middle Channel

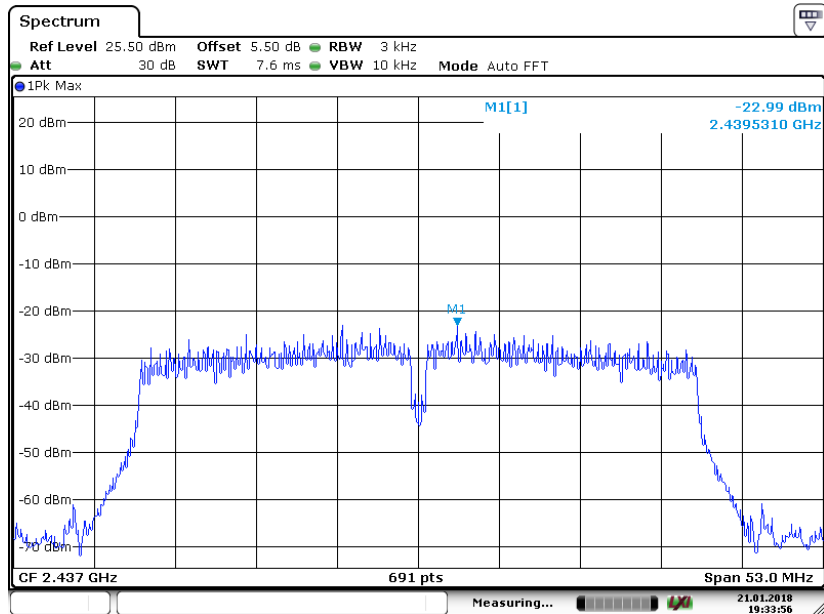

Date: 21 JAN 2018 19:33:57


### 802.11n-HT40 High Channel

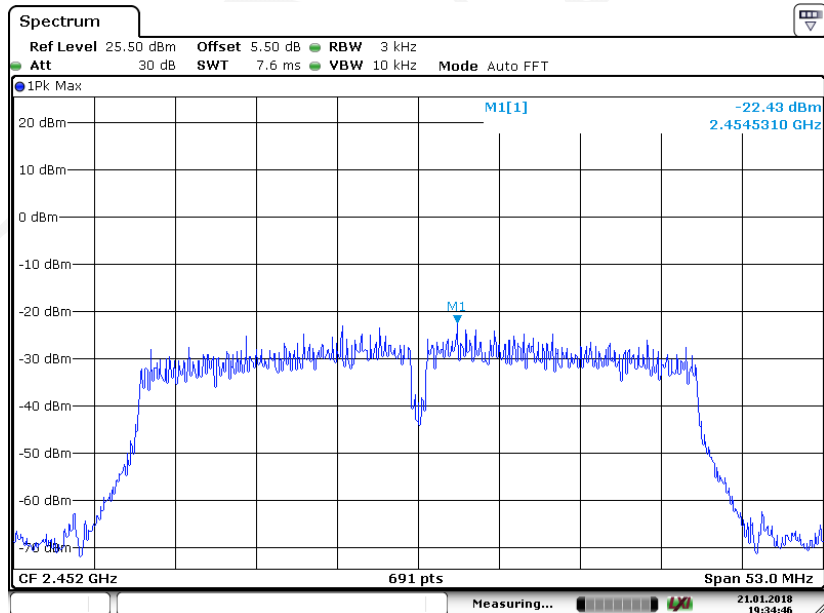

Date: 21 JAN 2018 19:34:46


Chain1:

802.11b Low Channel

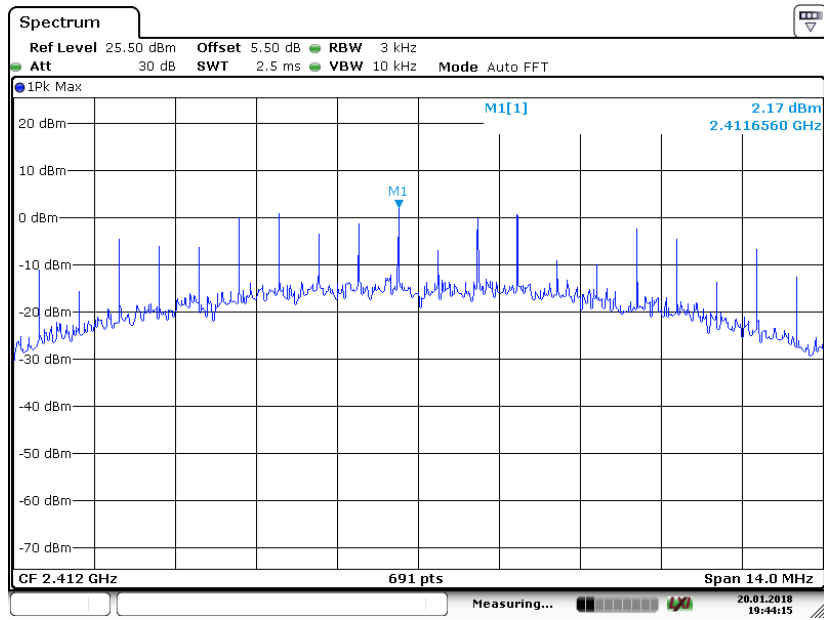


Date:20 JAN 2018 19:44:14

802.11b Middle Channel

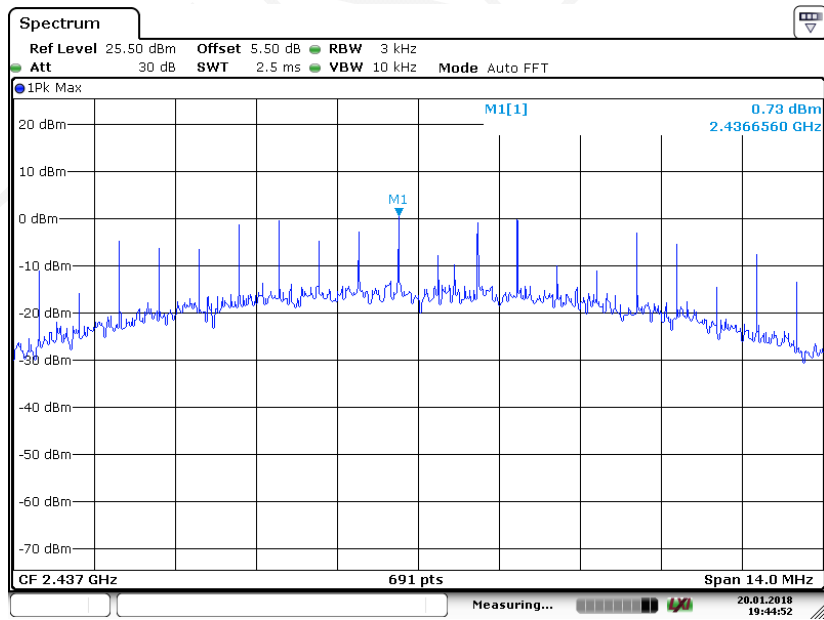


Date:20 JAN 2018 19:44:53


### 802.11b High Channel

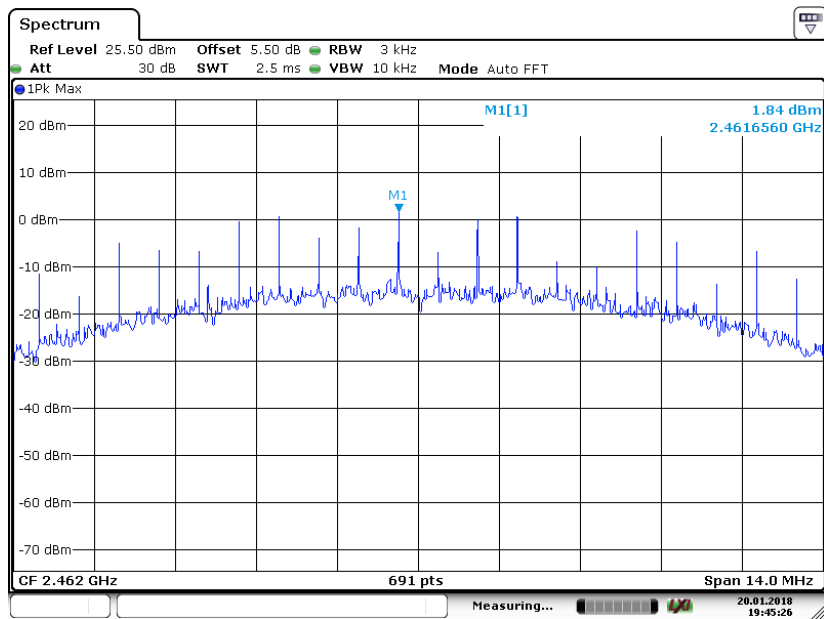


### 802.11g Low Channel

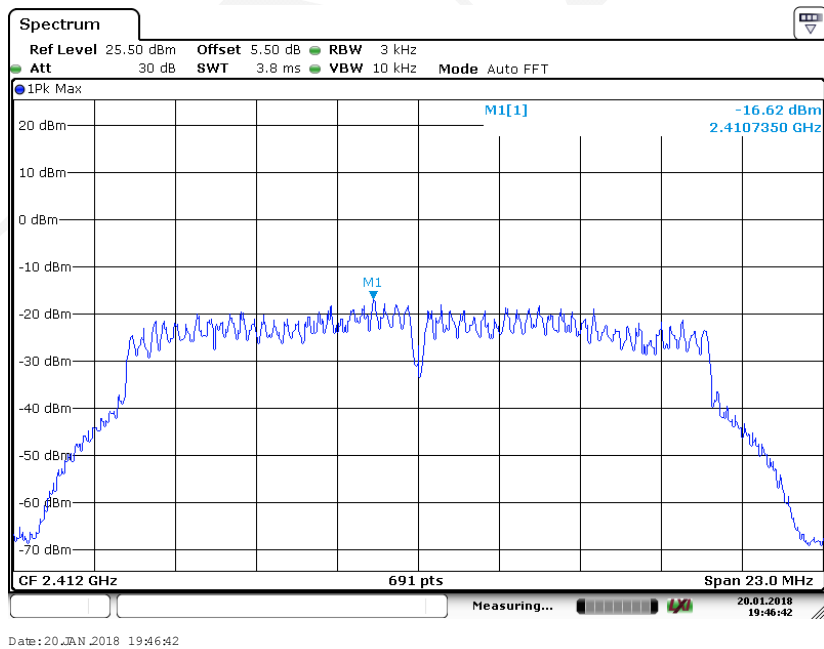


### 802.11g Middle Channel

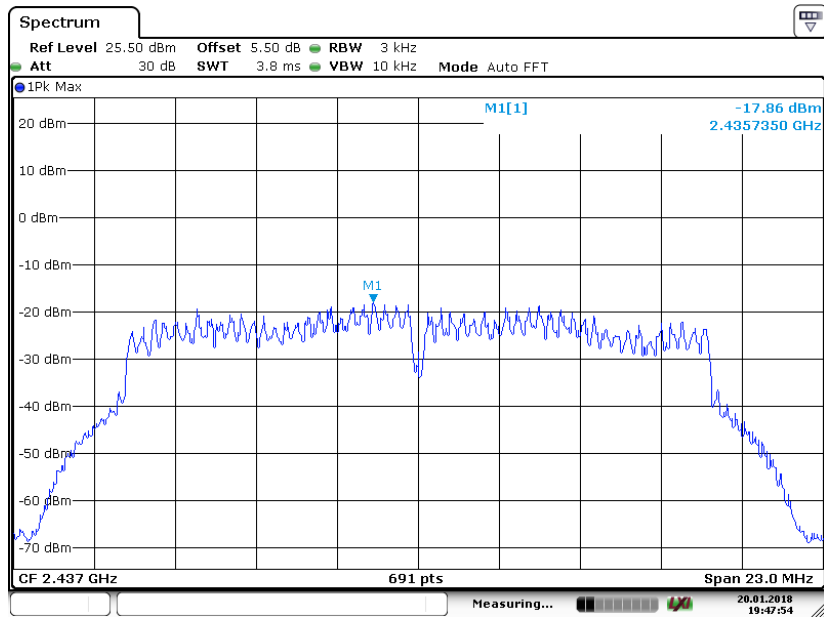

### 802.11g High Channel

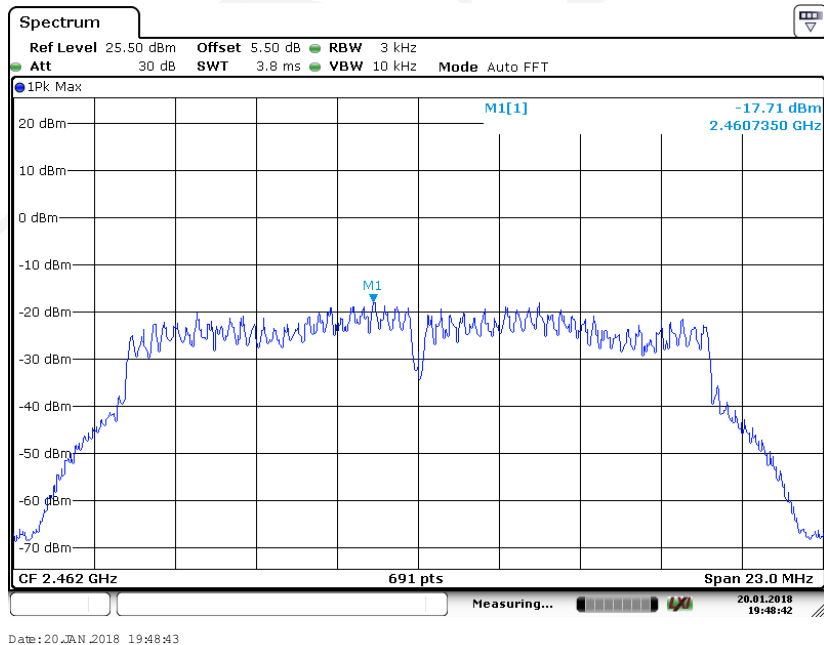


### 802.11n-HT20 Low Channel

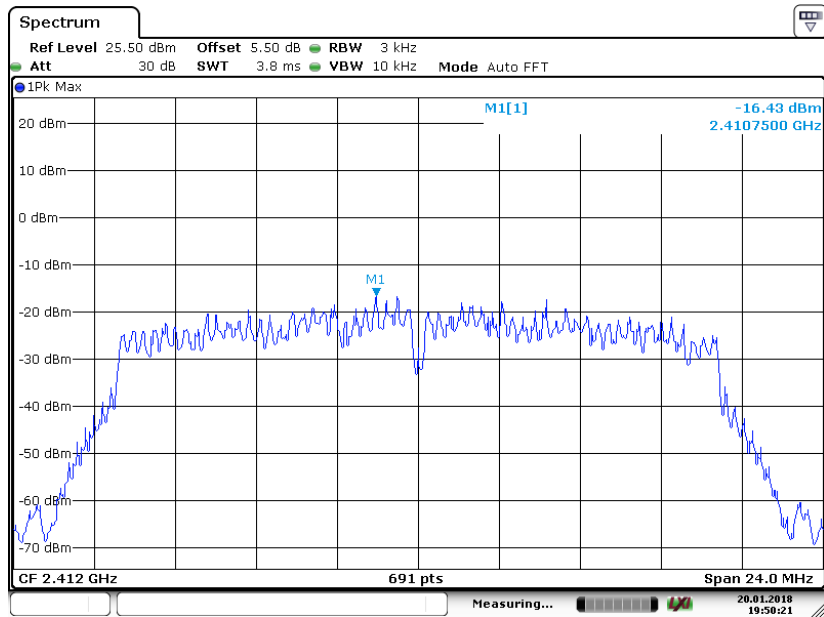


Date: 20 JAN 2018 19:50:21

### 802.11n-HT20 Middle Channel

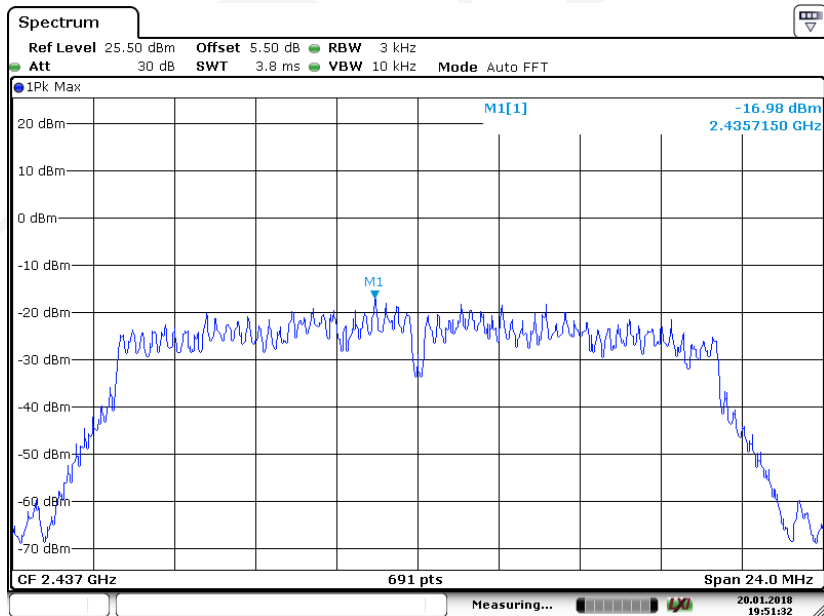


Date: 20 JAN 2018 19:51:32

### 802.11n-HT20 High Channel

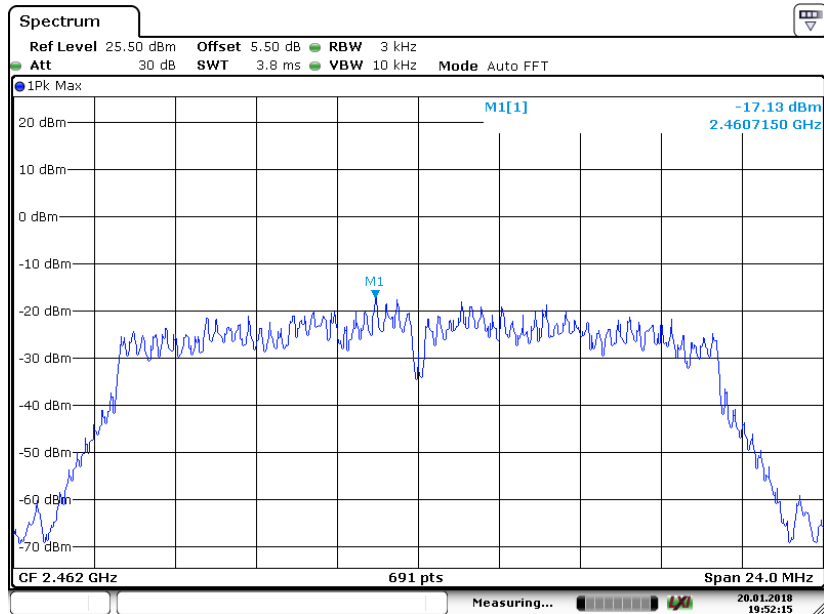

Date:20\_JAN\_2018 19:52:16


### 802.11n-HT40 Low Channel

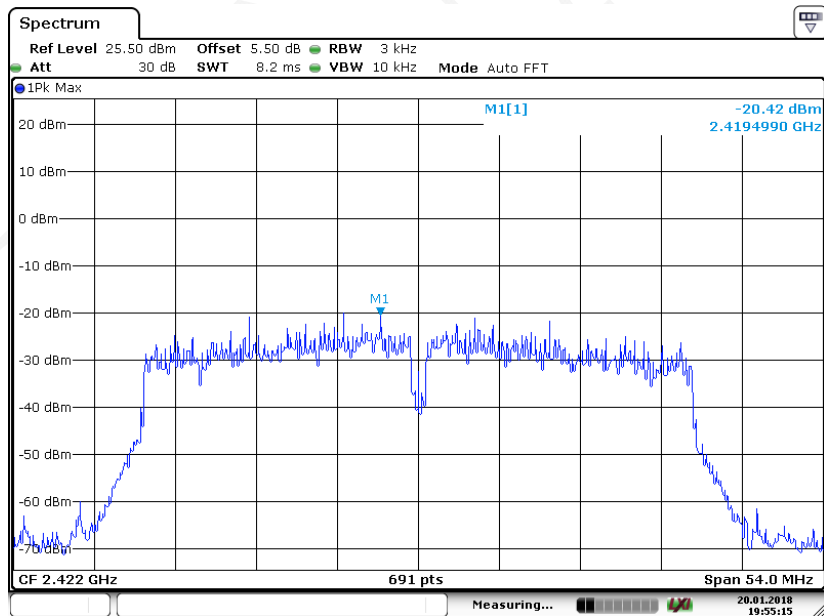

Date:20\_JAN\_2018 19:55:15




### 802.11n-HT40 Middle Channel

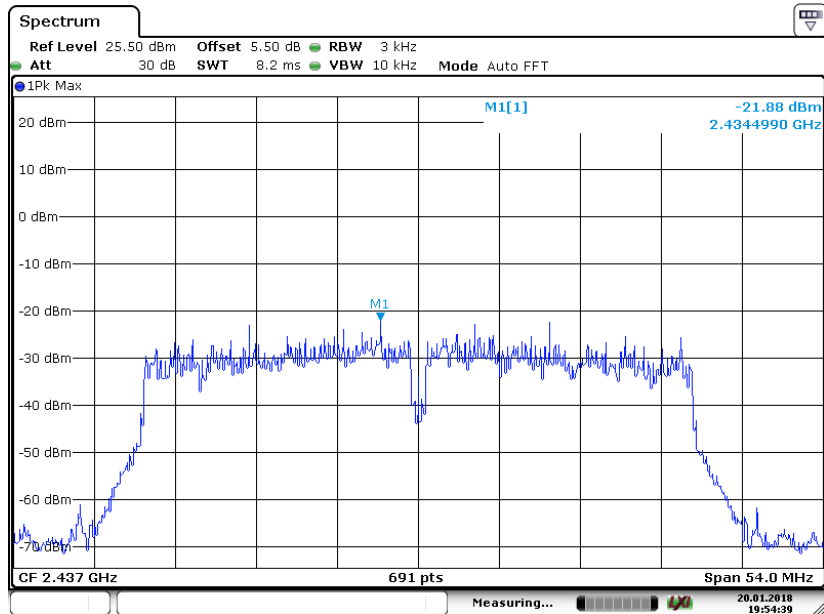

Date: 20 JAN 2018 19:54:39

### 802.11n-HT40 High Channel

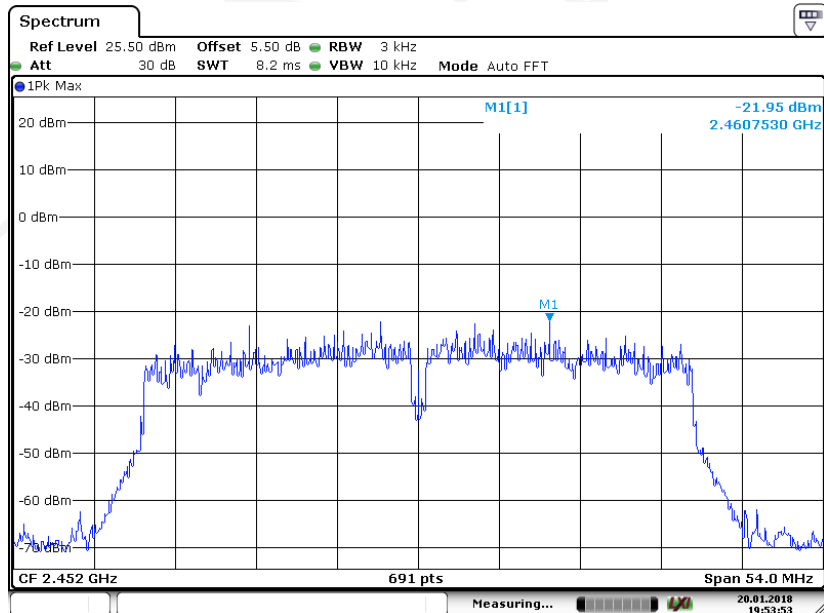

Date: 20 JAN 2018 19:53:53

\*\*\*\*\* END OF REPORT \*\*\*\*\*