

FCC

SAR

TEST REPORT

ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
Smart Phone

ISSUED TO
Shenzhen UniStrong Science & Technology Co., Ltd.

B, 4-4 Factory, Zhengcheng Road, Fuyong Baoan District, Shenzhen, China.



Tested by: Zong Liyao
Zong Liyao
(Engineer)

Date: Mar. 07, 2018

Approved by: Liao Jianming
Liao Jianming
(Technical Director)

Date: Mar. 07, 2018

Report No.: BL-EC17C0360-701

EUT Name: Smart Phone

Model Name: UT10

Brand Name: UniStrong

Test Standard: FCC 47 CFR Part 2.1093
ANSI C95.1: 1999, IEEE 1528: 2013

FCC ID: 2AOPD-UT10

Maximum SAR: Head (1 g): 0.439 W/kg
Body (1 g): 1.154 W/kg

Test Conclusion: Pass

Test Date: Dec. 26, 2017 ~ Jan. 25, 2018

Date of Issue: Mar. 07, 2018

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Mar. 07, 2018</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION.....	5
1.1	Identification of the Testing Laboratory	5
1.2	Identification of the Responsible Testing Location	5
1.3	Test Environment Condition	5
1.4	Announce	6
2	PRODUCT INFORMATION	7
2.1	Applicant Information	7
2.2	Manufacturer Information.....	7
2.3	Factory Information.....	7
2.4	General Description for Equipment under Test (EUT).....	7
2.5	Ancillary Equipment.....	8
2.6	Technical Information	9
3	SUMMARY OF TEST RESULT	10
3.1	Test Standards	10
3.2	Device Category and SAR Limit	11
3.3	Test Result Summary	12
3.4	Test Uncertainty	13
4	MEASUREMENT SYSTEM	14
4.1	Specific Absorption Rate (SAR) Definition	14
4.2	DASY SAR System	15
5	SYSTEM VERIFICATION	22
5.1	Purpose of System Check	22
5.2	System Check Setup	22
6	TEST POSITION CONFIGURATIONS	23
6.1	Head Exposure Conditions	23
6.2	Body-worn Position Conditions	25

6.3	Hotspot Mode Exposure Position Conditions	26
7	MEASUREMENT PROCEDURE	27
7.1	Measurement Process Diagram	27
7.2	SAR Scan General Requirement	28
7.3	Measurement Procedure	29
7.4	Area & Zoom Scan Procedure	29
7.5	LTE (TDD) Considerations	30
8	CONDUCTED RF OUTPUT POWER	32
8.1	GSM	32
8.2	WCDMA	33
8.3	CDMA	33
8.4	LTE	34
8.5	WIFI	41
8.6	Bluetooth	42
9	TEST EXCLUSION CONSIDERATION	43
9.1	SAR Test Exclusion Consideration Table	44
9.2	10g Extremity Exposure Consideration	47
10	TEST RESULT	48
10.1	GSM 850	48
10.2	GSM 1900	48
10.3	WCDMA Band 2	49
10.4	WCDMA Band 5	49
10.5	CDMA BC0	50
10.6	LTE Band 2 (20MHz Bandwidth)	51
10.7	LTE Band 4 (20MHz Bandwidth)	52
10.8	LTE Band 5 (10MHz Bandwidth)	53
10.9	LTE Band 7 (20MHz Bandwidth)	54
10.10	LTE Band 17 (10MHz Bandwidth)	55
10.11	LTE Band 41 (20MHz Bandwidth)	56
10.12	WIFI 2.4GHz	56
10.13	WIFI 5GHz	57
11	SAR Measurement Variability	58

12	SIMULTANEOUS TRANSMISSION.....	59
12.1	Simultaneous Transmission Mode Consider.....	59
12.2	Estimated SAR Calculation.....	60
12.3	Sum SAR of Simultaneous Transmission	61
13	TEST EQUIPMENTS LIST	64
ANNEX A	SIMULATING LIQUID VERIFICATION RESULT	65
ANNEX B	SYSTEM CHECK RESULT	66
ANNEX C	TEST DATA.....	85
ANNEX D	EUT EXTERNAL PHOTOS	115
ANNEX E	SAR TEST SETUP PHOTOS	115
ANNEX F	CALIBRATION REPORT.....	115

1 GENERAL INFORMATION

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co.,Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province,P. R. China
Phone Number	+86 755 6685 0100
Fax Number	+86 755 6182 4271

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co.,Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province,P. R. China
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory is a testing organization accredited by American Association for Laboratory Accreditation (A2LA) according to ISO/IEC 17025.The accreditation certificate is 4344.01. The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Test Environment Condition

Ambient Temperature	20 to 23°C
Ambient Relative Humidity	38 to 49%
Ambient Pressure	100 to 102KPa

1.4 Announce

- (1) The test report reference to the report template version v2.2.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Shenzhen UniStrong Science & Technology Co.,Ltd.
Address	B, 4-4Factory, Zhengcheng Road, FuyongBaoan District, Shenzhen, China

2.2 Manufacturer Information

Manufacturer	Shenzhen UniStrong Science & Technology Co.,Ltd.
Address	B, 4-4Factory, Zhengcheng Road, FuyongBaoan District, Shenzhen, China

2.3 Factory Information

Factory	Shenzhen UniStrong Science & Technology Co.,Ltd.
Address	B, 4-4Factory, Zhengcheng Road, FuyongBaoan District, Shenzhen, China

2.4 General Description for Equipment under Test (EUT)

EUT Name	Smart Phone
Model Name Under Test	UT10
Series Model Name	N/A
Description of Model Name Differentiation	N/A
Hardware Version	UT10_V104
Software Version	UT10_V1.0
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A
Network and Wireless connectivity	2G Network GSM/GPRS/EDGE 850/900/1800/1900 MHz GPRS/EDGE Class 12 3G Network WCDMA/HSDPA/HSUPA Band 1/2/5/8, 4G Network FDD LTE Band 1/2/3/4/5/7/8/17/20/28 TDD LTE Band 38/40/41 CDMA/EVDO BC0 Bluetooth, WIFI, GPS, GLONASS, NFC

2.5 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	SJYEnergy
	Model No.	BA7800
	Serial No.	N/A
	Capacity	8000 mAh
	Rated Voltage	3.8 V
	Limit Charge Voltage	4.35 V
Ancillary Equipment 2	Adapter	
	Brand Name	N/A
	Model No.	ASUC71W-050912300
	Serial No.	ASUC71z-050912300 (z= a, e, i, w)
	Rated Input	100-240 V~, 0.7 A, 50/60 Hz
	Rated Output	5 V= 3 A or 9 V= 2 A or 12 V= 1.5 A
Ancillary Equipment 3	Adapter	
	Brand Name	N/A
	Model No.	ASUC71W-036120300
	Serial No.	ASUC71z-036120300 (z= a, e, i, w)
	Rated Input	100-240 V~, 0.7 A, 50/60 Hz
	Rated Output	5 V= 3 A or 9 V= 2 A or 12 V= 1.5 A
Ancillary Equipment 4	USB Cable	
	Length (Approx.)	1.0 m

2.6 Technical Information

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	GSM, WCDMA, CDMA, LTE, 2.4G WLAN, 5G WLAN, Bluetooth		
Frequency Range	GSM 850	TX: 824 MHz ~ 849 MHz	RX: 869 MHz ~ 894 MHz
	GSM 1900	TX: 1850 MHz ~ 1910 MHz	RX: 1930 MHz ~ 1990 MHz
	WCDMA Band 2	TX: 1850 MHz ~ 1910 MHz	RX: 1930 MHz ~ 1990 MHz
	WCDMA Band 5	TX: 824 MHz ~ 849 MHz	RX: 869 MHz ~ 894 MHz
	CDMA BC0	TX: 824.025 - 848.985 MHz	RX: 869.025 - 893.985 MHz
	LTE Band 2	TX: 1850 MHz ~ 1910 MHz	RX: 1930 MHz ~ 1990 MHz
	LTE Band 4	TX: 1710 MHz ~ 1755 MHz	RX: 2110 MHz ~ 2155 MHz
	LTE Band 5	TX: 824 ~ 849 MHz	RX: 869 ~ 894 MHz
	LTE Band 7	TX: 2500 MHz ~ 2570 MHz	RX: 2620 MHz ~ 2690 MHz
	LTE Band 17	TX: 704 MHz ~ 716 MHz	RX: 734 MHz ~ 746 MHz
	LTE Band 41	TX: 2555 ~ 2655 MHz	RX: 2555 ~ 2655 MHz
	802.11b/g /n(HT20)	2400~2483.5 MHz	
	802.11ac (VHT20/VHT40/ VHT80)	5150 MHz~ 5250 MHz	
		5725 MHz~ 5850 MHz	
	Bluetooth	2400~2483.5 MHz	
Antenna Type	WWAN: PIFA Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna		
Hotspot Function	Support		
Power Reduction	Not Support		
Exposure Category	General Population/Uncontrolled exposure		
EUT Stage	Portable Device		
Product	Type		
	☒ Production unit		☐ Identical prototype

3 SUMMARY OF TEST RESULT

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-1999	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D01 v06	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
5	FCC KDB 941225 D01 v03r01	3G SAR MEAUREMENT PROCEDURES
6	FCC KDB 941225 D05 v02r05	SAR Evaluation Considerations for LTE Devices
7	FCC KDB 941225 D06 v02r01	SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities
8	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
9	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
10	FCC KDB 648474 D04 v01r03	SAR Evaluation Considerations for Wireless Handsets
11	KDB 248227 D01 v02r02	SAR Guidance for IEEE 802.11 (Wi-Fi) Transmitters

3.2 Device Category and SAR Limit

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user.

Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

Table of Exposure Limits:

Body Position	SAR Value (W/Kg)	
	General Population/ Uncontrolled Exposure	Occupational/ Controlled Exposure
Whole-Body SAR (averaged over the entire body)	0.08	0.4
Partial-Body SAR (averaged over any 1 gram of tissue)	1.60	8.0
SAR for hands, wrists, feet and ankles (averaged over any 10 grams of tissue)	4.0	20.0

NOTE:

General Population/Uncontrolled Exposure: Locations where there is the exposure of individuals who have no knowledge or control of their exposure. General population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Occupational/Controlled Exposure: Locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

3.3 Test Result Summary

3.3.1 Highest SAR (1 g Value)

Band	Maximum Scaled SAR (W/kg)			Maximum Report SAR (W/kg)	
	Head	Body		Head	Body
		Body-worn	Hotspot		
GSM 850	0.203	0.470	0.574	0.439	1.154
GSM 1900	0.094	0.590	1.154		
WCDMA Band 2	0.124	0.924	0.924		
WCDMA Band 5	0.198	0.461	0.461		
CDMA BC0	0.224	0.516	0.516		
LTE Band 2	0.129	0.969	0.969		
LTE Band 4	0.099	1.035	1.035		
LTE Band 5	0.211	0.600	0.600		
LTE Band 7	0.146	0.412	0.412		
LTE Band 17	0.171	0.286	0.286		
LTE Band 41	0.053	0.405	0.405		
2.4G WLAN	0.439	0.083	0.083		
5.2G WLAN	0.322	0.072	0.116		
5.8G WLAN	0.155	0.066	0.115		
Limit (W/kg)	1.60				
Verdict	Pass				

3.3.2 Highest Simultaneous SAR

Position	Simultaneous Configuration	Simultaneous SAR (W/kg)	Limit (W/kg)	Verdict
Head	CDMA + 2.4G WLAN	0.663	1.6	Pass
Body-worn	LTE QPSK + 2.4G WLAN	1.118	1.6	Pass
Hotspot Mode	GSM DATA + 2.4G WLAN	1.270	1.6	Pass

3.4 Test Uncertainty

According to KDB 865664 D01, When the highest measured 1 g SAR within a frequency band is $< 1.5 \text{ W/kg}$, the extensive SAR measurement uncertainty analysis is not required in SAR reports submitted for equipment approval.

The maximum 1 g SAR for the EUT in this report is 1.154 W/kg , which is lower than 1.5 W/kg , so the extensive SAR measurement uncertainty analysis is not required in this report.

4 MEASUREMENT SYSTEM

4.1 Specific Absorption Rate (SAR) Definition

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by


$$\text{SAR} = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,

ρ is the mass density of the tissue and E is the RMS electrical field strength.

4.2 DASY SAR System

4.2.1 DASY SAR System Diagram

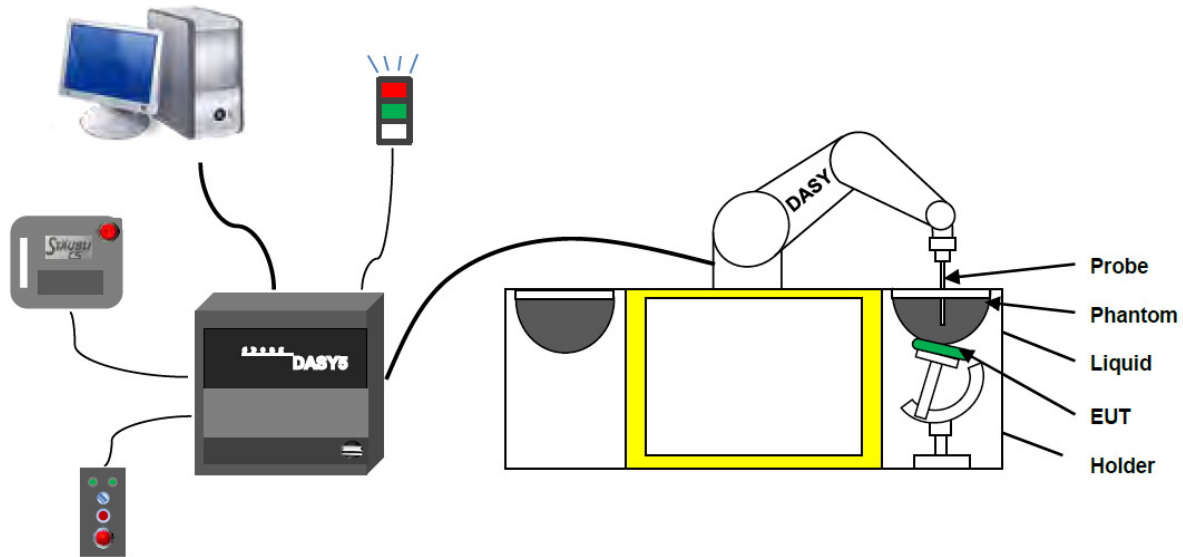

The DASY5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
6. The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.
7. DASY5 software and SEMCAD data evaluation software.
8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

4.2.2 Robot

The Dasy SAR system uses the high precision robots. Symmetrical design with triangular core Built-in optical fiber for surface detection system For the 6-axis controller system, Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents). The robot series have many features that are important for our application:



- High precision
(repeatability ± 0.02 mm)
- High reliability
(industrial design)
- Low maintenance costs
(virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements
(brush less synchron motors; no stepper motors)
- Low ELF interference
(motor control _elds shielded via the closed metallic construction shields)

4.2.3 E-Field Probe


The probe is specially designed and calibrated for use in liquids with high permittivities for the measurements the Specific Dosimetric E-Field Probe EX3DV4-SN:7340 with following specifications is used.

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycolether)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.2 dB in HSL (rotation around probe axis) ; ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 337 mm (Tip: 9 mm) Tip diameter: 2.5 mm (Body: 10 mm) Distance from probe tip to dipole centers: 1.0 mm
Application	General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms (EX3DV4)



The probe is specially designed and calibrated for use in liquids with high permittivities for the measurements the Specific Dosimetric E-Field Probe ES3DV3-SN:3110 with following specifications is used.

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycolether)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to 3 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Directivity	± 0.2 dB in HSL (rotation around probe axis) ; ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 337 mm (Tip: 10 mm) Tip diameter: 4 mm (Body: 10 mm) Distance from probe tip to dipole centers: 2.0 mm
Application	General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms (ES3DV3)

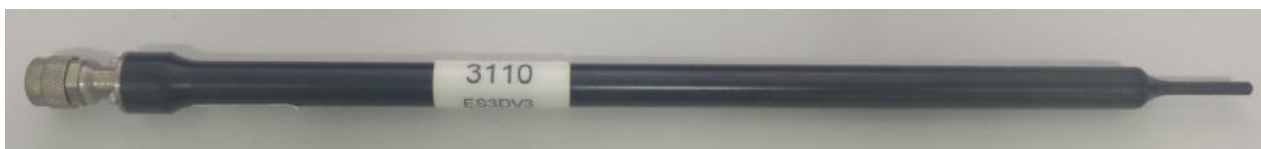

E-Field Probe Calibration Process

Probe calibration is realized, in compliance with CENELEC EN 62209-1/-2 and IEEE 1528 std, with CALISAR, Antennessa proprietary calibration system. The calibration is performed with the EN 62209-1/2 annexe technique using reference guide at the five frequencies.

4.2.4 Data Acquisition Electronics

The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.



- Input Impedance: 200M Ω m
- The Inputs: Symmetrical and Floating
- Commom Mode Rejection: Above 80dB

4.2.5 Phantoms

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.



- Left hand
- Right hand
- Flat phantom

Photo of Phantom SN1857



Photo of Phantom SN1859



Serial Number	Material	Length	Height
SN 1857 SAM1	Vinylester, glass fiber reinforced	1000	500
SN 1859 SAM2	Vinylester, glass fiber reinforced	1000	500

4.2.6 Device Holder


The DASY5 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65° . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA"s only. If necessary an additional support of polystyrene material is used. Larger DUT"s (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values. Therefore those devices are normally only tested at the flat part of the SAM.



The positioning system allows obtaining cheek and tilting position with a very good accuracy. Incompliance with CENELEC, the tilt angle uncertainty is lower than 1° .

4.2.7 Simulating Liquid

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5%.

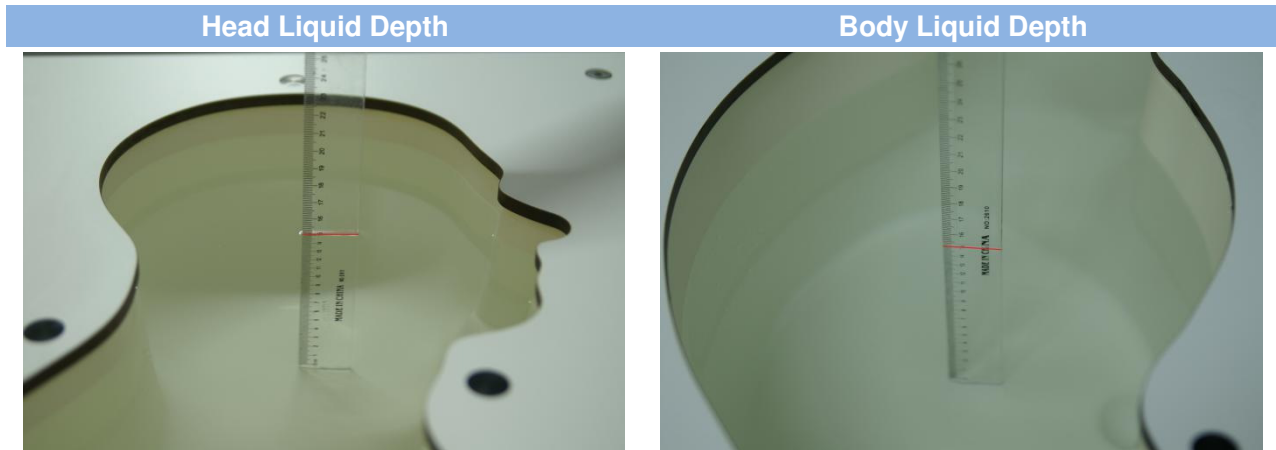

The following table gives the recipes for tissue simulating liquid and the theoretical Conductivity/Permittivity.

Head (Reference IEEE1528)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.4	40.0
2450	55.0	0	0	0.1	0	44.9	1.80	39.2
2600	54.9	0	0	0.1	0	45.0	1.96	39.0
Frequency (MHz)	Water (%)	Hexyl Carbitol (%)			Triton X-100 (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	62.52	17.24			17.24		4.66	36.0
5800	62.52	17.24			17.24		5.27	35.3
Body (From instrument manufacturer)								
Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity σ (S/m)	Permittivity ϵ
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
900	50.8	48.2	0	0.9	0.1	0	1.05	55.0
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0.1	0	31.3	1.95	52.7
2600	68.2	0	0	0.1	0	31.7	2.16	52.5
Frequency(MHz)	Water	DGBE (%)			Salt (%)		Conductivity σ (S/m)	Permittivity ϵ
5200	78.60	21.40			/		5.54	47.86
5800	78.50	21.40			0.1		6.0	48.20


5 SYSTEM VERIFICATION

5.1 Purpose of System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

5.2 System Check Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

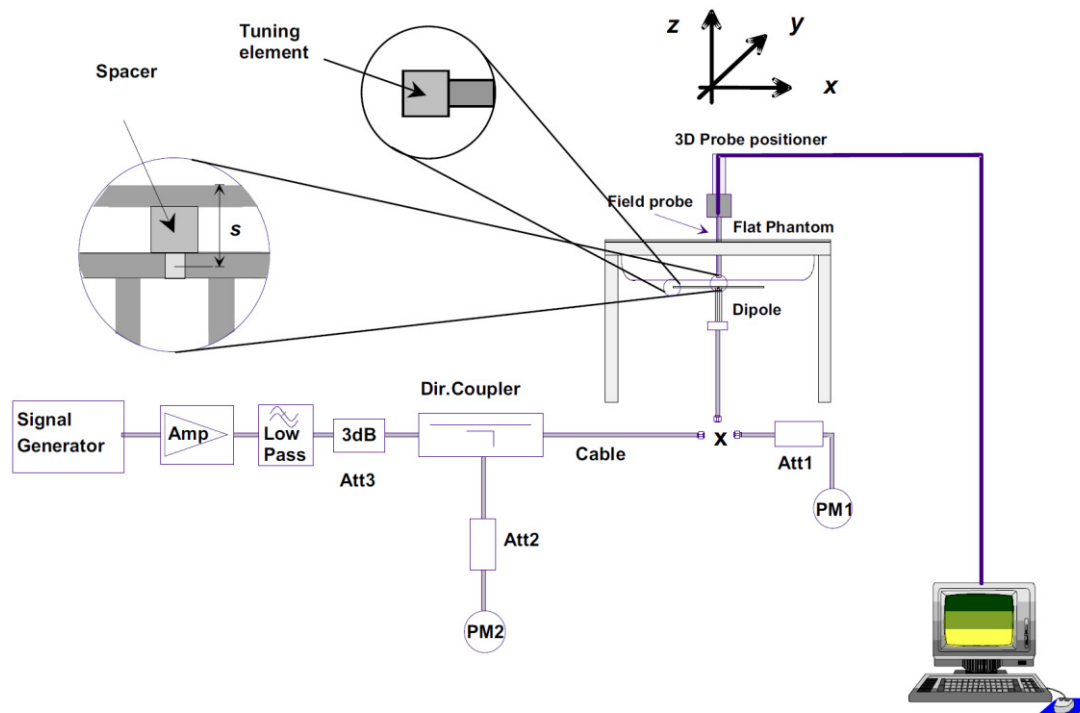

6 TEST POSITION CONFIGURATIONS


According to KDB 648474 D04 Handset, handsets are tested for SAR compliance in head, body-worn accessory and other use configurations described in the following subsections.

6.1 Head Exposure Conditions

Head exposure is limited to next to the ear voice mode operations. Head SAR compliance is tested according to the test positions defined in IEEE Std 1528-2013 using the SAM phantom illustrated as below.


6.1.1 Two Imaginary Lines on the Handset

- The vertical center line passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical center line is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

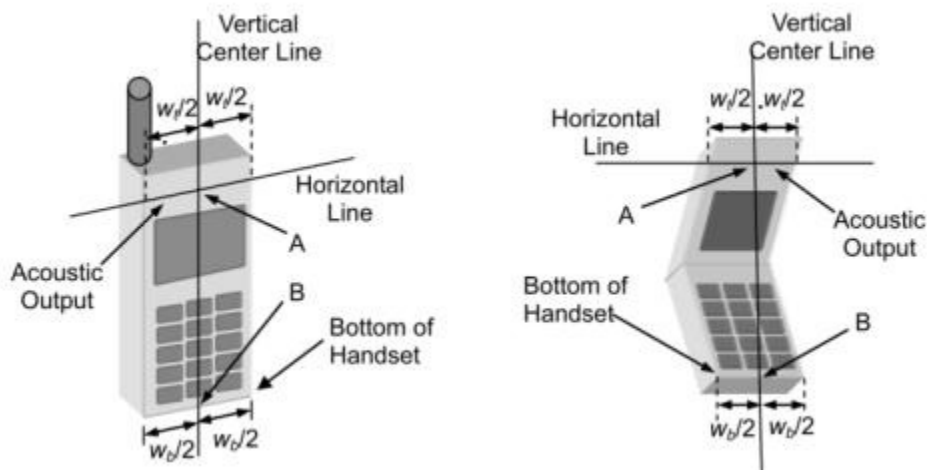

6.1.2 Cheek Position

- To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.

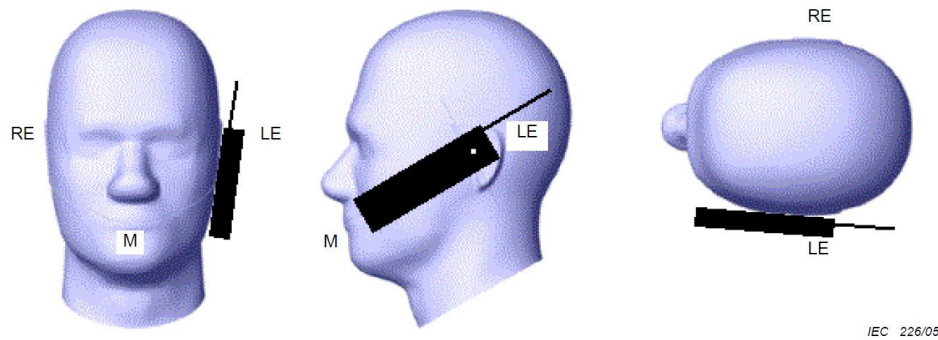

6.1.3 Tilted Position

- To position the device in the "cheek" position described above.
- While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.




6.2 Body-worn Position Conditions

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB 447498 are used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode. When the reported SAR for a body-worn accessory.


Body-worn accessories that do not contain metallic or conductive components may be tested according to worst-case exposure configurations, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics. All body-worn accessories containing metallic components are tested in conjunction with the host device.

Body-worn accessory SAR compliance is based on a single minimum test separation distance for all wireless and operating modes applicable to each body-worn accessory used by the host, and according to the relevant voice and/or data mode transmissions and operations. If a body-worn accessory supports voice only operations in its normal and expected use conditions, testing of data mode for body-worn compliance is not required. A conservative minimum test separation distance for supporting off-the-shelf body-worn accessories that may be acquired by users of consumer handsets is used to test for body-worn accessory SAR compliance. This distance is determined by the handset manufacturer, according to the requirements of Supplement C 01-01. Devices that are designed to operate on the body of users using lanyards and straps, or without requiring additional body-worn accessories, will be tested using a conservative minimum test separation distance ≤ 5 mm to support compliance.

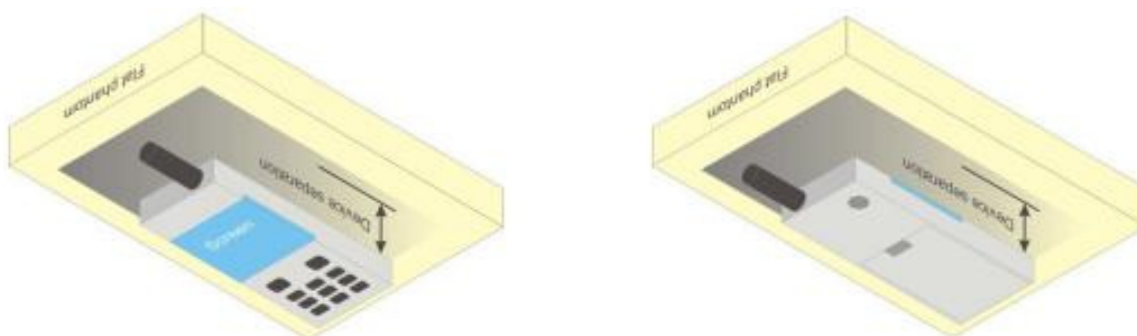


6.3 Hotspot Mode Exposure Position Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

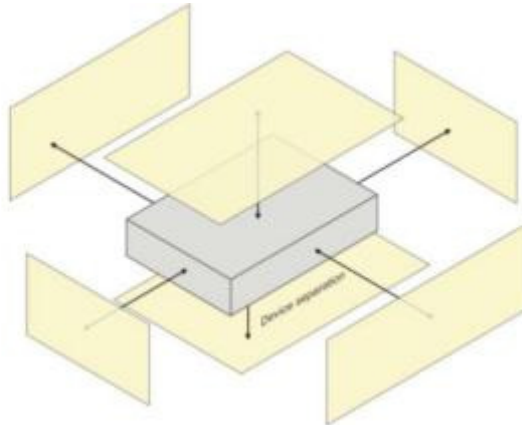

7 MEASUREMENT PROCEDURE

7.1 Measurement Process Diagram

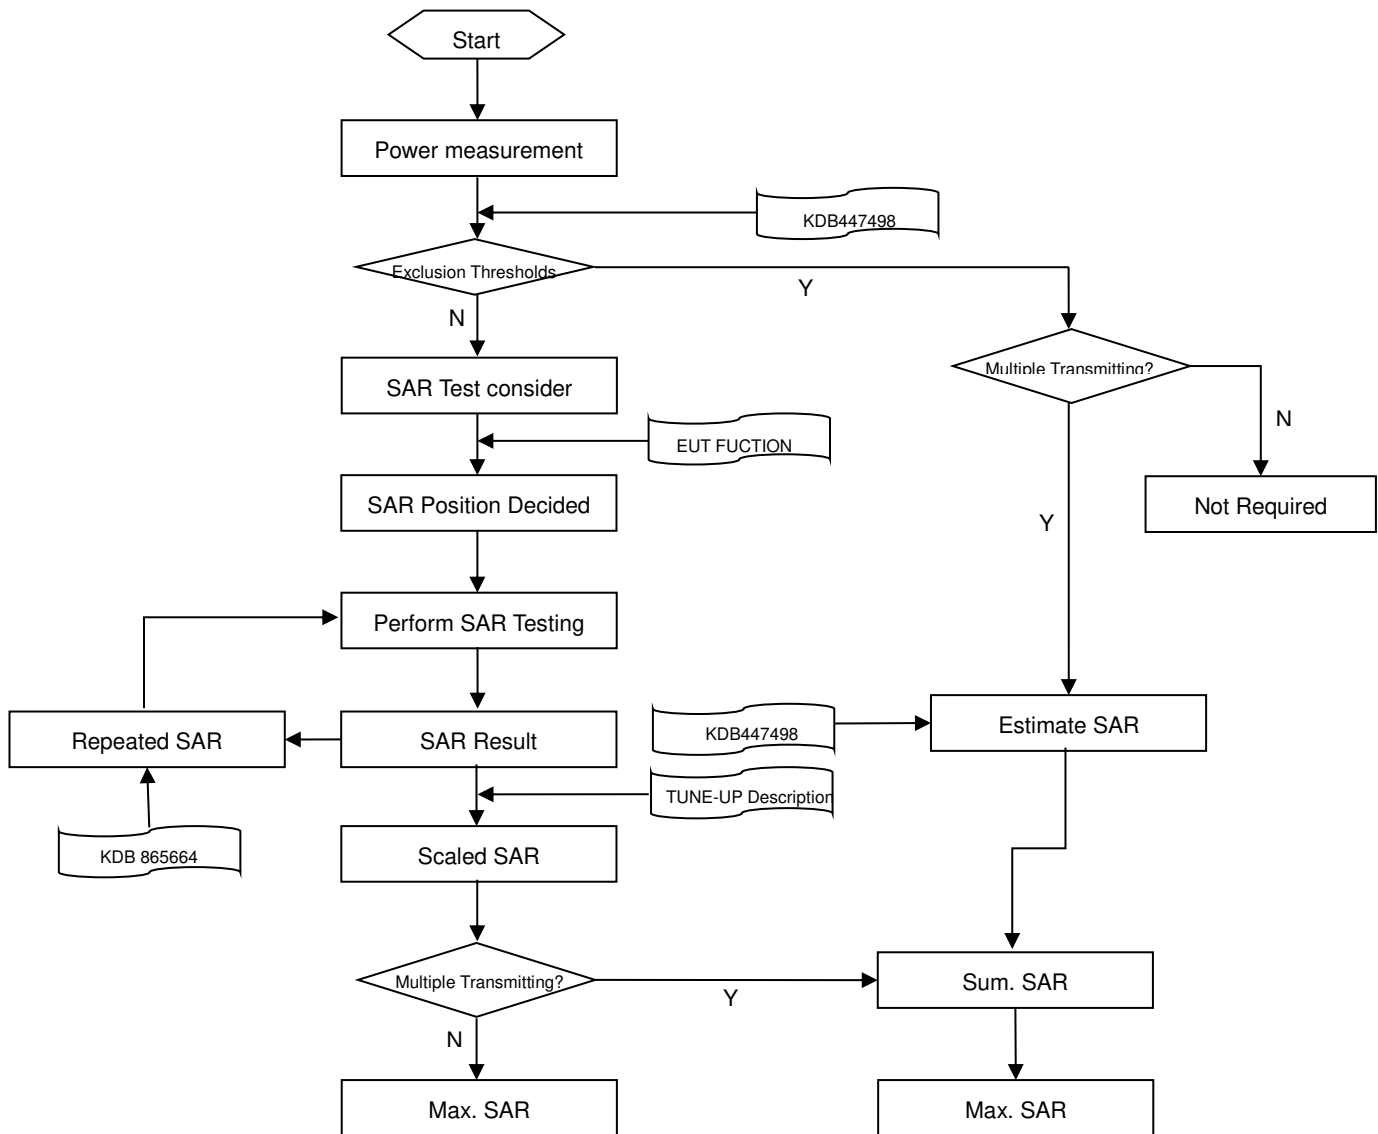

7.2 SAR Scan General Requirement

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1 g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013.

			≤3GHz	>3GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5±1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30°±1°	20°±1°
Maximum area scan spatial resolution: Δx Area , Δy Area			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3–4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx Zoom , Δy Zoom			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3–4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz Zoom (n)		≤ 5 mm	3–4 GHz: ≤ 4 mm
				4–5 GHz: ≤ 3 mm
				5–6 GHz: ≤ 2 mm
	graded grid	Δz Zoom (1): between 1st two points closest to phantom surface	≤ 4 mm	3–4 GHz: ≤ 3 mm
				4–5 GHz: ≤ 2.5 mm
				5–6 GHz: ≤ 2 mm
		Δz Zoom (n>1): between subsequent points		≤ 1.5·Δz Zoom (n-1)
Minimum zoom scan volume	x, y, z		≥30 mm	3–4 GHz: ≥ 28 mm
				4–5 GHz: ≥ 25 mm
				5–6 GHz: ≥ 22 mm
Note:				
1. δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
2. * When zoom scan is required and the reported SAR from the area scan based 1 g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

7.3 Measurement Procedure

The following steps are used for each test position

- a. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- b. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- c. Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- d. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.


7.4 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r04 quoted below.


When the 1 g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

7.5 LTE (TDD) Considerations

During TDD-LTE SAR testing, the EUT was commanded to transmit on maximum output power and maximum transmitting bandwidth. The uplink and downlink slot configuration as below in one radio frame.

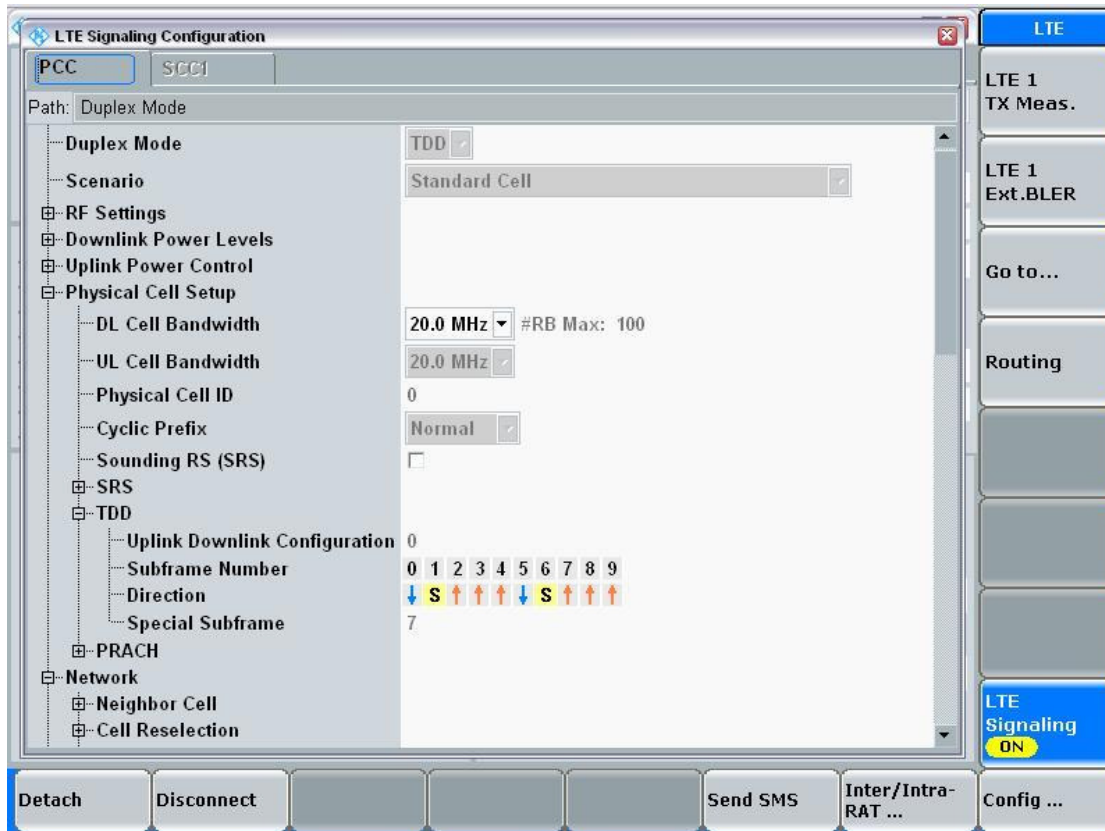

According to 3GPP Per 3GPP TS 36.211. Each radio frame of length ($T_f = 307200 T_s = 10 \text{ ms}$) of two half-frames of length ($153600 T_s = 5 \text{ ms}$). Each half-frame consists of five sub-frames of length ($30720 T_s = 1 \text{ ms}$)

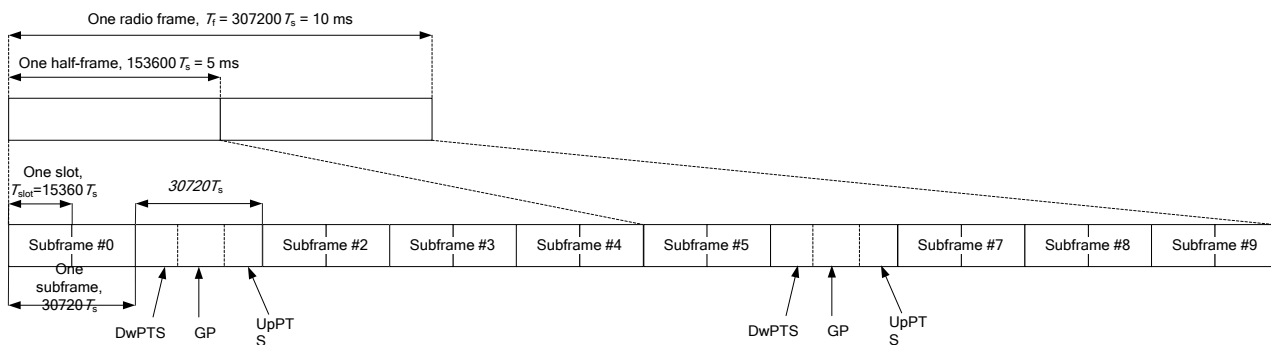

And the special sub-frame with the three fields DwPTS, GP and UpPTS.

The length of DwPTS and UpPTS is given by below table subject to the total length of DwPTS, GP and UpPTS being equal to $30720 T_s = 1 \text{ ms}$.

Configuration of special sub-frame (lengths of DwPTS/GP/UpPTS)

Special sub-frame configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwP TS	UpPTS		DwP TS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21592 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$2560 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21592 \cdot T_s$			$12800 \cdot T_s$	-	-
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-	-	-

For special sub-frame uplink time we used the largest cyclic prefix for duty cycle calculate;

Maximum uplink time of one special sub-frame=(largest cyclic prefix)/(one sub-frame of length)* time of one sub-frame= $5120 \cdot T_s / 30720 \cdot T_s \cdot 1\text{ms} = 0.167\text{ms}$

One radio frame with 6 uplink sub-frames and two special sub-frame,
there for the maximum Uplink time in one radio frame is: **$6 \cdot 1\text{ ms} + 2 \cdot 0.167\text{ ms} = 6.334\text{ms}$**
So, the duty cycle for TDD-LTE is: **$6.334\text{ms} / 10\text{ms} = 1: 1.58$**

8 CONDUCTED RF OUTPUT POWER

8.1 GSM

GSM 850 Band	Burst Average Power(dBm)			Frame-averaged power(dBm)		
Channel	128	190	251	128	190	251
GSM (GMSK, 1-Slot)	32.23	32.39	32.30	23.23	23.39	23.30
GPRS (GMSK, 1-Slot)	32.32	32.46	32.24	23.32	23.46	23.24
GPRS (GMSK, 2-Slots)	31.23	31.36	31.44	25.23	25.36	25.44
GPRS (GMSK, 3-Slots)	30.04	30.17	30.24	25.78	25.91	25.98
GPRS (GMSK, 4-Slots)	28.88	29.09	29.09	25.88	26.09	26.09
EGPRS (8PSK, 1-Slot)	29.02	29.20	29.24	20.02	20.20	20.24
EGPRS (8PSK, 2-Slots)	27.85	27.88	27.93	21.85	21.88	21.93
EGPRS (8PSK, 3-Slots)	26.69	26.60	26.53	22.43	22.34	22.27
EGPRS (8PSK, 4-Slots)	25.49	25.43	25.51	22.49	22.43	22.51
GSM 1900 Band	Burst Average Power(dBm)			Frame-averaged power(dBm)		
Channel	512	661	810	512	661	810
GSM (GMSK, 1-Slot)	30.03	29.78	29.58	21.03	20.78	20.58
GPRS (GMSK, 1-Slot)	30.02	29.62	29.58	21.02	20.62	20.58
GPRS (GMSK, 2-Slots)	29.40	29.22	29.04	23.40	23.22	23.04
GPRS (GMSK, 3-Slots)	28.23	28.02	27.79	23.97	23.76	23.53
GPRS (GMSK, 4-Slots)	26.98	26.79	26.79	23.98	23.79	23.79
EGPRS (8PSK, 1-Slot)	28.45	28.21	28.02	19.45	19.21	19.02
EGPRS (8PSK, 2-Slots)	27.23	26.93	26.79	21.23	20.93	20.79
EGPRS (8PSK, 3-Slots)	26.10	25.68	25.46	21.84	21.42	21.20
EGPRS (8PSK, 4-Slots)	24.95	24.57	24.24	21.95	21.57	21.24

Note:

- SAR testing was performed on the maximum frame-Peaked power mode.
- The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:

Frame-averaged power = Burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Burst averaged power (4 Tx Slots) - 3 dB

8.2 WCDMA

WCDMA Band	Band 2			Band 5		
Channel	9263	9400	9538	4132	4182	4233
RMC 12.2Kbps	22.17	22.15	22.15	22.45	22.36	22.38
HSDPA Subtest-1	21.30	21.27	21.22	21.53	21.45	21.51
HSDPA Subtest-2	21.41	21.27	21.30	21.70	21.53	21.48
HSDPA Subtest-3	20.91	20.80	20.83	21.17	21.07	21.05
HSDPA Subtest-4	20.91	20.61	20.84	21.14	21.09	21.06
HSUPA Subtest-1	21.52	21.28	21.25	21.22	21.34	21.50
HSUPA Subtest-2	19.48	19.25	19.23	19.47	19.42	19.45
HSUPA Subtest-3	20.43	20.11	20.27	20.43	20.50	20.41
HSUPA Subtest-4	19.36	19.30	19.28	19.61	19.44	19.64
HSUPA Subtest-5	21.34	20.96	21.17	21.26	21.21	21.19

8.3 CDMA

CDMA Band	Mode	Conducted Power (dBm)		
		Channel		
		Low	Mid	High
BC0	RC1 SO55 (Loopback)	23.28	23.21	23.33
	RC3 SO55 (Loopback)	23.43	23.56	23.47
	RC3 SO32 (FCH)	23.15	23.41	23.38
	RC3 SO32 (FCH+SCH)	23.05	23.19	23.18

CDMA Band	FTAP Rate	RTAP Rate	Conducted Power (dBm)		
			Channel		
			Low	Mid	High
CDMA 1x Ev-Do Rev. 0	307.2 kbps (2 slot, QPSK)	153.6 kbps	23.96	24.2	23.69
CDMA 1x Ev-Do Rev. A	307.2k, QPSK/ ACK channel is transmitted at all the slots	4096	23.91	24.07	23.69

8.4 LTE

FDD LTE Band 2							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	18700	18900	19100	18700	18900	19100
20MHz	1 (RB_Pos:0)	22.58	22.77	22.37	21.07	21.26	21.28
	1 (RB_Pos:49)	22.37	22.70	22.47	21.70	21.39	21.30
	1 (RB_Pos:99)	22.18	22.61	22.12	21.12	21.37	20.97
	50 (RB_Pos:0)	21.42	21.49	21.35	20.49	20.27	20.36
	50 (RB_Pos:24)	21.47	21.40	21.35	20.53	20.40	20.36
	50 (RB_Pos:49)	21.49	21.44	21.46	20.50	20.46	20.42
	100 (RB_Pos:0)	21.47	21.44	21.40	20.54	20.45	20.36
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	18675	18900	19125	18675	18900	19125
15MHz	1 (RB_Pos:0)	22.60	22.17	22.41	22.21	21.34	21.57
	1 (RB_Pos:37)	22.23	22.04	22.26	22.04	21.11	21.87
	1 (RB_Pos:74)	22.58	22.24	22.02	21.43	21.12	22.44
	36 (RB_Pos:0)	21.40	21.38	21.40	20.44	20.40	20.34
	36 (RB_Pos:18)	21.41	21.32	21.43	20.34	20.39	20.36
	36 (RB_Pos:37)	21.51	21.40	21.45	20.40	20.40	20.43
	75 (RB_Pos:0)	21.52	21.37	21.41	20.48	20.25	20.47
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	18650	18900	19150	18650	18900	19150
10MHz	1 (RB_Pos:0)	22.60	22.35	22.22	21.67	21.44	21.68
	1 (RB_Pos:24)	22.36	22.29	22.48	21.98	21.30	21.47
	1 (RB_Pos:49)	22.27	22.37	22.16	21.33	21.48	20.95
	25 (RB_Pos:0)	21.71	21.41	21.43	20.69	20.53	20.57
	25 (RB_Pos:12)	21.58	21.49	21.39	20.50	20.50	20.53
	25 (RB_Pos:24)	21.50	21.43	21.41	20.44	20.54	20.46
	50 (RB_Pos:0)	21.59	21.44	21.47	20.58	20.30	20.41
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	18625	18900	19175	18625	18900	19175
5MHz	1 (RB_Pos:0)	22.51	22.36	22.48	21.20	21.28	20.99
	1 (RB_Pos:12)	22.53	22.31	22.51	21.20	21.53	21.25
	1 (RB_Pos:24)	22.38	22.36	22.11	20.99	21.56	21.20
	12 (RB_Pos:0)	21.62	21.37	21.43	20.46	20.25	20.52
	12 (RB_Pos:6)	21.53	21.44	21.39	20.45	20.24	20.39
	12 (RB_Pos:11)	21.53	21.36	21.36	20.35	20.26	20.38
	25 (RB_Pos:0)	21.59	21.37	21.37	20.85	20.40	20.55
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	18615	18900	19185	18615	18900	19185

3MHz	1 (RB_Pos:0)	22.56	22.12	22.34	21.00	21.16	21.45
	1 (RB_Pos:7)	22.44	22.12	22.28	20.97	21.16	21.39
	1 (RB_Pos:14)	22.56	22.22	22.24	21.00	21.43	21.37
	8 (RB_Pos:0)	21.62	21.38	21.31	20.41	20.29	20.12
	8 (RB_Pos:4)	21.53	21.38	21.32	20.42	20.40	20.22
	8 (RB_Pos:7)	21.56	21.28	21.34	20.34	20.37	20.19
	15 (RB_Pos:0)	21.62	21.37	21.36	20.62	20.40	20.50
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	18607	18900	19193	18607	18900	19193
1.4MHz	1 (RB_Pos:0)	22.54	22.25	22.32	21.50	21.53	21.40
	1 (RB_Pos: 2)	22.58	22.20	22.69	21.76	21.61	21.40
	1 (RB_Pos:5)	22.43	22.02	22.58	21.71	21.09	21.40
	3 (RB_Pos:0)	22.47	22.06	22.31	21.51	20.91	21.65
	3 (RB_Pos:1)	22.56	22.09	22.55	21.50	20.82	21.55
	3 (RB_Pos:2)	22.46	22.12	22.61	21.63	20.74	21.46
	6 (RB_Pos:0)	21.57	21.27	21.28	20.82	20.14	20.44

FDD LTE Band 4							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20050	20175	20300	20050	20175	20300
20MHz	1 (RB_Pos:0)	22.73	23.58	23.40	22.32	22.17	22.15
	1 (RB_Pos:49)	23.34	23.55	23.35	22.15	22.19	22.16
	1 (RB_Pos:99)	23.11	23.37	23.45	21.77	21.99	21.86
	50 (RB_Pos:0)	22.19	22.49	22.49	21.04	21.31	21.48
	50 (RB_Pos:24)	22.29	22.50	22.34	21.31	21.37	21.30
	50 (RB_Pos:49)	22.29	22.35	22.24	21.26	21.06	21.09
	100 (RB_Pos:0)	22.26	22.33	22.49	21.20	21.25	21.35
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20025	20175	20325	20025	20175	20325
15MHz	1 (RB_Pos:0)	23.02	23.25	23.42	22.10	22.30	23.07
	1 (RB_Pos:37)	23.42	23.47	23.05	22.85	22.28	23.02
	1 (RB_Pos:74)	23.57	23.28	23.25	22.94	21.62	22.88
	36 (RB_Pos:0)	22.27	22.46	22.32	21.11	21.41	21.30
	36 (RB_Pos:18)	22.29	22.42	22.20	21.15	21.44	21.23
	36 (RB_Pos:37)	22.33	22.35	22.25	21.21	21.31	21.09
	75 (RB_Pos:0)	22.14	22.44	22.33	21.05	21.27	21.26
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20000	20175	20350	20000	20175	20350
10MHz	1 (RB_Pos:0)	23.13	23.36	23.42	22.02	22.29	22.45
	1 (RB_Pos:24)	23.29	23.62	23.51	22.48	22.08	22.19
	1 (RB_Pos:49)	23.16	23.35	23.36	22.75	22.17	22.56

	25 (RB_Pos:0)	22.24	22.48	22.30	21.17	21.45	21.53
	25 (RB_Pos:12)	22.20	22.47	22.33	21.17	21.50	21.52
	25 (RB_Pos:24)	22.18	22.55	22.44	21.23	21.54	21.58
	50 (RB_Pos:0)	22.21	22.55	22.34	21.14	21.56	21.21
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	19975	20175	20375	19975	20175	20375
5MHz	1 (RB_Pos:0)	23.02	23.42	23.25	21.65	22.50	21.93
	1 (RB_Pos:12)	23.11	23.44	23.55	21.75	22.48	22.07
	1 (RB_Pos:24)	23.02	23.16	23.45	21.56	21.89	22.02
	12 (RB_Pos:0)	22.03	22.52	22.29	20.94	21.33	21.28
	12 (RB_Pos:6)	22.21	22.56	22.49	21.03	21.39	21.41
	12 (RB_Pos:11)	22.16	22.56	22.39	20.97	21.48	21.21
	25 (RB_Pos:0)	22.08	22.54	22.40	21.14	21.38	21.19
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	19965	20175	20385	19965	20175	20385
3.0MHz	1 (RB_Pos:0)	23.14	23.56	23.14	22.26	23.16	22.11
	1 (RB_Pos:7)	23.30	23.55	23.20	22.21	23.13	22.14
	1 (RB_Pos:14)	23.07	23.62	23.20	22.12	23.13	22.20
	8 (RB_Pos:0)	22.26	22.62	22.33	21.51	21.55	21.26
	8 (RB_Pos:4)	22.23	22.52	22.33	21.56	21.57	21.19
	8 (RB_Pos:7)	22.11	22.58	22.31	21.55	21.53	21.23
	15 (RB_Pos:0)	22.14	22.53	22.34	21.28	21.64	20.98
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	19957	20175	20393	19957	20175	20393
1.4MHz	1 (RB_Pos:0)	23.39	23.54	23.23	22.40	22.51	22.30
	1 (RB_Pos:2)	23.30	23.69	23.49	22.46	22.57	22.40
	1 (RB_Pos:5)	23.14	23.45	23.50	22.32	22.10	22.30
	3 (RB_Pos:0)	23.21	23.46	23.45	22.19	22.28	22.41
	3 (RB_Pos:1)	23.24	23.62	23.47	22.23	22.34	22.63
	3 (RB_Pos:2)	23.30	23.57	23.42	22.19	22.43	22.69
	6 (RB_Pos:0)	22.17	22.54	22.39	21.15	21.23	21.72

FDD LTE Band 5							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20450	20525	20600	20450	20525	20600
10 MHz	1 (RB_Pos:0)	22.86	23.05	22.84	21.75	21.91	21.79
	1 (RB_Pos:25)	22.93	22.96	23.08	22.19	21.86	22.13
	1 (RB_Pos:49)	22.68	23.09	23.24	21.66	21.89	21.89
	25 (RB_Pos:0)	21.96	21.97	21.96	20.99	20.89	21.20
	25 (RB_Pos:12)	21.97	21.89	22.07	20.84	20.92	21.08
	25 (RB_Pos:25)	21.93	21.92	22.06	20.85	20.84	21.06
	50 (RB_Pos:0)	22.04	21.89	21.99	20.87	20.91	20.85
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20425	20525	20625	20425	20525	20625
5MHz	1 (RB_Pos:0)	22.75	22.55	22.69	21.50	21.73	21.86
	1 (RB_Pos:13)	22.94	22.85	23.05	21.57	21.94	21.87
	1 (RB_Pos:24)	22.90	22.60	22.80	21.46	21.90	21.51
	12 (RB_Pos:0)	22.00	21.83	22.07	20.78	20.69	20.82
	12 (RB_Pos:6)	22.03	22.00	22.08	20.79	20.79	20.86
	12 (RB_Pos:13)	21.98	21.80	21.84	20.78	20.75	20.89
	25 (RB_Pos:0)	21.97	21.83	22.01	21.04	21.11	21.03
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20415	20525	20635	20415	20525	20635
3.0 MHz	1 (RB_Pos:0)	22.94	22.87	22.89	21.70	21.72	21.91
	1 (RB_Pos:8)	23.01	22.82	22.72	21.83	21.79	21.71
	1 (RB_Pos:14)	22.97	22.83	22.79	21.81	21.73	21.78
	8 (RB_Pos:0)	21.99	21.95	22.01	20.83	20.95	20.68
	8 (RB_Pos:3)	21.91	21.97	21.80	21.06	21.06	20.72
	8 (RB_Pos:7)	21.91	22.01	21.89	21.06	21.01	20.52
	15 (RB_Pos:0)	22.04	21.88	21.93	20.92	20.82	20.71
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20407	20525	20643	20407	20525	20643
1.4MHz	1 (RB_Pos:0)	22.81	22.70	22.76	21.84	22.61	21.63
	1 (RB_Pos:3)	22.79	22.88	22.88	22.14	22.80	21.85
	1 (RB_Pos:5)	23.14	22.76	22.80	22.15	22.68	21.91
	3 (RB_Pos:0)	22.95	22.82	22.83	22.20	22.13	22.20
	3 (RB_Pos:1)	22.98	23.01	22.86	22.24	22.02	22.10
	3 (RB_Pos:3)	22.79	22.98	22.76	22.26	21.87	21.98
	6 (RB_Pos:0)	22.08	21.84	21.76	21.35	20.63	20.95

FDD LTE Band 7							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20850	21100	21350	20850	21100	21350
20MHz	1 (RB_Pos:0)	22.21	22.50	22.37	21.64	21.96	21.70
	1 (RB_Pos:49)	22.65	22.96	22.34	21.93	21.53	21.40
	1 (RB_Pos:99)	22.24	22.65	22.32	21.16	21.29	21.29
	50 (RB_Pos:0)	21.50	21.68	21.66	20.48	20.65	20.68
	50 (RB_Pos:24)	21.52	21.67	21.56	20.63	20.64	20.67
	50 (RB_Pos:49)	21.54	21.73	21.58	20.64	20.68	20.34
	100 (RB_Pos:0)	21.53	21.69	21.6	20.48	20.76	20.74
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20825	21100	21375	20825	21100	21375
15MHz	1 (RB_Pos:0)	22.37	22.34	22.49	21.57	21.55	22.22
	1 (RB_Pos:37)	22.39	22.57	22.42	22.06	21.52	22.03
	1 (RB_Pos:74)	22.40	22.54	22.41	21.38	21.04	22.03
	36 (RB_Pos:0)	21.50	21.63	21.62	20.55	20.63	20.67
	36 (RB_Pos:18)	21.53	21.59	21.55	20.52	20.69	20.65
	36 (RB_Pos:37)	21.52	21.68	21.60	20.51	20.68	20.52
	75 (RB_Pos:0)	21.43	21.64	21.60	20.51	20.55	20.63
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20800	21100	21400	20800	21100	21400
10MHz	1 (RB_Pos:0)	22.37	22.54	22.59	21.55	21.42	21.65
	1 (RB_Pos:24)	22.47	23.04	22.79	21.98	21.40	21.52
	1 (RB_Pos:49)	22.33	22.62	22.43	21.32	20.94	21.69
	25 (RB_Pos:0)	21.55	21.61	21.66	20.49	20.61	20.86
	25 (RB_Pos:12)	21.49	21.67	21.66	20.62	20.66	20.78
	25 (RB_Pos:24)	21.55	21.71	21.56	20.55	20.62	20.67
	50 (RB_Pos:0)	21.58	21.65	21.66	20.49	20.73	20.58
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	20775	21100	21425	20775	21100	21425
5MHz	1 (RB_Pos:0)	22.17	22.45	22.54	21.05	21.53	21.31
	1 (RB_Pos:12)	22.27	22.48	22.53	21.07	21.63	21.21
	1 (RB_Pos:24)	22.29	22.29	22.46	20.87	21.27	20.97
	12 (RB_Pos:0)	21.49	21.60	21.59	20.31	20.44	20.40
	12 (RB_Pos:6)	21.43	21.64	21.69	20.34	20.53	20.62
	12 (RB_Pos:11)	21.46	21.68	21.51	20.28	20.53	20.51
	25 (RB_Pos:0)	21.45	21.55	21.59	20.47	20.61	20.52

FDD LTE Band 17							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	23780	23790	23800	23780	23790	23800
10 MHz	1 (RB_Pos:0)	22.03	22.15	21.92	21.01	20.74	20.73
	1 (RB_Pos:25)	21.99	21.85	22.13	21.47	20.93	20.77
	1 (RB_Pos:49)	21.82	21.76	21.60	20.79	20.14	20.75
	25 (RB_Pos:0)	21.05	21.06	20.96	20.24	19.95	20.23
	25 (RB_Pos:12)	21.04	20.90	20.97	20.21	20.00	20.23
	25 (RB_Pos:25)	20.93	20.94	20.88	19.89	20.04	20.12
	50 (RB_Pos:0)	21.05	20.89	20.93	19.99	19.94	19.82
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	23755	23790	23825	23755	23790	23825
5MHz	1 (RB_Pos:0)	21.86	21.81	21.96	20.61	20.87	20.38
	1 (RB_Pos:13)	22.06	21.81	21.83	20.62	21.07	20.71
	1 (RB_Pos:24)	21.71	21.63	21.83	20.18	20.39	19.97
	12 (RB_Pos:0)	20.96	20.90	20.93	19.85	19.96	19.77
	12 (RB_Pos:6)	20.87	20.90	20.93	20.03	19.72	19.87
	12 (RB_Pos:13)	20.90	20.89	20.77	19.73	19.74	19.71
	25 (RB_Pos:0)	20.93	20.90	20.87	20.03	19.84	19.82

FDD LTE Band 41							
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	40340	40740	41140	40340	40740	41140
20MHz	1 (RB_Pos:0)	22.02	22.19	22.85	20.99	20.64	22.26
	1 (RB_Pos:50)	22.31	22.50	22.73	21.13	20.66	21.76
	1 (RB_Pos:99)	22.01	22.08	22.60	20.84	20.55	21.96
	50 (RB_Pos:0)	21.38	21.52	21.74	20.38	20.53	20.84
	50 (RB_Pos:25)	21.35	21.47	21.63	20.36	20.51	20.69
	50 (RB_Pos:50)	21.35	21.47	21.65	20.38	20.55	20.64
	100 (RB_Pos:0)	21.32	21.47	21.67	20.36	20.42	20.73
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	40315	40740	41165	40315	40740	41165
15MHz	1 (RB_Pos:0)	22.34	22.21	22.69	21.69	21.43	22.14
	1 (RB_Pos:38)	22.33	22.24	22.50	21.61	21.30	21.95
	1 (RB_Pos:74)	22.16	22.17	22.45	21.64	21.31	22.04
	36 (RB_Pos:0)	21.35	21.50	21.71	20.16	20.46	20.53
	36 (RB_Pos:20)	21.34	21.49	21.63	20.12	20.37	20.47
	36 (RB_Pos:39)	21.33	21.48	21.65	20.08	20.45	20.53
	75 (RB_Pos:0)	21.34	21.50	21.65	20.50	20.60	20.79
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	40290	40740	41190	40290	40740	41190
10MHz	1 (RB_Pos:0)	22.28	22.46	22.55	21.67	20.95	22.40
	1 (RB_Pos:25)	22.30	22.58	22.41	21.93	20.89	22.66
	1 (RB_Pos:49)	22.28	22.43	22.48	21.47	20.87	22.45
	25 (RB_Pos:0)	21.37	21.53	21.70	20.49	20.53	20.75
	25 (RB_Pos:12)	21.41	21.54	21.95	20.51	20.50	20.74
	25 (RB_Pos:25)	21.33	21.49	21.74	20.46	20.46	20.81
	50 (RB_Pos:0)	21.36	21.55	21.66	20.18	20.57	20.75
Bandwidth (MHz)	RB Set	Power (dBm)					
		QPSK			16QAM		
	Channel	40265	40740	41215	40265	40740	41215
5MHz	1 (RB_Pos:0)	22.08	22.11	22.35	20.66	21.36	21.44
	1 (RB_Pos:13)	22.18	22.12	22.47	20.74	21.06	21.40
	1 (RB_Pos:24)	22.09	22.21	22.47	20.73	20.99	21.42
	12 (RB_Pos:0)	21.22	21.46	21.71	20.19	20.35	20.73
	12 (RB_Pos:6)	21.31	21.54	21.70	20.19	20.39	20.84
	12 (RB_Pos:13)	21.27	21.48	21.67	20.12	20.35	20.80
	25 (RB_Pos:0)	21.29	21.51	21.61	20.32	20.44	20.64

8.5 WIFI

8.5.1 2.4G WIFI

Band (GHz)	Mode	Channel	Freq. (MHz)	Avg. Power (dBm)	SAR Test Require.
2.4 (2.4~2.4835)	802.11b	1	2412	12.15	No
		6	2437	12.73	Yes
		11	2462	12.48	No
	802.11g	1	2412	12.61	No
		6	2437	13.12	No
		11	2462	12.75	No
	802.11n(HT20)	1	2412	11.74	No
		6	2437	12.29	No
		11	2462	11.91	No
Note: According KDB 248227 D01 SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. adjusted SAR = Report SAR * (max power(OFDM)/ max power(DSSS))=0.439 * 1.12=0.493, so the 2.4GHz OFDM SAR test is not required.					


8.5.2 5G WIFI

Band (GHz)	Mode	Channel	Freq. (MHz)	Avg. Power (dBm)	SAR Test Require.
5.2 (5.15~5.25)	802.11ac(VHT20)	36	5180	10.54	No
		44	5220	11.54	No
		48	5240	10.61	No
	802.11ac(VHT40)	38	5190	10.62	No
		46	5230	11.79	Yes
	802.11ac(VHT80)	42	5210	11.19	No
5.8 (5.725~5.850)	802.11ac(VHT20)	149	5745	13.87	Yes
		157	5785	13.39	No
		165	5825	12.96	No
	802.11ac(VHT40)	151	5755	13.30	No
		159	5795	13.93	No
	802.11ac(VHT80)	155	5775	12.95	No

8.6 Bluetooth

Mode	GFSK			$\pi/4$ -DQPSK		
Channel	0	39	78	0	39	78
Frequency (MHz)	2402	2441	2480	2402	2441	2480
Avg. Power (dBm)	1.95	2.52	2.66	1.93	2.55	2.76
Mode	8-DPSK			BLE		
Channel	0	39	78	0	19	39
Frequency (MHz)	2402	2441	2480	2402	2440	2480
Avg. Power (dBm)	2.23	2.81	3.10	2.18	2.65	2.75

9 TEST EXCLUSION CONSIDERATION

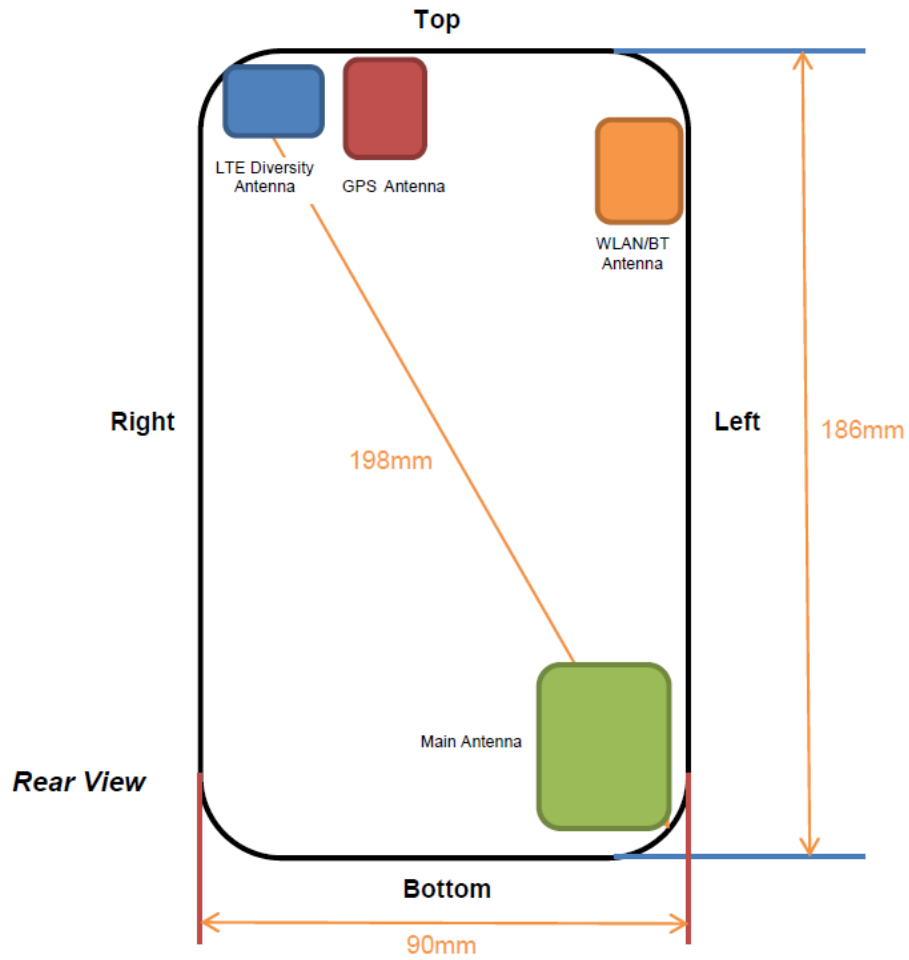

9.1 SAR Test Exclusion Consideration Table

According with FCC KDB 447498 D01, Appendix A, <SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≤ 50 mm> Table, this Device SAR test configurations consider as following :

Band	Mode	Max. Peak Power		Test Position Configurations					
		dBm	mW	Head	Front/ Back	Left Edge	Right Edge	Top Edge	Bottom Edge
GSM 850	Distance to User			<5mm	<10mm	<10mm	70mm	160mm	<10mm
	Voice	33.00	1995.26	Yes	Yes	Yes	No	No	Yes
	Data	29.50	891.25	No	Yes	Yes	No	No	Yes
GSM 1900	Distance to User			<5mm	<10mm	<10mm	70mm	160mm	<10mm
	Voice	30.50	1122.02	Yes	Yes	Yes	No	No	Yes
	Data	27.00	501.19	No	Yes	Yes	No	No	Yes
WCDMA Band 2	Distance to User			<5mm	<10mm	<10mm	70mm	160mm	<10mm
	RMC	22.50	177.83	Yes	Yes	Yes	No	No	Yes
WCDMA Band 5	Distance to User			<5mm	<10mm	<10mm	70mm	160mm	<10mm
	RMC	23.00	199.53	Yes	Yes	Yes	No	No	Yes
CDMA BC0	Distance to User			<5mm	<10mm	<10mm	70mm	160mm	<10mm
	1xRTT (RC3 SO55)	24.00	251.19	Yes	Yes	Yes	No	No	Yes
	1xEVDO (Rel. 0)	24.50	281.84	Yes	Yes	Yes	No	No	Yes
LTE Band 2	Distance to User			<5mm	<10mm	<10mm	70mm	160mm	<10mm
	VOIP	23.00	199.53	Yes	Yes	Yes	No	No	Yes
LTE Band 4	Distance to User			<5mm	<10mm	<10mm	70mm	160mm	<10mm
	VOIP	24.00	251.19	Yes	Yes	Yes	No	No	Yes
LTE Band 5	Distance to User			<5mm	<10mm	<10mm	70mm	160mm	<10mm
	VOIP	23.50	223.87	Yes	Yes	Yes	No	No	Yes
LTE Band 7	Distance to User			<5mm	<10mm	<10mm	70mm	160mm	<10mm
	VOIP	23.50	223.87	Yes	Yes	Yes	No	No	Yes
LTE Band 17	Distance to User			<5mm	<10mm	<10mm	70mm	160mm	<10mm
	VOIP	23.00	199.53	Yes	Yes	Yes	No	No	Yes
LTE Band 41	Distance to User			<5mm	<10mm	<10mm	70mm	160mm	<10mm
	VOIP	23.00	199.53	Yes	Yes	Yes	No	No	Yes
WLAN 2.4 G	Distance to User			<5mm	<10mm	<10mm	70mm	<20mm	150mm
	802.11b	13.00	19.95	Yes	Yes	Yes	No	Yes	No
	802.11g	13.50	22.39	No	No	No	No	No	No
	802.11n(HT20)	13.00	19.95	No	No	No	No	No	No
WLAN 5.2 G	Distance to User			<5mm	<10mm	<10mm	70mm	<20mm	150mm
	802.11ac(VHT20)	12.00	15.85	No	No	No	No	No	No
	802.11ac(VHT40)	12.00	15.85	Yes	Yes	Yes	No	Yes	No
	802.11ac(VHT80)	11.50	14.13	No	No	No	No	No	No
WLAN 5.8 G	Distance to User			<5mm	<10mm	<10mm	70mm	<20mm	150mm
	802.11ac(VHT20)	14.50	28.18	Yes	Yes	Yes	No	Yes	No
	802.11ac(VHT40)	14.00	25.12	No	No	No	No	No	No

	802.11ac(VHT80)	13.50	22.39	No	No	No	No	No	No
Bluetooth	Distance to User			<5mm	<10mm	<10mm	70mm	<20mm	150mm
	BR/EDR	3.5	2.24	No	No	No	No	No	No
	BLE	3.5	2.24	No	No	No	No	No	No

Note:

- Maximum power is the source-based time-average power and represents the maximum RF output power including tune-up tolerance among production units
- Per KDB 447498 D01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
- Per KDB 447498 D01, standalone SAR test exclusion threshold is applied; If the distance of the antenna to the user is < 5mm, 5mm is used to determine SAR exclusion threshold
- Per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison
 - For < 50 mm distance, we just calculate mW of the exclusion threshold value (3.0) to do compare.

This formula is $[3.0] / [\sqrt{f(\text{GHz})}] \cdot [(\text{min. test separation distance, mm})] = \text{exclusion threshold of mW}$.
- Per KDB 447498 D01, at 100 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following
 - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz
 - [Threshold at 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz
- Per KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA /HSUPA /DC-HSDPA output power is < 0.25dB higher than RMC12.2Kbps, or reported SAR with RMC 12.2kbps setting is ≤ 1.2W/kg, HSDPA/HSUPA/DC-HSDPA SAR evaluation can be excluded.
- Per KDB 248227 D01 SAR is not required for the following 2.4 GHz OFDM conditions.
 - When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
 - When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
- For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
- Per KDB 248227 D01 5G WLAN Subsequent Test Configuration Procedures
SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units.
 - When SAR test exclusion provisions of KDB Publication 447498 D01 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.
 - When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the

subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.

9.2 10g Extremity Exposure Consideration

According with FCC KDB 648474 D04, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, unless it is confirmed otherwise through KDB inquiries, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance;

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

Conclusion:

The EUT hotspot mode 1-g reported SAR is 1.154W/kg, which is less than 1.2 W/kg, 10 g extremity SAR is not required.

10 TEST RESULT

10.1 GSM 850

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power(dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head											
Voice	Right Cheek	0	190	836.60	0.20	0.176	32.39	33.00	1.151	0.203	1#
	Right Tilt	0	190	836.60	-0.19	0.087	32.39	33.00	1.151	0.100	/
	Left Cheek	0	190	836.60	0.03	0.170	32.39	33.00	1.151	0.196	/
	Left Tilt	0	190	836.60	0.01	0.095	32.39	33.00	1.151	0.109	/
Body-worn Accessory											
Voice	Front Side	10	190	836.60	0.00	0.408	32.39	33.00	1.151	0.470	2#
	Back Side	10	190	836.60	0.00	0.256	32.39	33.00	1.151	0.295	/
Hotspot											
GPRS 4 slots	Front Side	10	190	836.60	0.03	0.522	29.09	29.50	1.099	0.574	3#
	Back Side	10	190	836.60	0.04	0.328	29.09	29.50	1.099	0.360	/
	Left Edge	10	190	836.60	-0.09	0.181	29.09	29.50	1.099	0.199	/
	Bottom Edge	10	190	836.60	0.02	0.305	29.09	29.50	1.099	0.335	/
Note: SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode.											

10.2 GSM 1900

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power(dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head											
Voice	Right Cheek	0	661	1880.00	-0.06	0.035	29.78	30.50	1.180	0.041	/
	Right Tilt	0	661	1880.00	-0.01	0.035	29.78	30.50	1.180	0.041	/
	Left Cheek	0	661	1880.00	0.18	0.080	29.78	30.50	1.180	0.094	4#
	Left Tilt	0	661	1880.00	-0.20	0.029	29.78	30.50	1.180	0.034	/
Body-worn Accessory											
Voice	Front Side	10	661	1880.00	0.06	0.500	29.78	30.50	1.180	0.590	5#
	Back Side	10	661	1880.00	-0.07	0.243	29.78	30.50	1.180	0.287	/
Hotspot											
GPRS 4 slots	Front Side	10	661	1880.00	-0.04	1.010	26.79	27.00	1.050	1.060	/
		10	512	1850.20	0.05	0.944	26.98	27.00	1.005	0.948	/
		10	810	1909.80	0.07	1.100	26.79	27.00	1.050	1.154	6#
	Back Side	10	661	1880.00	-0.05	0.455	26.79	27.00	1.050	0.478	/
	Left Edge	10	661	1880.00	-0.05	0.410	26.79	27.00	1.050	0.430	/
	Bottom Edge	10	661	1880.00	0.05	0.673	26.79	27.00	1.050	0.706	/
Note: SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode.											

10.3 WCDMA Band 2

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power(dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head											
RMC	Right Cheek	0	9400	1880.00	0.20	0.057	22.15	22.50	1.084	0.062	/
	Right Tilt	0	9400	1880.00	0.15	0.053	22.15	22.50	1.084	0.057	/
	Left Cheek	0	9400	1880.00	-0.02	0.114	22.15	22.50	1.084	0.124	7#
	Left Tilt	0	9400	1880.00	-0.10	0.044	22.15	22.50	1.084	0.048	/
Body-worn Accessory & Hotspot											
RMC	Front Side	10	9400	1880.00	0.05	0.779	22.15	22.50	1.084	0.844	/
		10	9262	1852.40	0.09	0.770	22.17	22.50	1.079	0.831	/
		10	9538	1907.60	-0.02	0.852	22.15	22.50	1.084	0.924	8#
	Back Side	10	9400	1880.00	-0.02	0.385	22.15	22.50	1.084	0.417	/
	Left Edge	10	9400	1880.00	-0.08	0.300	22.15	22.50	1.084	0.325	/
	Bottom Edge	10	9400	1880.00	-0.04	0.530	22.15	22.50	1.084	0.574	/

10.4 WCDMA Band 5

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power(dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head											
RMC	Right Cheek	0	4182	836.40	-0.19	0.171	22.36	23.00	1.159	0.198	9#
	Right Tilt	0	4182	836.40	-0.02	0.094	22.36	23.00	1.159	0.109	/
	Left Cheek	0	4182	836.40	-0.02	0.170	22.36	23.00	1.159	0.197	/
	Left Tilt	0	4182	836.40	-0.10	0.098	22.36	23.00	1.159	0.114	/
Body-worn Accessory & Hotspot											
RMC	Front Side	10	4182	836.40	0.09	0.398	22.36	23.00	1.159	0.461	10#
	Back Side	10	4182	836.40	0.04	0.254	22.36	23.00	1.159	0.294	/
	Left Edge	10	4182	836.40	0.12	0.132	22.36	23.00	1.159	0.153	/
	Bottom Edge	10	4182	836.40	-0.03	0.195	22.36	23.00	1.159	0.226	/

10.5 CDMA BC0

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power(dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head											
1xRTT (RC3 SO55)	Right Cheek	0	384	836.52	0.10	0.198	23.56	24.00	1.107	0.219	/
	Right Tilt	0	384	836.52	0.08	0.098	23.56	24.00	1.107	0.108	/
	Left Cheek	0	384	836.52	0.08	0.194	23.56	24.00	1.107	0.215	/
	Left Tilt	0	384	836.52	-0.04	0.121	23.56	24.00	1.107	0.134	/
1xEVDO (Rel. 0)	Right Cheek	0	384	836.52	0.09	0.209	24.20	24.50	1.072	0.224	/
	Right Tilt	0	384	836.52	0.05	0.094	24.20	24.50	1.072	0.101	/
	Left Cheek	0	384	836.52	0.10	0.209	24.20	24.50	1.072	0.224	11#
	Left Tilt	0	384	836.52	0.05	0.118	24.20	24.50	1.072	0.126	/
Body-worn Accessory & Hotspot											
1xRTT (RC3 SO55)	Front Side	10	384	836.52	0.04	0.451	23.56	24.00	1.107	0.499	/
	Back Side	10	384	836.52	0.02	0.261	23.56	24.00	1.107	0.289	/
	Left Edge	10	384	836.52	-0.07	0.140	23.56	24.00	1.107	0.155	/
	Bottom Edge	10	384	836.52	-0.01	0.269	23.56	24.00	1.107	0.298	/
1xEVDO (Rel. 0)	Front Side	10	384	836.52	-0.01	0.482	24.20	24.50	1.072	0.516	12#
	Back Side	10	384	836.52	0.13	0.251	24.20	24.50	1.072	0.269	/
	Left Edge	10	384	836.52	0.04	0.144	24.20	24.50	1.072	0.154	/
	Bottom Edge	10	384	836.52	-0.05	0.267	24.20	24.50	1.072	0.286	/

10.6LTE Band 2 (20MHz Bandwidth)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	RB Numb.	RB Start	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head													
QPSK	Right Cheek	0	18900	1880.0	1	Low	-0.11	0.061	22.770	23.000	1.054	0.064	/
			18900	1880.0	50	Low	0.07	0.046	21.490	22.000	1.125	0.052	/
	Right Tilt	0	18900	1880.0	1	Low	0.10	0.045	22.770	23.000	1.054	0.047	/
			18900	1880.0	50	Low	-0.02	0.034	21.490	22.000	1.125	0.038	/
	Left Cheek	0	18900	1880.0	1	Low	0.19	0.122	22.770	23.000	1.054	0.129	13#
			18900	1880.0	50	Low	0.14	0.093	21.490	22.000	1.125	0.105	/
	Left Tilt	0	18900	1880.0	1	Low	0.10	0.038	22.770	23.000	1.054	0.040	/
			18900	1880.0	50	Low	0.09	0.028	21.490	22.000	1.125	0.031	/
Body-worn Accessory& Hotspot													
QPSK	Front Side	10	18900	1880.0	1	Low	-0.09	0.806	22.77	23.000	1.054	0.850	/
			18700	1860.0	1	Low	-0.03	0.818	22.58	23.000	1.102	0.901	/
			19100	1900.0	1	Mid.	-0.04	0.858	22.47	23.000	1.130	0.969	14#
			18900	1880.0	50	Low	0.10	0.618	21.490	22.000	1.125	0.695	/
			18700	1860.0	100	Low	-0.10	0.583	21.470	22.000	1.130	0.659	/
	Back Side	10	18900	1880.0	1	Low	-0.01	0.417	22.770	23.000	1.054	0.440	/
			18900	1880.0	50	Low	0.07	0.319	21.490	22.000	1.125	0.359	/
	Left Edge	10	18900	1880.0	1	Low	0.10	0.316	22.770	23.000	1.054	0.333	/
			18900	1880.0	50	Low	0.08	0.237	21.490	22.000	1.125	0.267	/
	Bottom Edge	10	18900	1880.0	1	Low	0.00	0.583	22.770	23.000	1.054	0.615	/
			18900	1880.0	50	Low	0.11	0.447	21.490	22.000	1.125	0.503	/

10.7LTE Band 4 (20MHz Bandwidth)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	RB Numb.	RB Start	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head													
QPSK	Right Cheek	0	20175	1732.5	1	Low	-0.03	0.042	23.580	24.000	1.102	0.046	/
			20175	1732.5	50	Mid.	0.11	0.035	22.500	23.000	1.122	0.039	/
	Right Tilt	0	20175	1732.5	1	Low	0.13	0.028	23.580	24.000	1.102	0.031	/
			20175	1732.5	50	Mid.	0.14	0.024	22.500	23.000	1.122	0.027	/
	Left Cheek	0	20175	1732.5	1	Low	0.03	0.090	23.580	24.000	1.102	0.099	15#
			20175	1732.5	50	Mid.	0.15	0.069	22.500	23.000	1.122	0.077	/
	Left Tilt	0	20175	1732.5	1	Low	-0.14	0.034	23.580	24.000	1.102	0.037	/
			20175	1732.5	50	Mid.	-0.01	0.032	22.500	23.000	1.122	0.036	/
Body-worn Accessory& Hotspot													
QPSK	Front Side	10	20175	1732.5	1	Low	-0.14	0.853	23.580	24.000	1.102	0.940	/
			20050	1720.0	1	Mid.	0.14	0.889	23.340	24.000	1.164	1.035	16#
			20300	1745.0	1	High	0.14	0.850	23.450	24.000	1.135	0.965	/
			20175	1732.5	50	Mid.	0.04	0.683	22.500	23.000	1.122	0.766	/
			20050	1720.0	100	Low	0.00	0.601	22.490	23.000	1.125	0.676	/
	Back Side	10	20175	1732.5	1	Low	-0.03	0.333	23.750	24.000	1.059	0.353	/
			20175	1732.5	50	Mid.	0.11	0.265	22.500	23.000	1.122	0.297	/
	Left Edge	10	20175	1732.5	1	Low	0.05	0.301	23.750	24.000	1.059	0.319	/
			20175	1732.5	50	Mid.	-0.06	0.239	22.500	23.000	1.122	0.268	/
	Bottom Edge	10	20175	1732.5	1	Low	0.08	0.545	23.750	24.000	1.059	0.577	/
20175			1732.5	50	Mid.	-0.05	0.426	22.500	23.000	1.122	0.478	/	

10.8LTE Band 5 (10MHz Bandwidth)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	RB Numb.	RB Start	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head													
QPSK	Right Cheek	0	20525	836.5	1	High	-0.08	0.192	23.090	23.500	1.099	0.211	17#
			20525	836.5	25	Low	0.09	0.152	21.970	22.500	1.130	0.172	/
	Right Tilt	0	20525	836.5	1	High	-0.08	0.094	23.090	23.500	1.099	0.103	/
			20525	836.5	25	Low	0.13	0.070	21.970	22.500	1.130	0.079	/
	Left Cheek	0	20525	836.5	1	High	0.09	0.172	23.090	23.500	1.099	0.189	/
			20525	836.5	25	Low	0.02	0.140	21.970	22.500	1.130	0.158	/
	Left Tilt	0	20525	836.5	1	High	0.05	0.100	23.090	23.500	1.099	0.110	/
			20525	836.5	25	Low	0.20	0.076	21.970	22.500	1.130	0.086	/
Body-worn Accessory& Hotspot													
QPSK	Front Side	10	20525	836.5	1	High	0.01	0.546	23.090	23.500	1.099	0.600	18#
			20525	836.5	25	Low	-0.02	0.469	21.970	22.500	1.130	0.530	/
	Back Side	10	20525	836.5	1	High	-0.15	0.266	23.090	23.500	1.099	0.292	/
			20525	836.5	25	Low	-0.04	0.201	21.970	22.500	1.130	0.227	/
	Left Edge	10	20525	836.5	1	High	-0.04	0.130	23.090	23.500	1.099	0.143	/
			20525	836.5	25	Low	-0.11	0.104	21.970	22.500	1.130	0.117	/
	Bottom Edge	10	20525	836.5	1	High	0.03	0.216	23.090	23.500	1.099	0.237	/
			20525	836.5	25	Low	0.02	0.170	21.970	22.500	1.130	0.192	/

10.9LTE Band 7 (20MHz Bandwidth)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	RB Numb.	RB Start	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head													
QPSK	Right Cheek	0	21100	2535.0	1	Mid.	0.09	0.066	22.970	23.500	1.130	0.075	/
			21100	2535.0	50	Low	-0.01	0.056	21.680	22.000	1.076	0.060	/
	Right Tilt	0	21100	2535.0	1	Mid.	0.05	0.035	22.970	23.500	1.130	0.040	/
			21100	2535.0	50	Low	0.17	0.030	21.680	22.000	1.076	0.032	/
	Left Cheek	0	21100	2535.0	1	Mid.	-0.08	0.129	22.970	23.500	1.130	0.146	19#
			21100	2535.0	50	Low	0.15	0.109	21.680	22.000	1.076	0.117	/
	Left Tilt	0	21100	2535.0	1	Mid.	0.00	0.029	22.970	23.500	1.130	0.033	/
			21100	2535.0	50	Low	0.07	0.028	21.680	22.000	1.076	0.030	/
Body-worn Accessory& Hotspot													
QPSK	Front Side	10	21100	2535.0	1	Mid.	0.11	0.364	22.970	23.500	1.130	0.412	20#
			21100	2535.0	50	Low	-0.03	0.298	21.680	22.000	1.076	0.321	/
	Back Side	10	21100	2535.0	1	Mid.	-0.13	0.206	22.970	23.500	1.130	0.233	/
			21100	2535.0	50	Low	-0.09	0.165	21.680	22.000	1.076	0.178	/
	Left Edge	10	21100	2535.0	1	Mid.	-0.03	0.049	22.970	23.500	1.130	0.055	/
			21100	2535.0	50	Low	-0.10	0.042	21.680	22.000	1.076	0.045	/
	Bottom Edge	10	21100	2535.0	1	Mid.	-0.19	0.176	22.970	23.500	1.130	0.199	/
			21100	2535.0	50	Low	-0.04	0.155	21.680	22.000	1.076	0.167	/

10.10 LTE Band 17 (10MHz Bandwidth)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	RB Numb.	RB Start	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head													
QPSK	Right Cheek	0	23790	710.0	1	Low	0.08	0.141	22.150	23.000	1.216	0.171	21#
			23790	710.0	50	Low	0.16	0.121	21.060	21.500	1.107	0.134	/
	Right Tilt	0	23790	710.0	1	Low	-0.15	0.063	22.150	23.000	1.216	0.077	/
			23790	710.0	50	Low	-0.03	0.055	21.060	21.500	1.107	0.061	/
	Left Cheek	0	23790	710.0	1	Low	0.01	0.141	22.150	23.000	1.216	0.171	/
			23790	710.0	50	Low	0.13	0.122	21.060	21.500	1.107	0.135	/
	Left Tilt	0	23790	710.0	1	Low	0.02	0.058	22.150	23.000	1.216	0.071	/
			23790	710.0	50	Low	0.08	0.026	21.060	21.500	1.107	0.029	/
Body-worn Accessory& Hotspot													
QPSK	Front Side	10	23790	710.0	1	Low	-0.14	0.235	22.150	23.000	1.216	0.286	22#
			23790	710.0	50	Low	-0.20	0.177	21.060	21.500	1.107	0.196	/
	Back Side	10	23790	710.0	1	Low	-0.19	0.199	22.150	23.000	1.216	0.242	/
			23790	710.0	50	Low	-0.05	0.177	21.060	21.500	1.107	0.196	/
	Left Edge	10	23790	710.0	1	Low	-0.16	0.178	22.150	23.000	1.216	0.216	/
			23790	710.0	50	Low	0.10	0.138	21.060	21.500	1.107	0.153	/
	Bottom Edge	10	23790	710.0	1	Low	-0.09	0.115	22.150	23.000	1.216	0.140	/
			23790	710.0	50	Low	-0.11	0.107	21.060	21.500	1.107	0.118	/

10.11 LTE Band 41 (20MHz Bandwidth)

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	RB Numb.	RB Start	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head													
QPSK	Right Cheek	0	41140	2645.0	1	Low	-0.16	0.036	22.850	23.000	1.035	0.037	/
			41140	2645.0	50	Low	-0.18	0.028	21.740	22.000	1.062	0.030	/
	Right Tilt	0	41140	2645.0	1	Low	-0.08	0.019	22.850	23.000	1.035	0.020	/
			41140	2645.0	50	Low	-0.20	0.011	21.740	22.000	1.062	0.012	/
	Left Cheek	0	41140	2645.0	1	Low	-0.19	0.051	22.850	23.000	1.035	0.053	23#
			41140	2645.0	50	Low	-0.10	0.041	21.740	22.000	1.062	0.044	/
	Left Tilt	0	41140	2645.0	1	Low	-0.08	0.018	22.850	23.000	1.035	0.019	/
			41140	2645.0	50	Low	0.01	0.013	21.740	22.000	1.062	0.014	/
Body-worn Accessory& Hotspot													
QPSK	Front Side	10	41140	2645.0	1	Low	-0.04	0.391	22.850	23.000	1.035	0.405	24#
			41140	2645.0	50	Low	0.13	0.329	21.740	22.000	1.062	0.349	/
	Back Side	10	41140	2645.0	1	Low	-0.14	0.161	22.850	23.000	1.035	0.167	/
			41140	2645.0	50	Low	-0.20	0.134	21.740	22.000	1.062	0.142	/
	Left Edge	10	41140	2645.0	1	Low	-0.10	0.039	22.850	23.000	1.035	0.040	/
			41140	2645.0	50	Low	-0.18	0.030	21.740	22.000	1.062	0.032	/
	Bottom Edge	10	41140	2645.0	1	Low	-0.08	0.160	22.850	23.000	1.035	0.166	/
			41140	2645.0	50	Low	0.00	0.130	21.740	22.000	1.062	0.138	/

10.12 WIFI 2.4GHz

Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	Duty Cycle (%)	Duty Cycle Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head													
802.11 b	Right Cheek	0	6	2437	0.13	0.400	12.73	13.00	1.064	96.86	1.032	0.439	25#
	Right Tilt	0	6	2437	0.11	0.224	12.73	13.00	1.064	96.86	1.032	0.246	/
	Left Cheek	0	6	2437	0.09	0.105	12.73	13.00	1.064	96.86	1.032	0.115	/
	Left Tilt	0	6	2437	0.01	0.122	12.73	13.00	1.064	96.86	1.032	0.134	/
Body-worn Accessory& Hotspot													
802.11 b	Front Side	10	6	2437	-0.03	0.076	12.73	13.00	1.064	96.86	1.032	0.083	26#
	Back Side	10	6	2437	0.10	0.059	12.73	13.00	1.064	96.86	1.032	0.065	/
	Left Edge	10	6	2437	-0.02	0.046	12.73	13.00	1.064	96.86	1.032	0.051	/
	Top Edge	10	6	2437	0.16	0.051	12.73	13.00	1.064	96.86	1.032	0.056	/

10.13 WIFI 5GHz

Fre. Band	Mode	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1 g Meas. SAR (W/Kg)	Meas. Power (dBm)	Max. tune-up Power (dBm)	Scaling Factor	Duty Cycle (%)	Duty Cycle Scaling Factor	1 g Scaled SAR (W/Kg)	Meas. No.
Head														
5.2G	802.11 ac(VHT40)	Right Cheek	0	46	5230	0.00	0.216	11.79	12.00	1.050	70.30	1.422	0.322	27#
		Right Tilt	0	46	5230	0.00	0.101	11.79	12.00	1.050	70.30	1.422	0.151	/
		Left Cheek	0	46	5230	0.00	0.001	11.79	12.00	1.050	70.30	1.422	0.001	/
		Left Tilt	0	46	5230	0.00	0.015	11.79	12.00	1.050	70.30	1.422	0.022	/
Body-worn Accessory& Hotspot														
5.2G	802.11 ac(VHT40)	Front Side	10	46	5230	-0.02	0.043	11.79	12.00	1.050	70.30	1.422	0.064	/
		Back Side	10	46	5230	0.00	0.048	11.79	12.00	1.050	70.30	1.422	0.072	/
		Left Edge	10	46	5230	0.00	0.078	11.79	12.00	1.050	70.30	1.422	0.116	28#
		Top Edge	10	46	5230	0.00	0.010	11.79	12.00	1.050	70.30	1.422	0.015	/
Head														
5.8G	802.11 ac(VHT20)	Right Cheek	0	149	5745	0.00	0.124	13.87	14.50	1.156	92.26	1.084	0.155	29#
		Right Tilt	0	149	5745	0.00	0.000	13.87	14.50	1.156	92.26	1.084	0.000	/
		Left Cheek	0	149	5745	0.00	0.000	13.87	14.50	1.156	92.26	1.084	0.000	/
		Left Tilt	0	149	5745	0.00	0.000	13.87	14.50	1.156	92.26	1.084	0.000	/
Body-worn Accessory& Hotspot														
5.8G	802.11 ac(VHT20)	Front Side	10	149	5745	0.00	0.038	13.87	14.50	1.156	92.26	1.084	0.048	/
		Back Side	10	149	5745	0.00	0.053	13.87	14.50	1.156	92.26	1.084	0.066	/
		Left Edge	10	149	5745	0.00	0.092	13.87	14.50	1.156	92.26	1.084	0.115	30#
		Top Edge	10	149	5745	0.00	0.025	13.87	14.50	1.156	92.26	1.084	0.031	/
Note: For this band, the EUT does not support Power Reduction under Hotspot mode.														

11 SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are ≤ 1.45 W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is ≤ 1.10 , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is < 0.80 W/kg, repeated measurement is not required.
2. When the highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 , or when the original or repeated measurement is ≥ 1.45 W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 , and the original, first or second repeated measurement is ≥ 1.5 W/kg, perform a third repeated measurement.

Frequency Band (MHz)	Wireless Band	RF Exposure Conditions	Test Position	Highest Measured SAR (W/kg)	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Largest to Smallest SAR Ratio
1750	LTE Band 4	Body	Front Side	0.889	Yes	0.824	1.08
1900	GSM 1900	Body	Front Side	1.100	Yes	1.010	1.09
	WCDMA Band 2	Body	Front Side	0.852	Yes	0.833	1.02
	LTE Band 2	Body	Front Side	0.858	Yes	0.810	1.06

Note: the ratio of largest to smallest SAR for the original and first repeated measurements is < 1.20 , the second repeated measurement is not required.

12 SIMULTANEOUS TRANSMISSION

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR 1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR 1g 1.6 W/kg), SAR test exclusion is determined by the SAR to Peak Location Ratio (SPLSR).

12.1 Simultaneous Transmission Mode Consider

NO.	Mode	2.4G WLAN & 5G WLAN & 2.4G Bluetooth		
		Head	Body-worn	Hotspot
1	GSM (Voice)	+ 2.4G WLAN	+ 2.4G WLAN	--
		+ 5G WLAN	+ 5G WLAN	--
		--	+ Bluetooth	--
2	GSM (Data)	--	--	+ 2.4G WLAN
		--	--	+ 5G WLAN
3	CDMA/EV DO	+ 2.4G WLAN	+ 2.4G WLAN	+ 2.4G WLAN
		+ 5G WLAN	+ 5G WLAN	+ 5G WLAN
		--	+ Bluetooth	--
4	WCDMA RMC	+ 2.4G WLAN	+ 2.4G WLAN	+ 2.4G WLAN
		+ 5G WLAN	+ 5G WLAN	+ 5G WLAN
		--	+ Bluetooth	--
5	LTE	+ 2.4G WLAN	+ 2.4G WLAN	+ 2.4G WLAN
		+ 5G WLAN	+ 5G WLAN	+ 5G WLAN
		--	+ Bluetooth	--
Note:				
1. 2G&3G&4G share the same antenna and can't transmit simultaneously.				
2. The Bluetooth and 2.4G WLAN share the same antenna, can't transmitting together.				
3. The 2.4G WLAN or 5G WLAN can transmit simultaneously with each WWAN.				
4. Both 2.4G WLAN and 5G WLAN supports hotspot mode.				

12.2 Estimated SAR Calculation

According to KDB 447498 D01, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR was estimated according to following formula to result in substantially conservative SAR values of ≤ 0.4 W/kg to determine simultaneous transmission SAR test exclusion.

$$\text{Estimated SAR} = \frac{\text{Max. Tune Up Power (mw)}}{\text{Min Test Separation Distance}} * \frac{\sqrt{f_{\text{GHz}}}}{x} \quad (\text{where } x = 7.5 \text{ for 1-g SAR})$$

If the minimum test separation distance is < 5 mm, a distance of 5 mm is used for estimated SAR calculation. When the test separation distance is > 50 mm, the 0.4 W/kg is used for SAR-1g.

Band	Mode	Position	Antenna To user (mm)	SAR Testing	Max. Tune-up Power (dBm)	Max. Tune-up Power (mW)	Frequency (GHz)	Calculation Distance/Gap (mm)	Estimated SAR (W/kg)
Bluetooth	GFSK	Front side	10	NO	3.50	2.24	2.480	10	0.047
		Back Side	10	NO	3.50	2.24	2.480	10	0.047
		Left Edge	10	NO	3.50	2.24	2.480	10	0.047
		Bottom Edge	10	NO	3.50	2.24	2.480	10	0.047

12.3 Sum SAR of Simultaneous Transmission

12.3.1 Sum Head SAR of Simultaneous Transmission

Simultaneous Mode	Mode	Max. 1g SAR (W/kg)	1g Sum SAR (W/kg)	SPLSR (Yes/No)
GSM Voice + 2.4G WLAN	GSM Voice	0.203	0.642	No
	2.4G WLAN	0.439		
GSM Voice + 5G WLAN	GSM Voice	0.203	0.525	No
	5G WLAN	0.322		
WCDMA RMC + 2.4G WLAN	WCDMA RMC	0.198	0.637	No
	2.4G WLAN	0.439		
WCDMA RMC + 5G WLAN	WCDMA RMC	0.198	0.520	No
	5G WLAN	0.322		
CDMA + 2.4G WLAN	CDMA	0.224	0.663	No
	2.4G WLAN	0.439		
CDMA + 5G WLAN	CDMA	0.224	0.546	No
	5G WLAN	0.322		
LTE QPSK + 2.4G WLAN	LTE QPSK	0.211	0.650	No
	2.4G WLAN	0.439		
LTE QPSK + 5G WLAN	LTE QPSK	0.211	0.533	No
	5G WLAN	0.322		

12.3.2 Sum Body-worn SAR of Simultaneous Transmission

Simultaneous Mode	Mode	Max. 1g SAR (W/kg)	1g Sum SAR (W/kg)	SPLSR (Yes/No)
GSM Voice +Bluetooth	GSM Voice	0.590	0.637	No
	Bluetooth	0.047		
GSM Voice + 2.4G WLAN	GSM Voice	0.590	0.673	No
	2.4G WLAN	0.083		
GSM Voice + 5G WLAN	GSM Voice	0.590	0.662	No
	5G WLAN	0.072		
WCDMA RMC +Bluetooth	WCDMA RMC	0.924	0.971	No
	Bluetooth	0.047		
WCDMA RMC +2.4G WLAN	WCDMA RMC	0.924	1.007	No
	2.4G WLAN	0.083		
WCDMA RMC +5G WLAN	WCDMA RMC	0.924	0.996	No
	5G WLAN	0.072		
CDMA + Bluetooth	CDMA	0.516	0.563	No
	Bluetooth	0.047		
CDMA + 2.4G WLAN	CDMA	0.516	0.599	No
	2.4G WLAN	0.083		
CDMA + 5G WLAN	CDMA	0.516	0.588	No
	5G WLAN	0.072		
LTE QPSK + Bluetooth	LTE QPSK	0.986	1.033	No
	Bluetooth	0.047		
LTE QPSK + 2.4G WLAN	LTE QPSK	1.035	1.118	No
	2.4G WLAN	0.083		
LTE QPSK + 5G WLAN	LTE QPSK	1.035	1.107	No
	5G WLAN	0.072		

12.3.3 Sum Hotspot mode SAR of Simultaneous Transmission

Simultaneous Mode	Mode	Max. 1g SAR (W/kg)	1g Sum SAR (W/kg)	SPLSR (Yes/No)
GSM DATA + 2.4G WLAN	GSM DATA	1.154	1.237	No
	2.4G WLAN	0.083		
GSM DATA + 5G WLAN	GSM DATA	1.154	1.270	No
	5G WLAN	0.116		
WCDMA RMC + 2.4G WLAN	WCDMA RMC	0.924	1.007	No
	2.4G WLAN	0.083		
WCDMA RMC +5G WLAN	WCDMA RMC	0.924	1.040	No
	5G WLAN	0.116		
CDMA + 2.4G WLAN	CDMA	0.516	0.599	No
	2.4G WLAN	0.083		
CDMA + 5G WLAN	CDMA	0.516	0.632	No
	5G WLAN	0.116		
LTE QPSK + 2.4G WLAN	LTE QPSK	1.035	1.118	No
	2.4G WLAN	0.083		
LTE QPSK + 5G WLAN	LTE QPSK	1.035	1.151	No
	5G WLAN	0.116		

13 TEST EQUIPMENTS LIST

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
PC	Dell	N/A	N/A	N/A	N/A
750MHz Validation Dipole	Speag	D750V3	SN: 1055	2017/06/26	2018/06/25
835MHz Validation Dipole	Speag	D835V2	SN: 4d187	2017/06/26	2018/06/25
1750MHz Validation Dipole	Speag	D1750V2	SN: 1130	2017/07/01	2018/06/30
1900MHz Validation Dipole	Speag	D1900V2	SN: 5d193	2017/06/30	2018/06/29
2450MHz Validation Dipole	Speag	D2450V2	SN: 952	2017/03/21	2018/03/20
2600MHz Validation Dipole	Speag	D2600V2	SN: 1095	2017/07/10	2018/07/09
5GHz Validation Dipole	Speag	D5GHzV2	SN: 1200	2017/06/29	2018/06/28
E-Field Probe	Speag	EX3DV4	SN: 7340	2018/01/11	2019/01/10
E-Field Probe	Speag	ES3DV3	SN: 3110	2017/08/02	2018/08/01
Data Acquisition Electronics	Speag	DAE4	SN: 685	2017/08/02	2018/08/01
Signal Generator	R&S	SMBV100A	260592	2017/06/12	2018/06/11
Power Meter	Agilent	E4419B	GB40201833	2017/11/02	2018/11/01
Power Sensor	Agilent	E9300A	MY41498012	2017/11/02	2018/11/01
Power Sensor	Agilent	E9300A	MY41499891	2017/11/02	2018/11/01
Power Amplifier	SATIMO	6552B	22374	2017/06/12	2018/06/11
Wireless Communication Test Set	Agilent	8960-E5515C	MY50260493	2017/11/02	2018/11/01
Wireless Communication Test Set	R&S	CMW 500	151885	2017/06/12	2018/06/11
Network Analyzer	Agilent	5071B	MY42404001	2017/06/12	2018/06/11
Thermometer	Elitech	RC-4HC	N/A	2017/11/13	2018/11/12
Phantom1	Speag	SAM	SN: 1859	N/A	N/A
Phantom2	Speag	SAM	SN: 1857	N/A	N/A
Attenuator	COM-MW	ZA-S1-31	1305003187	N/A	N/A
Directional coupler	AA-MCS	AAMCS-UDC	000272	N/A	N/A
Power Amplifier	SATIMO	6552B	22374	N/A	N/A
Dielectric Probe Kit	SATIMO	SCLMP	SN 25/13 OCPG56	N/A	N/A

ANNEX A SIMULATING LIQUID VERIFICATION RESULT

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an SCLMP Dielectric Probe Kit.

Date	Liquid Type	Fre. (MHz)	Temp. (°C)	Meas. Conductivity (σ) (S/m)	Meas. Permittivity (ϵ)	Target Conductivity (σ) (S/m)	Target Permittivity (ϵ)	Conductivity Tolerance (%)	Permittivity Tolerance (%)
2018.01.25	Head	750	21.2	0.88	43.33	0.89	41.90	-1.12	3.41
2018.01.24	Body	750	21.2	0.98	57.78	0.96	55.50	2.08	4.11
2017.12.26	Head	835	21.0	0.92	42.82	0.90	41.50	2.22	3.18
2018.01.02	Body	835	21.6	0.99	57.21	0.97	55.20	2.06	3.64
2017.12.27	Head	835	21.4	0.91	43.23	0.90	41.50	1.11	4.17
2018.01.23	Head	1750	20.9	1.35	40.30	1.37	40.10	-1.46	0.50
2018.01.25	Body	1750	21.1	1.50	54.84	1.49	53.40	0.67	2.70
2018.01.03	Head	1900	21.5	1.39	40.03	1.40	40.00	-0.71	0.08
2018.01.22	Body	1900	21.4	1.46	55.91	1.52	53.30	-3.95	4.90
2018.01.08	Body	1900	21.2	1.46	55.89	1.52	53.30	-3.95	4.86
2018.01.17	Head	2450	20.9	1.81	40.69	1.80	39.20	0.56	3.80
2018.01.17	Body	2450	21.7	2.04	53.12	1.95	52.70	4.62	0.80
2018.01.10	Head	2600	20.8	2.03	38.82	1.96	39.00	3.57	-0.46
2018.01.12	Body	2600	21.8	2.24	51.72	2.16	52.50	3.70	-1.49
2018.01.13	Head	5250	21.0	4.83	34.77	4.66	36.00	3.65	-3.42
2018.01.14	Body	5250	21.4	5.51	47.77	5.30	48.70	3.96	-1.91
2018.01.13	Head	5750	21.0	5.35	34.65	5.27	35.30	1.52	-1.84
2018.01.14	Body	5750	21.4	6.11	45.95	6.00	48.20	1.83	-4.67

Note: The tolerance limit of Conductivity and Permittivity is $\pm 5\%$.

ANNEX B SYSTEM CHECK RESULT

Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 % (for 1 g).

Date	Liquid Type	Freq. (MHz)	Power (mW)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Dipole SAR (W/kg)	Tolerance (%)	Targeted SAR (W/kg)	Tolerance (%)
2018.01.25	Head	750	250	2.16	8.64	8.27	4.47	8.49	1.77
2018.01.24	Body	750	250	2.12	8.48	8.64	-1.85	8.49	-0.12
2017.12.26	Head	835	250	2.44	9.76	9.75	0.10	9.56	2.09
2018.01.02	Body	835	250	2.37	9.48	9.53	-0.52	9.56	-0.84
2017.12.27	Head	835	250	2.41	9.64	9.75	-1.13	9.56	0.84
2018.01.23	Head	1750	250	9.42	37.68	36.90	2.11	36.40	3.52
2018.01.25	Body	1750	250	9.78	39.12	36.70	6.59	36.40	7.47
2018.01.03	Head	1900	250	9.98	39.92	39.90	0.05	39.70	0.55
2018.01.22	Body	1900	250	10.10	40.40	39.90	1.25	39.70	1.76
2018.01.08	Body	1900	250	10.16	40.64	39.90	1.85	39.70	2.37
2018.01.17	Head	2450	250	13.70	54.80	52.40	4.58	52.40	4.58
2018.01.17	Body	2450	250	13.32	53.28	50.50	5.50	52.40	1.68
2018.01.10	Head	2600	250	14.10	56.40	56.40	0.00	55.30	1.99
2018.01.12	Body	2600	250	14.20	56.80	54.30	4.60	55.30	2.71
2018.01.13	Head	5250	250	20.20	80.80	76.20	6.04	76.50	5.62
2018.01.14	Body	5250	250	18.63	74.52	75.20	-0.90	76.50	-2.59
2018.01.13	Head	5750	250	20.90	83.60	80.80	3.47	78.00	7.18
2018.01.14	Body	5750	250	19.49	77.96	75.00	3.95	78.00	-0.05

Note: The tolerance limit of System validation $\pm 10\%$.

System Performance Check Data (750MHz Head)

Date: 2018.01.25

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.88 \text{ S/m}$; $\epsilon_r = 43.33$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.5 Liquid Temperature: 21.2

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(6.16, 6.16, 6.16); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole 750MHz_250mW /Area Scan (81x161x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.32 W/Kg


Dipole 750MHz_250mW /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 50 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 3.21 W/kg

SAR(1 g) = 2.16 W/Kg; SAR(10 g) = 1.43 W/Kg

Maximum value of SAR (measured) = 2.33 W/Kg

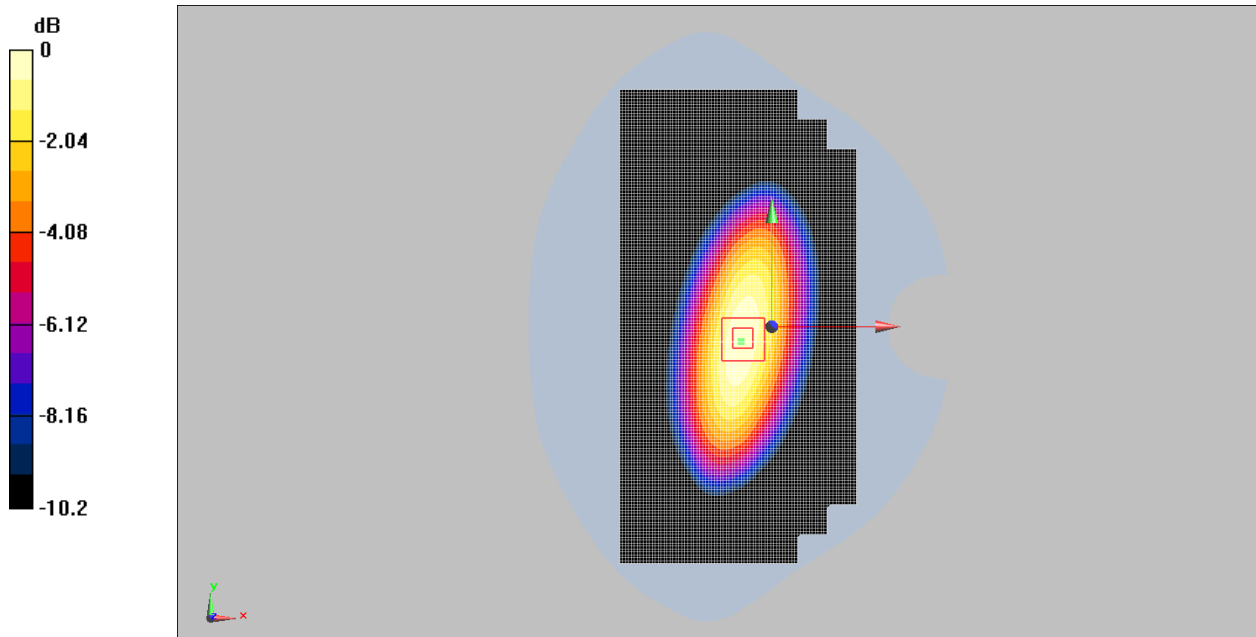

0 dB = 2.33W/Kg

System Performance Check Data (835MHz Head)

Date: 2017.12.26

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.92 \text{ S/m}$; $\epsilon_r = 42.82$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.1 Liquid Temperature: 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN7475; ConvF(6.1, 6.1, 6.1); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole 835MHz_250mW /Area Scan (81x161x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.63 W/Kg


Dipole 835MHz_250mW /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.5 V/m; Power Drift = 0.032 dB

Peak SAR (extrapolated) = 3.67 W/kg

SAR(1 g) = 2.44 W/Kg; SAR(10 g) = 1.59 W/Kg

Maximum value of SAR (measured) = 2.64 W/Kg

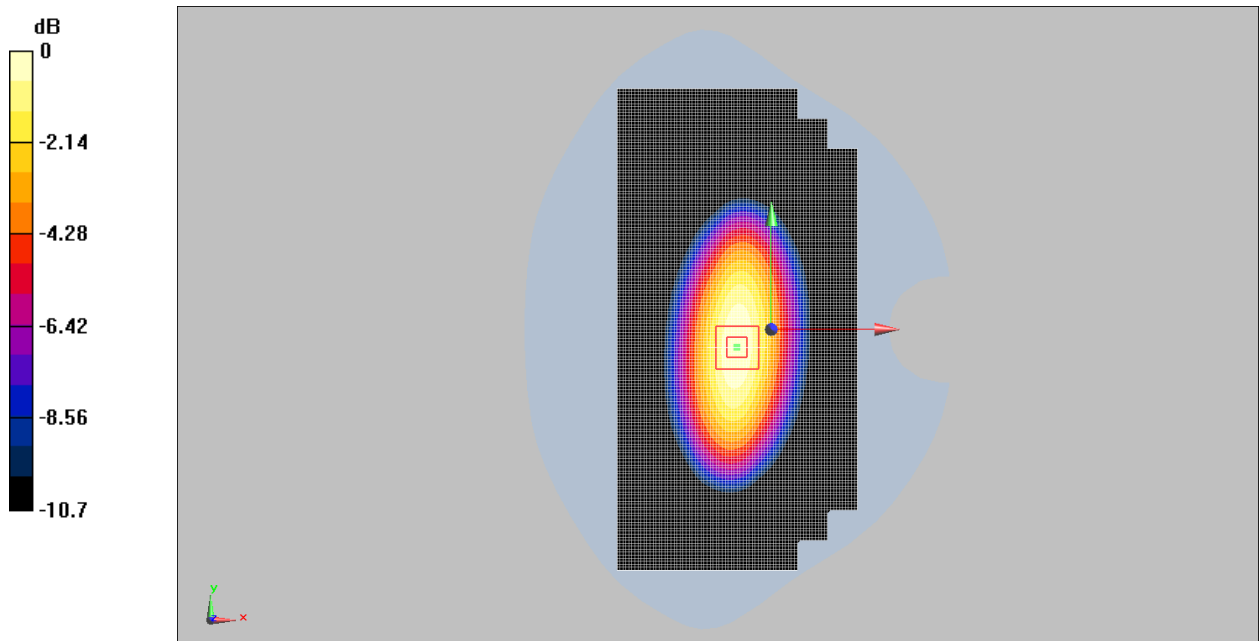

0 dB = 2.64W/Kg

System Performance Check Data (835MHz Head)

Date: 2017.12.27

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.91 \text{ S/m}$; $\epsilon_r = 43.23$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.3 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7475; ConvF(6.1, 6.1, 6.1); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole 835MHz_250mW /Area Scan (81x161x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.61 W/Kg


Dipole 835MHz_250mW /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 53.4 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 3.66 W/kg

SAR(1 g) = 2.41 W/Kg; SAR(10 g) = 1.55 W/Kg

Maximum value of SAR (measured) = 2.62 W/Kg

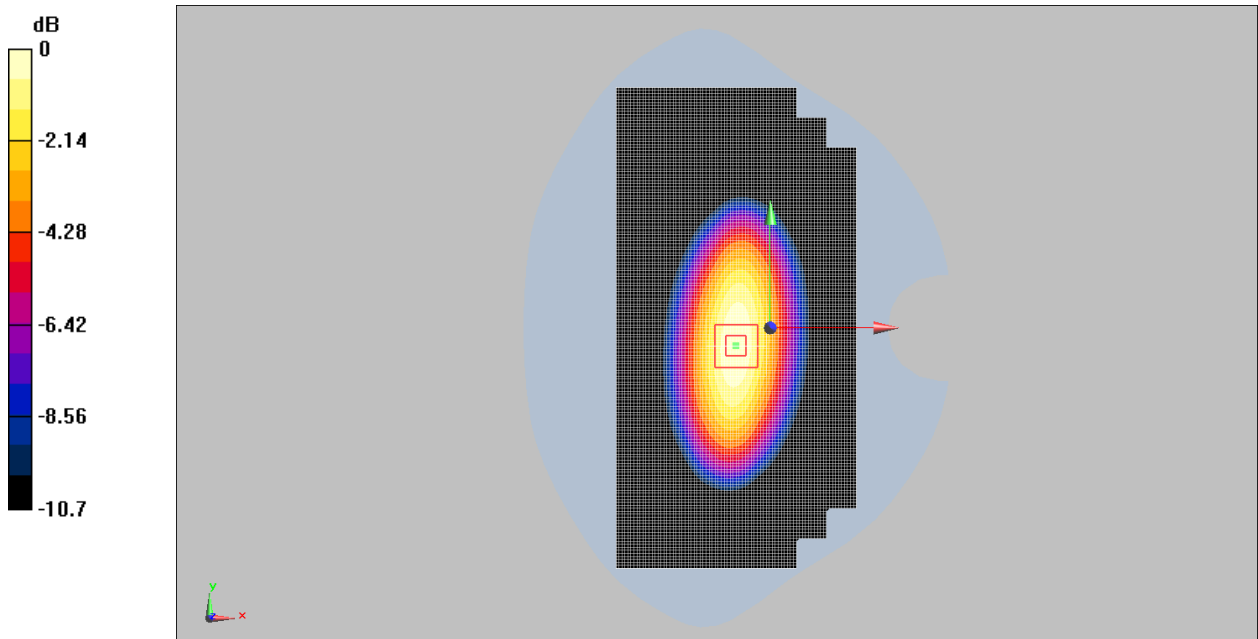

0 dB = 2.62W/Kg

System Performance Check Data (1750MHz Head)

Date: 2018.01.23

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750 \text{ MHz}$; $\sigma = 1.35 \text{ S/m}$; $\epsilon_r = 40.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 21.9 Liquid Temperature: 20.9

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(5.17, 5.17, 5.17); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole 1750MHz_250mW /Area Scan (81x81x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 10.5 W/Kg


Dipole 1750MHz_250mW /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 85.6V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 17.0 W/kg

SAR(1 g) = 9.42 W/Kg; SAR(10 g) = 4.98 W/Kg

Maximum value of SAR (measured) = 10.5 W/Kg

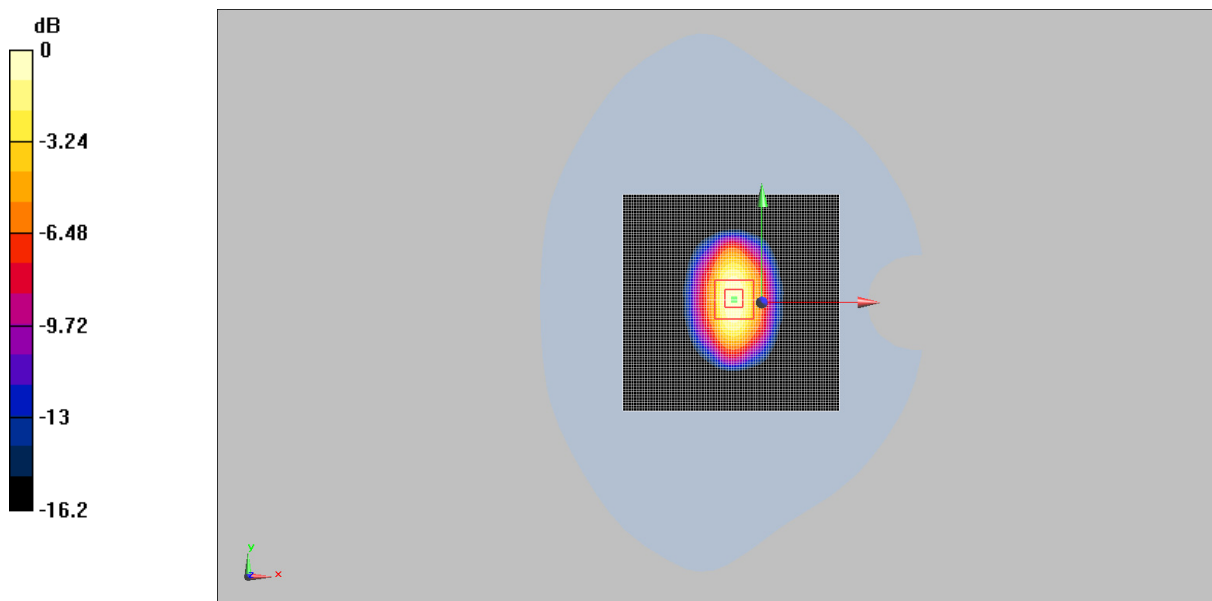

0 dB = 10.5W/Kg

System Performance Check Data (1900MHz Head)

Date: 2018.01.03

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.39 \text{ S/m}$; $\epsilon_r = 40.03$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.3 Liquid Temperature: 21.5

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(4.87, 4.87, 4.87); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole 1900MHz_250mW /Area Scan (81x81x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 11.0 W/Kg


Dipole 1900MHz_250mW /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 81 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 17.8 W/kg

SAR(1 g) = 9.98 W/Kg; SAR(10 g) = 5.15 W/Kg

Maximum value of SAR (measured) = 11.0 W/Kg

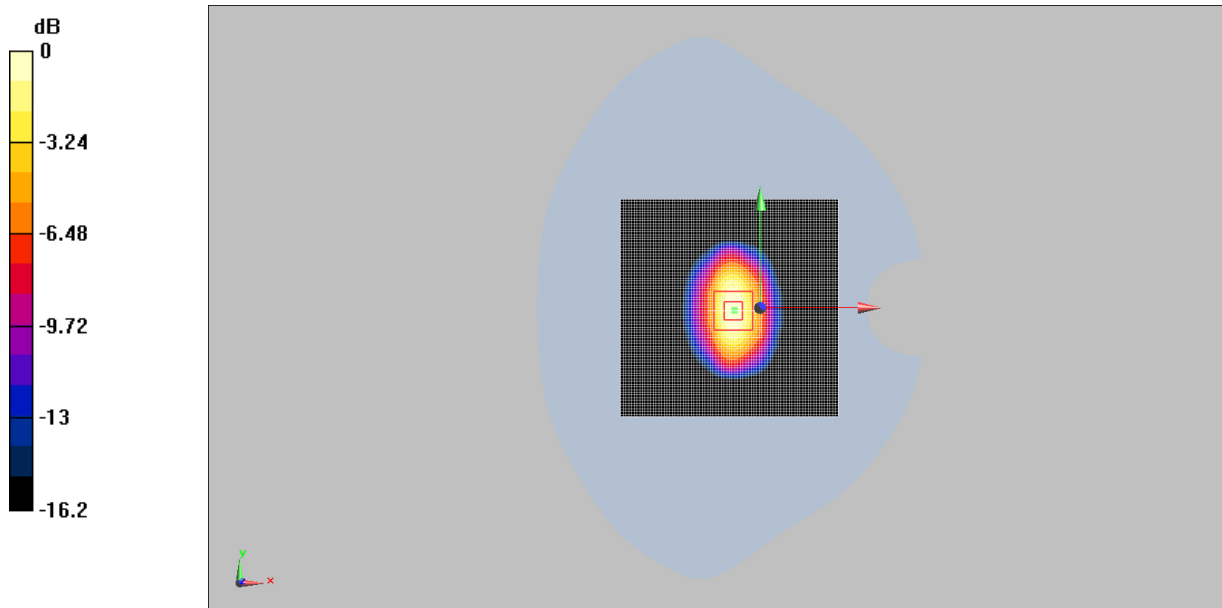

0 dB = 11.0W/Kg

System Performance Check Data (2450MHz Head)

Date: 2018.01.17

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 40.69$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1 Liquid Temperature: 20.9

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(4.4, 4.4, 4.4); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole 2450MHz_250mW /Area Scan (81x81x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 15.6 W/Kg


Dipole 2450MHz_250mW /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90 V/m; Power Drift = 0.00336 dB

Peak SAR (extrapolated) = 29.3 W/kg

SAR(1 g) = 13.7 W/Kg; SAR(10 g) = 6.21 W/Kg

Maximum value of SAR (measured) = 15.8 W/Kg

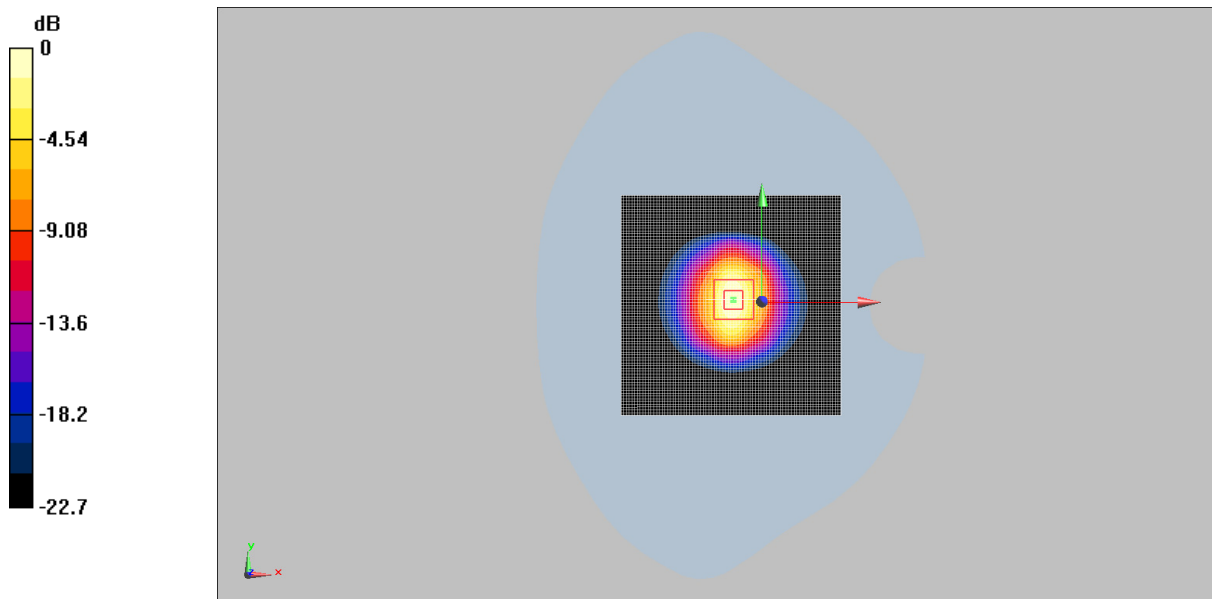

0 dB = 15.8W/Kg

System Performance Check Data (2600MHz Head)

Date: 2018.01.10

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.03$ S/m; $\epsilon_r = 38.82$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.8 Liquid Temperature: 20.8

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(4.25, 4.25, 4.25); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole 2600MHz_250mW /Area Scan (81x81x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 16.2 W/Kg


Dipole 2600MHz_250mW /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 90.8 V/m; Power Drift = 0.00436 dB

Peak SAR (extrapolated) = 32.2 W/kg

SAR(1 g) = 14.1 W/Kg; SAR(10 g) = 6.1 W/Kg

Maximum value of SAR (measured) = 16.2 W/Kg

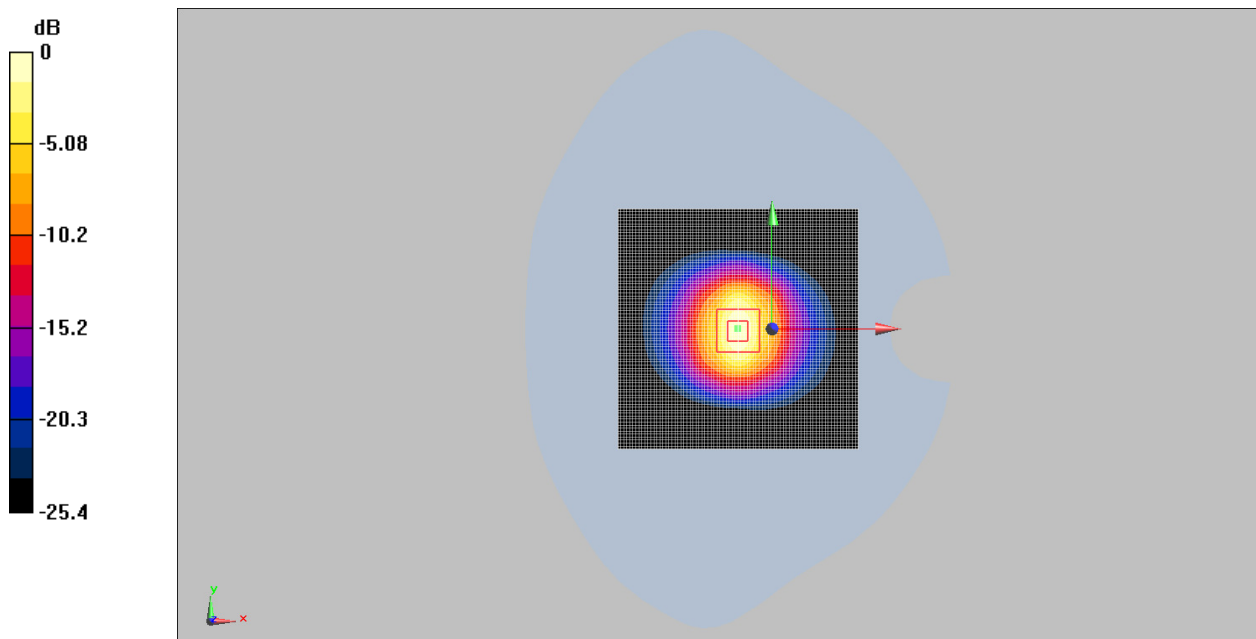

0 dB = 16.2W/Kg

System Performance Check Data (5250MHz Head)

Date: 2018.01.13

Communication System: CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.83$ S/m; $\epsilon_r = 34.77$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.9 Liquid Temperature: 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(5.65, 5.65, 5.65); Calibrated: 2018.01.11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole 5250MHz_250mW /Area Scan (61x61x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 23.6 W/Kg


Dipole 5250MHz_250mW /Zoom Scan (7x7x21)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 72.7 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 69.4 W/kg

SAR(1 g) = 20.2 W/Kg; SAR(10 g) = 5.74 W/Kg

Maximum value of SAR (measured) = 24.7 W/Kg

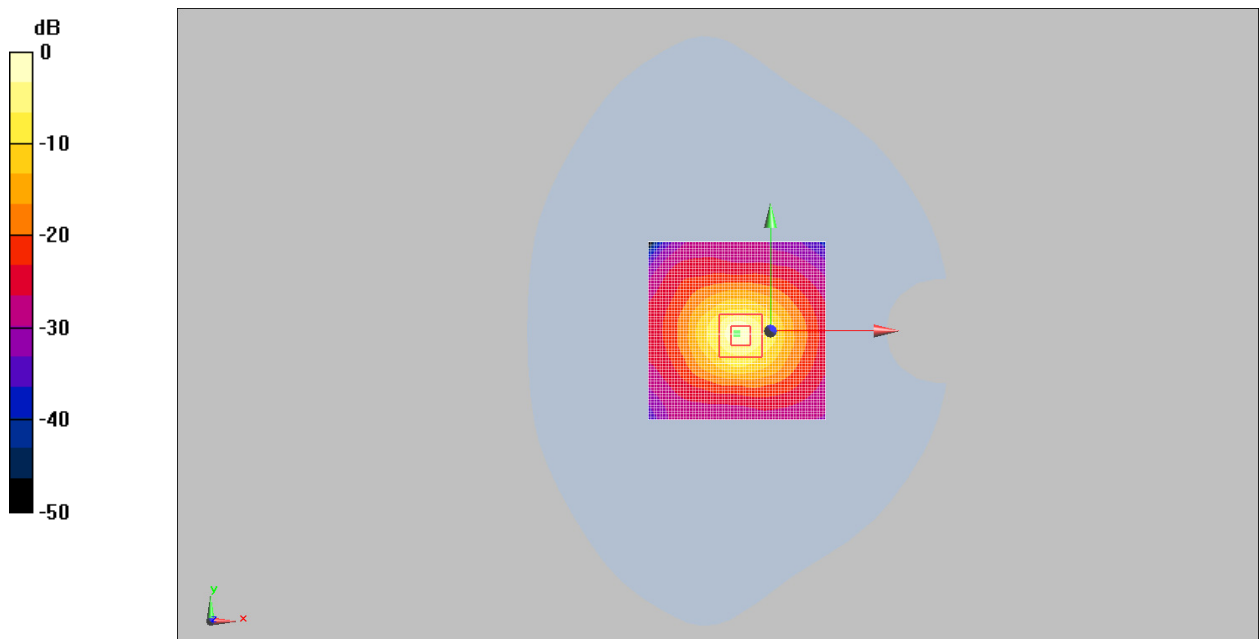

0 dB = 24.7W/Kg

System Performance Check Data (5750MHz Head)

Date: 2018.01.13

Communication System: CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5750$ MHz; $\sigma = 5.35$ S/m; $\epsilon_r = 34.65$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 21.9 Liquid Temperature: 21.0

DASY5 Configuration:

- Probe: EX3DV4 - SN73400; ConvF(4.95, 4.95, 4.95); Calibrated: 2018.01.11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole 5750MHz_250mW /Area Scan (61x61x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 22.1 W/Kg


Dipole 5750MHz_250mW /Zoom Scan (7x7x21)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.2 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 75.3 W/kg

SAR(1 g) = 20.9 W/Kg; SAR(10 g) = 5.89 W/Kg

Maximum value of SAR (measured) = 24.6 W/Kg

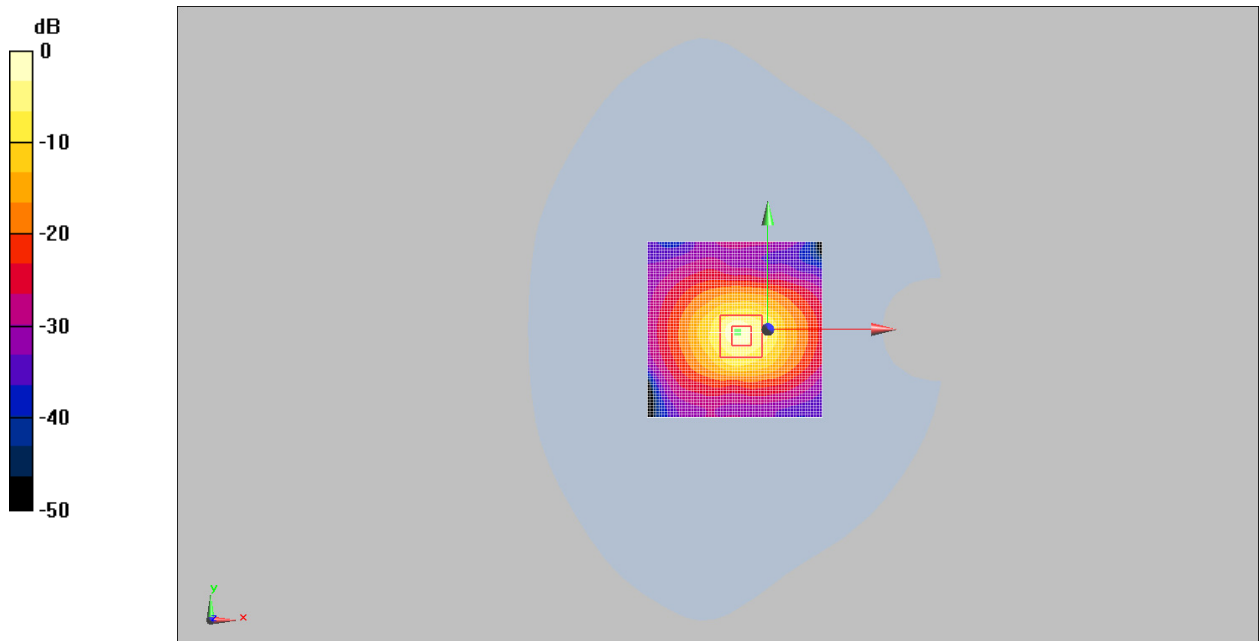

0 dB = 24.6W/Kg

System Performance Check Data (750MHz Body)

Date: 2018.01.24

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.98 \text{ S/m}$; $\epsilon_r = 57.78$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.3 Liquid Temperature: 21.2

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(6.15, 6.15, 6.15); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole 750MHz_250mW /Area Scan (81x161x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.3 W/Kg


Dipole 750MHz_250mW /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 50 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 3.19 W/kg

SAR(1 g) = 2.12 W/Kg; SAR(10 g) = 1.42 W/Kg

Maximum value of SAR (measured) = 2.31 W/Kg

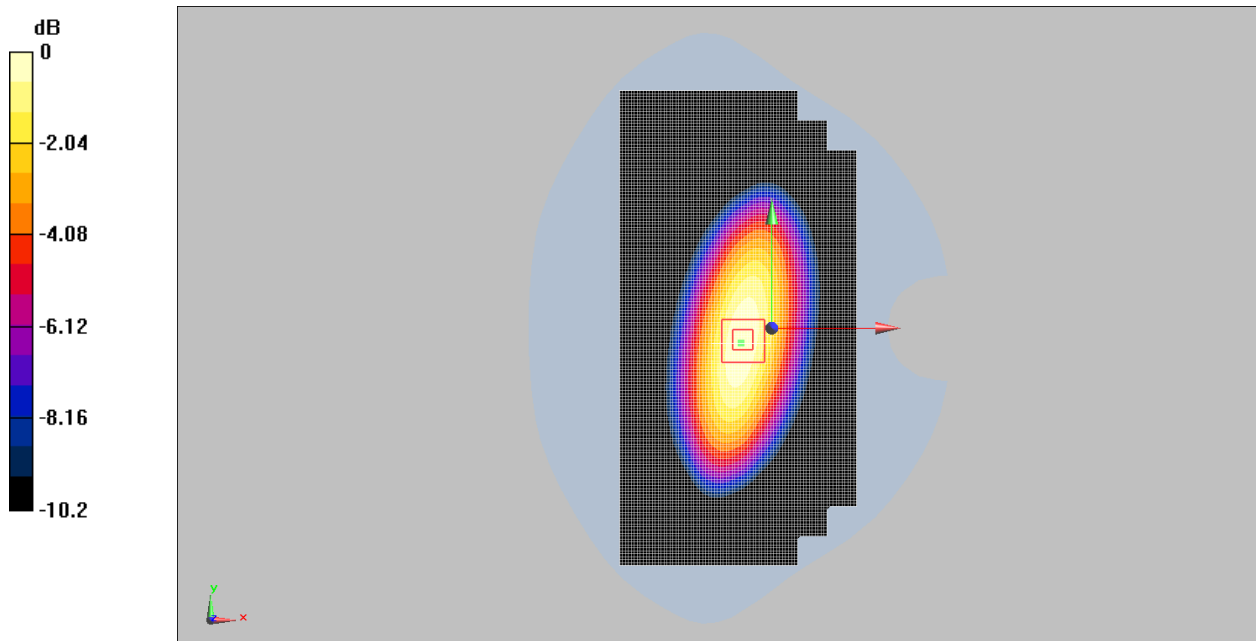

0 dB = 2.31W/Kg

System Performance Check Data (835MHz Body)

Date: 2018.01.02

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.99 \text{ S/m}$; $\epsilon_r = 57.21$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.7 Liquid Temperature: 21.6

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(6.01, 6.01, 6.01); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole 835MHz_250mW /Area Scan (81x161x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.56 W/Kg


Dipole 835MHz_250mW /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 51.2 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.49 W/kg

SAR(1 g) = 2.37 W/Kg; SAR(10 g) = 1.57 W/Kg

Maximum value of SAR (measured) = 2.56 W/Kg

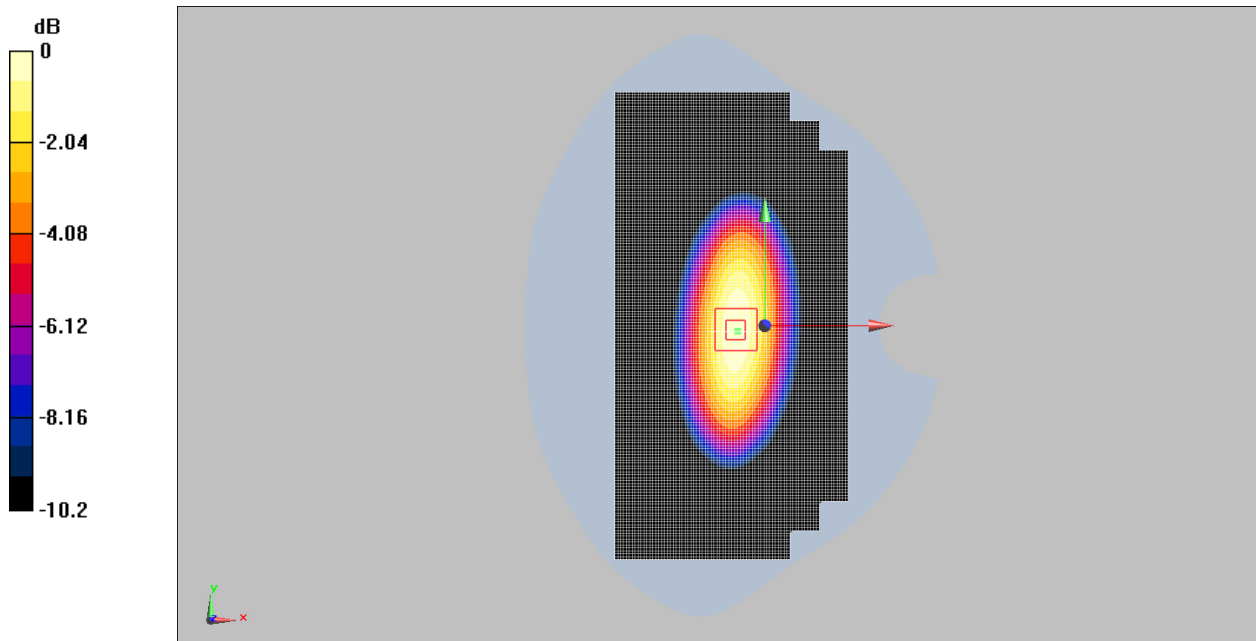

0 dB = 2.56W/Kg

System Performance Check Data (1750MHz Body)

Date: 2018.01.25

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.5$ S/m; $\epsilon_r = 54.84$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.0 Liquid Temperature: 21.1

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(4.87, 4.87, 4.87); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole 1750MHz_250mW /Area Scan (81x81x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 11.1 W/Kg


Dipole 1750MHz_250mW /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86.1 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 17.4 W/kg

SAR(1 g) = 9.78 W/Kg; SAR(10 g) = 5.17 W/Kg

Maximum value of SAR (measured) = 11.1 W/Kg

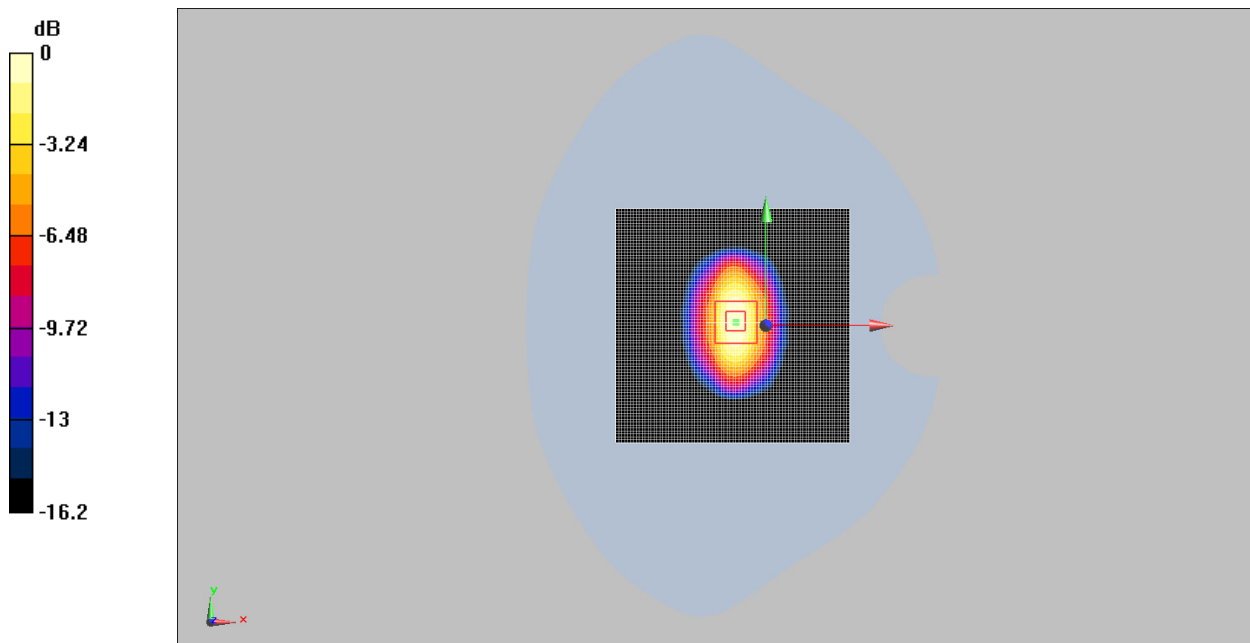

0 dB = 11.1W/Kg

System Performance Check Data (1900MHz Body)

Date: 2018.01.22

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.46 \text{ S/m}$; $\epsilon_r = 55.91$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.3 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(4.61, 4.61, 4.61); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole 1900MHz_250mW /Area Scan (81x81x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 11.4 W/Kg


Dipole 1900MHz_250mW /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 84 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 17.8 W/kg

SAR(1 g) = 10.1 W/Kg; SAR(10 g) = 5.32 W/Kg

Maximum value of SAR (measured) = 11.4 W/Kg

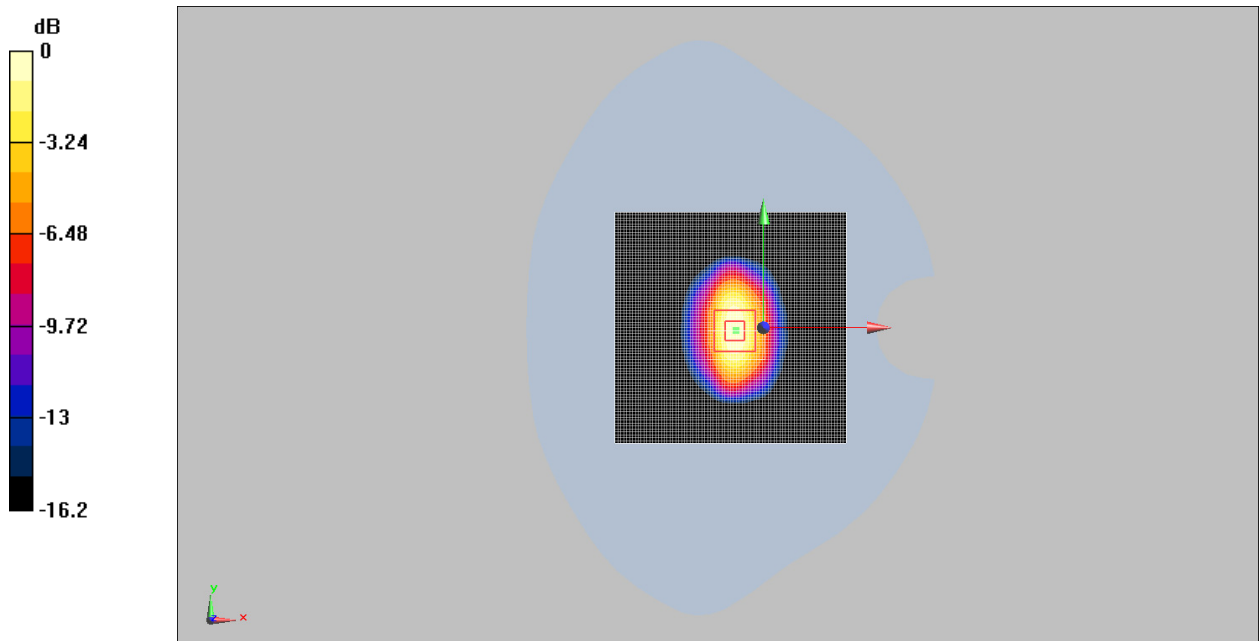

0 dB = 11.4W/Kg

System Performance Check Data (1900MHz Body)

Date: 2018.01.08

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.46 \text{ S/m}$; $\epsilon_r = 55.89$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.2 Liquid Temperature: 21.2

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(4.61, 4.61, 4.61); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole 1900MHz_250mW /Area Scan (81x81x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 11.5 W/Kg


Dipole 1900MHz_250mW /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 84.1 V/m; Power Drift = -0.003 dB

Peak SAR (extrapolated) = 17.9 W/kg

SAR(1 g) = 10.16 W/Kg; SAR(10 g) = 5.35 W/Kg

Maximum value of SAR (measured) = 11.5 W/Kg

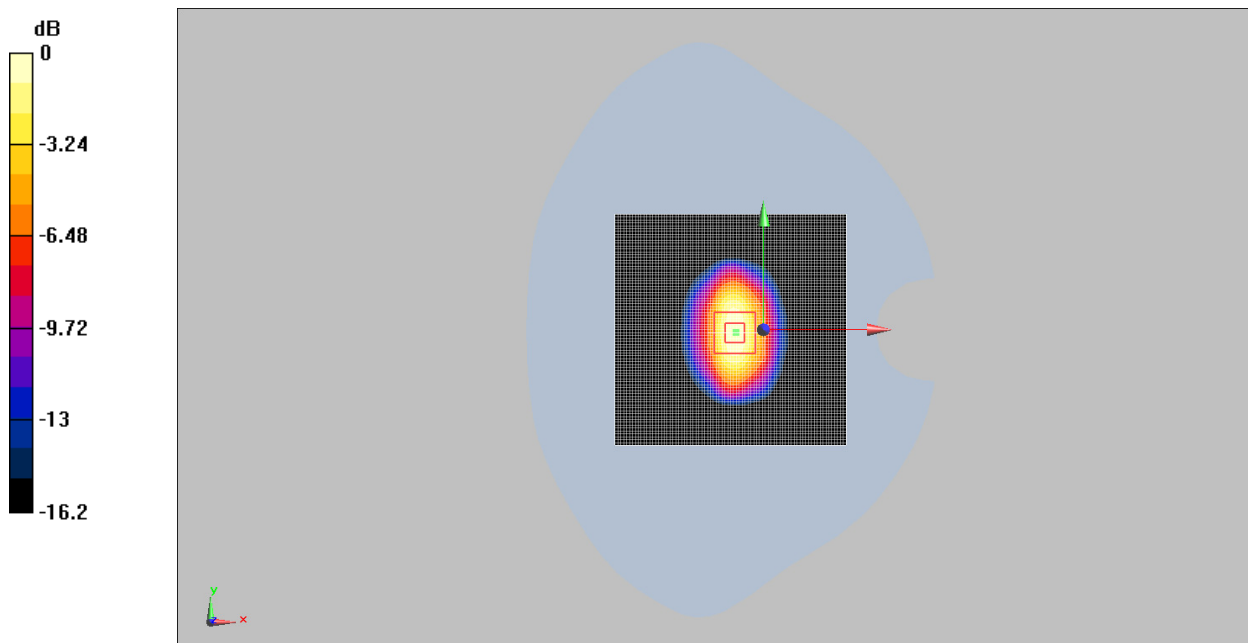

0 dB = 11.5W/Kg

System Performance Check Data (2450MHz Body)

Date: 2018.01.17

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 2.04 \text{ S/m}$; $\epsilon_r = 53.12$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 21.8 Liquid Temperature: 21.7

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(4.23, 4.23, 4.23); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole 2450MHz_250mW /Area Scan (81x81x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 15.6 W/Kg


Dipole 2450MHz_250mW /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 87.9 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 27.9 W/kg

SAR(1 g) = 13.32 W/Kg; SAR(10 g) = 6.17 W/Kg

Maximum value of SAR (measured) = 15.6 W/Kg

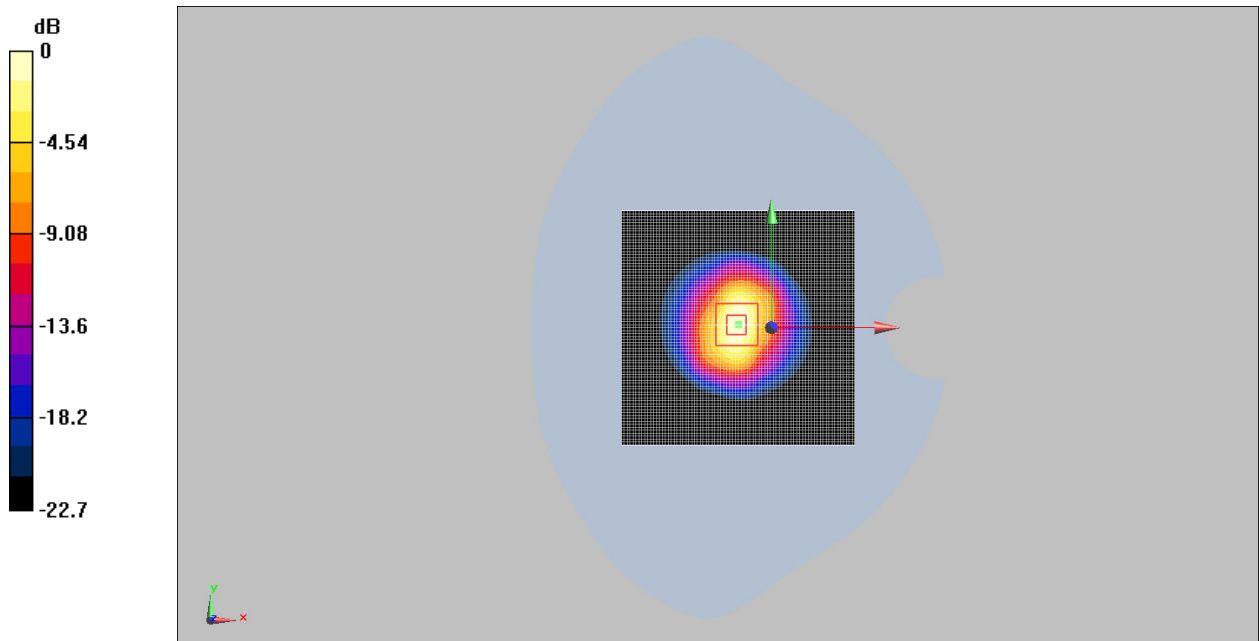

0 dB = 15.6W/Kg

System Performance Check Data (2600MHz Body)

Date: 2018.01.12

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.24$ S/m; $\epsilon_r = 51.72$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.9 Liquid Temperature: 21.8

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(4.12, 4.12, 4.12); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole 2600MHz_250mW /Area Scan (81x81x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 16.5 W/Kg


Dipole 2600MHz_250mW /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86.3 V/m; Power Drift = -0.00638 dB

Peak SAR (extrapolated) = 30.2 W/kg

SAR(1 g) = 14.2 W/Kg; SAR(10 g) = 6.19 W/Kg

Maximum value of SAR (measured) = 16.6 W/Kg

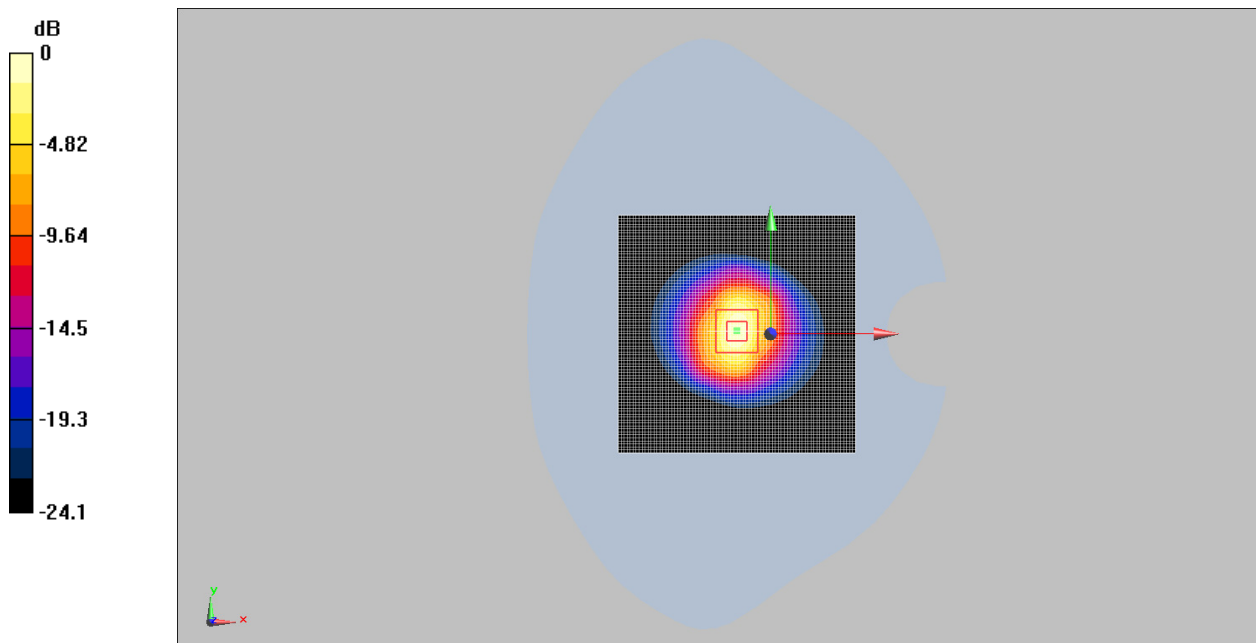

0 dB = 16.6W/Kg

System Performance Check Data (5250MHz Body)

Date: 2018.01.14

Communication System: CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5250 \text{ MHz}$; $\sigma = 5.51 \text{ S/m}$; $\epsilon_r = 47.77$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.5 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(5.16, 5.16, 5.16); Calibrated: 2018.01.11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole 5250MHz_250mW /Area Scan (61x61x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 19.7 W/Kg


Dipole 5250MHz_250mW /Zoom Scan (7x7x21)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 55.2 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 120.5 W/kg

SAR(1 g) = 18.63 W/Kg; SAR(10 g) = 5.22 W/Kg

Maximum value of SAR (measured) = 19.9 W/Kg

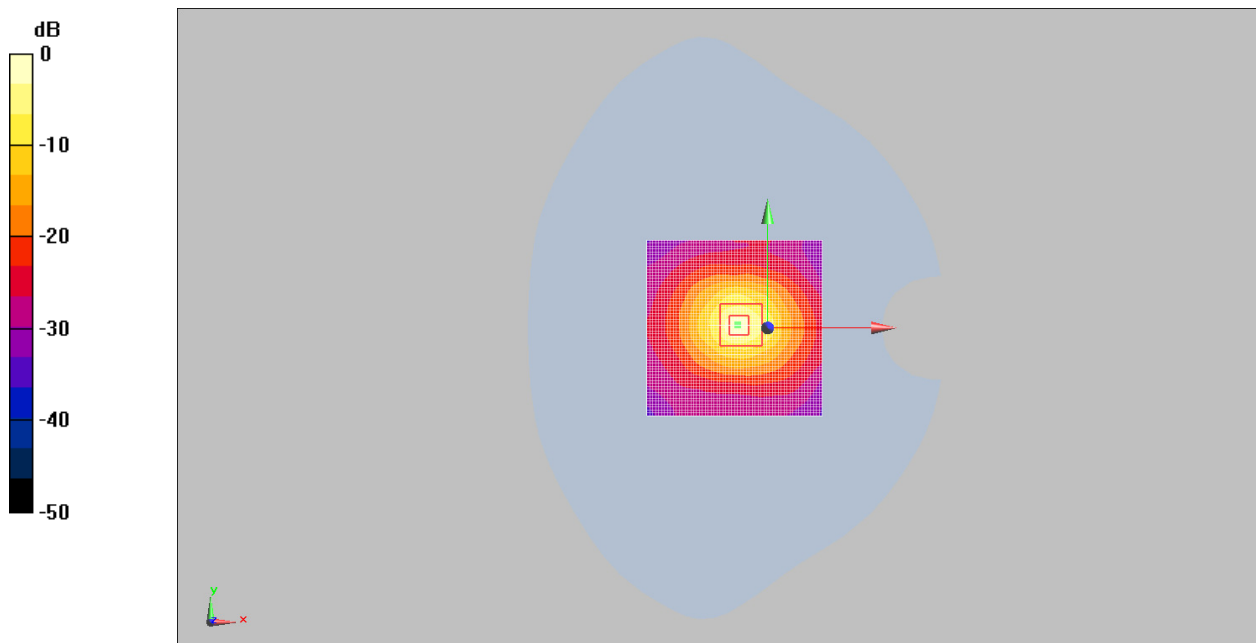

0 dB = 19.9W/Kg

System Performance Check Data (5750MHz Body)

Date: 2018.01.14

Communication System: CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5750 \text{ MHz}$; $\sigma = 6.11 \text{ S/m}$; $\epsilon_r = 46.95$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Ambient Temperature: 22.5 Liquid Temperature: 21.4

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(4.58, 4.58, 4.58); Calibrated: 2018.01.11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Dipole 5750MHz_250mW/Area Scan (61x61x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 23.3 W/Kg


Dipole 5750MHz_250mW /Zoom Scan (7x7x21)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 63.8 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 67.5 W/kg

SAR(1 g) = 19.49 W/Kg; SAR(10 g) = 5.55 W/Kg

Maximum value of SAR (measured) = 24.7 W/Kg

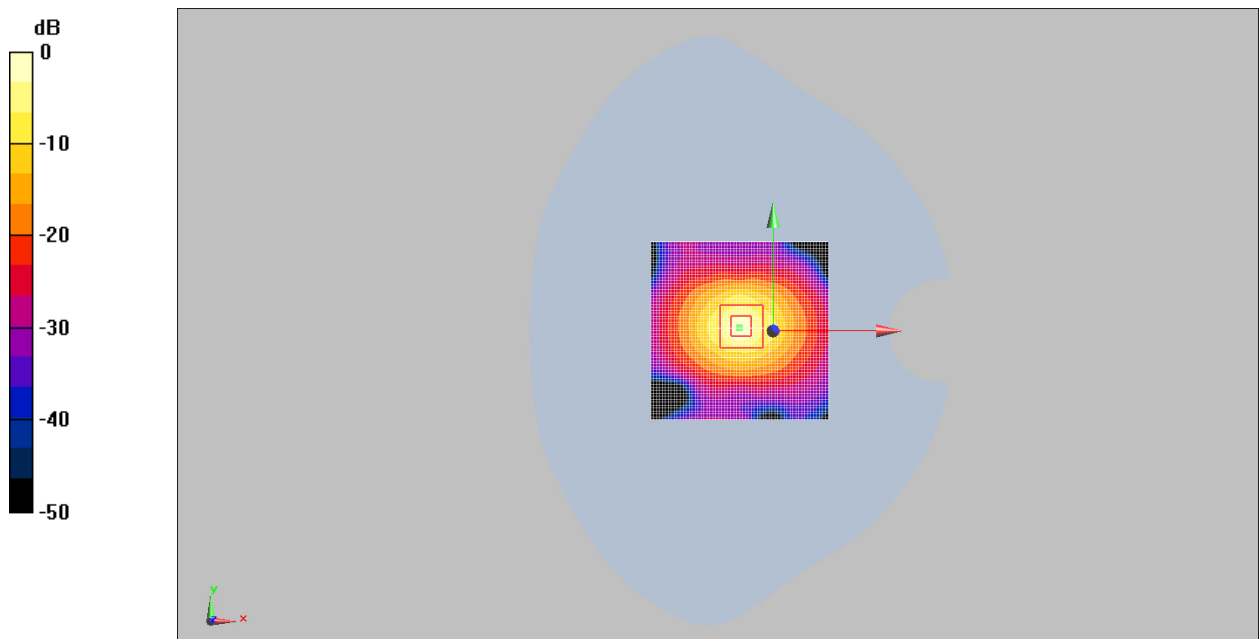

0 dB = 24.7W/Kg

ANNEX C TEST DATA

MEAS. 1 Right Head with Cheek on Middle Channel in GSM 850 mode

Date: 2017.12.26

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(6.1, 6.1, 6.1); Calibrated: 2017.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch190/Area Scan (111x211x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.183 W/Kg


Ch190/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.09 V/m; Power Drift = 0.196 dB

Peak SAR (extrapolated) = 0.220 W/kg

SAR(1 g) = 0.176 W/Kg; SAR(10 g) = 0.136 W/Kg

Maximum value of SAR (measured) = 0.184 W/Kg

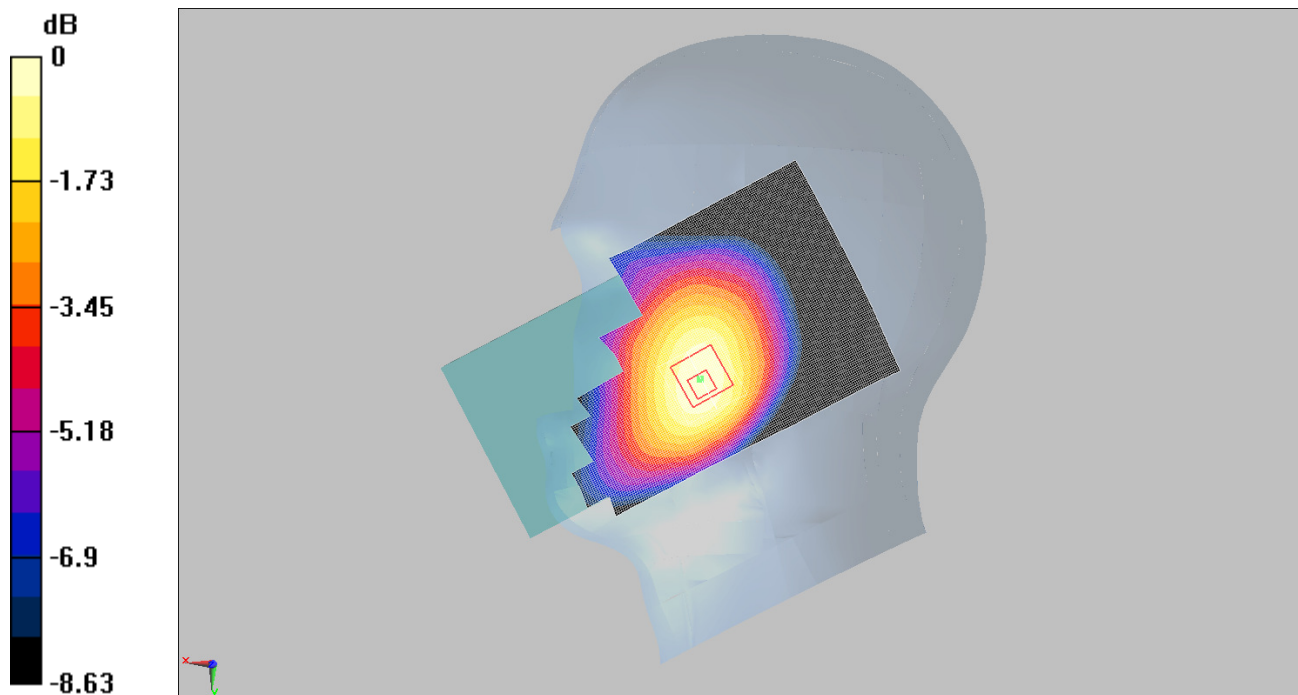

0 dB = 0.184W/Kg

MEAS. 2 Body Plan with Front Side 10mm on Middle Channel in GSM 850 mode

Date: 2018.01.02

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(6.01, 6.01, 6.01); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch190/Area Scan (111x231x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.450 W/Kg


Ch190/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.5 V/m; Power Drift = 0.00142 dB

Peak SAR (extrapolated) = 0.632 W/kg

SAR(1 g) = 0.408 W/Kg; SAR(10 g) = 0.260 W/Kg

Maximum value of SAR (measured) = 0.444 W/Kg

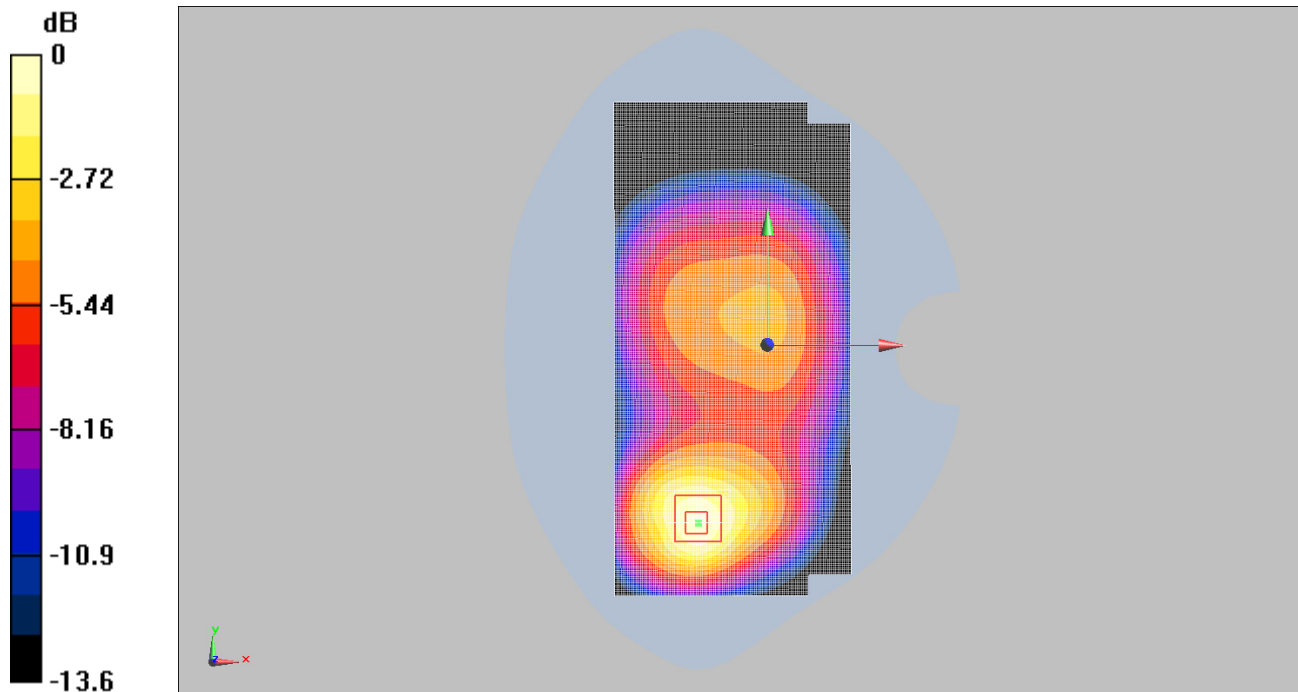

0 dB = 0.444W/Kg

MEAS. 3 Body Plan with Front Side 10mm on Middle Channel in GPRS 850(4TX) mode

Date: 2018.01.02

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:2

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(6.01, 6.01, 6.01); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch190/Area Scan (111x231x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.571 W/Kg


Ch190/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.6 V/m; Power Drift = 0.032 dB

Peak SAR (extrapolated) = 0.799 W/kg

SAR(1 g) = 0.522 W/Kg; SAR(10 g) = 0.333 W/Kg

Maximum value of SAR (measured) = 0.568 W/Kg

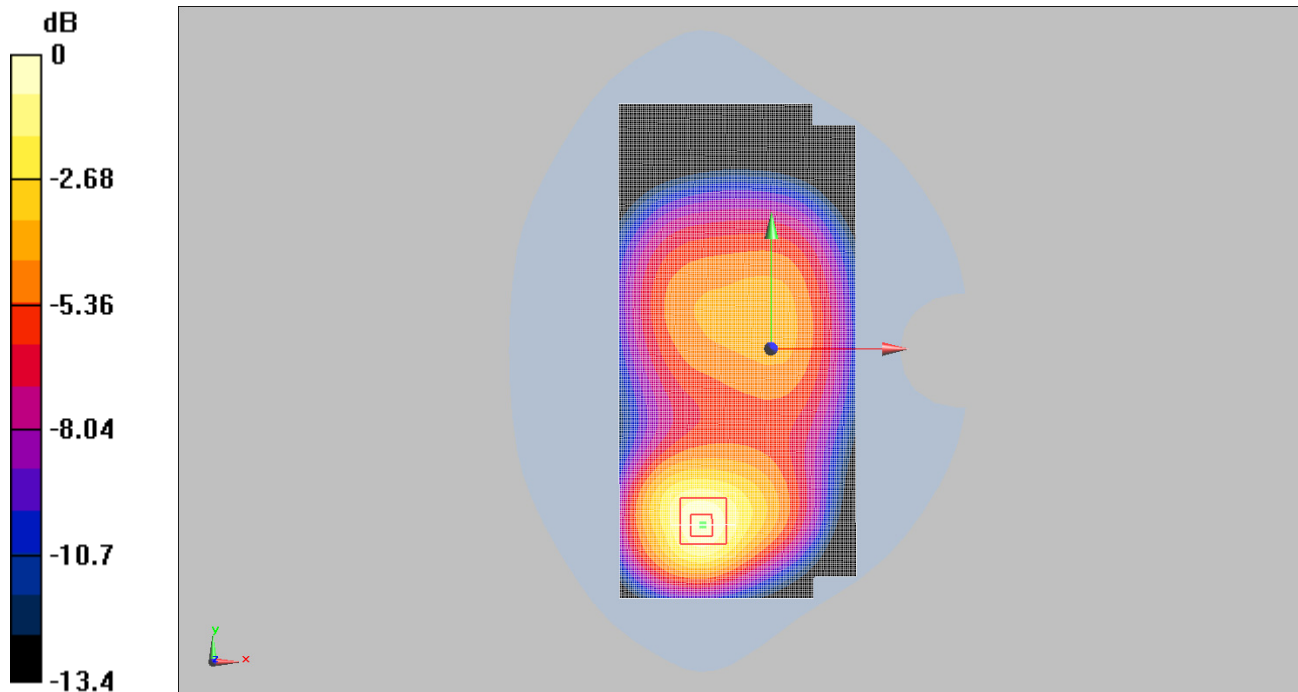

0 dB = 0.568W/Kg

MEAS. 4 Left Head with Cheek on Middle Channel in GSM 1900 mode

Date: 2018.01.03

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(4.87, 4.87, 4.87); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch661/Area Scan (111x211x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.089 W/Kg


Ch661/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.31 V/m; Power Drift = 0.182 dB

Peak SAR (extrapolated) = 0.124 W/kg

SAR(1 g) = 0.080 W/Kg; SAR(10 g) = 0.049 W/Kg

Maximum value of SAR (measured) = 0.088 W/Kg

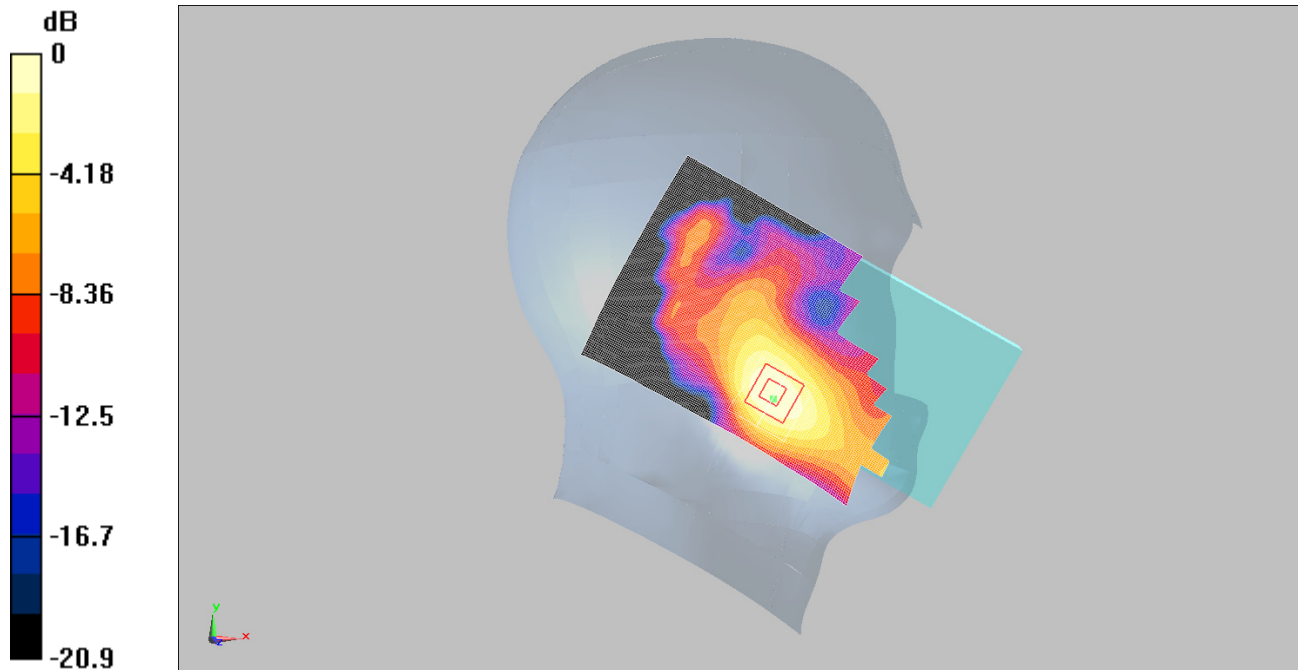

0 dB = 0.088W/Kg

MEAS. 5 Body Plan with Front Side 10mm on Middle Channel in GSM 1900 mode

Date: 2018.01.22

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.57$ S/m; $\epsilon_r = 51.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(4.61, 4.61, 4.61); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch661/Area Scan (111x231x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.567 W/Kg


Ch661/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.41 V/m; Power Drift = 0.061 dB

Peak SAR (extrapolated) = 0.830 W/kg

SAR(1 g) = 0.500 W/Kg; SAR(10 g) = 0.275 W/Kg

Maximum value of SAR (measured) = 0.563 W/Kg

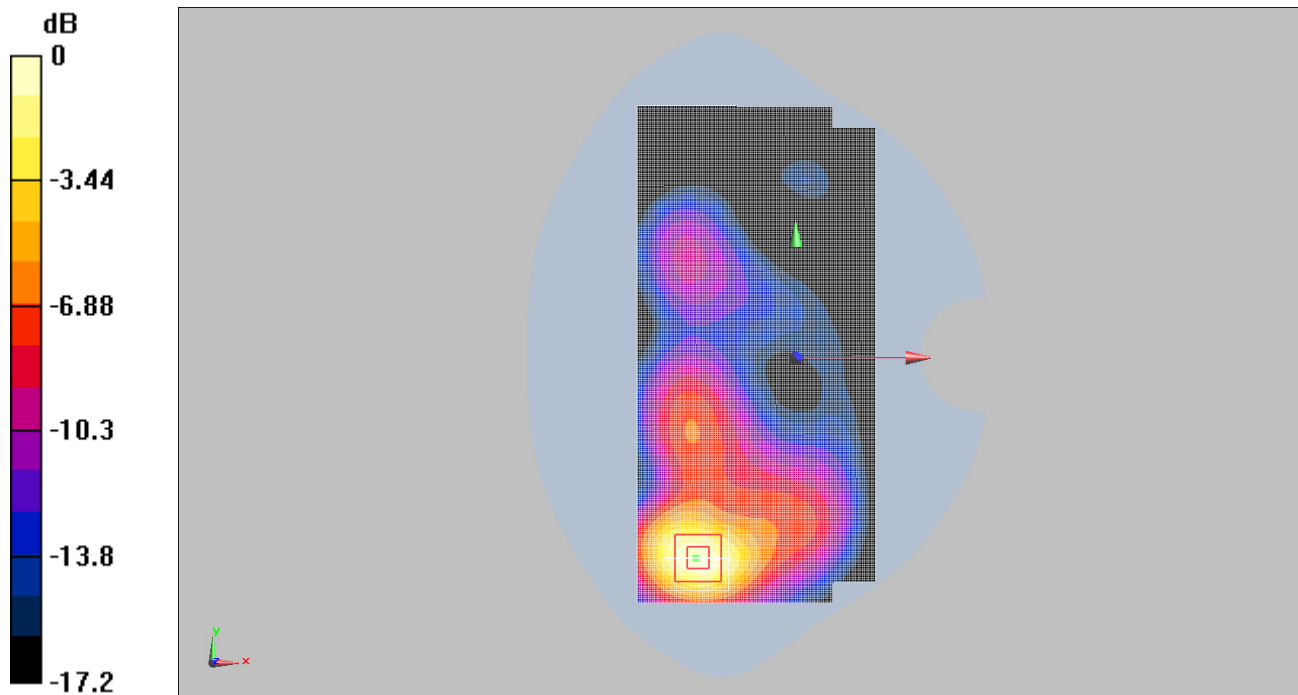

0 dB = 0.563W/Kg

MEAS. 6 Body Plan with Front Side 10mm on High Channel in GPRS 1900(4TX) mode

Date: 2018.01.22

Communication System: GSM1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.6$ S/m; $\epsilon_r = 51$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(4.61, 4.61, 4.61); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch810/Area Scan (111x231x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.24 W/Kg


Ch810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.66 V/m; Power Drift = 0.067 dB

Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 1.1 W/Kg; SAR(10 g) = 0.604 W/Kg

Maximum value of SAR (measured) = 1.24 W/Kg

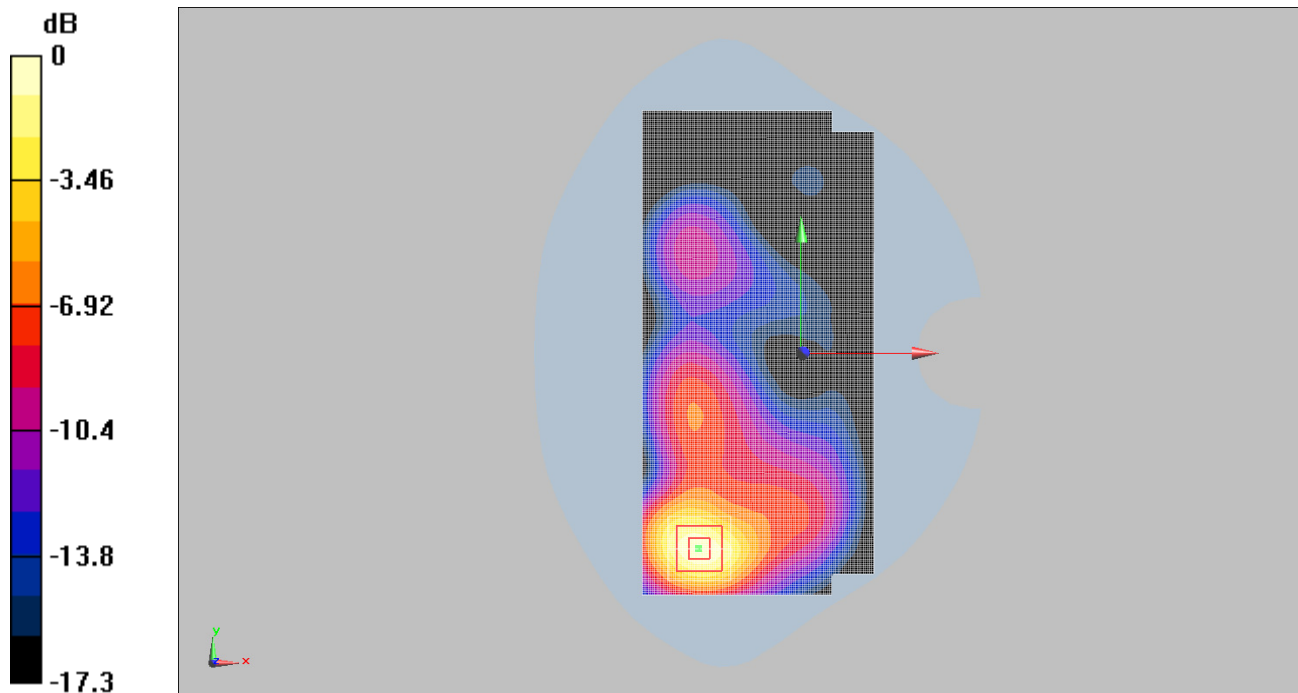

0 dB = 1.24W/Kg

MEAS. 7 Left Head with Cheek on Middle Channel in WCDMA Band 2 mode

Date: 2018.01.03

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 1880$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(4.87, 4.87, 4.87); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch9400/Area Scan (111x211x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.126 W/Kg


Ch9400/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.3 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 0.175 W/kg

SAR(1 g) = 0.114 W/Kg; SAR(10 g) = 0.069 W/Kg

Maximum value of SAR (measured) = 0.126 W/Kg

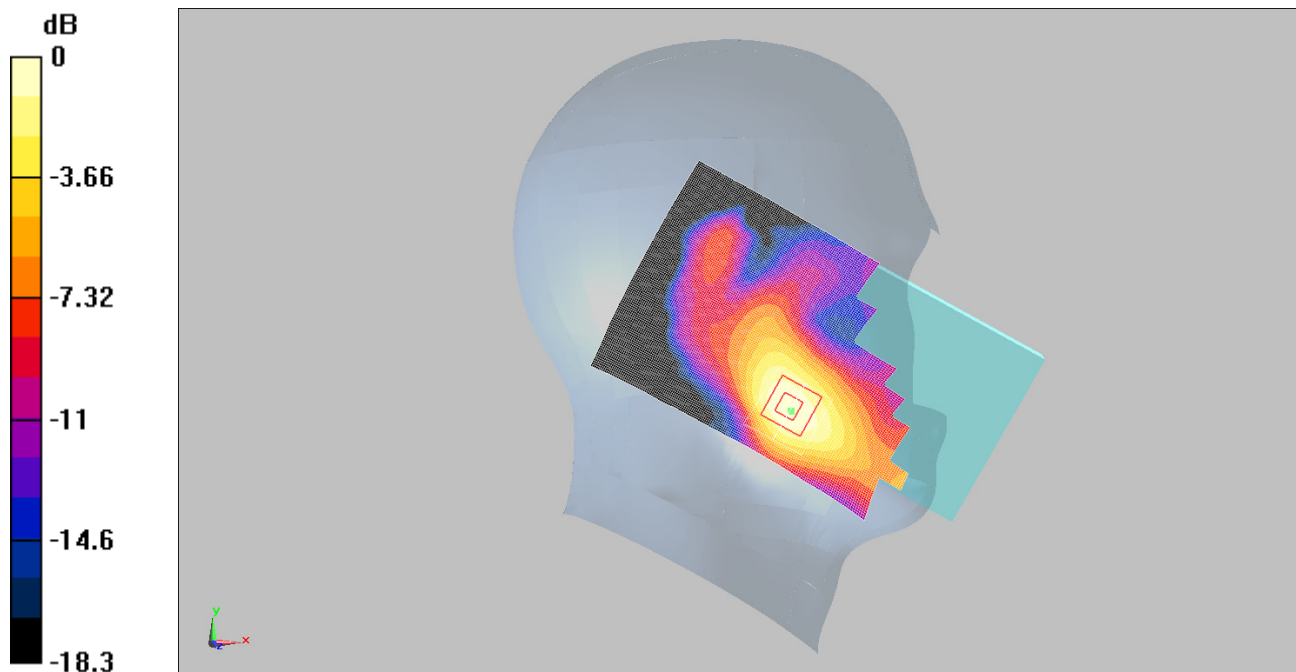

0 dB = 0.126W/Kg

MEAS. 8 Body Plan with Front Side 10mm on High Channel in WCDMA Band 2 mode

Date: 2018.01.22

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.59$ S/m; $\epsilon_r = 51$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(4.61, 4.61, 4.61); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch9538/Area Scan (111x231x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.952 W/Kg


Ch9538/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.43 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.852 W/Kg; SAR(10 g) = 0.467 W/Kg

Maximum value of SAR (measured) = 0.961 W/Kg

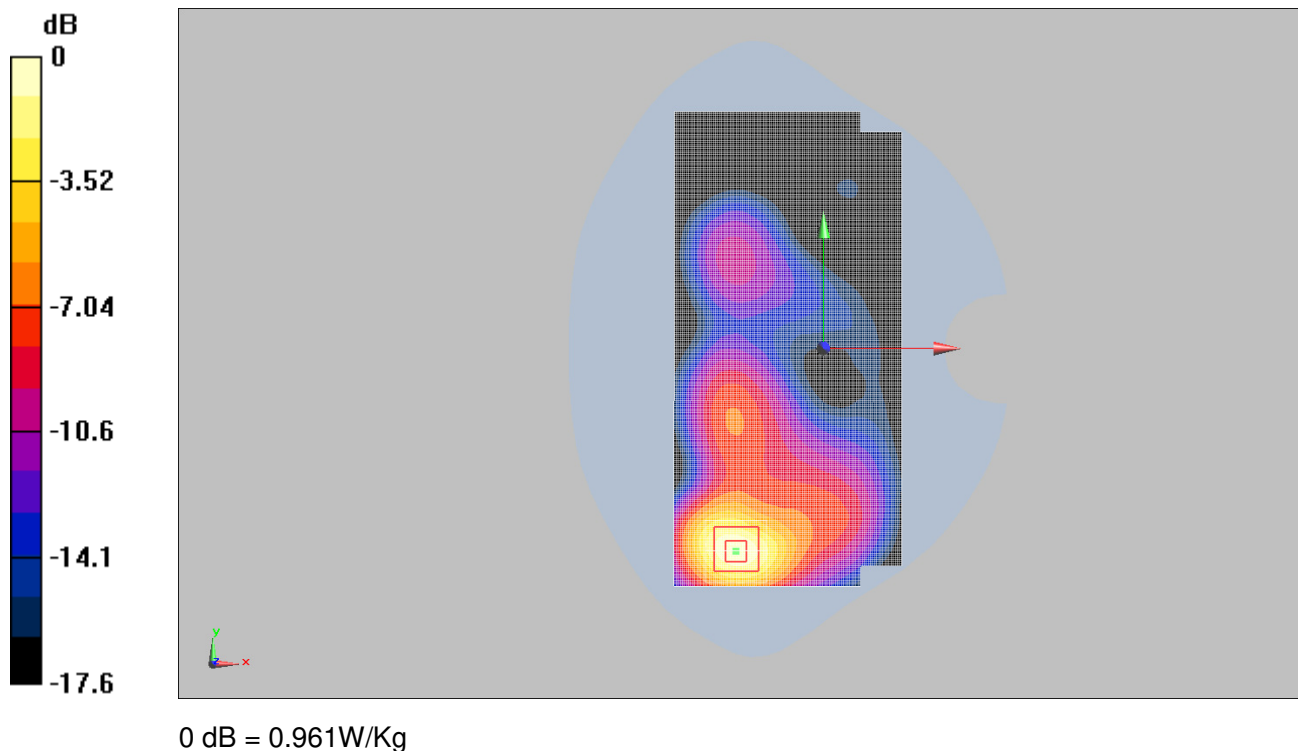

MEAS. 9 Right Head with Cheek on Middle Channel in WCDMA Band 5 mode

Date: 2017.12.26

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(6.1, 6.1, 6.1); Calibrated: 2017.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch4182/Area Scan (111x211x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.179 W/Kg


Ch4182/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.2 V/m; Power Drift = -0.190 dB

Peak SAR (extrapolated) = 0.208 W/kg

SAR(1 g) = 0.171 W/Kg; SAR(10 g) = 0.133 W/Kg

Maximum value of SAR (measured) = 0.178 W/Kg

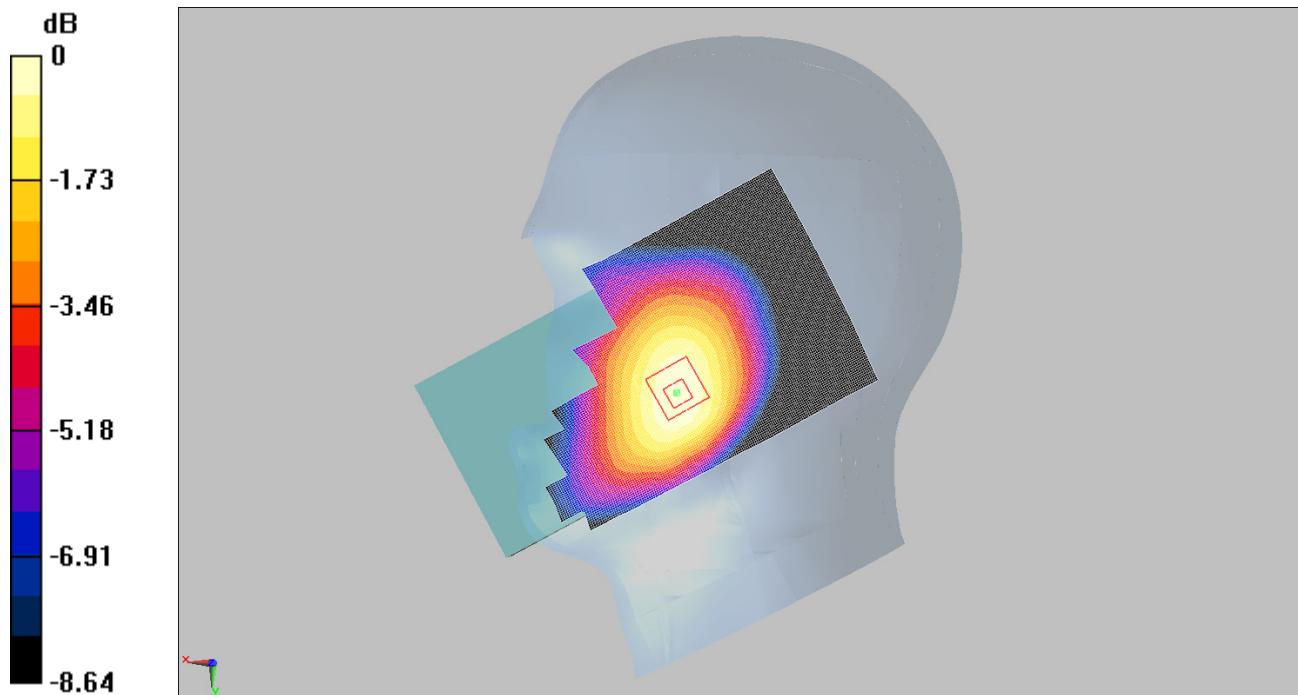

0 dB = 0.178W/Kg

MEAS. 10 Body Plan with Front Side 10mm on Middle Channel in WCDMA Band 5 mode

Date: 2018.01.02

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(6.01, 6.01, 6.01); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch4182/Area Scan (111x231x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.429 W/Kg


Ch4182/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.6 V/m; Power Drift = 0.089 dB

Peak SAR (extrapolated) = 0.618 W/kg

SAR(1 g) = 0.398 W/Kg; SAR(10 g) = 0.254 W/Kg

Maximum value of SAR (measured) = 0.428 W/Kg

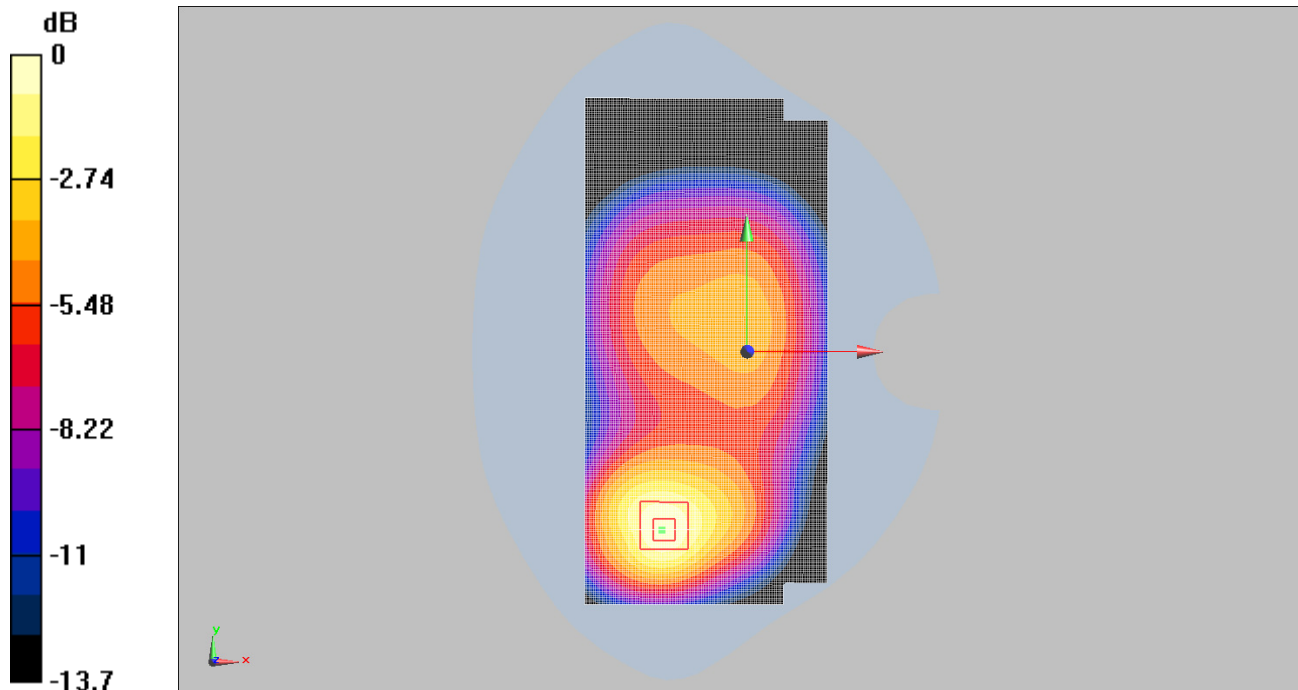

0 dB = 0.428W/Kg

MEAS. 11 Left Head with Cheek on Middle Channel in EVDO BC0 mode

Date: 2017.12.26

Communication System: CDMA Cellular; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(6.1, 6.1, 6.1); Calibrated: 2017.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch384/Area Scan (111x211x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.221 W/Kg


Ch384/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.59 V/m; Power Drift = 0.104 dB

Peak SAR (extrapolated) = 0.261 W/kg

SAR(1 g) = 0.209 W/Kg; SAR(10 g) = 0.162 W/Kg

Maximum value of SAR (measured) = 0.219 W/Kg

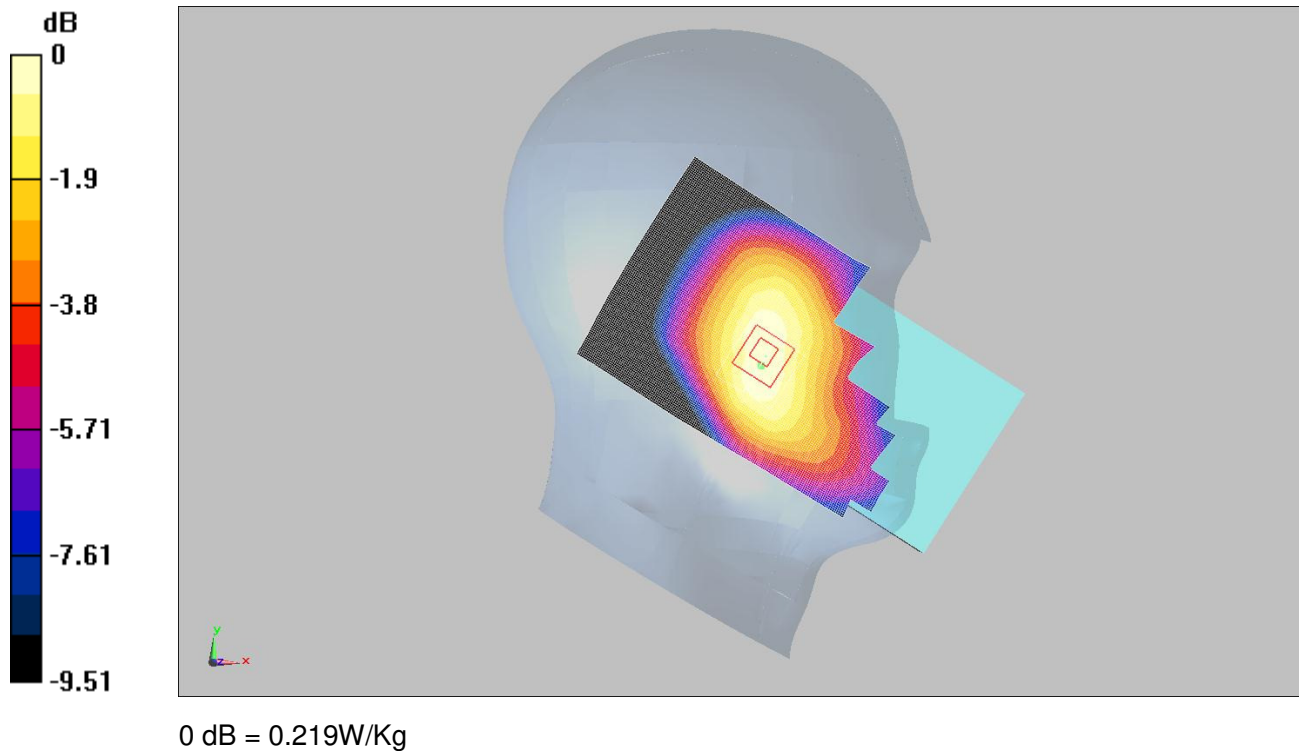

MEAS. 12 Body Plan with Front Side 10mm on Middle Channel in EVDO BC0 mode

Date: 2018.01.02

Communication System: CDMA Cellular; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(6.01, 6.01, 6.01); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch384/Area Scan (111x231x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.526 W/Kg


Ch384/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.2 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 0.747 W/kg

SAR(1 g) = 0.482 W/Kg; SAR(10 g) = 0.307 W/Kg

Maximum value of SAR (measured) = 0.520 W/Kg

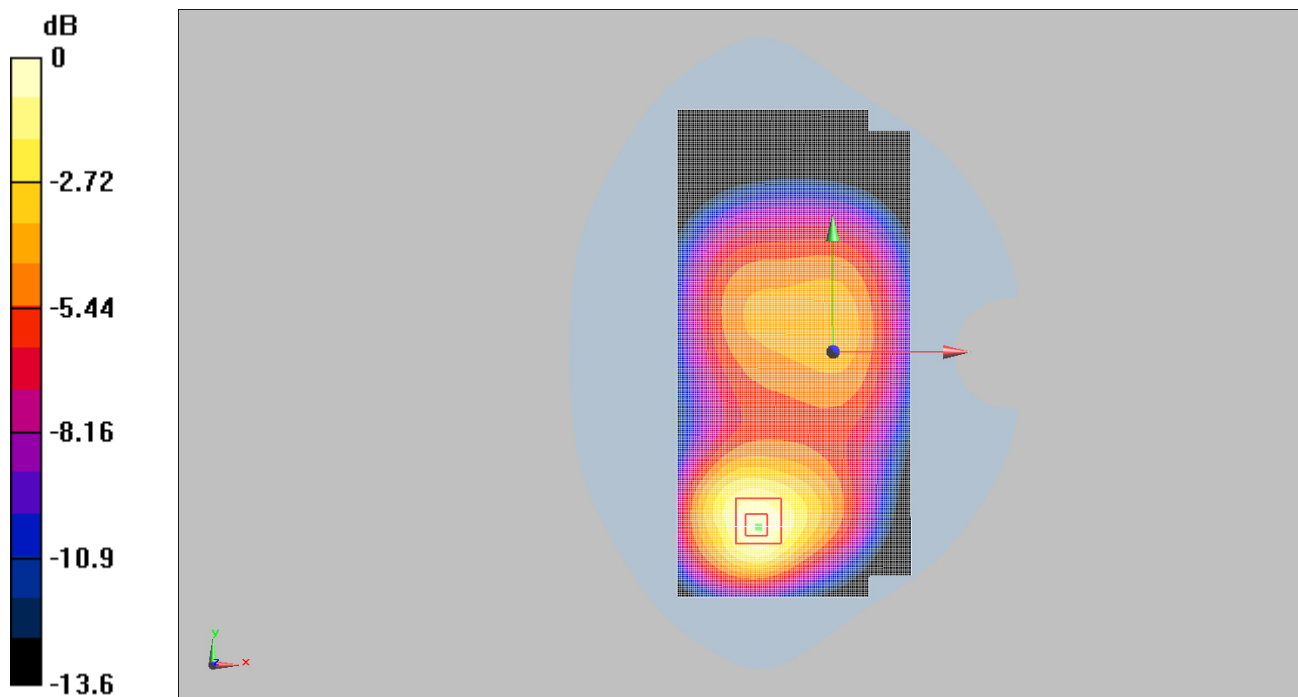

0 dB = 0.520W/Kg

MEAS. 13 Left Head with Cheek on Middle Channel in LTE Band 2 mode

Date: 2018.01.03

Communication System: LTE Band 2; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(4.87, 4.87, 4.87); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch18900/Area Scan (111x211x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.139 W/Kg


Ch18900/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.83 V/m; Power Drift = 0.186 dB

Peak SAR (extrapolated) = 0.188 W/kg

SAR(1 g) = 0.122 W/Kg; SAR(10 g) = 0.074 W/Kg

Maximum value of SAR (measured) = 0.137 W/Kg

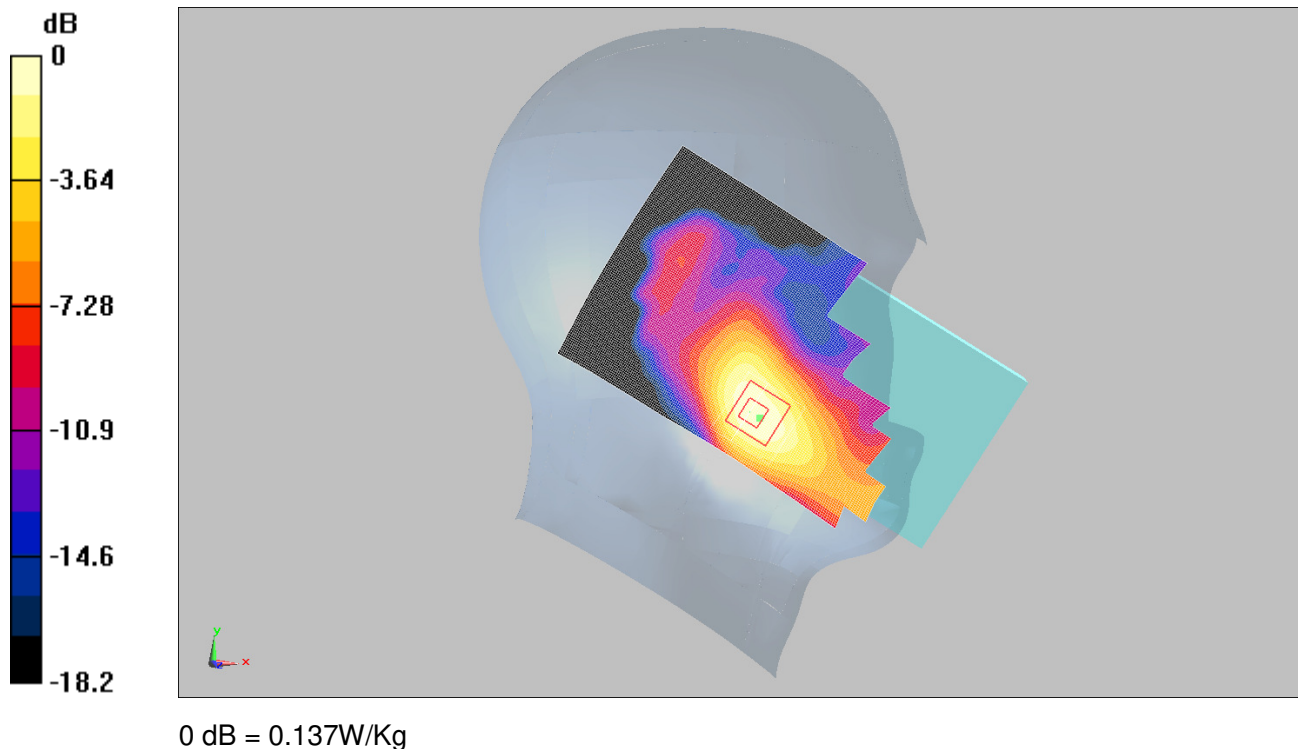

MEAS. 14 Body Plan with Front Side 10mm on High Channel in LTE Band 2 mode

Date: 2018.01.08

Communication System: LTE Band 2; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.57$ S/m; $\epsilon_r = 51.01$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(4.61, 4.61, 4.61); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch19100/Area Scan (111x231x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.887 W/Kg


Ch19100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.03 V/m; Power Drift = -0.039 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.858 W/Kg; SAR(10 g) = 0.469 W/Kg

Maximum value of SAR (measured) = 0.942 W/Kg

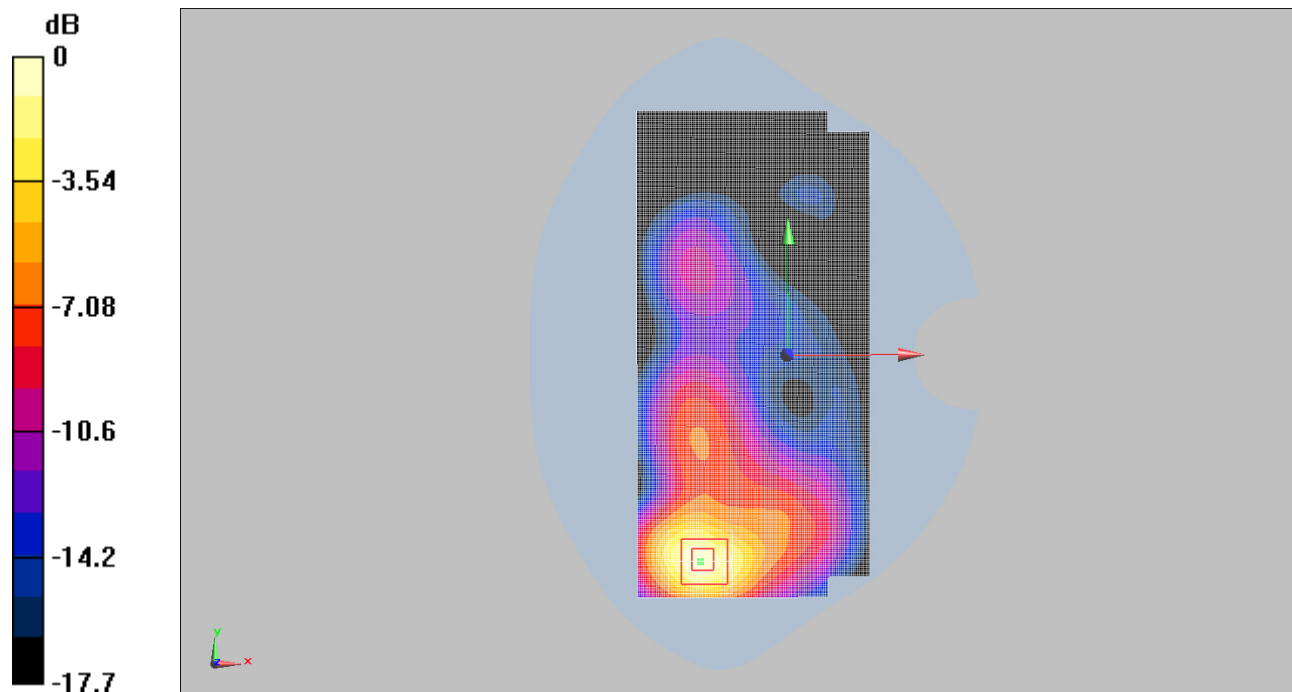

0 dB = 0.942W/Kg

MEAS. 15 Left Head with Cheek on Middle Channel in LTE Band 4 mode

Date: 2018.01.23

Communication System: LTE Band 4; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.3$ S/m; $\epsilon_r = 40.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(5.17, 5.17, 5.17); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch20175/Area Scan (111x211x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.094 W/Kg


Ch20175/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.87 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 0.140 W/kg

SAR(1 g) = 0.090 W/Kg; SAR(10 g) = 0.055 W/Kg

Maximum value of SAR (measured) = 0.097 W/Kg

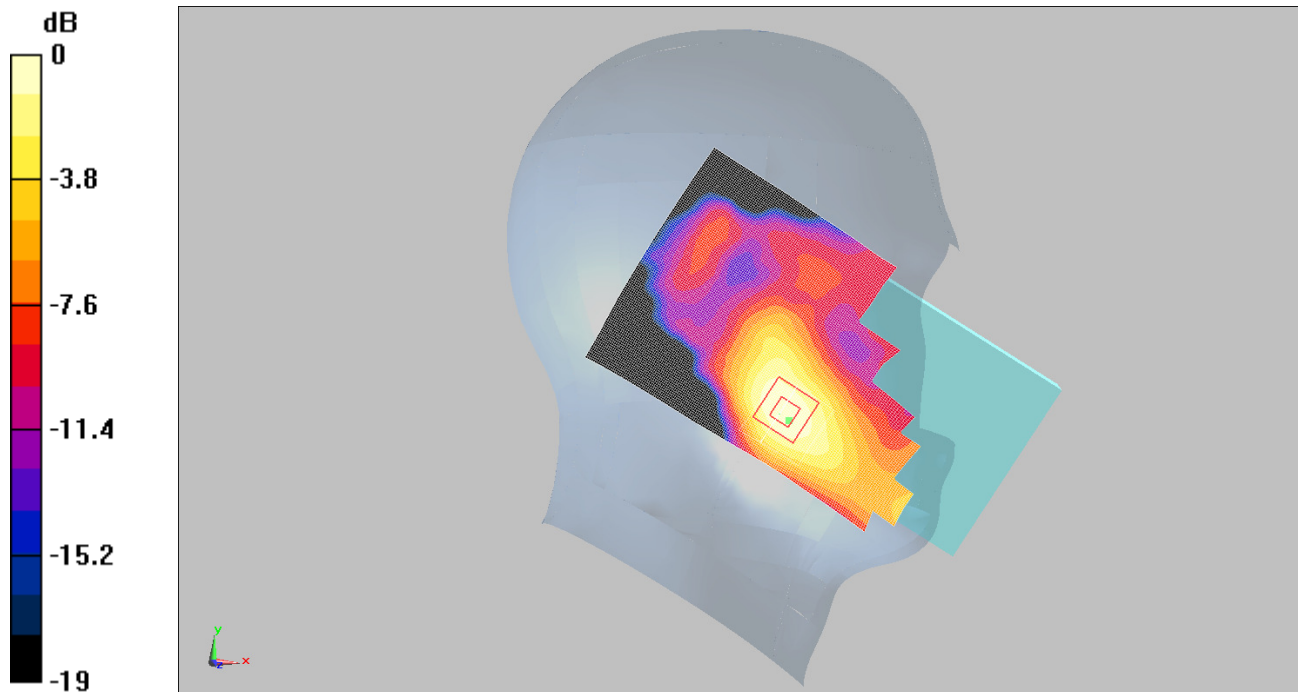

0 dB = 0.097W/Kg

MEAS. 14 Body Plan with Front Side 10mm on Low Channel in LTE Band 4 mode \

Date: 2018.01.16

Communication System: LTE Band 4; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1720$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(4.87, 4.87, 4.87); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch20050/Area Scan (111x231x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.06 W/Kg


Ch20050/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.75 V/m; Power Drift = 0.140 dB

Peak SAR (extrapolated) = 1.5 W/kg

SAR(1 g) = 0.889 W/Kg; SAR(10 g) = 0.486 W/Kg

Maximum value of SAR (measured) = 0.996 W/Kg

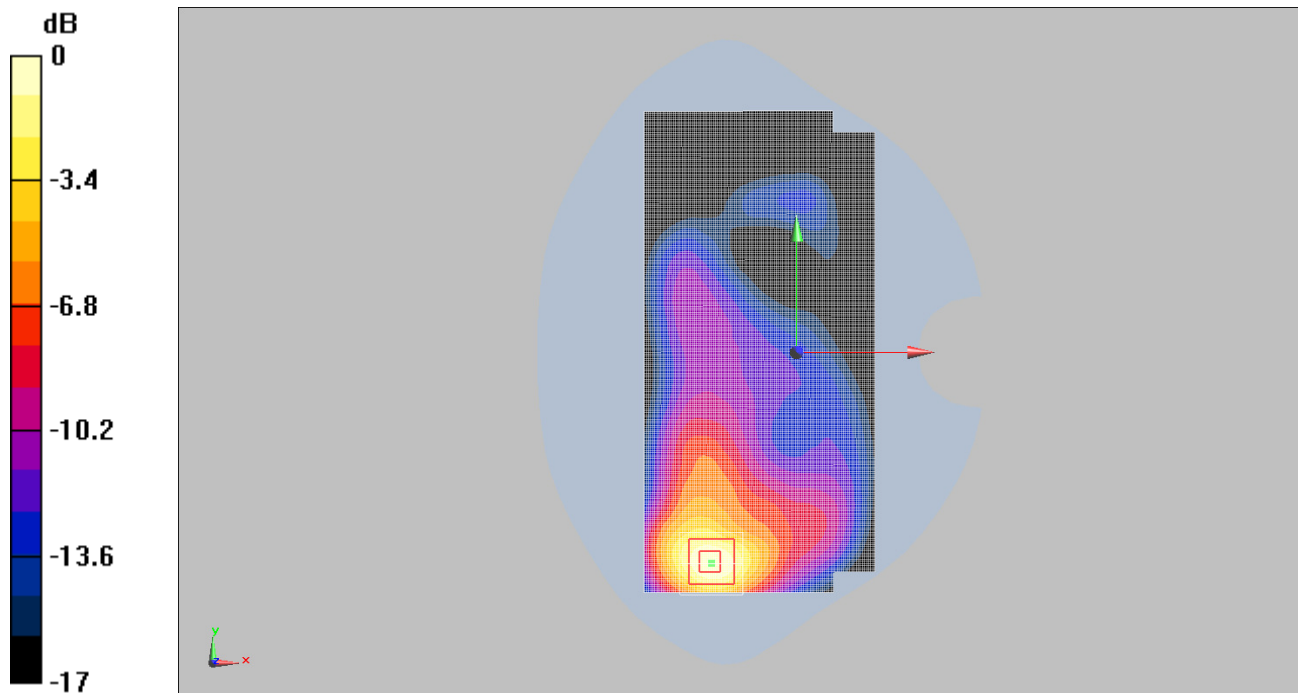

0 dB = 0.996W/Kg

MEAS. 17 Right Head with Cheek on Middle Channel in LTE Band 5 mode

Date: 2017.12.27

Communication System: LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(6.1, 6.1, 6.1); Calibrated: 2017.08.02;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1859; Type: QD000P40CD; Serial: TP1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch 20525/Area Scan (111x211x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.189 W/Kg


Ch 20525/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.69 V/m; Power Drift = 0.081 dB

Peak SAR (extrapolated) = 0.236 W/kg

SAR(1 g) = 0.192 W/Kg; SAR(10 g) = 0.146 W/Kg

Maximum value of SAR (measured) = 0.202 W/Kg

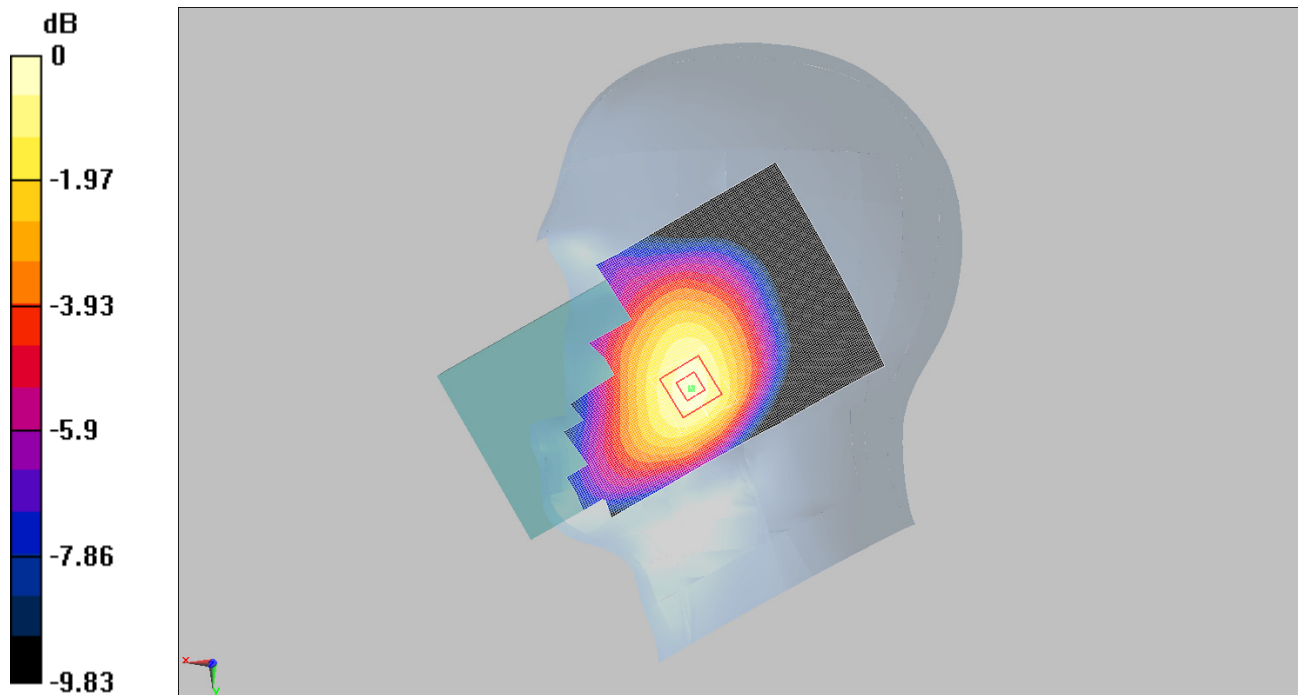

0 dB = 0.202W/Kg

MEAS. 18 Body Plan with Front Side 10mm on Middle Channel in LTE Band 5 mode

Date: 2018.01.02

Communication System: LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(6.01, 6.01, 6.01); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch 20525/Area Scan (111x231x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.598 W/Kg


Ch 20525/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11 V/m; Power Drift = 0.00749 dB

Peak SAR (extrapolated) = 0.864 W/kg

SAR(1 g) = 0.546 W/Kg; SAR(10 g) = 0.343 W/Kg

Maximum value of SAR (measured) = 0.597 W/Kg

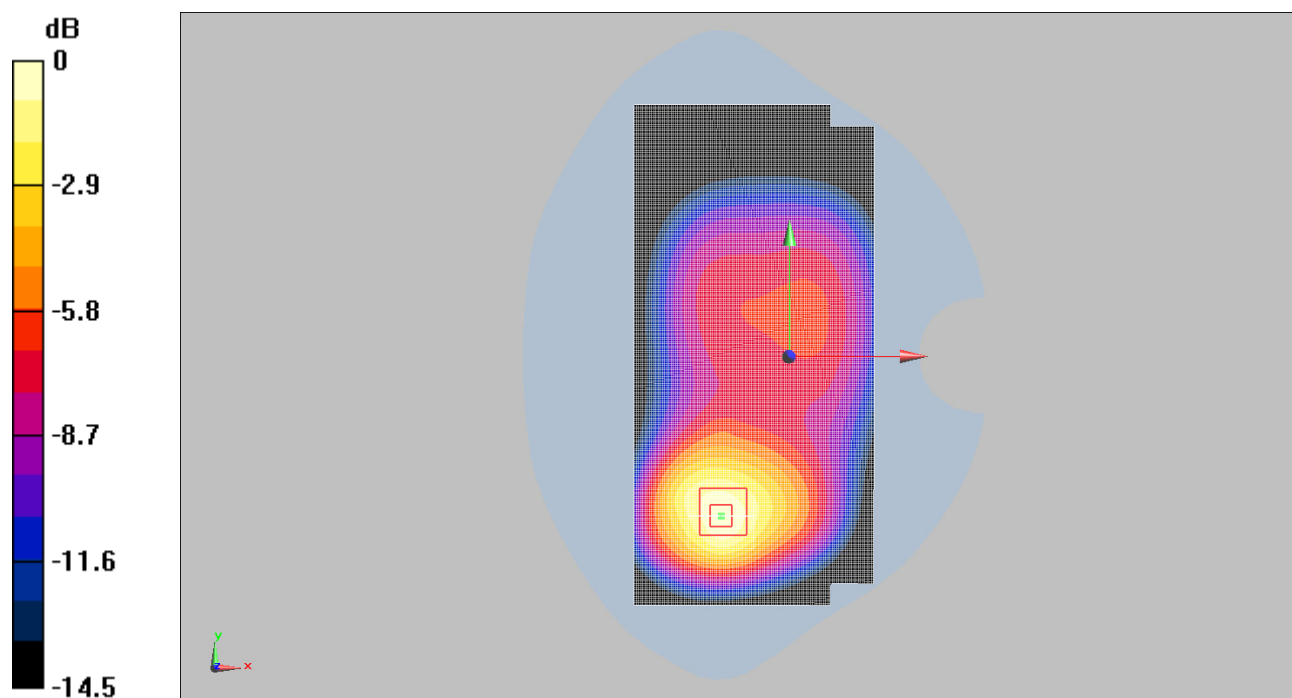

0 dB = 0.597W/Kg

MEAS. 19 Left Head with Cheek on Middle Channel in LTE Band 7 mode

Date: 2018.01.10

Communication System: LTE Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(4.4, 4.4, 4.4); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch21100/Area Scan (111x211x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.144 W/Kg


Ch21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.71 V/m; Power Drift = -0.083 dB

Peak SAR (extrapolated) = 0.248 W/kg

SAR(1 g) = 0.129 W/Kg; SAR(10 g) = 0.066 W/Kg

Maximum value of SAR (measured) = 0.144 W/Kg

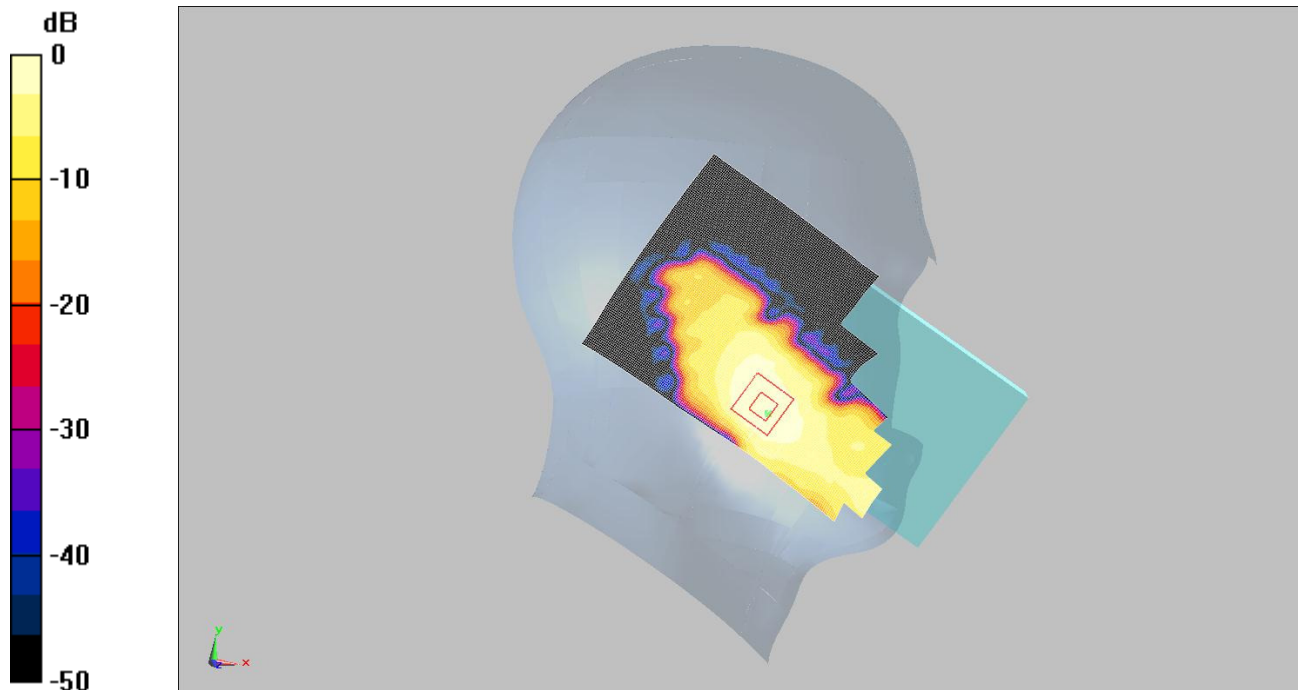

0 dB = 0.144W/Kg

MEAS. 14 Body Plan with Front Side 10mm on High Channel in LTE Band 7 mode

Date: 2018.01.12

Communication System: LTE Band 7; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2535$ MHz; $\sigma = 2.14$ S/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(4.23, 4.23, 4.23); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch21100/Area Scan (111x231x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.408 W/Kg


Ch21100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.06 V/m; Power Drift = 0.106 dB

Peak SAR (extrapolated) = 0.709 W/kg

SAR(1 g) = 0.364 W/Kg; SAR(10 g) = 0.182 W/Kg

Maximum value of SAR (measured) = 0.404 W/Kg

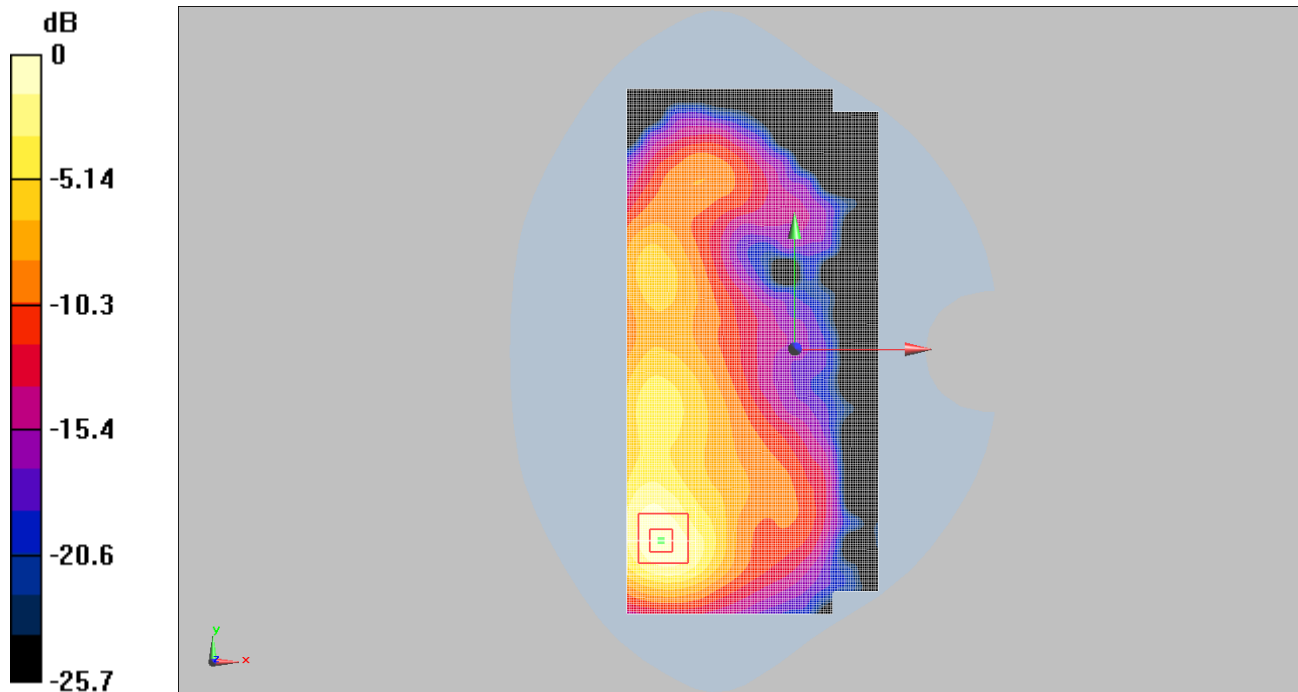

0 dB = 0.404W/Kg

MEAS. 21 Right Head with Cheek on Middle Channel in LTE Band 17 mode

Date: 2018.01.25

Communication System: LTE Band 17; Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 710$ MHz; $\sigma = 0.86$ S/m; $\epsilon_r = 42.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(6.16, 6.16, 6.16); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch23790/Area Scan (111x211x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.149 W/Kg


Ch23790/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.44 V/m; Power Drift = 0.014 dB

Peak SAR (extrapolated) = 0.173 W/kg

SAR(1 g) = 0.141 W/Kg; SAR(10 g) = 0.113 W/Kg

Maximum value of SAR (measured) = 0.147 W/Kg

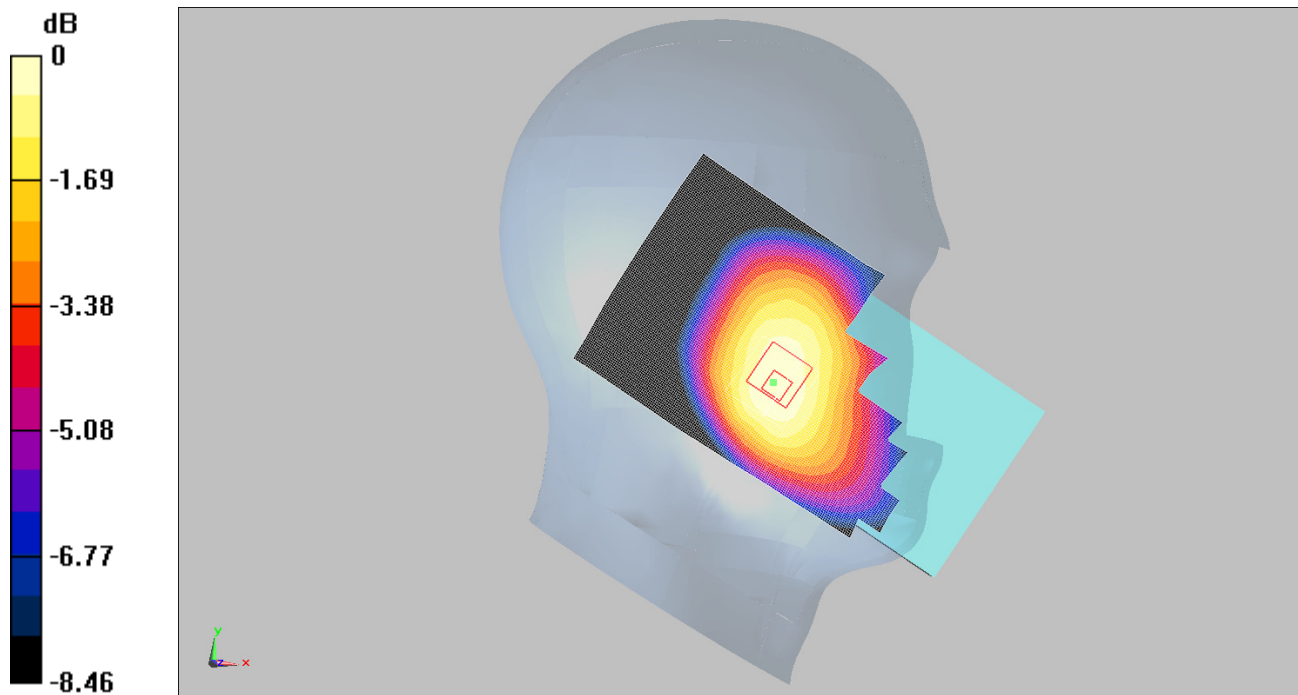

0 dB = 0.147W/Kg

MEAS. 10 Body Plan with Front Side 10mm on Middle Channel in LTE Band 17 mode

Date: 2018.01.24

Communication System: LTE Band 17; Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 710$ MHz; $\sigma = 0.98$ S/m; $\epsilon_r = 57.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(6.15, 6.15, 6.15); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Body Front Middle 1RB 25/Area Scan (111x231x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.247 W/Kg


Body Front Middle 1RB 25/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16 V/m; Power Drift = -0.142 dB

Peak SAR (extrapolated) = 0.315 W/kg

SAR(1 g) = 0.235 W/Kg; SAR(10 g) = 0.186 W/Kg

Maximum value of SAR (measured) = 0.250 W/Kg

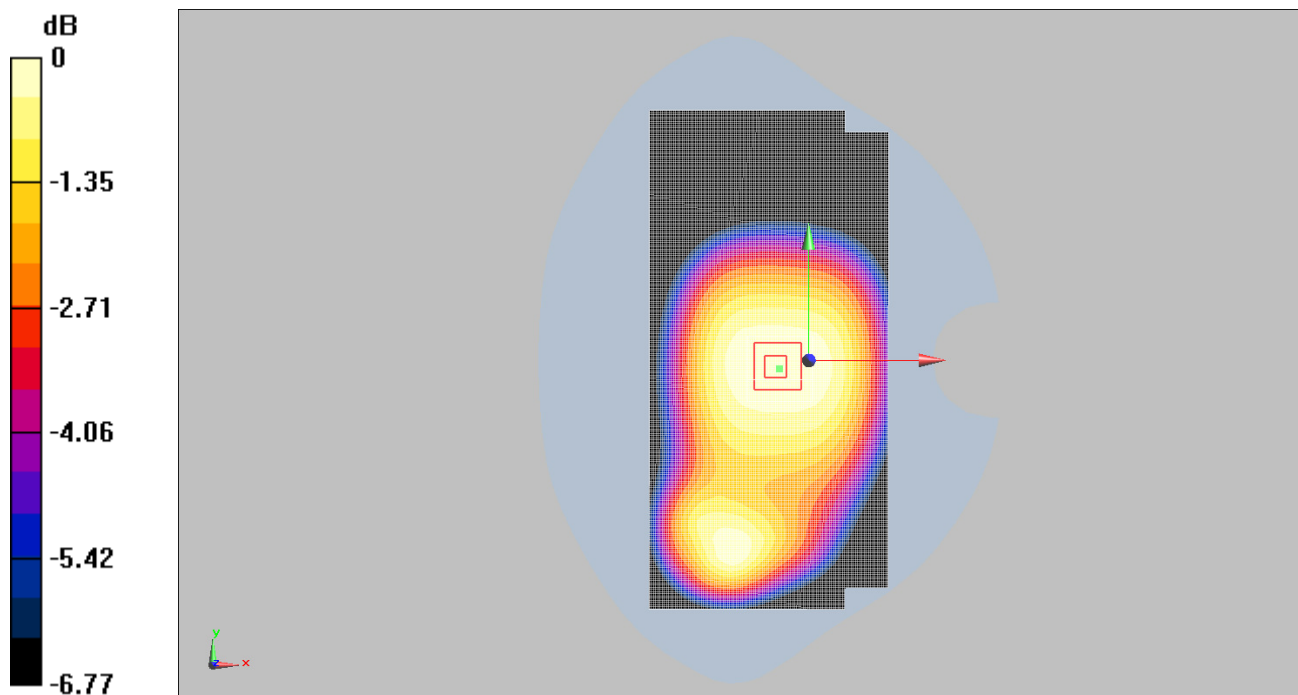

0 dB = 0.250W/Kg

MEAS. 23 Left Head with Cheek on Middle Channel in LTE Band 41 mode

Date: 2018.01.10

Communication System: LTE Band 41; Frequency: 2645 MHz; Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2645$ MHz; $\sigma = 2.05$ S/m; $\epsilon_r = 38.75$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(4.25, 4.25, 4.25); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Left Head Touch 1RB 50/Area Scan (111x211x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.055 W/Kg


Left Head Touch 1RB 50/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.931 V/m; Power Drift = -0.191 dB

Peak SAR (extrapolated) = 0.090 W/kg

SAR(1 g) = 0.051 W/Kg; SAR(10 g) = 0.026 W/Kg

Maximum value of SAR (measured) = 0.057 W/Kg

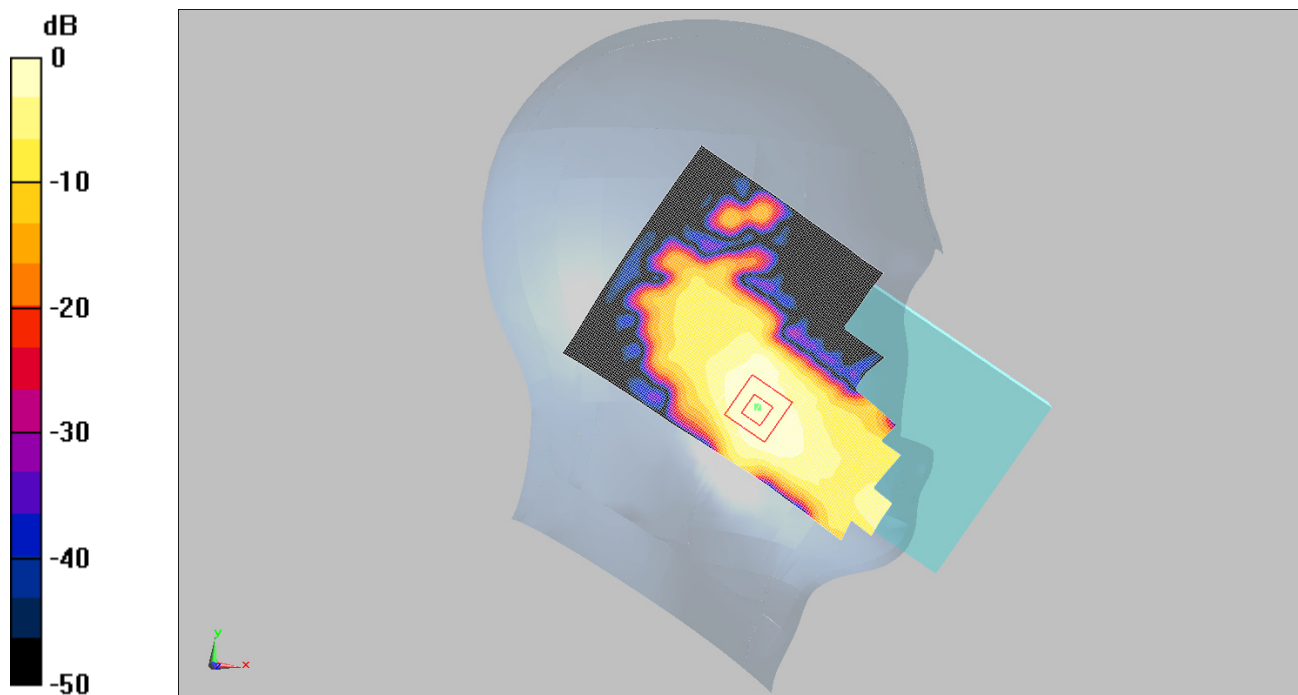

0 dB = 0.057W/Kg

MEAS. 24 Body Plan with Front Side 10mm on High Channel in LTE Band 41 mode

Date: 2018.01.12

Communication System: LTE Band 41; Frequency: 2645 MHz; Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2645$ MHz; $\sigma = 2.26$ S/m; $\epsilon_r = 51.03$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(4.12, 4.12, 4.12); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch41140/Area Scan (111x231x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.428 W/Kg


Ch41140/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.99 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 0.765 W/kg

SAR(1 g) = 0.391 W/Kg; SAR(10 g) = 0.191 W/Kg

Maximum value of SAR (measured) = 0.438 W/Kg

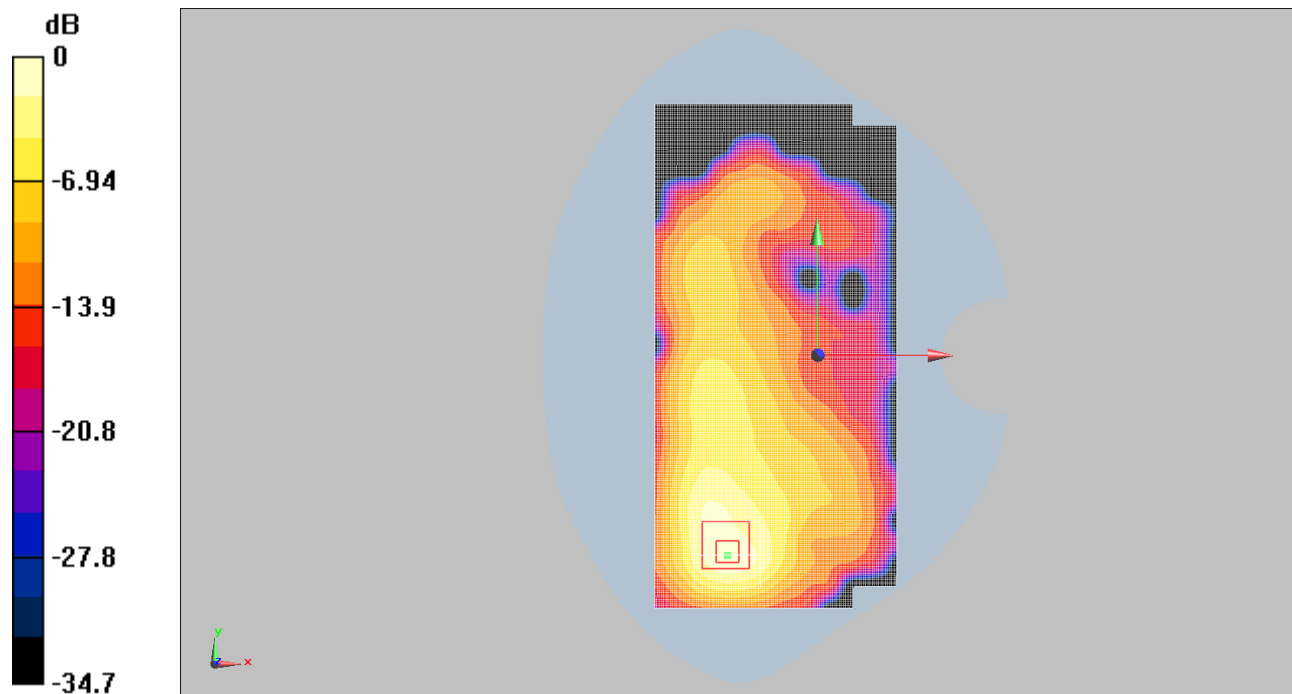

0 dB = 0.438W/Kg

MEAS. 25 Right Head with Cheek on Middle Channel in 802.11 b mode

Date: 2018.01.17

Communication System: WLAN 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1.032

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.80$ S/m; $\epsilon_r = 40.75$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(4.4, 4.4, 4.4); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch6/Area Scan (111x211x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.449 W/Kg


Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.6 V/m; Power Drift = 0.130 dB

Peak SAR (extrapolated) = 0.780 W/kg

SAR(1 g) = 0.400 W/Kg; SAR(10 g) = 0.195 W/Kg

Maximum value of SAR (measured) = 0.448 W/Kg

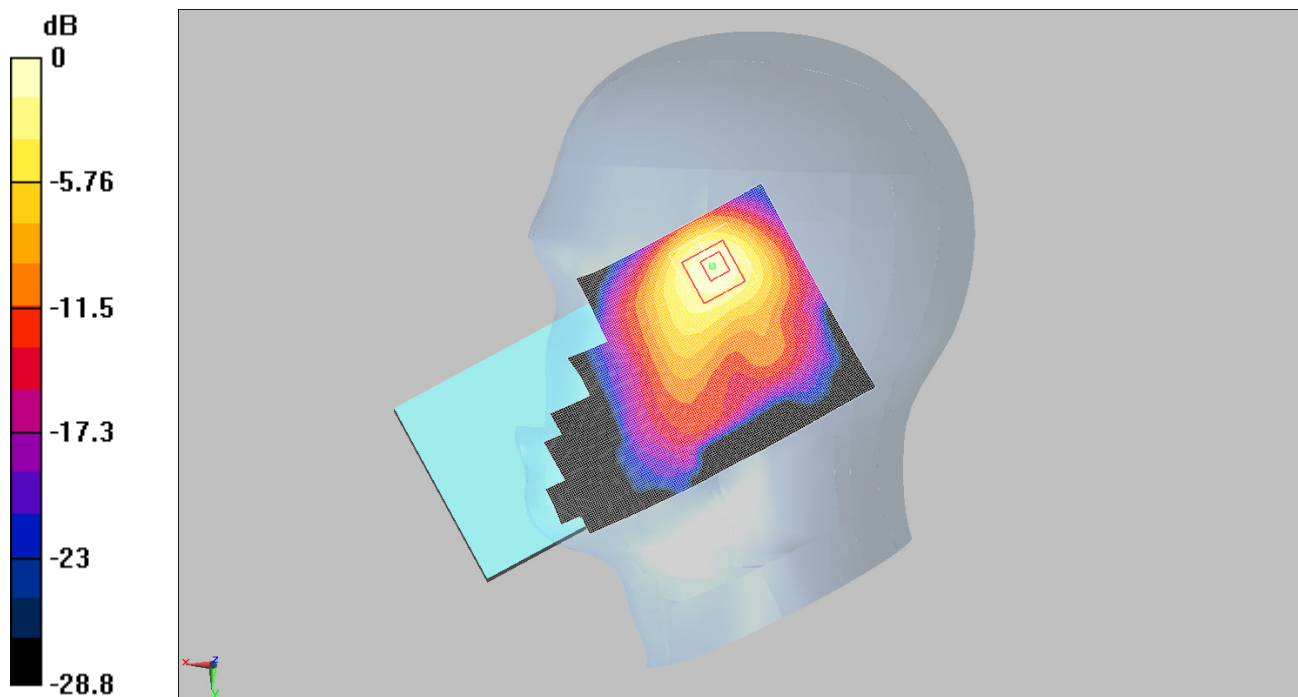

0 dB = 0.448W/Kg

MEAS. 26 Body Plan with Front Side 10mm on Middle Channel in 802.11b mode

Date: 2018.01.17

Communication System: WLAN 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1.032

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2.01$ S/m; $\epsilon_r = 53.35$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3110; ConvF(4.23, 4.23, 4.23); Calibrated: 2017.08.02
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch6Area Scan (111x231x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.085 W/Kg


Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.2 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 0.142 W/kg

SAR(1 g) = 0.076 W/Kg; SAR(10 g) = 0.040 W/Kg

Maximum value of SAR (measured) = 0.085 W/Kg

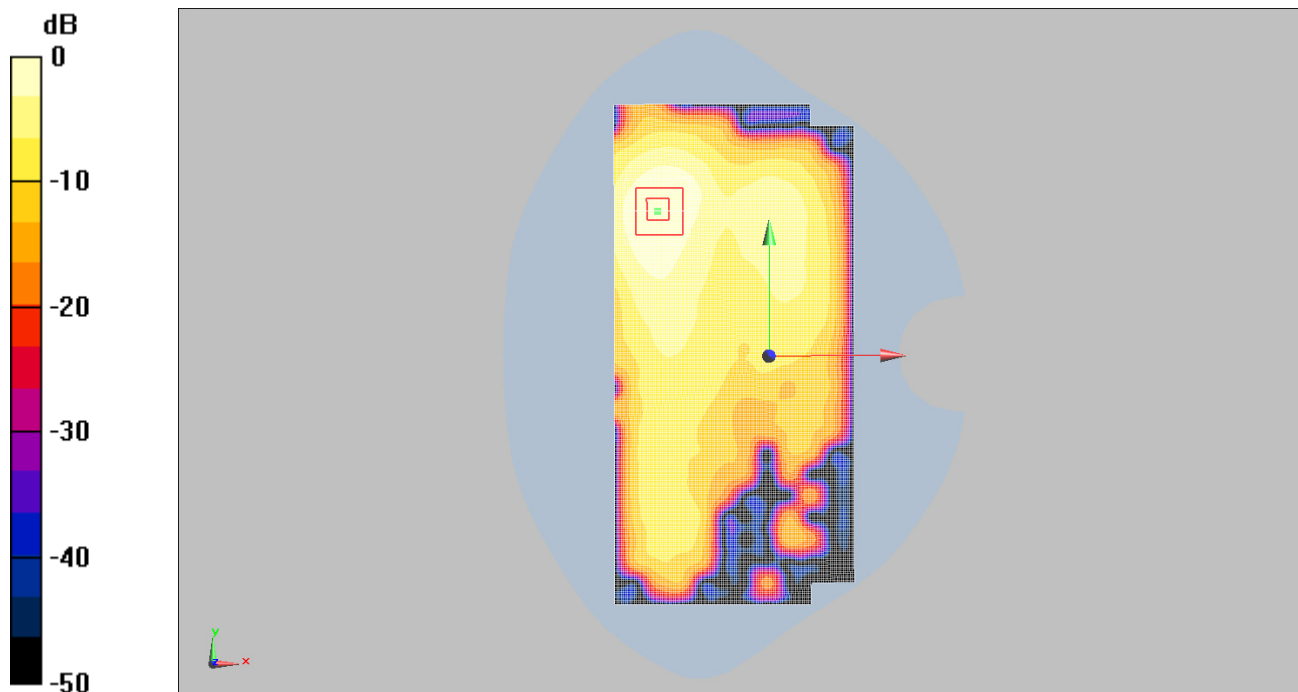

0 dB = 0.085W/Kg

MEAS. 27 Right Head with Cheek on Channel 46 in 802.11ac VHT40 mode

Date: 2018.01.13

Communication System: WLAN 802.11ac VHT40; Frequency: 5230 MHz; Duty Cycle: 1:1.422

Medium parameters used: $f = 5230$ MHz; $\sigma = 4.78$ S/m; $\epsilon_r = 35.12$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(5.65, 5.65, 5.65); Calibrated: 2018.01.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch46/Area Scan (111x211x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (interpolated) = 0.248 W/Kg


Ch46/Zoom Scan (7x7x21)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0 V/m; Power Drift = 0 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.216 W/Kg; SAR(10 g) = 0.058 W/Kg

Maximum value of SAR (measured) = 0.197 W/Kg

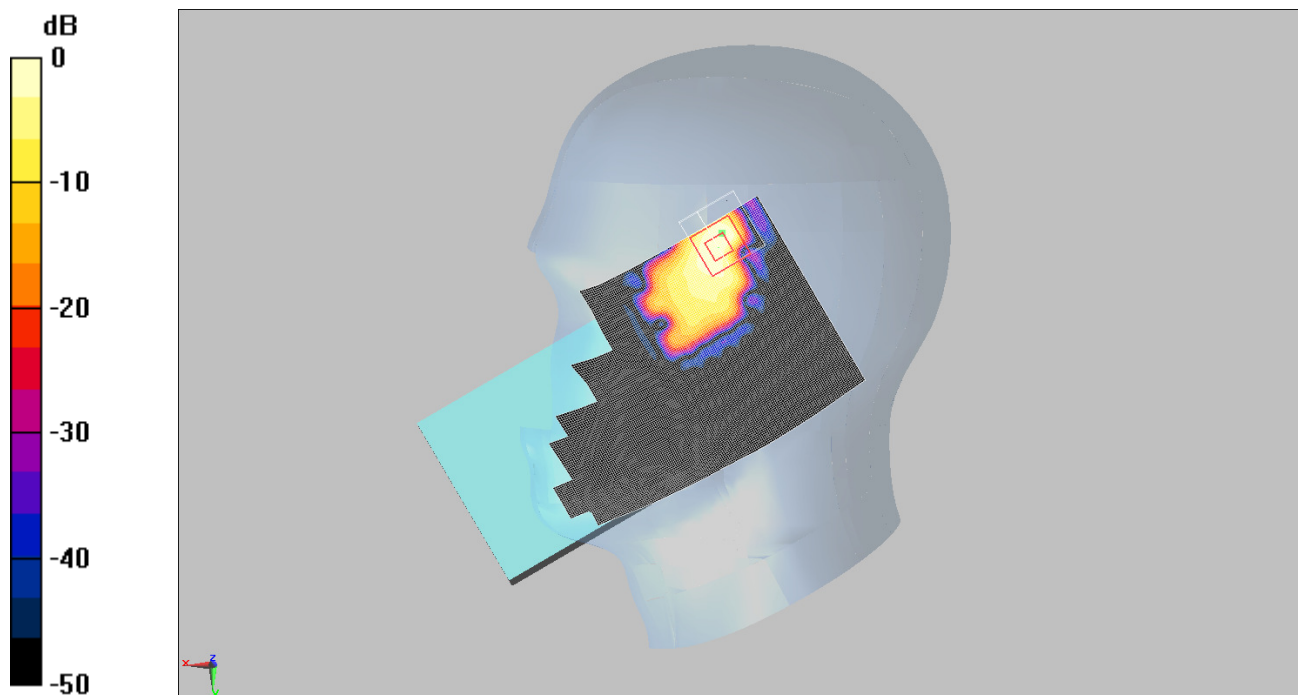

0 dB = 0.197W/Kg

MEAS. 28 Body Plan with Left Edge 10mm on Channel 46 in 802.11ac VHT40 mode

Date: 2018.01.14

Communication System: WLAN 802.11ac VHT40; Frequency: 5230 MHz; Duty Cycle: 1:1.422

Medium parameters used: $f = 5230$ MHz; $\sigma = 5.51$ S/m; $\epsilon_r = 47.82$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(5.16, 5.16, 5.16); Calibrated: 2018.01.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch46/Area Scan (91x221x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.099 W/Kg


Ch46/Zoom Scan (7x7x21)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.476 V/m; Power Drift = 0 dB

Peak SAR (extrapolated) = 0.238 W/kg

SAR(1 g) = 0.078 W/Kg; SAR(10 g) = 0.028 W/Kg

Maximum value of SAR (measured) = 0.092 W/Kg

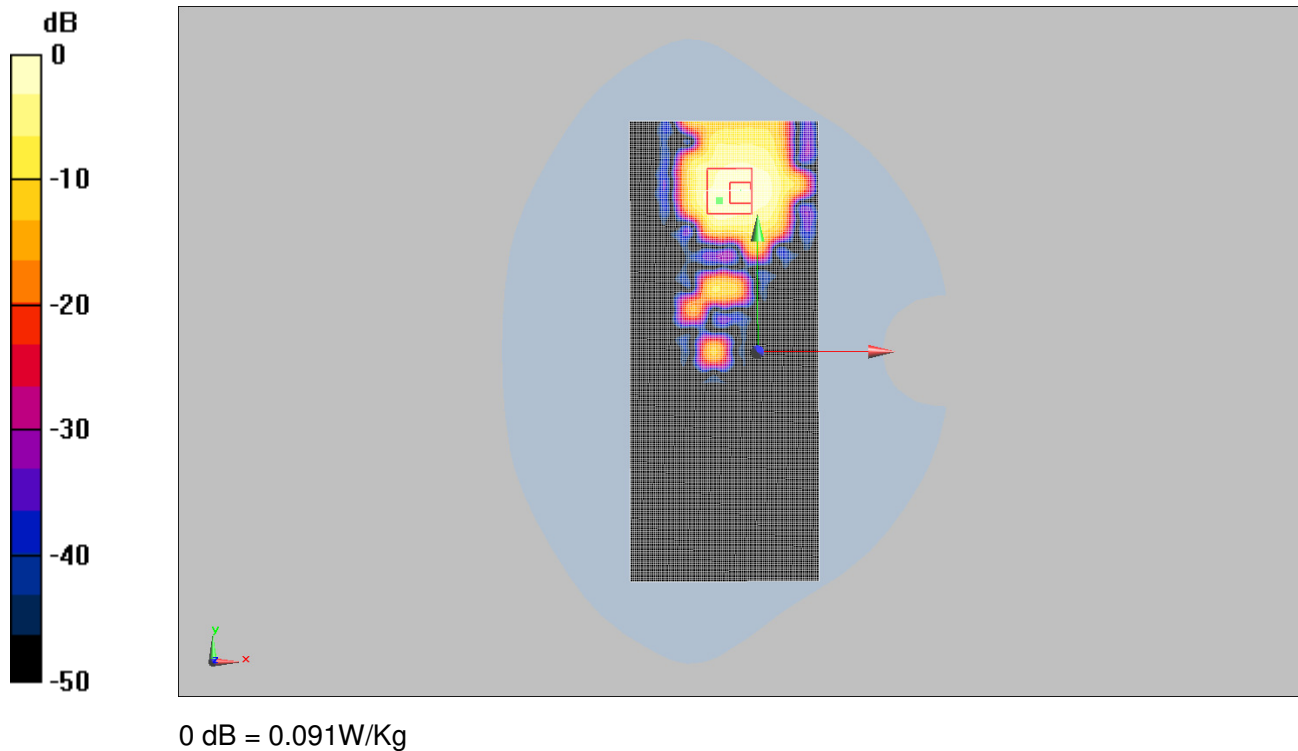

MEAS. 29 Right Head with Cheek on Channel 149 in 802.11ac VHT20 mode

Date: 2018.01.13

Communication System: WLAN 802.11ac HT20; Frequency: 5745 MHz; Duty Cycle: 1:1.084

Medium parameters used: $f = 5745$ MHz; $\sigma = 5.27$ S/m; $\epsilon_r = 34.73$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(4.95, 4.95, 4.95); Calibrated: 2018.01.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 Right 1857; Type: QD000P40CD; Serial: TP1857
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch149/Area Scan (111x211x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.102 W/Kg


Ch149/Zoom Scan (7x7x21)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0 dB

Peak SAR (extrapolated) = 0.638 W/kg

SAR(1 g) = 0.124 W/Kg; SAR(10 g) = 0.036 W/Kg

Maximum value of SAR (measured) = 0.103 W/Kg

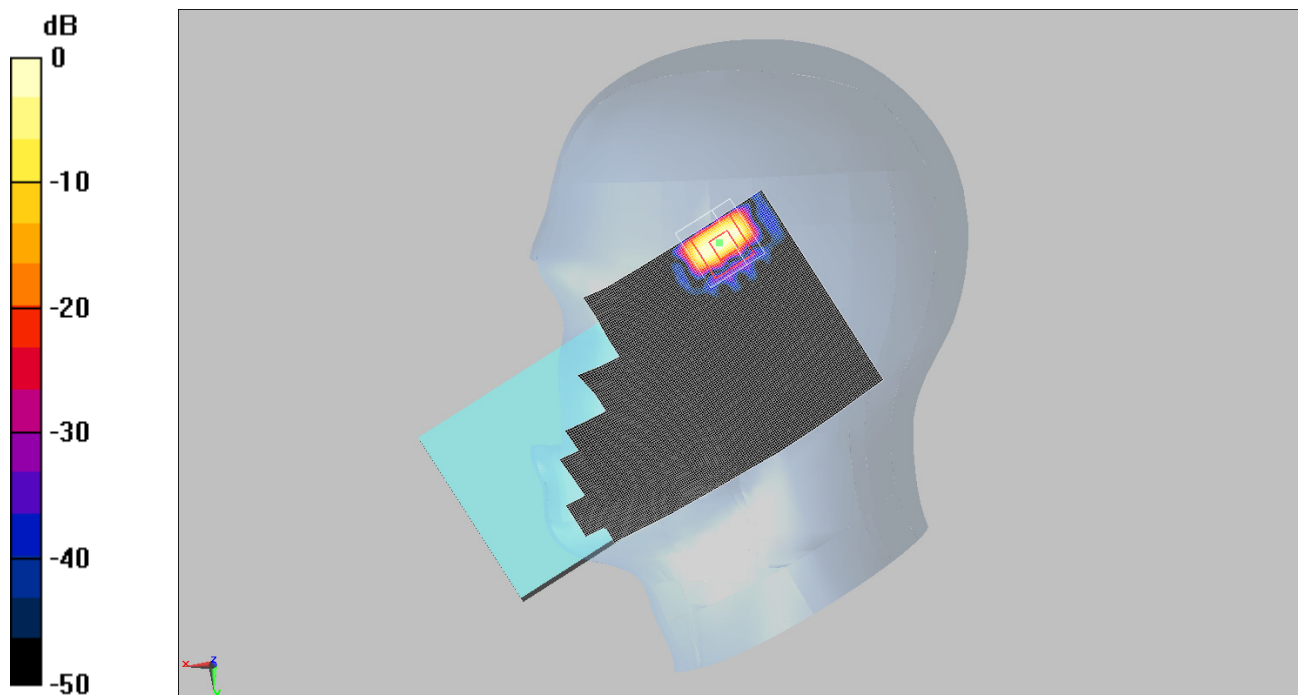

0 dB = 0.103W/Kg

MEAS. 30 Body Plan with Left Edge 10mm on Channel 149 in 802.11ac VHT20 mode

Date: 2018.01.14

Communication System: WLAN 802.11ac VHT20; Frequency: 5745 MHz; Duty Cycle: 1:1.084

Medium parameters used: $f = 5745$ MHz; $\sigma = 6.07$ S/m; $\epsilon_r = 46.99$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7340; ConvF(4.58, 4.58, 4.58); Calibrated: 2018.01.11
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn685; Calibrated: 2017.08.02
- Phantom: SAM (30deg probe tilt) with CRP v5.0 on left 1859; Type: QD000P40CD; Serial: TP:1859
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch149/Area Scan (91x221x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.107 W/Kg


Ch149/Zoom Scan (7x7x21)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0 dB

Peak SAR (extrapolated) = 0.458 W/kg

SAR(1 g) = 0.092 W/Kg; SAR(10 g) = 0.033 W/Kg

Maximum value of SAR (measured) = 0.076 W/Kg

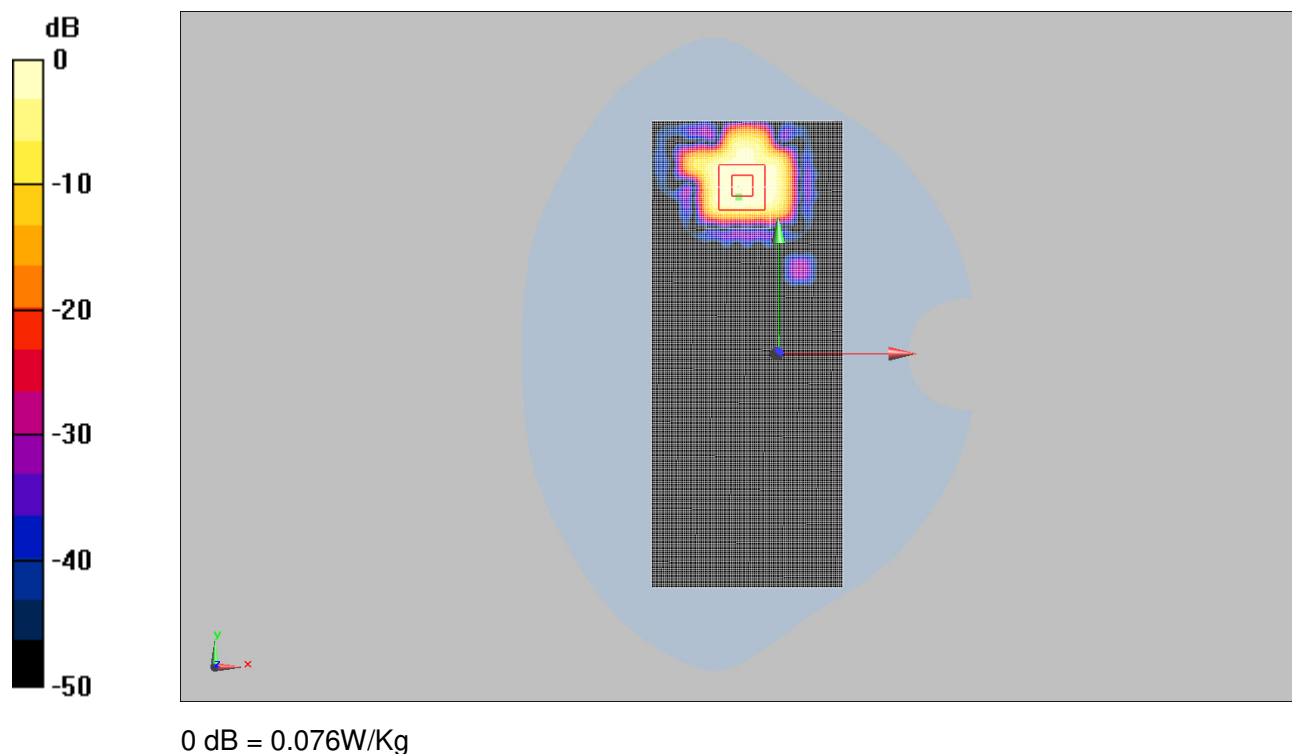

ANNEX D EUT EXTERNAL PHOTOS

Please refer the document "BL-EC17C0360-AW.pdf".

ANNEX E SAR TEST SETUP PHOTOS

Please refer the document "BL- EC17C0360-AS.pdf".

ANNEX F CALIBRATION REPORT

Please refer the document "CALIBRATION REPORT.pdf".

--END OF REPORT--