

FCC/ISED

RF

TEST REPORT

ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
Rugged Smart Phone

ISSUED TO
Shenzhen UniStrong Science & Technology Co., Ltd.

B, 4-4Factory, Zhengcheng Road, FuyongBaoan District, Shenzhen,
China



Tested by:

Hu Chao

Hu Chao

(Engineer)

Date

Nov. 28, 2018

Approved by:

Wei Yanquan

Wei Yanquan

(Chief Engineer)

Date

Nov. 28, 2018

Report No.: BL-EC18B0146-603

EUT Name: Rugged Smart Phone

Model Name: UT12

Brand Name: UniStrong

Test Standard: 47 CFR Part 15 Subpart C
RSS-Gen (Issue 5, April 2018)
RSS-247 (Issue 2, February 2017)

FCC ID: 2AOPD-UT10

ISED Number: 11546A-UT10

Test Conclusion: Pass

Test Date: Oct. 12, 2018 ~ Nov. 14, 2018

Date of Issue: Nov. 28, 2018

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Nov. 20, 2018</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Nov. 28, 2018</u>	<u>Update the version of 47 CFR Part 15, subpart C.</u>

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	5
1.1	Identification of the Testing Laboratory	5
1.2	Identification of the Responsible Testing Location	5
1.3	Laboratory Condition	5
1.4	Announce	5
2	PRODUCT INFORMATION	6
2.1	Applicant Information	6
2.2	Manufacturer Information	6
2.3	Factory Information	6
2.4	General Description for Equipment under Test (EUT)	6
2.5	Ancillary Equipment	6
2.6	Technical Information	7
3	SUMMARY OF TEST RESULTS	9
3.1	Test Standards	9
3.2	Verdict	10
4	GENERAL TEST CONFIGURATIONS	11
4.1	Test Environments	11
4.2	Test Equipment List	11
4.3	Measurement Uncertainty	13
4.4	Description of Test Setup	13
4.4.1	For Antenna Port Test	13
4.4.2	For AC Power Supply Port Test	14
4.4.3	For Radiated Test (Below 30 MHz)	14
4.4.4	For Radiated Test (30 MHz-1 GHz)	15
4.4.5	For Radiated Test (Above 1 GHz)	15

4.5	Measurement Results Explanation Example.....	16
4.5.1	For conducted test items:	16
4.5.2	For radiated band edges and spurious emission test:.....	16
5	TEST ITEMS.....	17
5.1	Antenna Requirements.....	17
5.1.1	Relevant Standards	17
5.1.2	Antenna Anti-Replacement Construction	17
5.1.3	Antenna Gain	18
5.2	Output Power	19
5.2.1	Test Limit.....	19
5.2.2	Test Setup	19
5.2.3	Test Procedure	19
5.2.4	Test Result	20
5.3	6dB Bandwidth	21
5.3.1	Limit.....	21
5.3.2	Test Setup	21
5.3.3	Test Procedure	21
5.3.4	Test Result	21
5.4	Conducted Spurious Emission	22
5.4.1	Limit.....	22
5.4.2	Test Setup	22
5.4.3	Test Procedure	22
5.4.4	Test Result	23
5.5	Band Edge (Authorized-band band-edge).....	24
5.5.1	Limit.....	24
5.5.2	Test Setup	24
5.5.3	Test Procedure	24
5.5.4	Test Result	25
5.6	Conducted Emission	26
5.6.1	Limit.....	26
5.6.2	Test Setup	26
5.6.3	Test Procedure	26

5.6.4	Test Result	26
5.7	Radiated Spurious Emission	27
5.7.1	Limit.....	27
5.7.2	Test Setup	27
5.7.3	Test Procedure	27
5.7.4	Test Result	30
5.8	Band Edge (Restricted-band band-edge).....	31
5.8.1	Limit.....	31
5.8.2	Test Setup	31
5.8.3	Test Procedure	31
5.8.4	Test Result	31
5.9	Power Spectral density (PSD).....	32
5.9.1	Limit.....	32
5.9.2	Test Setup	32
5.9.3	Test Procedure	32
5.9.4	Test Result	32
ANNEX A	TEST RESULT	33
A.1	Output Power	33
A.2	Bandwidth.....	33
A.3	Conducted Spurious Emissions	33
A.4	Band Edge (Authorized-band band-edge).....	33
A.5	Conducted Emissions.....	33
A.6	Radiated Emission	34
A.7	Band Edge (Restricted-band band-edge).....	72
A.8	Power Spectral Density (PSD)	85
ANNEX B	TEST SETUP PHOTOS	86
ANNEX C	EUT EXTERNAL PHOTOS	86
ANNEX D	EUT INTERNAL PHOTOS	86

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory is a testing organization accredited by American Association for Laboratory Accreditation(A2LA) according to ISO/IEC 17025.The accreditation certificate is 4344.01. The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v6.2.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Shenzhen UniStrong Science & Technology Co., Ltd.
Address	B, 4-4Factory, Zhengcheng Road, FuyongBaoan District, Shenzhen, China

2.2 Manufacturer Information

Manufacturer	Shenzhen UniStrong Science & Technology Co., Ltd.
Address	B, 4-4Factory, Zhengcheng Road, FuyongBaoan District, Shenzhen, China

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Name	Rugged Smart Phone
Model Name Under Test	UT12
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Ancillary Equipment

Ancillary Equipment 1	Battery	
	Brand Name	SJYEnergy
	Model No.	BA7800
	Serial No.	N/A
	Capacity	8000 mAh
	Rated Voltage	3.8 V
	Limit Charge Voltage	4.35 V
Ancillary Equipment 2	Adapter	
	Brand Name	N/A
	Model No.	ASUC71W
	Serial No.	N/A
	Rated Input	100-240 V~, 0.7 A, 50/60 Hz
	Rated Output	5 V= 3 A
Ancillary Equipment 3	USB Data Cable	
	Model No.	N/A
	Length (Approx.)	0.8 m

2.6 Technical Information

Network and Wireless connectivity	2G Network GSM/GPRS/EGPRS 850/900/1800/1900 MHz; 3G Network WCDMA/HSDPA/HSUPA Band 1/2/5/8; CDMA Band Class 0; EVDO Rel. 0/Rev. A Band Class 0; 4G Network LTE FDD Band 1/2/3/4/5/7/8/17/20/28; LTE TDD Band 38/40/41; Bluetooth 4.0 (BR+EDR+BLE) WIFI 802.11a, 802.11b, 802.11g, 802.11n(HT20) and 802.11ac GPS, GLONASS, NFC, BDS, 5.8G SRD
-----------------------------------	---

The requirement for the following technical information of the EUT was tested in this report:

Frequency Range	802.11b/g/n(20 MHz): 2.412 GHz - 2.462 GHz $f_c = 2412 \text{ MHz} + (N-1)*5 \text{ MHz}$, where - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 1 to 11.
Modulation Type	DSSS, OFDM
Product Type	☐ Mobile ☒ Portable ☐ Fix Location
Antenna System (eg., MIMO, Smart Antenna)	N/A
Categorization as Correlated or Completely Uncorrelated	N/A
Antenna Type	PIFA Antenna
Antenna Gain	0.27 dBi
About the Product	Only the WIFI 802.11b, 802.11g and 802.11n (HT20) was tested in this report.

Modulation technology	Modulation Type	Transfer Rate (Mbps)
DSSS (802.11b)	DBPSK	1
	DQPSK	2
	CCK	5.5/ 11
OFDM (802.11g)	BPSK	6 / 9
	QPSK	12 / 18
	16QAM	24 / 36
	64QAM	48 / 54
OFDM (802.11n-20MHz)	BPSK	6.5
	QPSK	13/19.5
	16QAM	26/39
	64QAM	52/58.5/65

Note: Preliminary tests were performed in different data rate in above table to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
Output Power	11b/11g/11n20	1/6/6.5 Mbps	1/6/11
6dB Bandwidth	11b/11g/11n20	1/6/6.5 Mbps	1/6/11
Conducted Spurious Emission	11b/11g/11n20	1/6/6.5 Mbps	1/6/11
Conducted Emission	11b/11g/11n20	1/6/6.5 Mbps	1/6/11
Radiated Spurious Emission	11b/11g/11n20	1/6/6.5 Mbps	1/6/11
Band Edge	11b/11g/11n20	1/6/6.5 Mbps	1/6/11
Power spectral density (PSD)	11b/11g/11n20	1/6/6.5 Mbps	1/6/11

Note: The above EUT information in section 2.4 and 2.6 was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C (October. 1 2017)	Miscellaneous Wireless Communications Services
2	KDB Publication 558074 D01v05	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
3	KDB Publication 662911 D01v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)
4	RSS-Gen (Issue 5, Apr. 2018)	General Requirements for Compliance of Radio Apparatus
5	RSS-247 (Issue 2, February 2017)	Digital Transmission Systems (DTSS), Frequency Hopping Systems(FHSS) and Licence-Exempt Local Area Network (LE-LAN) Devices
6	ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

3.2 Verdict

No.	Description	FCC PART No.	ISED Part No.	Test Result	Verdict
1	Antenna Requirement	15.203; 15.247(b)	RSS-247, 5.4 (6)	N/A	Pass ^{Note 1}
2	Output Power	15.247(b)	RSS-247, 5.4 (4)	ANNEX A.1	Pass
3	6dB Bandwidth	15.247(a)	RSS-GEN, 6.6; RSS-247, 5.2 (1)	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247(d)	RSS-247, 5.5	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.209; 15.247(d)	RSS-GEN, 8.9; RSS-247, 5.5	ANNEX A.4	Pass
6	Conducted Emission	15.207	RSS-GEN, 8.8	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209; 15.247(d)	RSS-247, 5.5	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209; 15.247(d)	RSS-247, 5.5	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247(e)	RSS-247, 5.2 (2)	ANNEX A.8	Pass
10	Receiver Spurious Emissions	N/A	RSS-Gen, 7.1.2	N/A	N/A ^{Note 2}

Note 1: Please refer to section 5.1.

Note 2: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

Note 3: The only difference between the EUT (test samples in this report) and test sample in report BL-EC17C0360-603, which was issued by Shenzhen BALUN Technology Co., Ltd. on Mar. 20, 2018, is product information. Just changed the information as below:

1. Difference WIFI and 4G antenna;
2. Difference size of shell and appearance;
3. Difference camera;
4. Difference LCD screen;

And others hardware circuit and software were all the same. So just Radiated Spurious Emission and Band Edge (Restricted-band band-edge) were retested in this report, Other test items please refer to the BL-EC17C0360-603, which was issued by Shenzhen BALUN Technology Co., Ltd. on Mar. 20, 2018.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% - 55%	
Atmospheric Pressure	100 kPa - 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	3.8 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2018.06.15	2019.06.14
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2018.06.15	2019.06.14
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2018.11.07	2019.11.06
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2018.06.13	2019.06.12
LISN	SCHWARZBECK	NSLK 8127	8127-687	2018.06.13	2019.06.12
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2018.06.15	2019.06.14
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2018.06.15	2019.06.14
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2018.06.14	2019.06.13
Temperature Chamber	ANGELANTIONI SCIENCE	NTH64-40A	1310	2018.06.26	2019.06.25
Test Antenna- Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2017.11.09	2019.11.08
Test Antenna- Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2017.07.22	2019.07.21
Test Antenna- Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2018.07.11	2020.07.10
Test Antenna- Horn(15-26.5 GHz)	SCHWARZBECK	BBHA 9170	9170-305	2018.06.21	2019.06.20
Test Antenna- Horn (18-40 GHz)	A-INFO	LB- 180400KF	J211060273	2017.01.06	2019.01.05
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2019.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60 *7.35m	N/A	2017.08.08	2019.08.07
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2018.06.15	2019.06.14
Power Amplifier	OPHIR RF	5225F	1037	2018.02.16	2019.02.15
Power Amplifier	OPHIR RF	5273F	1016	2018.02.16	2019.02.15
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A
Feld Strength Meter	Narda	EP601	511WX51129	2018.05.21	2019.05.20
Mouth Simulator	B&K	4227	2423931	2018.11.15	2019.11.14
Sound Calibrator	B&K	4231	2430337	2018.11.15	2019.11.14
Sound Level Meter	B&K	NL-20	00844023	2018.11.15	2019.11.14
Ear Simulator	B&K	4185	2409449	2018.11.15	2019.11.14
Ear Simulator	B&K	4195	2418189	2018.11.15	2019.11.14
Audio analyzer	B&K	UPL 16	100129	2018.11.15	2019.11.14
Amplifier	COM-MW	KL_LNA_18 -40G-01	N/A	2018.06.26	2019.06.25
RF Cable 1	ROHDE&SCHWARZ	JUNFLON	APR0914004	2018.07.10	2019.10.09
RF Cable 2	Huber&suhner	RG_400_/U	N/A	2018.07.10	2019.10.09
RF Cable 3	Huber&suhner	RG_400_/U	N/A	2018.07.10	2019.10.09
RF Cable 4	Huber&suhner	SX_04172_ B-60	N/A	2018.07.10	2019.10.09
RF Cable 5	COM-MW	RFJA360- 2.92mm- J/J3M	N/A	2018.07.10	2019.10.09

Note: The calibration period on the Cable is three month.

4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Occupied Channel Bandwidth	±4%
RF output power, conducted	±1.4 dB
Power Spectral Density, conducted	±2.5 dB
Unwanted Emissions, conducted	±2.8 dB
All emissions, radiated	±5.4 dB
Temperature	±1°C
Humidity	±4%


4.4 Description of Test Setup

4.4.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

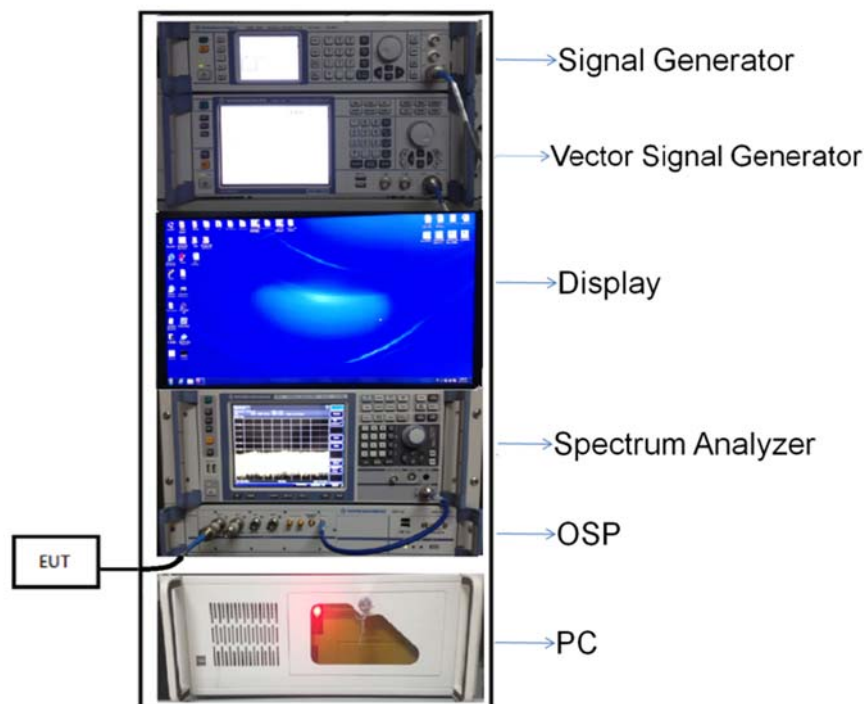


(Diagram 1)

4.4.2 For AC Power Supply Port Test

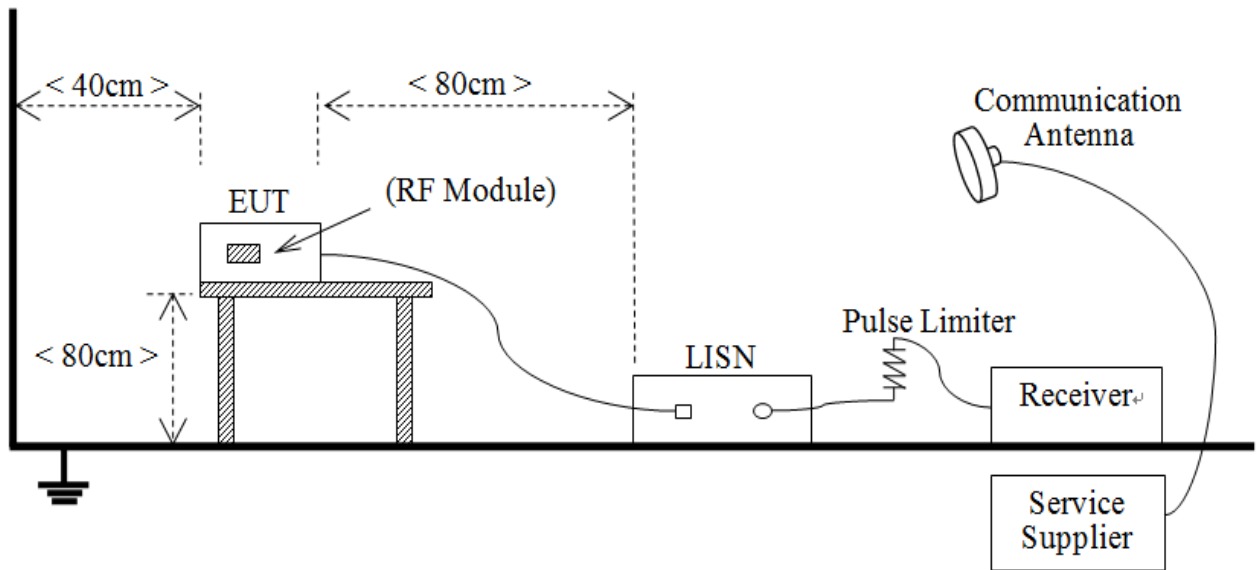


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

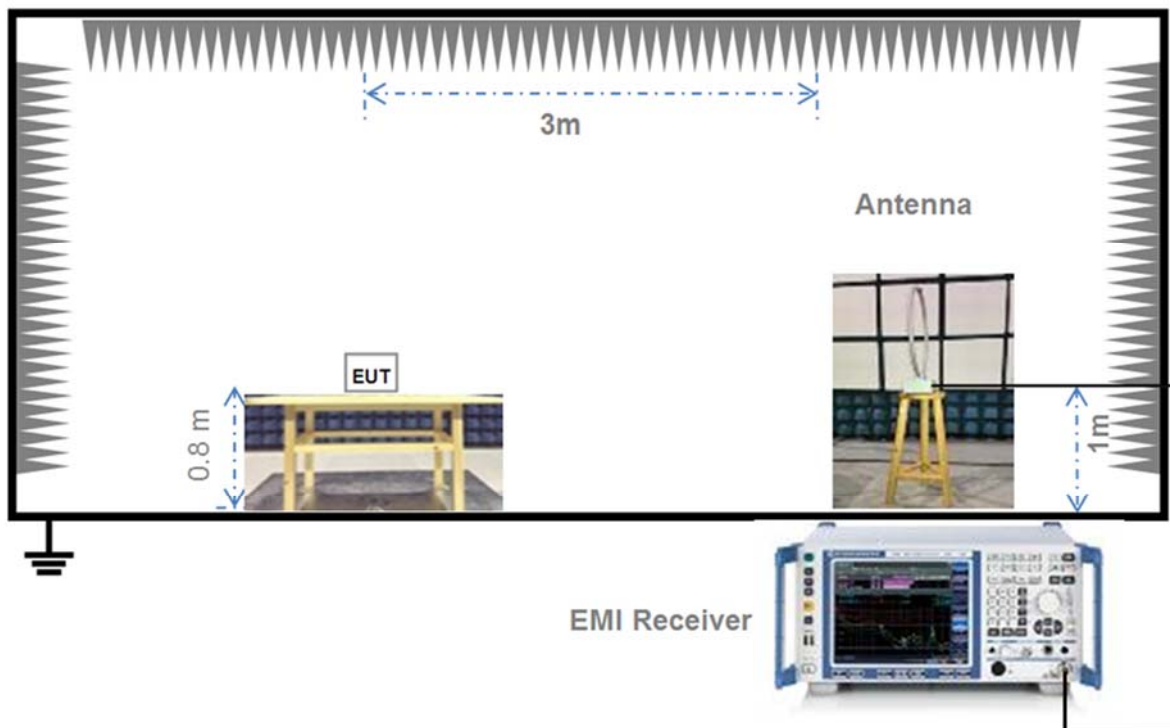


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

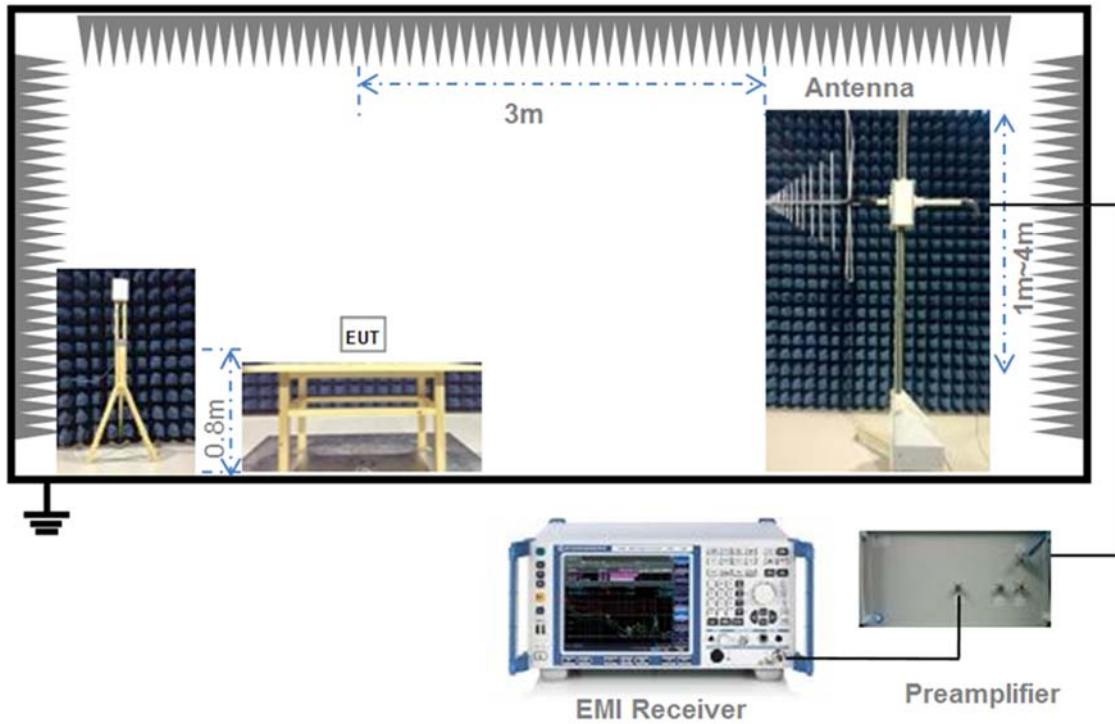

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

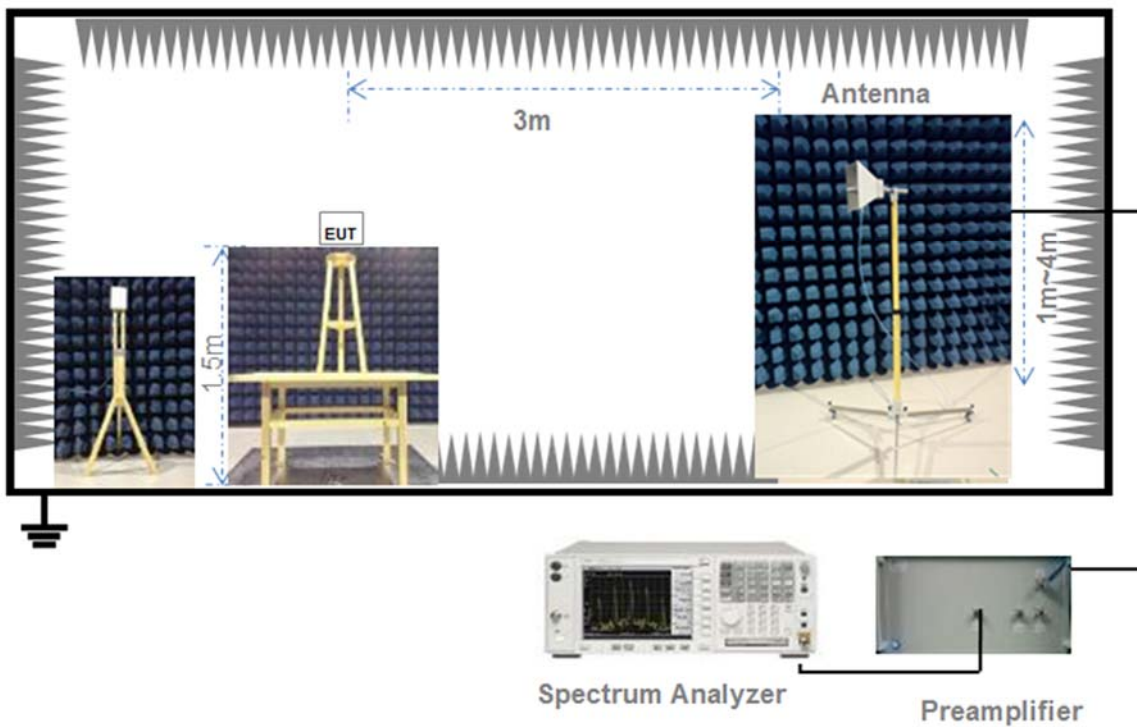

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.5.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

EIRP= Measure Conducted output power Value (dBm) + Maximum transmit antenna gain (dBi) + the appropriate maximum ground reflection factor (dB)

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (6)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.


If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	

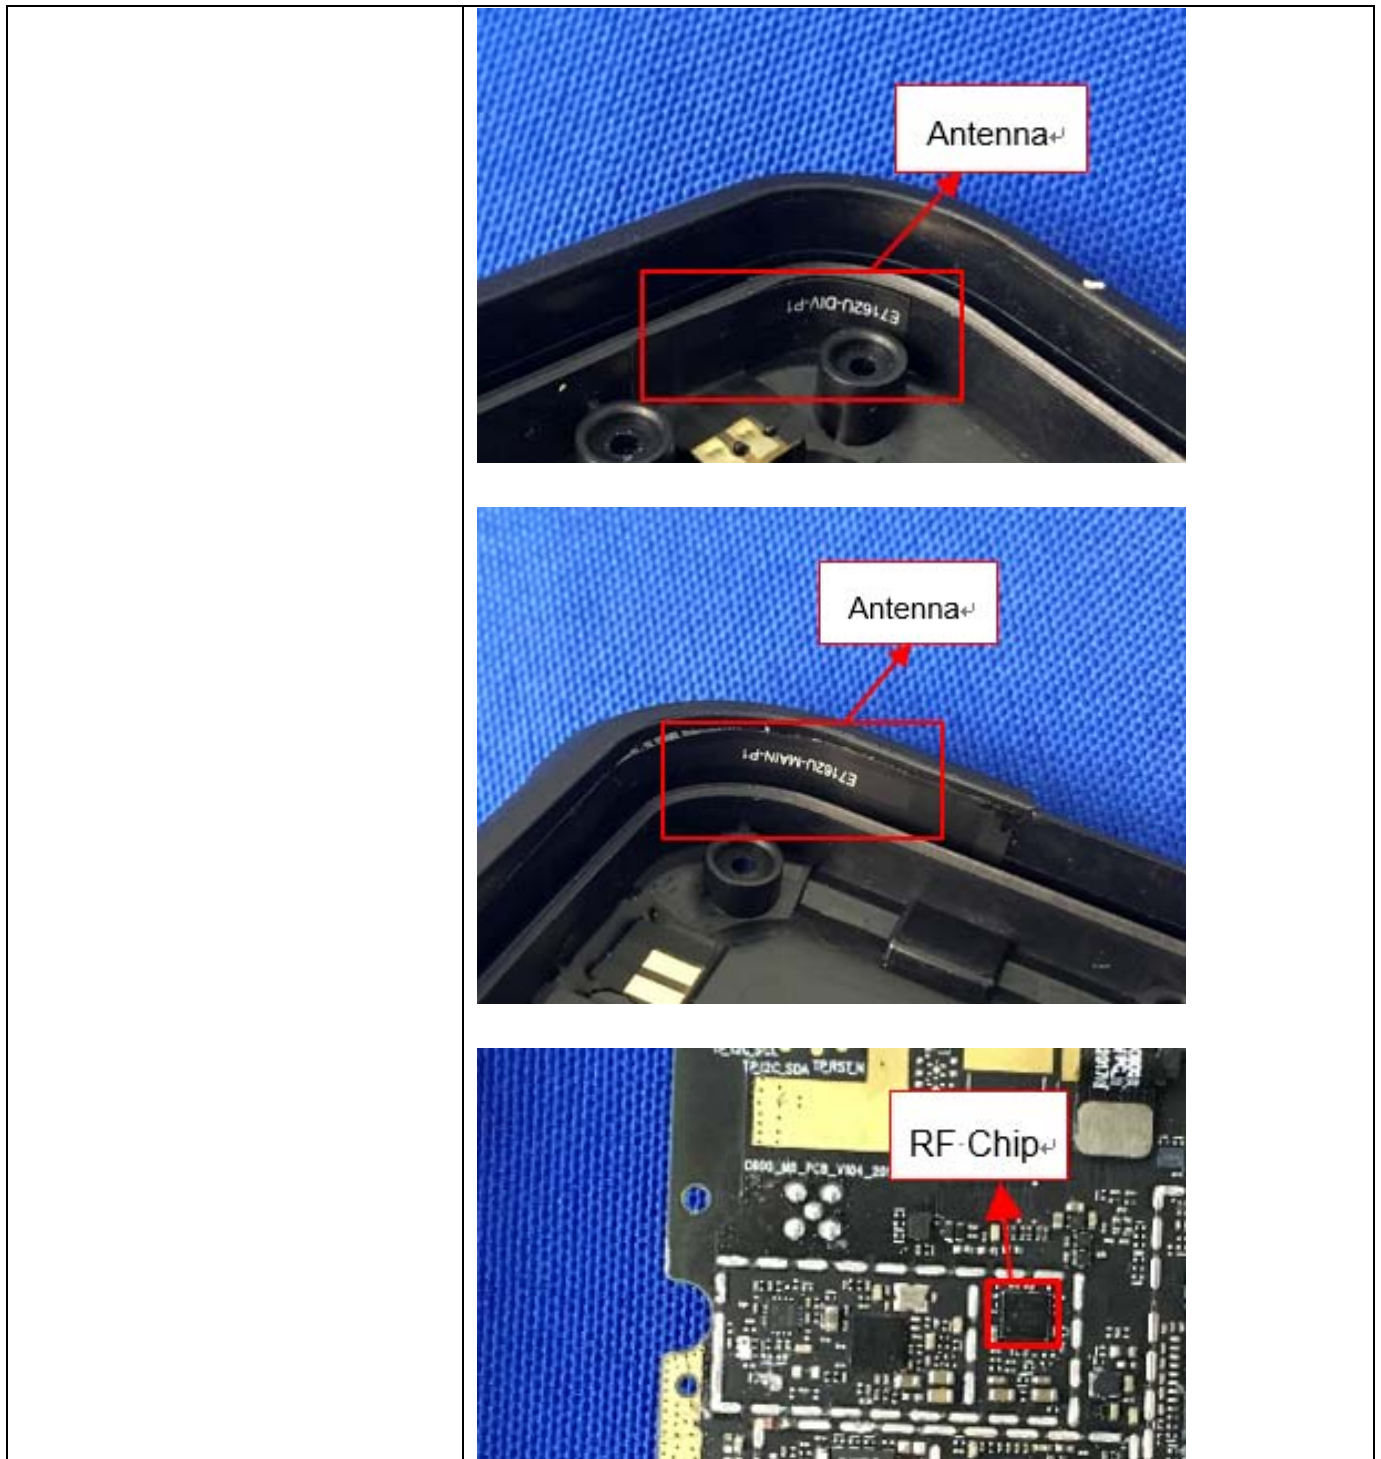

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Output Power

5.2.1 Test Limit

FCC § 15.247(b); RSS-247, 5.4 (4)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

Maximum peak conducted output power

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Maximum conducted (average) output power (Reporting Only)

a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

b) If the transmitter does not transmit continuously, measure the duty cycle (x) of the transmitter output signal as described in Section 6.0.

c) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

d) Adjust the measurement in dBm by adding $10\log(1/x)$, where x is the duty cycle to the measurement result.

Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.

Set $VBW \geq RBW$. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

5.2.4 Test Result

Please refer to ANNEX A.1.

5.36dB Bandwidth

5.3.1 Limit

FCC §15.247(a); RSS-GEN, 6.6

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW) ≥ 3 RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Conducted Spurious Emission

5.4.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Emission level measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Band Edge (Authorized-band band-edge)

5.5.1 Limit

FCC §15.247(d); RSS-GEN, 8.9, RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle $\geq 98\%$). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission) ± 0.5 MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission ± 0.5 MHz.

Standard method(The 99% OBW of the fundamental emission is without 2 MHz of the authorized band):

Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.

Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.

Attenuation: Auto (at least 10 dB preferred).

Sweep time: Coupled.

Resolution bandwidth: 100 kHz.

Video bandwidth: 300 kHz.

Detector: Peak.

Trace: Max hold.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Conducted Emission

5.6.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.6.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.6.4 Test Result

Please refer to ANNEX A.5.

5.7 Radiated Spurious Emission

5.7.1 Limit

FCC §15.209&15.247(c); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.7.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).

- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz

> 1000 MHz	1 MHz
------------	-------

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT (i.e., duty cycle ≥ 98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle, x , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW $\geq 3 \times$ RBW.
- e) Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30 MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Band Edge (Restricted-band band-edge)

5.8.1 Limit

FCC §15.209&15.247(c); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.8.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Power Spectral density (PSD)

5.9.1 Limit

FCC §15.247(d); RSS-247, 5.2 (2)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

5.9.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.

Set the VBW $\geq 3 \text{ RBW}$.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.9.4 Test Result

Please refer to ANNEX A.8.

ANNEX A TEST RESULT

A.1 Output Power

Note: Output Power result reference from original test report: BL-EC17C0360-603 (issued by Shenzhen BALUN Technology Co., Ltd. On Mar. 20, 2018) A.1 Output Power.

A.2 Bandwidth

Note: Bandwidth result reference from original test report: BL-EC17C0360-603 (issued by Shenzhen BALUN Technology Co., Ltd. On Mar. 20, 2018) A.2 Bandwidth.

A.3 Conducted Spurious Emissions

Note: Conducted Spurious Emissions result reference from original test report: BL-EC17C0360-603 (issued by Shenzhen BALUN Technology Co., Ltd. On Mar. 20, 2018) A.3 Conducted Spurious Emissions.

A.4 Band Edge (Authorized-band band-edge)

Note: Band Edge (Authorized-band band-edge) result reference from original test report: BL-EC17C0360-603 (issued by Shenzhen BALUN Technology Co., Ltd. On Mar. 20, 2018) A.4 Band Edge (Authorized-band band-edge).

A.5 Conducted Emissions

Note: Conducted Emissions result reference from original test report: BL-EC17C0360-603 (issued by Shenzhen BALUN Technology Co., Ltd. On Mar. 20, 2018) A.5 Conducted Emissions.

A.6 Radiated Emission

Note¹: The symbol of “--” in the table which means not application.


Note²: For the test data above 1 GHz, According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note³: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note⁴: The EUT is working in the Normal link mode below 1 GHz.

Test Data and Plots


30 MHz to 1 GHz, ANT V

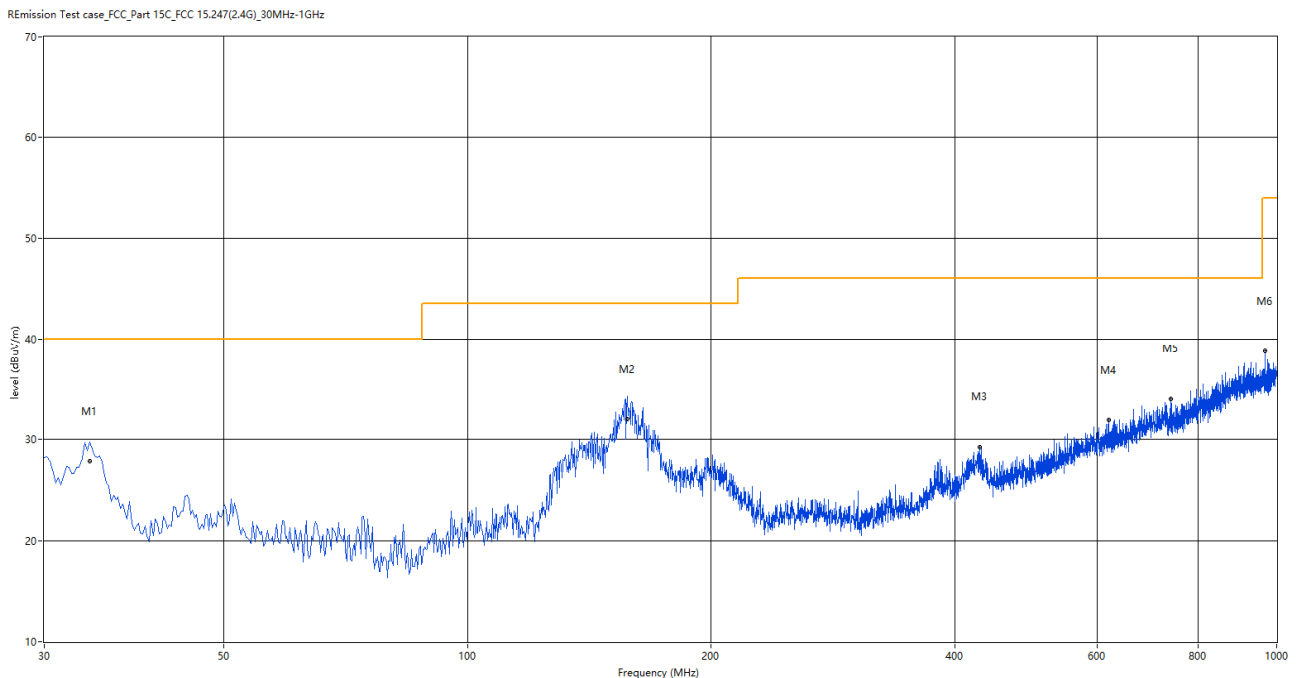

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
34.121	29.70	27.81	--	-28.53	--	40.0	--	12.19	357.90	150	Vertical	Pass
157.523	34.24	31.99	--	-31.65	--	43.5	--	11.51	94.40	150	Vertical	Pass
430.025	29.24	--	--	-23.31	--	46.0	--	16.76	288.30	150	Vertical	Pass
620.582	31.92	--	--	-18.62	--	46.0	--	14.08	29.60	150	Vertical	Pass
739.135	33.94	--	--	-16.80	--	46.0	--	12.06	312.80	150	Vertical	Pass
967.998	38.75	--	--	-12.74	--	54.0	--	15.25	153.40	150	Vertical	Pass

30 MHz to 1 GHz, ANT H

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

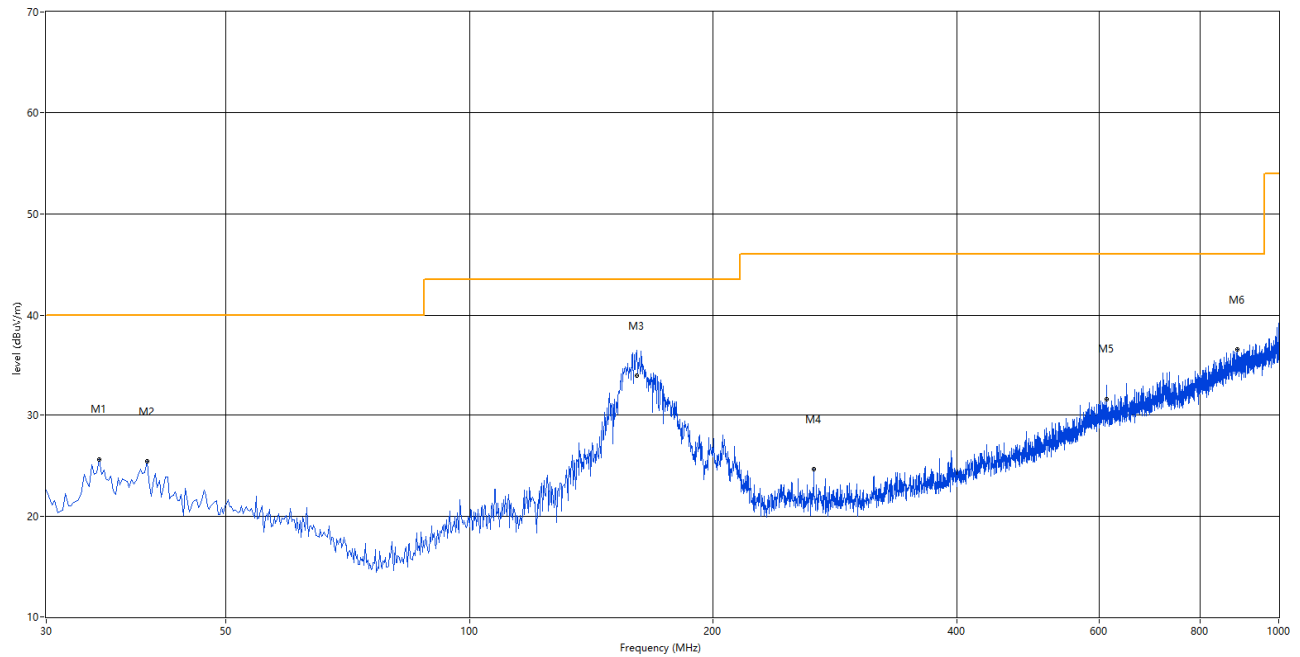


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
34.849	25.60	--	--	-28.39	--	40.0	--	14.40	322.30	150	Horizontal	Pass
39.940	25.45	--	--	-27.34	--	40.0	--	14.55	276.30	150	Horizontal	Pass
161.160	36.40	33.93	--	-31.49	--	43.5	--	9.57	22.80	150	Horizontal	Pass
266.378	24.66	--	--	-26.98	--	46.0	--	21.34	25.50	150	Horizontal	Pass
613.067	32.91	31.57	--	-18.76	--	46.0	--	14.43	233.10	150	Horizontal	Pass
889.448	36.51	--	--	-13.64	--	46.0	--	9.49	133.50	150	Horizontal	Pass

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

1 GHz to 7 GHz, ANT V 802.11b Low Channel


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

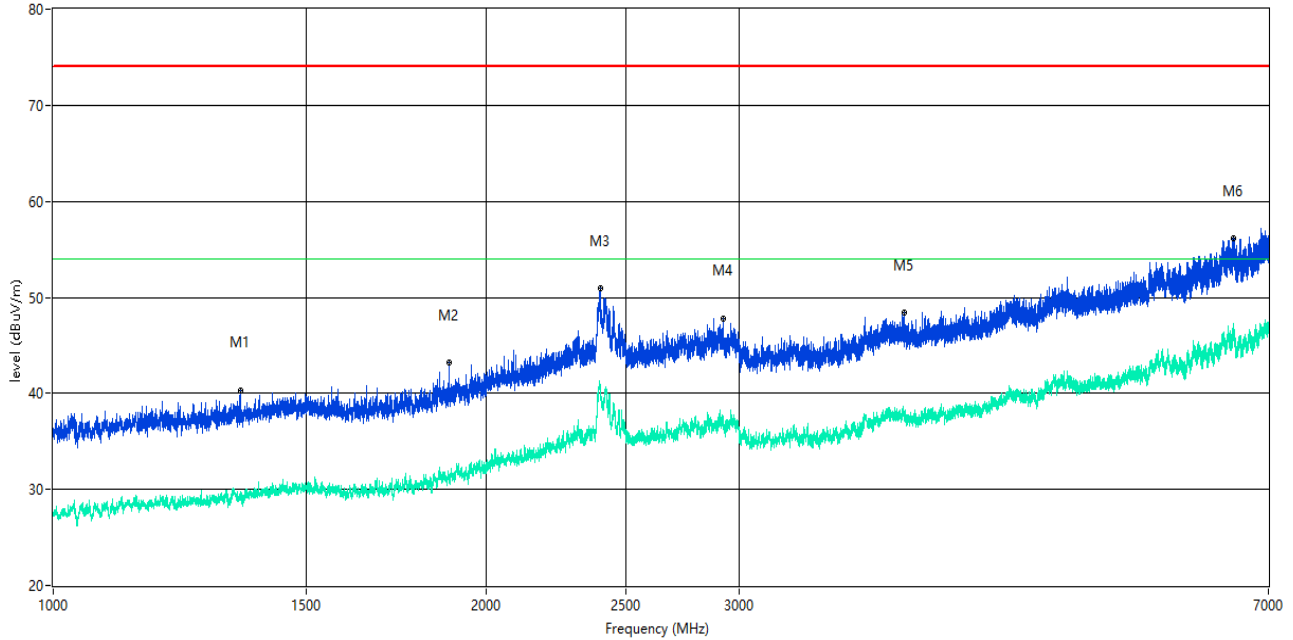

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1349.956	40.36	--	29.8	-12.29	74.0	--	54.0	24.20	283.40	150	Vertical	Pass
1884.389	43.16	--	31.5	-9.99	74.0	--	54.0	22.50	334.80	150	Vertical	Pass
2400.075	50.89	--	40.7	-0.08	74.0	--	54.0	13.30	212.50	150	Vertical	Pass
2922.260	47.81	--	37.5	-2.72	74.0	--	54.0	16.50	134.10	150	Vertical	Pass
3909.261	48.41	--	37.7	-2.86	74.0	--	54.0	16.30	273.70	150	Vertical	Pass
6618.673	56.11	--	46.7	8.02	74.0	--	54.0	7.30	2.40	150	Vertical	Pass

1 GHz to 7 GHz, ANT H 802.11b Low Channel


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

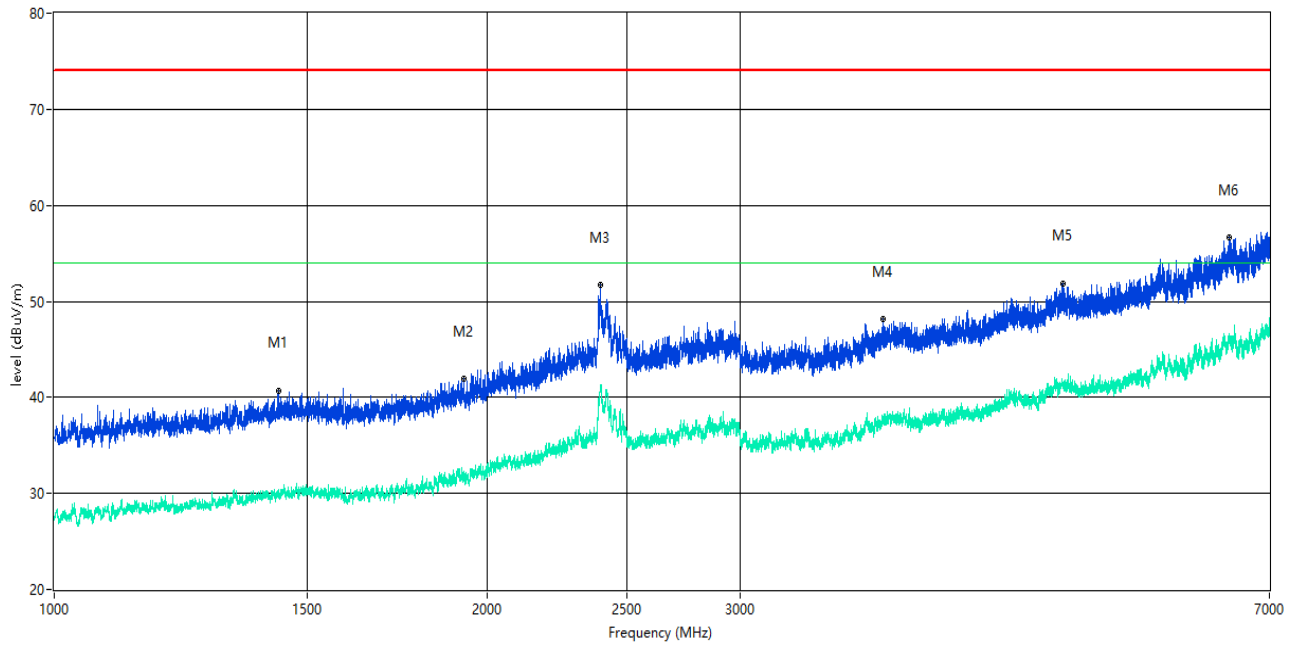

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1433.446	40.72	--	30.4	-11.84	74.0	--	54.0	23.60	193.30	150	Horizontal	Pass
1927.384	41.95	--	31.3	-9.93	74.0	--	54.0	22.70	88.60	150	Horizontal	Pass
2398.825	51.70	--	40.7	-0.05	74.0	--	54.0	13.30	200.00	150	Horizontal	Pass
3773.153	48.11	--	37.9	-2.49	74.0	--	54.0	16.10	358.50	150	Horizontal	Pass
5028.871	51.86	--	41.3	0.82	74.0	--	54.0	12.70	219.60	150	Horizontal	Pass
6560.055	56.62	--	46.2	8.14	74.0	--	54.0	7.80	38.90	150	Horizontal	Pass

1 GHz to 7 GHz, ANT V 802.11b Middle Channel


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

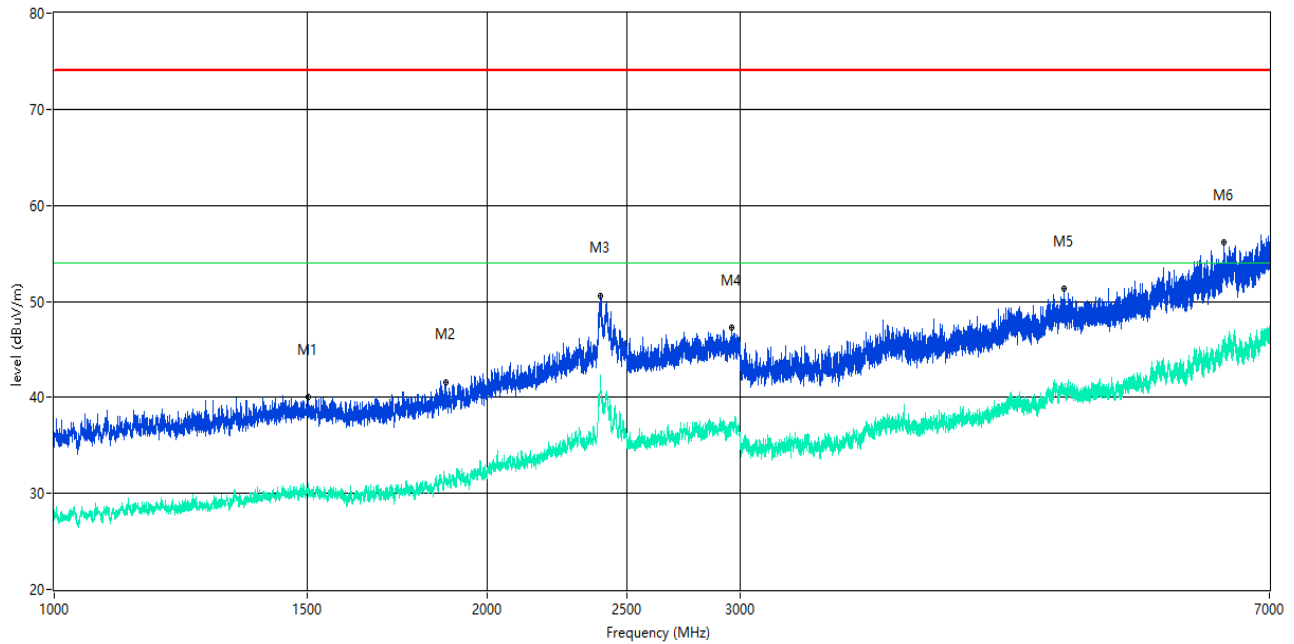

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1501.437	39.99	--	30.2	-11.62	74.0	--	54.0	23.80	19.00	150	Vertical	Pass
1872.891	41.53	--	31.0	-10.33	74.0	--	54.0	23.00	307.00	150	Vertical	Pass
2396.325	50.57	--	40.4	0.05	74.0	--	54.0	13.60	252.00	150	Vertical	Pass
2958.755	47.23	--	37.2	-3.23	74.0	--	54.0	16.80	23.00	150	Vertical	Pass
5036.370	51.31	--	40.9	1.06	74.0	--	54.0	13.10	35.00	150	Vertical	Pass
6510.186	56.13	--	45.8	8.14	74.0	--	54.0	8.20	79.00	150	Vertical	Pass

1 GHz to 7 GHz, ANT H 802.11b Middle Channel


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

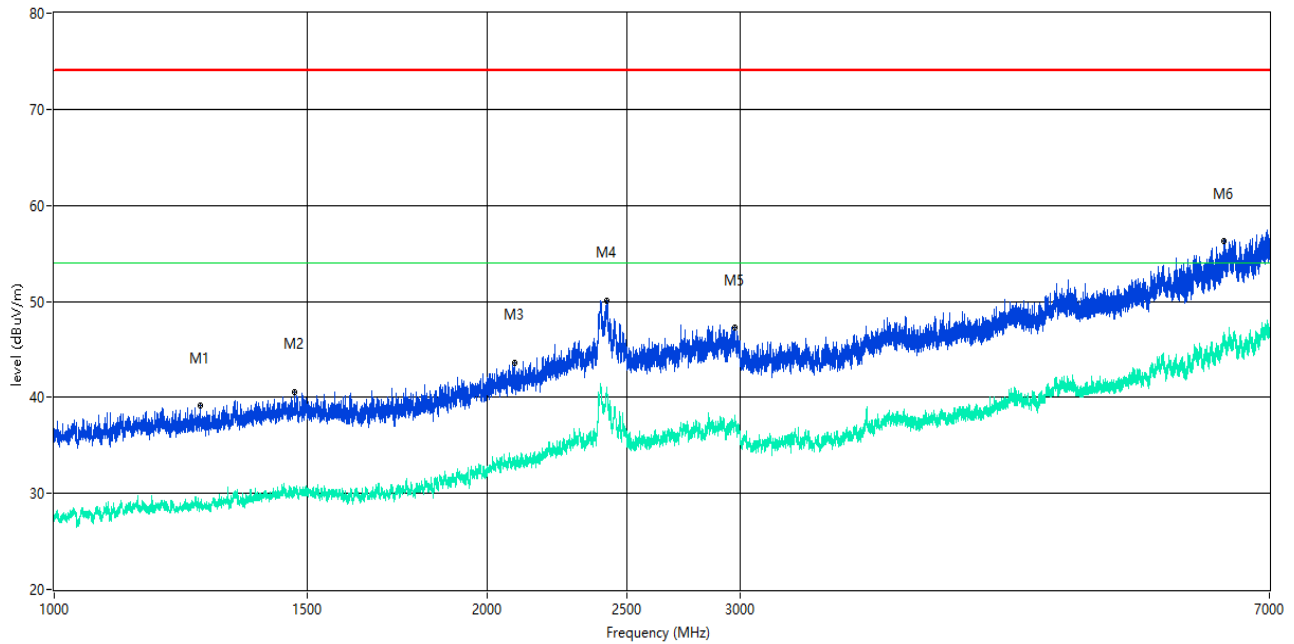

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1264.467	39.11	--	28.5	-12.20	74.0	--	54.0	25.50	253.90	150	Horizontal	Pass
1470.191	40.59	--	30.4	-11.52	74.0	--	54.0	23.60	220.30	150	Horizontal	Pass
2089.364	43.64	--	33.3	-7.82	74.0	--	54.0	20.70	111.30	150	Horizontal	Pass
2422.822	50.09	--	40.2	-0.85	74.0	--	54.0	13.80	104.40	150	Horizontal	Pass
2973.003	47.28	--	37.4	-3.11	74.0	--	54.0	16.60	40.00	150	Horizontal	Pass
6513.061	56.32	--	45.8	8.09	74.0	--	54.0	8.20	326.10	150	Horizontal	Pass

1 GHz to 7 GHz, ANT V 802.11b High Channel


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

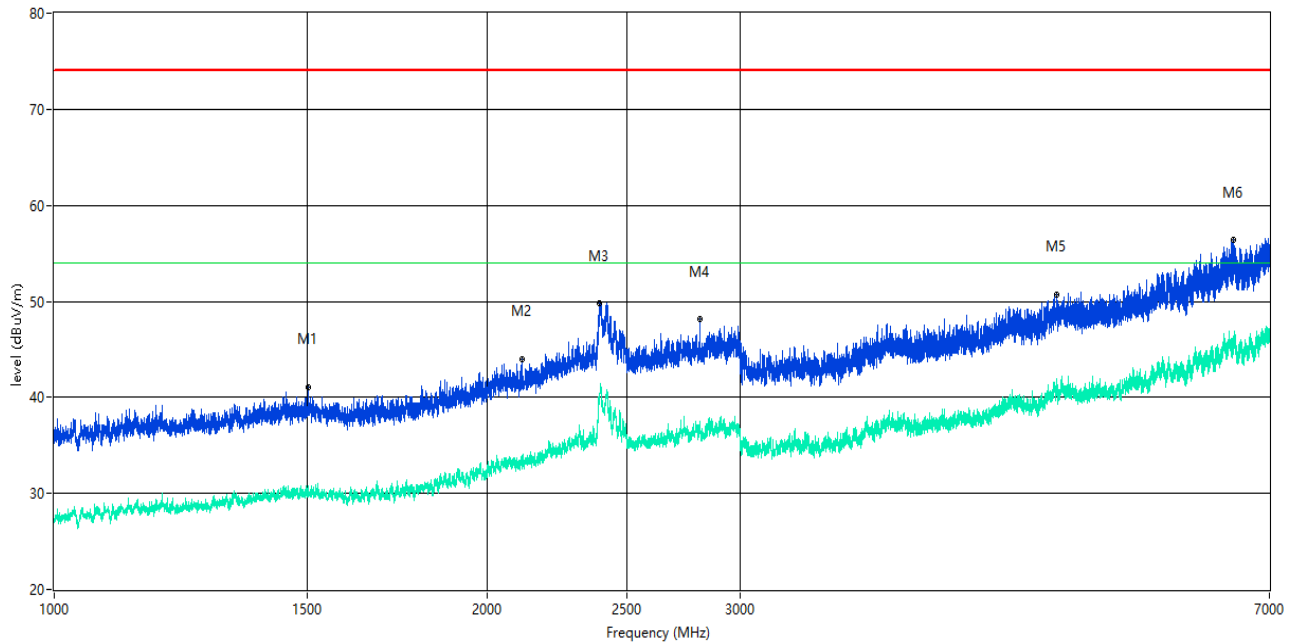

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1501.437	41.05	--	30.5	-11.62	74.0	--	54.0	23.50	53.00	150	Vertical	Pass
2114.111	43.97	--	33.9	-7.52	74.0	--	54.0	20.10	146.00	150	Vertical	Pass
2395.076	49.84	--	39.5	0.11	74.0	--	54.0	14.50	251.00	150	Vertical	Pass
2812.523	48.12	--	36.7	-3.12	74.0	--	54.0	17.30	22.00	150	Vertical	Pass
4981.252	50.68	--	40.8	1.49	74.0	--	54.0	13.20	13.00	150	Vertical	Pass
6613.173	56.45	--	46.4	7.68	74.0	--	54.0	7.60	315.00	150	Vertical	Pass

1 GHz to 7 GHz, ANT H 802.11b High Channel


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

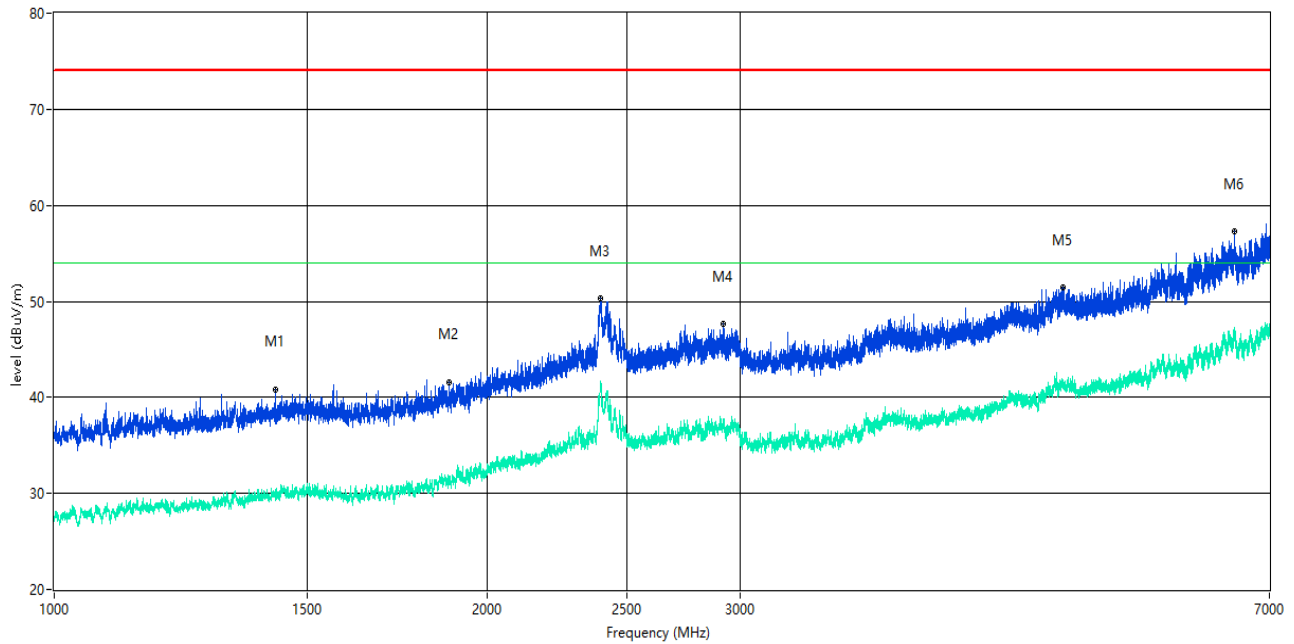

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1423.947	40.84	--	29.6	-11.89	74.0	--	54.0	24.40	0.00	150	Horizontal	Pass
1881.390	41.58	--	31.3	-10.18	74.0	--	54.0	22.70	117.10	150	Horizontal	Pass
2398.575	50.31	--	40.8	-0.05	74.0	--	54.0	13.20	299.70	150	Horizontal	Pass
2921.260	47.63	--	37.6	-2.74	74.0	--	54.0	16.40	174.70	150	Horizontal	Pass
5026.247	51.44	--	41.4	0.87	74.0	--	54.0	12.60	97.70	150	Horizontal	Pass
6616.923	57.27	--	46.4	7.95	74.0	--	54.0	7.60	258.80	150	Horizontal	Pass

1 GHz to 7 GHz, ANT V 802.11g Low Channel


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

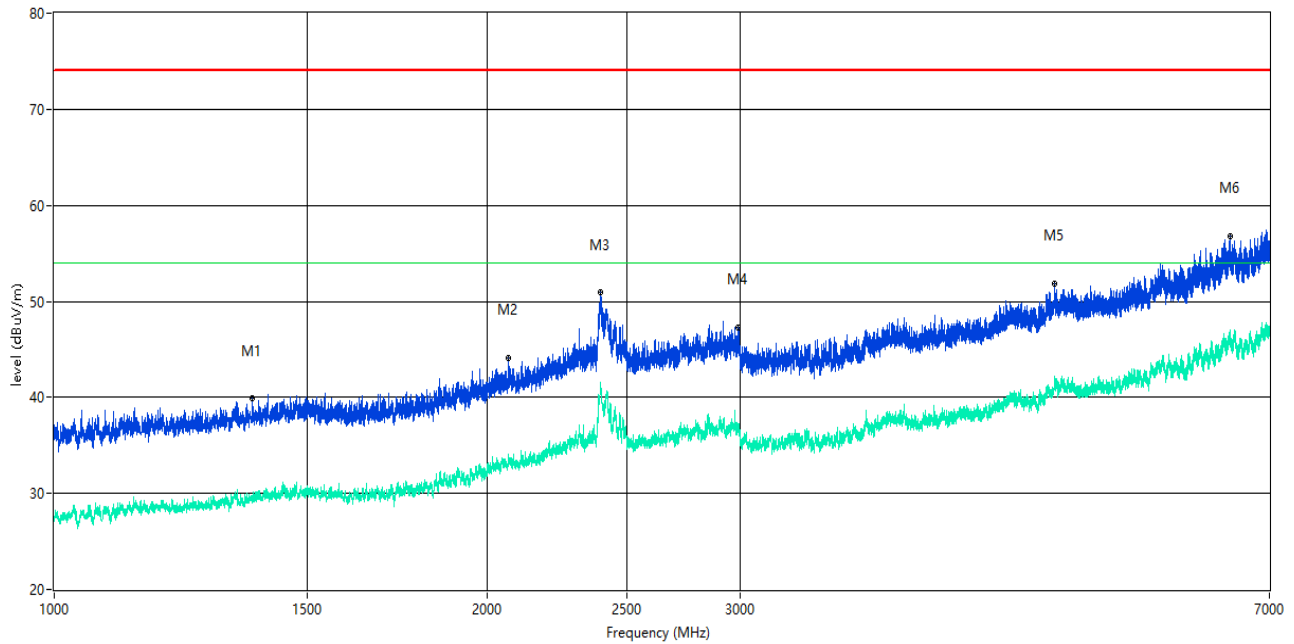

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1372.703	39.85	--	29.4	-12.13	74.0	--	54.0	24.60	102.00	150	Vertical	Pass
2068.366	44.13	--	33.5	-8.10	74.0	--	54.0	20.50	95.10	150	Vertical	Pass
2398.325	50.91	--	41.1	-0.04	74.0	--	54.0	12.90	183.30	150	Vertical	Pass
2988.501	47.30	--	37.0	-2.96	74.0	--	54.0	17.00	159.60	150	Vertical	Pass
4964.754	51.85	--	42.0	1.43	74.0	--	54.0	12.00	24.30	150	Vertical	Pass
6573.428	56.83	--	45.7	7.85	74.0	--	54.0	8.30	237.10	150	Vertical	Pass

1 GHz to 7 GHz, ANT H 802.11g Low Channel


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

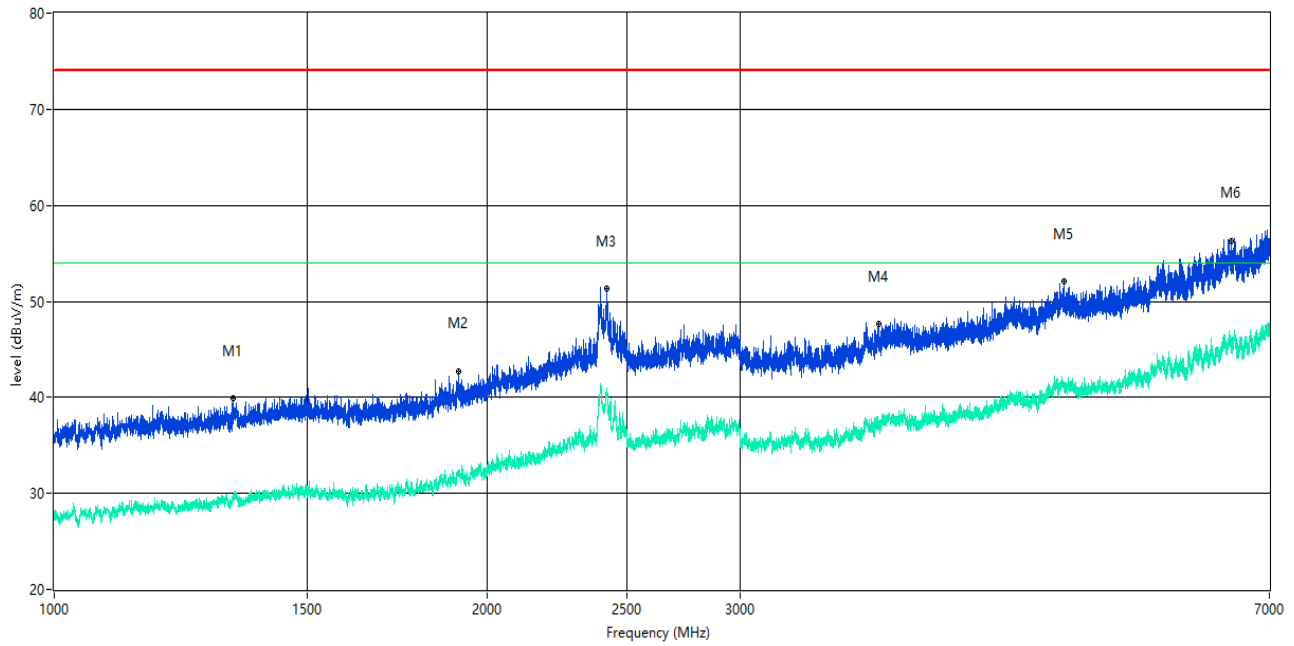

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1332.458	39.92	--	29.8	-11.85	74.0	--	54.0	24.20	75.90	150	Horizontal	Pass
1911.136	42.77	--	32.0	-9.11	74.0	--	54.0	22.00	154.50	150	Horizontal	Pass
2424.322	51.28	--	40.6	-0.92	74.0	--	54.0	13.40	240.90	150	Horizontal	Pass
3743.157	47.60	--	37.1	-2.96	74.0	--	54.0	16.90	149.60	150	Horizontal	Pass
5037.120	52.05	--	41.2	1.06	74.0	--	54.0	12.80	269.90	150	Horizontal	Pass
6590.926	56.34	--	45.4	7.49	74.0	--	54.0	8.60	181.30	150	Horizontal	Pass

1 GHz to 7 GHz, ANT V 802.11g Middle Channel


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

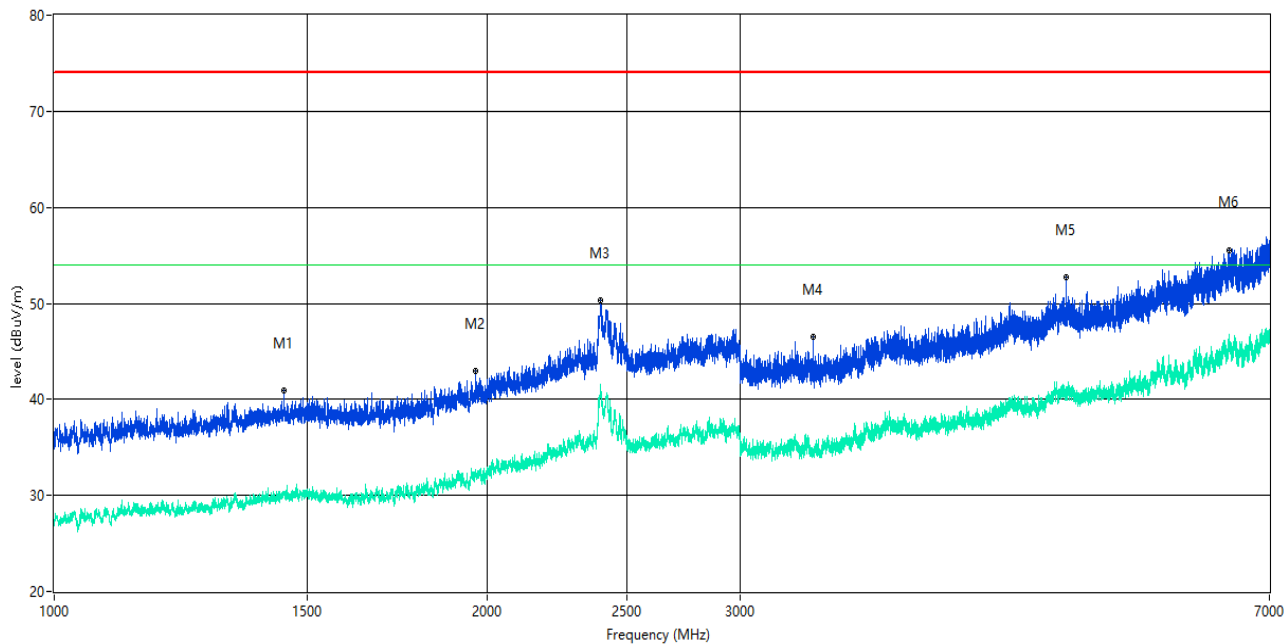

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1445.194	40.90	--	30.3	-11.51	74.0	--	54.0	23.70	2.00	150	Vertical	Pass
1964.379	42.95	--	32.2	-8.93	74.0	--	54.0	21.80	302.00	150	Vertical	Pass
2397.825	50.27	--	40.8	-0.03	74.0	--	54.0	13.20	246.00	150	Vertical	Pass
3368.954	46.46	--	34.6	-5.67	74.0	--	54.0	19.40	341.00	150	Vertical	Pass
5055.118	52.72	--	41.3	0.89	74.0	--	54.0	12.70	18.00	150	Vertical	Pass
6564.929	55.52	--	45.9	8.26	74.0	--	54.0	8.10	330.00	150	Vertical	Pass

1 GHz to 7 GHz, ANT H 802.11g Middle Channel


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

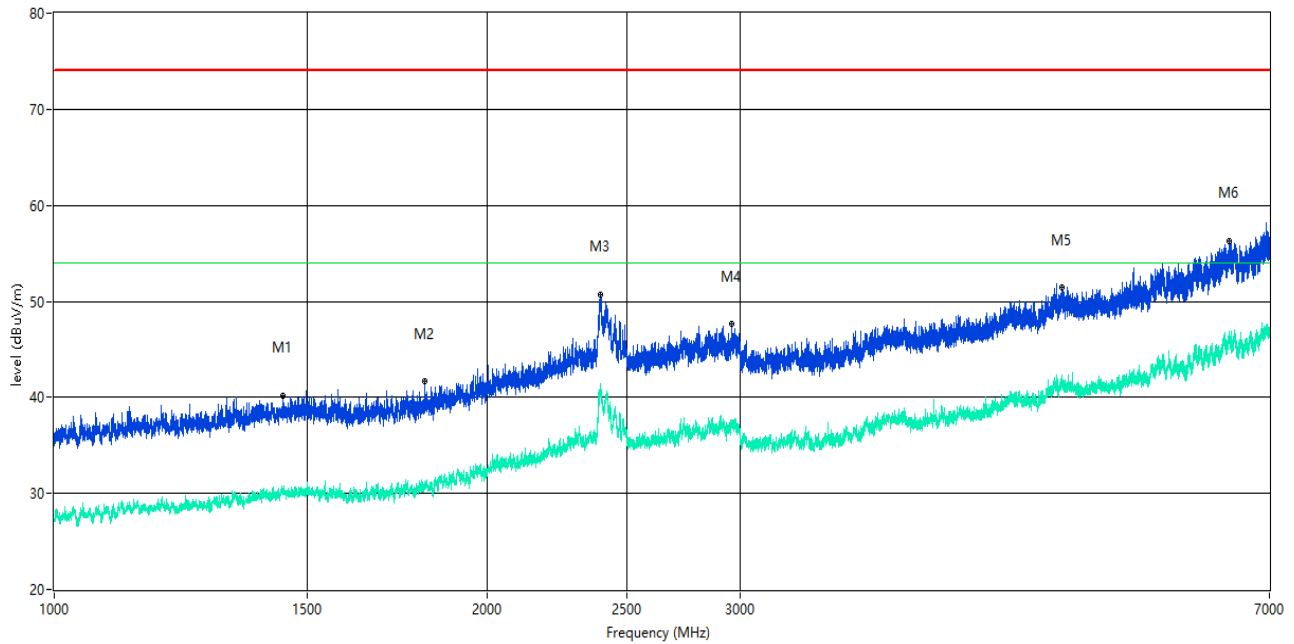

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1440.945	40.23	--	29.8	-11.59	74.0	--	54.0	24.20	130.90	150	Horizontal	Pass
1810.399	41.66	--	31.1	-10.82	74.0	--	54.0	22.90	100.50	150	Horizontal	Pass
2399.575	50.74	--	41.0	-0.07	74.0	--	54.0	13.00	270.80	150	Horizontal	Pass
2959.005	47.65	--	37.1	-3.22	74.0	--	54.0	16.90	66.70	150	Horizontal	Pass
5023.997	51.40	--	41.3	0.95	74.0	--	54.0	12.70	302.10	150	Horizontal	Pass
6563.805	56.32	--	46.4	8.42	74.0	--	54.0	7.60	182.40	150	Horizontal	Pass

1 GHz to 7 GHz, ANT V 802.11g High Channel


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

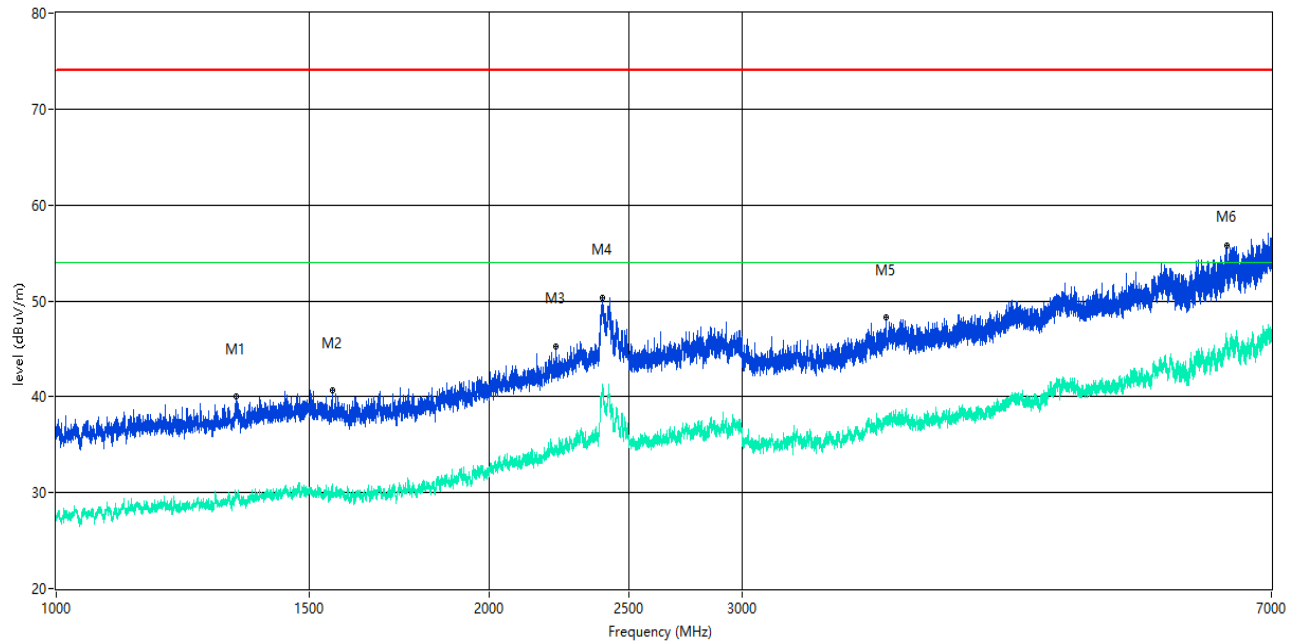

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1333.958	39.99	--	29.9	-11.69	74.0	--	54.0	24.10	72.00	150	Vertical	Pass
1557.430	40.62	--	30.9	-11.84	74.0	--	54.0	23.10	60.00	150	Vertical	Pass
2225.097	45.28	--	34.6	-6.46	74.0	--	54.0	19.40	34.00	150	Vertical	Pass
2398.825	50.28	--	41.1	-0.05	74.0	--	54.0	12.90	257.00	150	Vertical	Pass
3776.903	48.29	--	37.6	-2.56	74.0	--	54.0	16.40	48.00	150	Vertical	Pass
6521.310	55.74	--	45.3	7.68	74.0	--	54.0	8.70	126.00	150	Vertical	Pass

1 GHz to 7 GHz, ANT H 802.11g High Channel


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

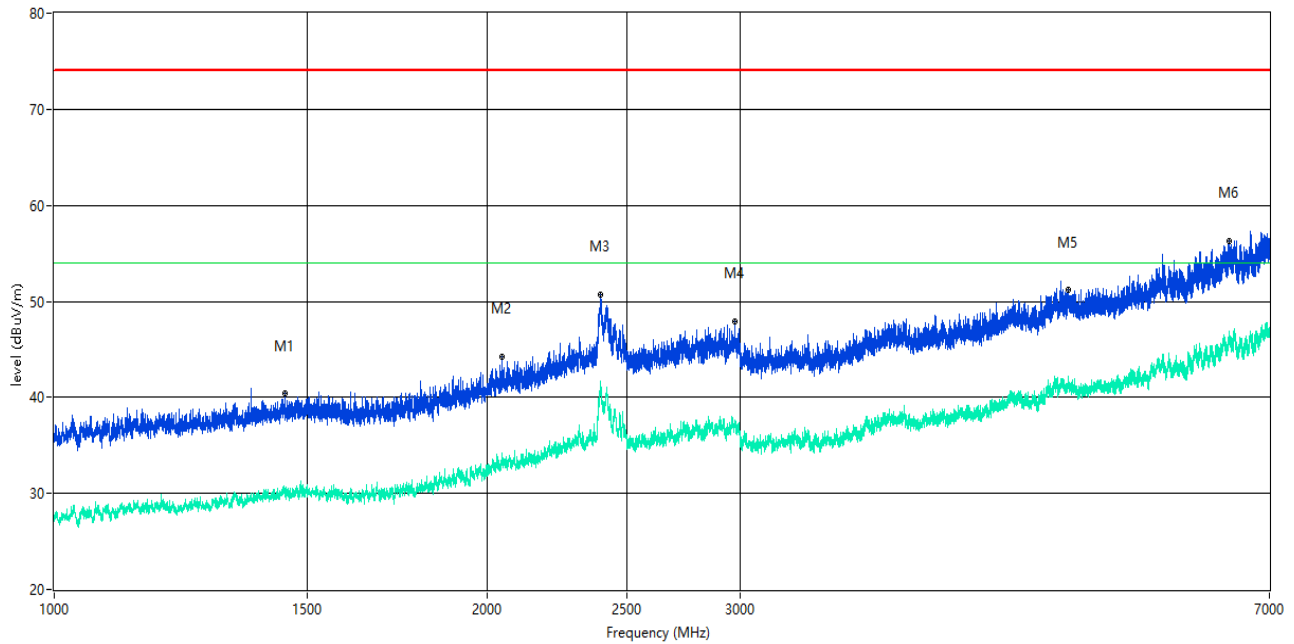

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1446.944	40.41	--	30.1	-11.64	74.0	--	54.0	23.90	266.40	150	Horizontal	Pass
2047.369	44.27	--	34.2	-7.86	74.0	--	54.0	19.80	344.50	150	Horizontal	Pass
2398.325	50.71	--	41.2	-0.04	74.0	--	54.0	12.80	153.50	150	Horizontal	Pass
2972.503	47.92	--	37.2	-3.12	74.0	--	54.0	16.80	50.20	150	Horizontal	Pass
5074.991	51.21	--	41.8	1.95	74.0	--	54.0	12.20	207.60	150	Horizontal	Pass
6562.430	56.22	--	46.5	8.37	74.0	--	54.0	7.50	77.00	150	Horizontal	Pass

1 GHz to 7 GHz, ANT V 802.11n20 Low Channel


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

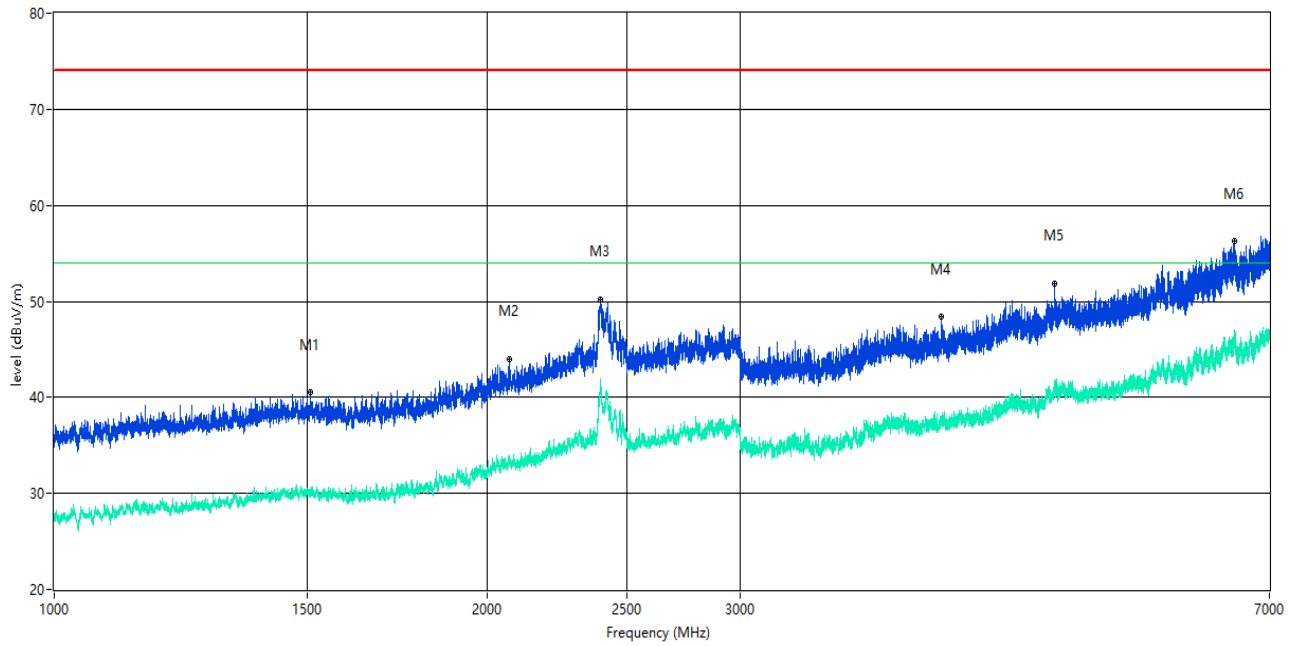

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1506.937	40.61	--	30.4	-11.73	74.0	--	54.0	23.60	155.00	150	Vertical	Pass
2071.616	43.96	--	33.1	-7.62	74.0	--	54.0	20.90	245.40	150	Vertical	Pass
2398.075	50.17	--	41.0	-0.03	74.0	--	54.0	13.00	188.80	150	Vertical	Pass
4140.982	48.40	--	37.7	-2.12	74.0	--	54.0	16.30	12.00	150	Vertical	Pass
4964.754	51.89	--	41.3	1.43	74.0	--	54.0	12.70	12.00	150	Vertical	Pass
6619.048	56.30	--	45.9	7.99	74.0	--	54.0	8.10	9.00	150	Vertical	Pass

1 GHz to 7 GHz, ANT H 802.11n20 Low Channel


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

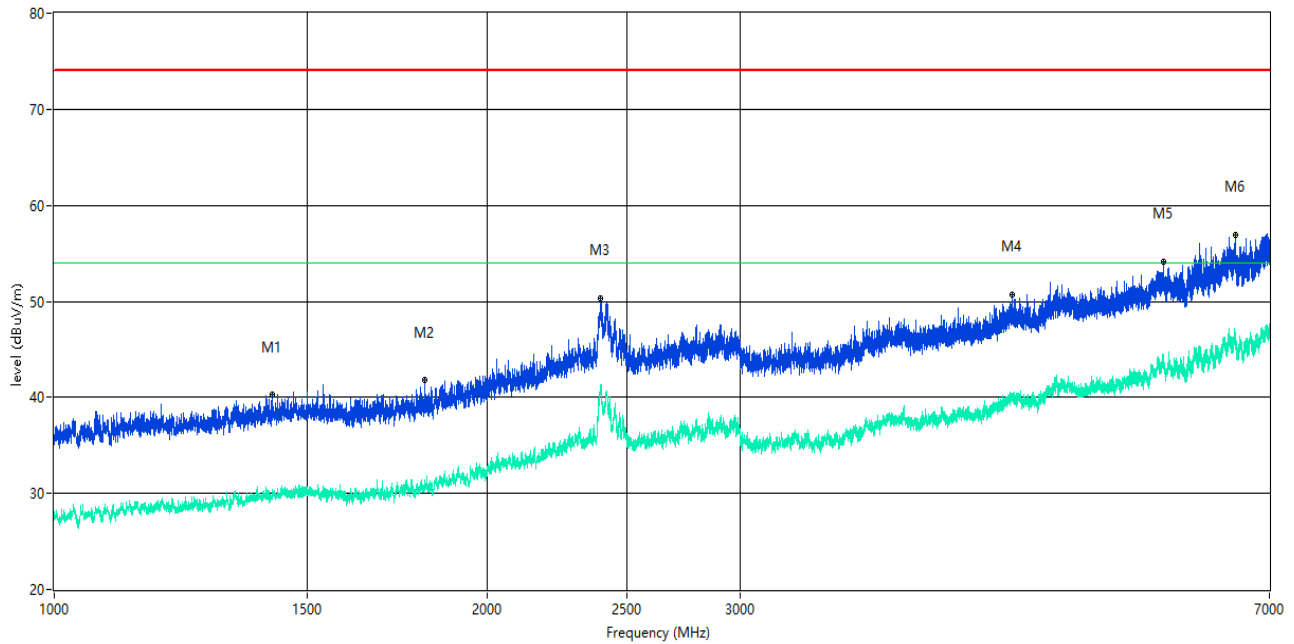

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1418.948	40.27	--	29.9	-11.74	74.0	--	54.0	24.10	327.20	150	Horizontal	Pass
1811.399	41.81	--	30.7	-10.72	74.0	--	54.0	23.30	167.80	150	Horizontal	Pass
2399.075	50.37	--	41.3	-0.06	74.0	--	54.0	12.70	283.20	150	Horizontal	Pass
4639.670	50.71	--	40.1	-0.13	74.0	--	54.0	13.90	356.90	150	Horizontal	Pass
5904.012	54.18	--	44.1	4.45	74.0	--	54.0	9.90	307.00	150	Horizontal	Pass
6626.422	56.85	--	46.0	7.76	74.0	--	54.0	8.00	310.80	150	Horizontal	Pass

1 GHz to 7 GHz, ANT V 802.11n20 Middle Channel


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

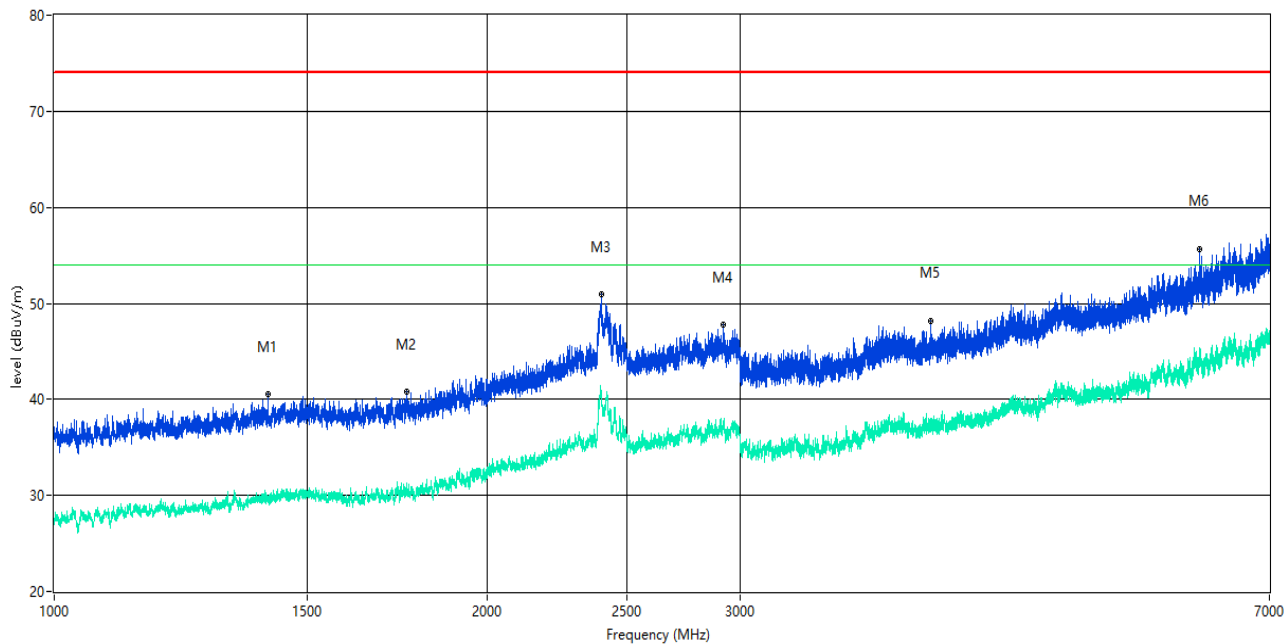

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1408.699	40.49	--	29.9	-11.88	74.0	--	54.0	24.10	33.00	150	Vertical	Pass
1758.405	40.75	--	31.2	-10.71	74.0	--	54.0	22.80	295.00	150	Vertical	Pass
2401.325	50.98	--	40.1	-0.11	74.0	--	54.0	13.90	144.00	150	Vertical	Pass
2921.510	47.77	--	37.3	-2.72	74.0	--	54.0	16.70	193.00	150	Vertical	Pass
4069.366	48.19	--	38.0	-2.79	74.0	--	54.0	16.00	159.00	150	Vertical	Pass
6258.218	55.69	--	45.1	5.88	74.0	--	54.0	8.90	297.00	150	Vertical	Pass

1 GHz to 7 GHz, ANT H 802.11n20 Middle Channel


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

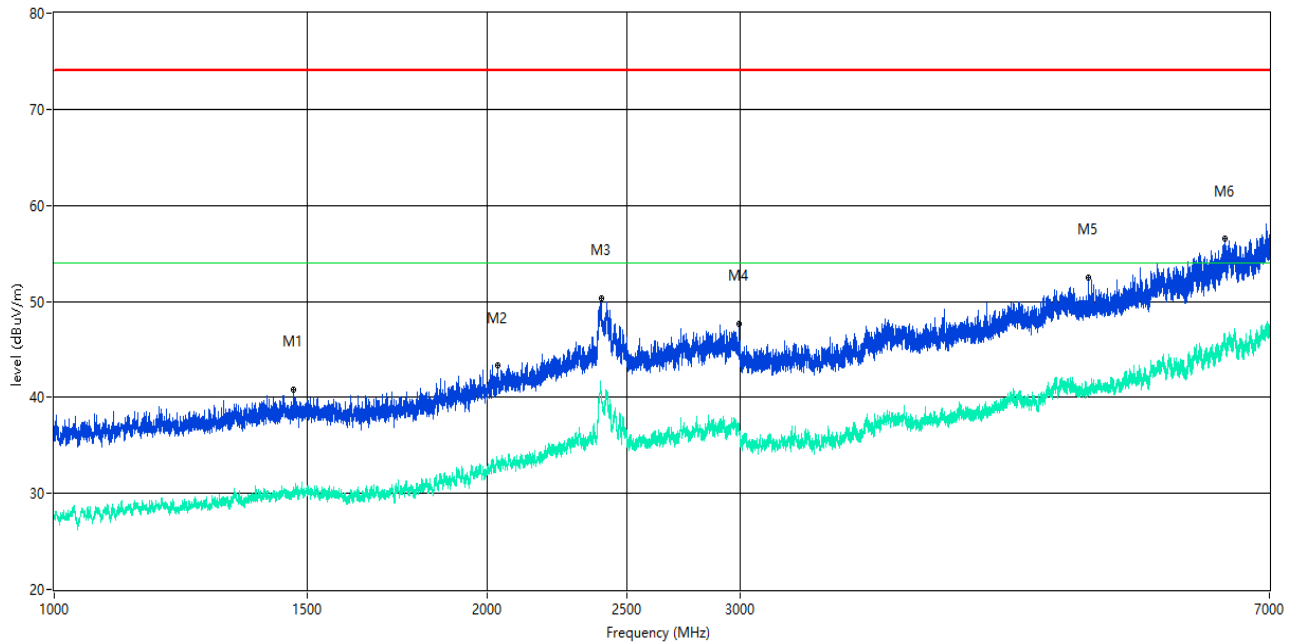

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1467.942	40.84	--	29.9	-11.66	74.0	--	54.0	24.10	103.70	150	Horizontal	Pass
2033.121	43.34	--	33.4	-7.71	74.0	--	54.0	20.60	219.60	150	Horizontal	Pass
2400.325	50.36	--	40.7	-0.09	74.0	--	54.0	13.30	29.40	150	Horizontal	Pass
2994.001	47.67	--	37.1	-3.07	74.0	--	54.0	16.90	93.60	150	Horizontal	Pass
5242.220	52.47	--	40.8	0.79	74.0	--	54.0	13.20	352.30	150	Horizontal	Pass
6515.436	56.56	--	45.6	7.95	74.0	--	54.0	8.40	87.80	150	Horizontal	Pass

1 GHz to 7 GHz, ANT V 802.11n20 High Channel


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

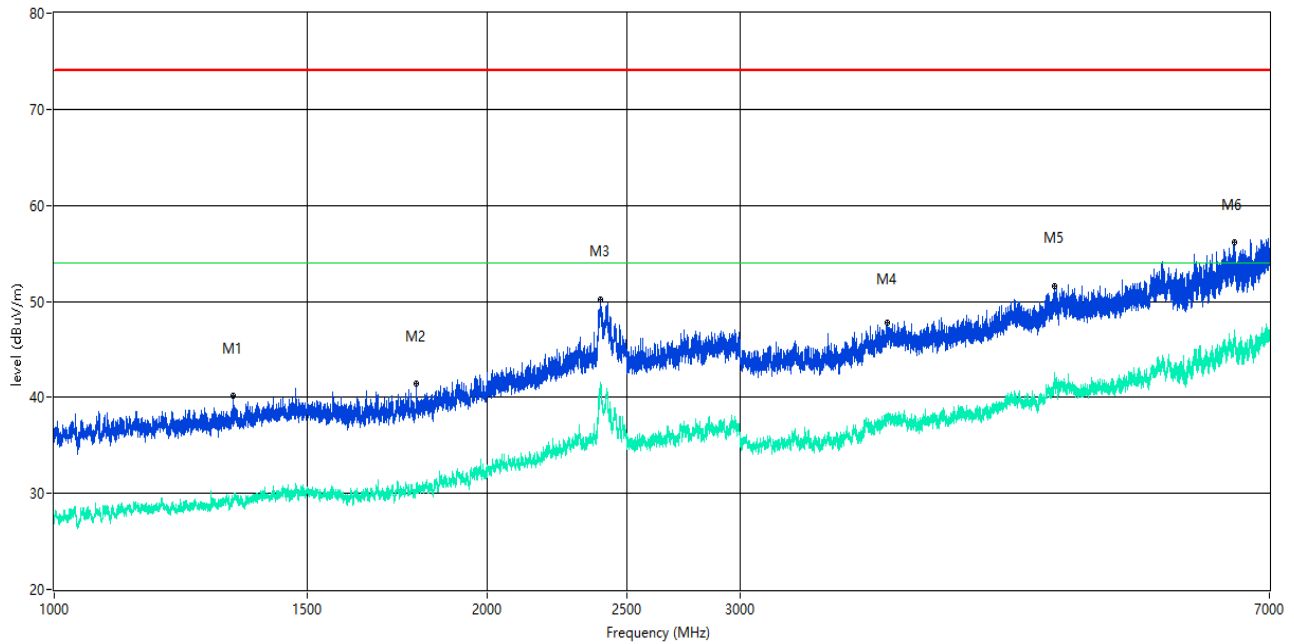

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1331.209	40.11	--	29.3	-12.02	74.0	--	54.0	24.70	1.00	150	Vertical	Pass
1786.902	41.50	--	31.0	-10.75	74.0	--	54.0	23.00	341.00	150	Vertical	Pass
2399.325	50.20	--	41.0	-0.07	74.0	--	54.0	13.00	112.00	150	Vertical	Pass
3796.025	47.75	--	38.3	-2.73	74.0	--	54.0	15.70	255.00	150	Vertical	Pass
4960.255	51.63	--	41.4	1.11	74.0	--	54.0	12.60	150.00	150	Vertical	Pass
6615.923	56.20	--	45.5	7.88	74.0	--	54.0	8.50	231.00	150	Vertical	Pass

1 GHz to 7 GHz, ANT H 802.11n20 High Channel


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_1GHz-7GHz

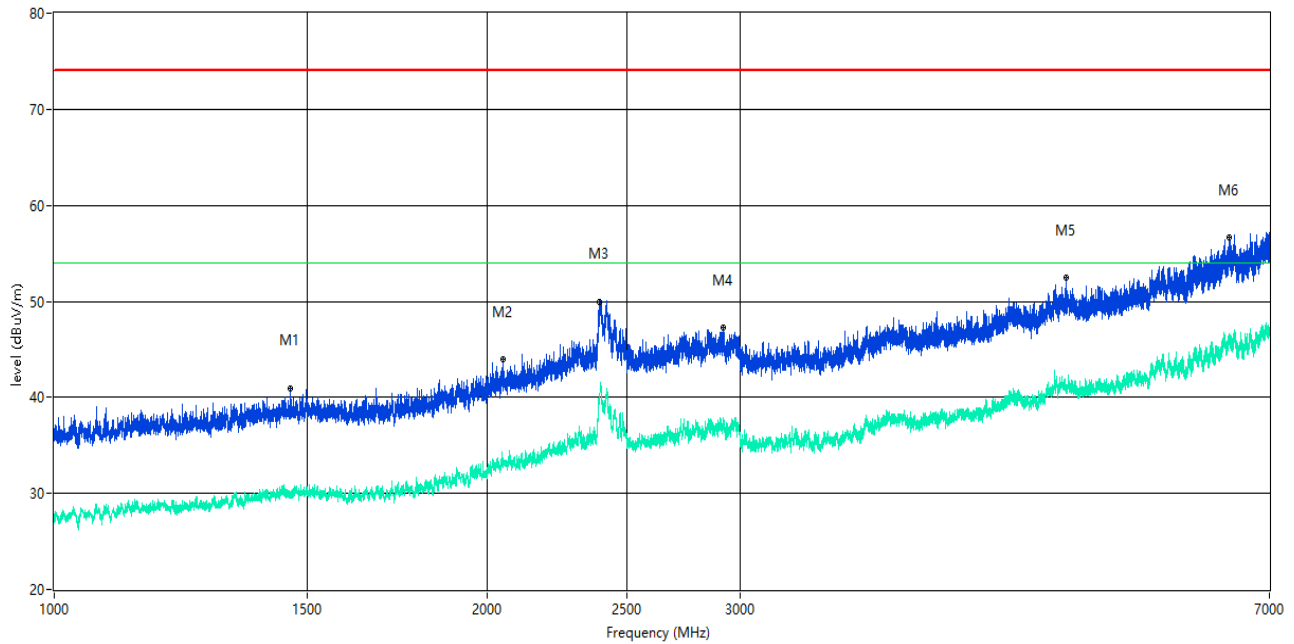

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
1458.443	40.97	--	29.7	-11.91	74.0	--	54.0	24.30	81.30	150	Horizontal	Pass
2052.618	43.93	--	33.2	-8.18	74.0	--	54.0	20.80	1.10	150	Horizontal	Pass
2392.076	49.89	--	40.1	-0.10	74.0	--	54.0	13.90	330.60	150	Horizontal	Pass
2919.760	47.22	--	37.5	-2.84	74.0	--	54.0	16.50	320.50	150	Horizontal	Pass
5058.118	52.46	--	41.4	0.97	74.0	--	54.0	12.60	244.40	150	Horizontal	Pass
6567.679	56.61	--	46.3	7.85	74.0	--	54.0	7.70	259.10	150	Horizontal	Pass

7 GHz to 18 GHz, ANT V 802.11b Low Channel


R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

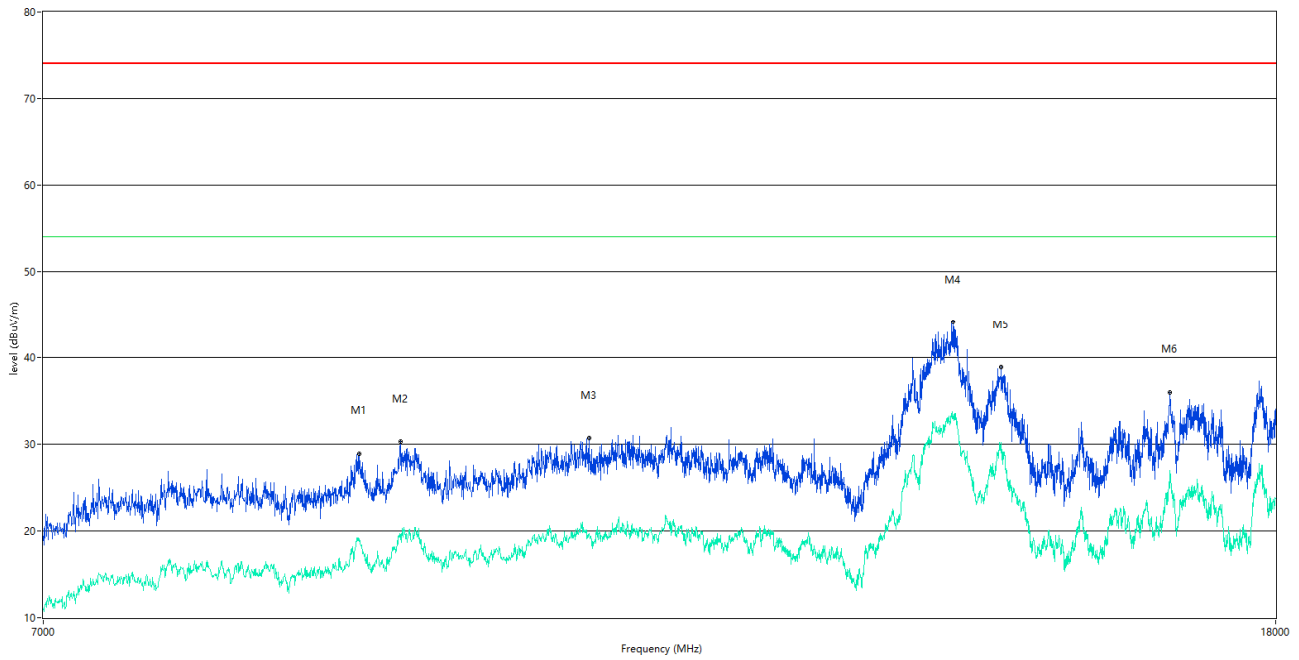

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8919.020	28.93	--	19.1	-32.29	74.0	--	54.0	34.90	36.00	150	Vertical	Pass
9207.698	30.29	--	19.2	-32.20	74.0	--	54.0	34.80	295.00	150	Vertical	Pass
10634.591	30.66	--	19.7	-26.15	74.0	--	54.0	34.30	4.00	150	Vertical	Pass
14060.235	44.16	--	32.9	-6.35	74.0	--	54.0	21.10	126.00	150	Vertical	Pass
14588.103	38.89	--	29.8	-10.79	74.0	--	54.0	24.20	171.00	150	Vertical	Pass
16600.600	35.98	--	27.0	-10.26	74.0	--	54.0	27.00	238.00	150	Vertical	Pass

7 GHz to 18 GHz, ANT H 802.11b Low Channel


R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

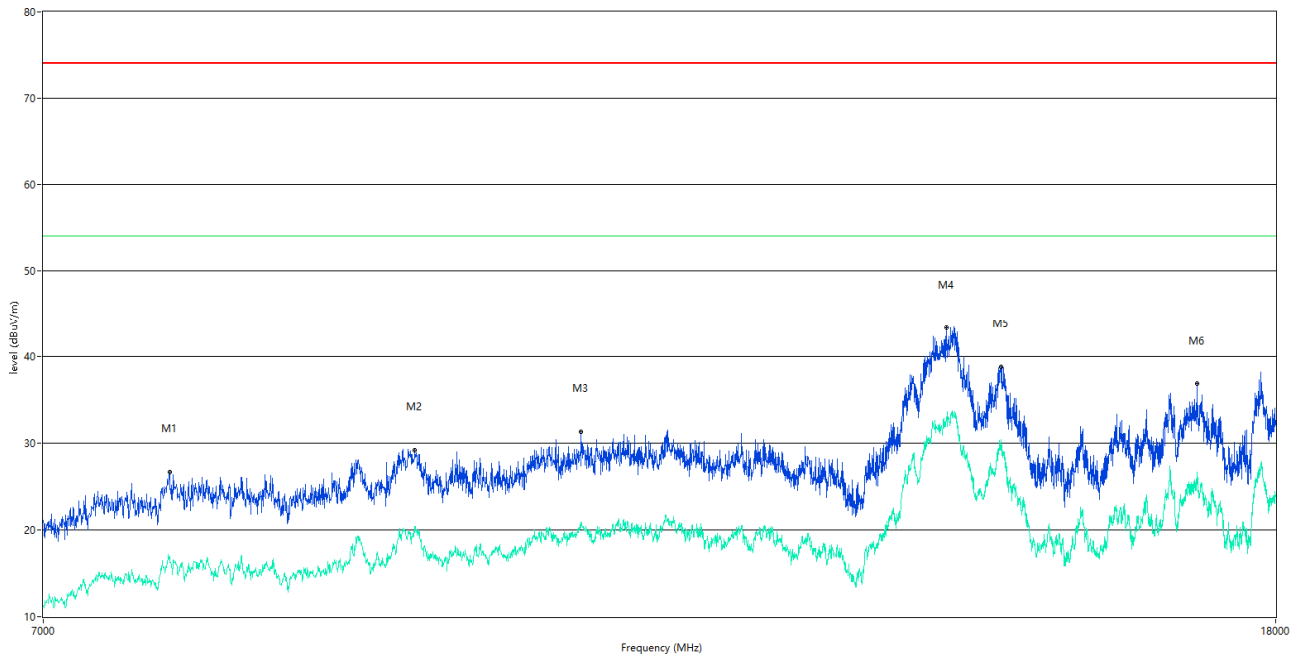

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7712.072	26.68	--	17.0	-35.81	74.0	--	54.0	37.00	140.00	150	Horizontal	Pass
9306.673	29.23	--	20.4	-31.10	74.0	--	54.0	33.60	131.00	150	Horizontal	Pass
10571.357	31.35	--	20.9	-26.38	74.0	--	54.0	33.10	92.00	150	Horizontal	Pass
13983.254	43.37	--	32.7	-6.99	74.0	--	54.0	21.30	94.00	150	Horizontal	Pass
14585.354	38.79	--	29.6	-10.86	74.0	--	54.0	24.40	317.00	150	Horizontal	Pass
16949.763	36.83	--	26.4	-10.20	74.0	--	54.0	27.60	105.00	150	Horizontal	Pass

7 GHz to 18 GHz, ANT V 802.11b Middle Channel


R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

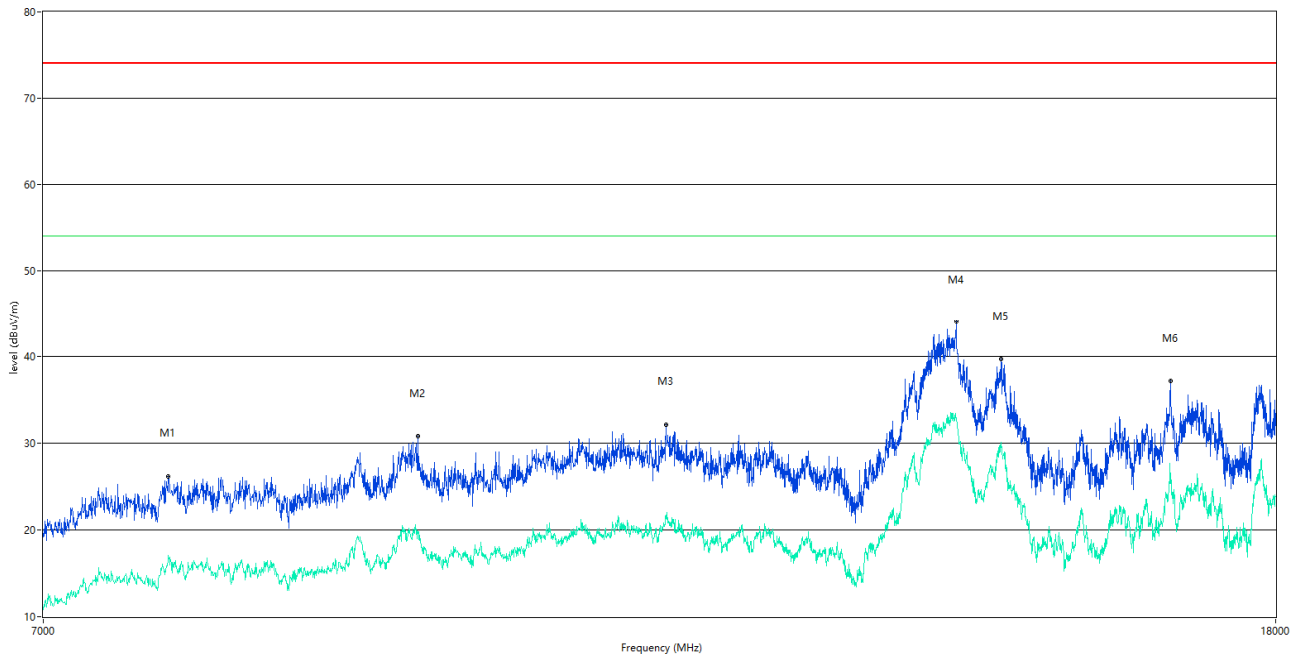

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7703.824	26.19	--	17.0	-35.80	74.0	--	54.0	37.00	242.00	150	Vertical	Pass
9325.919	30.76	--	19.8	-31.60	74.0	--	54.0	34.20	114.00	150	Vertical	Pass
11280.680	32.16	--	21.3	-24.72	74.0	--	54.0	32.70	146.00	150	Vertical	Pass
14090.477	44.07	--	33.0	-6.88	74.0	--	54.0	21.00	156.00	150	Vertical	Pass
14582.604	39.71	--	29.9	-10.98	74.0	--	54.0	24.10	340.00	150	Vertical	Pass
16603.349	37.16	--	26.6	-10.25	74.0	--	54.0	27.40	218.00	150	Vertical	Pass

7 GHz to 18 GHz, ANT H 802.11b Middle Channel


R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

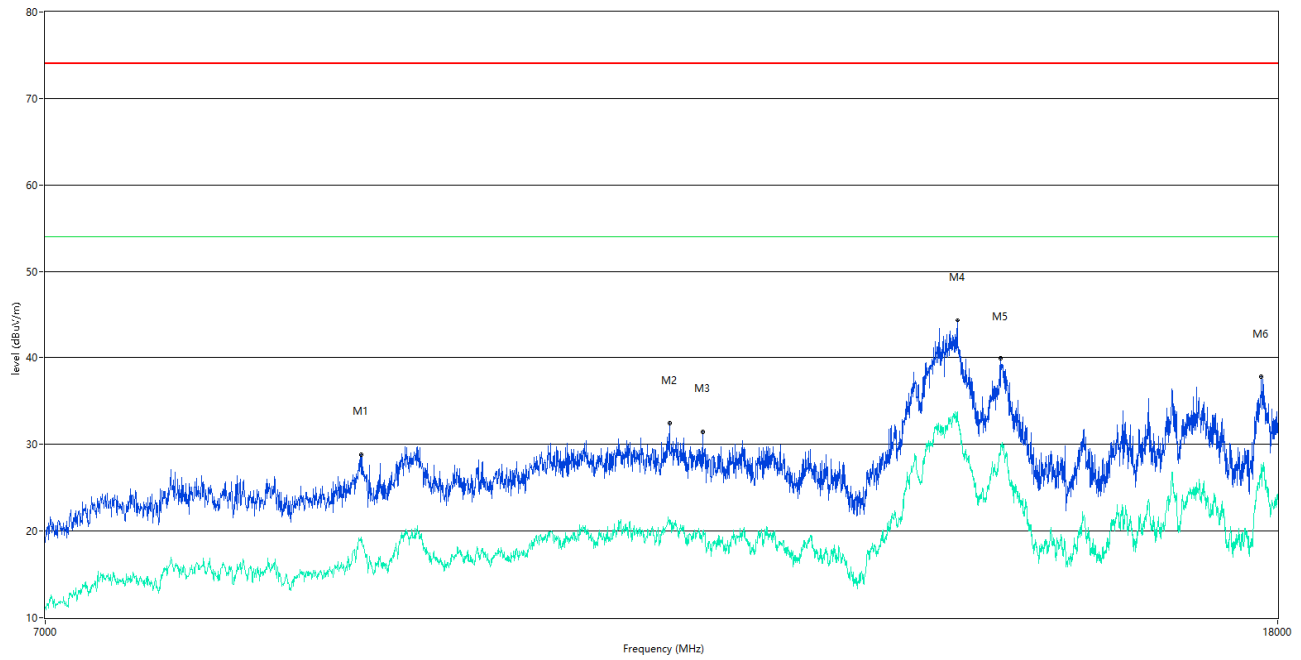

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8919.020	28.81	--	19.3	-32.29	74.0	--	54.0	34.70	185.00	150	Horizontal	Pass
11294.426	32.38	--	21.3	-24.62	74.0	--	54.0	32.70	39.00	150	Horizontal	Pass
11583.104	31.42	--	19.5	-23.72	74.0	--	54.0	34.50	275.00	150	Horizontal	Pass
14082.229	44.38	--	33.7	-6.62	74.0	--	54.0	20.30	349.00	150	Horizontal	Pass
14560.610	39.89	--	29.9	-10.95	74.0	--	54.0	24.10	118.00	150	Horizontal	Pass
17771.807	37.80	--	27.6	-8.51	74.0	--	54.0	26.40	314.00	150	Horizontal	Pass

7 GHz to 18 GHz, ANT V 802.11b High Channel


R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

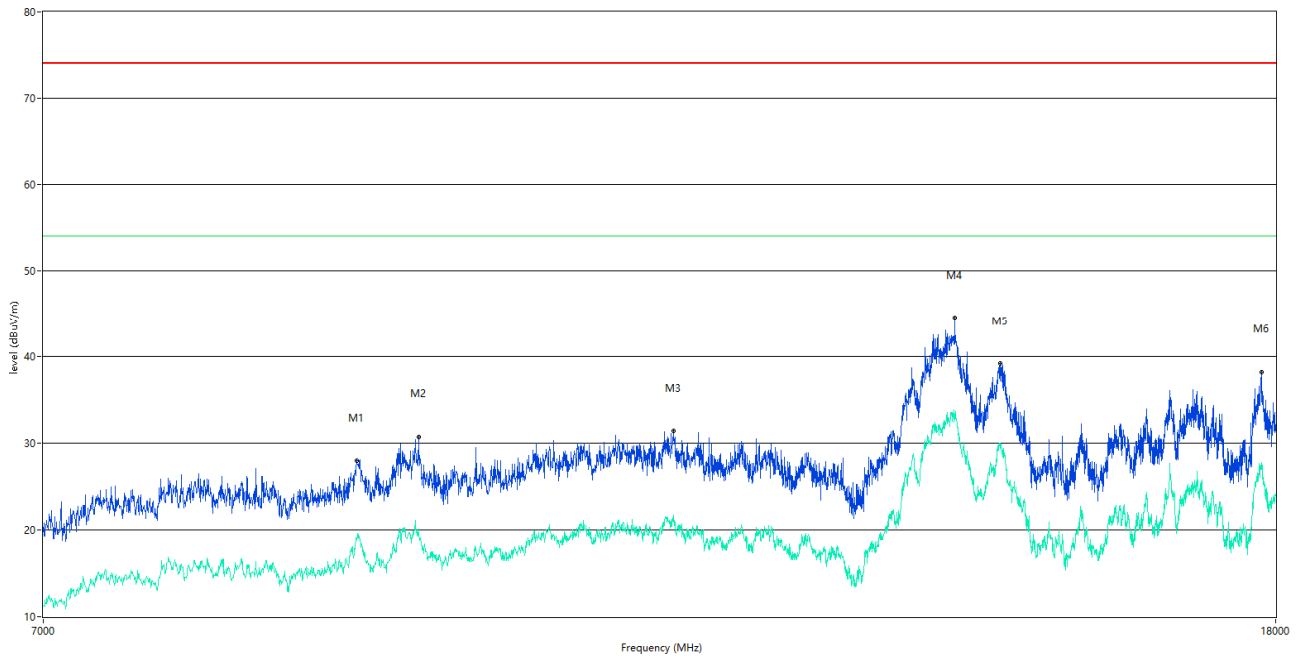

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8899.775	28.01	--	18.9	-32.30	74.0	--	54.0	35.10	142.00	150	Vertical	Pass
9331.417	30.71	--	20.1	-31.85	74.0	--	54.0	33.90	328.00	150	Vertical	Pass
11343.914	31.39	--	20.9	-24.24	74.0	--	54.0	33.10	311.00	150	Vertical	Pass
14073.982	44.58	--	33.1	-6.53	74.0	--	54.0	20.90	333.00	150	Vertical	Pass
14571.607	39.17	--	29.7	-11.13	74.0	--	54.0	24.30	90.00	150	Vertical	Pass
17807.548	38.14	--	27.4	-8.07	74.0	--	54.0	26.60	278.00	150	Vertical	Pass

7 GHz to 18 GHz, ANT H 802.11b High Channel


R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

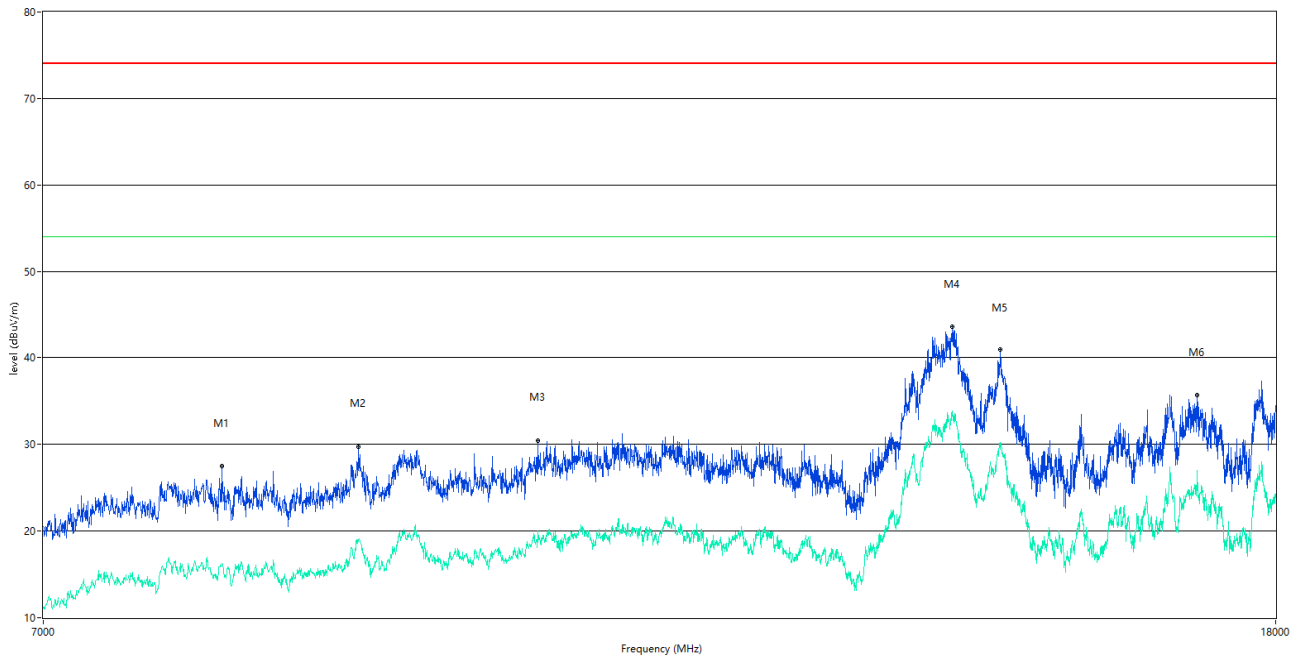

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8025.494	27.47	--	16.3	-36.94	74.0	--	54.0	37.70	218.00	150	Horizontal	Pass
8913.522	29.71	--	18.8	-32.36	74.0	--	54.0	35.20	2.00	150	Horizontal	Pass
10227.693	30.45	--	20.0	-28.19	74.0	--	54.0	34.00	83.00	150	Horizontal	Pass
14046.488	43.52	--	33.6	-6.60	74.0	--	54.0	20.40	28.00	150	Horizontal	Pass
14577.106	40.89	--	29.4	-11.11	74.0	--	54.0	24.60	119.00	150	Horizontal	Pass
16949.763	35.66	--	26.9	-10.20	74.0	--	54.0	27.10	210.00	150	Horizontal	Pass

7 GHz to 18 GHz, ANT V 802.11g Low Channel


R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

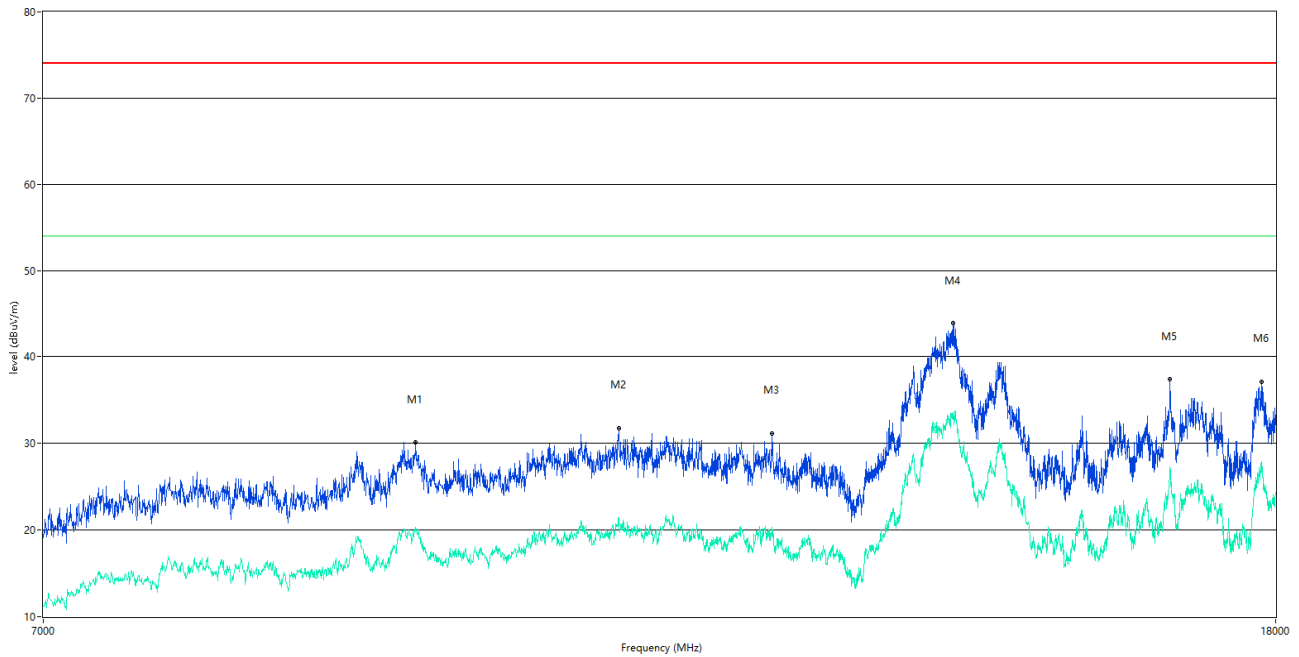

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
9312.172	30.14	--	20.3	-31.06	74.0	--	54.0	33.70	176.00	150	Vertical	Pass
10879.280	31.76	--	21.0	-25.20	74.0	--	54.0	33.00	311.00	150	Vertical	Pass
12237.441	31.14	--	20.3	-24.42	74.0	--	54.0	33.70	349.00	150	Vertical	Pass
14060.235	43.86	--	33.2	-6.35	74.0	--	54.0	20.80	169.00	150	Vertical	Pass
16600.600	37.33	--	26.7	-10.26	74.0	--	54.0	27.30	115.00	150	Vertical	Pass
17810.297	37.07	--	27.7	-8.11	74.0	--	54.0	26.30	233.00	150	Vertical	Pass

7 GHz to 18 GHz, ANT H 802.11g Low Channel


R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

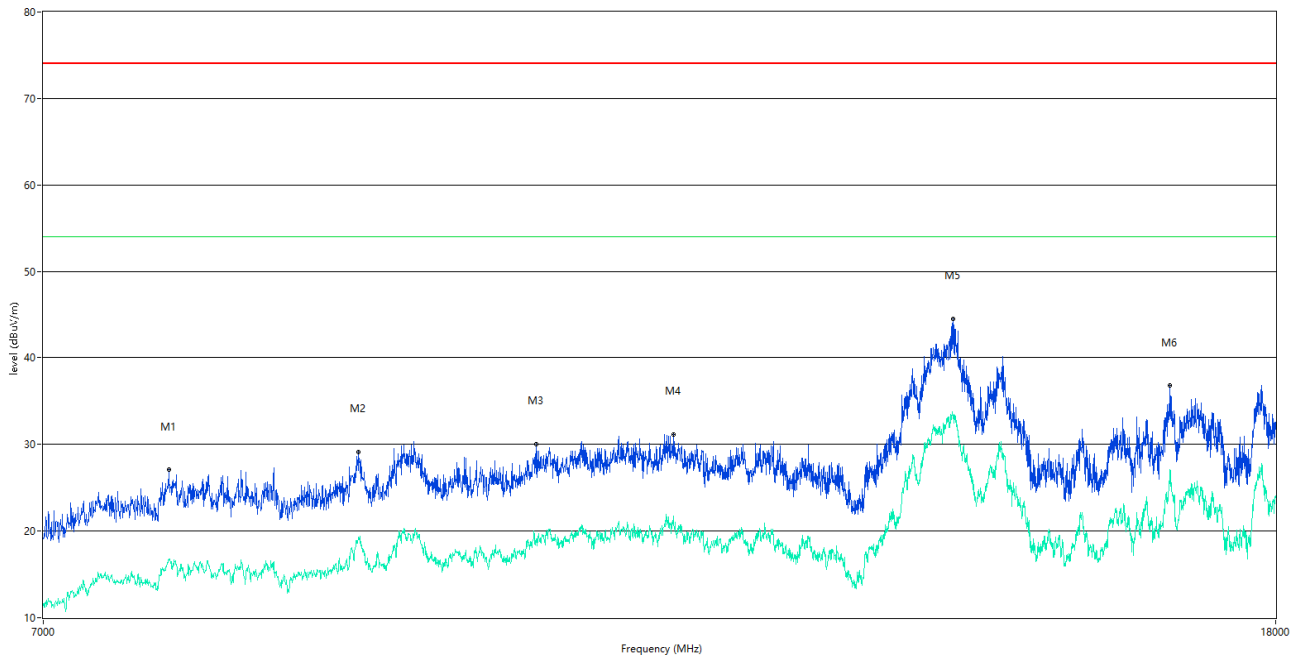

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7706.573	27.05	--	16.7	-35.88	74.0	--	54.0	37.30	270.00	150	Horizontal	Pass
8913.522	29.12	--	19.3	-32.36	74.0	--	54.0	34.70	354.00	150	Horizontal	Pass
10211.197	29.99	--	19.1	-28.12	74.0	--	54.0	34.90	88.00	150	Horizontal	Pass
11349.413	31.08	--	20.8	-24.59	74.0	--	54.0	33.20	272.00	150	Horizontal	Pass
14057.486	44.55	--	32.9	-6.62	74.0	--	54.0	21.10	314.00	150	Horizontal	Pass
16597.851	36.78	--	27.1	-10.41	74.0	--	54.0	26.90	241.00	150	Horizontal	Pass

7 GHz to 18 GHz, ANT V 802.11g Middle Channel


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

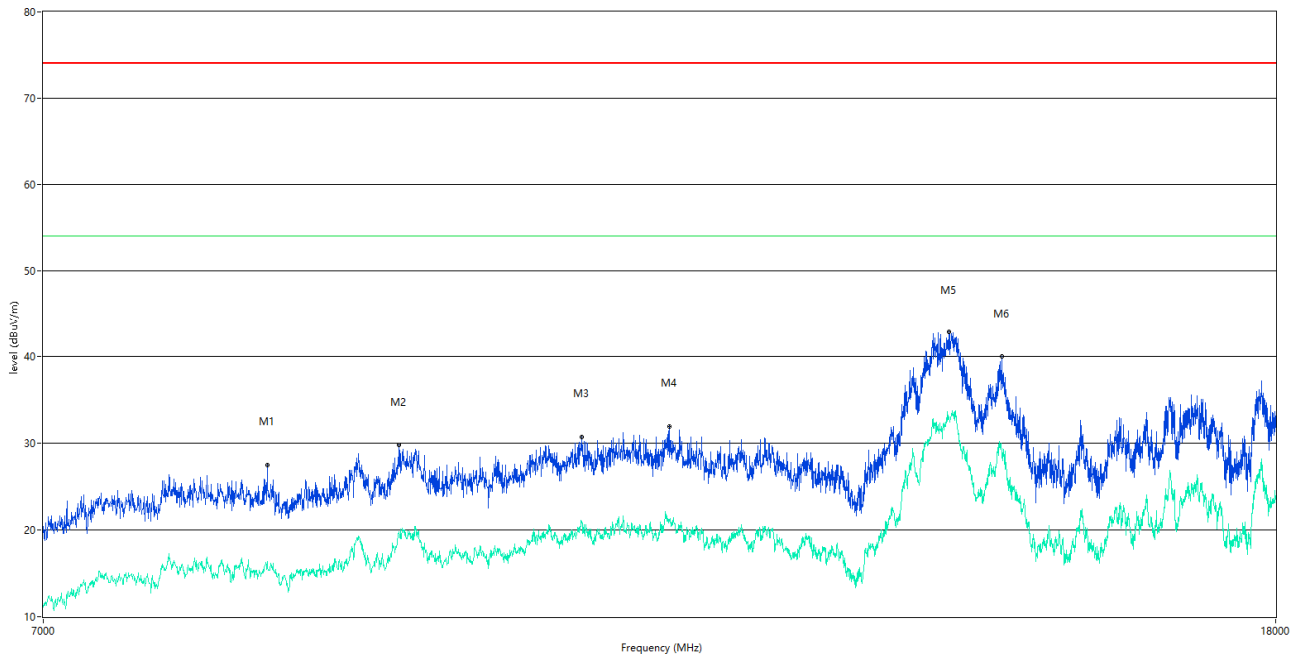

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8311.422	27.44	--	16.4	-35.39	74.0	--	54.0	37.60	39.00	150	Vertical	Pass
9193.952	29.80	--	19.6	-32.27	74.0	--	54.0	34.40	99.00	150	Vertical	Pass
10576.856	30.67	--	21.0	-26.35	74.0	--	54.0	33.00	18.00	150	Vertical	Pass
11308.173	31.95	--	21.0	-24.60	74.0	--	54.0	33.00	33.00	150	Vertical	Pass
14010.747	42.79	--	32.7	-7.03	74.0	--	54.0	21.30	16.00	150	Vertical	Pass
14590.852	39.96	--	29.3	-10.72	74.0	--	54.0	24.70	352.00	150	Vertical	Pass

7 GHz to 18 GHz, ANT H 802.11g Middle Channel


R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

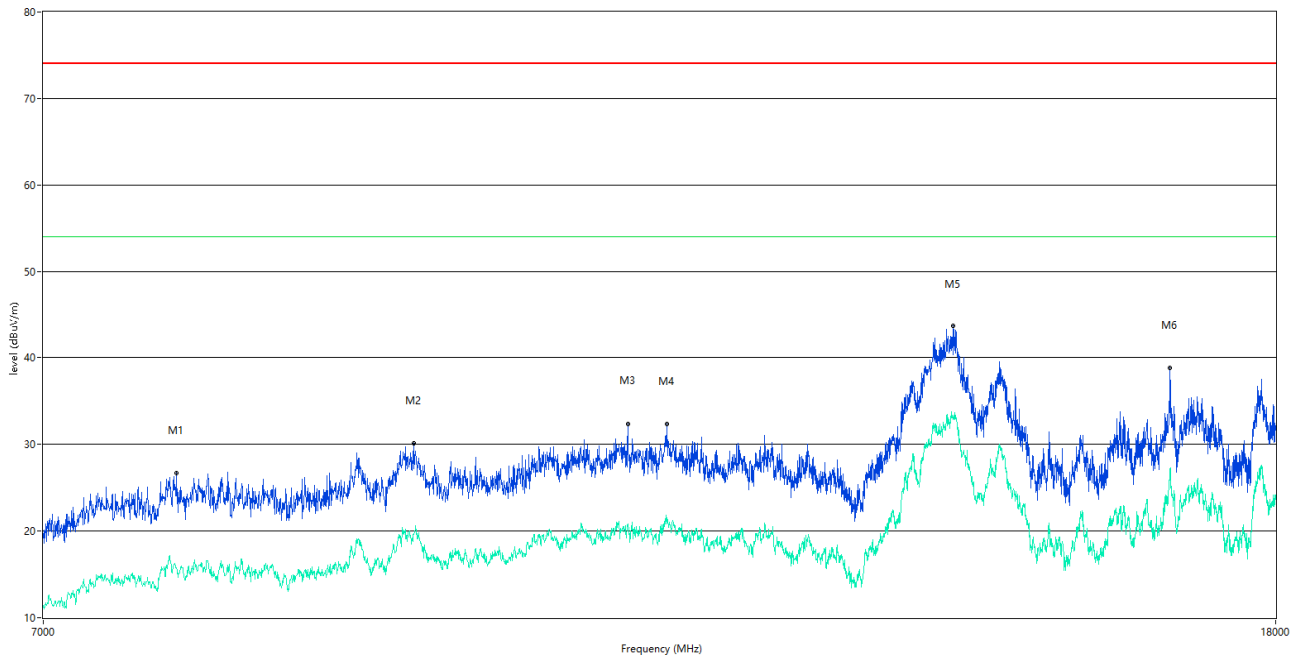

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7753.312	26.65	--	15.8	-36.16	74.0	--	54.0	38.20	329.00	150	Horizontal	Pass
9301.175	30.08	--	19.6	-31.44	74.0	--	54.0	34.40	200.00	150	Horizontal	Pass
10956.261	32.37	--	20.8	-24.62	74.0	--	54.0	33.20	54.00	150	Horizontal	Pass
11286.178	32.29	--	20.8	-24.83	74.0	--	54.0	33.20	39.00	150	Horizontal	Pass
14054.736	43.63	--	33.0	-6.74	74.0	--	54.0	21.00	133.00	150	Horizontal	Pass
16600.600	38.81	--	27.2	-10.26	74.0	--	54.0	26.80	152.00	150	Horizontal	Pass

7 GHz to 18 GHz, ANT V 802.11g High Channel


R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

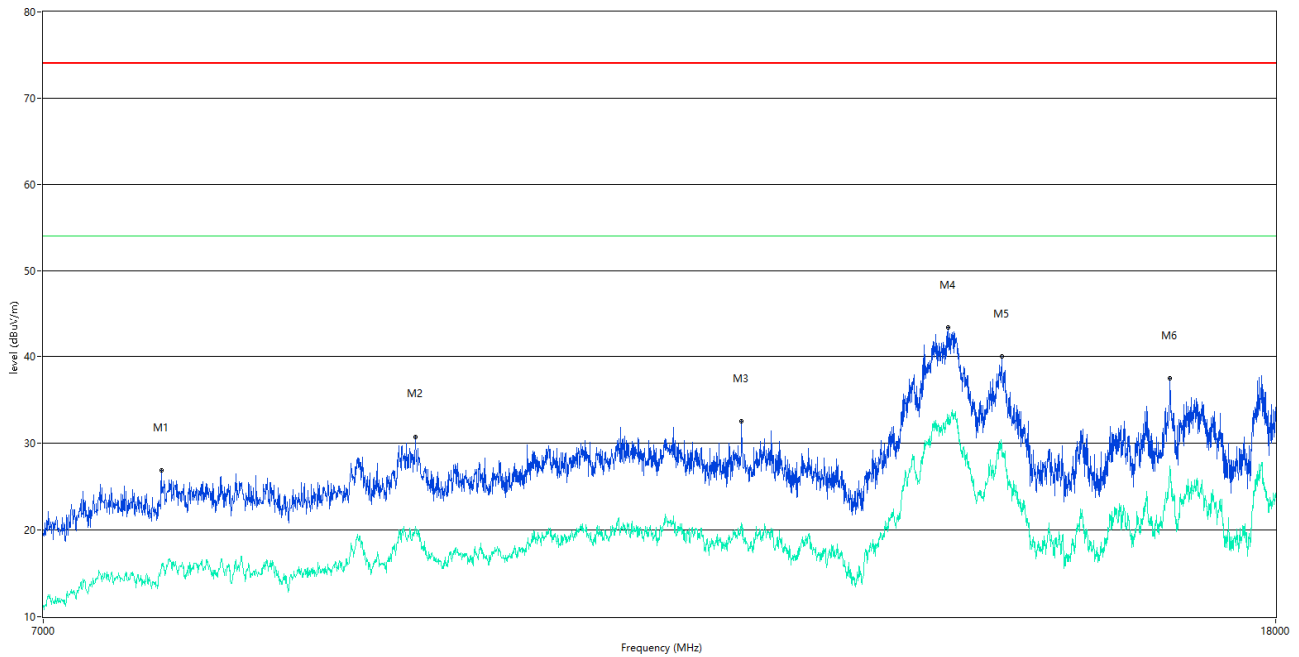

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7662.584	26.84	--	15.7	-36.72	74.0	--	54.0	38.30	275.00	150	Vertical	Pass
9309.423	30.74	--	20.4	-30.97	74.0	--	54.0	33.60	134.00	150	Vertical	Pass
11954.261	32.50	--	20.7	-24.28	74.0	--	54.0	33.30	158.00	150	Vertical	Pass
14002.499	43.34	--	32.7	-6.73	74.0	--	54.0	21.30	200.00	150	Vertical	Pass
14590.852	40.03	--	30.0	-10.72	74.0	--	54.0	24.00	73.00	150	Vertical	Pass
16600.600	37.48	--	27.4	-10.26	74.0	--	54.0	26.60	119.00	150	Vertical	Pass

7 GHz to 18 GHz, ANT H 802.11g High Channel


REmission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

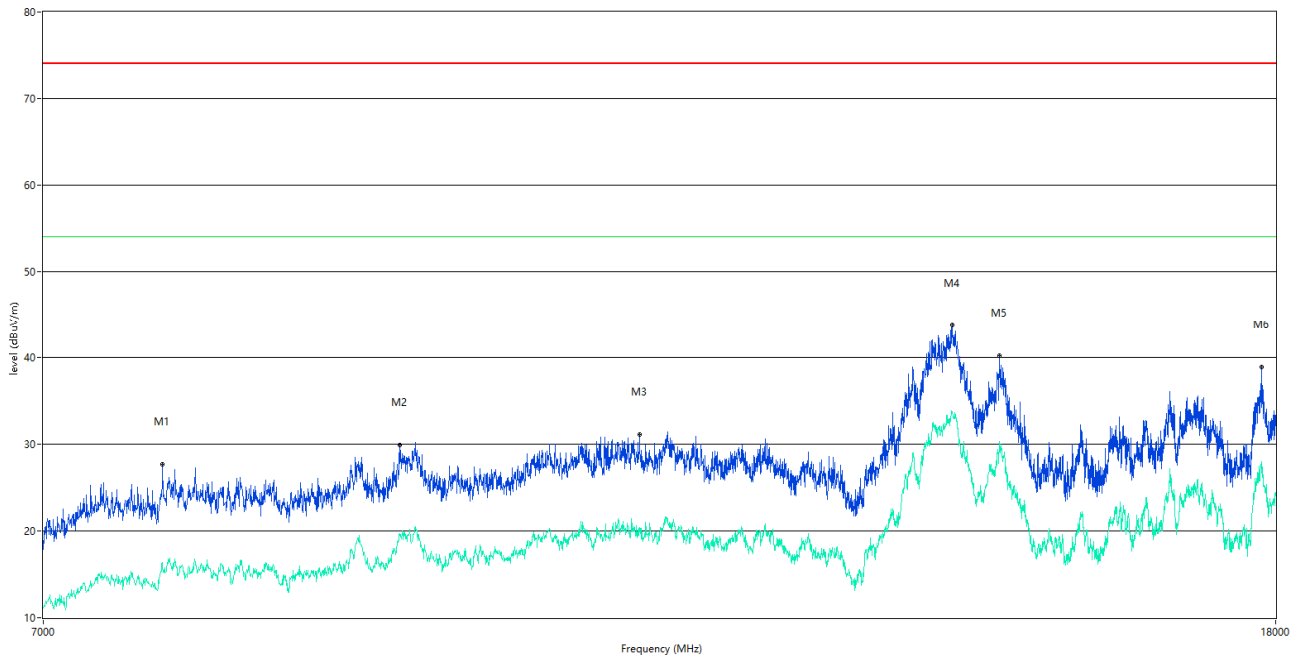

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7670.832	27.67	--	15.9	-36.40	74.0	--	54.0	38.10	149.00	150	Horizontal	Pass
9196.701	29.93	--	19.7	-32.20	74.0	--	54.0	34.30	105.00	150	Horizontal	Pass
11055.236	31.13	--	20.1	-25.09	74.0	--	54.0	33.90	150.00	150	Horizontal	Pass
14046.488	43.71	--	33.7	-6.60	74.0	--	54.0	20.30	97.00	150	Horizontal	Pass
14566.108	40.21	--	30.3	-11.10	74.0	--	54.0	23.70	82.00	150	Horizontal	Pass
17804.799	38.93	--	28.0	-8.15	74.0	--	54.0	26.00	77.00	150	Horizontal	Pass

7 GHz to 18 GHz, ANT V 802.11n20 Low Channel


R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

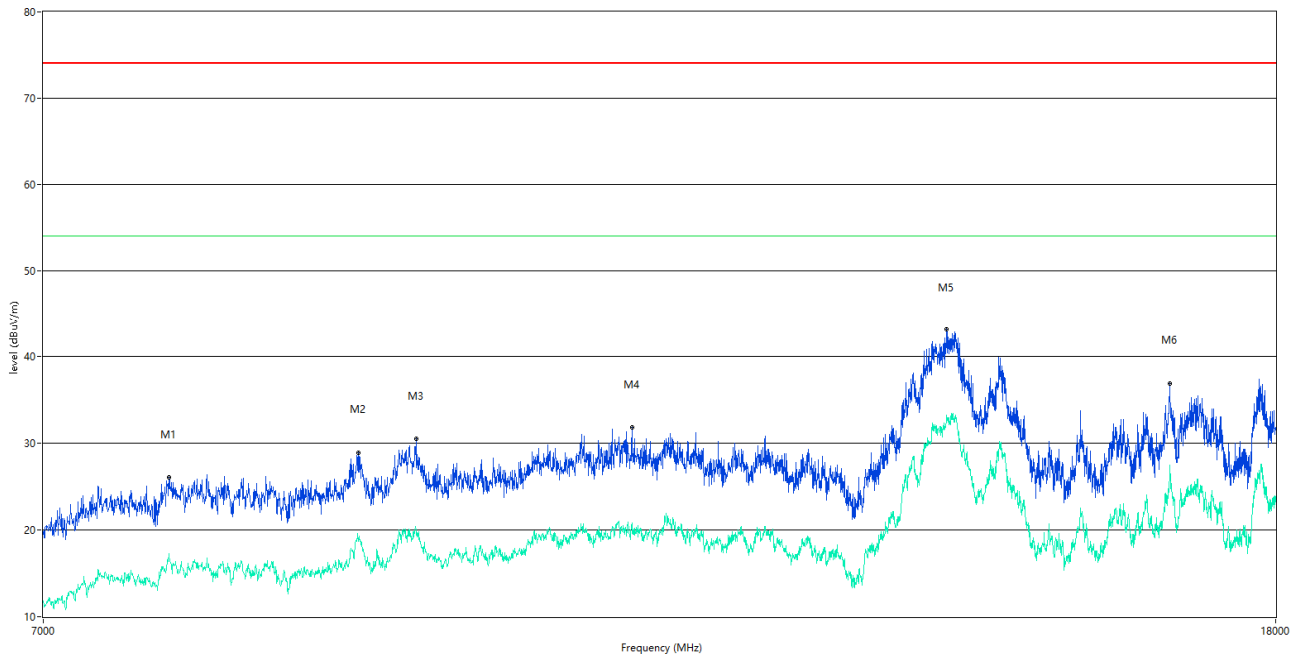

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7709.323	26.03	--	16.7	-35.86	74.0	--	54.0	37.30	155.00	150	Vertical	Pass
8913.522	28.93	--	18.8	-32.36	74.0	--	54.0	35.20	333.00	150	Vertical	Pass
9314.921	30.50	--	20.0	-31.34	74.0	--	54.0	34.00	206.00	150	Vertical	Pass
10989.253	31.80	--	20.8	-24.55	74.0	--	54.0	33.20	254.00	150	Vertical	Pass
13988.753	43.11	--	33.2	-6.91	74.0	--	54.0	20.80	98.00	150	Vertical	Pass
16597.851	36.90	--	27.5	-10.41	74.0	--	54.0	26.50	13.00	150	Vertical	Pass

7 GHz to 18 GHz, ANT H 802.11n20 Low Channel


R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

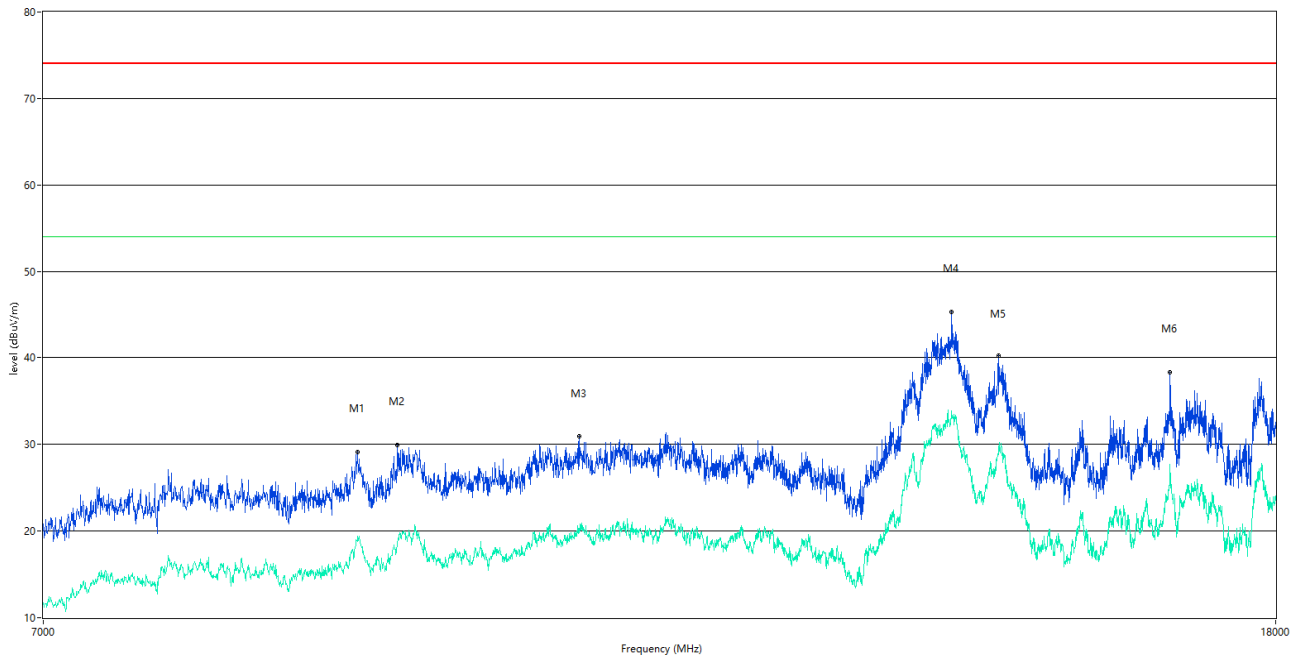

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8905.274	29.05	--	18.8	-32.43	74.0	--	54.0	35.20	275.00	150	Horizontal	Pass
9182.954	29.93	--	18.6	-32.52	74.0	--	54.0	35.40	32.00	150	Horizontal	Pass
10554.861	30.87	--	20.3	-27.01	74.0	--	54.0	33.70	35.00	150	Horizontal	Pass
14043.739	45.39	--	33.6	-6.67	74.0	--	54.0	20.40	214.00	150	Horizontal	Pass
14557.861	40.18	--	29.1	-11.13	74.0	--	54.0	24.90	190.00	150	Horizontal	Pass
16597.851	38.27	--	27.7	-10.41	74.0	--	54.0	26.30	288.00	150	Horizontal	Pass

7 GHz to 18 GHz, ANT V 802.11n20 Middle Channel


R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

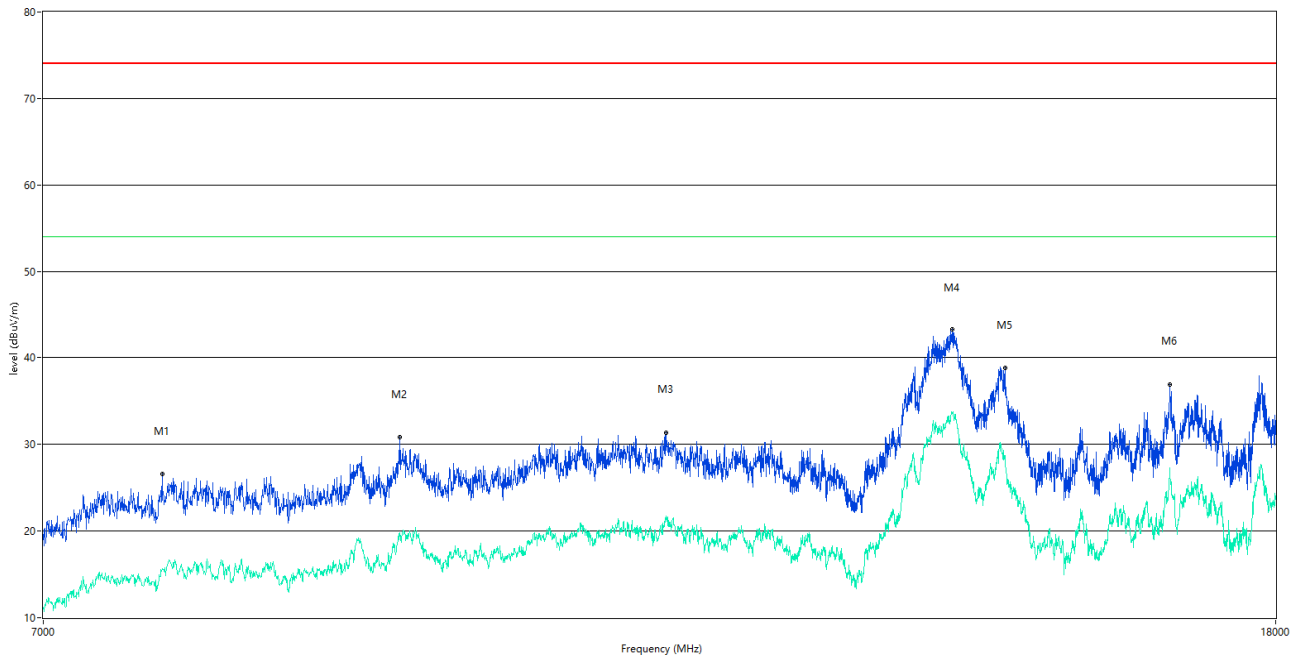

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
7668.083	26.62	--	15.7	-36.45	74.0	--	54.0	38.30	192.00	150	Vertical	Pass
9199.450	30.80	--	19.8	-32.23	74.0	--	54.0	34.20	65.00	150	Vertical	Pass
11280.680	31.27	--	21.7	-24.72	74.0	--	54.0	32.30	62.00	150	Vertical	Pass
14046.488	43.22	--	33.5	-6.60	74.0	--	54.0	20.50	121.00	150	Vertical	Pass
14629.343	38.77	--	28.7	-11.38	74.0	--	54.0	25.30	183.00	150	Vertical	Pass
16597.851	36.89	--	27.2	-10.41	74.0	--	54.0	26.80	144.00	150	Vertical	Pass

7 GHz to 18 GHz, ANT H 802.11n20 Middle Channel


R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

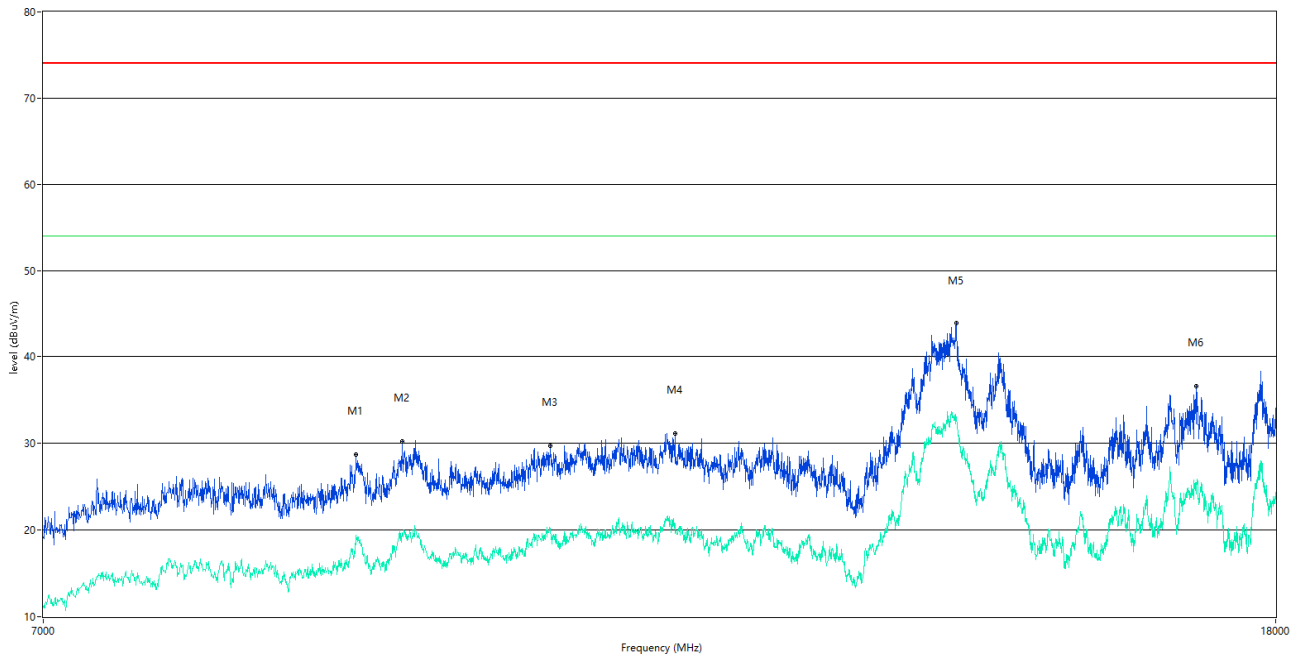

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8897.026	28.66	--	19.4	-32.04	74.0	--	54.0	34.60	45.00	150	Horizontal	Pass
9215.946	30.17	--	19.3	-31.70	74.0	--	54.0	34.70	37.00	150	Horizontal	Pass
10321.170	29.65	--	20.2	-27.74	74.0	--	54.0	33.80	215.00	150	Horizontal	Pass
11357.661	31.16	--	20.7	-24.75	74.0	--	54.0	33.30	237.00	150	Horizontal	Pass
14095.976	43.83	--	33.0	-6.74	74.0	--	54.0	21.00	311.00	150	Horizontal	Pass
16936.016	36.58	--	25.0	-10.73	74.0	--	54.0	29.00	319.00	150	Horizontal	Pass

7 GHz to 18 GHz, ANT V 802.11n20 High Channel


R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

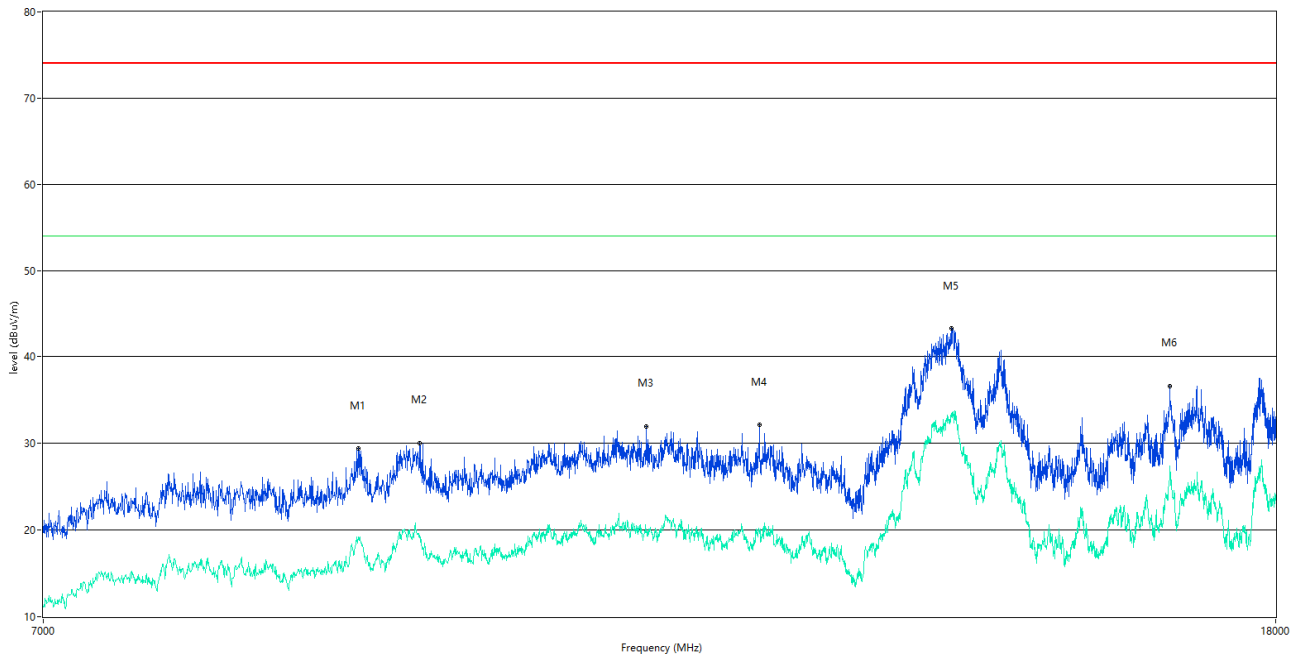

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
8910.772	29.36	--	19.2	-32.41	74.0	--	54.0	34.80	299.00	150	Vertical	Pass
9342.414	30.04	--	19.1	-32.36	74.0	--	54.0	34.90	117.00	150	Vertical	Pass
11112.972	31.87	--	19.7	-25.06	74.0	--	54.0	34.30	21.00	150	Vertical	Pass
12119.220	32.10	--	20.0	-24.68	74.0	--	54.0	34.00	115.00	150	Vertical	Pass
14035.491	43.25	--	33.1	-6.75	74.0	--	54.0	20.90	53.00	150	Vertical	Pass
16597.851	36.61	--	27.3	-10.41	74.0	--	54.0	26.70	232.00	150	Vertical	Pass

7 GHz to 18 GHz, ANT H 802.11n20 High Channel

R Emission Test case_FCC_Part 15C_FCC 15.247_7GHz-18GHz

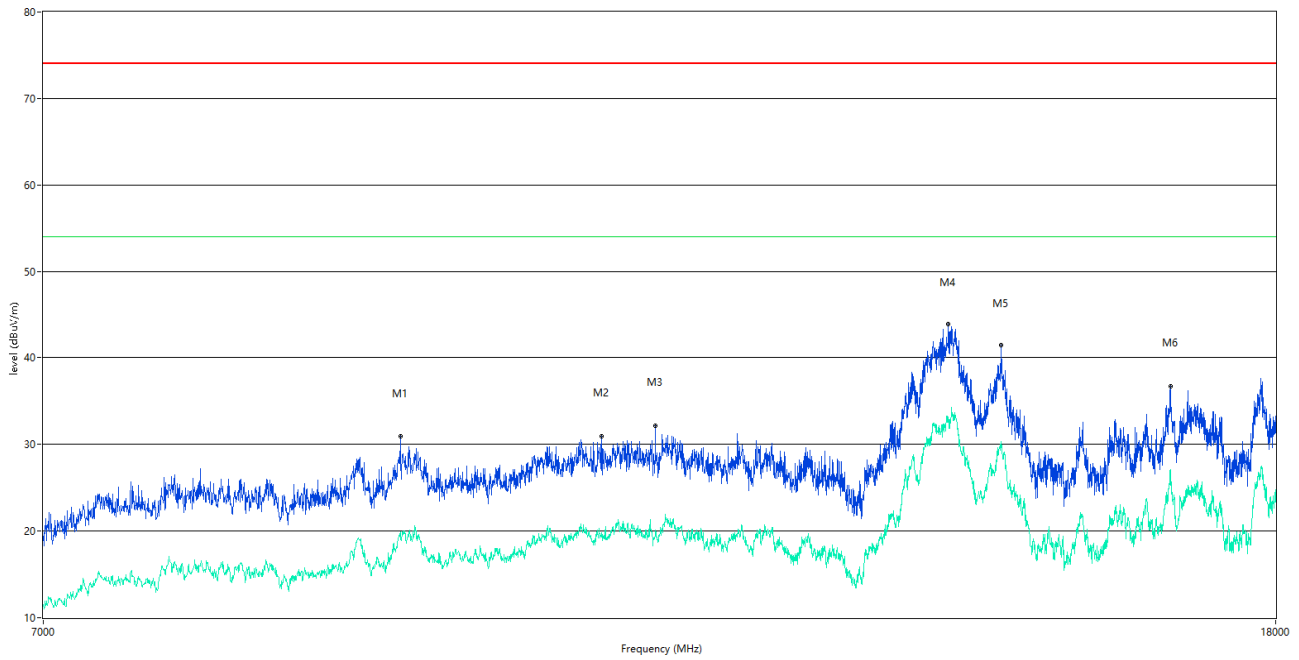

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
9204.949	30.94	--	19.9	-32.04	74.0	--	54.0	34.10	359.00	150	Horizontal	Pass
10739.065	30.95	--	19.8	-26.43	74.0	--	54.0	34.20	202.00	150	Horizontal	Pass
11189.953	32.16	--	20.1	-25.54	74.0	--	54.0	33.90	267.00	150	Horizontal	Pass
14007.998	43.80	--	32.5	-6.94	74.0	--	54.0	21.50	196.00	150	Horizontal	Pass
14579.855	41.40	--	29.9	-11.08	74.0	--	54.0	24.10	333.00	150	Horizontal	Pass
16603.349	36.68	--	27.0	-10.25	74.0	--	54.0	27.00	210.00	150	Horizontal	Pass

A.7 Band Edge (Restricted-band band-edge)

Test Data

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
802.11b	Low	2390				PEAK	Pass
		2390				AVERAGE	Pass
	HIGH	2483.5				PEAK	Pass
		2483.5				AVERAGE	Pass
802.11g	Low	2390				PEAK	Pass
		2390				AVERAGE	Pass
	HIGH	2483.5				PEAK	Pass
		2483.5				AVERAGE	Pass
802.11n20	Low	2390				PEAK	Pass
		2390				AVERAGE	Pass
	HIGH	2483.5				PEAK	Pass
		2483.5				AVERAGE	Pass

Test Plots

802.11b Mode:

Low Channel, ANT V


R:Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

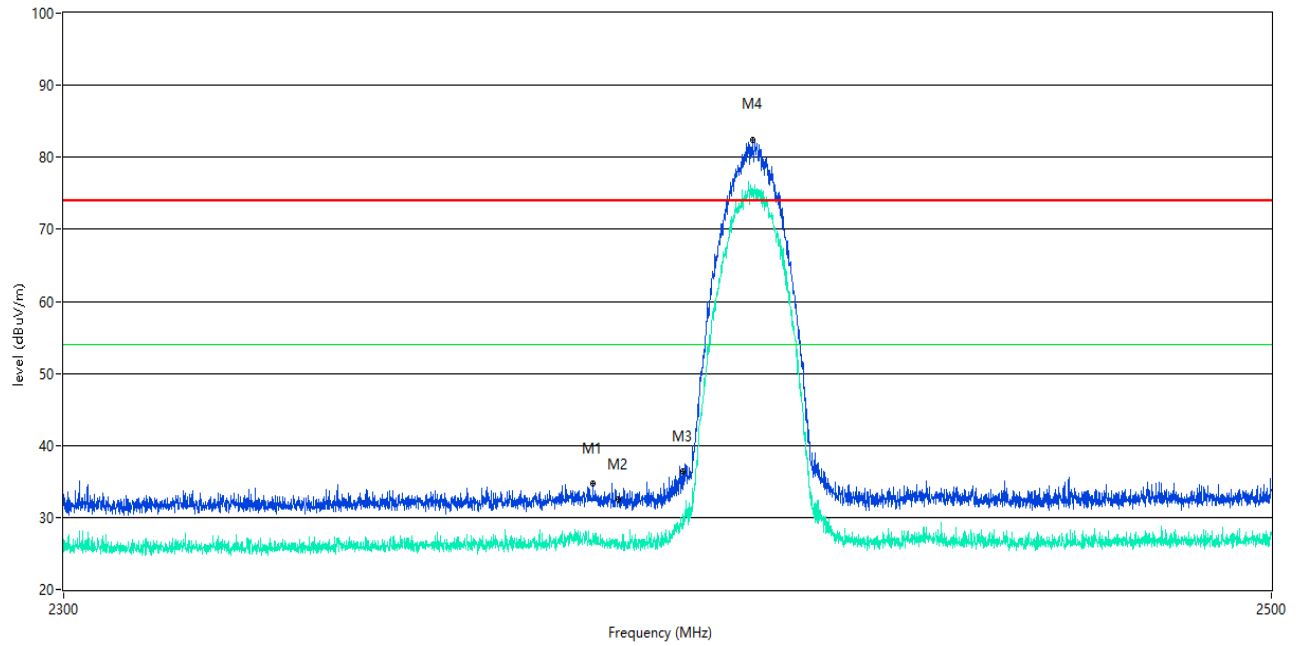

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2385.629	34.69	--	27.6	2.08	74.0	--	54.0	26.40	51.10	150	Vertical	Pass
2390.000	32.62	--	26.4	2.02	74.0	--	54.0	27.60	97.42	150	Vertical	Pass
2400.000	36.38	--	29.2	1.85	74.0	--	54.0	24.80	107.20	150	Vertical	Pass
2412.022	82.44	--	75.5	2.05	74.0	--	54.0	-21.50	59.80	150	Vertical	N.A

Low Channel, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

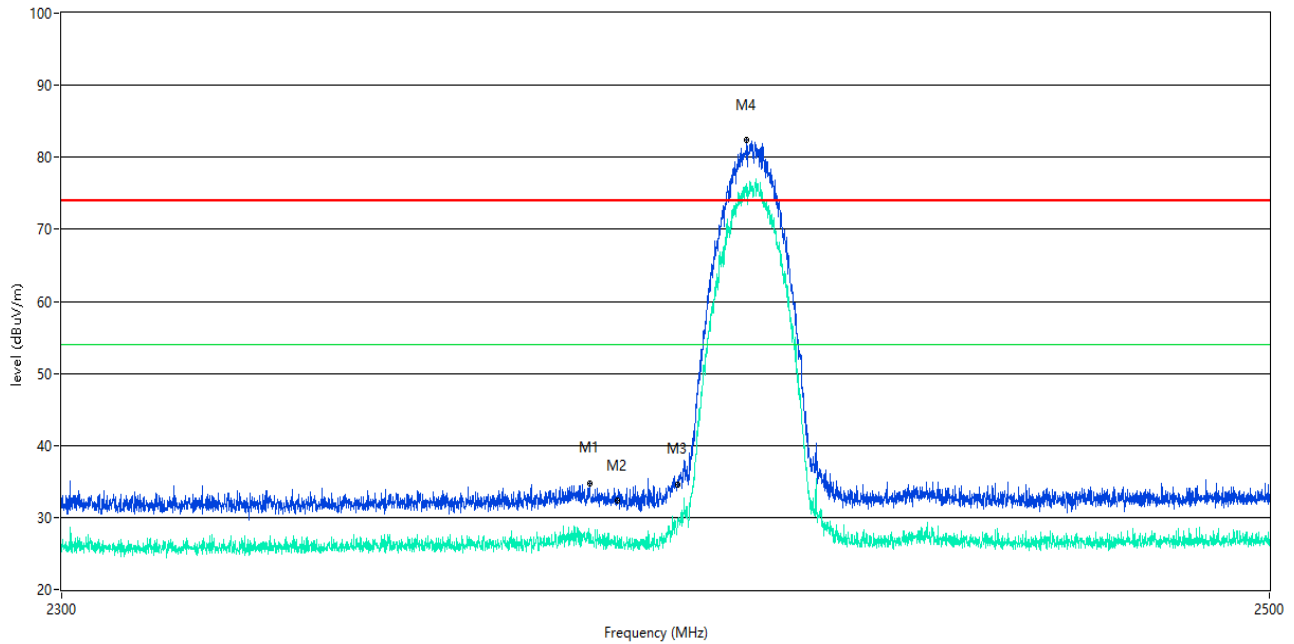

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2385.429	34.77	--	27.8	2.08	74.0	--	54.0	26.20	24.40	150	Horizontal	Pass
2390.000	32.17	--	26.8	2.02	74.0	--	54.0	27.20	93.50	150	Horizontal	Pass
2400.000	34.76	--	29.7	1.85	74.0	--	54.0	24.30	91.00	150	Horizontal	Pass
2411.422	82.38	--	76.4	2.05	74.0	--	54.0	-22.40	60.00	150	Horizontal	N.A

High Channel, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2480

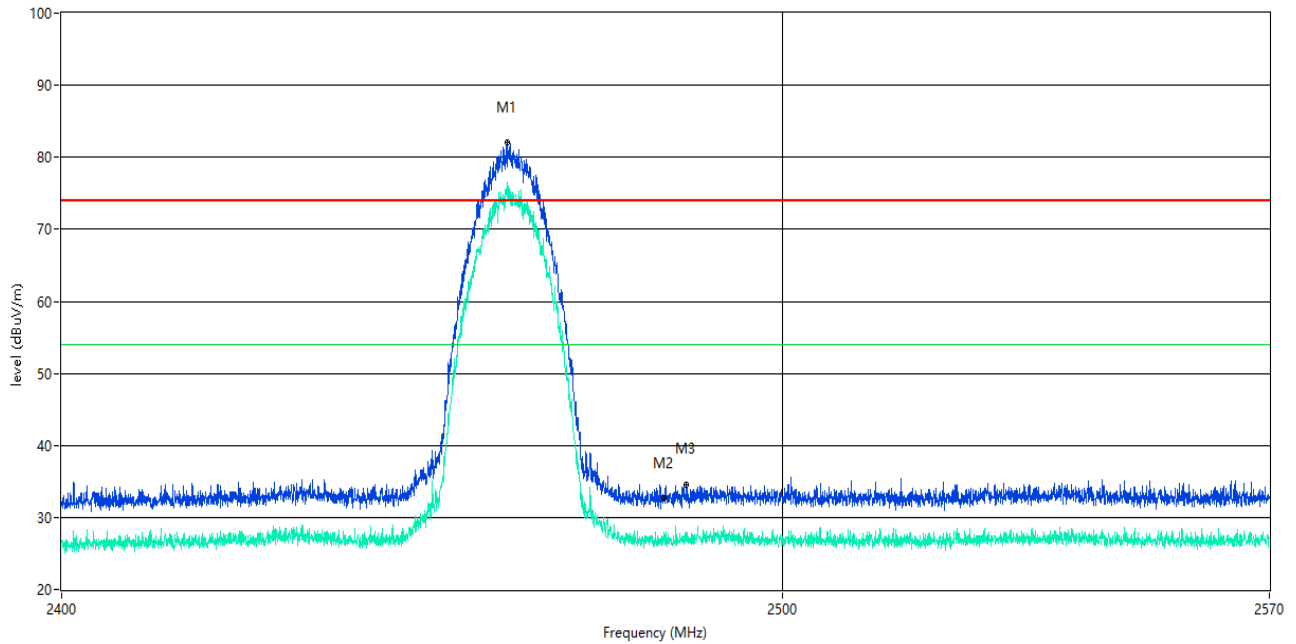

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2461.312	82.03	--	76.6	2.36	74.0	--	54.0	-22.60	4.00	150	Vertical	N.A
2483.500	32.66	--	26.4	2.71	74.0	--	54.0	27.60	59.75	150	Vertical	Pass
2486.423	34.50	--	27.7	2.70	74.0	--	54.0	26.30	108.00	150	Vertical	Pass

High Channel, ANT H

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2480

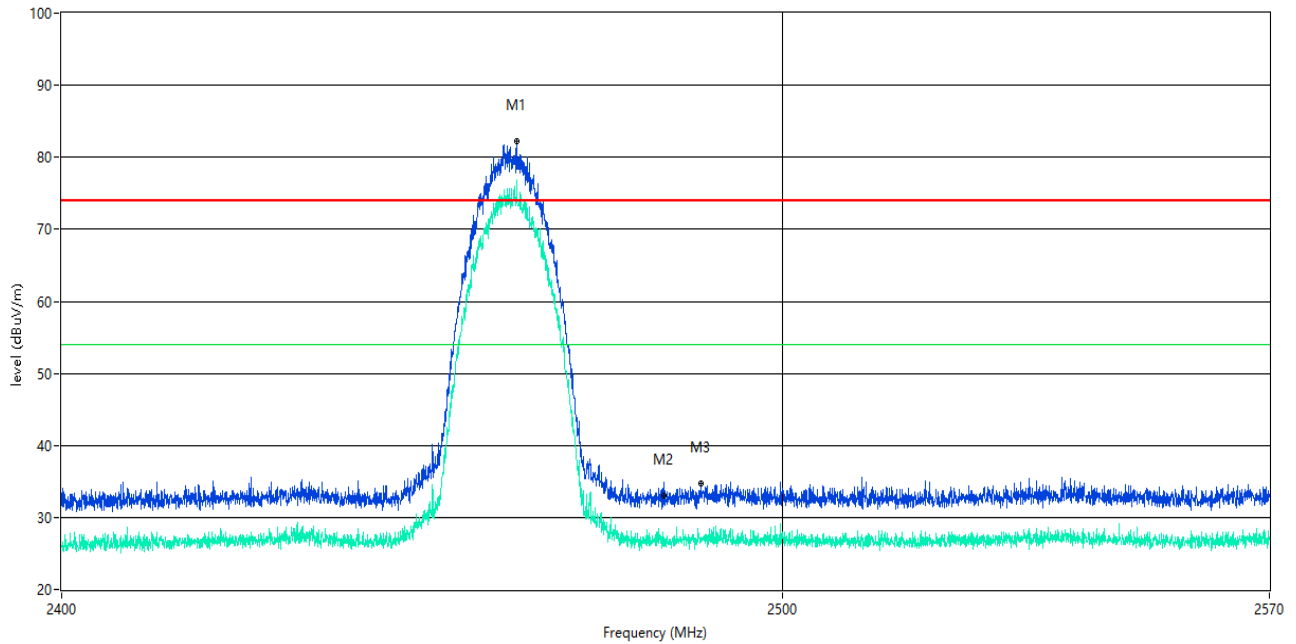


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2462.714	82.29	--	76.9	2.39	74.0	--	54.0	-22.90	1.00	150	Horizontal	N.A
2483.500	33.02	--	26.2	2.71	74.0	--	54.0	27.80	126.01	150	Horizontal	Pass
2488.548	34.63	--	27.3	2.71	74.0	--	54.0	26.70	96.00	150	Horizontal	Pass

802.11g Mode:

Low Channel, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

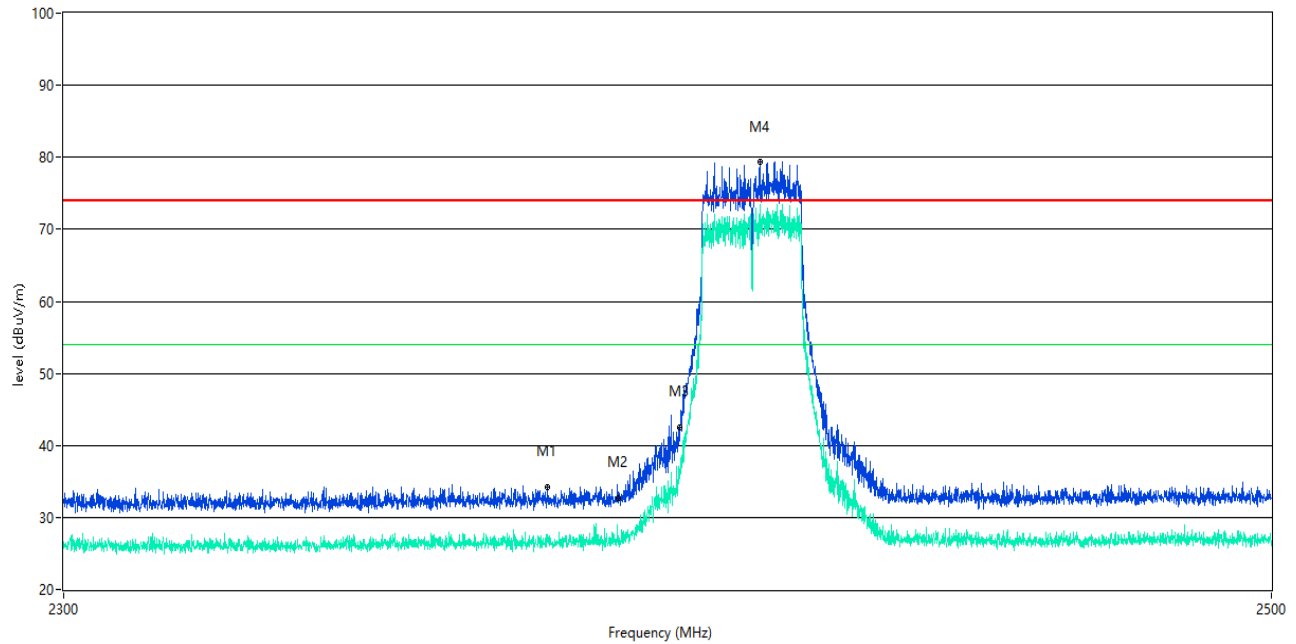

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2378.180	34.25	--	26.6	2.06	74.0	--	54.0	27.40	39.10	150	Vertical	Pass
2390.000	32.87	--	26.6	2.02	74.0	--	54.0	27.40	28.42	150	Vertical	Pass
2400.000	42.73	--	36.7	1.85	74.0	--	54.0	17.30	49.35	150	Vertical	Pass
2413.222	79.35	--	73.4	2.06	74.0	--	54.0	-19.40	113.20	150	Vertical	N.A

Low Channel, ANT H


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

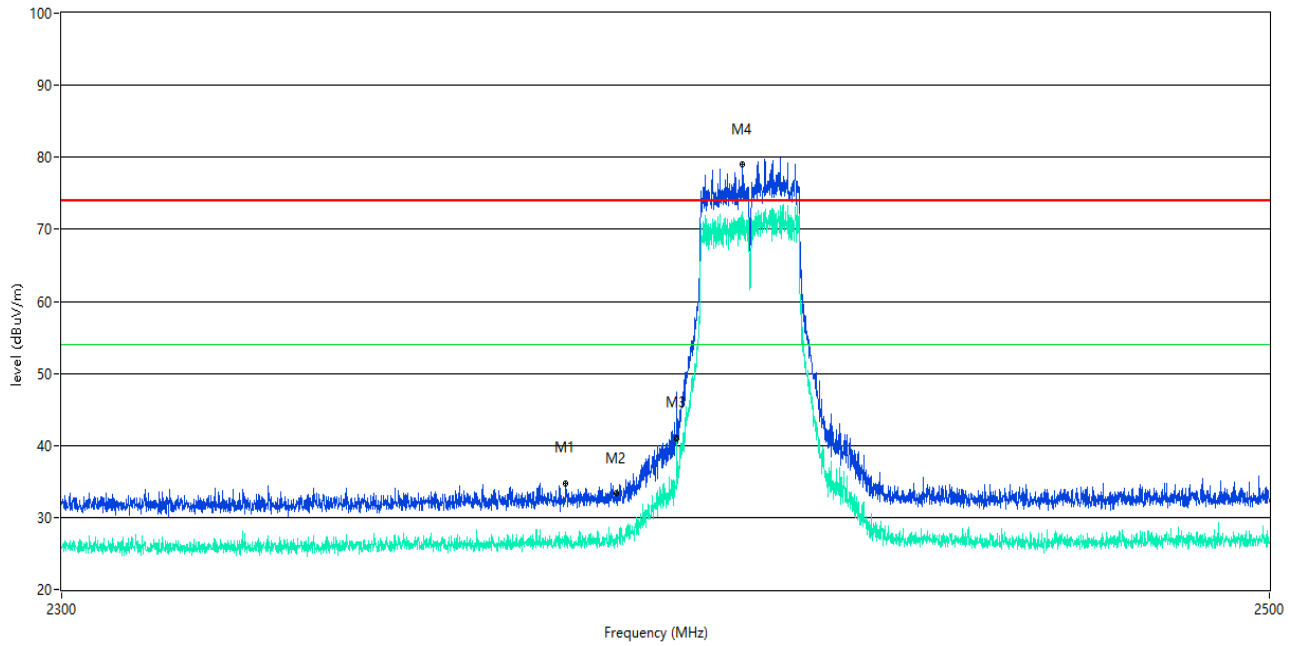

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2381.430	34.79	--	27.9	2.08	74.0	--	54.0	26.10	27.90	150	Horizontal	Pass
2390.000	33.50	--	27.3	2.02	74.0	--	54.0	26.70	112.08	150	Horizontal	Pass
2400.000	41.48	--	35.7	1.85	74.0	--	54.0	18.30	83.45	150	Horizontal	Pass
2410.672	79.03	--	71.0	2.05	74.0	--	54.0	-17.00	112.10	150	Horizontal	N.A

High Channel, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2480

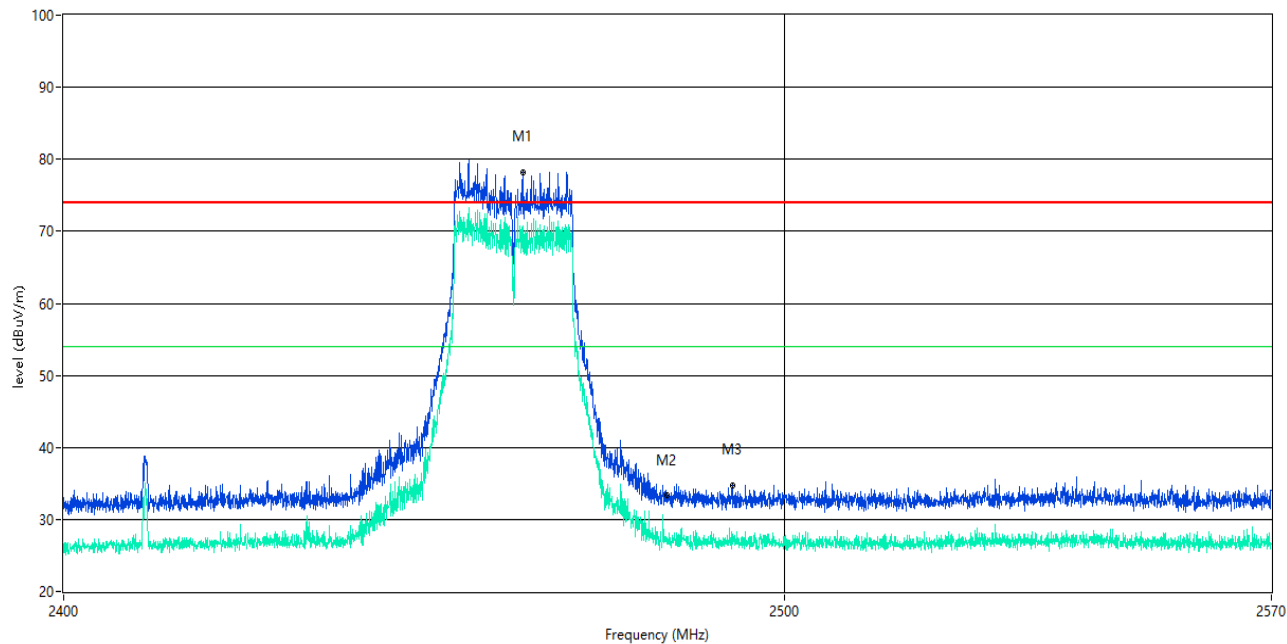

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2463.224	78.21	--	70.7	2.40	74.0	--	54.0	-16.70	4.00	150	Vertical	N.A
2483.500	33.49	--	27.3	2.71	74.0	--	54.0	26.70	94.11	150	Vertical	Pass
2492.754	34.77	--	26.5	2.71	74.0	--	54.0	27.50	5.00	150	Vertical	Pass

High Channel, ANT H

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2480

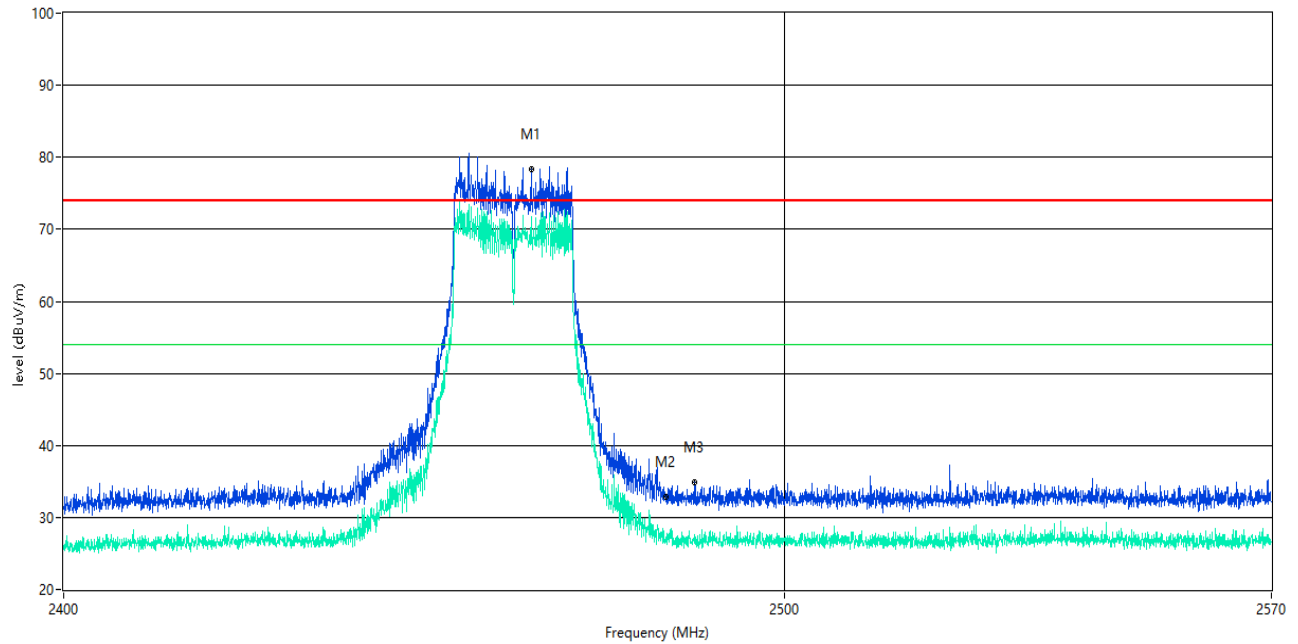


Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2464.499	78.27	--	71.8	2.40	74.0	--	54.0	-17.80	61.00	150	Horizontal	N.A
2483.500	32.81	--	26.4	2.71	74.0	--	54.0	27.60	93.82	150	Horizontal	Pass
2487.401	34.83	--	27.6	2.70	74.0	--	54.0	26.40	4.00	150	Horizontal	Pass

802.11n-20 MHz Mode:

Low Channel, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

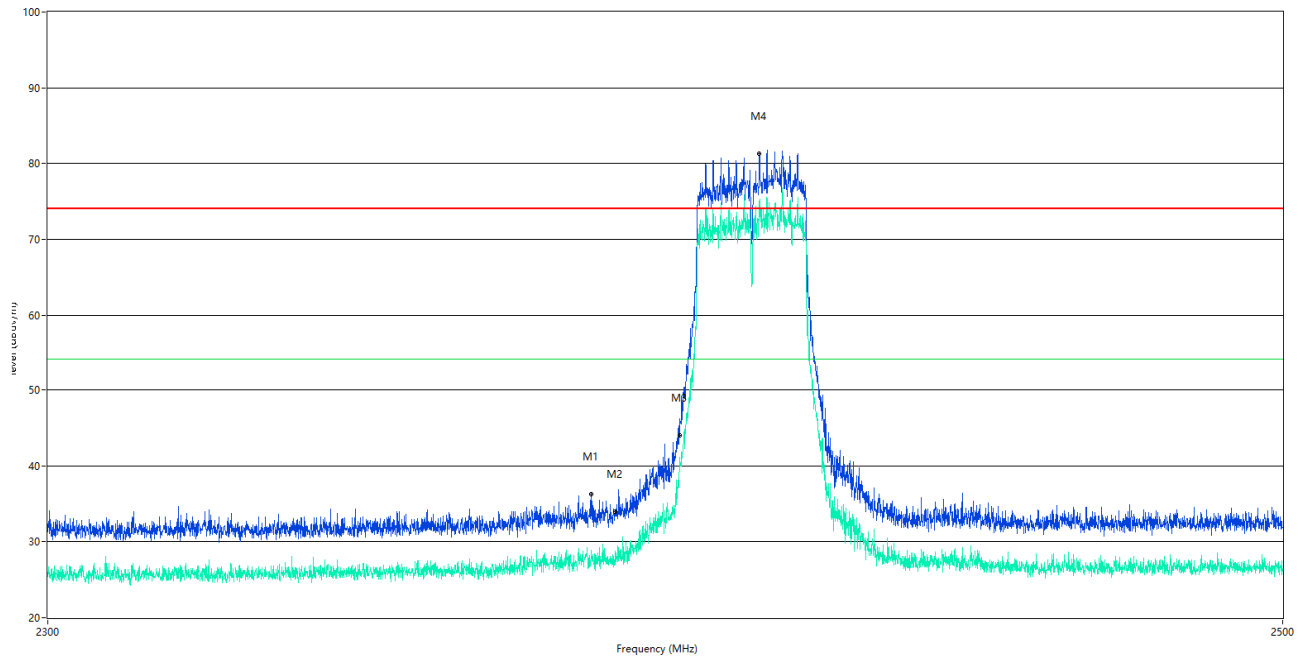

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2385.979	36.26	--	28.9	2.08	74.0	--	54.0	25.10	86.90	150	Vertical	Pass
2390.000	33.87	--	27.8	2.02	74.0	--	54.0	26.20	84.11	150	Vertical	Pass
2400.000	43.87	--	37.6	1.85	74.0	--	54.0	16.40	110.95	150	Vertical	Pass
2413.222	81.35	--	74.9	2.06	74.0	--	54.0	-20.90	57.50	150	Vertical	N.A

Low Channel, ANT H


R Emission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2400

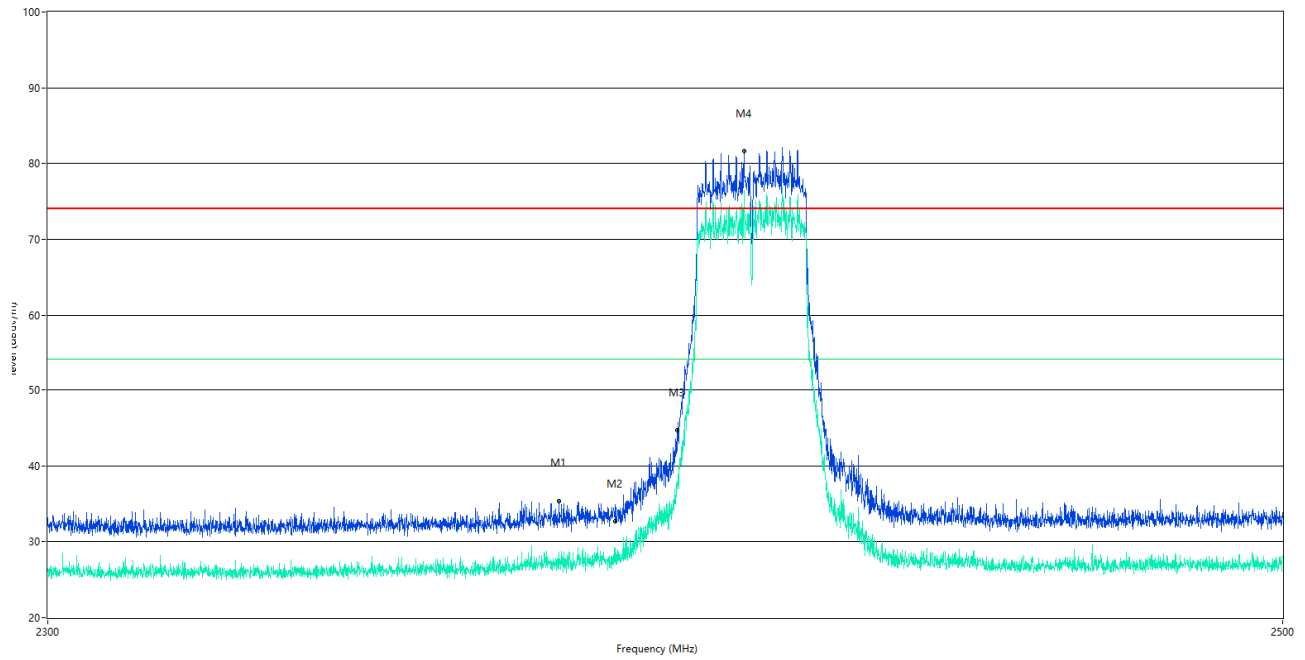

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2380.830	35.40	--	28.7	2.08	74.0	--	54.0	25.30	113.50	150	Horizontal	Pass
2390.000	32.71	--	27.5	2.02	74.0	--	54.0	26.50	160.41	150	Horizontal	Pass
2400.000	44.61	--	38.4	1.85	74.0	--	54.0	15.60	67.50	150	Horizontal	Pass
2410.722	81.68	--	76.4	2.05	74.0	--	54.0	-22.40	60.10	150	Horizontal	N.A

High Channel, ANT V


REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2480

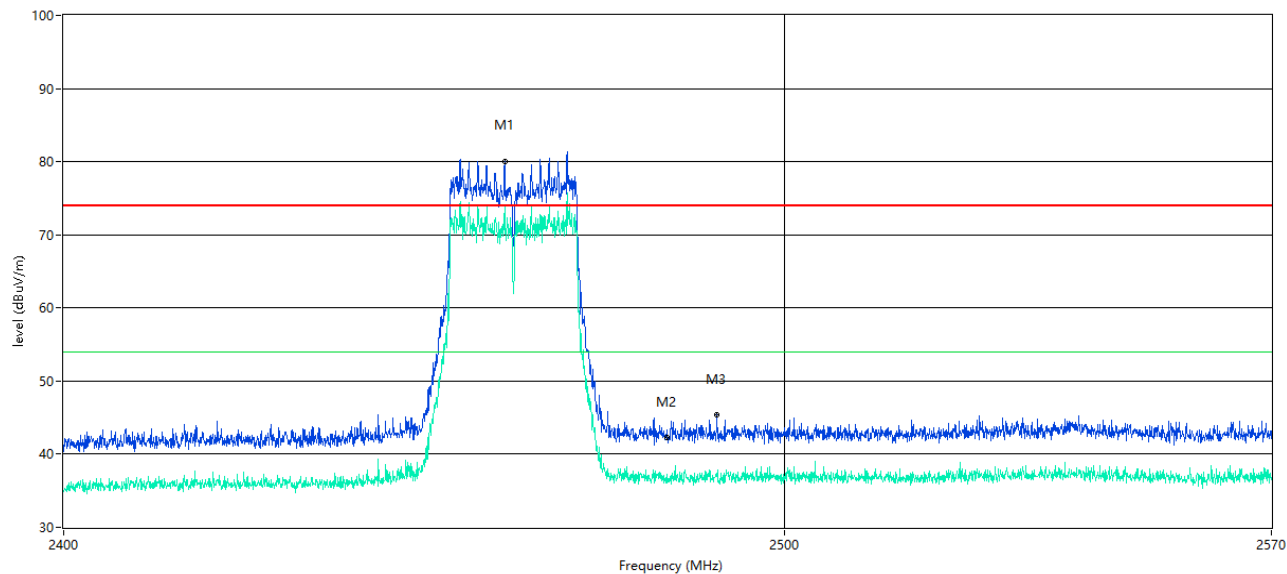

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2461.237	79.76	--	71.22	2.35	74.0	--	54.0	-17.22	108.10	150	Vertical	N.A
2483.500	41.03	--	37.18	2.71	74.0	--	54.0	16.82	169.04	150	Vertical	Pass
2489.624	44.29	--	36.09	2.71	74.0	--	54.0	17.91	214.06	150	Vertical	Pass

High Channel, ANT H

REmission Test case_FCC_Part 15C_FCC 15.247(2.4G)_bandedge 2480

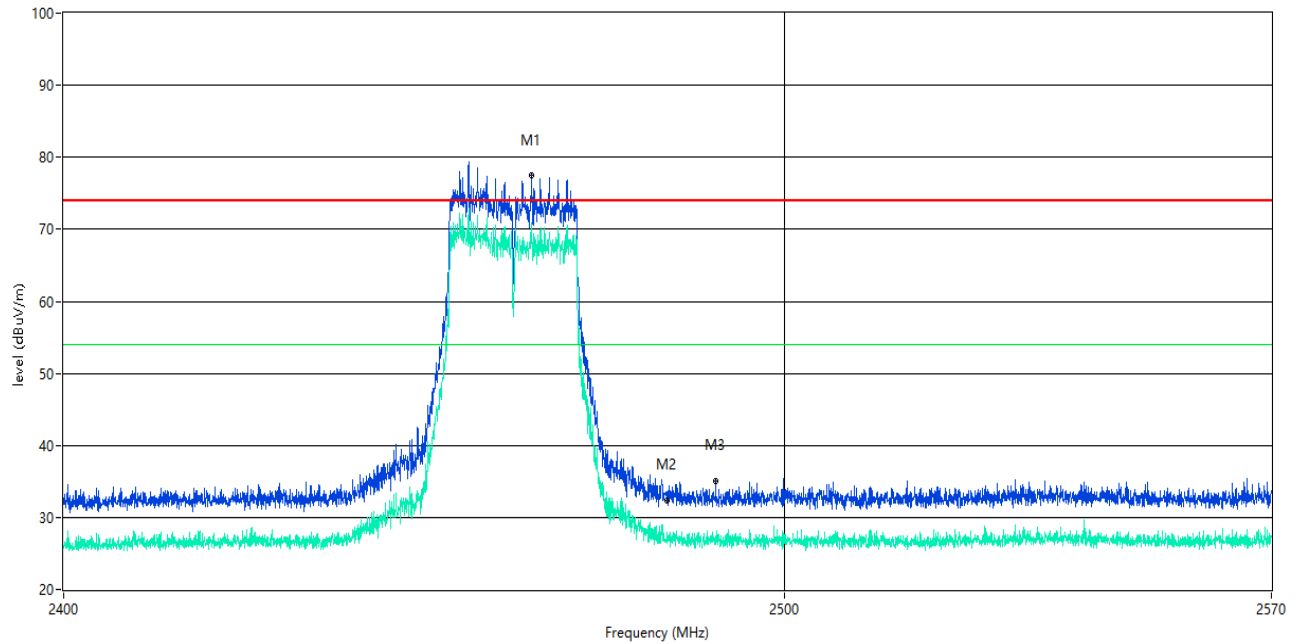

Frequency (MHz)	Peak Level (dBuV/m)	Q-peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	QP Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Table (o)	Height (cm)	ANT	Verdict
2464.456	77.43	--	71.0	2.40	74.0	--	54.0	-17.00	1.00	150	Horizontal	N.A
2483.500	32.22	--	26.8	2.71	74.0	--	54.0	27.20	26.54	150	Horizontal	Pass
2490.332	35.11	--	27.4	2.71	74.0	--	54.0	26.60	1.00	150	Horizontal	Pass

A.8 Power Spectral Density (PSD)

Note: Power Spectral Density (PSD) result reference from original test report: BL-EC17C0360-603 (issued by Shenzhen BALUN Technology Co., Ltd. On Mar. 20, 2018) A.8 Power Spectral Density (PSD).

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-EC18B0146-AR.pdf”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-EC18B0146-AW.pdf”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-EC18B0146-AI.pdf”.

--END OF REPORT--