

# TEST REPORT

**Applicant:** Nuvyyo Inc.

**Address of Applicant:** 555 Legget Drive Tower B Suite 836 Kanata, ON K2K2X3, Canada

**Manufacturer:** Nuvyyo Inc.

**Address of Manufacturer:** 555 Legget Drive Tower B Suite 836 Kanata, ON K2K2X3, Canada

**Factory:** Shenzhen Giec Digital Co., Ltd

**Address of Factory:** 1st&3rd Building, No.26 Puzai Road, Pingdi, Longgang District, Shenzhen, China

**Equipment Under Test (EUT)**

Product Name: OTA streamer

Model No.: TF1282B-02-CN,TF1282B-AN-02-CN

**FCC ID:** 2AOR7-TABLO040

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart E Section 15.407

**Date of sample receipt:** December 06, 2023

**Date of Test:** December 06-08, 2023

**Date of report issue:** December 11, 2023

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

**Robinson Luo**


**Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 2 Version

Report No.	Version No.	Date	Description
GTS2023090109F03	00	September 22, 2023	Original
GTS2023120033F03	01	December 11, 2023	Class II permissive change

Prepared By:




Date:

December 11, 2023

Project Engineer

Check By:

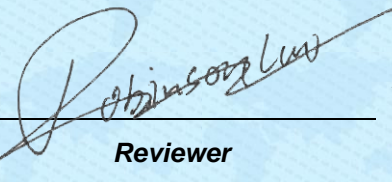

Date:

December 11, 2023

Reviewer

## 3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS.....	3
4 TEST SUMMARY.....	4
4.1 MEASUREMENT UNCERTAINTY.....	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT.....	5
5.2 TEST MODE.....	7
5.3 TEST FACILITY.....	7
5.4 TEST LOCATION.....	7
5.5 DESCRIPTION OF SUPPORT UNITS.....	7
5.6 DEVIATION FROM STANDARDS.....	7
5.7 ADDITIONAL INSTRUCTIONS.....	7
6 TEST INSTRUMENTS LIST.....	8
7 TEST RESULTS AND MEASUREMENT DATA.....	10
7.1 ANTENNA REQUIREMENT:.....	10
7.2 AUTOMATICALLY DISCONTINUE TRANSMISSION:.....	10
7.3 CONDUCTED EMISSIONS.....	11
7.4 RADIATED EMISSION.....	14
8 TEST SETUP PHOTO.....	24
9 EUT CONSTRUCTIONAL DETAILS.....	24



## 4 Test Summary

Test Item	Section	Result
Antenna requirement	FCC part 15.203	PASS
AC Power Line Conducted Emission	FCC part 15.207	PASS
Emission Bandwidth	FCC part 15.407	N/A
Maximum Conducted Output Power	FCC part 15.407(a)(1)	N/A
Power Spectral Density	FCC part 15.407(a)(1)	N/A
Undesirable Emission	FCC part 15.407(b), 15.205/15.209	N/A
Radiated Emission	FCC part 15.205/15.209	PASS
Band Edge	FCC part 15.407(b)(1)	PASS
Frequency Stability	FCC part 15.407(g)	N/A
Non-Transmit & Software Protection	FCC part 15.407(c)	PASS

*Remark:*

*Pass: The EUT complies with the essential requirements in the standard.*

*N/A: Not applicable. This's a Class II permissive change report, all of the changes are not effect to the RF performance, function and power. So the RF conducted test data directly reference the original report number GTS2023090109F03.*

### 4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz-30MHz	3.1dB	(1)
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

## 5 General Information

### 5.1 General Description of EUT

Product Name:	OTA streamer			
Model No.:	TF1282B-02-CN,TF1282B-AN-02-CN			
Test Model No.:	TF1282B-AN-02-CN			
Remark:All above models are identical in the same PCB layout, interior structure and electrical circuits. The difference is the accessories.				
Test sample(s) ID:	GTS2023120033-1			
Sample(s) Status:	Engineer sample			
S/N:	5087B8529BC6			
Operation Frequency:	Band	Mode	Frequency Range(MHz)	Number of channels
	U-NII Band I	IEEE 802.11a	5180-5240	4
		IEEE 802.11n/ac 20MHz	5180-5240	4
		IEEE 802.11n/ac 40MHz	5190-5230	2
IEEE 802.11ac 80MHz		5210	1	
Modulation technology:	OFDM			
Antenna Type:	Integral Antenna			
Antenna gain:	ANT 1: 1.31dBi ANT 2: 2.03dBi			
Power supply:	AC ADAPTER 1 MODEL: TEKA-TC120150US INPUT: AC 100-240V, 50/60Hz, 0.5A MAX OUTPUT: DC 12.0V, 1.5A AC ADAPTER 2 MODEL: JYSY1588-1201500U INPUT: AC 100-240V, 50/60Hz, 0.5A MAX OUTPUT: DC 12.0V, 1.5A			

Remark:

1. Antenna gain information provided by the customer
2. The relevant information of the sample is provided by the entrusting company, and the laboratory is not responsible for its authenticity.
3. All 2 adapters were tested and passed, only report the worst case adapter 1.

<b>Channel list for 802.11a/n/ac(HT20)</b>							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180MHz	40	5200MHz	44	5220MHz	48	5240MHz

<b>Channel list for 802.11n(HT40)/ac(HT40)</b>			
Channel	Frequency	Channel	Frequency
38	5190MHz	46	5230MHz

<b>Channel list for 802.11ac(HT80)</b>	
Channel	Frequency
42	5210MHz



## 5.2 Test mode

Transmitting mode	Keep the EUT in transmitting with modulation..
We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.	
Mode	Data rate
802.11a/n/ac(HT20)	6/6.5 Mbps
802.11n/ac(HT40)	13.5 Mbps
802.11ac(HT80)	29.3 Mbps

## 5.3 Test Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> <li>● <b>FCC —Registration No.: 381383</b> Designation Number: CN5029 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files.</li> <li>● <b>ISED —Registration No.: 9079A</b> CAB identifier: CN0091 The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of ISED for radio equipment testing .</li> <li>● <b>NVLAP (LAB CODE:600179-0)</b> Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).</li> </ul>
--

## 5.4 Test Location

All tests were performed at:
<p>Global United Technology Services Co., Ltd. Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960</p>

## 5.5 Description of Support Units

None.
-------

## 5.6 Deviation from Standards

None.
-------

## 5.7 Additional Instructions

Test Software	test command provided by manufacturer
Power level setup	Default

## 6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	June 23, 2021	June 22, 2024
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	April 14, 2023	April 13, 2024
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	GTS640	March 19, 2023	March 18, 2025
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	April 17, 2023	April 16, 2025
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	April 14, 2023	April 13, 2024
8	Loop Antenna	ZHINAN	ZN30900A	GTS534	Nov. 13, 2023	Nov.12, 2024
9	Broadband Preamplifier	SCHWARZBECK	BBV9718	GTS535	April 14, 2023	April 13, 2024
10	Amplifier(1GHz-26.5GHz)	HP	8449B	GTS601	April 14, 2023	April 13, 2024
11	Horn Antenna (18-26.5GHz)	/	UG-598A/U	GTS664	Oct. 29, 2023	Oct. 28, 2024
12	Horn Antenna (26.5-40GHz)	A.H Systems	SAS-573	GTS665	Oct. 29, 2023	Oct. 28, 2024
13	FSV-Signal Analyzer (10Hz-40GHz)	Keysight	FSV-40-N	GTS666	March 13, 2023	March 12, 2024
14	Amplifier	/	LNA-1000-30S	GTS650	April 14, 2023	April 13, 2024
15	CDNE M2+M3-16A	HCT	30MHz-300MHz	GTS692	Nov. 08, 2023	Nov.07, 2024
16	Wideband Amplifier	/	WDA-01004000-15P35	GTS602	April 14, 2023	April 13, 2024
17	Thermo meter	JINCHUANG	GSP-8A	GTS643	April 19, 2023	April 18, 2024
18	RE cable 1	GTS	N/A	GTS675	July 31. 2023	July 30. 2024
19	RE cable 2	GTS	N/A	GTS676	July 31. 2023	July 30. 2024
20	RE cable 3	GTS	N/A	GTS677	July 31. 2023	July 30. 2024
21	RE cable 4	GTS	N/A	GTS678	July 31. 2023	July 30. 2024
22	RE cable 5	GTS	N/A	GTS679	July 31. 2023	July 30. 2024
23	RE cable 6	GTS	N/A	GTS680	July 31. 2023	July 30. 2024
24	RE cable 7	GTS	N/A	GTS681	July 31. 2023	July 30. 2024
25	RE cable 8	GTS	N/A	GTS682	July 31. 2023	July 30. 2024



Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	July 12, 2022	July 11, 2027
2	EMI Test Receiver	R&S	ESCI 7	GTS552	April 14, 2023	April 13, 2024
3	LISN	ROHDE & SCHWARZ	ENV216	GTS226	April 14, 2023	April 13, 2024
4	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
5	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
6	Thermo meter	JINCHUANG	GSP-8A	GTS642	April 19, 2023	April 18, 2024
7	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	April 14, 2023	April 13, 2024
8	ISN	SCHWARZBECK	NTFM 8158	GTS565	April 14, 2023	April 13, 2024
9	High voltage probe	SCHWARZBECK	TK9420	GTS537	April 14, 2023	April 13, 2024
10	Antenna end assembly	Weinschel	1870A	GTS560	April 14, 2023	April 13, 2024

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	KUMAO	SF132	GTS647	April 19, 2023	April 18, 2024

## 7 Test results and Measurement Data

### 7.1 Antenna requirement:

<b>Standard requirement:</b>	FCC Part15 C Section 15.203
<i>15.203 requirement:</i> An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
<b>E.U.T Antenna:</b>	
The antenna is integral antenna, reference to the appendix II for details	

### 7.2 Automatically discontinue transmission:

<b>Standard requirement:</b>	FCC Part 15 Subpart E Section 15.407(c)
The applicant declare that the device (FCC Part 15 Subpart E Section 15.407) shall automatically discontinue transmission in cases of absence of information to transmit, or operational failure.	

## 7.3 Conducted Emissions


Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10					
Test Frequency Range:	150KHz to 30MHz					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak		Average	
	0.15-0.5		66 to 56*		56 to 46*	
	0.5-5		56		46	
5-30		60		50		
* Decreases with the logarithm of the frequency.						
Test setup:	<p>Remark:  E.U.T: Equipment Under Test  LISN: Line Impedance Stabilization Network  Test table height=0.8m</p>					
Test procedure:	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.</li> </ol>					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					




## Measurement data

Pre-scan all test modes, found worst case at ANT 1 802.11a 5180MHz, and so only show the test result of it.

Line:

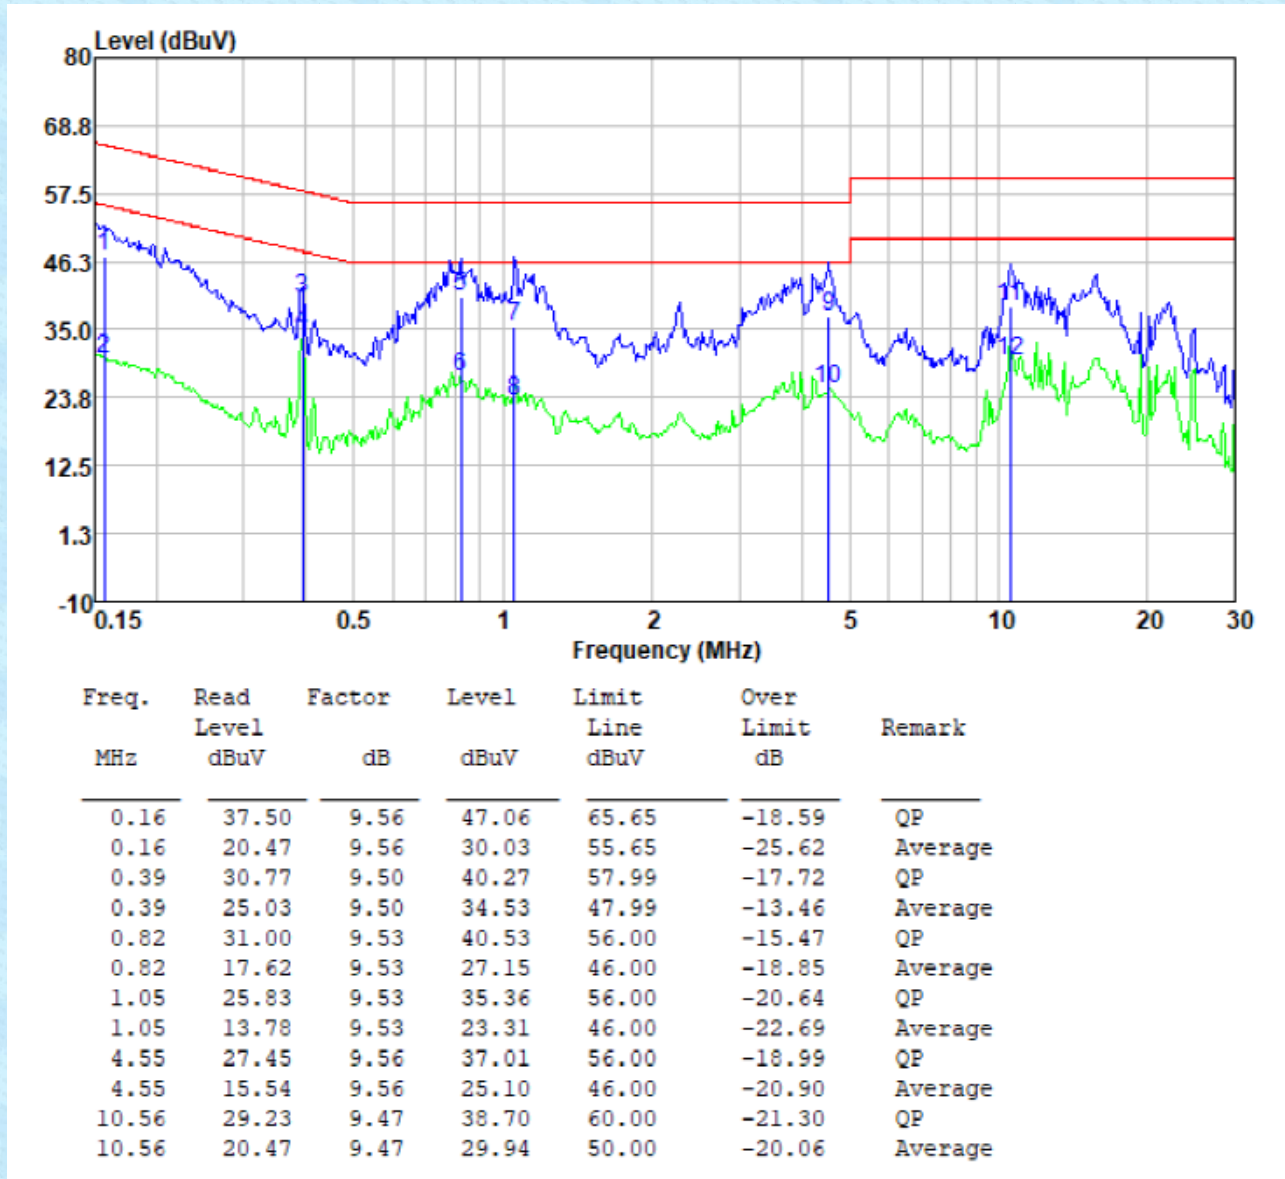

**Neutral:**

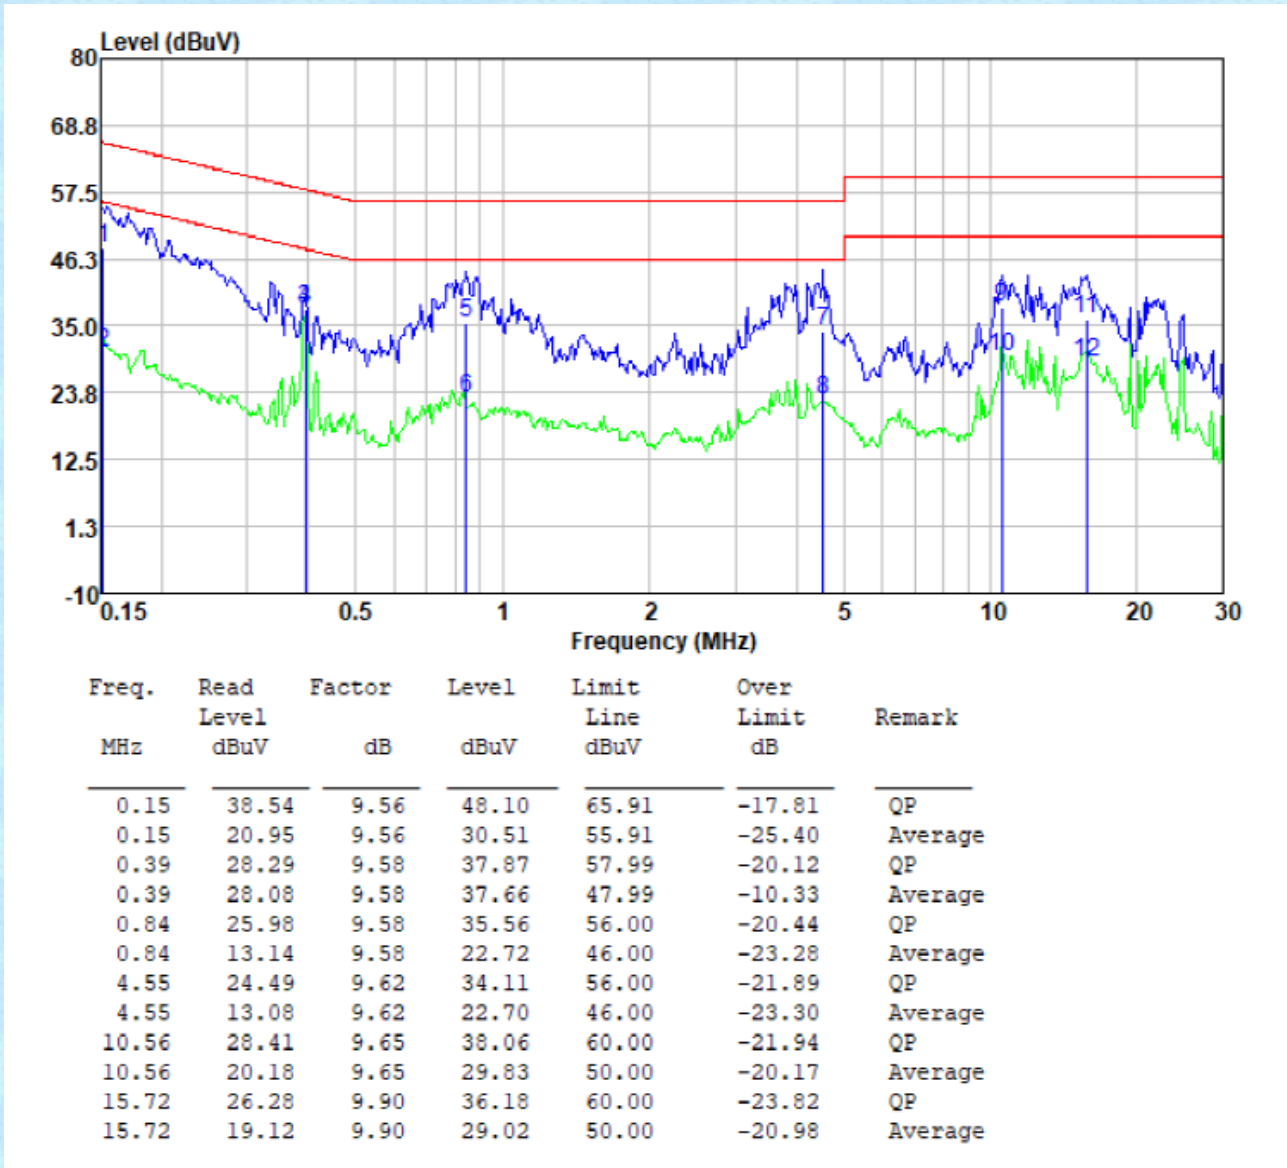


*Notes:*



1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. *If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.*

## 7.4 Radiated Emission

Test Requirement :	FCC Part15 C Section 15.209 and 15.205																												
Test Method :	ANSI C63.10: 2013																												
Test Frequency Range:	9kHz to 40GHz																												
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																												
Receiver setup:	Frequency	Detector	RBW	VBW	Value																								
	9kHz-150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value																								
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value																								
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value																								
	Above 1GHz	Peak	1MHz	3MHz	Peak Value																								
AV		1MHz	3MHz	Average Value																									
Limit:	<table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Field strength (microvolts/meter)</th> <th>Measurement distance (meters)</th> </tr> </thead> <tbody> <tr> <td>0.009-0.490</td> <td>2400/F(kHz)</td> <td>300</td> </tr> <tr> <td>0.490-1.705</td> <td>24000/F(kHz)</td> <td>30</td> </tr> <tr> <td>1.705-30.0</td> <td>30</td> <td>30</td> </tr> <tr> <td>30-88</td> <td>100**</td> <td>3</td> </tr> <tr> <td>88-216</td> <td>150**</td> <td>3</td> </tr> <tr> <td>216-960</td> <td>200**</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>3</td> </tr> </tbody> </table>					Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100**	3	88-216	150**	3	216-960	200**	3	Above 960	500	3
	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																										
0.009-0.490	2400/F(kHz)	300																											
0.490-1.705	24000/F(kHz)	30																											
1.705-30.0	30	30																											
30-88	100**	3																											
88-216	150**	3																											
216-960	200**	3																											
Above 960	500	3																											
<p>The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p>																													
Test Procedure:	<p>Substitution method was performed to determine the actual ERP emission levels of the EUT.</p> <p>The following test procedure as below:</p> <p>1&gt;.Below 1GHz test procedure:</p> <ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol> <p>2&gt;.Above 1GHz test procedure:</p> <ol style="list-style-type: none"> <li>1. On the test site as test setup graph above, the EUT shall be placed at</li> </ol>																												

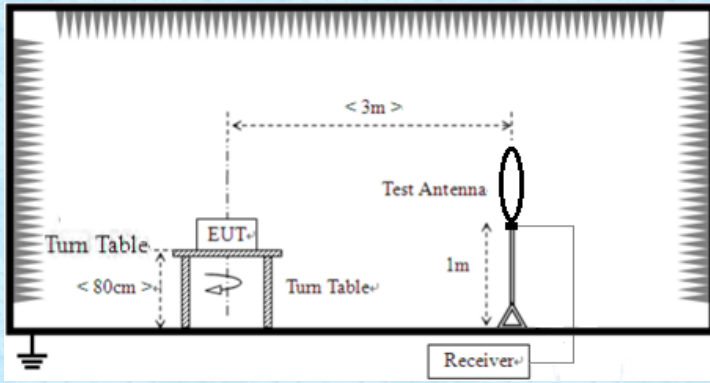

	<p>the 0.8m support on the turntable and in the position closest to normal use as declared by the provider.</p> <ol style="list-style-type: none"> <li>2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter. The output of the test antenna shall be connected to the measuring receiver.</li> <li>3. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.</li> <li>4. The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.</li> <li>5. Repeat step 4 for test frequency with the test antenna polarized horizontally.</li> <li>6. Remove the transmitter and replace it with a substitution antenna</li> <li>7. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.</li> <li>8. Repeat step 7 with both antennas horizontally polarized for each test frequency.</li> <li>9. Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula:  <math display="block">\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}</math>                     where:                      Pg is the generator output power into the substitution antenna.</li> </ol>
<p>Test setup:</p>	<p>For radiated emissions from 9kHz to 30MHz</p>  <p>For radiated emissions from 30MHz to 1GHz</p>

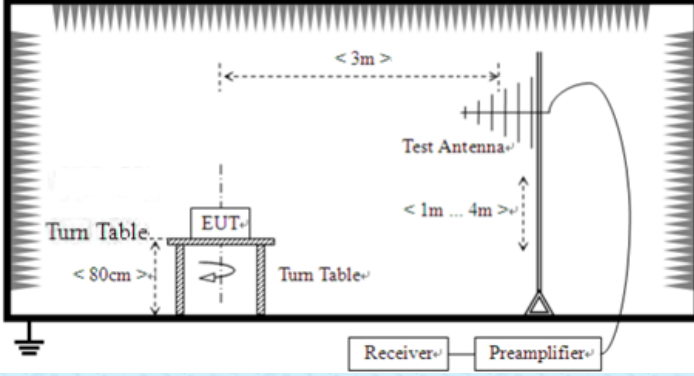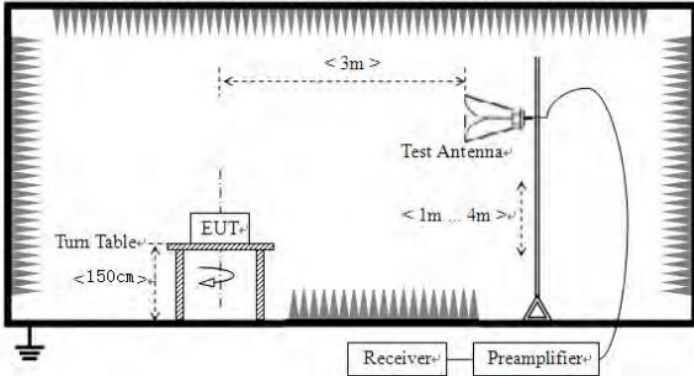	 <p>For radiated emissions above 1GHz</p> 								
Test Instruments:	Refer to section 6.0 for details								
Test mode:	Refer to section 5.2 for details								
Test environment:	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 25%;">Temp.:</td> <td style="width: 25%;">25 °C</td> <td style="width: 25%;">Humid.:</td> <td style="width: 25%;">52%</td> </tr> <tr> <td>Press.:</td> <td colspan="3">1012mbar</td> </tr> </table>	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar		
Temp.:	25 °C	Humid.:	52%						
Press.:	1012mbar								
Test voltage:	AC 120V, 60Hz								
Test results:	Pass								

**Remarks:**

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.
2. Both 2 antennas were tested and compliance, only worst condition(ANT 1) report.

**Measurement Data:**


**9 kHz ~ 30 MHz**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

## 30MHz~ 1GHz


Pre-scan all test modes, found worst case at 802.11a 5180MHz(ANT 1), and so only show the test result of it.

### Horizontal:

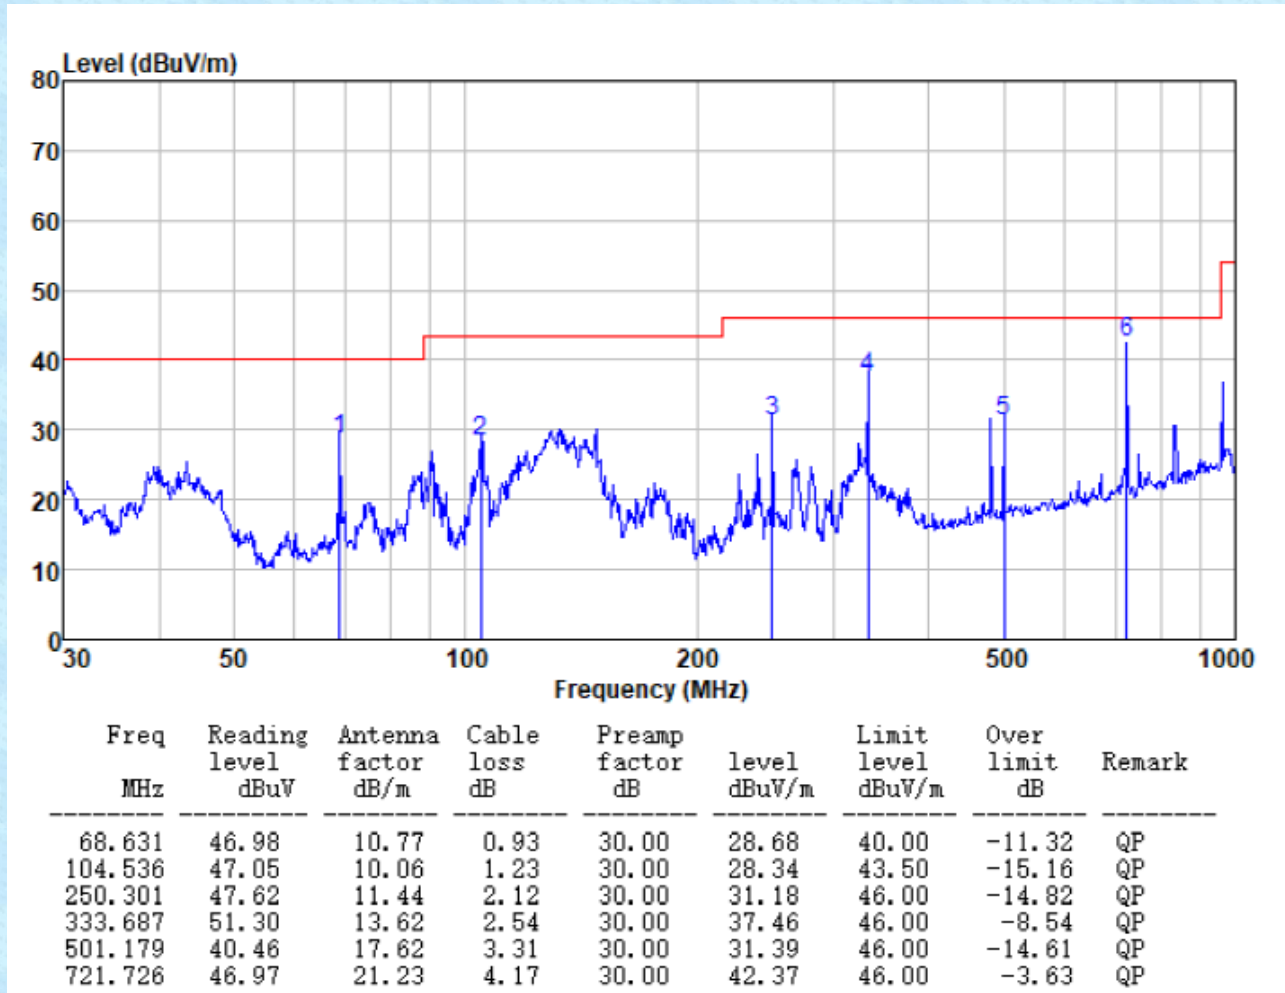



Vertical:

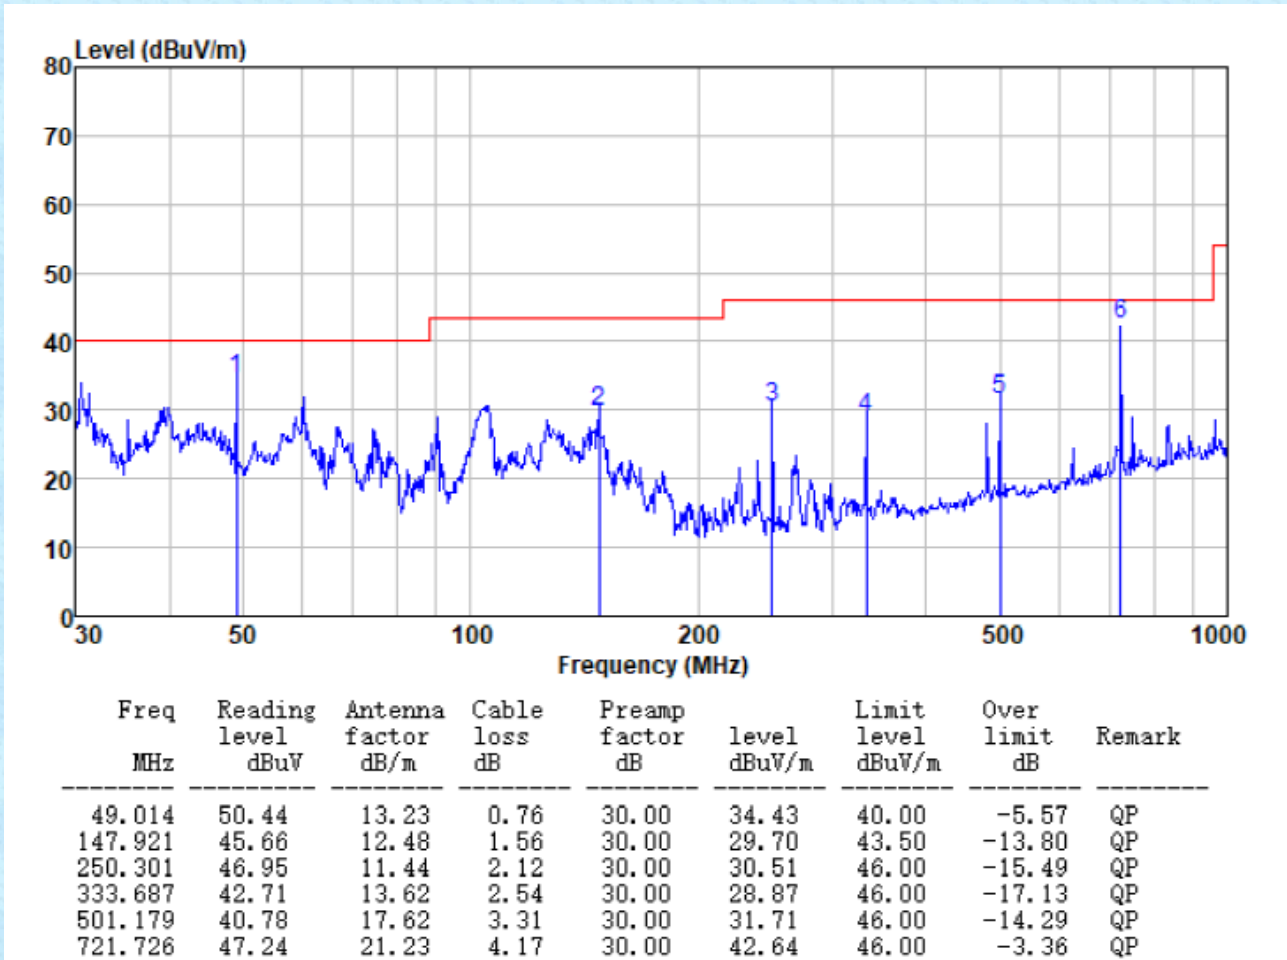

**Above 1GHz:**

802.11a(HT20)					Test Frequency: 5180MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360	36.15	38.96	8.27	35.64	47.74	68.20	-20.46	Vertical
15540	34.14	38.40	10.57	35.35	47.76	68.20	-20.44	Vertical
10360	35.36	38.96	8.27	35.64	46.95	68.20	-21.25	Horizontal
15540	31.72	38.40	10.57	35.35	45.34	68.20	-22.86	Horizontal
10360	28.65	38.96	8.27	35.64	40.24	54.00	-13.76	Vertical
15540	26.99	38.40	10.57	35.35	40.61	54.00	-13.39	Vertical
10360	26.44	38.96	8.27	35.64	38.03	54.00	-15.97	Horizontal
15540	26.52	38.40	10.57	35.35	40.14	54.00	-13.86	Horizontal

802.11a(HT20)					Test Frequency: 5200MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400	36.02	39.01	8.29	35.67	47.65	68.20	-20.55	Vertical
15600	34.19	38.30	10.62	35.36	47.75	68.20	-20.45	Vertical
10400	35.77	39.01	8.29	35.67	47.40	68.20	-20.80	Horizontal
15600	29.81	38.30	10.62	35.36	43.37	68.20	-24.83	Horizontal
10400	29.52	39.01	8.29	35.67	41.15	54.00	-12.85	Vertical
15600	28.24	38.30	10.62	35.36	41.80	54.00	-12.20	Vertical
10400	24.83	39.01	8.29	35.67	36.46	54.00	-17.54	Horizontal
15600	25.54	38.30	10.62	35.36	39.10	54.00	-14.90	Horizontal

802.11a(HT20)					Test Frequency: 5240MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480	36.65	39.15	8.32	35.78	48.34	68.20	-19.86	Vertical
15720	33.14	38.00	10.72	35.37	46.49	68.20	-21.71	Vertical
10480	33.28	39.15	8.32	35.78	44.97	68.20	-23.23	Horizontal
15720	33.34	38.00	10.72	35.37	46.69	68.20	-21.51	Horizontal
10480	27.29	39.15	8.32	35.78	38.98	54.00	-15.02	Vertical
15720	25.09	38.00	10.72	35.37	38.44	54.00	-15.56	Vertical
10480	25.72	39.15	8.32	35.78	37.41	54.00	-16.59	Horizontal
15720	22.47	38.00	10.72	35.37	35.82	54.00	-18.18	Horizontal

802.11n(HT20)					Test Frequency: 5180MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360	35.99	39.20	8.34	35.82	47.71	68.20	-20.49	Vertical
15540	34.61	37.90	10.77	35.38	47.90	68.20	-20.30	Vertical
10360	35.98	39.20	8.34	35.82	47.70	68.20	-20.50	Horizontal
15540	29.86	37.90	10.77	35.38	43.15	68.20	-25.05	Horizontal
10360	28.23	39.20	8.34	35.82	39.95	54.00	-14.05	Vertical
15540	25.79	37.90	10.77	35.38	39.08	54.00	-14.92	Vertical
10360	24.08	39.20	8.34	35.82	35.80	54.00	-18.20	Horizontal
15540	24.16	37.90	10.77	35.38	37.45	54.00	-16.55	Horizontal

802.11n(HT20)					Test Frequency: 5200MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400	36.93	38.96	8.27	35.64	48.52	68.20	-19.68	Vertical
15600	32.15	38.40	10.57	35.35	45.77	68.20	-22.43	Vertical
10400	33.00	38.96	8.27	35.64	44.59	68.20	-23.61	Horizontal
15600	33.90	38.40	10.57	35.35	47.52	68.20	-20.68	Horizontal
10400	30.13	38.96	8.27	35.64	41.72	54.00	-12.28	Vertical
15600	28.46	38.40	10.57	35.35	42.08	54.00	-11.92	Vertical
10400	27.43	38.96	8.27	35.64	39.02	54.00	-14.98	Horizontal
15600	22.64	38.40	10.57	35.35	36.26	54.00	-17.74	Horizontal

802.11n(HT20)					Test Frequency: 5240MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480	33.74	39.15	8.32	35.78	45.43	68.20	-22.77	Vertical
15720	33.24	38.00	10.72	35.37	46.59	68.20	-21.61	Vertical
10480	32.93	39.15	8.32	35.78	44.62	68.20	-23.58	Horizontal
15720	29.17	38.00	10.72	35.37	42.52	68.20	-25.68	Horizontal
10480	28.29	39.15	8.32	35.78	39.98	54.00	-14.02	Vertical
15720	27.92	38.00	10.72	35.37	41.27	54.00	-12.73	Vertical
10480	24.57	39.15	8.32	35.78	36.26	54.00	-17.74	Horizontal
15720	25.78	38.00	10.72	35.37	39.13	54.00	-14.87	Horizontal



802.11ac(HT20)					Test Frequency: 5180MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360	34.02	38.96	8.27	35.64	45.61	68.20	-22.59	Vertical
15540	34.79	38.40	10.57	35.35	48.41	68.20	-19.79	Vertical
10360	32.64	38.96	8.27	35.64	44.23	68.20	-23.97	Horizontal
15540	33.04	38.40	10.57	35.35	46.66	68.20	-21.54	Horizontal
10360	26.85	38.96	8.27	35.64	38.44	54.00	-15.56	Vertical
15540	24.52	38.40	10.57	35.35	38.14	54.00	-15.86	Vertical
10360	24.99	38.96	8.27	35.64	36.58	54.00	-17.42	Horizontal
15540	22.29	38.40	10.57	35.35	35.91	54.00	-18.09	Horizontal

802.11ac(HT20)					Test Frequency: 5200MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400	36.92	39.01	8.29	35.67	48.55	68.20	-19.65	Vertical
15600	33.50	38.30	10.62	35.36	47.06	68.20	-21.14	Vertical
10400	33.42	39.01	8.29	35.67	45.05	68.20	-23.15	Horizontal
15600	33.84	38.30	10.62	35.36	47.40	68.20	-20.80	Horizontal
10400	29.46	39.01	8.29	35.67	41.09	54.00	-12.91	Vertical
15600	27.95	38.30	10.62	35.36	41.51	54.00	-12.49	Vertical
10400	24.20	39.01	8.29	35.67	35.83	54.00	-18.17	Horizontal
15600	26.70	38.30	10.62	35.36	40.26	54.00	-13.74	Horizontal

802.11ac(HT20)					Test Frequency: 5240MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480	32.45	39.15	8.32	35.78	44.14	68.20	-24.06	Vertical
15720	33.26	38.00	10.72	35.37	46.61	68.20	-21.59	Vertical
10480	34.13	39.15	8.32	35.78	45.82	68.20	-22.38	Horizontal
15720	33.98	38.00	10.72	35.37	47.33	68.20	-20.87	Horizontal
10480	27.22	39.15	8.32	35.78	38.91	54.00	-15.09	Vertical
15720	27.39	38.00	10.72	35.37	40.74	54.00	-13.26	Vertical
10480	23.57	39.15	8.32	35.78	35.26	54.00	-18.74	Horizontal
15720	24.81	38.00	10.72	35.37	38.16	54.00	-15.84	Horizontal

802.11n(HT40)					Test Frequency: 5190MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380	37.44	39.01	8.28	35.67	49.06	68.20	-19.14	Vertical
15570	32.81	38.30	10.60	35.36	46.35	68.20	-21.85	Vertical
10380	34.01	39.01	8.28	35.67	45.63	68.20	-22.57	Horizontal
15570	30.71	38.30	10.60	35.36	44.25	68.20	-23.95	Horizontal
10380	26.87	39.01	8.28	35.67	38.49	54.00	-15.51	Vertical
15570	26.26	38.30	10.60	35.36	39.80	54.00	-14.20	Vertical
10380	27.59	39.01	8.28	35.67	39.21	54.00	-14.79	Horizontal
15570	25.24	38.30	10.60	35.36	38.78	54.00	-15.22	Horizontal

802.11n(HT40)					Test Frequency: 5230MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460	36.18	39.11	8.31	35.75	47.85	68.20	-20.35	Vertical
15690	33.30	38.10	10.70	35.37	46.73	68.20	-21.47	Vertical
10460	32.99	39.11	8.31	35.75	44.66	68.20	-23.54	Horizontal
15690	30.85	38.10	10.70	35.37	44.28	68.20	-23.92	Horizontal
10460	29.99	39.11	8.31	35.75	41.66	54.00	-12.34	Vertical
15690	28.99	38.10	10.70	35.37	42.42	54.00	-11.58	Vertical
10460	24.98	39.11	8.31	35.75	36.65	54.00	-17.35	Horizontal
15690	27.24	38.10	10.70	35.37	40.67	54.00	-13.33	Horizontal

802.11ac(HT40)					Test Frequency: 5190MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10380	33.48	39.01	8.28	35.67	45.10	68.20	-23.10	Vertical
15570	30.70	38.30	10.60	35.36	44.24	68.20	-23.96	Vertical
10380	32.40	39.01	8.28	35.67	44.02	68.20	-24.18	Horizontal
15570	32.07	38.30	10.60	35.36	45.61	68.20	-22.59	Horizontal
10380	26.38	39.01	8.28	35.67	38.00	54.00	-16.00	Vertical
15570	26.78	38.30	10.60	35.36	40.32	54.00	-13.68	Vertical
10380	28.01	39.01	8.28	35.67	39.63	54.00	-14.37	Horizontal
15570	26.37	38.30	10.60	35.36	39.91	54.00	-14.09	Horizontal

802.11ac(HT40)					Test Frequency: 5230MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10460	33.84	39.11	8.31	35.75	45.51	68.20	-22.69	Vertical
15690	34.27	38.10	10.70	35.37	47.70	68.20	-20.50	Vertical
10460	31.55	39.11	8.31	35.75	43.22	68.20	-24.98	Horizontal
15690	32.77	38.10	10.70	35.37	46.20	68.20	-22.00	Horizontal
10460	28.84	39.11	8.31	35.75	40.51	54.00	-13.49	Vertical
15690	27.37	38.10	10.70	35.37	40.80	54.00	-13.20	Vertical
10460	23.84	39.11	8.31	35.75	35.51	54.00	-18.49	Horizontal
15690	23.75	38.10	10.70	35.37	37.18	54.00	-16.82	Horizontal



802.11ac(HT80)					Test Frequency: 5210MHz			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10420	36.55	39.06	8.29	35.71	48.19	68.20	-20.01	Vertical
15630	33.63	38.20	10.65	35.36	47.12	68.20	-21.08	Vertical
10420	34.77	39.06	8.29	35.71	46.41	68.20	-21.79	Horizontal
15630	33.69	38.20	10.65	35.36	47.18	68.20	-21.02	Horizontal
10420	29.31	39.06	8.29	35.71	40.95	54.00	-13.05	Vertical
15630	27.58	38.20	10.65	35.36	41.07	54.00	-12.93	Vertical
10420	25.20	39.06	8.29	35.71	36.84	54.00	-17.16	Horizontal
15630	26.86	38.20	10.65	35.36	40.35	54.00	-13.65	Horizontal

Notes:

1. Level = Read Level + Antenna Factor+ Cable loss- Preamp Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.



## **8 Test Setup Photo**

Reference to the **appendix I** for details.

## **9 EUT Constructional Details**

Reference to the **appendix II** for details.

---END---