


RADIO TEST REPORT

The device described below is tested by Dongguan Nore Testing Center Co., Ltd. to determine the maximum emission levels emanating from the device, the severe levels which the device can endure and E.U.T.'s performance criterion. The test results, data evaluation, test procedures, and equipment of configurations shown in this report were made in accordance with the procedures in ANSI C63.10(2013).

Applicant : Shenzhen Litaosheng Technology co,Ltd.
Address : Room 208, 4th Building, 1970 Technology Town, Minzhi, Longhua District, Shenzhen City, Guangdong Province, China
Manufacturer/Factory : Shenzhen Litaosheng Technology co,Ltd.
Address : Room 208,4th Building,1970 Technology Town, Minzhi, Longhua District, Shenzhen City, Guangdong Province, China
E.U.T. : Fast Charge Wireless Charging Base
Brand Name : N/A
Model No. : TS06, D6 (For model difference refer to section 1)
FCC ID : 2AOS6TS06
Measurement Standard : FCC PART 15 Subpart C
Date of Receiver : January 09, 2018
Date of Test : January 10, 2018 to January 17, 2018
Date of Report : January 18, 2018

This Test Report is Issued Under the Authority of :

Prepared by



Alina Guo / Engineer

Approved & Authorized Signer



Iori Fan / Authorized Signatory

This test report is for the customer shown above and their specific product only. This report applies to above tested sample only and shall not be reproduced in part without written approval of Dongguan Nore Testing Center Co., Ltd.

Table of Contents

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST	4
1.2 RELATED SUBMITTAL(S) / GRANT (S).....	5
1.3 TEST METHODOLOGY	5
1.4 EQUIPMENT MODIFICATIONS	5
1.5 SUPPORT DEVICE	5
1.6 TEST FACILITY AND LOCATION.....	6
1.7 SUMMARY OF TEST RESULTS.....	6
2. SYSTEM TEST CONFIGURATION.....	7
2.1 EUT CONFIGURATION.....	7
2.2 SPECIAL ACCESSORIES.....	7
2.3 DESCRIPTION OF TEST MODES	7
2.4 EUT EXERCISE	7
3. CONDUCTED EMISSIONS TEST.....	8
3.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	8
3.2 TEST CONDITION	8
3.3 MEASUREMENT RESULTS.....	8
4. RADIATED EMISSION TEST.....	11
4.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	11
4.2 MEASUREMENT PROCEDURE	12
4.3 LIMIT	13
4.4 MEASUREMENT RESULTS	14
5. 20DB BANDWIDTH.....	21
5.1 MEASUREMENT PROCEDURE	21
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	21
5.3 MEASUREMENT RESULTS.....	21
6. TEST EQUIPMENT LIST.....	24

Revision History of This Test Report

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test

Product name	: Fast Charge Wireless Charging Base
Main model	: TS06
Additional model	: D6
Model difference	: Both models have the same circuit schematic, construction, PCB Layout and critical components. Their difference in model number and color due to trading purpose.
Power Supply	: Input: DC 5V From adapter Output: DC 5V 2A DC 9V 1.67A
Test voltage	: AC 120V 60Hz adapter input
Adapter	: N/A
Cable	: N/A
Software version	: V1.0
Hardware version	: V1.0
Note	: N/A
Remark	: N/A
Frequency Range	: 105.5-204.5KHz

Note: The Lowest, middle, and the Highest frequency of channel were selected to perform the test. The selected frequency and test software see below:

Channel	Frequency KHz
1	105.5
51	155.5
100	204.5

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **2AOS6TS06** filing to comply with FCC Part 15 (2016), Subpart C Rule.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters.

1.4 Equipment Modifications

Not available for this EUT intended for grant.

1.5 Support Device

Note

1.6 Test Facility and Location

Site Description

EMC Lab : Listed by CNAS, August 14, 2015
The certificate is valid until August 13, 2018
The Laboratory has been assessed and proved to be in compliance with CNAS/CL01
The Certificate Registration Number is L5795.

Listed by A2LA, November 01, 2017
The certificate is valid until December 31, 2019
The Laboratory has been assessed and proved to be in compliance with ISO17025
The Certificate Registration Number is 4429.01

Listed by FCC, November 06, 2017
The Designation Number is CN1214
Test Firm Registration Number: 907417

Listed by Industry Canada, June 08, 2017
The Certificate Registration Number. Is 46405-9743

Name of Firm : Dongguan Nore Testing Center Co., Ltd.
(Dongguan NTC Co., Ltd.)

Site Location : Building D, Gaosheng Science & Technology Park, Zhouxi Longxi Road, Nancheng District, Dongguan City, Guangdong Province, China

1.7 Summary of Test Results

FCC Rules	Description Of Test	Uncertainty	Result
§15.35	20dB Bandwidth	$\pm 1.42 \times 10^{-4}\%$	Compliant
§15.207 (a)	AC Power Conducted Emission	$\pm 1.06\text{dB}$	Compliant
§15.209	Radiated Emission	$\pm 3.70\text{dB}$	Compliant

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 Special Accessories

Not available for this EUT intended for grant.

2.3 Description of test modes


The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and normal mode is programmed. The Lowest, middle and highest channel were chosen for testing.

2.4 EUT Exercise

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

3. Conducted Emissions Test

3.1 Test SET-UP (Block Diagram of Configuration)

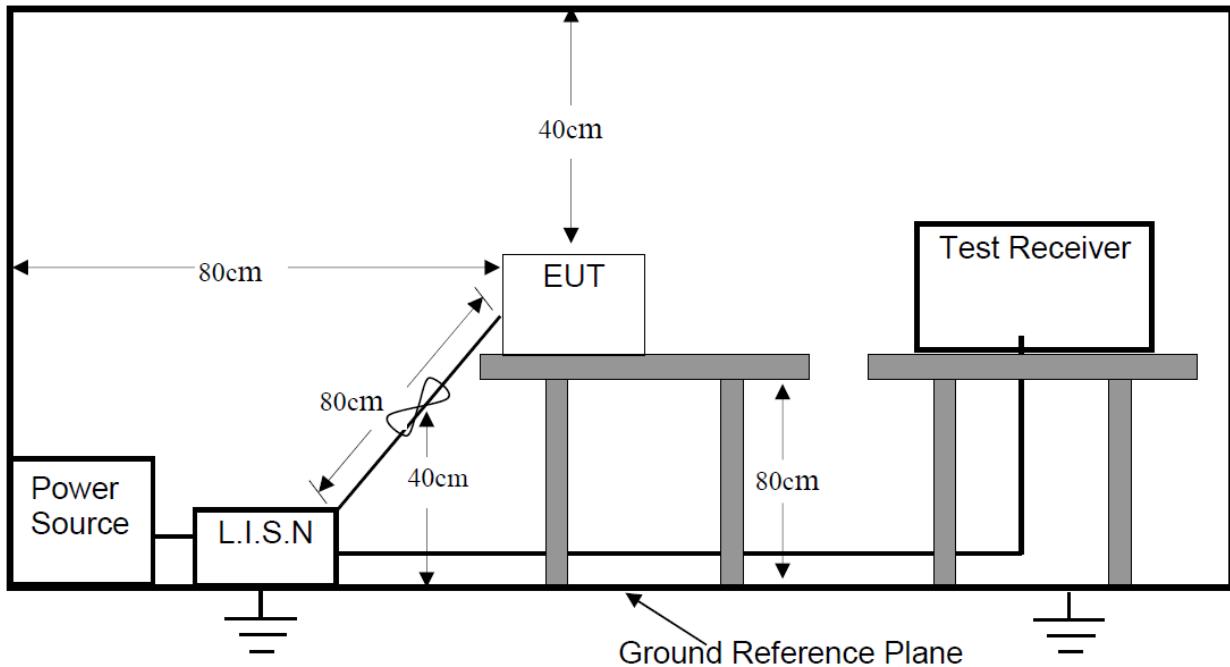

3.2 Test Condition

Test Requirement: FCC Part 15.207

Frequency Range: 150KHz ~ 30MHz

Detector: RBW 9KHz, VBW 30KHz

Operation Mode: Full Load, Half Load, Empty Load

3.3 Measurement Results

Please refer to following plots of the worst case.



Dongguan NTC Co., Ltd.
 Tel: +86-769-22022444 Fax: +86-769-22022799
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Conducted Emission Measurement


File : TS02

Data : #2

Date: 2018-1-15

Time: 9:13:45

80.0 dBuV

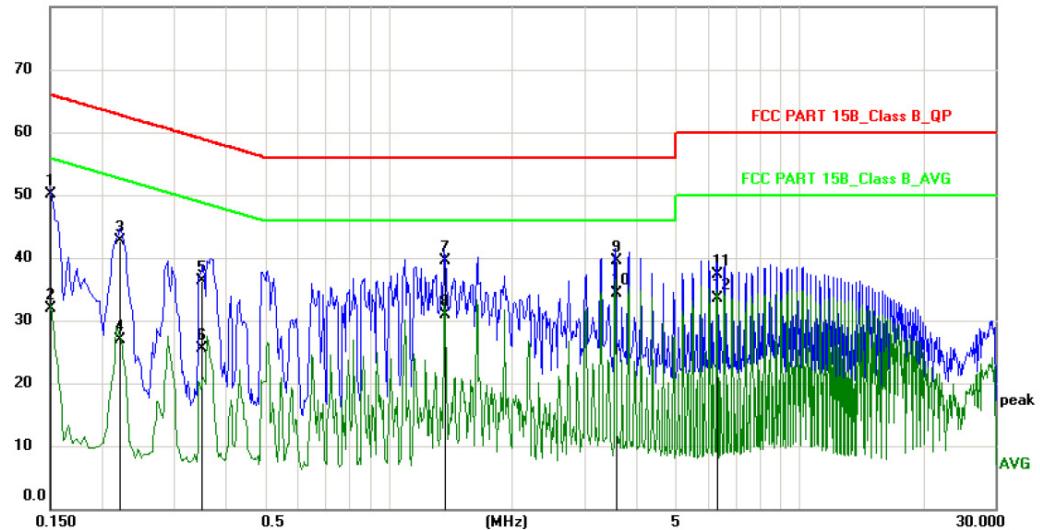

Site

Phase:

L1

Temperature: 18.7

Limit: FCC PART 15B_Class B_QP

Power: AC120V/60Hz

Humidity: 40 %

EUT: Fast Charge Wireless Charging Base

M/N: TS06

Mode: Full Load

Note: 9V

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		0.1500	39.40	10.80	50.20	66.00	-15.80	QP	
2		0.1500	21.10	10.80	31.90	56.00	-24.10	AVG	
3		0.2220	32.00	10.80	42.80	62.74	-19.94	QP	
4		0.2220	16.10	10.80	26.90	52.74	-25.84	AVG	
5		0.3519	25.60	10.80	36.40	58.92	-22.52	QP	
6		0.3519	14.70	10.80	25.50	48.92	-23.42	AVG	
7		1.3700	28.70	10.80	39.50	56.00	-16.50	QP	
8		1.3700	20.10	10.80	30.90	46.00	-15.10	AVG	
9		3.5660	28.70	10.80	39.50	56.00	-16.50	QP	
10	*	3.5660	23.60	10.80	34.40	46.00	-11.60	AVG	
11		6.3100	26.50	10.80	37.30	60.00	-22.70	QP	
12		6.3100	22.70	10.80	33.50	50.00	-16.50	AVG	

*:Maximum data x:Over limit !:over margin

(Reference Only)



Dongguan NTC Co., Ltd.
 Tel: +86-769-22022444 Fax: +86-769-22022799
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Conducted Emission Measurement


File : TS02

Data : #1

Date: 2018-1-15

Time: 9:01:19

80.0 dBuV

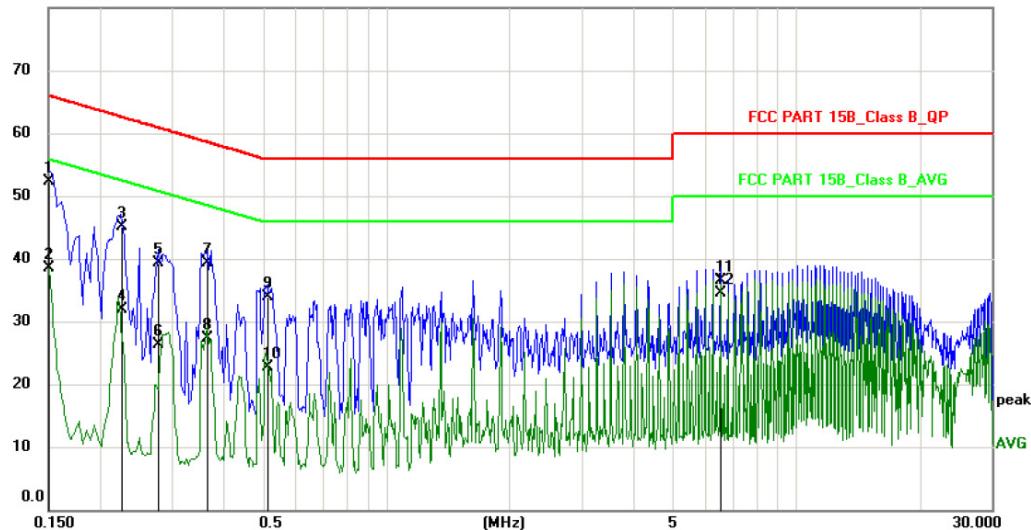

Site

Phase: **N**

Temperature: 18.7

Limit: FCC PART 15B_Class B_QP

Power: AC120V/60Hz

Humidity: 40 %

EUT: Fast Charge Wireless Charging Base

M/N: TS06

Mode: Full Load

Note: 9V

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Comment						
								MHz	dBuV	dB	dBuV	dB	Detector	Comment
1	*	0.1500	41.50	10.80	52.30	66.00	-13.70	QP						
2		0.1500	27.80	10.80	38.60	56.00	-17.40	AVG						
3		0.2260	34.30	10.80	45.10	62.60	-17.50	QP						
4		0.2260	21.10	10.80	31.90	52.60	-20.70	AVG						
5		0.2779	28.60	10.80	39.40	60.88	-21.48	QP						
6		0.2779	15.50	10.80	26.30	50.88	-24.58	AVG						
7		0.3659	28.50	10.80	39.30	58.59	-19.29	QP						
8		0.3659	16.50	10.80	27.30	48.59	-21.29	AVG						
9		0.5140	23.10	10.80	33.90	56.00	-22.10	QP						
10		0.5140	12.00	10.80	22.80	46.00	-23.20	AVG						
11		6.5500	25.80	10.80	36.60	60.00	-23.40	QP						
12		6.5500	23.70	10.80	34.50	50.00	-15.50	AVG						


*:Maximum data x:Over limit !:over margin

⟨Reference Only


4. Radiated Emission Test

4.1 Test SET-UP (Block Diagram of Configuration)

4.1.1 Radiated Emission Test Set-Up, Frequency Below 30MHz

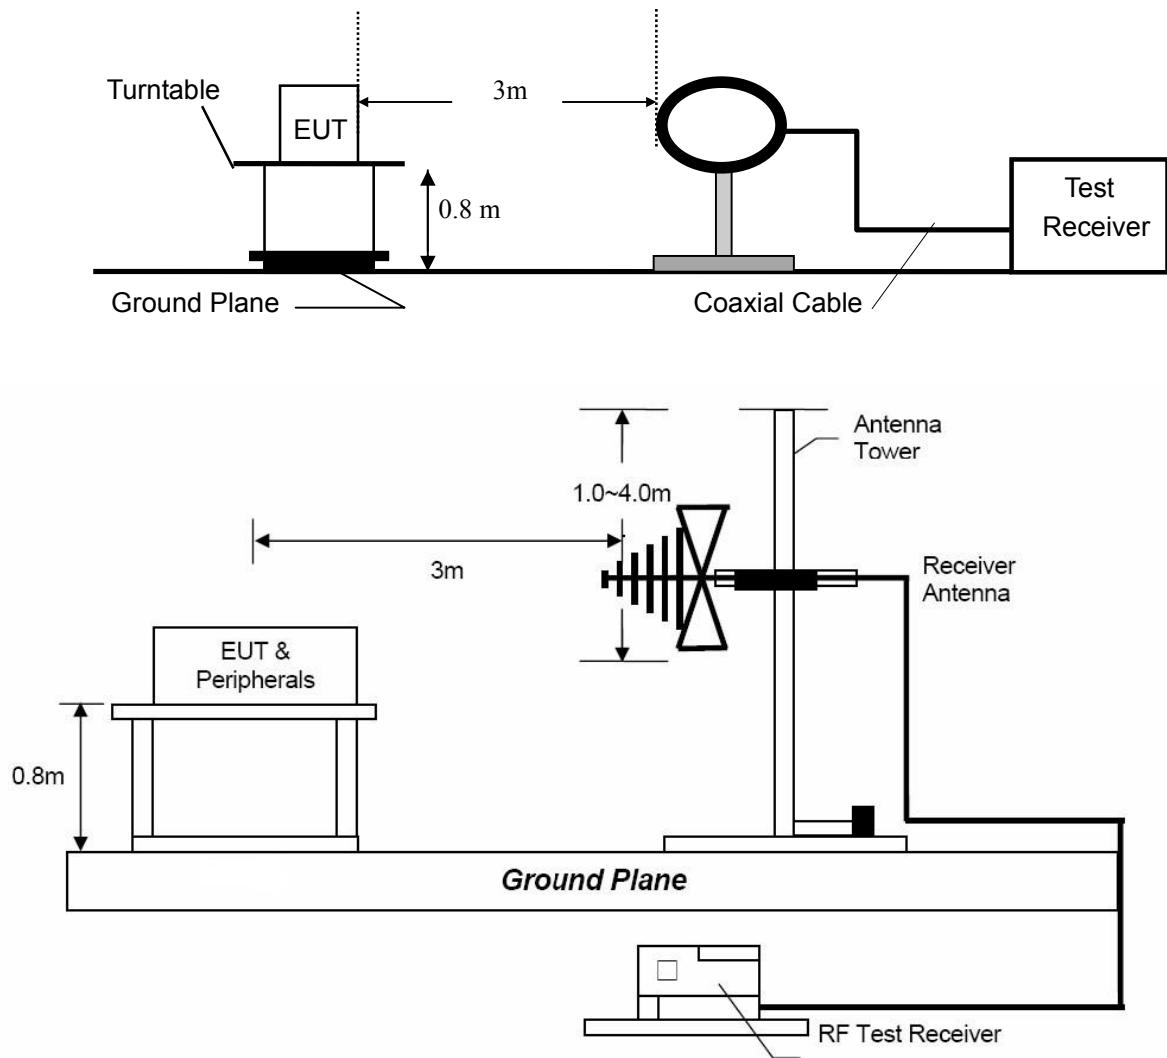

4.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

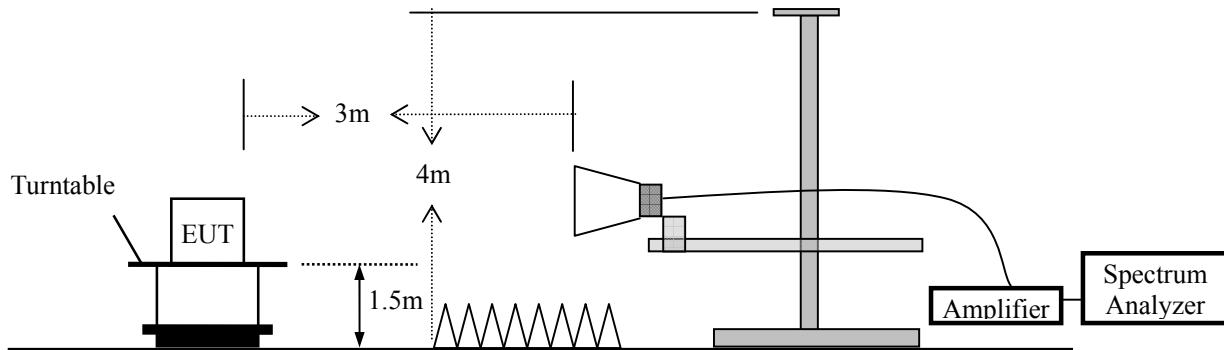

4.2 Measurement Procedure

- a. Blow 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room.
- b. For the radiated emission test above 1GHz:
The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- f. A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Level	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

4.3 Limit

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		μV/m
0.009 ~ 0.490	300	2400/F(kHz)
0.490 ~ 1.705	30	24000/F(kHz)
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500

Remark : (1) Emission level (dB) μ V = 20 log Emission level μ V/m
(2) The smaller limit shall apply at the cross point between two frequency bands.
(3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
(4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz/ RB 200Hz for AV
	90KHz~110KHz/ RB 200Hz for QP
	110KHz~490KHz/ RB 200Hz for AV
	490KHz~30MHz/ RB 9KHz for QP
	30MHz~1000MHz/ RB 120KHz for QP

FCC 15.209 (d) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90KHz, 110-490KHz and above 1000MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

4.4 Measurement Results

Please refer to following plots of the worst case.



Dongguan NTC Co., Ltd.
 Tel: +86-769-22022444 Fax: +86-769-22022799
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)


Radiated Emission Measurement

File :TS02
 140.0 dBuV/m

Data :#14

Date: 2018-1-16

Time: 16:45:16

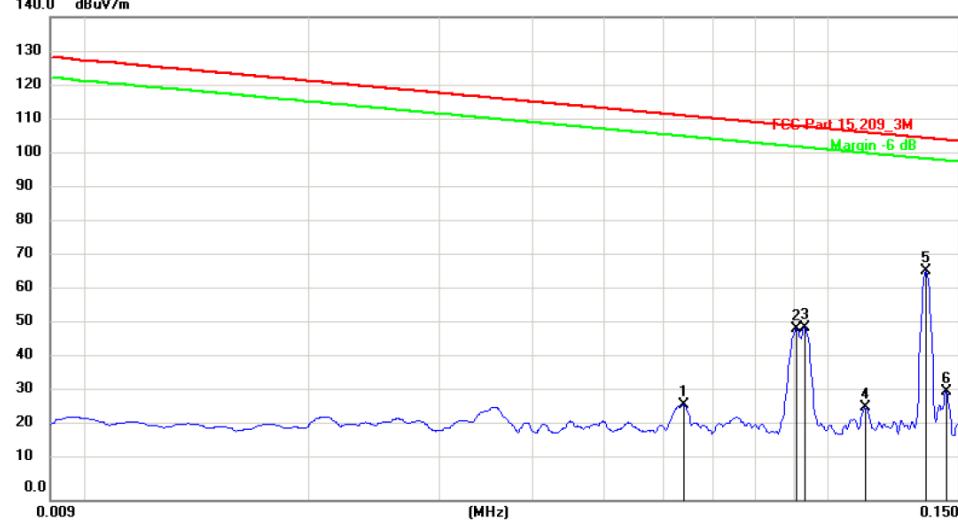

Site

Polarization: **Horizontal**

Temperature: 26

Limit: FCC Part 15.209_3M

Power: AC120V/60Hz

Humidity: 60 %

EUT: Fast Charge Wireless Charging Base

Distance:

M/N: TS06

Mode: Half Load

Note: 9V

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m			cm	degree
1		0.0640	7.12	20.52	27.64	111.30	-83.74	peak	
2		0.0908	28.90	20.54	49.44	108.36	-58.92	peak	
3		0.0932	29.45	20.54	49.99	108.14	-58.15	peak	
4		0.1123	6.11	20.53	26.64	106.52	-79.88	peak	
5 *		0.1358	45.68	20.53	66.21	104.88	-38.67	peak	
6		0.1446	10.83	20.53	31.36	104.34	-72.98	peak	

*:Maximum data x:Over limit !:over margin

⟨ Reference Only


Note: When the PEAK level was below the limit of AV level, the AV levels were considered to meet the requirements.



Dongguan NTC Co., Ltd.
 Tel:+86-769-22022444 Fax:+86-769-22022799
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Radiated Emission Measurement

File :TS02 Data :#13 Date: 2018-1-16 Time: 16:44:21

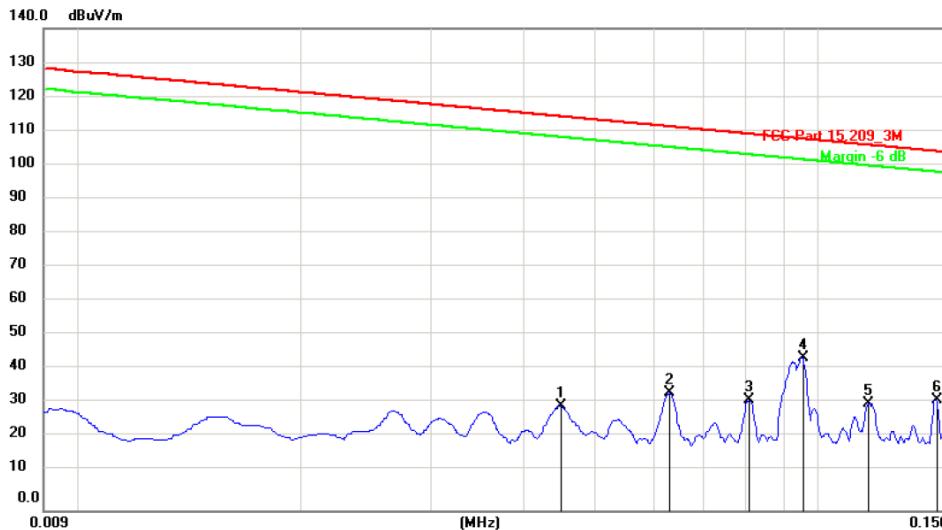

Site	Polarization: Vertical	Temperature: 26
Limit: FCC Part 15.209_3M	Power: AC120V/60Hz	Humidity: 60 %
EUT: Fast Charge Wireless Charging Base	Distance:	
M/N: TS06		
Mode: Half Load		
Note: 9V		

No. Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
		Level	Factor	ment						
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	0.0449	9.63	20.59	30.22	114.44	-84.22	peak			
2	0.0631	13.45	20.53	33.98	111.50	-77.52	peak			
3	0.0810	11.55	20.53	32.08	109.35	-77.27	peak			
4 *	0.0956	23.62	20.54	44.16	107.92	-63.76	peak			
5	0.1174	10.49	20.53	31.02	106.14	-75.12	peak			
6	0.1448	11.60	20.53	32.13	104.30	-72.20	peak			

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: When the PEAK level was below the limit of AV level, the AV levels were considered to meet the requirements.



Dongguan NTC Co., Ltd.
 Tel:+86-769-22022444 Fax:+86-769-22022799
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)


Radiated Emission Measurement

File :TS02

Data :#25

Date: 2018-1-16

Time: 17:51:30

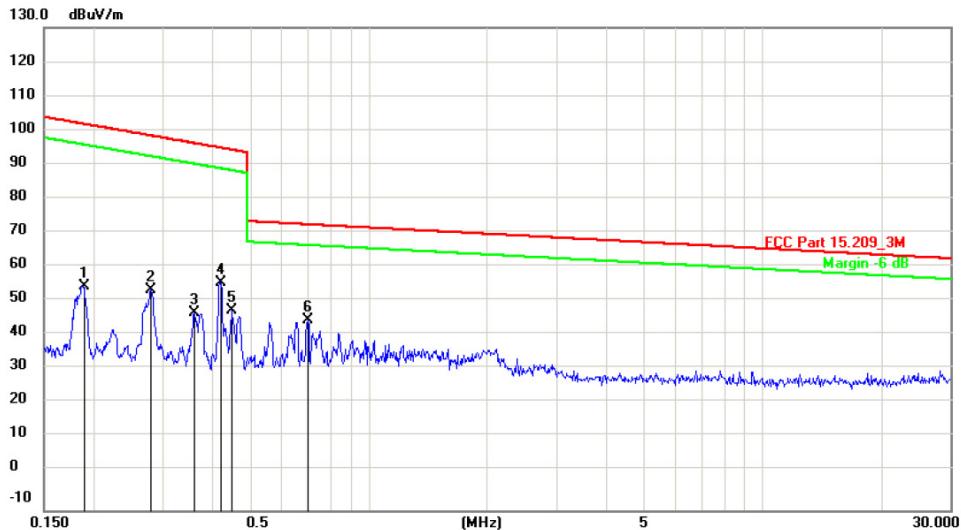

Site

Polarization: *Horizontal*

Temperature: 26

Limit: FCC Part 15.209_3M

Power: AC120V/60Hz

Humidity: 60 %

EUT: Fast Charge Wireless Charging Base

Distance:

M/N: TS06

Mode: Half Load

Note: 9V

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm		Table Degree	Comment
							Detector	degree		
1	0.1884	34.49	20.51	55.00	102.06	-47.06	peak			
2	0.2802	33.56	20.49	54.05	98.63	-44.58	peak			
3	0.3614	26.69	20.47	47.16	96.43	-49.27	peak			
4	0.4193	35.65	20.46	56.11	95.15	-39.04	peak			
5	0.4491	27.62	20.45	48.07	94.55	-46.48	peak			
6 *	0.7009	24.72	20.42	45.14	72.86	-27.72	peak			

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: When the PEAK level was below the limit of AV level, the AV levels were considered to meet the requirements.



Dongguan NTC Co., Ltd.
 Tel: +86-769-22022444 Fax: +86-769-22022799
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)


Radiated Emission Measurement

File :TS02

Data :#26

Date: 2018-1-16

Time: 17:57:01

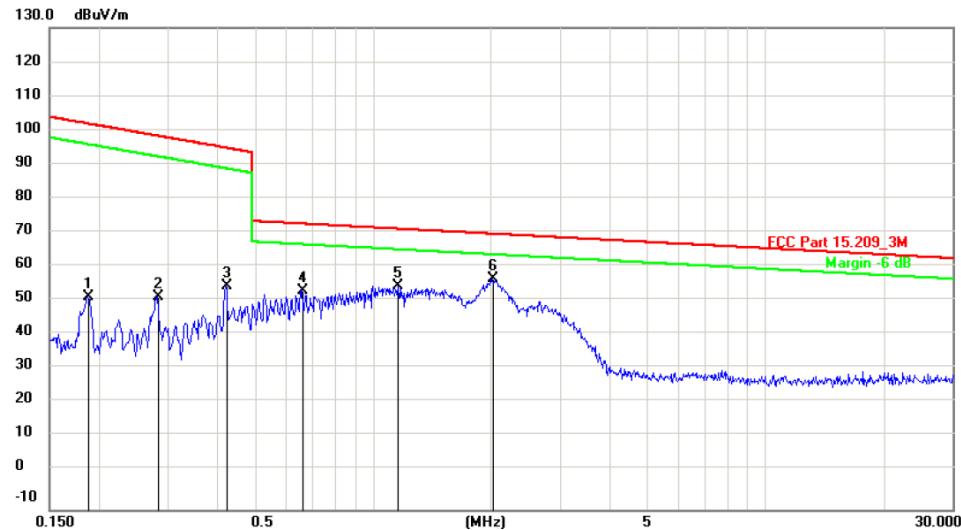

Site

Polarization: **Vertical**

Temperature: 26

Limit: FCC Part 15.209_3M

Power: AC120V/60Hz

Humidity: 60 %

EUT: Fast Charge Wireless Charging Base

Distance:

M/N: TS06

Mode: Half Load

Note: 9V

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	0.1874	31.20	20.51	51.71	102.10	-50.42	peak		
2	0.2818	31.15	20.49	51.64	98.59	-46.95	peak		
3	0.4215	34.31	20.46	54.77	95.10	-40.33	peak		
4	0.6578	33.27	20.43	53.70	73.02	-19.32	peak		
5	1.1595	34.38	20.40	54.78	71.53	-16.75	peak		
6 *	2.0119	36.48	20.40	56.88	70.08	-13.20	peak		

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: When the PEAK level was below the limit of AV level, the AV levels were considered to meet the requirements.



Dongguan NTC Co., Ltd.
 Tel:+86-769-22022444 Fax:+86-769-22022799
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Radiated Emission Measurement

File :TS02
 80.0 dBuV/m

Data :#9

Date: 2018-1-12

Time: 14:03:18



Site	Polarization: Horizontal	Temperature: 26
Limit: FCC Part 15B_Class B_3M	Power: AC120V/60Hz	Humidity: 47 %
EUT: Fast Charge Wireless Charging Base	Distance: 3m	
M/N: TS06		
Mode: Half Load		
Note: 9V		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		92.0800	50.95	-13.45	37.50	43.50	-6.00	QP		
2		144.4600	40.20	-15.60	24.60	43.50	-18.90	QP		
3		184.2300	39.88	-13.88	26.00	43.50	-17.50	QP		
4	*	270.5600	53.18	-11.18	42.00	46.00	-4.00	QP		
5		291.9000	48.90	-10.70	38.20	46.00	-7.80	QP		
6		336.5200	33.90	-9.40	24.50	46.00	-21.50	QP		

*:Maximum data x:Over limit !:over margin

(Reference Only)



Dongguan NTC Co., Ltd.
 Tel:+86-769-22022444 Fax:+86-769-22022799
 Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Radiated Emission Measurement


File : TS02

Data : #10

Date: 2018-1-12

Time: 14:11:40

80.0 dBuV/m

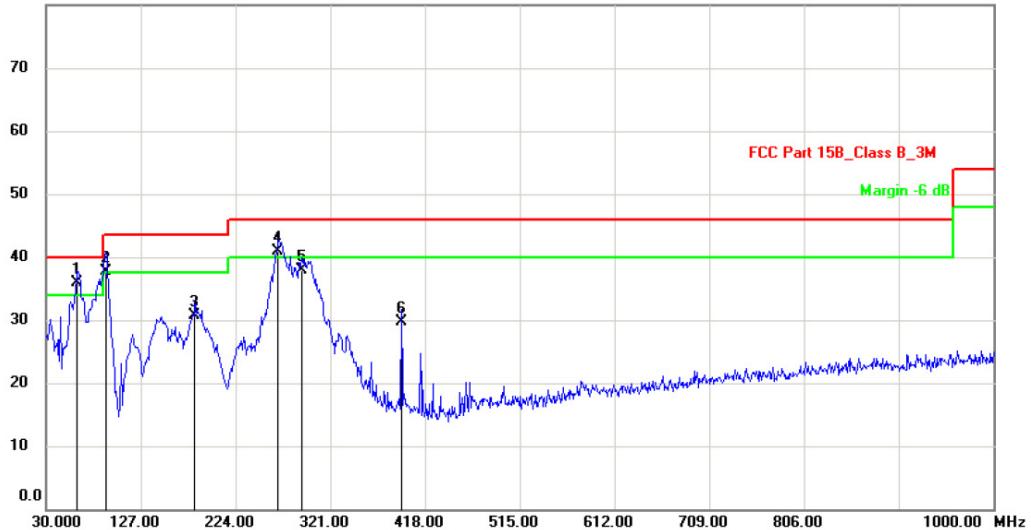

Site

Polarization: **Vertical**

Temperature: 26

Limit: FCC Part 15B_Class B_3M

Power: AC120V/60Hz

Humidity: 47 %

EUT: Fast Charge Wireless Charging Base

Distance: 3m

M/N: TS06

Mode: Half Load

Note: 9V

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment						
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	62.0100	50.74	-14.84	35.90	40.00	-4.10	QP			
2	!	91.1100	54.36	-16.66	37.70	43.50	-5.80	QP			
3		182.2899	47.80	-17.00	30.80	43.50	-12.70	QP			
4	!	267.6500	54.14	-13.24	40.90	46.00	-5.10	QP			
5		291.9000	50.60	-12.70	37.90	46.00	-8.10	QP			
6		393.7500	40.84	-11.14	29.70	46.00	-16.30	QP			

*:Maximum data x:Over limit !:over margin

⟨Reference Only

5. 20dB Bandwidth

5.1 Measurement Procedure

Maximum 20dB RF Bandwidth, FCC Rule 15.35:

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. Use the spectrum 20dB down delta function to measure the bandwidth.

5.2 Test SET-UP (Block Diagram of Configuration)




5.3 Measurement Results

Refer to attached data chart.

RBW:	30Hz	VBW:	100Hz
Test By:	Sance	Spectrum Detector:	PK
Temperature :	24 °C	Test Date :	January 16, 2017
Test Result:	PASS	Humidity :	50 %


Channel frequency (KHz)	20dB Down BW(Hz)
105.5	79.33
155.5	78.53
204.5	78.53

Lowest Channel

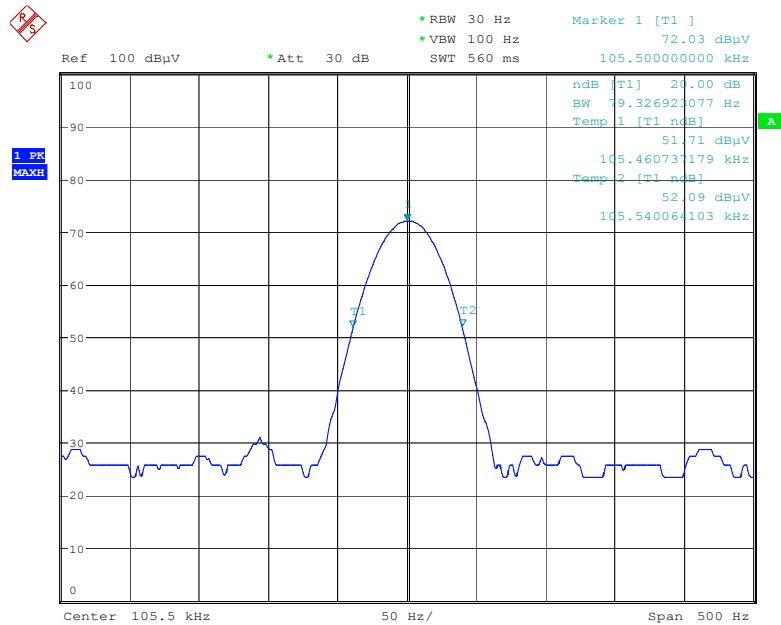


Date: 16.JAN.2018 16:31:20

Middle Channel

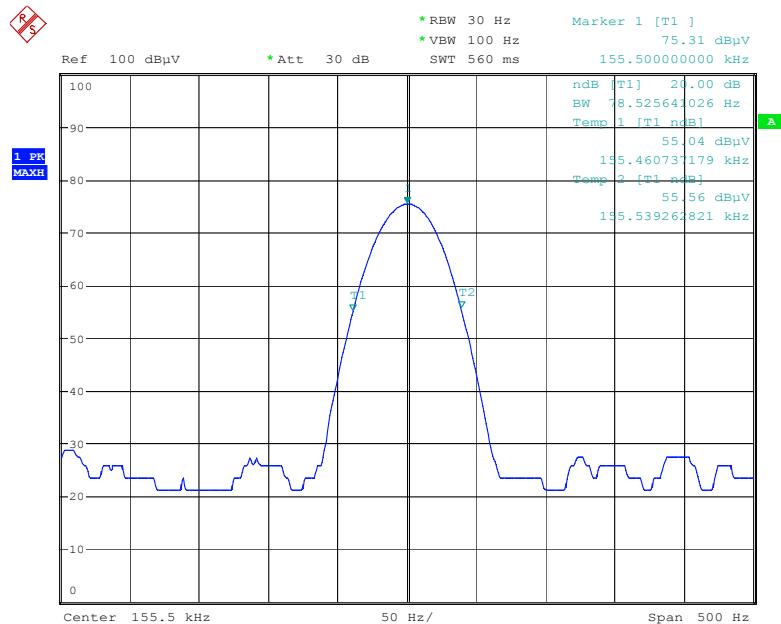

Date: 16.JAN.2018 16:32:00

Highest Channel

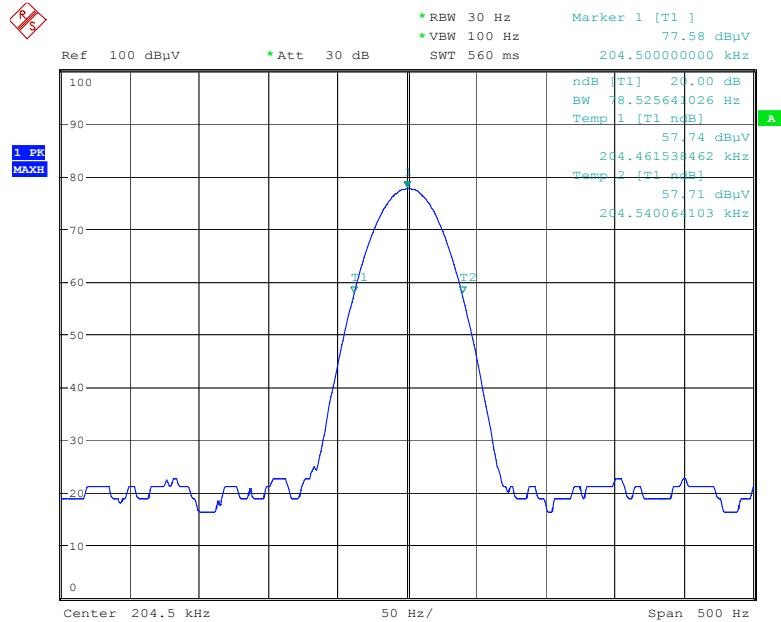

Date: 16.JAN.2018 16:32:36

6. Test Equipment List

Description	Manufacturer	Model Number	Serial Number	Characteristics	Calibration Date	Calibration Due Date
Test Receiver	Rohde & Schwarz	ESCI7	100837	9KHz~7GHz	Mar. 14, 2017	Mar. 13, 2018
Antenna	Schwarzbeck	VULB9162	9162-010	30MHz~7GHz	Mar. 15, 2017	Mar. 14, 2018
Cable	Huber+Suhner	CBL2-NN-1M	22390001	9KHz~7GHz	Mar. 14, 2017	Mar. 13, 2018
Cable	Huber+Suhner	CIL02	N/A	9KHz~7GHz	Mar. 14, 2017	Mar. 13, 2018
RF Cable	Huber+Suhner	SF-104	MY16559/4	9KHz~25GHz	Apr. 25, 2017	Apr. 25, 2018
Power Amplifier	HP	HP 8447D	1145A00203	100KHz~1.3GHz	Mar. 14, 2017	Mar. 13, 2018
Horn Antenna	Schwarzbeck	BBHA9170	9170-242	15GHz~40GHz	Mar. 14, 2017	Mar. 13, 2018
Horn Antenna	Com-Power	AH-118	071078	1GHz~18GHz	Mar. 15, 2017	Mar. 14, 2018
RF Cable	Huber+Suhner	SF-104	N/A	9KHz~40GHz	Apr. 25, 2017	Apr. 24, 2018
Loop antenna	Schwarzbeck	FMZB1513	1513-272	9KHz~30MHz	Sep. 09, 2017	Sep. 08, 2018
Spectrum Analyzer	Rohde & Schwarz	FSU26	200409/026	20Hz~26.5GHz	Apr. 25, 2017	Apr. 24, 2018
Spectrum Analyzer	Rohde & Schwarz	FSV40	101003	10Hz~40GHz	April. 06, 2017	April. 05, 2018
Pre-Amplifier	EMCI	EMC 184045	980102	18GHz~40GHz	Nov. 03, 2017	Nov. 02, 2018
Pre-Amplifier	Agilent	8449B	3008A02964	1GHz~26.5GHz	Apr. 25, 2017	Apr. 24, 2018
L.I.S.N.	Rohde & Schwarz	ENV 216	101317	9KHz~30MHz	Mar. 14, 2017	Mar. 13, 2018
Temporary antenna connector	TESCOM	SS402	N/A	9KHz-25GHz	N/A	N/A

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

---End---