

RF Exposure Evaluation Report

1. Product Information

FCC ID:	2AP2N-BOX10000W
Product Name	Wireless Power Bank
Model Number	BOX10000W
Additional Model	/
Model Declaration	/
Power Supply	Type-C Input: 9V/2A, 5V/2.5A Micro USB Input: 9V/2A, 5V/2A USB Output: 5V/3.1A, 9V/2A, 12V/1.5A Type-C Output: 5V/3.1A, 9V/2A, 12V/1.5A QI Output: 9V/1.12A(10W), 9V/0.83A(7.5W), 5V/1A(5W)
Modulation Type	Continuous Wave
Frequency Range	125-205KHz
Maximum Power WPT	10W
Operation Frequency	160KHz, 175KHz
Antenna Type	Coil Antenna
Hardware version	V3
Software version	V3.01
Accessories	Wireless Load
Exposure category	General population/uncontrolled environment
EUT Type	Production Unit
Device Type	Mixed Mobile and Portable Device

2. Evaluation Method

Per KDB 680106 D01 Section 3. RF Exposure Requirements;

- 1) According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.
- 2) According to §1.1310 and §2.1091 RF exposure is calculated.
- 3) Based on the design and implementation of the power transfer application, it must be clearly identified if mobile or portable RF exposure conditions apply. Devices that are installed to provide separation of at least 20 cm from users and bystanders may qualify for mobile exposure conditions. For some conditions where users and bystanders may be exposed at closer than 20 cm, section 2.1091(d) (4) of the rules may apply.
- 4) For devices designed for typical desktop applications, such a wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 15 cm. E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz
- 5) Portable exposure conditions from 100 kHz to 6 GHz are determined with respect to SAR requirements.

Existing SAR systems and test procedures are generally intended for measurements above 100 MHz. While numerical modeling can be an alternative, the constraints of substantial computational resources at low frequencies could introduce further limitations. Under these circumstances, including operations below 100 kHz, the Commission may consider a combination of analytical analysis, field strength, radiated and conducted power measurements, in conjunction with some limited numerical modeling to assess compliance.

- 6) Depending on the operating frequency, existing SAR and MPE measurement procedures may be adapted to evaluate wireless power transfer devices for compliance with respect to mobile or portable exposure conditions. If the grantee or its test lab have any questions regarding RF exposure evaluation they should contact the FCC Laboratory with sufficient system operating configuration details to determine if RF exposure evaluation is necessary and, if required, how to apply specific test procedures. Below 100 MHz, when SAR testing is required and the device is operating at close proximity to persons, information on device design, implementation, operating configurations, exposure conditions of users and bystanders are needed to determine the evaluation and testing requirements. In addition, the influence of nearby objects may also need consideration according to the wireless power transfer system implementation; for example, the effects of placing the device, its coils or radiating elements on or near metallic surfaces
- 7) According to April 2018 TCB Workshop, No need to report E-field measurements. Only H-field required.

3. Evaluation Limit

3.1 Refer Evaluation Method

[ANSI C95.1–1999](#): IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

[FCC KDB publication 680106 D01 RF Exposure Wireless Charging Apps v03](#): RF Exposure Considerations for Low Power Consumer Wireless Power Transfer Applications

[FCC CFR 47 part1 1.1310](#): Radiofrequency radiation exposure limits.

[FCC CFR 47 part2 2.1091](#): Radiofrequency radiation exposure evaluation: mobile devices

[FCC CFR 47 part 15.C](#): Industrial, Scientific, and Medical Equipment

3.2 Limit

Limits for Maximum Permissible Exposure (MPE)/Controlled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500	/	/	f/300	6
1,500-100,000	/	/	5	6

Limits for Maximum Permissible Exposure (MPE)/Uncontrolled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500	/	/	f/1500	30
1,500-100,000	/	/	1.0	30

F=frequency in MHz


*=Plane-wave equivalent power density

According to FCC KDB 680106 D01 Section 3. RF Exposure Requirements clause 3 the Emission-Limits in the frequency range from 100 KHz to 300 KHz should be assessed versus the limits at 300 KHz in Table 1 of CFR 47 – Section1.310 as following (measured distance shall be 15cm from the center of the probe to the edge of the device):

	E-filed	H-filed	B-filed
Frequency	V/m	A/m	uT
0.3 MHz – 3.0 MHz	614	1.613	2.0
3.0 MHz – 30 MHz	$824/f (=27.5_{30\text{MHz}})$	$2.19/f (=0.073_{30\text{MHz}})$	--

A KDB inquire was required to determine/confirm the applicable limits below 100 KHz.

4. Test Setup Diagram

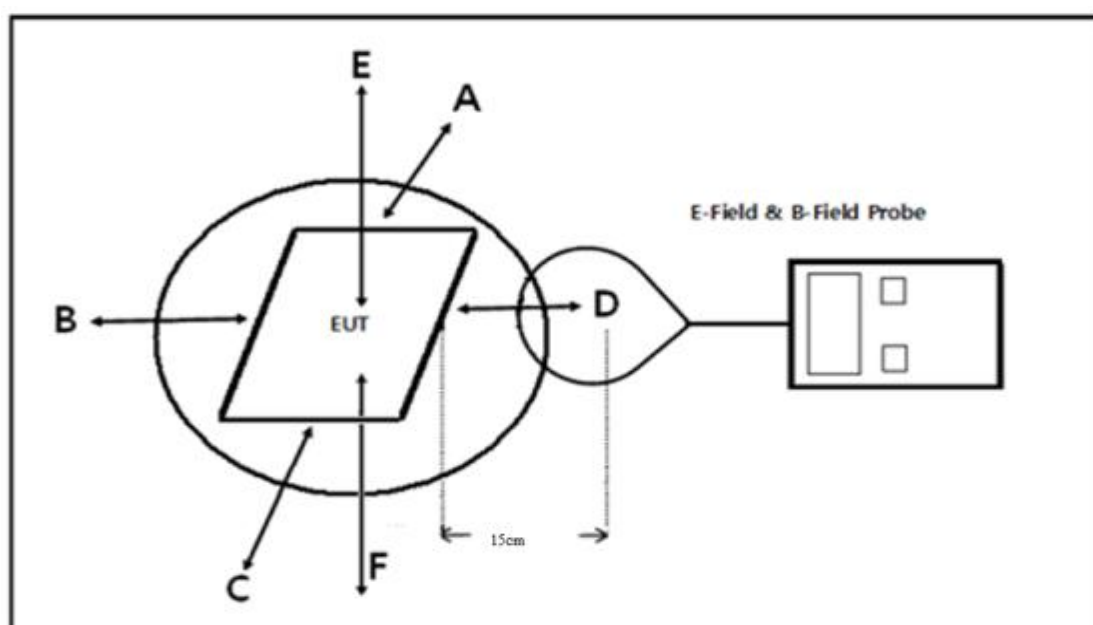

For mobile RF exposure condition, due to installation limitations no tests from the underside of the charging device are required.

For portable RF exposure, need measure all sides.

5. Test Equipment

Equipment	Manufacturer	Model	Serial no.	Last Cal.	Cal. Interval
Exposure Level Tester	Narda	ELT-400	N-0231	2019.09.11	1 Year
B-Field Probe	Narda	ELT probe 100cm2	M0675	2019.09.11	1 Year

6. Measurement Procedure

For mobile RF exposure

- The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- The measurement probe was placed at test distance (15cm) which is between the edge of the charger and the geometric center of probe.
- The turn table was rotated 360 degree to search of highest strength.
- The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- The EUT were measured according to the dictates of KDB 680106D01v03.

For portable RF exposure

- The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- The measurement probe was placed at test distance (0cm) which is between the edge of the charger and the geometric center of probe.
- The turn table was rotated 360 degree to search of highest strength.
- The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E, F) were completed.
- Repeated measured (a) – (d) at measure distance 5cm, 10cm and 15cm.
- The EUT were measured according to the dictates of KDB 680106D01v03.

7. Equipment Approval Considerations

The EUT does comply with item 5.2 of KDB 680106 D01v02 as follows table;

Requirements of KDB 680106 D01	Yes / No	Description
Power transfer frequency is less than 1 MHz	Yes	The device operate in the frequency range 125.0 KHz - 205.0 KHz
Output power from each primary coil is less than 15 watts	Yes	The maximum output power of the primary coil is 10W.
The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.	Yes	The transfer system includes only single coil that is able to detect receiver device.
Client device is placed directly in contact with the transmitter.	Yes	Client device is placed directly in contact with the transmitter.
Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	No	Mixed mobile and portable exposure conditions
The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.	No	Just for mobile exposure condition, this sample used at mixed mobile and portable exposure condition.

In all other cases, unless excluded above, an RF exposure evaluation report must be reviewed and accepted through a KDB or PBA inquiry to enable authorization of the equipment. When evaluation is required to show compliance; for example, using field strength, power density, SAR measurements or computational modeling etc., the specific authorization requirements will be determined based on the results of the RF exposure evaluation

8. H field Strength

Test Conditions	Description	Exposure conditions	
TM1	Load Empty	<input checked="" type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable	Record
TM2	Half Load	<input checked="" type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable	Record
TM3	Full Load	<input checked="" type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable	Record

For portable exposure:

H-Field Strength at 0 cm from the edges surrounding the EUT and 0cm from the all surface of the EUT.

Operate mode	Measured Distance (cm)	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)						FCC H-Field Strength Limits (A/m)
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	
Full Load	0	0.160	1.180	1.182	1.168	1.175	1.156	1.108	1.63

Operate mode	Measured Distance (cm)	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)						FCC H-Field Strength Limits (A/m)
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	
Half Load	0	0.160	1.141	1.138	1.132	1.135	1.121	1.055	1.63

Operate mode	Measured Distance (cm)	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)						FCC H-Field Strength Limits (A/m)
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	
Load Empty	0	0.160	0.612	0.581	0.631	0.630	0.558	0.501	1.63

H-Field Strength at 5 cm from the edges surrounding the EUT and 5cm from the all surface of the EUT.

Operate mode	Measured Distance (cm)	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)						FCC H-Field Strength Limits (A/m)
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	
Full Load	0	0.160	1.162	1.164	1.142	1.152	1.140	1.100	1.63

Operate mode	Measured Distance (cm)	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)						FCC H-Field Strength Limits (A/m)
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	
Half Load	0	0.160	1.120	1.115	1.112	1.116	1.101	1.029	1.63

Operate mode	Measured Distance (cm)	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)						FCC H-Field Strength Limits (A/m)
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	
Load Empty	0	0.160	0.600	0.548	0.601	0.605	0.530	0.481	1.63

H-Field Strength at 10 cm from the edges surrounding the EUT and 5cm from the all surface of the EUT.

Operate mode	Measured Distance (cm)	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)						FCC H-Field Strength Limits (A/m)
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	
Full Load	0	0.160	1.142	1.114	1.122	1.132	1.140	1.100	1.63

Operate mode	Measured Distance (cm)	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)						FCC H-Field Strength Limits (A/m)
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	
Half Load	0	0.160	1.101	1.096	1.092	1.101	1.094	0.980	1.63

Operate mode	Measured Distance (cm)	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)						FCC H-Field Strength Limits (A/m)
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	
Load Empty	0	0.160	0.580	0.524	0.547	0.581	0.520	0.461	1.63

H-Field Strength at 15 cm from the edges surrounding the EUT and 15cm from the all surface of the EUT.

Operate mode	Measured Distance (cm)	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)						FCC H-Field Strength Limits (A/m)
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	
Full Load	0	0.160	0.580	0.660	0.562	0.566	0.435	0.666	1.63

Operate mode	Measured Distance (cm)	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)						FCC H-Field Strength Limits (A/m)
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	
Half Load	0	0.160	0.320	0.350	0.351	0.365	0.345	0.386	1.63

Operate mode	Measured Distance (cm)	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)						FCC H-Field Strength Limits (A/m)
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	
Load Empty	0	0.160	0.212	0.246	0.335	0.253	0.321	0.401	1.63

For mobile exposure:

H-Field Strength at 15cm from the top surface of the EUT

Operate mode	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
		Test Position E		
Full Load	0.175	0.092	0.814	1.63

Operate mode	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
		Test Position E		
Half Load	0.175	0.043	0.814	1.63

Operate mode	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
		Test Position E		
Load Empty	0.175	0.018	0.814	1.63

H-Field Strength at 20cm from the top surface of the EUT

Operate mode	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
		Test Position E		
Full Load	0.175	0.086	0.814	1.63


Operate mode	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
		Test Position E		
Half Load	0.175	0.038	0.814	1.63

Operate mode	Frequency Range (MHz)	Measured H-Field Strength Values (A/m)	FCC H-Field Strength 50% Limits (A/m)	FCC H-Field Strength Limits (A/m)
		Test Position E		
Load Empty	0.175	0.012	0.814	1.63

9. Test Setup Photos

9.1 Portable exposure

9.1.1 Test Position E -Exposure photo from top surface

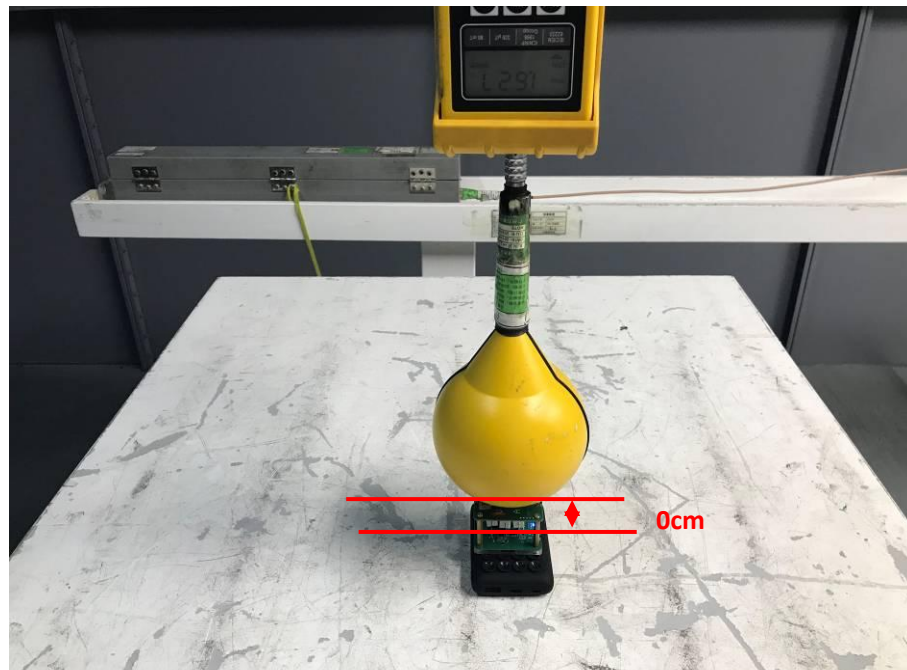


(Full load) 0cm

9.1.2 Test Position A-Exposure photo from side edge surface-Rear




(Full load) 0cm

9.1.3 Test Position B-Exposure photo from side edge surface-Left

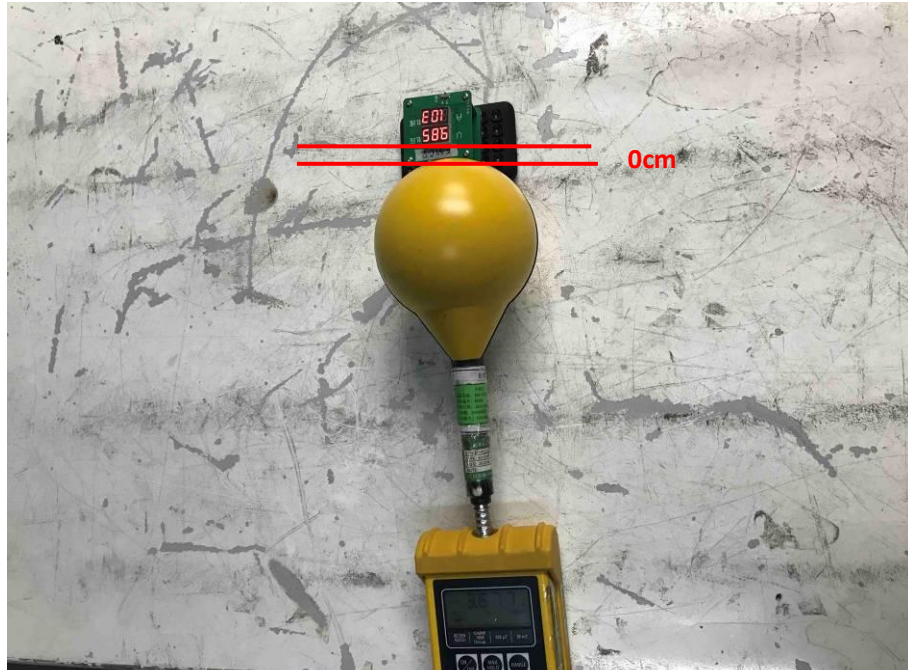


(Full load) 0cm

9.1.4 Test Position C-Exposure photo from side edge surface-Front

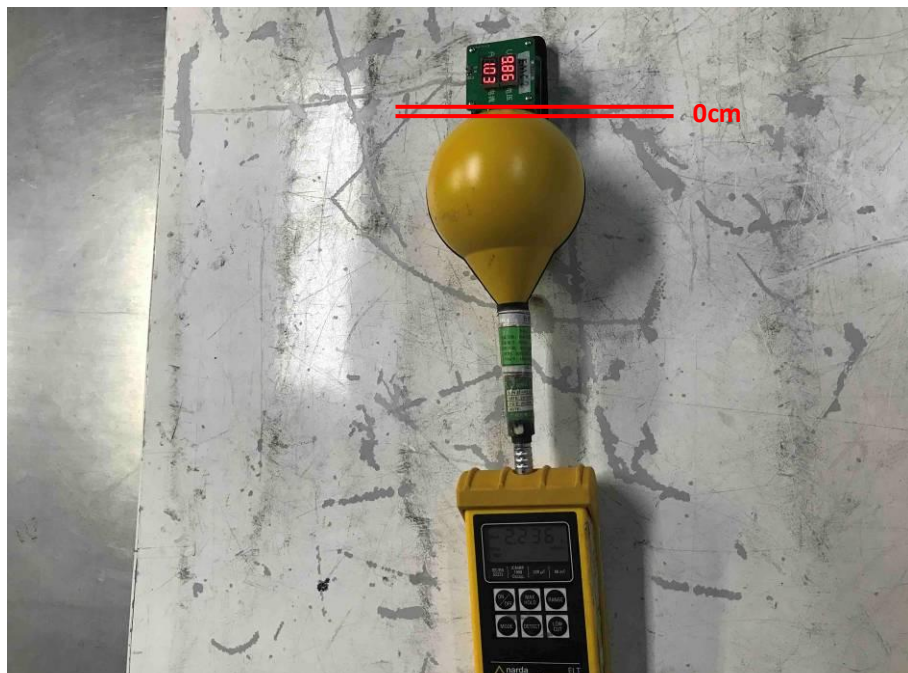

(Full load) 0cm

9.1.5 Test Position D-Exposure photo from side edge surface-Right

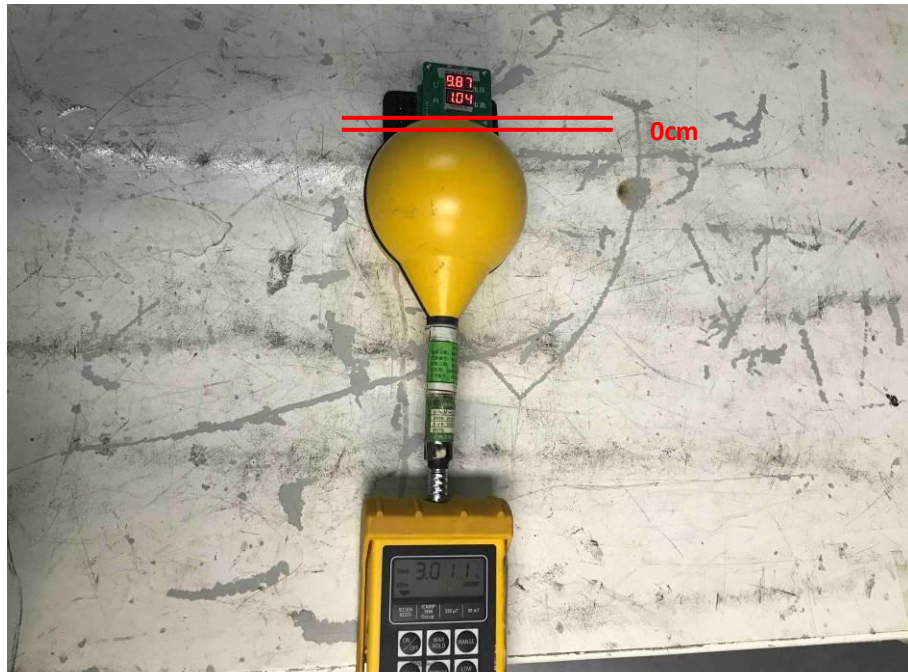

(Full load) 0cm

9.1.6 Test Position F-Exposure photo from side edge surface-Back



(Full load) 0cm


9.2 Mobile exposure

9.2.1 Test Position E - Exposure photo from top surface (15cm)




(Full load)15cm

9.2.2 Test Position A - Exposure photo from side edge surface-Rear (15cm)

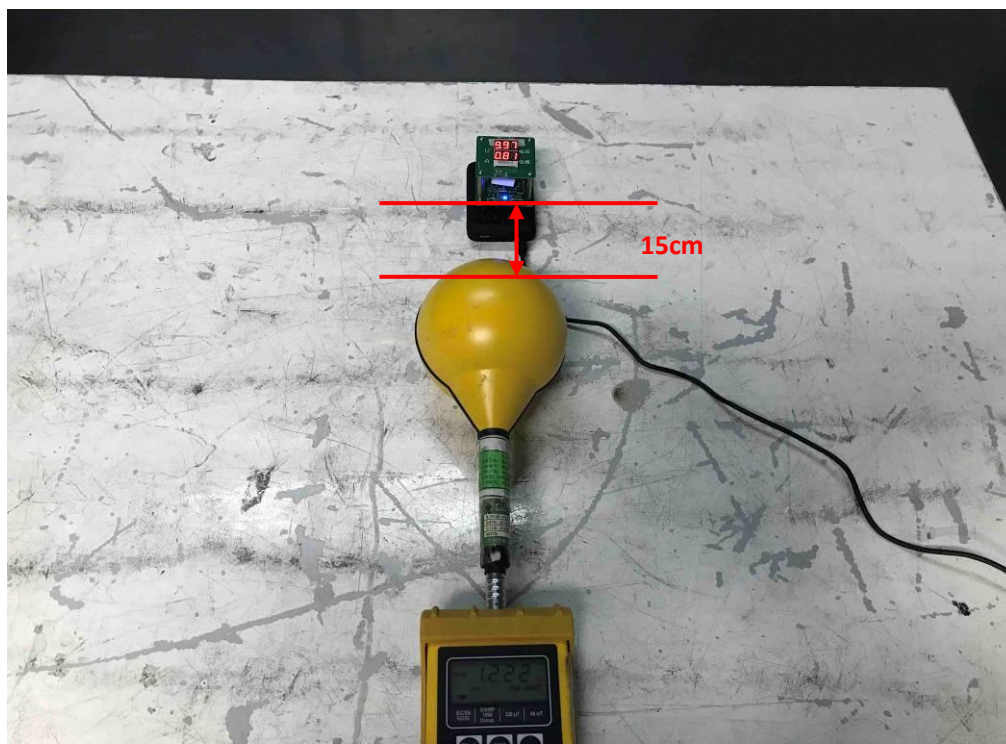


(Full load)15cm

9.2.3 Test Position B - Exposure photo from side edge surface-Left (15cm)

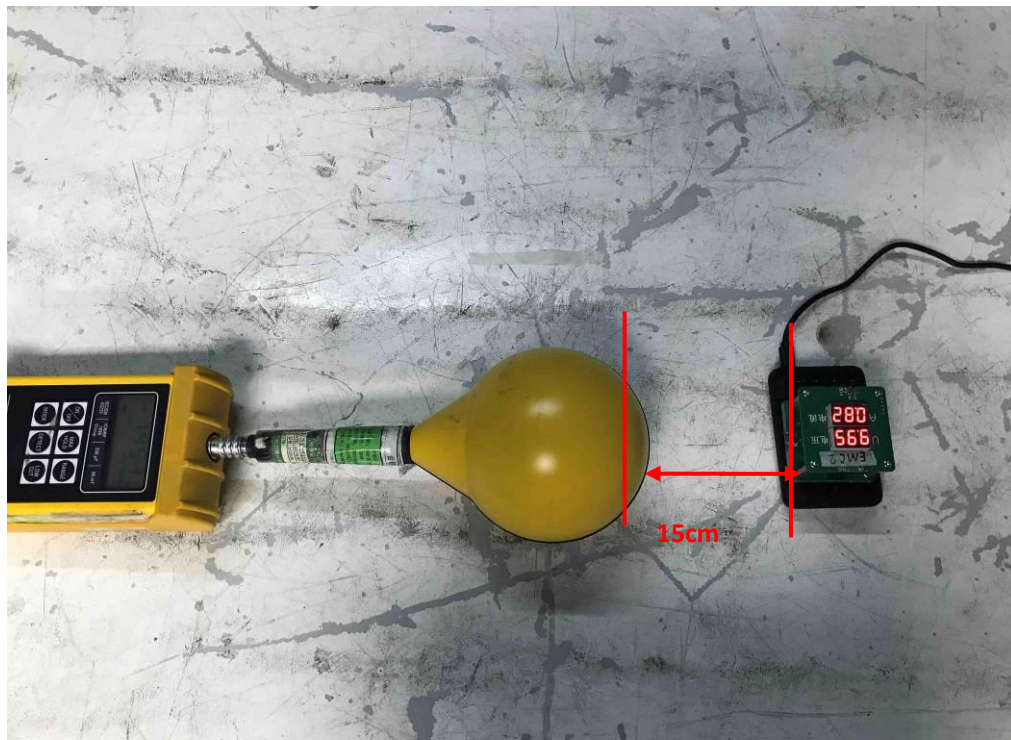


(Full load)15cm

9.2.4 Test Position C - Exposure photo from side edge surface-Front (15cm)

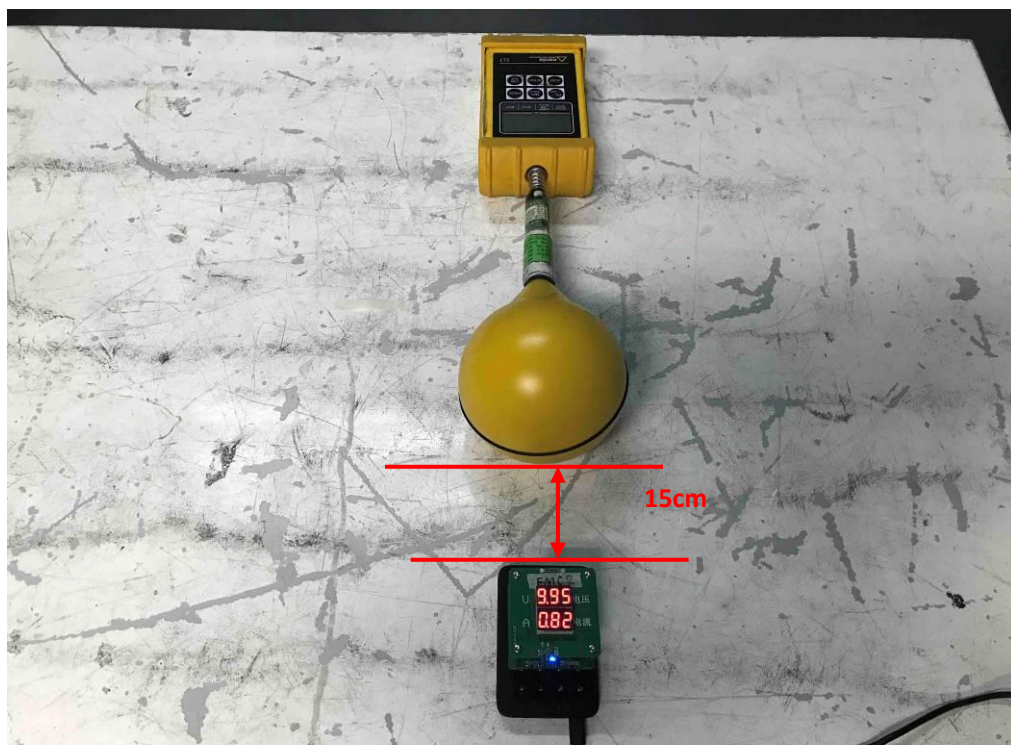


(Full load)15cm

9.2.5 Test Position D - Exposure photo from side edge surface-Right (15cm)

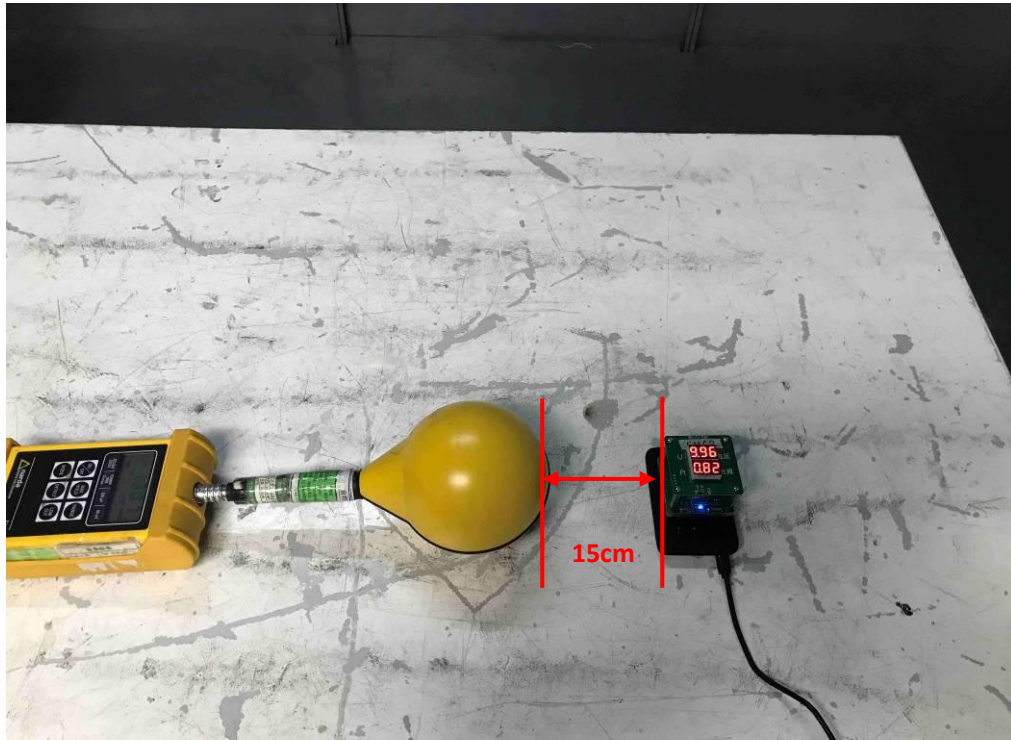

(Full load)15cm

9.2.6 Test Position E -Exposure photo from top surface (20cm)

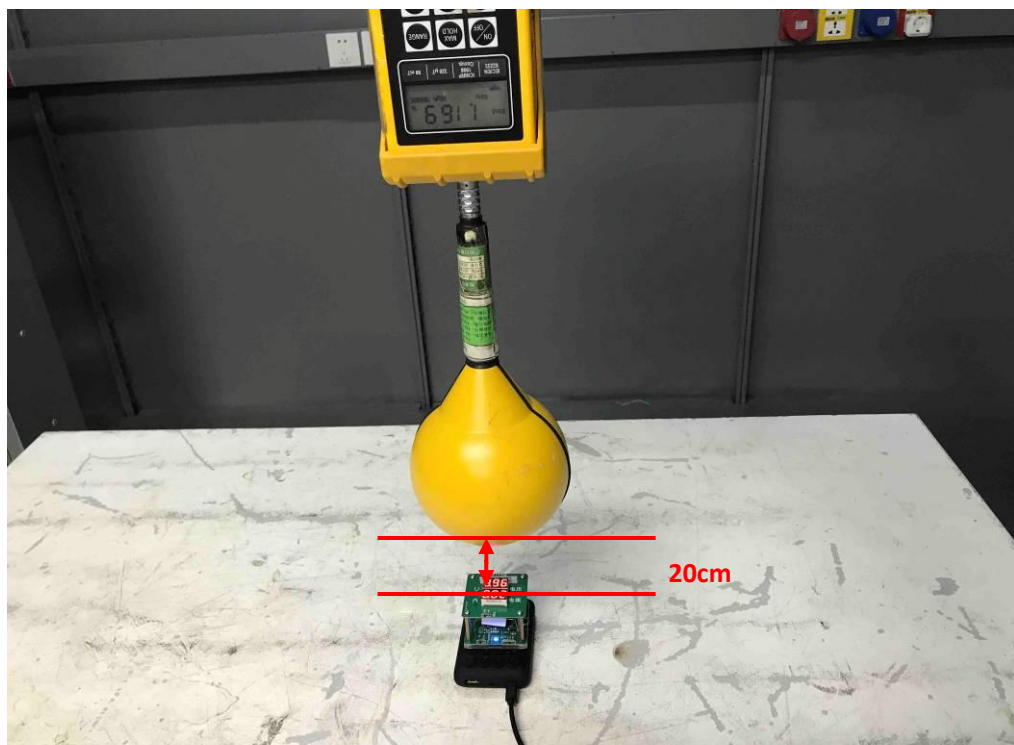

(Full load)20cm

1. Conclusion

A minimum safety distance of 0 cm to the antenna is required when the device is charging a smart phone for portable exposure and 20 cm to the antenna for mobile exposure. The detected emissions are below the limitations according FCC KDB 680106 and confirmed by the FCC according to KDB Inquire.

.....END OF REPORT.....