



# FCC CFR47 Part 15 Subpart C Certification Test Report

For the

**Product** : BLE MODULE  
**Model** : BLE-MODULE  
**FCC ID** : 2AP7P-BLE-MODULE  
**Applicant** : Aladdin co., Ltd.  
**FCC Rule** : CFR 47 Part 15 Subpart C

We hereby certify that the above product has been tested by us with the listed rules and found in compliance with the regulation. The test data and results are issued on the test report no. TR-W1808-025

Signature

A handwritten signature in black ink, appearing to read 'Choi, Yeong-min', is written over a horizontal line.

Choi, Yeong-min / Technical Manager

Date: 2018-08-14

**Test Laboratory: ENG Co., Ltd.**

*It shall not be reproduced except in full, without the written approval of the ENG Co., Ltd. This document may be altered or revised by the ENG Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.*

Report No.: TR-W1808-025


ENG Co., Ltd. 135-60 Gyeongchung-daero, Gonjiam-eup, Gwangju-si, Gyeonggi-do, Korea 464-942


Report Form\_01 (Rev.0)

# FCC CERTIFICATION TEST REPORT

**Project Number** : EA1803C-152  
**Test Report Number** : TR-W1808-025  
**Type of Equipment** : BLE MODULE  
**Model Name** : BLE-MODULE  
**FCC ID** : 2AP7P-BLE-MODULE  
**Multiple Model Name** : N/A  
**Applicant** : Aladdin co., Ltd.  
**Address** : 3, World Cup buk-ro 42na-gil, Mapo-gu, Seoul, Republic of Korea  
**Manufacturer** : HDS co., Ltd.  
**Address** : A-1301, Smart Bay, 123, Beolmal-ro, Dongan-gu, Anyang-si, Gyeonggi-do, Republic of Korea  
**Regulation** : FCC Part 15 Subpart C Section 15.247  
**Total page of Report** : 42 Pages  
**Date of Receipt** : 2018-03-30  
**Date of Issue** : 2018-08-14  
**Test Result** : PASS

This test report only contains the result of a single test of the sample supplied for the examination.  
It is not a generally valid assessment of the features of the respective products of the mass-production.

Prepared by Song, In-young / Senior Engineer  \_\_\_\_\_ 2018-08-14  
Signature Date

Reviewed by Choi, Yeong-min / Technical Manager  \_\_\_\_\_ 2018-08-14  
Signature Date

# CONTENTS

Page

1. TEST SUMMARY .....	4
2. EUT (EQUIPMENT UNDER TEST) INFORMATION.....	6
3. TEST CONDITION.....	8
4. ANTENNA REQUIREMENT .....	9
4.1 ANTENNA DESCRIPTION .....	10
4.2 CONCLUSION.....	10
5. TEST RESULT .....	11
5.1 6 DB BANDWIDTH.....	11
5.2 99 % BANDWIDTH.....	14
5.3 MAXIMUM PEAK OUTPUT POWER.....	17
5.4 PEAK POWER SPECTRAL DENSITY .....	20
5.5 OUT OF BAND EMISSION .....	23
5.6 RADIATED EMISSION.....	28
5.7 AC POWER LINE CONDUCTED EMISSION .....	37
APPENDIX I – TEST INSTRUMENTATION .....	42

### Release Control Record

Issue Report No.	Issued Date	Revisions	Effect Section
TR-W1808-025	2018-08-14	Initial Release	All

## 1. TEST SUMMARY

### 1.1 Regulations and results

The sample submitted for evaluation (Referred to below as the EUT) has been tested in accordance with the following regulations or standards.

FCC Reference Section	Description	P	F	N.T.	Note
15.247(a)(2)	6 dB Bandwidth Occupied Bandwidth	P			
15.247(b)(3)	Maximum peak output power	P			
15.247(e)	Power spectral density	P			
15.247(d)	Band Edge, Conducted spurious emission	P			
15.205(a) 15.209(a)	Radiated spurious emissions	P			
15.207(a)	AC power line conducted emissions	P			

**Remark:**

P means Passed

F means Failed

N.T. means Not Tested

### 1.2 Test Methodology

The tests mentioned in clause 1.1 in this test report were performed according to FCC CFR 47 Part 2, CFR 47 Part 15, ANSI C63.10-2013 and KDB 558074 D01DTS Meas Guidance v04

### 1.3 Additions, deviations, exclusions from standards





No additions, deviations or exclusions have been made from standard.

### 1.4 Purpose of the test

The test was performed to determine whether the equipment under test fulfills the requirements of the regulation stated in FCC Part 15 Subpart C Section 15.247

### 1.5 Test Facility

The measurement facilities are located at 135-60 Gyeongchung-daero, Gonjiam-eup, Gwangju-si, Gyeonggi-do 12813, Korea. Description details of test facilities were submitted to the FCC and IC, designated by the RRA (Radio Research Agency), and accredited by Korea and accredited by KOLAS (Korea Laboratory Accreditation Scheme) in Korea according to the requirement of ISO 17025.

Laboratory Qualification	Registration No.	Mark
FCC	KR0160	
ISED(Canada)	IC 12721A	
RRA	KR0160	
Korean Agency for Technology and Standards	KT733	

## 2. EUT (Equipment Under Test) INFORMATION

### 2.1 General Description

The Aladdin co., Ltd., Model BLE-MODULE (referred to as the EUT in this report) is a BLE MODULE, which is a complete Bluetooth low energy SoC (4.2 specification). The product specification described herein was obtained from product data sheet or user's manual.

Operating Frequency	2 402 ~ 2 480 MHz
Max. RF Output Power	-2.56 dBm
Modulation Types	Bluetooth Low Energy
Number of Channels	40 CH
Channel Bandwidth	2 MHz
Generated or used Freq. in EUT	16 MHz
Type of Antenna	<input checked="" type="checkbox"/> Integrated Type (Chip Type) <input type="checkbox"/> Dedicated Type
Antenna Gain	3.78 dBi
Operating Temperature	-20 °C ~ + 55 °C
Normal Test Voltage	DC 3.0 V
Test SW Version	Connection Manager Version 3.0.8
RF power setting in TEST SW	N/A
Software Version	1.0
Hardware Version	1.0

## 2.2 Available channel number and frequency

Operating Mode: Bluetooth LE, 2 MHz Channel Spacing					
Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
0	2 402	14	2 430	28	2 458
1	2 404	15	2 432	29	2 460
2	2 406	16	2 434	30	2 462
3	2 408	17	2 436	31	2 464
4	2 410	18	2 438	32	2 466
5	2 412	19	2 440	33	2 468
6	2 414	20	2 442	34	2 470
7	2 416	21	2 444	35	2 472
8	2 418	22	2 446	36	2 474
9	2 420	23	2 448	37	2 476
10	2 422	24	2 450	38	2 478
11	2 424	25	2 452	39	2 480
12	2 426	26	2 454		
13	2 428	27	2 456		

## 2.3 Additional Model

None



### 3. TEST CONDITION

#### 3.1 Equipment Used During Test

The following peripheral devices and/or interface cables were connected during the measurement:

Description	Model No.	Serial No.	Manufacturer.
BLE MODULE (EUT)	BLE-MODULE	N/A	HDS co., Ltd.
Test Jig	USB_Debug_HDS	N/A	N/A
Notebook PC	LGR48	001QTY5326882	LG Electronics
Adapter for Notebook PC	PA-1900-08	0Y00719207	Dongguang Lite Power 2nd Plant


#### 3.2 Mode of operation during the test

For finding worst case configuration and operating mode, preliminary testing was performed and radiated emission and conducted emission were performed with the EUT set to transmit at the channel with the highest output power as worst case scenario. All spurious emission tests were performed in X, Y and Z axis direction. And the worst Z-axis (9 kHz ~ 30 MHz), Y-axis (above 30 MHz) test condition was recorded in this test report. Based on preliminary testing, following operating modes were selected for the final test as listed below.


##### 3.2.1 Conducted Emission Test Mode

Operating Mode	Channel	Frequency (MHz)	Output Power(dBm)
Bluetooth LE	0	2 402	-2.58
	19	2 440	-2.56
	39	2 480	-2.88


**3.3 Test Setup Drawing**  
(Radiated Test below 1 GHz)

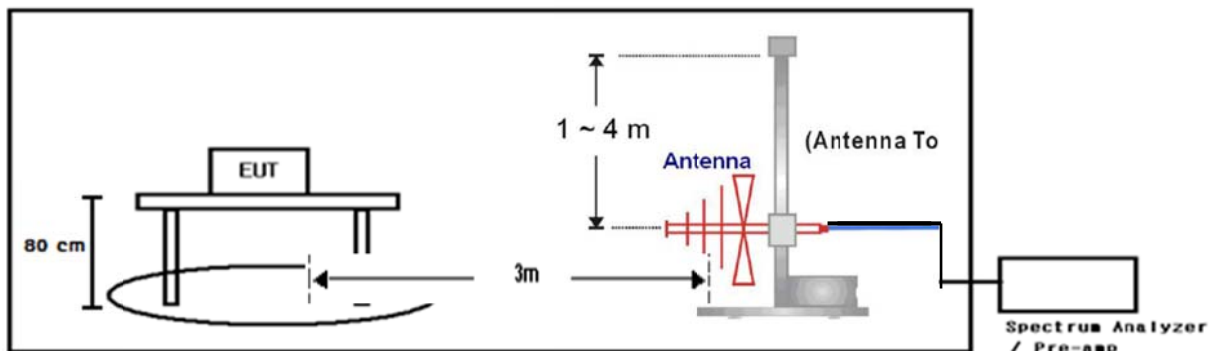

(Radiated Test above 1 GHz)

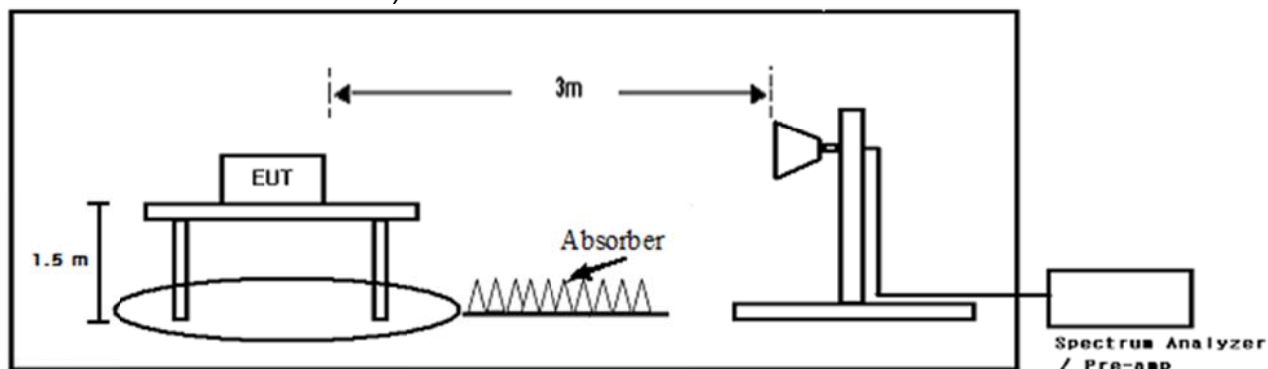

(Conducted Test)

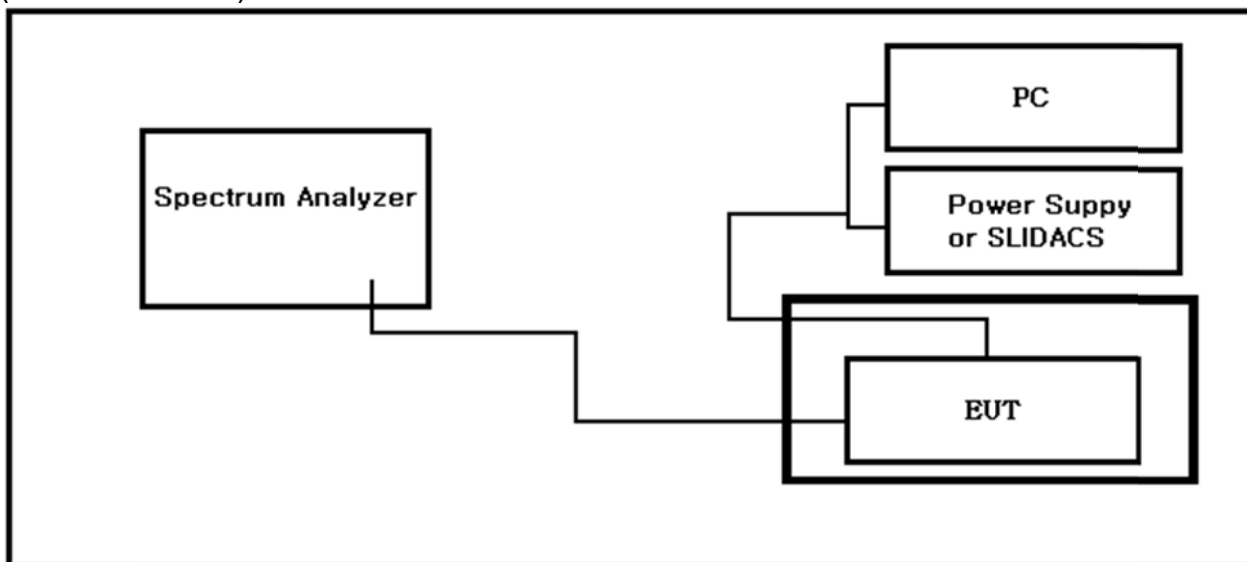

**3.4 EUT Modifications**

- No EMC Relevant Modifications were performed by this test laboratory.

#### 4. ANTENNA REQUIREMENT


According to FCC CFR 47 Part 15 section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provision of this section.

##### 4.1 Antenna Description

Frequency Band (GHz)	Antenna Type	Max Peak Gain (dBi)	Connector Type
2.4	Chip Antenna	3.78	-

##### 4.2 Conclusion

The antenna connector type of the EUT is Chip Antenna, so the EUT met the requirement.

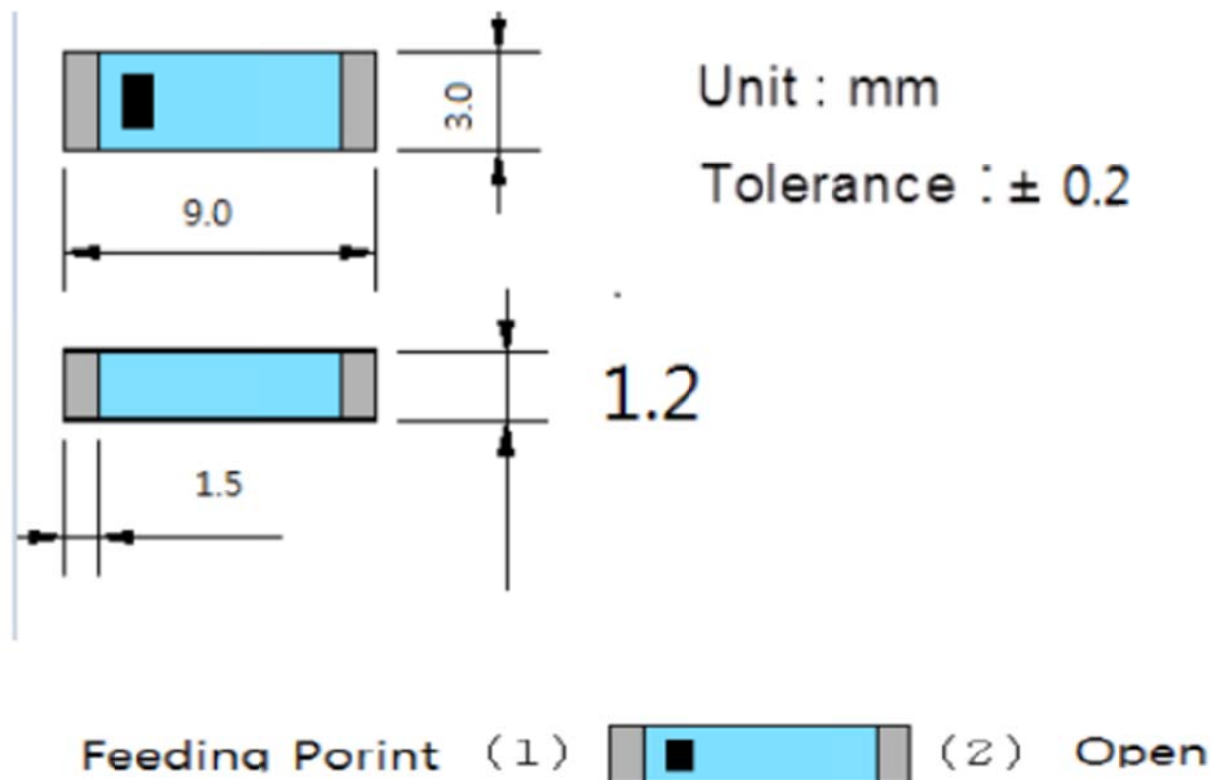

## 5. TEST RESULT

### 5.1 6 dB Bandwidth

#### 5.1.1 Limit


The minimum 6 dB bandwidth shall be at least 500 kHz acc to Section 15.247 (a) (2)

#### 5.1.2 Method of Measurement



Reference to KDB 558074 D01 DTS Meas Guidance v04: 8.1 Option 1

The transmitter output is connected to a spectrum analyzer with the RBW set to 100 kHz, VBW  $\geq$  3 X RBW, peak detector and max hold.


#### 5.1.3 Test Data

Date of Test	2018-04-11	Temperature	23.9 °C
		Relative humidity	35.1 % R.H.
<b>Test Result</b>	<b>PASS</b>	Tested by	Do-heon Kim 
Operating Mode: Bluetooth LE			
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2 402	0.71	0.5
Middle	2 440	0.72	
High	2 480	0.71	

### 5.1.4 Test Plots

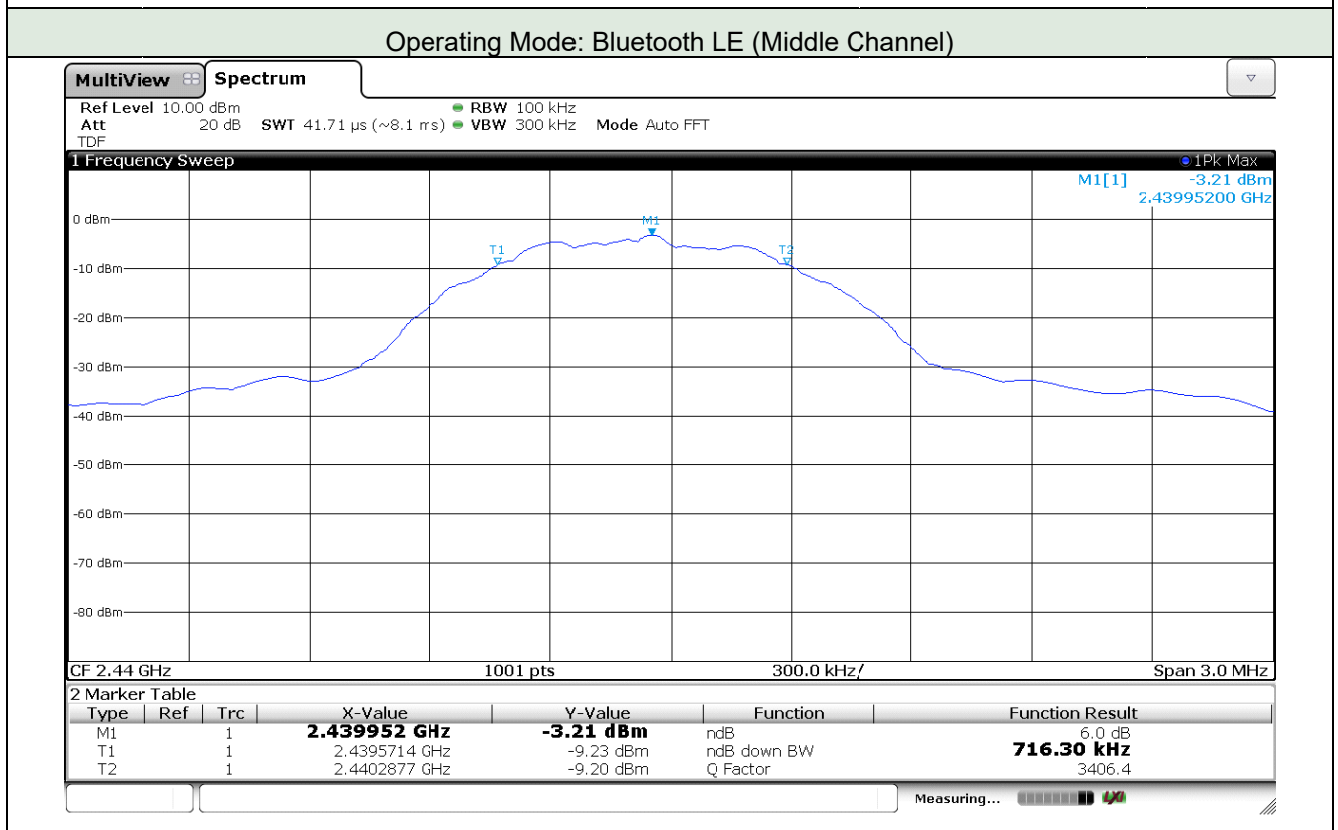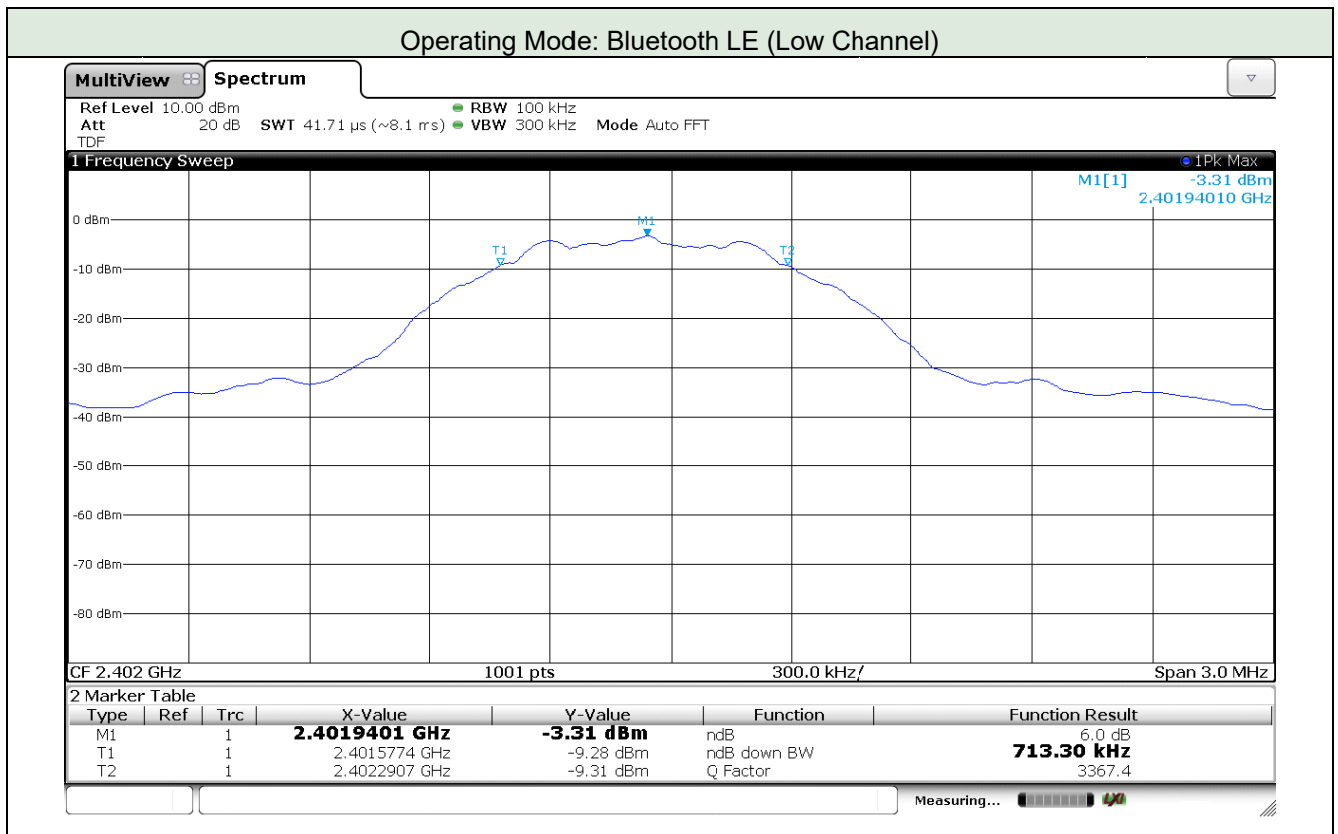

Operating Mode: Bluetooth LE (High Channel)

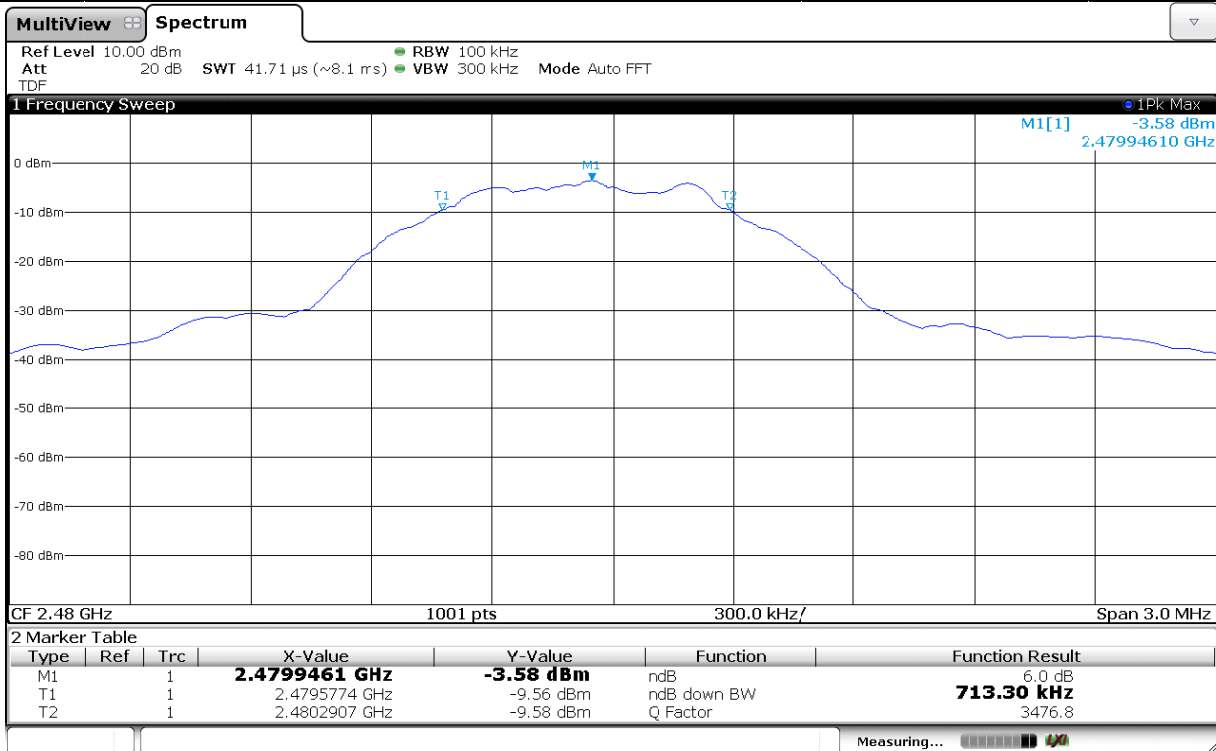

## 5.2 99 % Bandwidth

### 5.2.1 Limit

Not applicable. For reporting purpose only.


### 5.2.2 Method of Measurement

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1 % to 5 % of the OBW.



The span is set to capture all products of the modulation process, including the emission skirts.

The VBW is set to 3 times the RBW. The sweep time is coupled and peak detection and max hold mode is used. The spectrum analyzer internal 99% bandwidth function is utilized.

### 5.2.3 Test Data


Date of Test	2018-04-11	Temperature	23.9 °C
		Relative humidity	35.1 % R.H.
<b>Test Result</b>	<b>PASS</b>	Tested by	Do-heon Kim 
Operational Mode: Bluetooth LE			
Channel	Frequency (MHz)	99 % Bandwidth (MHz)	
Low	2 402	1.06	
Middle	2 440	1.07	
High	2 480	1.07	

### 5.2.4 Test Plots

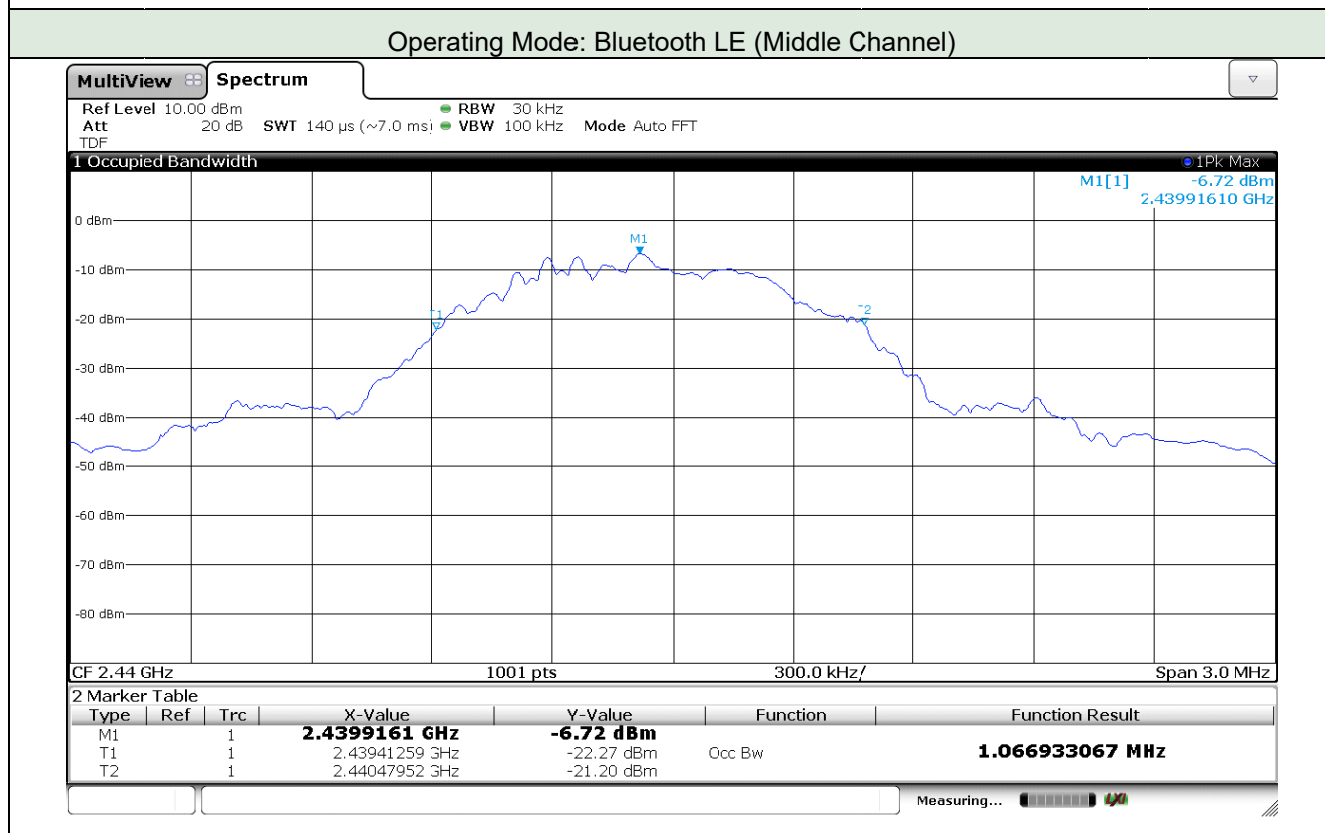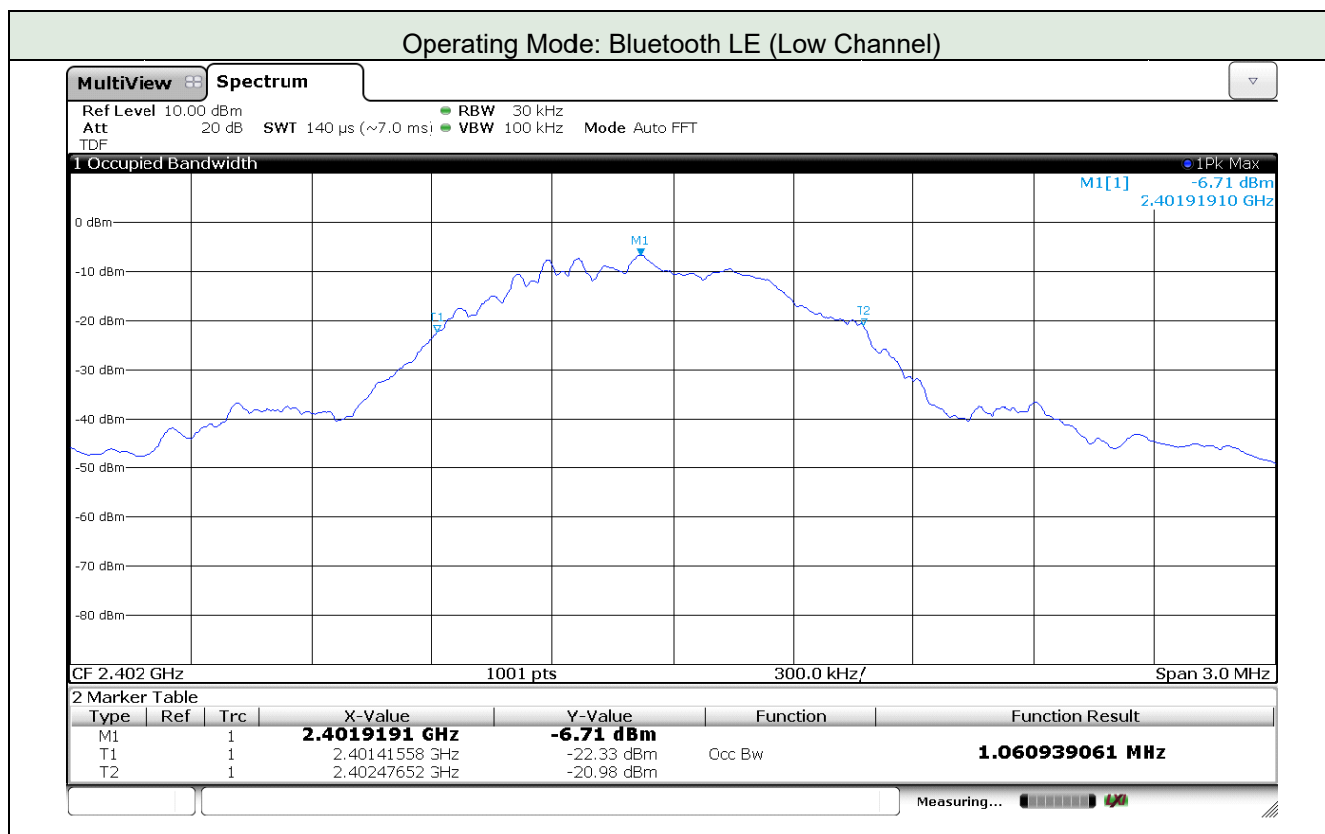



Operating Mode: Bluetooth LE (High Channel)

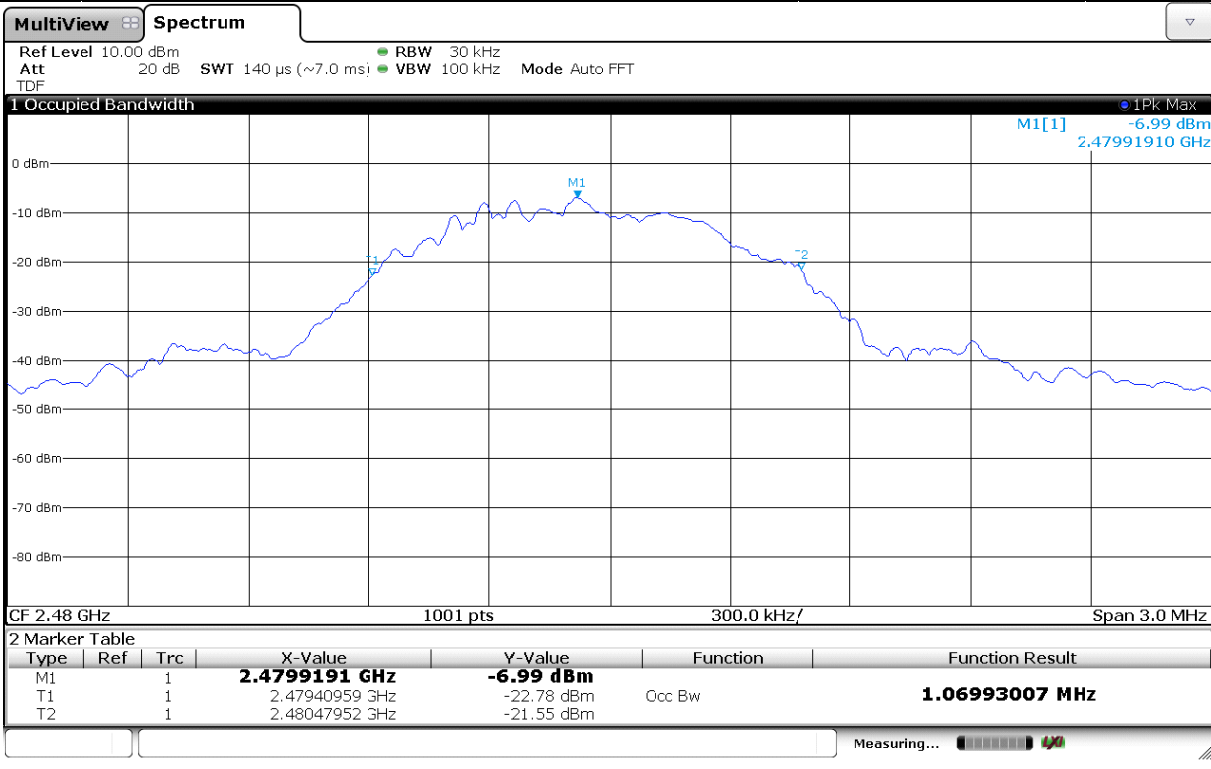

### 5.3 Maximum Peak Output Power

#### 5.3.1 Limit

Acc. To section 15.247, For system using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


#### 5.3.2 Method of Measurement

Reference to KDB 558074 D01 DTS Meas Guidance v04: 9.1.3 PKPM1 Peak-reading power meter method.

The Antenna output of the EUT was connected to a peak power meter.



The cable assembly insertion loss was entered as an offset in the spectrum analyzer to allow for direct reading of power.

#### 5.3.3 Test Data for Output Power


Date of Test	2018-04-11	Temperature	23.9 °C	
		Relative humidity	35.1 % R.H.	
<b>Test Result</b>	<b>PASS</b>	Tested by	Do-heon Kim 	
Operating Mode: Bluetooth LE				
Channel	Frequency (MHz)	Measured Value (dBm)	Limit (dBm)	Margin (dB)
Low	2 402	-2.58	30	32.58
Middle	2 440	-2.56		32.56
High	2 480	-2.88		32.88

Remark. Margin = Limit – Measured Value

### 5.3.4 Test Plots

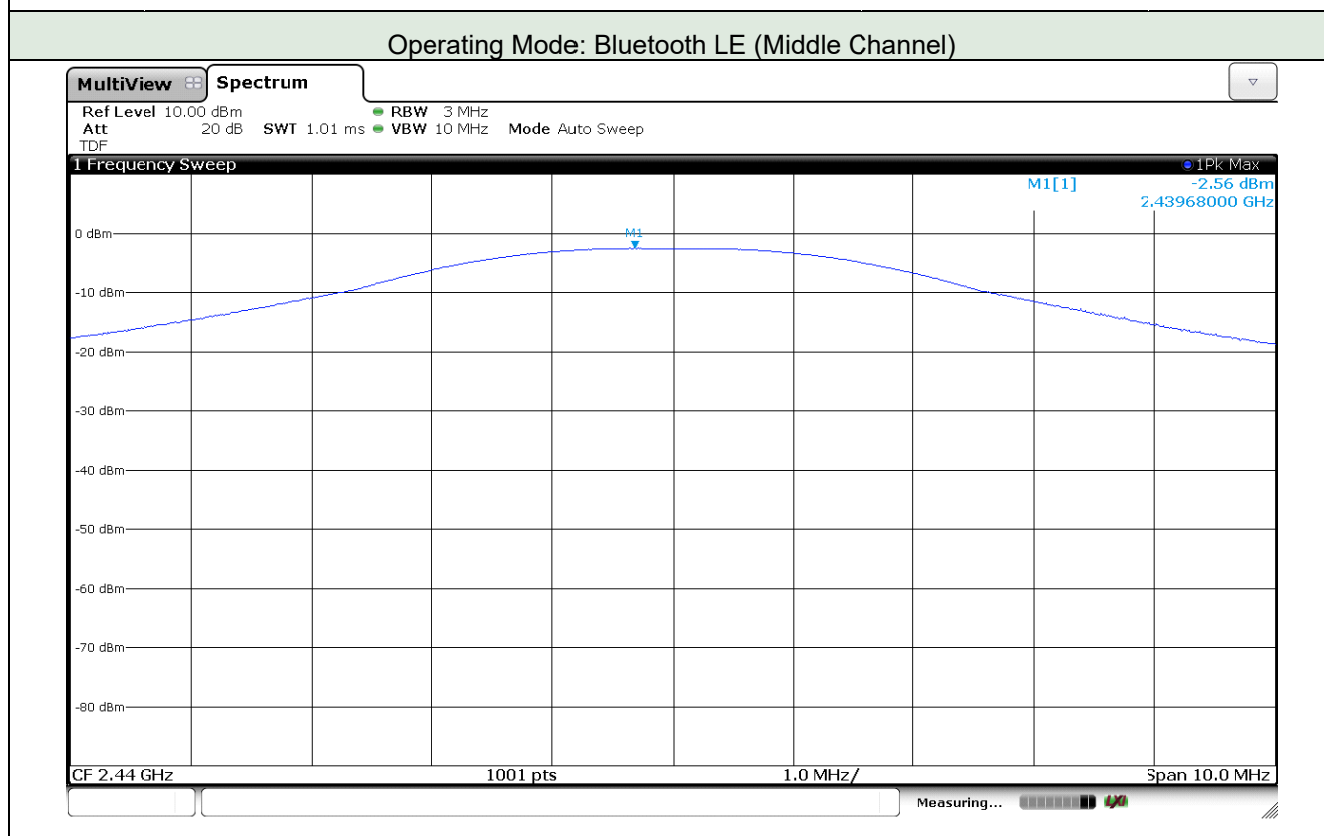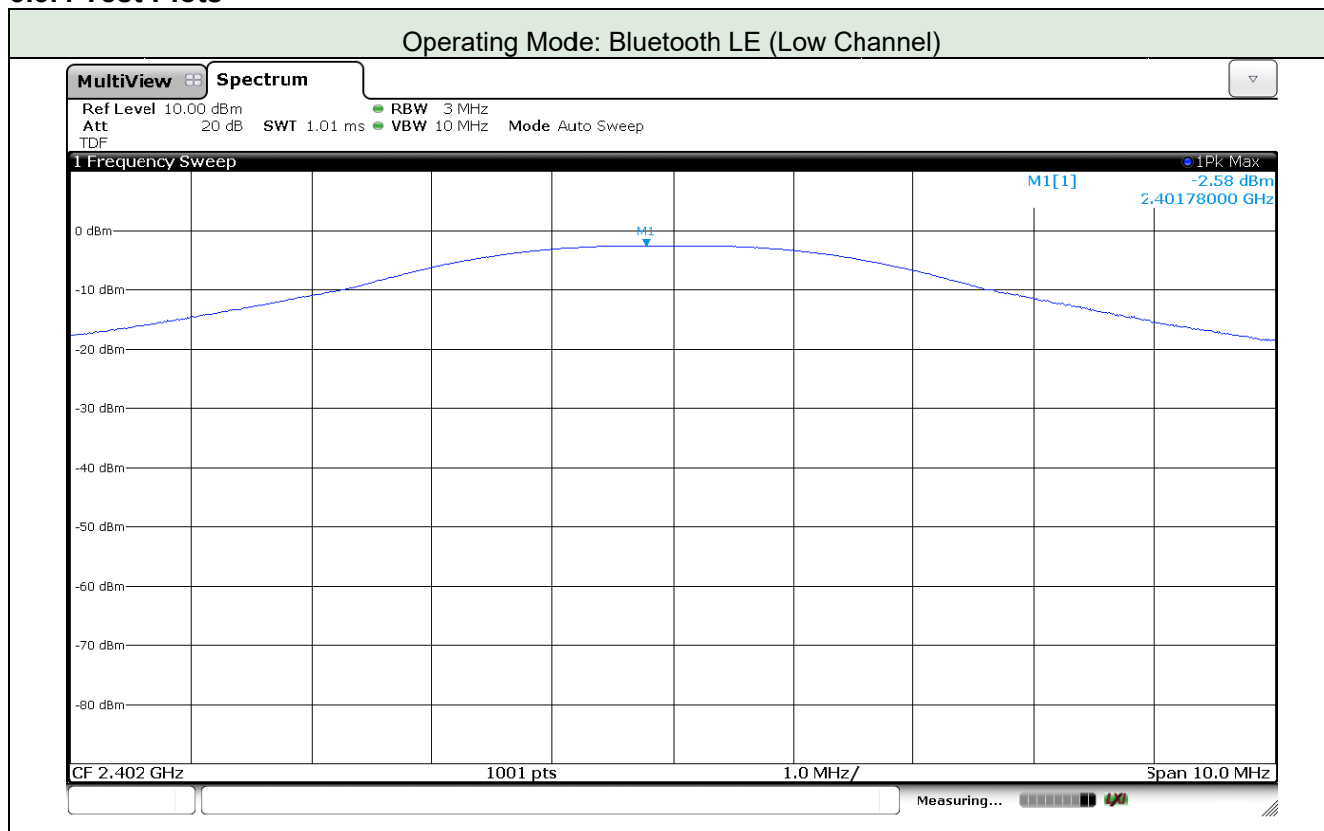

Operating Mode: Bluetooth LE (High Channel)

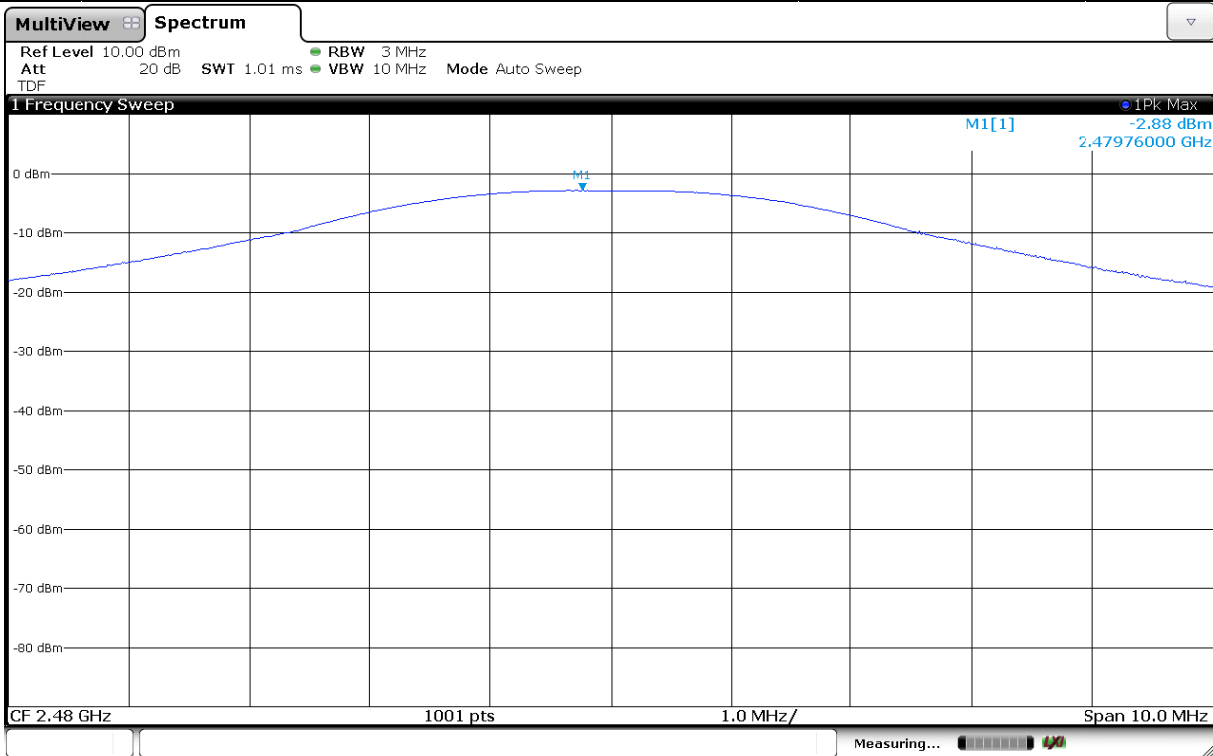

## 5.4 Peak Power Spectral Density

### 5.4.1 Limit


Acc. To section 15.247, the power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 5.4.2 Method of Measurement

Reference to KDB 558074 D01 DTS Meas Guidance v04: 10.2 Method PKPSD (peak PSD).



The transmitter output is connected to a spectrum analyzer with the RBW set from 3 kHz to 100 kHz, VBW  $\geq$  3 X RBW, peak detector and max hold.

### 5.4.3 Test Data


Date of Test	2018-04-11	Temperature	23.9 °C	
		Relative humidity	35.1 % R.H.	
<b>Test Result</b>	<b>PASS</b>	Tested by	Do-heon Kim 	
Operating Mode: Bluetooth LE				
Channel	Frequency (MHz)	Measured Value (dBm)	Limit (dBm)	Margin (dB)
Low	2 402	-17.22	8	25.22
Middle	2 440	-17.35		25.35
High	2 480	-17.27		25.27

Remark. Margin = Limit – Measured Value

### 5.4.4 Test Plots

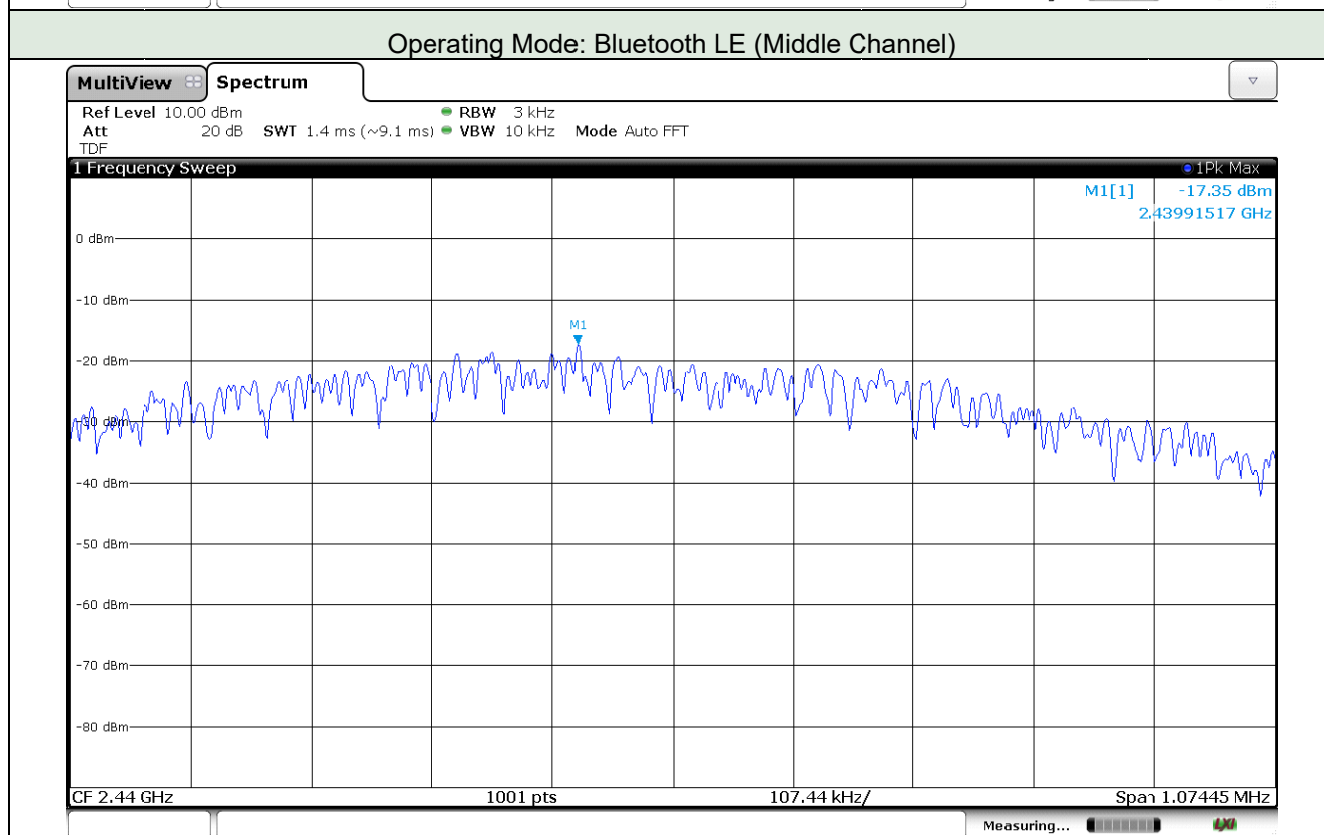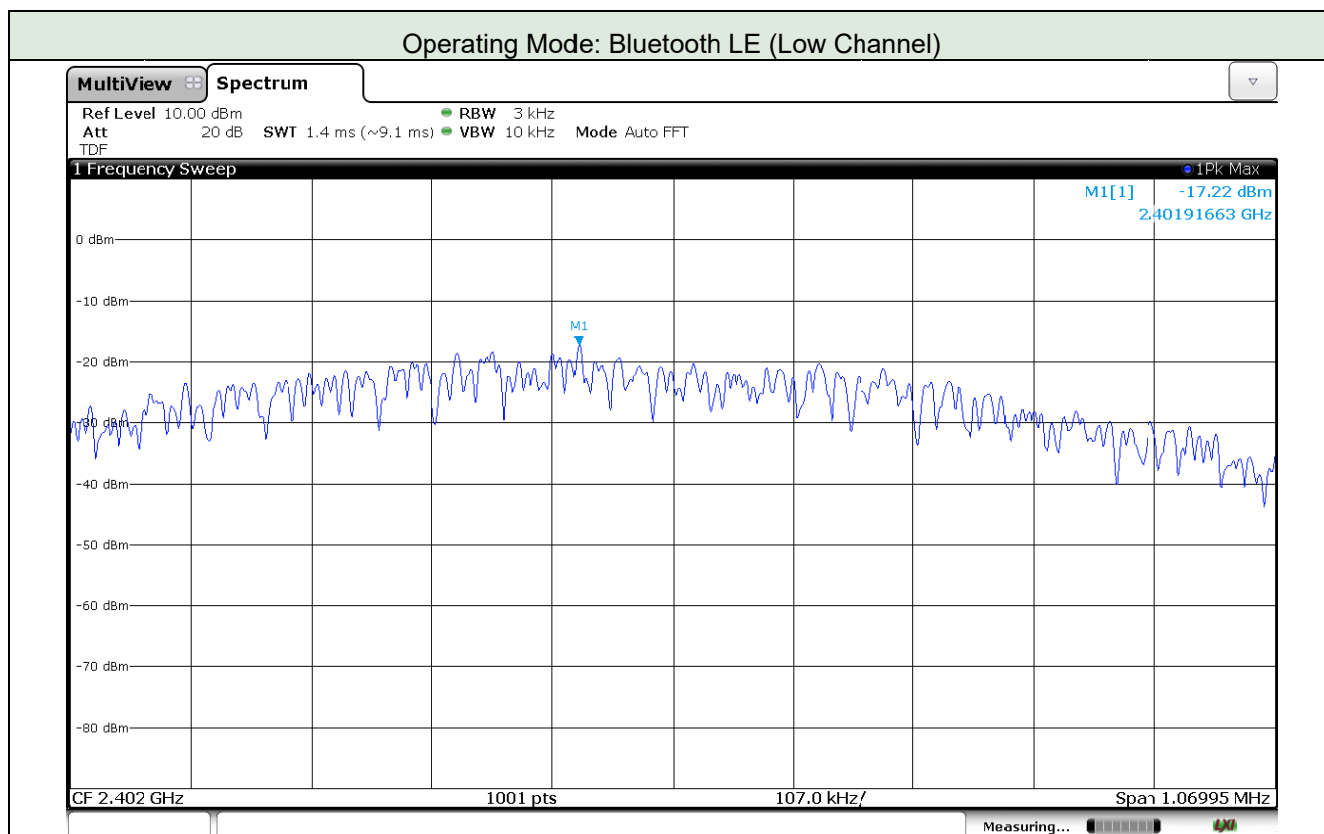

Operating Mode: Bluetooth LE (High Channel)

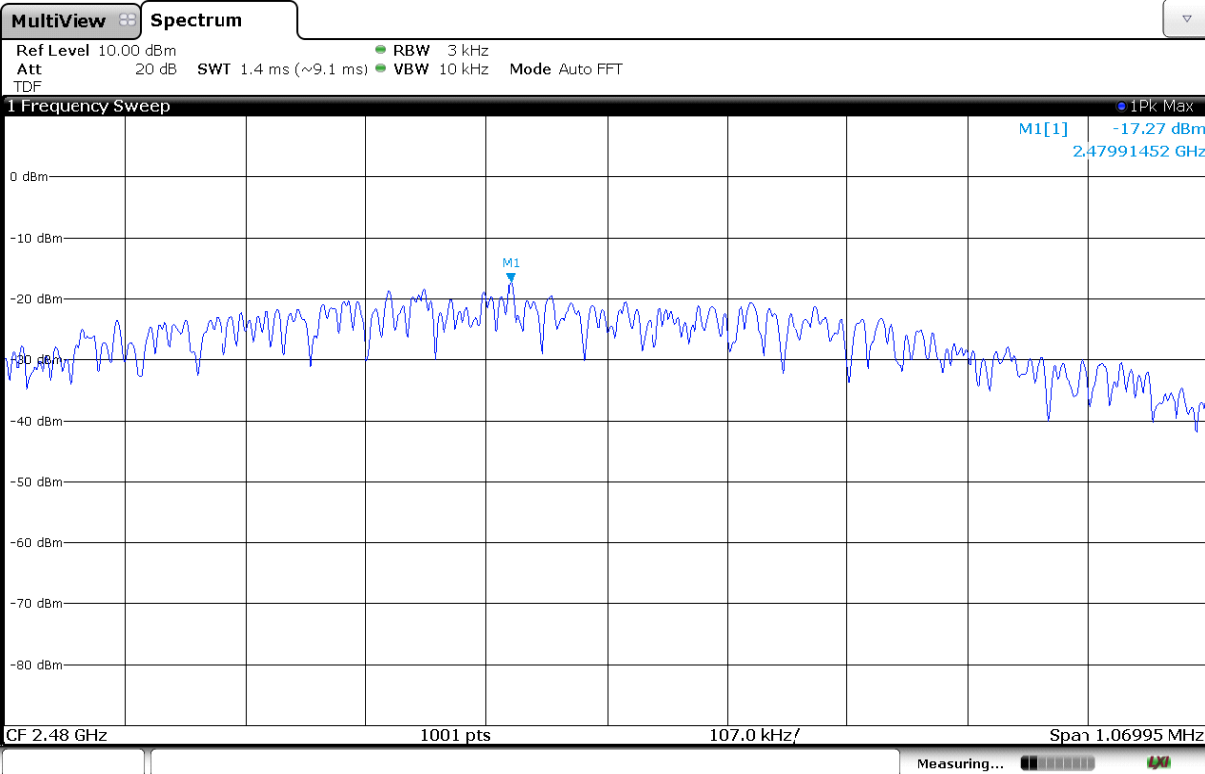

## 5.5 Out of Band Emission

### 5.5.1 Limit


Acc. To section 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in 15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section §15.205(a), must also comply the radiated emission limits specified in section §15.209(a) (see section §15.205(c))

### 5.5.2 Method of Measurement


Reference to KDB 558074 D01 DTS Meas Guidance v04: 11.0 Emissions in non-restricted frequency bands. The transmitter output is connected to a spectrum analyzer with the RBW set to 100 kHz, VBW  $\geq 3 \times$  RBW, peak detector and max hold. Measurements utilizing these settings are made of the in-band reference level, bandedge (where measurements to the general radiated limits will not be made) and out-of-band emissions.




### 5.5.3 Test Data for Operating mode: Bluetooth LE

Date of Test	2018-04-11	Temperature	23.9 °C
		Relative humidity	35.1 % R.H.
<b>Test Result</b>	<b>PASS</b>	Tested by	Do-heon Kim 


#### Band-edge and Restricted band – Low channel

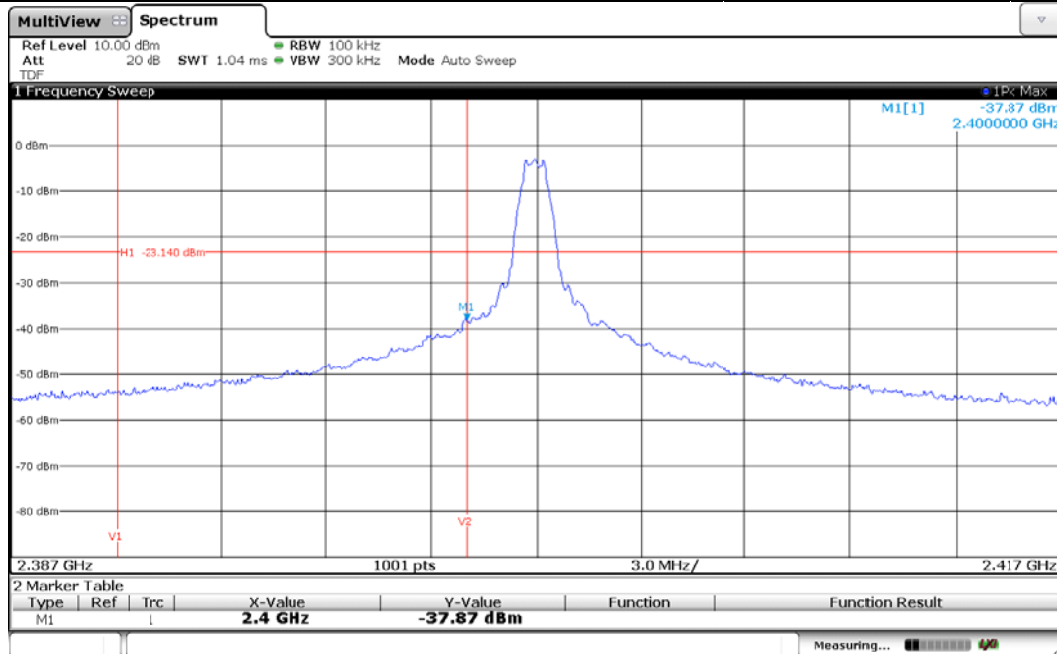


#### Band-edge and Restricted band – High channel

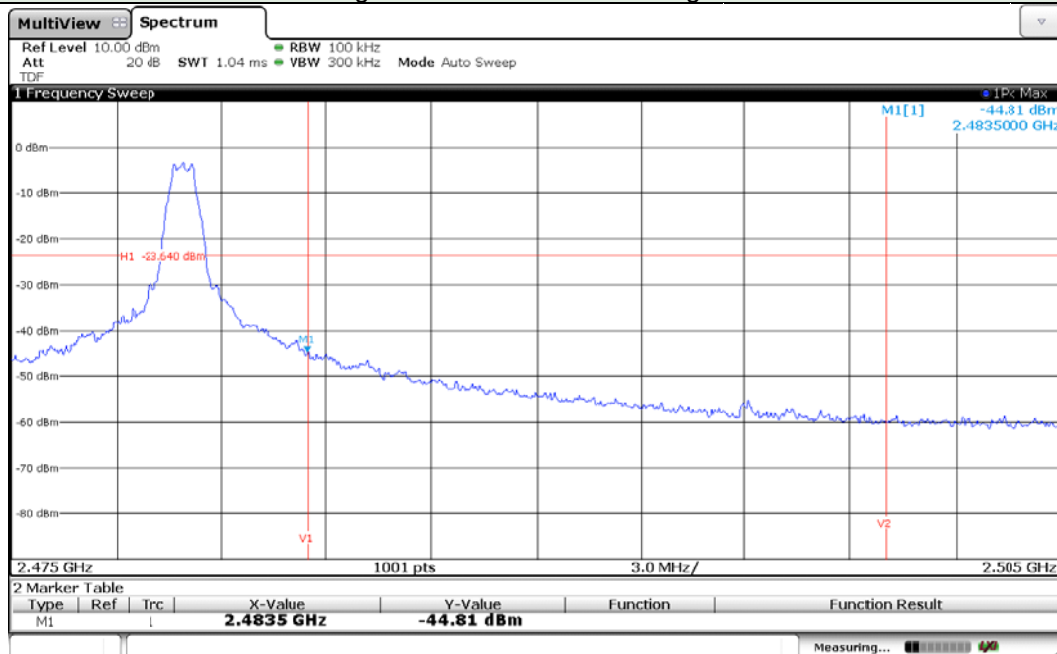


### Non-restricted band – Low Channel (1)

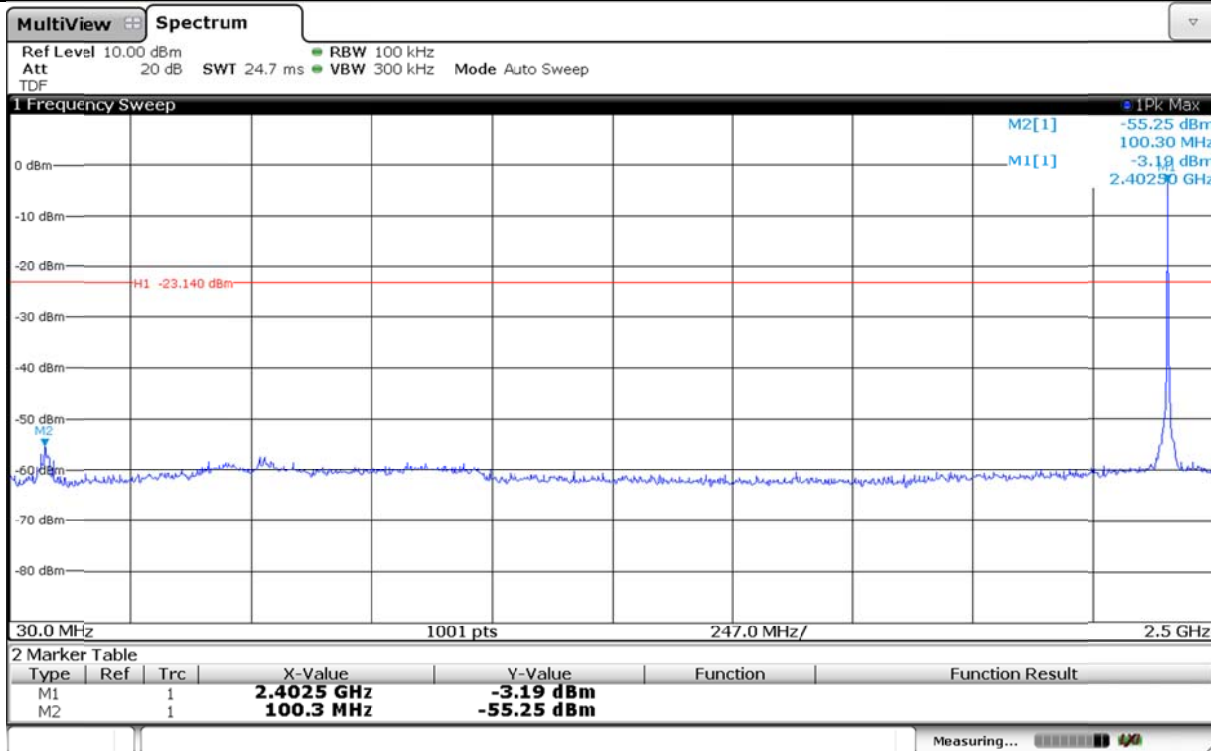


### Non-restricted band – Low Channel (2)

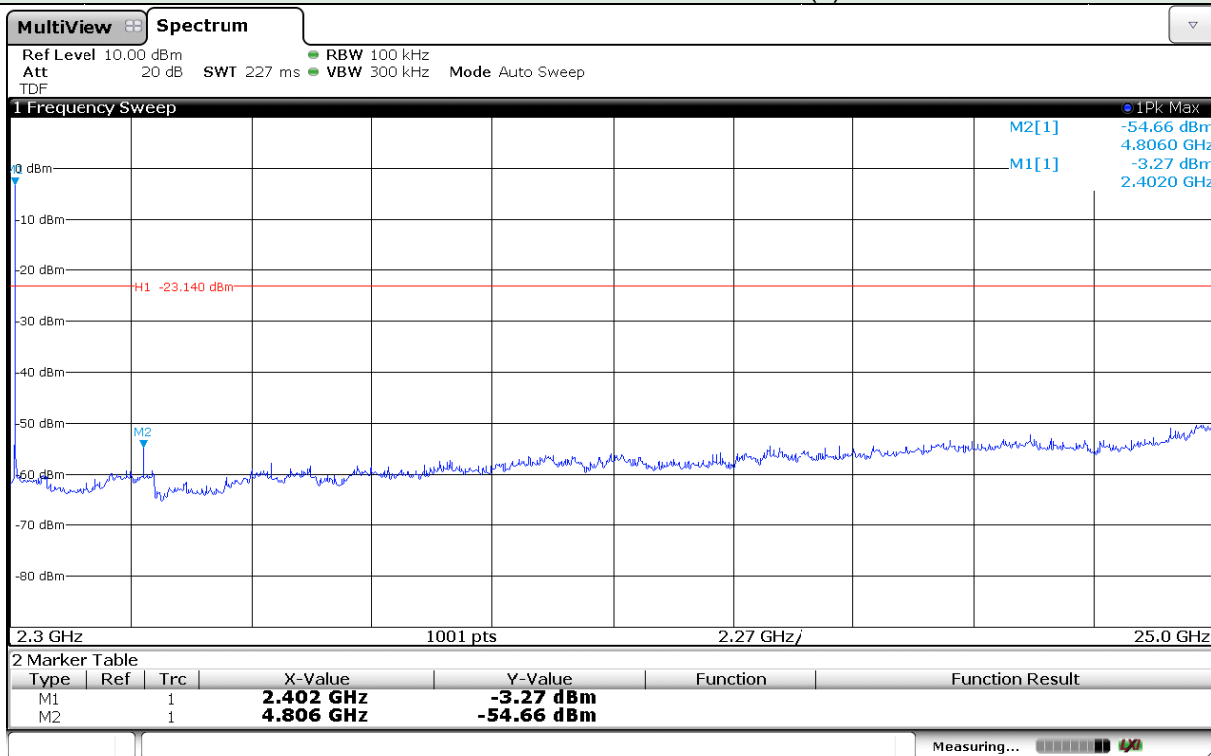


### Non-restricted band – Middle Channel (1)

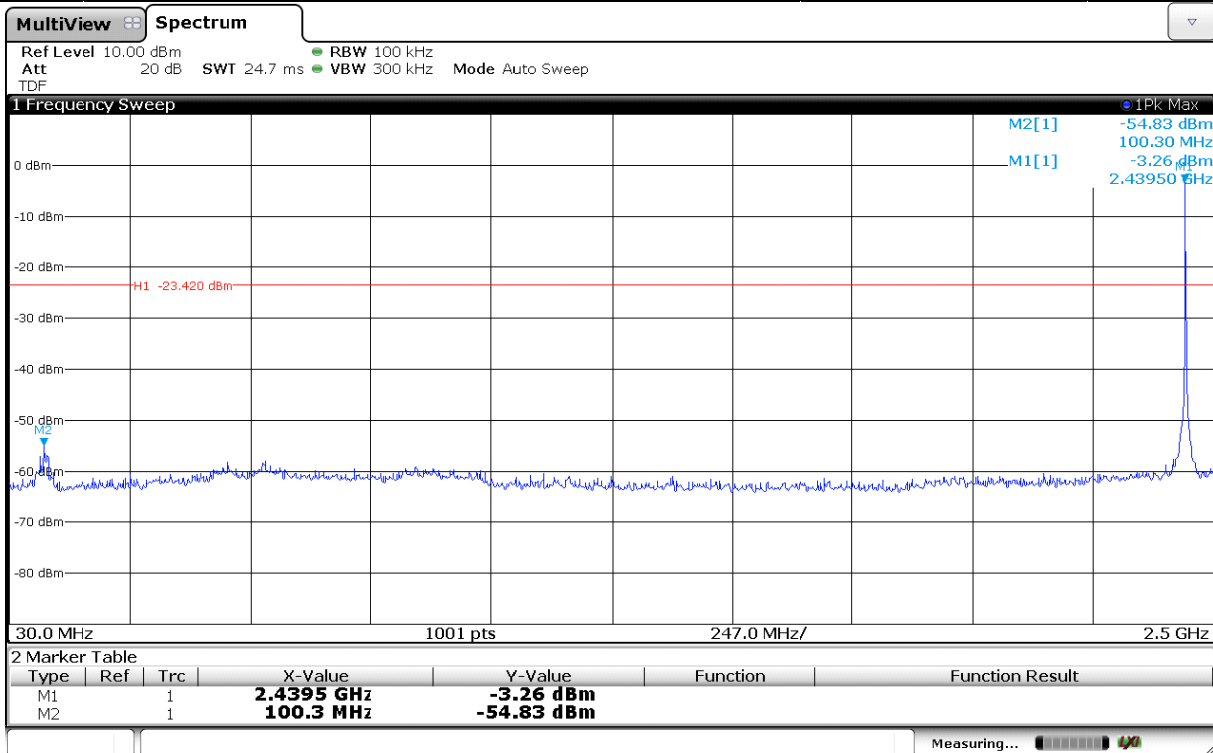


### Non-restricted band – Middle Channel (2)

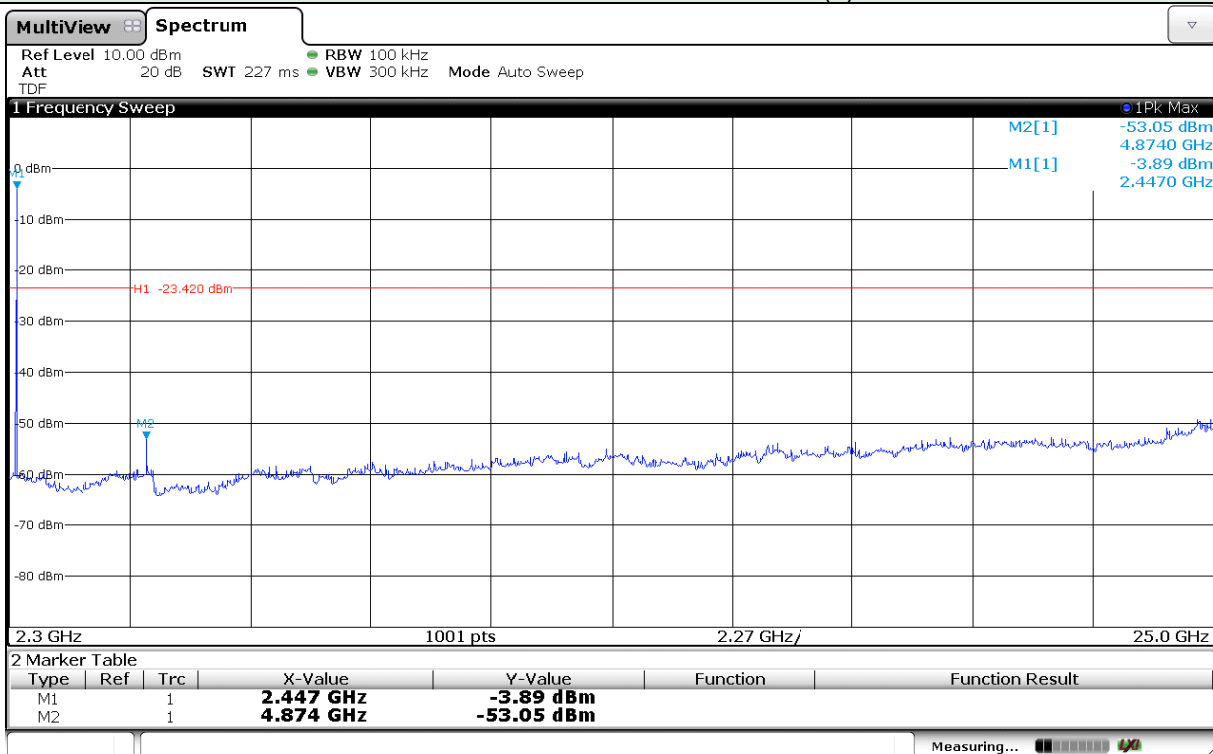

### Non-restricted band – High Channel (1)

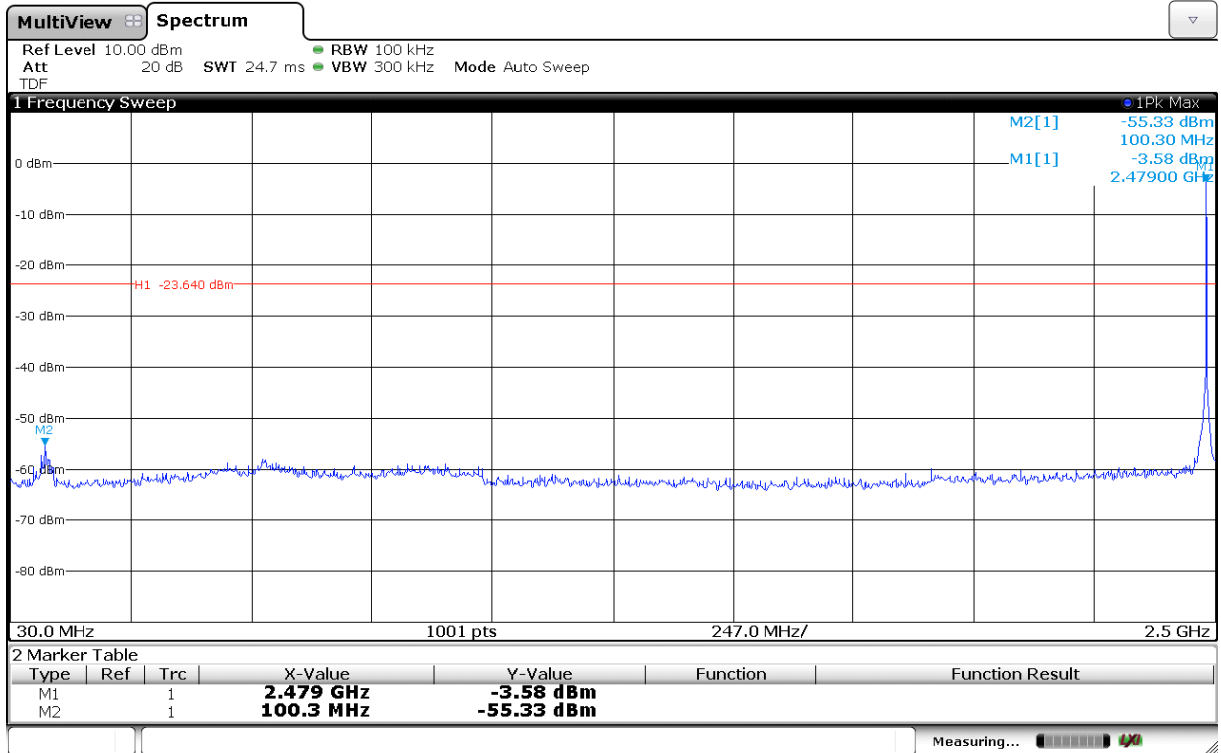

### Non-restricted band – High Channel (2)

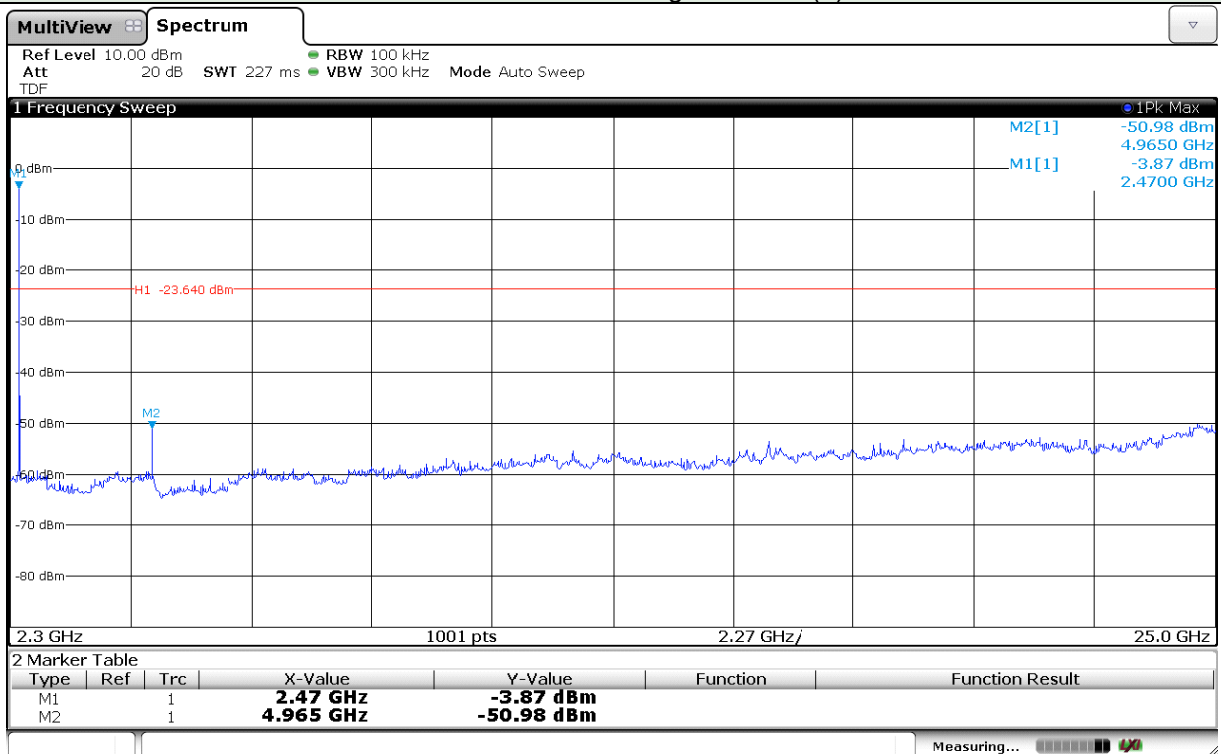

## 5.6 Radiated Emission

### 5.6.1 Limit

Acc. To section 15.205 and 15.209, following table shall be applied.

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 – 88	100	40
88 – 216	150	43.5
216 – 960	200	46
Above 960	500	24

### 5.6.2 Method of Measurement

Reference to KDB 558074 D01 DTS Meas Guidance v04: 12.1 Radiated emission measurements.

The radiated emissions measurements were on 3 m, semi-anechoic chamber. The EUT and other support equipment were placed on a non-conductive table 80 cm for below 1 GHz and 1.5 m for above 1 GHz above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

For measurement below 1 GHz, the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For peak emission measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz and for average measurement, resolution bandwidth is set to 1 MHz; and the video bandwidth is set to 10 Hz, when duty cycle is more than 98 %. If duty cycle is less than 98 %, the video bandwidth is set to  $\geq 1/T$ , where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz. The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.

For band edge measurement, a spectrum analyzer with the RBW set to 100 kHz,  $VBW \geq 3 \times RBW$ , RMS detector and power averaging. Perform a trace averaging of 100 traces and compute the power by integrating the spectrum power over 1MHz using the spectrum analyzer's band power measurement function within band limits set equal to the emissions frequency( $f_{emissions} \pm 0.5$  MHz) (Reference to KDB 558074 D01 DTS Meas Guidance v04: 13.3.2 Trace averaging across on-and off-time of the EUT transmissions followed by duty cycle correction.)

### 5.6.3 Test Site Requirement for KDB 937606

Acc. to KDB 937606, Semi Anechoic Chamber (SAC) shall be verified test results below 30 MHz with Open Area Test Site (OATS), so we compared test results between the measurements from our SAC and an OATS and found test results almost same, so we declare test result for below 30 MHz from our SAC is valid and met the requirement acc. to KDB 937606.

### 5.6.4 Measurement Uncertainty

Measurement uncertainties were not taken into account and following uncertainty levels have been estimated for tests performed on the apparatus. The measurement uncertainties are given with at least 95 % confidence.

Frequency Range	Uncertainty	Frequency Range	Uncertainty
9 kHz ~ 30 MHz	± 2.1 dB	30 MHz ~ 1 GHz	± 4.8 dB
1 GHz ~ 18 GHz	± 5.0 dB	18 GHz ~26.5 GHz	± 5.3 dB

### 5.6.5 Sample Calculated Example

At 80 MHz


Limit = 40.0 dBuV/m

Result = Receiver reading value + Antenna Factor + Cable Loss – Pre-amplifier gain = 30 dBuV/m


Margin = Limit – Result = 40 – 30 = 10

so the EUT has 10.0 dB margin at 80 MHz

### 5.6.6 Test Data

Date of Test	2018-04-17	Temperature	21.2 °C		
		Relative humidity	41.4 % R.H.		
<b>Measurement Frequency Range</b>		9 kHz ~ 26 GHz			
<b>Test Result</b>	<b>PASS</b>	Tested By	Do-heon Kim 		
Frequency range	Detector Mode	Resolution BW	Video BW	Video Filtering	Measurement distance
Below 30 MHz	Peak or Q.P.	9 kHz	100 kHz	-	3 m
30 MHz ~ 1 000 MHz	Peak or Q.P.	100 kHz	300 kHz	-	3 m
Above 1 GHz	Peak	1 MHz	3 MHz	-	3 m
	Average	1 MHz	3 MHz	-	3 m


#### 5.6.6.1 Test Data below 30 MHz

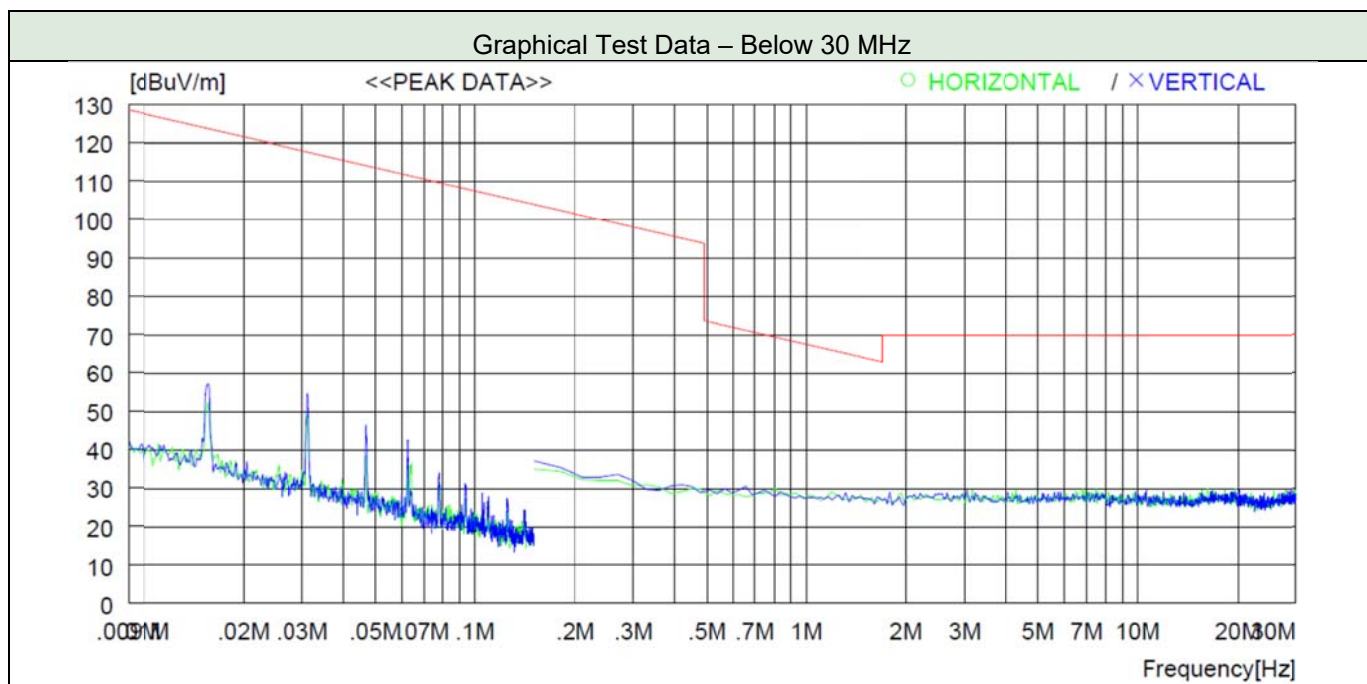

Tabulated Test Data – Low / Middle / High Channel

Frequency (MHz)	Receiver Reading (dBuV)	Detector Mode	Pol.	Ant. Factor (dB/m)	Corr. Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Azimuth (Degree)
* Spurious emissions that 20 dB below the limits didn't be recorded										

### 5.6.6.2 Test Data from 30 MHz to 1 GHz

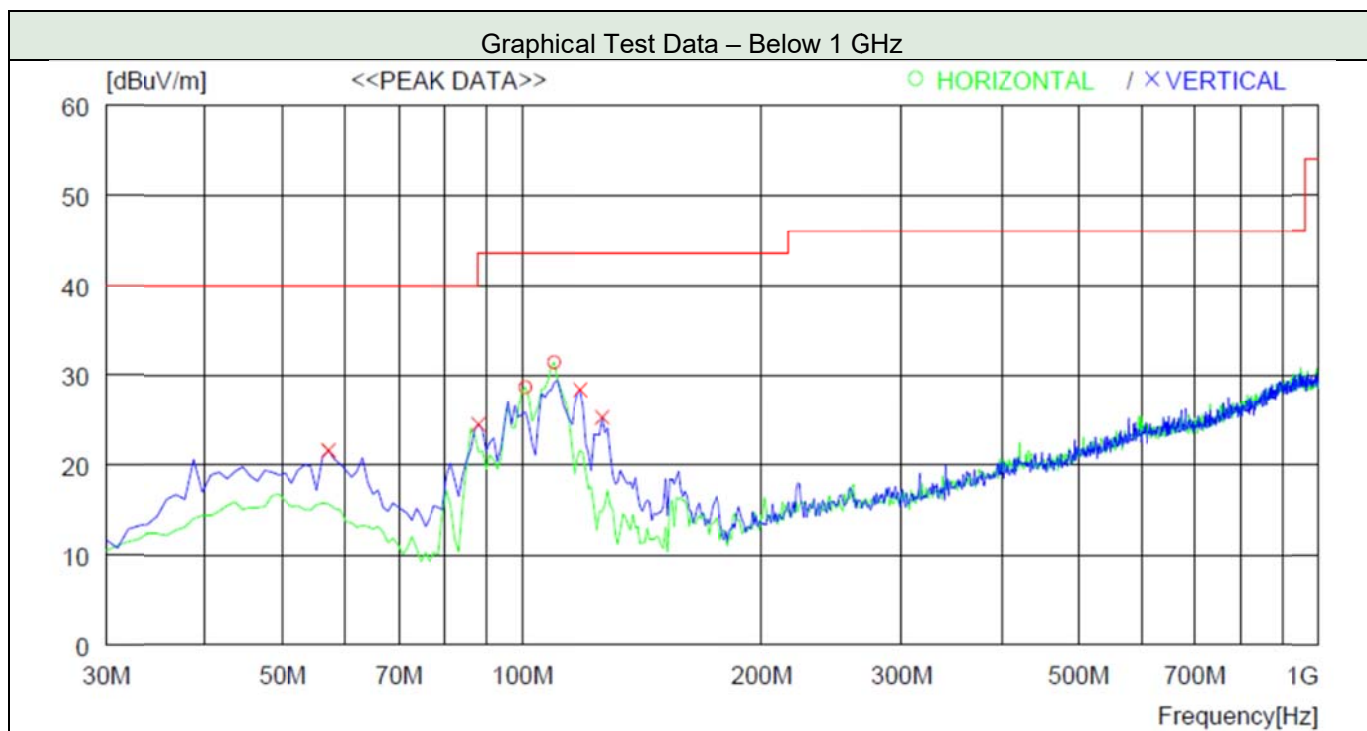

Tabulated Test Data							
Frequency (MHz)	Pol.	Detect Mode	Reading (dBμV)	Factor* (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
57.160	V	Peak	34.2	12.7	21.6	46.0	18.4
88.200	V	Peak	39.6	9.8	24.5	46.0	19.0
100.810	H	Peak	41.6	11.8	28.7	46.0	14.8
109.540	H	Peak	45.7	10.5	31.5	46.0	12.0
118.270	V	Peak	43.8	9.1	28.4	46.0	15.1
126.030	V	Peak	41.2	8.5	25.3	46.0	18.2

Note: "H" means Horizontal polarity, "V" means Vertical polarity.


GFSK lowest channel and y-axis is worst case configuration.

Quasi-peak measurements are omitted because the peak data meets the limit.



### 5.6.6.3 Test Data above 1 GHz

#### 5.6.6.3.1 Duty Cycle

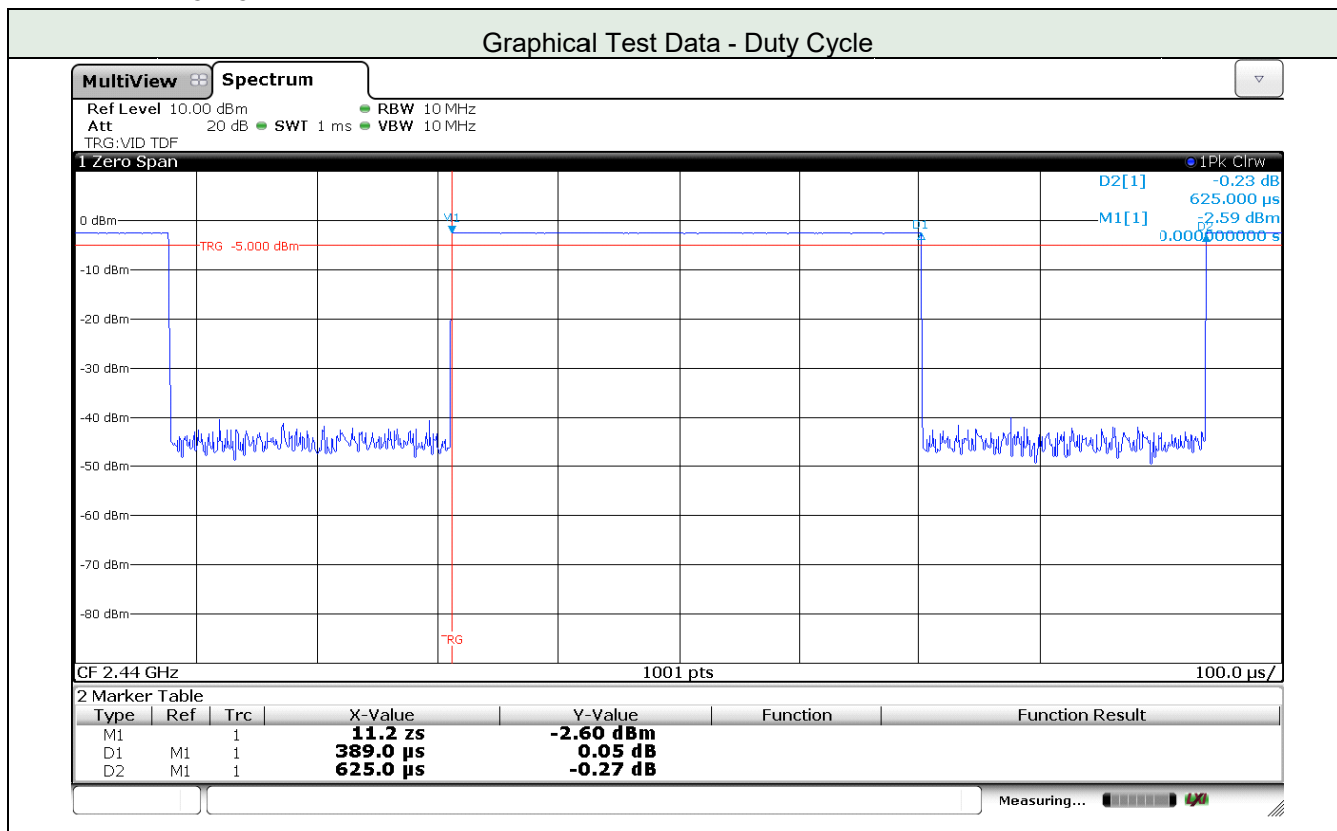

**Tabulated Test Data**


Operating Mode	On Time (μs)	On + Off Time (μs)	Duty Cycle (%)	Duty Factor (dB)
Bluetooth LE	389.0	625.0	62.24	2.06

Detector Mode	Resolution BW	Video BW	Sweep Time	Measurement distance
PEAK	1 MHz	3 MHz	Auto	3 m
RMS	1 MHz	3 MHz	Auto	3 m


### 5.6.6.3.2 Test Data for Band edge (Restricted band)

Graphical Test Data – Low Channel (Peak)

Horizontal

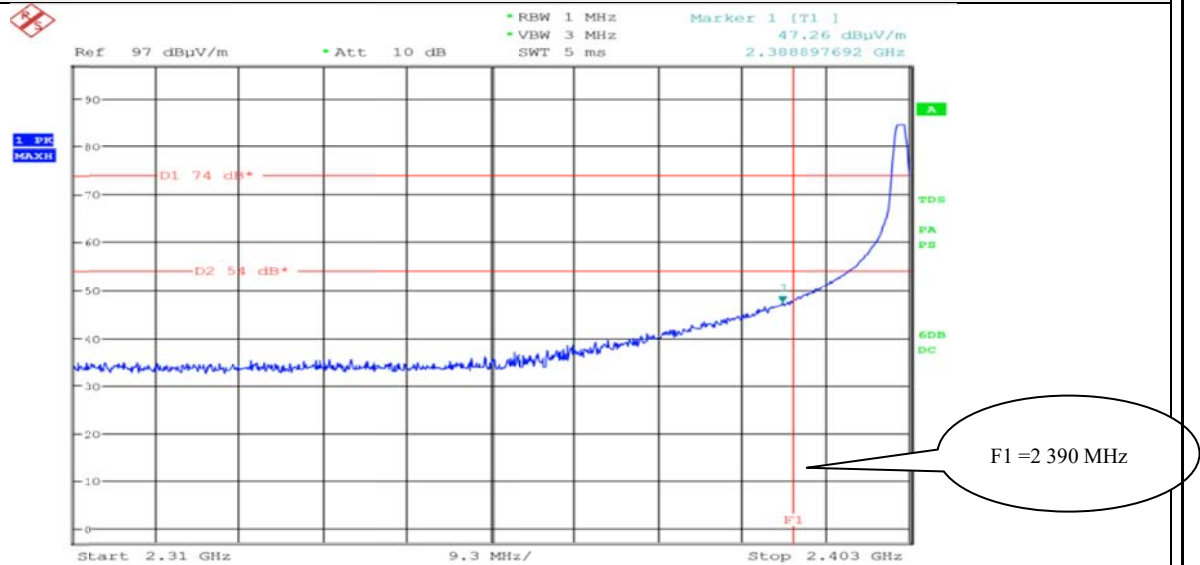

Vertical

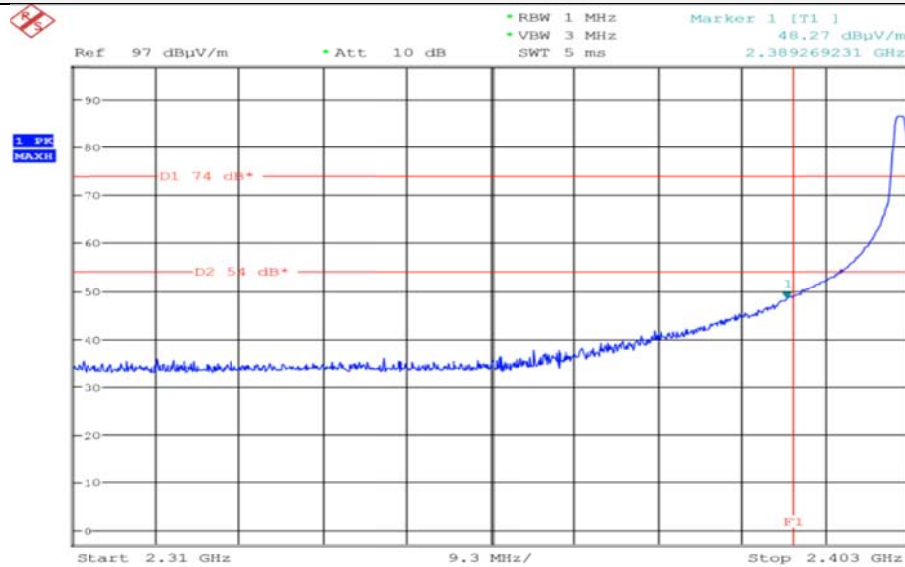

Tabulated Test Data – Low Channel


Freq. (MHz)	Detector Mode	Pol.	Receiver Reading (dBuV/m)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Azimuth (Deg)
2 388.9	Peak	H	47.26	-	47.26	74	26.74	140	170
2 389.3	Peak	V	48.27	-	48.27	74	25.73	160	210

**NOTE:** “H” means Horizontal polarity, “V” means Vertical polarity.


Receiver reading = Measured value + Antenna Factor + Cable loss - Pre-amplifier gain.

### Graphical Test Data – Low Channel (Average)

#### Horizontal

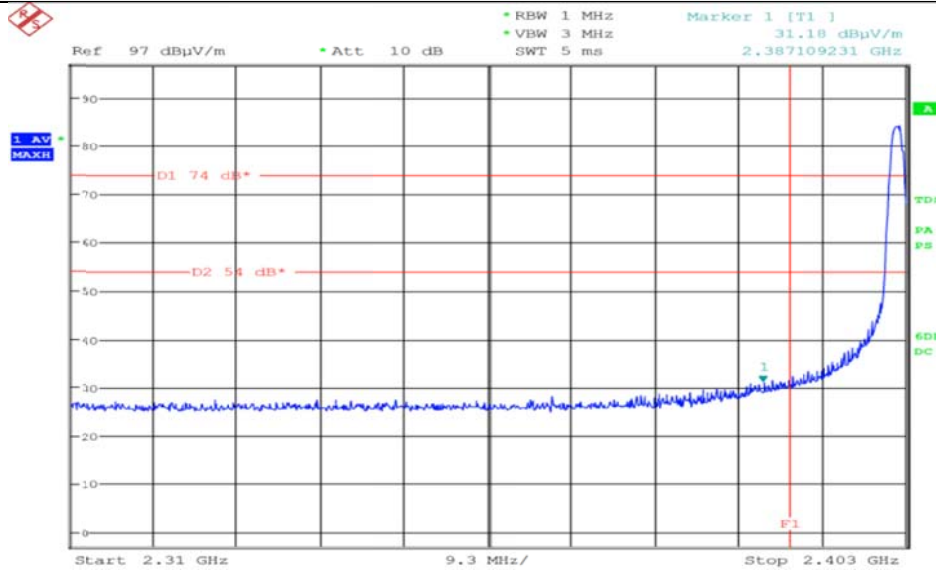

#### Vertical

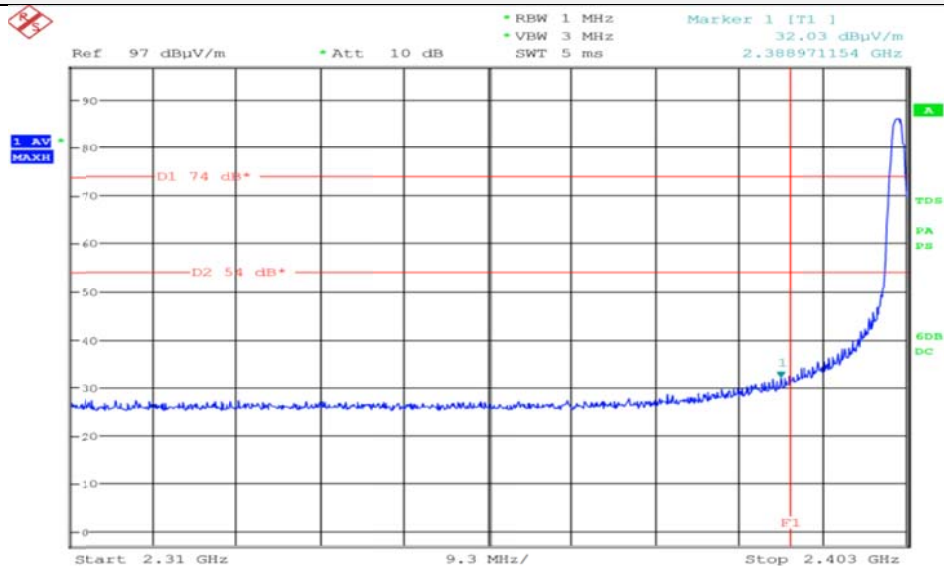

### Tabulated Test Data – Low Channel

Freq. (MHz)	Detector Mode	Pol.	Receiver Reading (dBuV/m)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Azimuth (Deg)
2 387.1	Average	H	31.18	2.06	33.24	54	20.76	140	170
2 389.0	Average	V	32.03	2.06	34.09	54	19.91	160	210


**NOTE:** "H" means Horizontal polarity, "V" means Vertical polarity.

Receiver reading = Measured value + Antenna Factor + Cable loss - Pre-amplifier gain.


Result = Receiver Reading + Duty factor

### Graphical Test Data – High Channel (Peak)

#### Horizontal

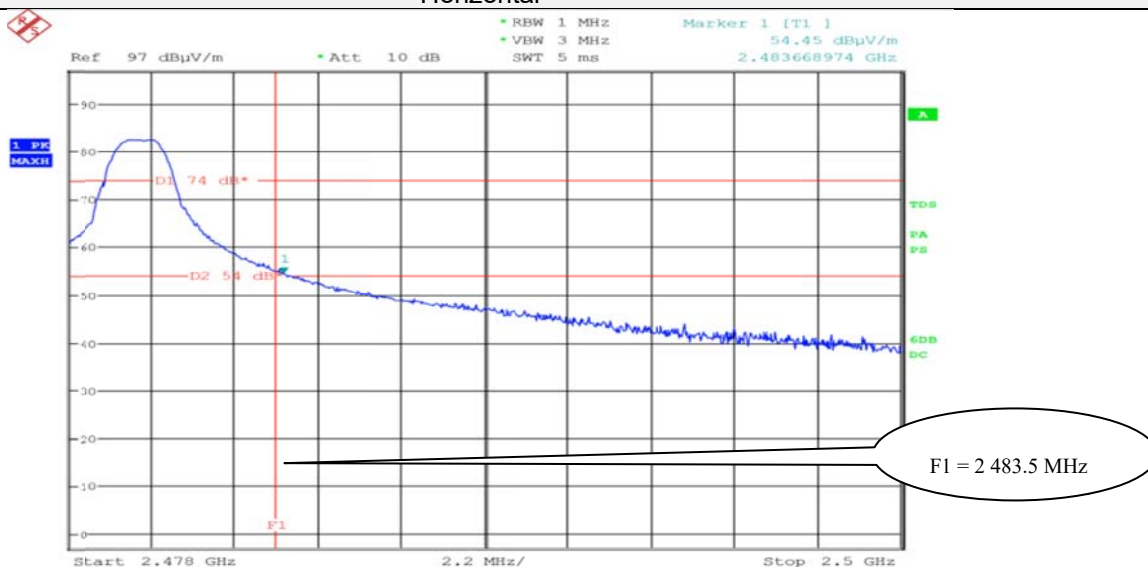

#### Vertical

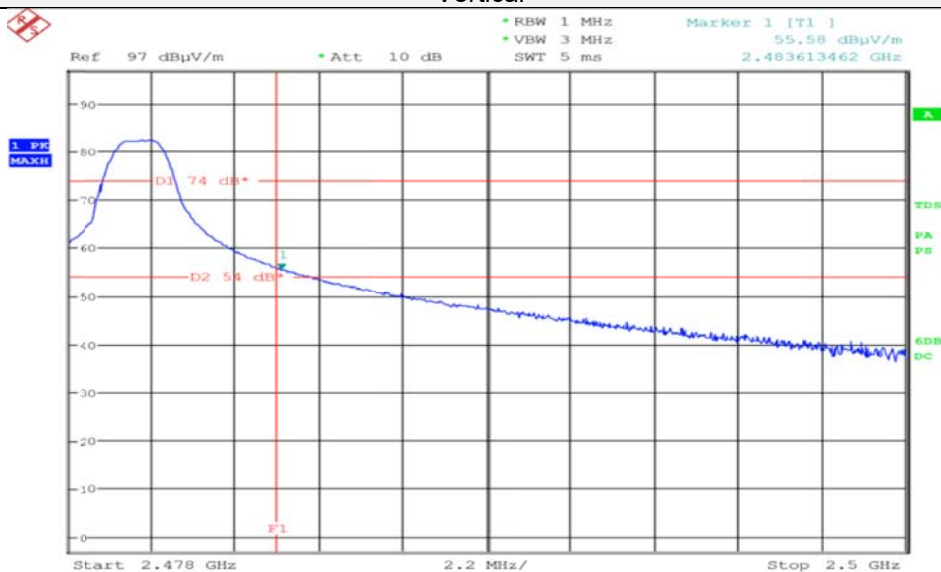

### Tabulated Test Data – High Channel


Freq. (MHz)	Detector Mode	Pol.	Receiver Reading (dBuV/m)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Azimuth (Deg)
2 483.7	Peak	H	54.45	-	54.45	74	19.55	180	170
2 483.6	Peak	V	55.58	-	55.58	74	18.42	160	120

**NOTE:** "H" means Horizontal polarity, "V" means Vertical polarity.


Receiver reading = Measured value + Antenna Factor + Cable loss - Pre-amplifier gain.

### Graphical Test Data – Low Channel (Average)

#### Horizontal

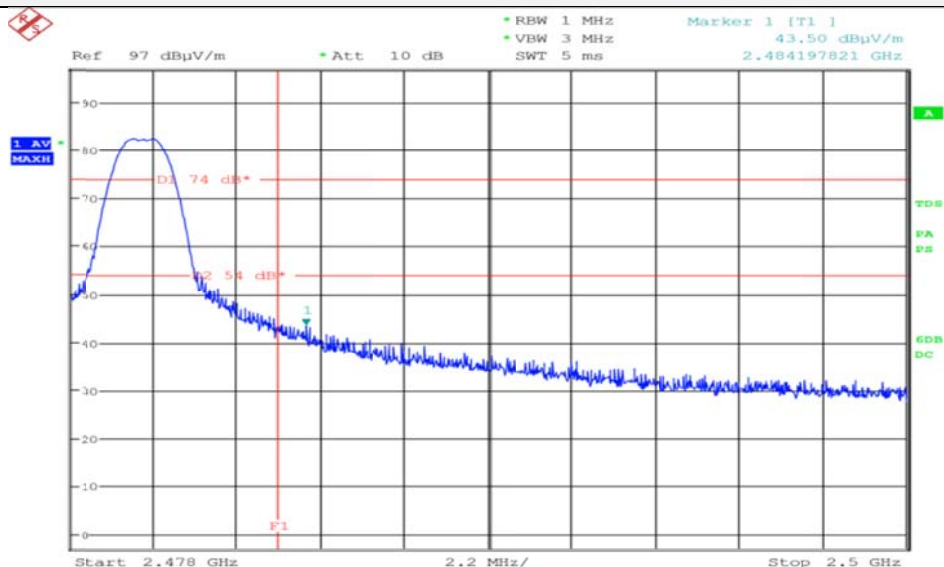

#### Vertical

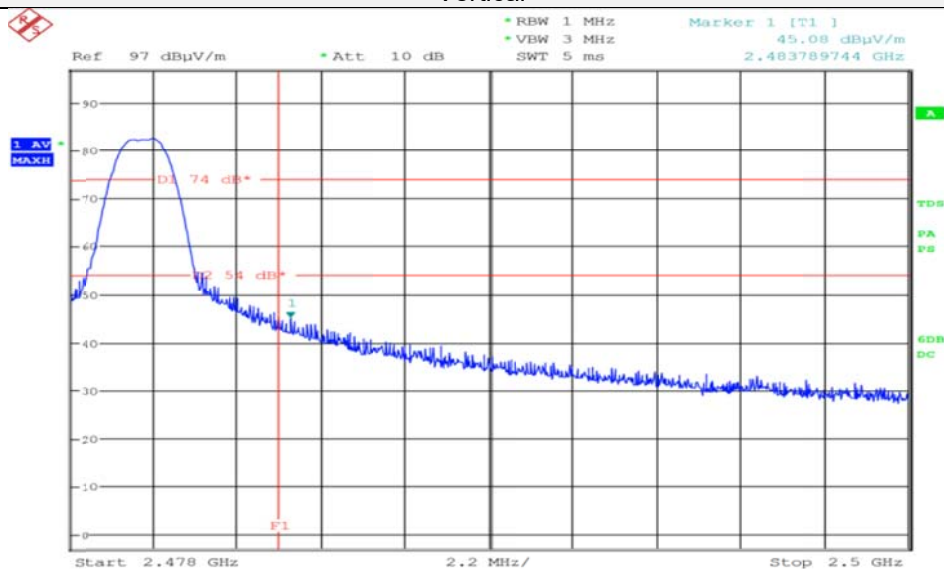

### Tabulated Test Data – High Channel

Freq. (MHz)	Detector Mode	Pol.	Receiver Reading (dBuV/m)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Azimuth (Deg)
2 484.2	Average	H	43.50	2.06	45.56	54	8.44	180	170
2 483.8	Average	V	45.08	2.06	47.14	54	6.86	160	120


**NOTE:** "H" means Horizontal polarity, "V" means Vertical polarity.

Receiver reading = Measured value + Antenna Factor + Cable loss - Pre-amplifier gain.

Result = Receiver Reading + Duty factor

### 5.6.6.4 Test Data for Harmonic & Spurious emission (1 GHz to 18 GHz)

#### 5.6.6.4.1 Operating mode: Bluetooth LE

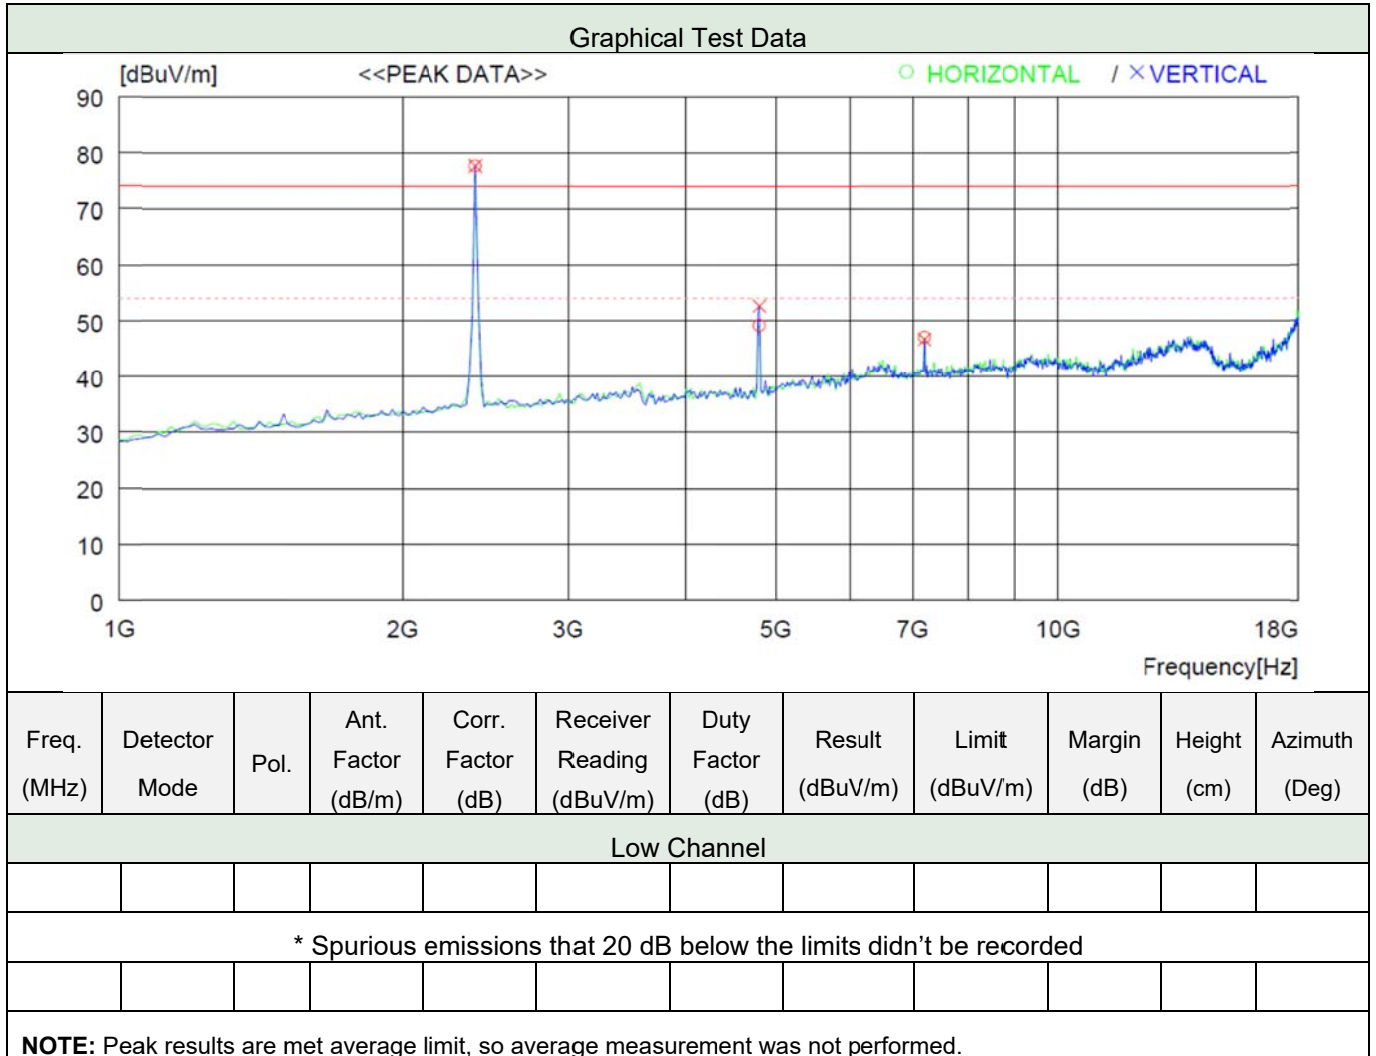

**NOTE:** Peak results are met average limit, so average measurement was not performed.

Note. "H" means Horizontal polarity, "V" means Vertical polarity.


GFSK lowest channel is worst case configuration.

Corr. Factor (dB) = Pre-amplifier gain - Cable Loss

Result = Receiver Reading + Antenna Factor - Corr. Factor + Duty factor

Margin = Limit - Result

### 5.6.6.5 Test Data for Harmonic & Spurious emission (18 GHz to 25 GHz)

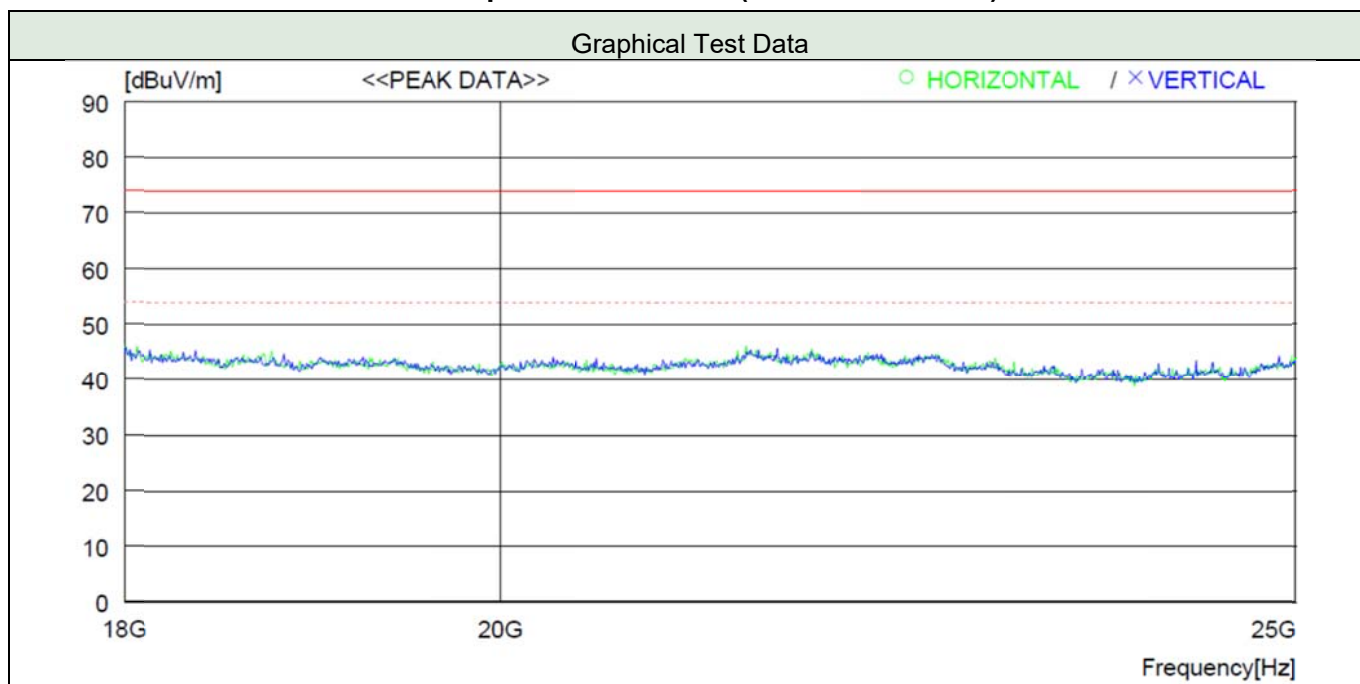

Freq. (MHz)	Detector Mode	Pol.	Ant. Factor (dB/m)	Corr. Factor (dB)	Receiver Reading (dBuV/m)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Azimuth (Deg)
Low Channel											
* Spurious emissions that 20 dB below the limits didn't be recorded											

**NOTE:** Peak results are met average limit, so average measurement was not performed.

Emission was scanned up to 25 GHz; No emissions were detected above the noise floor which was at least 20 dB below the specification limit

Note. "H" means Horizontal polarity, "V" means Vertical polarity.

Corr. Factor (dB) = Pre-amplifier gain - Cable Loss

Result = Receiver Reading + Antenna Factor - Corr. Factor + Duty factor

Margin = Limit - Result

## 5.7 AC Power Line Conducted Emission

### 5.7.1 Limit

Acc. to section 15.207 (a), following table shall be applied.

Frequency Range (MHz)	Quasi-Peak (dBuV)	Average (dBuV)
0.15 - 0.5	66 to 56	56 to 46
0.5 - 5	56	46
5 -30	60	50

### 5.7.2 Method of Measurement

The EUT was placed on a wooden table, 0.8 m height above the horizontal ground plane and 40 cm from the vertical ground plane. Power was fed to the EUT through a 50  $\Omega$  / 50  $\mu$ H + 5  $\Omega$  Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

The test was performed for both Neutral and Hot lines.

### 5.7.3 Measurement Uncertainty

Measurement uncertainties were not taken into account and following uncertainty levels have been estimated for tests performed on the apparatus. The measurement uncertainties are given with at least 95 % confidence.

Frequency Range	Uncertainty	Frequency Range	Uncertainty
9 kHz ~ 150 kHz	$\pm$ 2.00 dB	150 kHz ~ 30 MHz	$\pm$ 2.00 dB

### 5.7.4 Sample Calculated Example

At 5.31 MHz

QP Limit = 60.0 dBuV

Correction Factor (C. Factor) of LISN, Pulse Limiter and cable loss at 5.31 MHz = 9.7 dB

Q.P Reading from the Test receiver = 20.8 dBuV


(Calculated value for system losses by software EMC32 manufactured by Rohde & Schwarz)

Therefore Q.P Margin = 60 - 20.8 = 39.2


so the EUT has 39.2 dB margin at 5.31 MHz



### 5.7.5 Worst Case Test Data

Date of Test	2018-04-17	Temperature	21.2 °C
		Relative humidity	41.4 % R.H.
<b>Measurement Frequency Range</b>		9 kHz ~ 30MHz	
<b>Test Result</b>	<b>PASS</b>	Tested By	Do-heon Kim 


#### Hot Line

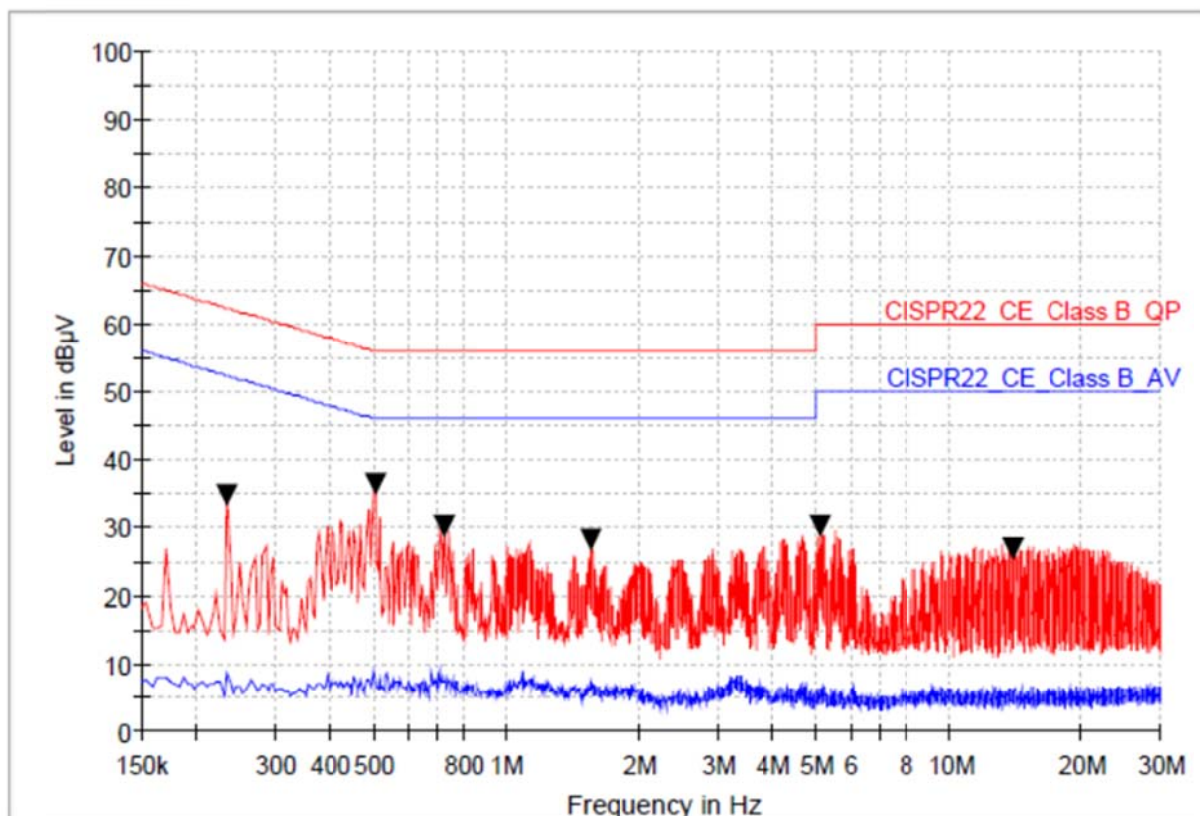

### Limit and Margin

Frequency (MHz)	MaxPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV)
0.234000	34.8	9.000	L1	9.6	27.6	62.3
0.506000	36.4	9.000	L1	9.6	19.6	56.0
0.726000	30.2	9.000	L1	9.6	25.8	56.0
1.546000	28.0	9.000	L1	9.6	28.0	56.0
5.146000	30.1	9.000	L1	9.7	29.9	60.0
14.050000	26.9	9.000	L1	9.8	33.1	60.0

Neutral Line

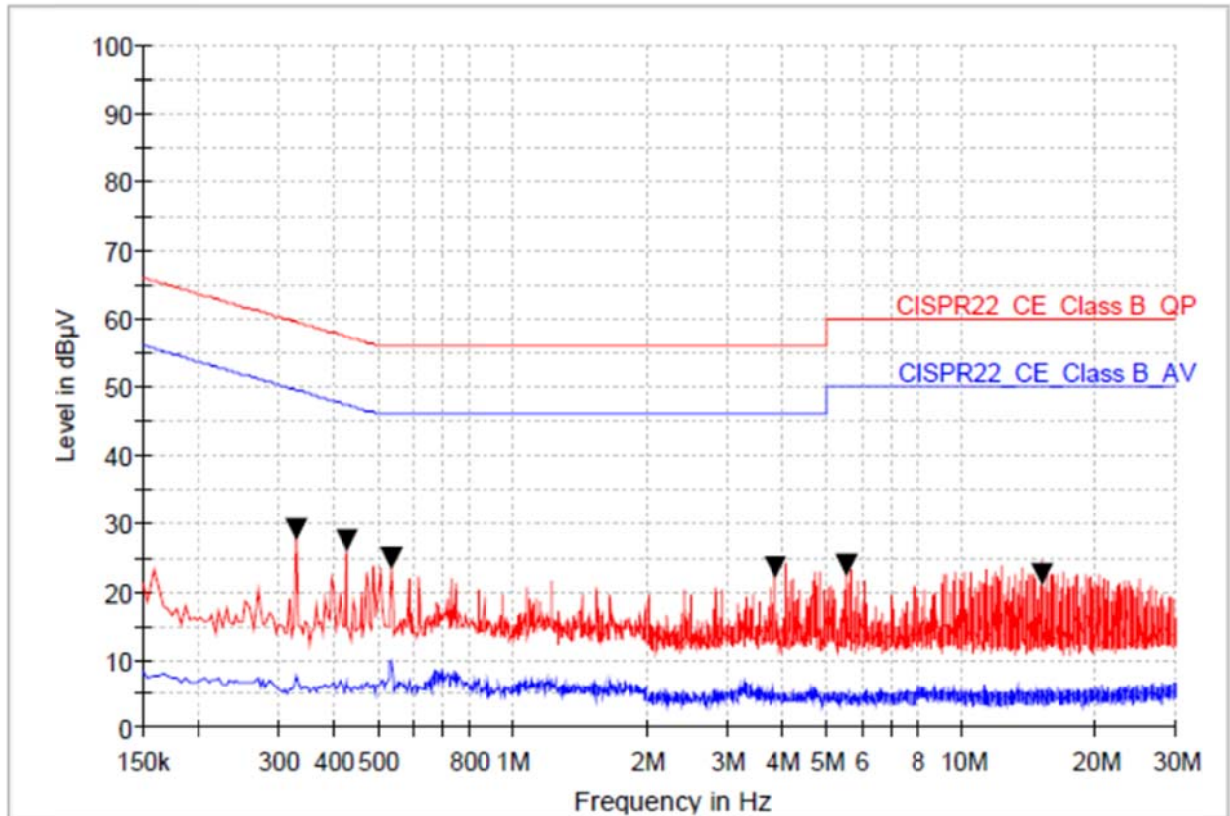

**Limit and Margin**

Frequency (MHz)	MaxPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin - PK+ (dB)	Limit - PK+ (dBµV)
0.330000	29.1	9.000	N	9.6	30.3	59.5
0.426000	27.3	9.000	N	9.6	30.0	57.3
0.538000	24.7	9.000	N	9.6	31.3	56.0
3.862000	23.4	9.000	N	9.7	32.6	56.0
5.570000	23.8	9.000	N	9.7	36.2	60.0
15.178000	22.6	9.000	N	9.9	37.4	60.0

## Appendix I – Test Instrumentation

Description	Model No.	Serial No.	Manufacturer.	Due for Cal Date
Signal & Spectrum Analyzer	FSW 43	100578	Rohde & Schwarz	2018-05-04
DC Power Supply	U8001A	MY51080019	Agilent	2018-07-28
Attenuator	56-10	58769	WEINSCHTEL	2019-01-22
Test Receiver	ESU 26	100303	Rohde & Schwarz	2019-01-18
Loop Antenna	HFH2-Z2	100341	Rohde & Schwarz	2019-04-21
TRILOG Broadband Antenna	VULB9163	9163.799	Schwarzbeck	2019-09-14
Horn Antenna	HF 907	102426	Rohde & Schwarz	2018-11-25
Horn Antenna	BBHA 9170	783	Schwarzbeck	2018-11-28
Attenuator	6dB	272.4110.50	Rohde & Schwarz	2019-01-18
Pre-Amplifier	310N	344015	Sonoma Instrument	2019-01-18
Pre-Amplifier	SCU 18D	19006450	Rohde & Schwarz	2018-04-24
Pre-Amplifier	CBL18265035	28706	CERNEX	2019-03-29
Turn Table	DT3000-3t	1310814	INNCO SYSTEM	N/A
Antenna Master	MA4000-EP	4600814	INNCO SYSTEM	N/A
Antenna Master	MA4000-XP-ET	-	INNCO SYSTEM	N/A
Camera Controller	HDCon4102	6531445048	PONTIS	N/A
CO3000 Controller	Co3000-4Port	CO3000/806/ 34130814/L	INNCO SYSTEM	N/A
CO3000 Controller	Co3000-4Port	CO3000/807/ 34130814/L	INNCO SYSTEM	N/A

The measuring equipment utilized to perform the tests documented in this test report has been calibrated in accordance with manufacturer's recommendations, and is traceable to recognized national standards.