



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15.247

TEST REPORT

For

Shanghai Imilab Technology co.,LTD

Room908,No.1,Lane399,Shengxia Rd., China Pilot Free Trade Zone, Shanghai, China

FCC ID: 2APA9-IPC011A

Report Type: Original Report	Product Type: IMILAB Wire-Free Home Security Camera
Test Engineer: Hope Zhang	<i>Hope Zhang</i>
Report Number: RKSA181017001-00A	
Report Date: 2019-05-23	
Reviewed By: RF Leader	<i>Oscar.Ye</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,JIANGSU province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....4

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)4

 OBJECTIVE4

 RELATED SUBMITTAL(S)/GRANT(S).....4

 TEST METHODOLOGY4

 MEASUREMENT UNCERTAINTY.....5

 TEST FACILITY5

SYSTEM TEST CONFIGURATION6

 DESCRIPTION OF TEST CONFIGURATION6

 EQUIPMENT MODIFICATIONS6

 EUT EXERCISE SOFTWARE6

 SUPPORT EQUIPMENT LIST AND DETAILS9

 EXTERNAL I/O CABLE.....9

 BLOCK DIAGRAM OF TEST SETUP9

SUMMARY OF TEST RESULTS11

TEST EQUIPMENT LIST12

FCC §1.1310& §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE).....13

 APPLICABLE STANDARD13

 CALCULATED FORMULARY:.....13

 CALCULATED DATA:.....13

FCC §15.203 - ANTENNA REQUIREMENT.....14

 APPLICABLE STANDARD14

 ANTENNA CONNECTOR CONSTRUCTION14

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS15

 APPLICABLE STANDARD15

 EUT SETUP15

 EMI TEST RECEIVER SETUP.....15

 TEST PROCEDURE16

 CORRECTED FACTOR & MARGIN CALCULATION16

 TEST RESULTS SUMMARY16

 TEST DATA16

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....19

 APPLICABLE STANDARD19

 EUT SETUP19

 EMI TEST RECEIVER SETUP.....20

 TEST PROCEDURE20

 CORRECTED AMPLITUDE & MARGIN CALCULATION20

 TEST RESULTS SUMMARY20

 TEST DATA21

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....40

 APPLICABLE STANDARD40

 TEST PROCEDURE40

 TEST DATA40

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....47

 APPLICABLE STANDARD47

 TEST PROCEDURE47

 TEST DATA47

FCC §15.247(d) – BAND EDGE	49
APPLICABLE STANDARD	49
TEST PROCEDURE	49
TEST DATA	49
FCC §15.247(e) - POWER SPECTRAL DENSITY	53
APPLICABLE STANDARD	53
TEST PROCEDURE	53
TEST DATA	53

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Shanghai Imilab Technology co.,LTD
Tested Model	CMSXJ11A
Product Type	IMILAB Wire-Free Home Security Camera
Dimension	140.4 mm(L)*47 mm(W)*73 mm(H)
Power Supply	DC 5V; DC 3.63V from battery (Limited charging voltage:4.2V)

**All measurement and test data in this report was gathered from production sample serial number: 20181017001. (Assigned by the BACL. The EUT supplied by the applicant was received on 2018-10-17)*

Objective

This report is prepared on behalf of *Shanghai Imilab Technology co.,LTD* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions' rules.

The tests were performed in order to determine Compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No Related Submittal(s)/Grant(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Test channel list is as below:

For 802.11b, 802.11g and 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11;

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software


RF test tool: Secure CRT

Pre-scan with all the data rates, and the worst case was performed as below:

Mode	Data Rate	Power Level
802.11b	1 Mbps	13
802.11g	6 Mbps	13
802.11n-HT20	MCS0	13


Duty Cycle:

802.11b Mode Middle Channel

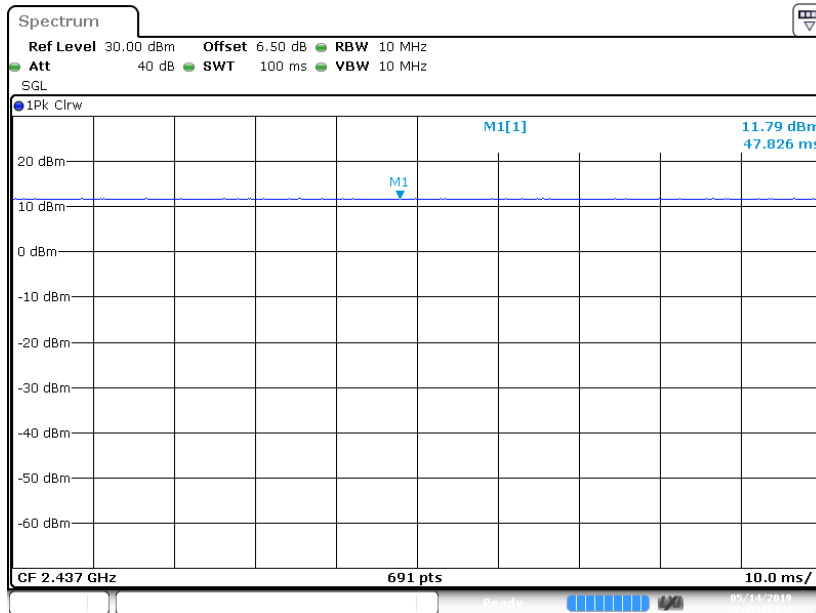


Date: 14 MAY 2019 14:47:37

802.11g Mode Middle Channel

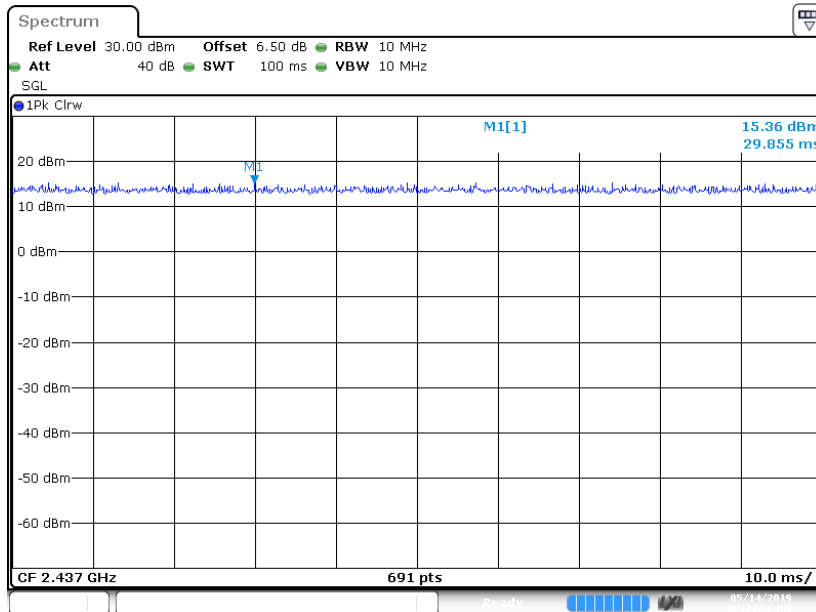

Date: 14 MAY 2019 14:44:53

802.11n-HT20 Mode Middle Channel

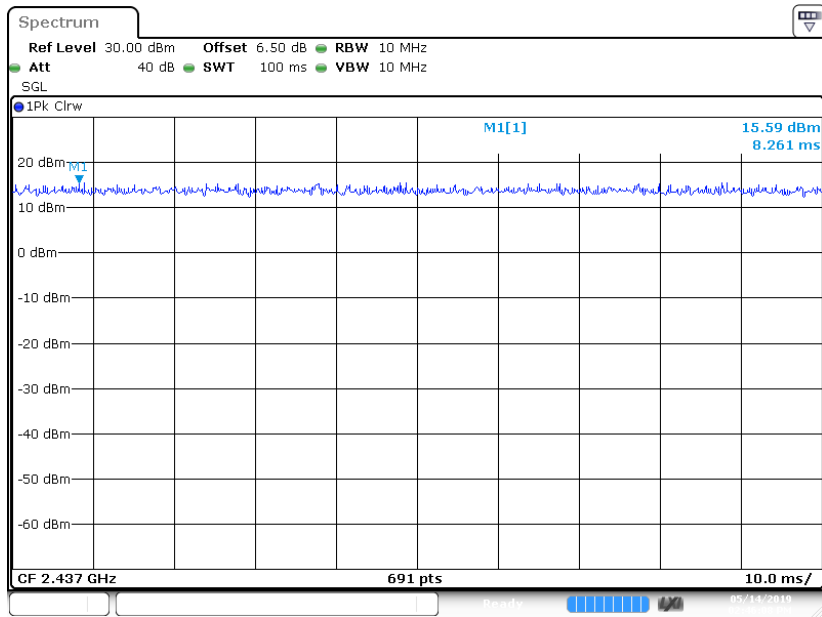

Date: 14 MAY 2019 14:46:09

Mode	Duty Cycle (%)	T(ms)	1/T(kHz)	10log(1/x)
802.11b	100	/	/	/
802.11g	100	/	/	/
802.11n-HT20	100	/	/	/

Note: “x” means the Duty Cycle.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Dongguan Aohai Power Technology Co.,Ltd	Adapter1	A162-050200U-US2	2C01904C100016A
Dell	Notebook	E6410	3094742521
Dell	Adapter2	LA65NS0-00	DF263
/	Serial port board	USB to TTL	/

External I/O Cable


Cable Description	Length (m)	From Port	To
USB Cable	1.0	EUT	Adapter1

Block Diagram of Test Setup


For Conducted Emissions:

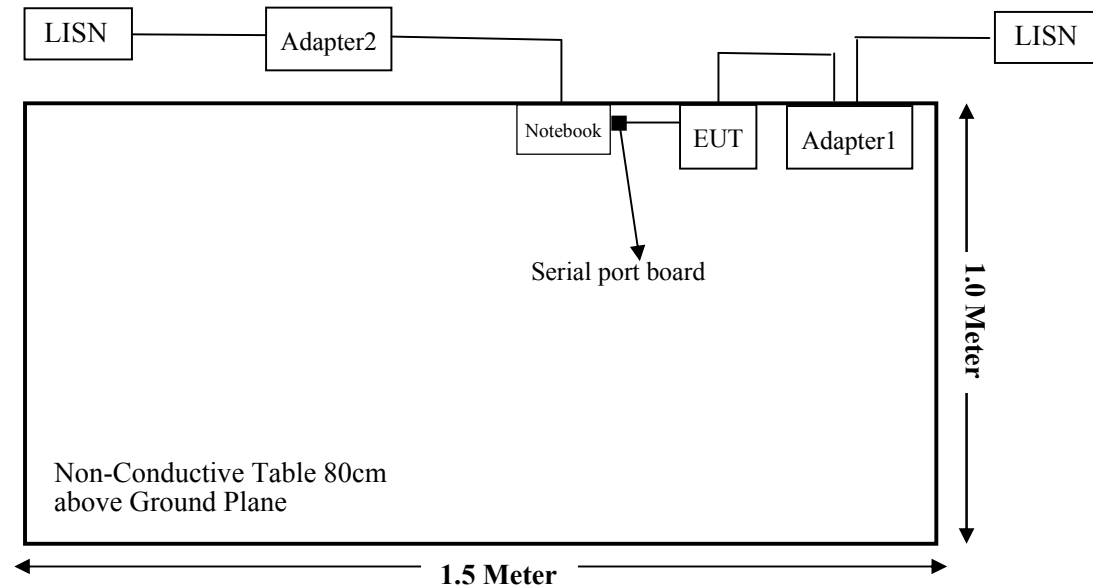

For Radiated Emissions(Below 1GHz):

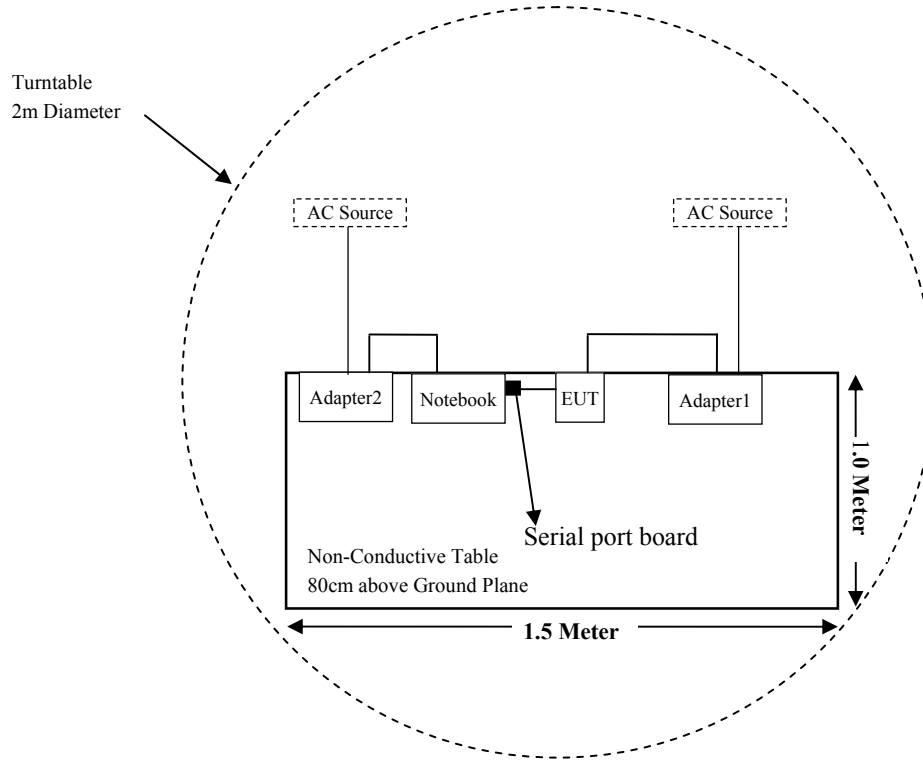

For Radiated Emissions(Above 1GHz):

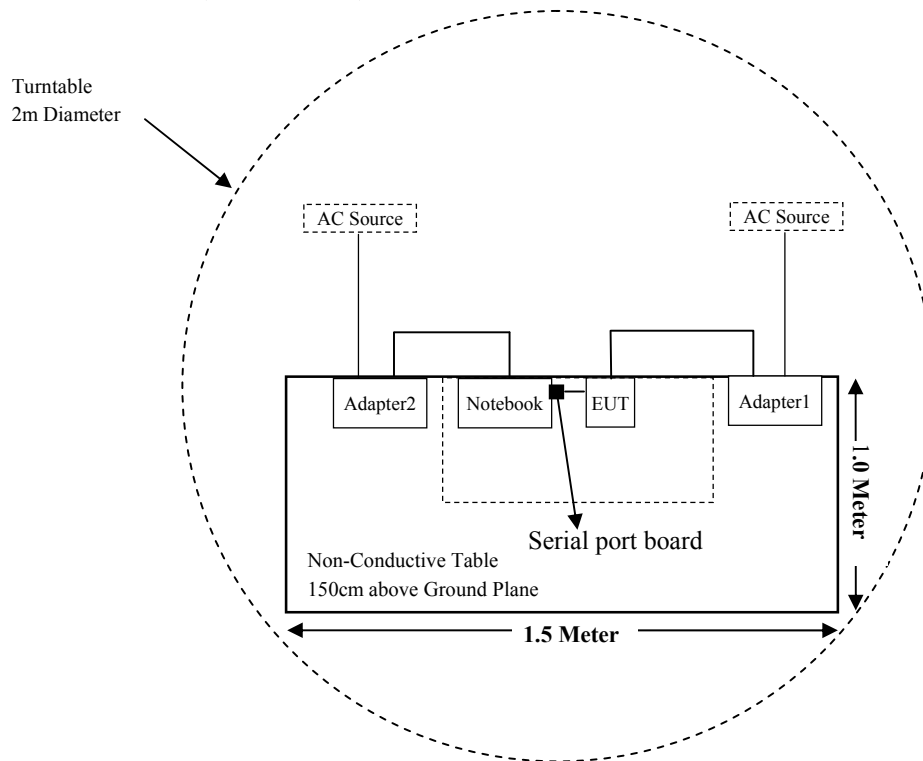

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (I), §1.1310 & §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.247(d)	Spurious Emissions at Antenna Port	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2018-11-30	2019-11-29
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2016-12-26	2019-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2018-08-15	2019-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2018-08-27	2019-08-26
ETS-LINDGREN	Horn Antenna	3115	6229	2017-07-15	2020-07-14
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-12-12	2019-12-11
A.H.Systems, inc	Amplifier	2641-1	491	2019-02-20	2020-02-19
SELECTOR	Amplifier	EM18G40G	060726	2019-03-22	2020-03-21
MICRO-TRONICS	Notch Filter	BRM50702	G024	2018-08-05	2019-08-04
Narda	Attenuator	10dB	010	2018-08-15	2019-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2018-08-15	2019-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2018-08-15	2019-08-14
RF Conducted Test					
Rohde & Schwarz	Signal Analyzer	FSV40	101116	2018-07-23	2019-07-22
Agilent	Power Meter	N1912A	MY5000492	2018-11-18	2019-11-17
Agilent	Power Sensor	N1921A	MY54210024	2018-11-18	2019-11-17
Narda	Attenuator	10dB	010	2018-08-15	2019-08-14
Imilab	RF Cable	ImilabC01	C01	Each Time	/
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCS30	834115/007	2018-11-30	2019-11-29
Rohde & Schwarz	LISN	ENV216	3560655016	2018-11-30	2019-11-29
ROHDE&SCHWARZ	LISN	ESH3-Z5	862770/011	2018-11-30	2019-11-29
BACL	Auto test Software	BACL-EMC	CE001	/	/
Narda	Attenuator/6dB	10690812-2	26850-6	2019-01-10	2020-01-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2018-08-15	2019-09-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310& §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency Range (MHz)	Antenna Gain		Tune-up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm²)	MPE Limit (mW/cm²)
		(dBi)	(numeric)	(dBm)	(mW)			
Wi-Fi	2412~2462	1.00	1.26	17.00	50.12	20	0.0126	1.0

Result: The device meets FCC MPE at 20 cm distance.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine Compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has an FPC antenna for Wi-Fi, which the antenna gain is 1.0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

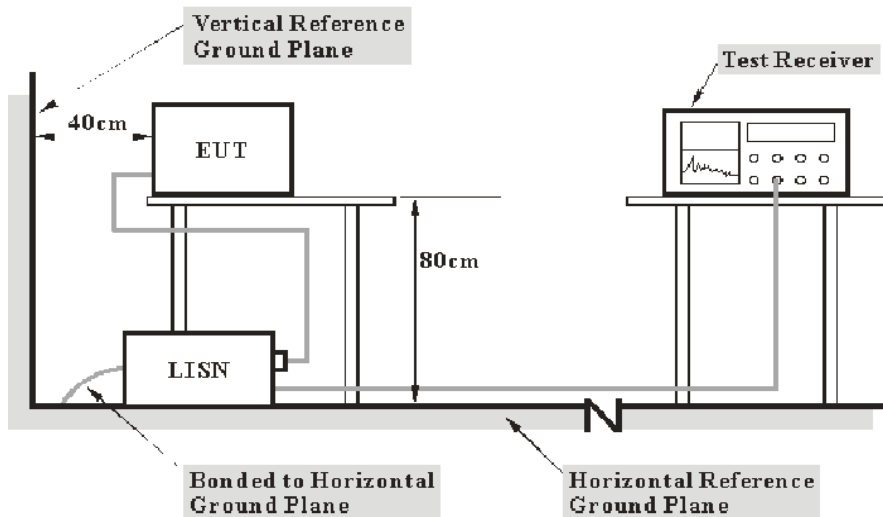

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

ANSI C63.10-2013 clause 6.2

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Corrected Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V)} - \text{Corrected Amplitude (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data


Environmental Conditions

Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Hope Zhang on 2019-04-23.


EUT operation mode: Transmitting in low channel of 802.11n-HT20 mode (worst case)

AC 120V/60 Hz, Line

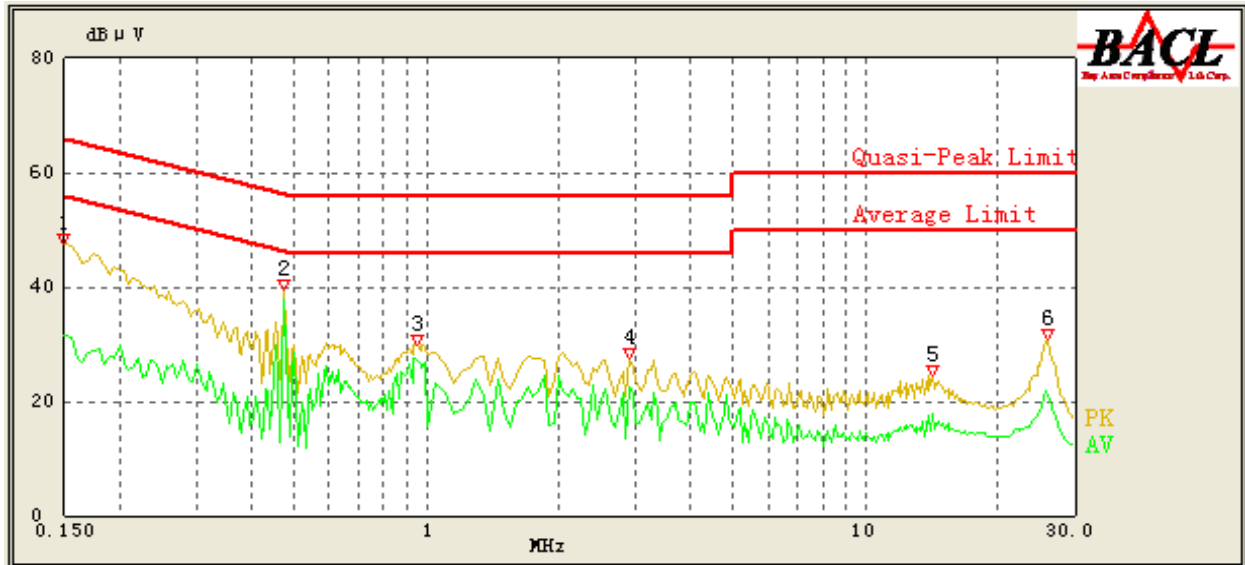

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.150	47.56	QP	9.000	L1	16.06	66.00	18.44	Compliant
0.150	31.44	AV	9.000	L1	16.06	56.00	24.56	Compliant
0.475	39.43	QP	9.000	L1	16.07	56.43	17.00	Compliant
0.475	37.79	AV	9.000	L1	16.07	46.43	8.64	Compliant
0.955	29.98	QP	9.000	L1	15.89	56.00	26.02	Compliant
0.955	27.21	AV	9.000	L1	15.89	46.00	18.79	Compliant
2.900	27.39	QP	9.000	L1	15.85	56.00	28.61	Compliant
2.900	22.39	AV	9.000	L1	15.85	46.00	23.61	Compliant
14.250	24.45	QP	9.000	L1	16.19	60.00	35.55	Compliant
14.250	17.95	AV	9.000	L1	16.19	50.00	32.05	Compliant
26.100	30.75	QP	9.000	L1	16.49	60.00	29.25	Compliant
26.050	21.07	AV	9.000	L1	16.49	50.00	28.93	Compliant

AC 120V/60 Hz, Neutral

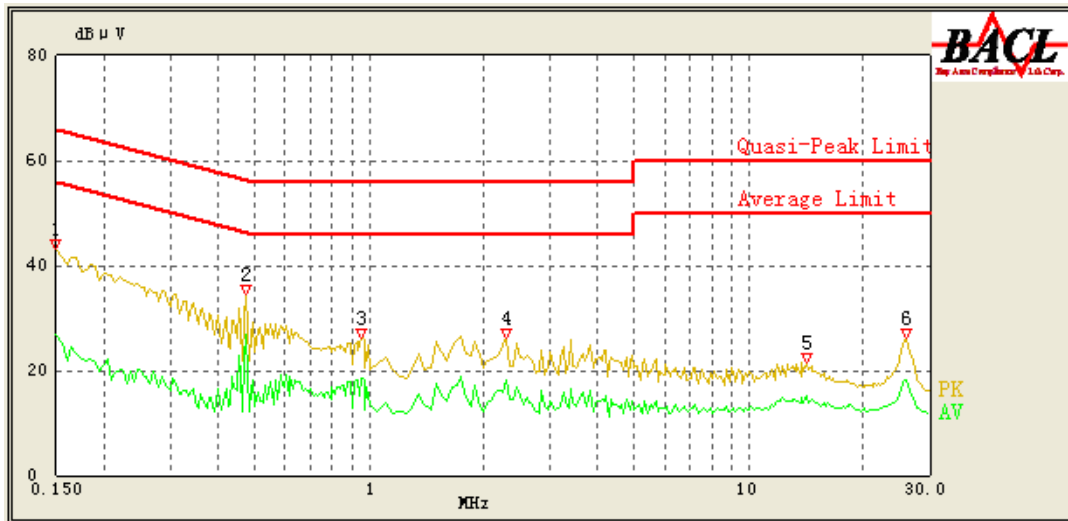

Frequency (MHz)	Corrected Amplitude (dBμV)	Detector (PK/AV/QP)	Bandwidth (kHz)	Line	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Comment
0.150	43.14	QP	9.000	N	16.06	66.00	22.86	Compliant
0.150	26.75	AV	9.000	N	16.06	56.00	29.25	Compliant
0.475	34.63	QP	9.000	N	16.07	56.43	21.80	Compliant
0.475	26.80	AV	9.000	N	16.07	46.43	19.63	Compliant
0.950	26.08	QP	9.000	N	15.89	56.00	29.92	Compliant
0.950	18.36	AV	9.000	N	15.89	46.00	27.64	Compliant
2.300	26.02	QP	9.000	N	15.85	56.00	29.98	Compliant
2.300	18.12	AV	9.000	N	15.85	46.00	27.88	Compliant
14.200	21.53	QP	9.000	N	16.19	60.00	38.47	Compliant
14.200	15.16	AV	9.000	N	16.19	50.00	34.84	Compliant
26.050	26.25	QP	9.000	N	16.49	60.00	33.75	Compliant
25.950	18.03	AV	9.000	N	16.48	50.00	31.97	Compliant

Note:

1) Corrected Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

2) Margin (dB) = Limit (dBμV) – Corrected Amplitude (dBμV)


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

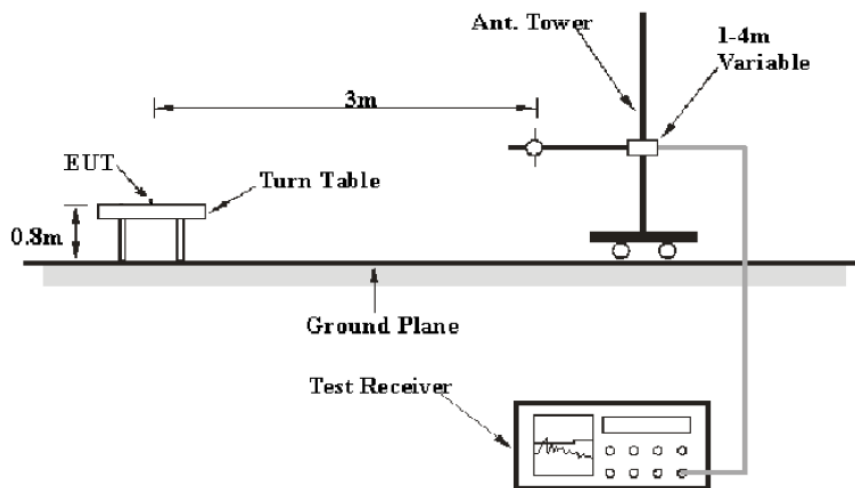

Above 1GHz:

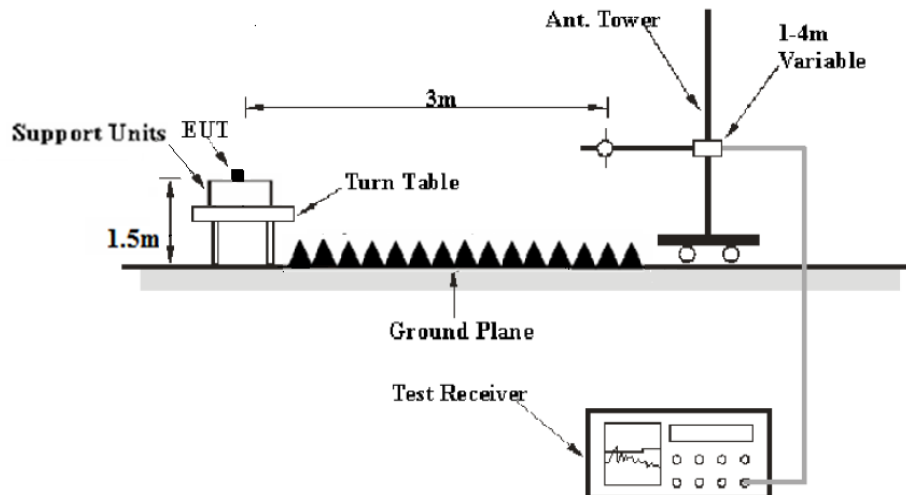

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave.

Test Procedure

According to ANSI C63.10-2013 clause 6.5, 6.6 and 6.7.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection mode for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V /m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V /m)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data

Environmental Conditions

Temperature:	24.5~26.0 °C
Relative Humidity:	50.5~52.0 %
ATM Pressure:	101.2~101.5kPa

The testing was performed by Hope Zhang from 2019-05-09 to 2019-05-14.


Test Result: Compliant.

EUT operation mode: Transmitting

Spurious Emission Test:

30MHz-1GHz:

Pre-scan with 802.11b, 802.11g, 802.11n-HT20 modes of operation in the X,Y and Z axes of orientation, the worst case low channel of 802.11n-HT20 mode in X-axis of orientation was recorded

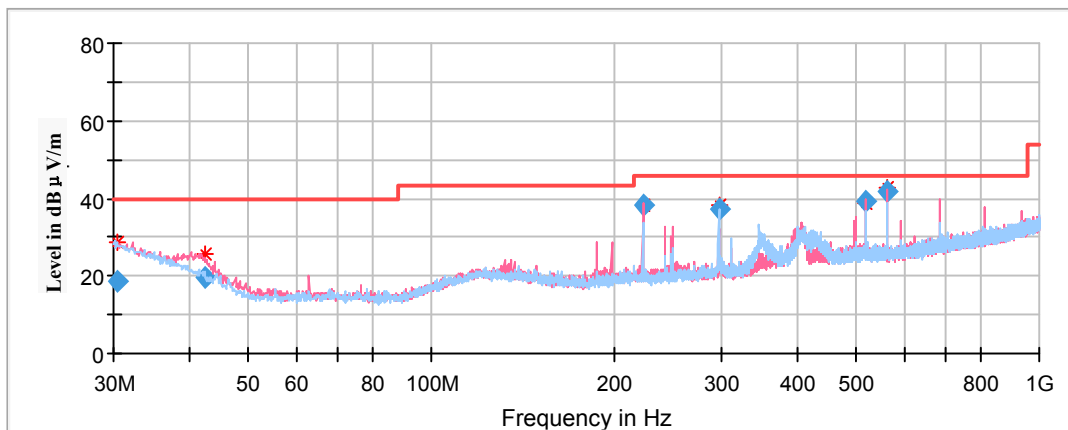

Frequency (MHz)	Corrected Amplitude QuasiPeak (dBμV/m)	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
		Height (cm)	Polar (H/V)				
30.373253	18.55	198.0	H	289.0	-4.2	40.00	21.45
42.367750	19.70	101.0	V	139.0	-12.3	40.00	20.30
222.755700	38.09	101.0	V	347.0	-12.2	46.00	7.91
296.998500	37.30	101.0	H	77.0	-10.6	46.00	8.70
519.749450	39.04	101.0	V	247.0	-6.0	46.00	6.96
562.491300	41.78	101.0	V	62.0	-5.5	46.00	4.22

1GHz-18GHz:

802.11b Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBµV /m) = Corrected Factor (dB/m) + Reading (dBµV)
 Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV /m)

Low Channel: 2412MHz


Full Spectrum

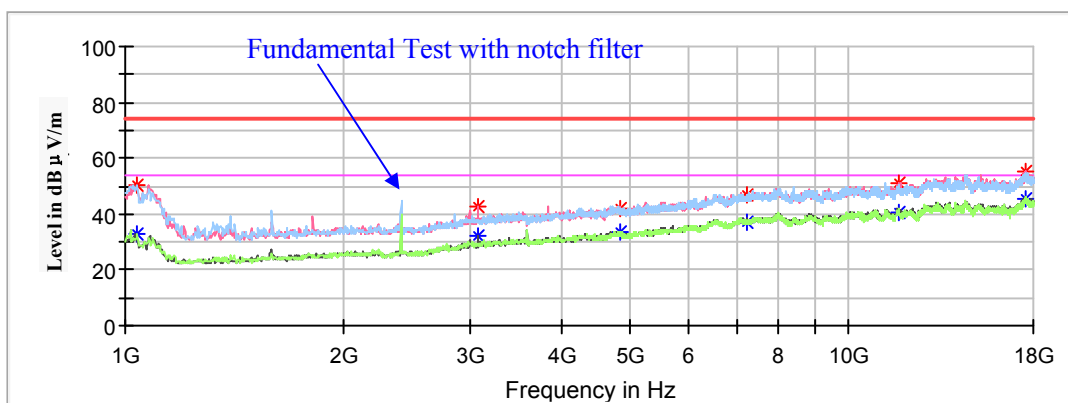

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1040.800000	---	32.97	150.0	H	0.0	-12.4	54.00	21.03
1040.800000	50.60	---	150.0	H	0.0	-12.4	74.00	23.40
3070.600000	---	32.38	200.0	V	287.0	-4.3	54.00	21.62
3070.600000	42.33	---	200.0	V	287.0	-4.3	74.00	31.67
4824.000000	---	33.75	100.0	H	288.0	-0.5	54.00	20.25
4824.000000	42.15	---	100.0	H	288.0	-0.5	74.00	31.85
7236.000000	---	37.15	200.0	V	239.0	5.7	54.00	16.85
7236.000000	47.05	---	200.0	V	239.0	5.7	74.00	26.95
11757.600000	---	40.56	150.0	V	310.0	9.9	54.00	13.44
11757.600000	51.20	---	150.0	V	310.0	9.9	74.00	22.80
17585.200000	---	45.59	100.0	V	180.0	14.1	54.00	8.41
17585.200000	55.27	---	100.0	V	180.0	14.1	74.00	18.73

Middle Channel: 2437MHz


Full Spectrum

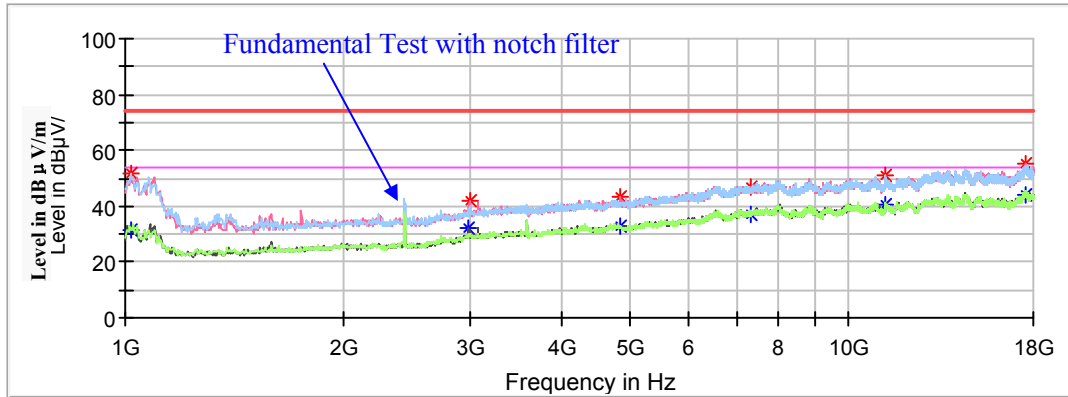

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1017.000000	---	31.58	150.0	H	353.0	-12.6	54.00	22.42
1017.000000	52.04	---	150.0	H	353.0	-12.6	74.00	21.96
2985.600000	---	31.96	200.0	V	238.0	-4.5	54.00	22.04
2989.000000	41.91	---	200.0	V	238.0	-4.5	74.00	32.09
4828.400000	---	32.66	100.0	V	289.0	-0.5	54.00	21.34
4828.400000	43.18	---	100.0	V	289.0	-0.5	74.00	30.82
7327.400000	---	37.36	200.0	H	111.0	5.9	54.00	16.64
7327.400000	46.63	---	200.0	H	111.0	5.9	74.00	27.37
11203.400000	---	40.48	100.0	H	127.0	9.8	54.00	13.52
11203.400000	51.03	---	100.0	H	127.0	9.8	74.00	22.97
17564.800000	---	44.15	150.0	V	293.0	14.2	54.00	9.85
17564.800000	55.07	---	150.0	V	293.0	14.2	74.00	18.93

High Channel: 2462MHz

Full Spectrum

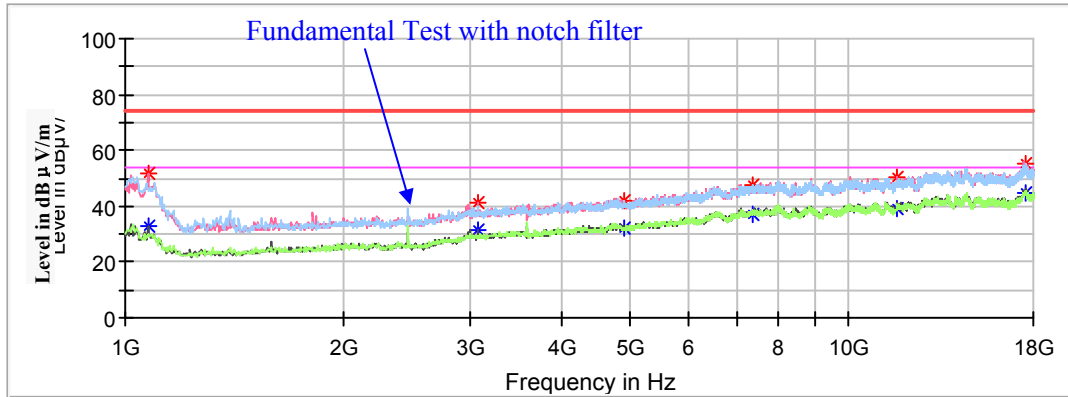

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1074.800000	---	32.86	150.0	V	150.0	-12.2	54.00	21.14
1074.800000	51.48	---	150.0	V	150.0	-12.2	74.00	22.52
3070.600000	---	31.27	150.0	V	358.0	-4.3	54.00	22.73
3070.600000	41.42	---	150.0	V	358.0	-4.3	74.00	32.58
4903.200000	---	31.90	150.0	H	0.0	-0.4	54.00	22.10
4903.200000	41.87	---	150.0	H	0.0	-0.4	74.00	32.13
7378.400000	---	36.81	100.0	H	183.0	5.9	54.00	17.19
7378.400000	47.31	---	100.0	H	183.0	5.9	74.00	26.69
11682.800000	---	39.48	150.0	V	150.0	9.9	54.00	14.52
11682.800000	50.38	---	150.0	V	150.0	9.9	74.00	23.62
17544.400000	---	44.57	150.0	H	13.0	14.2	54.00	9.43
17544.400000	55.24	---	150.0	H	13.0	14.2	74.00	18.76


802.11g Mode:

(Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBµV /m) = Corrected Factor (dB/m) + Reading (dBµV)
 Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV /m)


Low Channel: 2412MHz

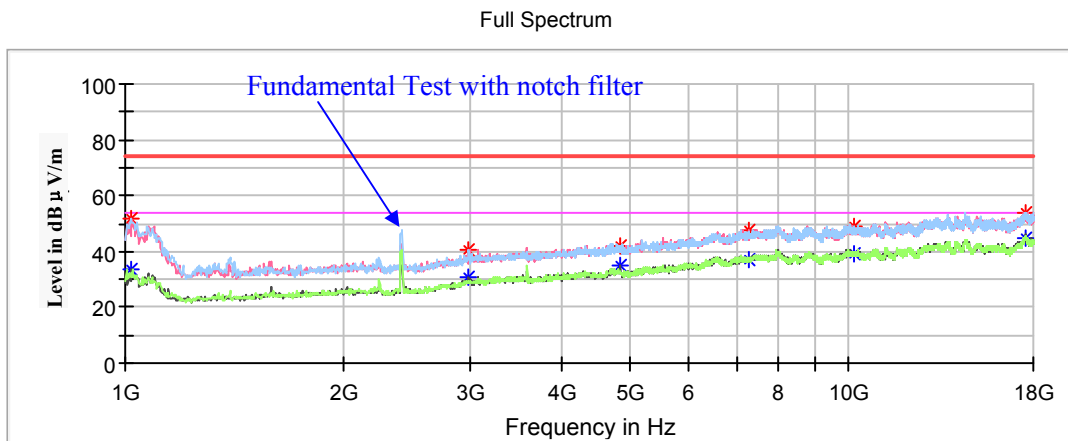

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1020.400000	---	33.46	150.0	V	151.0	-12.5	54.00	20.54
1020.400000	52.06	---	150.0	V	151.0	-12.5	74.00	21.94
2985.600000	---	30.51	100.0	V	197.0	-4.5	54.00	23.49
2985.600000	40.80	---	100.0	V	197.0	-4.5	74.00	33.20
4824.000000	---	34.84	150.0	V	0.0	-0.5	54.00	19.16
4824.000000	42.10	---	150.0	V	0.0	-0.5	74.00	31.90
7286.600000	---	36.86	150.0	V	249.0	5.8	54.00	17.14
7286.600000	47.23	---	150.0	V	249.0	5.8	74.00	26.77
10193.600000	---	38.92	100.0	H	248.0	8.5	54.00	15.08
10193.600000	49.00	---	100.0	H	248.0	8.5	74.00	25.00
17598.800000	---	44.62	150.0	H	178.0	14.1	54.00	9.38
17598.800000	53.98	---	150.0	H	178.0	14.1	74.00	20.02

Middle Channel: 2437MHz


Full Spectrum

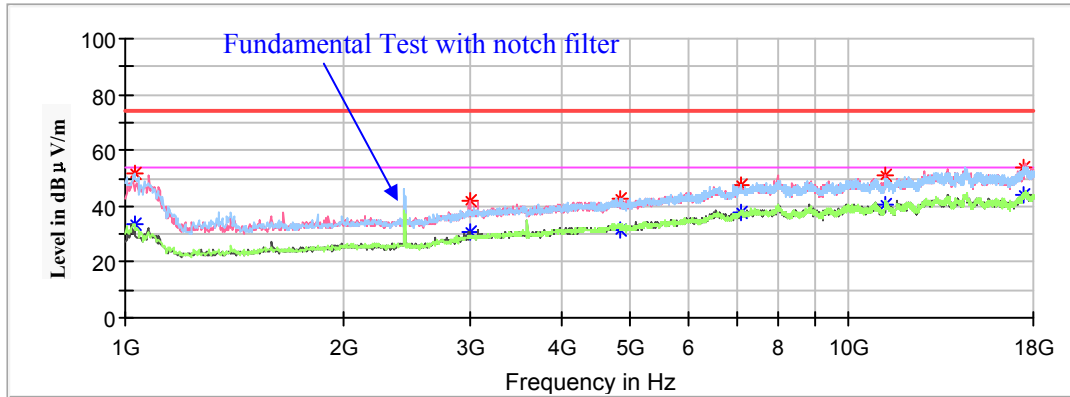

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1030.600000	---	33.41	150.0	H	2.0	-12.5	54.00	20.59
1030.600000	51.60	---	150.0	H	2.0	-12.5	74.00	22.40
2989.000000	---	31.09	150.0	V	179.0	-4.4	54.00	22.91
2989.000000	41.76	---	150.0	V	179.0	-4.4	74.00	32.24
4835.200000	---	31.66	100.0	V	197.0	-0.5	54.00	22.34
4835.200000	42.69	---	100.0	V	197.0	-0.5	74.00	31.31
7089.400000	---	37.55	100.0	H	6.0	5.5	54.00	16.45
7089.400000	47.72	---	100.0	H	6.0	5.5	74.00	26.28
11213.600000	---	40.38	100.0	V	31.0	9.8	54.00	13.62
11213.600000	50.75	---	100.0	V	31.0	9.8	74.00	23.25
17439.000000	---	43.75	150.0	H	319.0	14.0	54.00	10.25
17439.000000	54.11	---	150.0	H	319.0	14.0	74.00	19.89

High Channel: 2462MHz

Full Spectrum

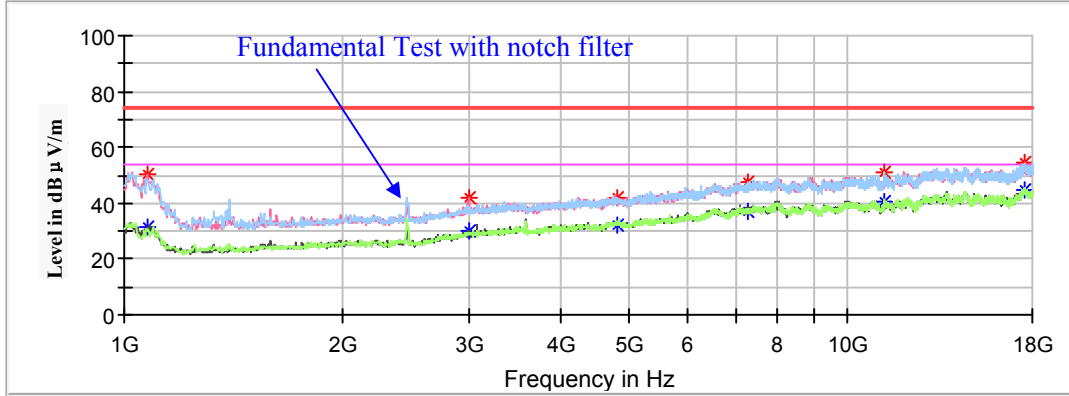

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1074.800000	---	31.40	150.0	V	157.0	-12.2	54.00	22.60
1074.800000	50.66	---	150.0	V	157.0	-12.2	74.00	23.34
2995.800000	---	30.35	100.0	V	214.0	-4.4	54.00	23.65
2995.800000	41.85	---	100.0	V	214.0	-4.4	74.00	32.15
4804.600000	---	32.43	100.0	H	9.0	-0.6	54.00	21.57
4804.600000	41.87	---	100.0	H	9.0	-0.6	74.00	32.13
7300.200000	---	37.14	100.0	H	18.0	5.8	54.00	16.86
7300.200000	47.88	---	100.0	H	18.0	5.8	74.00	26.12
11206.800000	---	40.86	150.0	H	192.0	9.8	54.00	13.14
11206.800000	51.14	---	150.0	H	192.0	9.8	74.00	22.86
17520.600000	---	44.69	150.0	V	19.0	14.2	54.00	9.31
17520.600000	54.41	---	150.0	V	19.0	14.2	74.00	19.59

802.11n-HT20 Mode:


(Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBµV /m) = Corrected Factor (dB/m) + Reading (dBµV)
 Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV /m)

Low Channel: 2412MHz


Full Spectrum

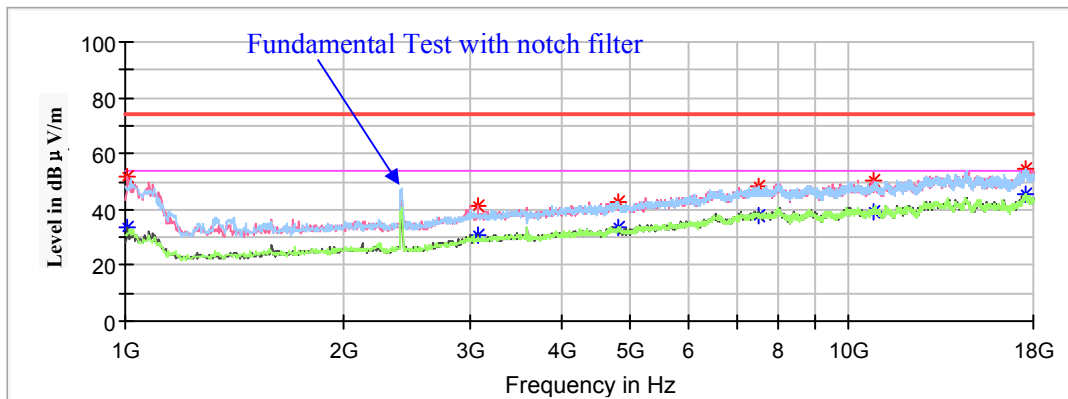

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1006.800000	---	33.61	150.0	V	149.0	-12.6	54.00	20.39
1006.800000	51.64	---	150.0	V	149.0	-12.6	74.00	22.36
3070.600000	---	31.09	150.0	V	291.0	-4.3	54.00	22.91
3070.600000	41.17	---	150.0	V	291.0	-4.3	74.00	32.83
4811.400000	---	33.25	150.0	H	30.0	-0.5	54.00	20.75
4811.400000	42.42	---	150.0	H	30.0	-0.5	74.00	31.58
7511.000000	---	37.78	100.0	H	178.0	6.2	54.00	16.22
7511.000000	48.43	---	100.0	H	178.0	6.2	74.00	25.57
10826.000000	---	39.37	150.0	V	167.0	9.5	54.00	14.63
10826.000000	50.50	---	150.0	V	167.0	9.5	74.00	23.50
17530.800000	---	45.67	100.0	H	0.0	14.2	54.00	8.33
17530.800000	54.81	---	100.0	H	0.0	14.2	74.00	19.19

Middle Channel: 2437MHz


Full Spectrum

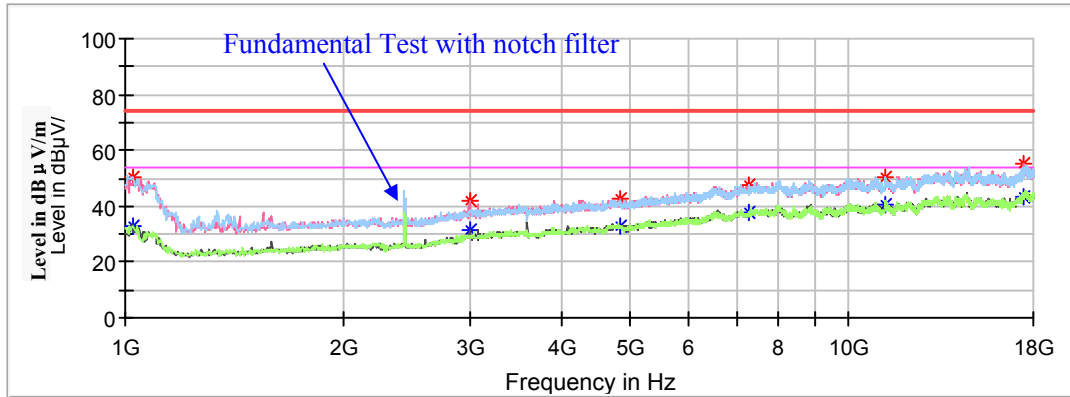

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
1023.800000	---	32.73	150.0	H	0.0	-12.5	54.00	21.27
1023.800000	50.60	---	150.0	H	0.0	-12.5	74.00	23.40
2989.000000	---	31.55	150.0	V	234.0	-4.4	54.00	22.45
2989.000000	41.63	---	150.0	V	234.0	-4.4	74.00	32.37
4825.000000	---	32.61	100.0	V	253.0	-0.5	54.00	21.39
4825.000000	42.32	---	100.0	V	253.0	-0.5	74.00	31.68
7283.200000	---	37.49	150.0	H	190.0	5.8	54.00	16.51
7283.200000	47.27	---	150.0	H	190.0	5.8	74.00	26.73
11261.200000	---	40.88	100.0	H	206.0	9.8	54.00	13.12
11261.200000	50.65	---	100.0	H	206.0	9.8	74.00	23.35
17452.600000	---	43.22	150.0	V	63.0	14.0	54.00	10.78
17452.600000	55.02	---	150.0	V	63.0	14.0	74.00	18.98

High Channel: 2462MHz

Full Spectrum

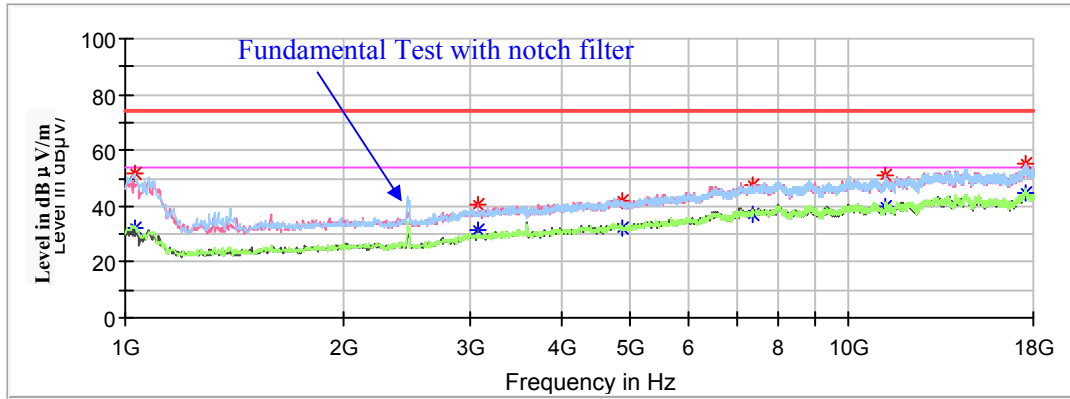


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV /m)	Average (dBμV /m)	Height (cm)	Polar (H/V)				
1030.600000	---	32.39	150.0	H	0.0	-12.5	54.00	21.61
1030.600000	51.69	---	150.0	H	0.0	-12.5	74.00	22.31
3070.600000	---	31.72	150.0	V	17.0	-4.3	54.00	22.28
3070.600000	40.32	---	150.0	V	17.0	-4.3	74.00	33.68
4862.400000	---	32.47	100.0	H	0.0	-0.5	54.00	21.53
4862.400000	41.92	---	100.0	H	0.0	-0.5	74.00	32.08
7386.000000	---	37.34	150.0	V	261.0	6.0	54.00	16.66
7386.000000	47.81	---	150.0	V	261.0	6.0	74.00	26.19
11240.800000	---	39.78	100.0	H	347.0	9.8	54.00	14.22
11240.800000	50.74	---	100.0	H	347.0	9.8	74.00	23.26
17513.800000	---	44.75	100.0	H	165.0	14.3	54.00	9.25
17513.800000	54.93	---	100.0	H	165.0	14.3	74.00	19.07

18GHz-25GHz:


Pre-scan with 802.11b, 802.11g, 802.11n-HT20 modes of operation in the X,Y and Z axes of orientation, the worst case low channel of 802.11n-HT20 mode in X-axis of orientation was recorded

Horizontal

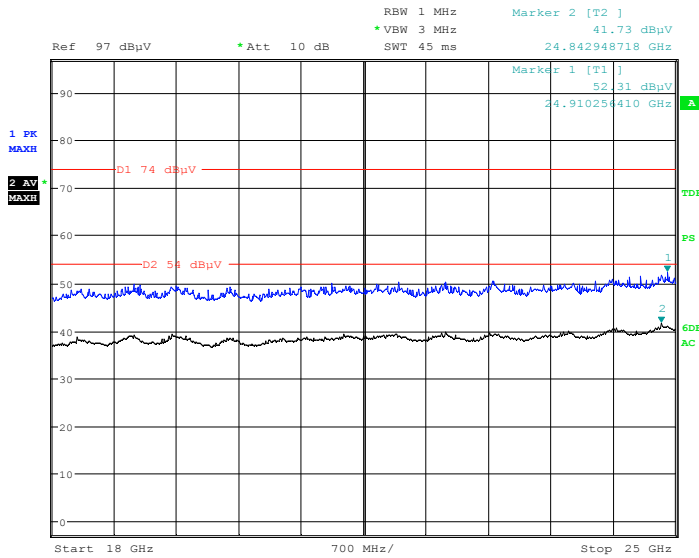

Date: 9.MAY.2019 02:30:14

Vertical

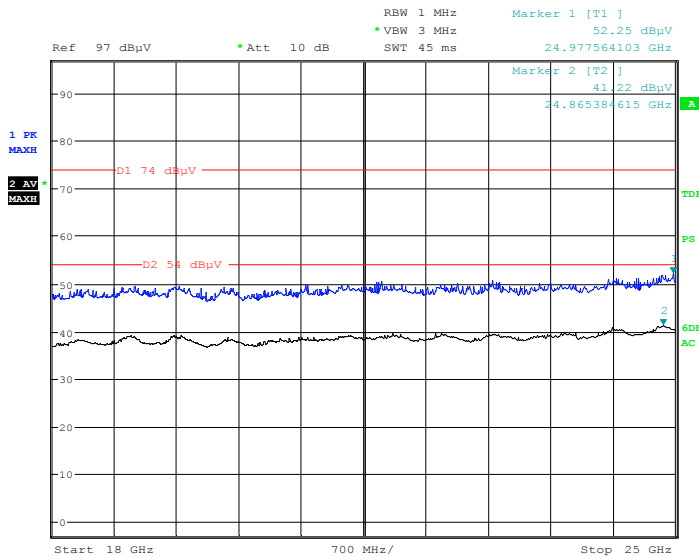

Date: 9.MAY.2019 02:51:32

Fundamental Test & Restricted Bands Emissions Test:

Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)

Corrected Amplitude (dBµV /m) = Corrected Factor (dB/m) + Reading (dBµV)

Margin (dB) = Limit (dBµV/m) – Corrected Amplitude (dBµV /m)

802.11b Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2412.000000	---	96.87	150	V	47	2.8	/	/
2412.000000	100.05	---	150	V	47	2.8	/	/
2412.000000	---	96.59	200	H	52	2.8	/	/
2412.000000	99.84	---	200	H	52	2.8	/	/
2390.000000	---	47.56	250	V	2	2.8	54	6.44
2390.000000	53.68	---	250	V	2	2.8	74	20.32
Middle Channel: 2437MHz								
2437.000000	99.87	---	250	V	72	2.9	/	/
2437.000000	---	96.51	250	V	72	2.9	/	/
2437.000000	99.78	---	150	H	63	2.9	/	/
2437.000000	---	96.27	150	H	63	2.9	/	/
High Channel: 2462MHz								
2462.000000	99.69	---	150	V	4	3	/	/
2462.000000	---	97.01	150	V	4	3	/	/
2462.000000	99.59	---	200	H	1	3	/	/
2462.000000	---	96.97	200	H	1	3	/	/
2483.500000	---	46.59	100	V	54	3	54	7.41
2483.500000	52.49	---	100	V	54	3	74	21.51

802.11g Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2412.000000	---	92.55	150	V	1	2.8	/	/
2412.000000	99.97	---	150	V	1	2.8	/	/
2412.000000	---	95.24	200	H	12	2.8	/	/
2412.000000	101.21	---	200	H	12	2.8	/	/
2390.000000	---	47.36	250	H	81	2.8	54.00	6.64
2390.000000	63.92	---	250	H	81	2.8	74.00	10.08
Middle Channel: 2437MHz								
2437.000000	99.85	---	250	V	77	2.9	/	/
2437.000000	---	92.36	250	V	77	2.9	/	/
2437.000000	99.69	---	150	H	33	2.9	/	/
2437.000000	---	92.47	150	H	33	2.9	/	/
High Channel: 2462MHz								
2462.000000	100.79	---	150	V	359	3	/	/
2462.000000	---	94.06	150	V	359	3	/	/
2462.000000	100.05	---	200	H	2	3	/	/
2462.000000	---	94.28	200	H	2	3	/	/
2483.500000	---	47.88	100	H	268	3	54.00	6.12
2483.500000	61.51	---	100	H	268	3	74.00	12.49

802.11n-HT20 Mode: (Pre-scan in the X, Y and Z axes of orientation, the worst case X-axis of orientation was recorded)


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	MaxPeak (dBµV /m)	Average (dBµV /m)	Height (cm)	Polar (H/V)				
Low Channel: 2412MHz								
2412.000000	---	91.85	150	V	78	2.8	/	/
2412.000000	99.47	---	150	V	78	2.8	/	/
2412.000000	---	92.06	200	H	2	2.8	/	/
2412.000000	99.54	---	200	H	2	2.8	/	/
2390.000000	---	48.88	250	H	260	2.8	54	5.12
2390.000000	63.2	---	250	H	260	2.8	74	10.8
Middle Channel: 2437MHz								
2437.000000	99.21	---	250	V	256	2.9	/	/
2437.000000	---	90.25	250	V	256	2.9	/	/
2437.000000	98.94	---	150	H	122	2.9	/	/
2437.000000	---	91.26	150	H	122	2.9	/	/
High Channel: 2462MHz								
2462.000000	99.72	---	150	V	198	3	/	/
2462.000000	---	92.8	150	V	198	3	/	/
2462.000000	98.95	---	200	H	0	3	/	/
2462.000000	---	91.56	200	H	0	3	/	/
2483.500000	---	48.15	100	H	120	3	54	5.85
2483.500000	61.43	---	100	H	120	3	74	12.57

Conducted Spurious Emissions at Antenna Port


802.11b Mode Low Channel

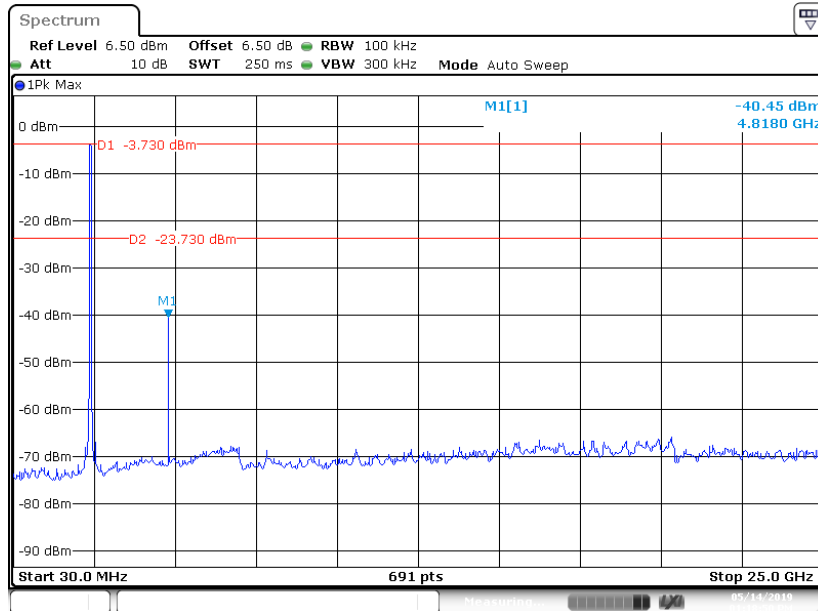

802.11b Mode Middle Channel

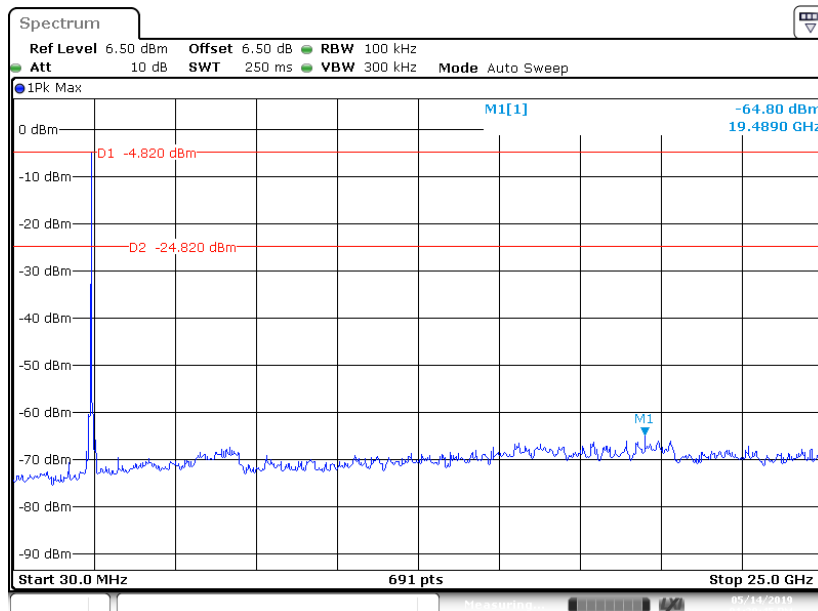


802.11b Mode High Channel

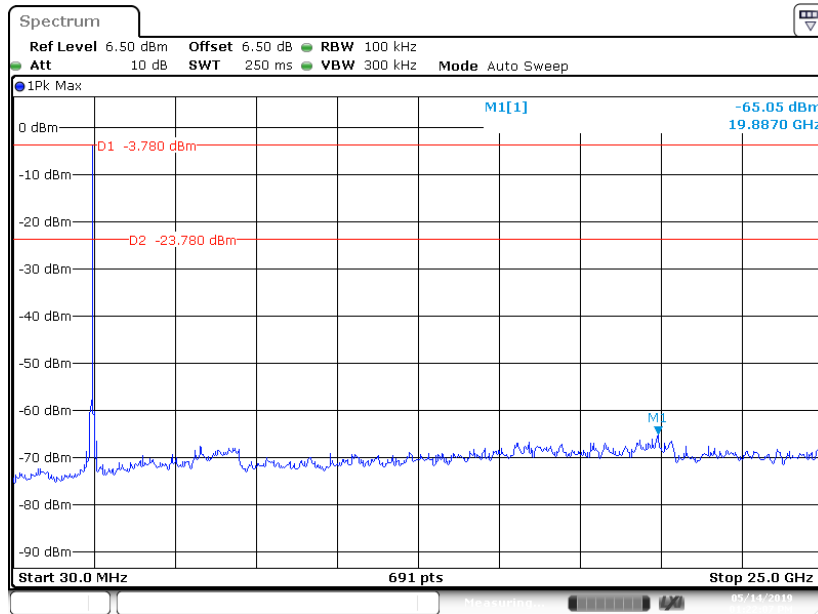


Date: 14 MAY 2019 13:22:07

802.11g Mode Low Channel

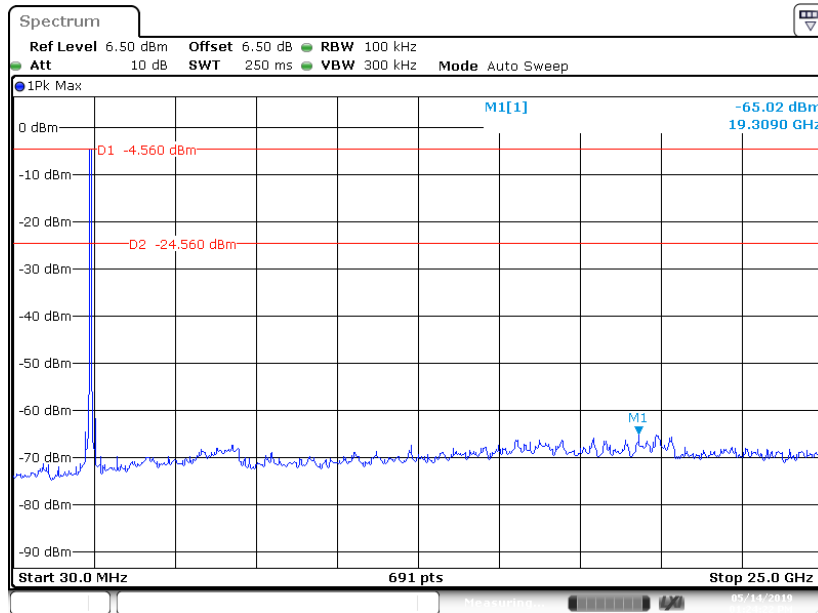


Date: 14 MAY 2019 13:24:22


802.11g Mode Middle Channel

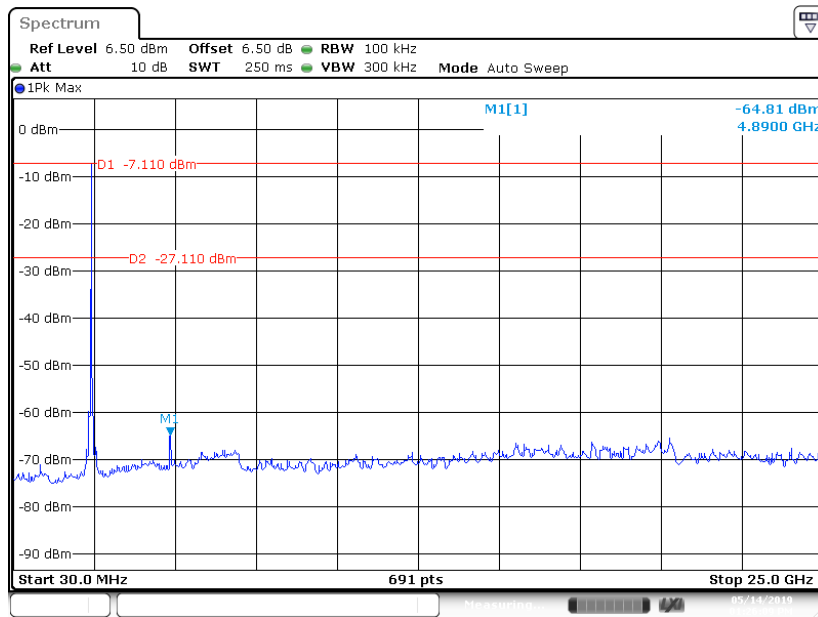


802.11g Mode High Channel

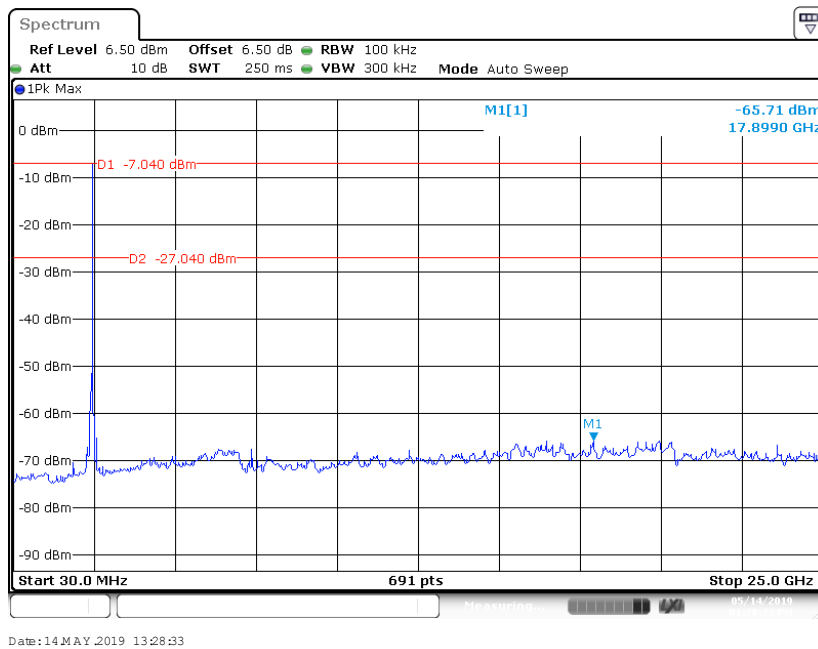


802.11n-HT20 Mode Low Channel

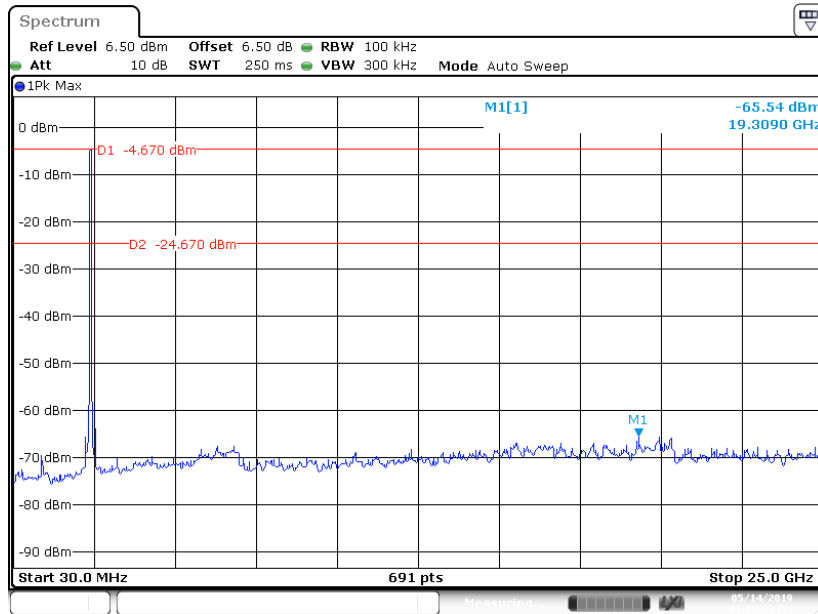

802.11n-HT20 Mode Middle Channel

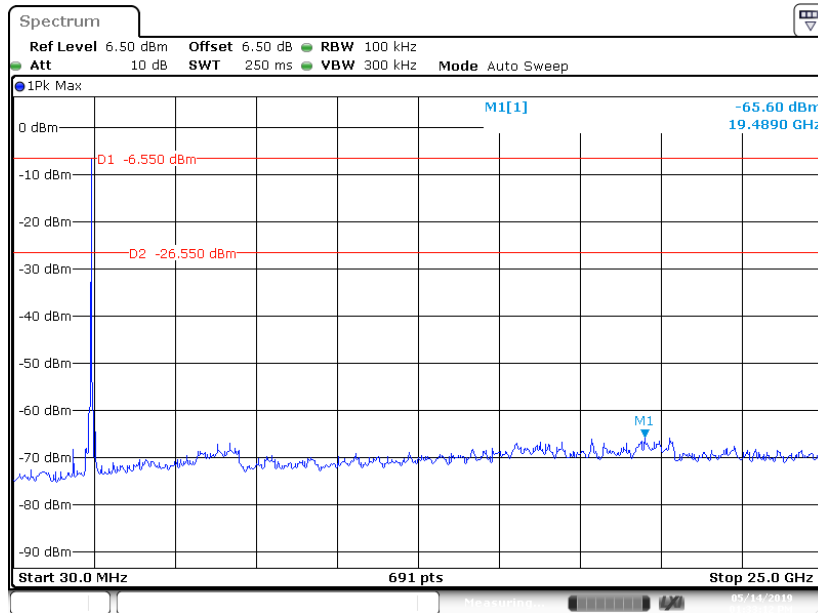

802.11n-HT20 Mode High Channel

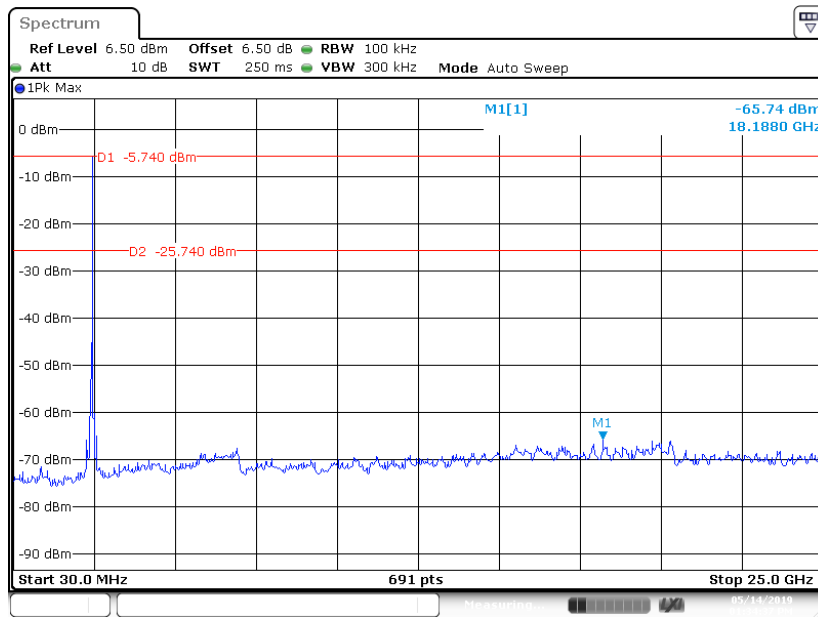

Date: 14 MAY 2019 13:34:37

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	51 %
ATM Pressure:	101.3 kPa


The testing was performed by Hope Zhang on 2019-05-14.

EUT operation mode: Transmitting


Test Result: Compliant.

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
802.11b Mode			
Low	2412	9.378	≥ 0.5
Middle	2437	9.508	≥ 0.5
High	2462	9.508	≥ 0.5
802.11g Mode			
Low	2412	16.541	≥ 0.5
Middle	2437	16.541	≥ 0.5
High	2462	16.541	≥ 0.5
802.11n-HT20 Mode			
Low	2412	17.757	≥ 0.5
Middle	2437	17.757	≥ 0.5
High	2462	17.757	≥ 0.5


802.11b Mode Low Channel

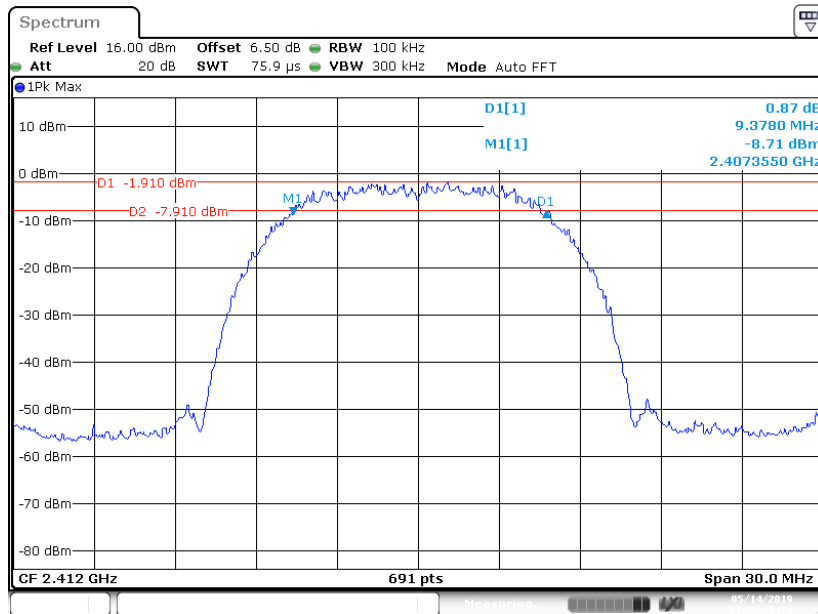


802.11b Mode Middle Channel

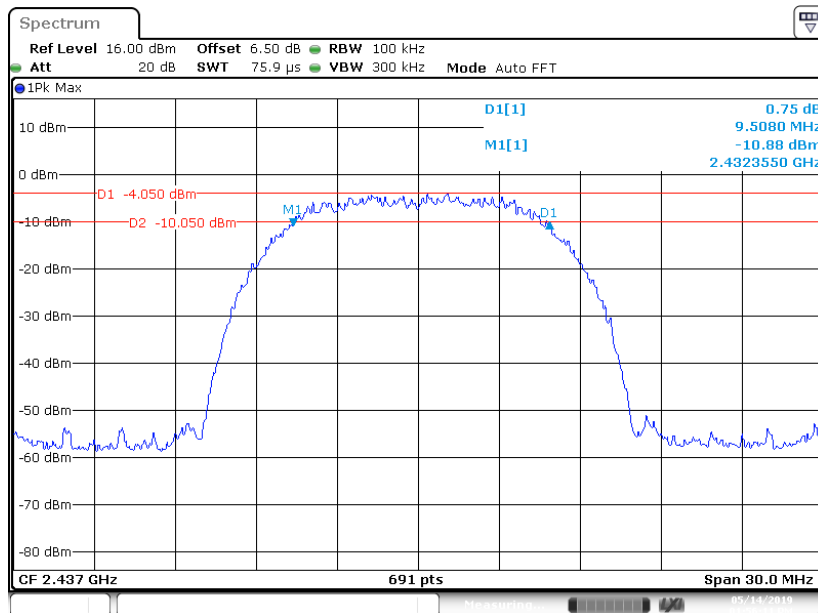


802.11b Mode High Channel

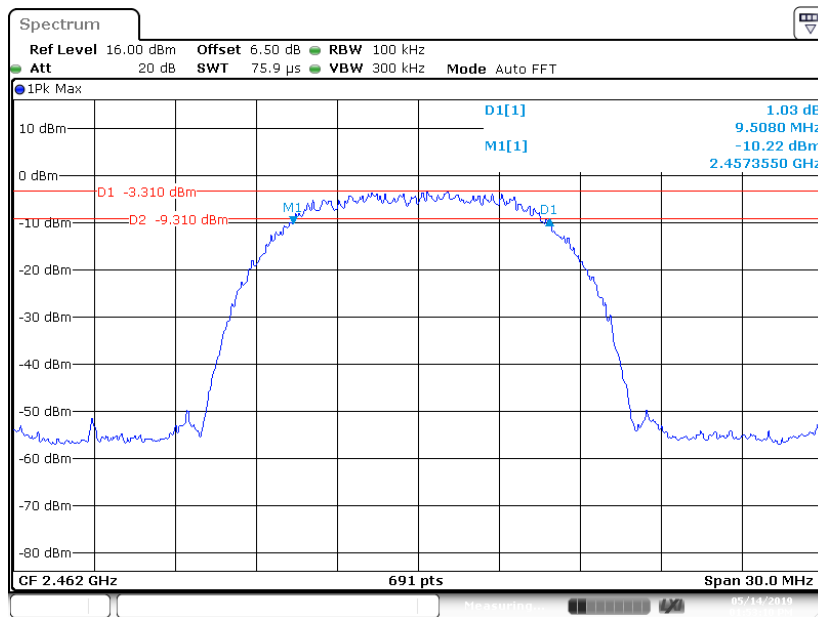


802.11g Mode Low Channel

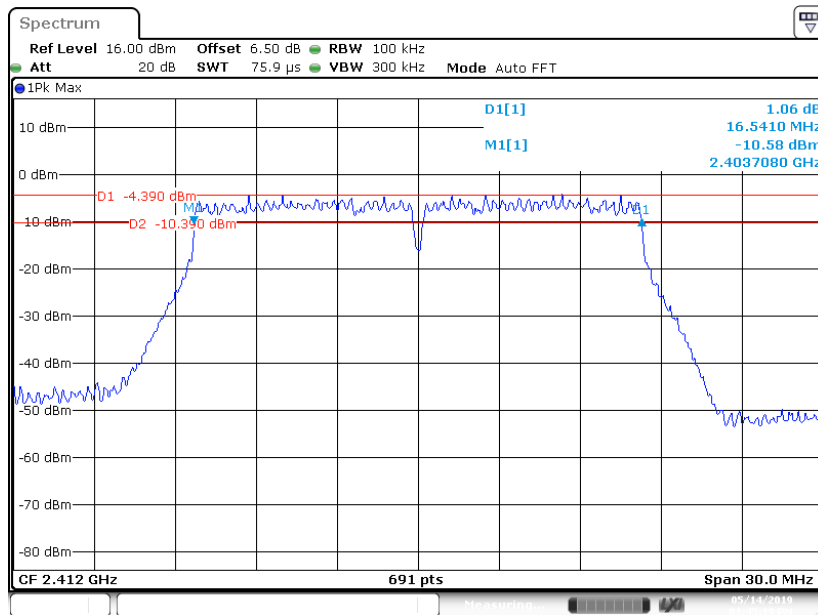


802.11g Mode Middle Channel

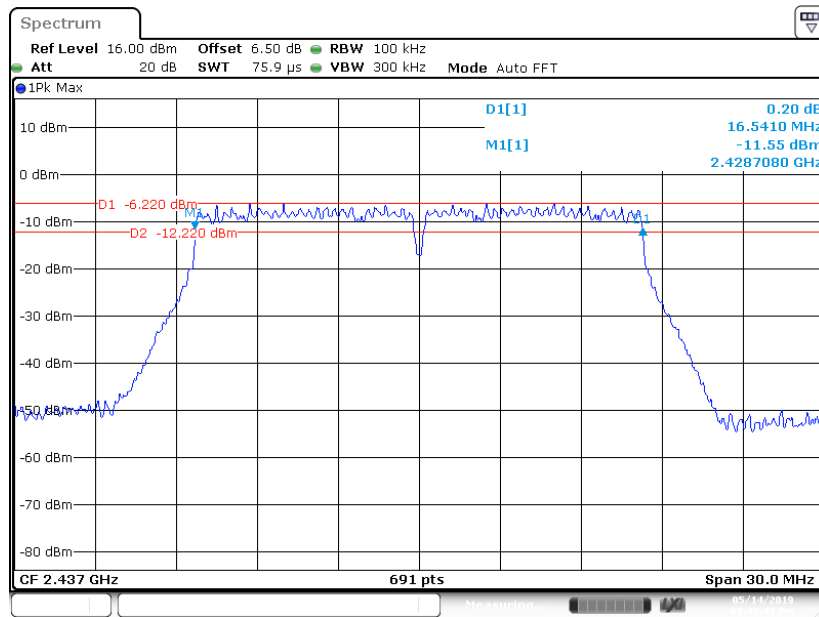


802.11g Mode High Channel

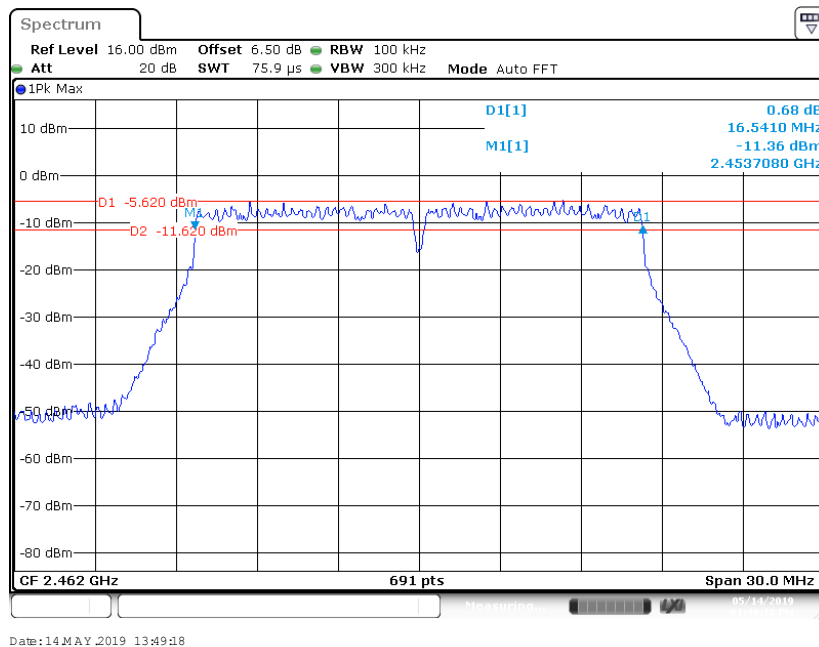


802.11n-HT20 Mode Low Channel

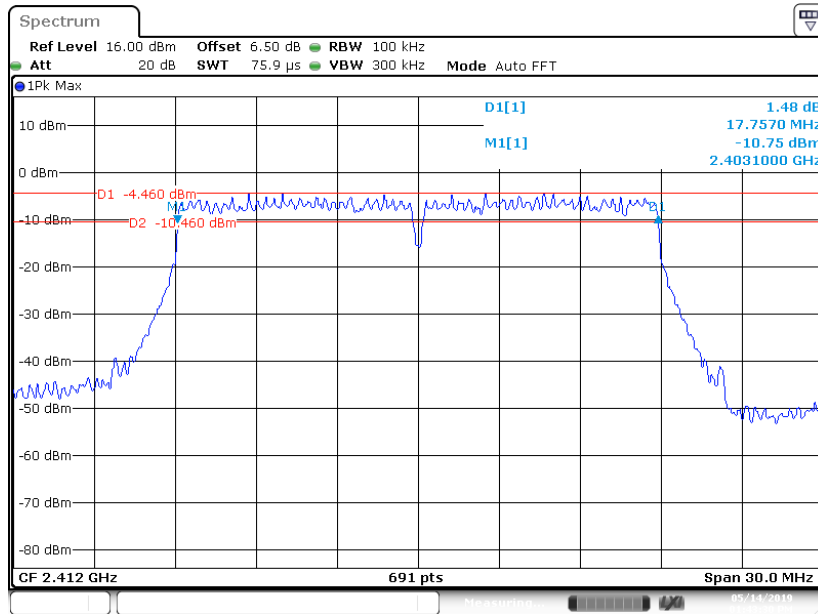

802.11n-HT20 Mode Middle Channel

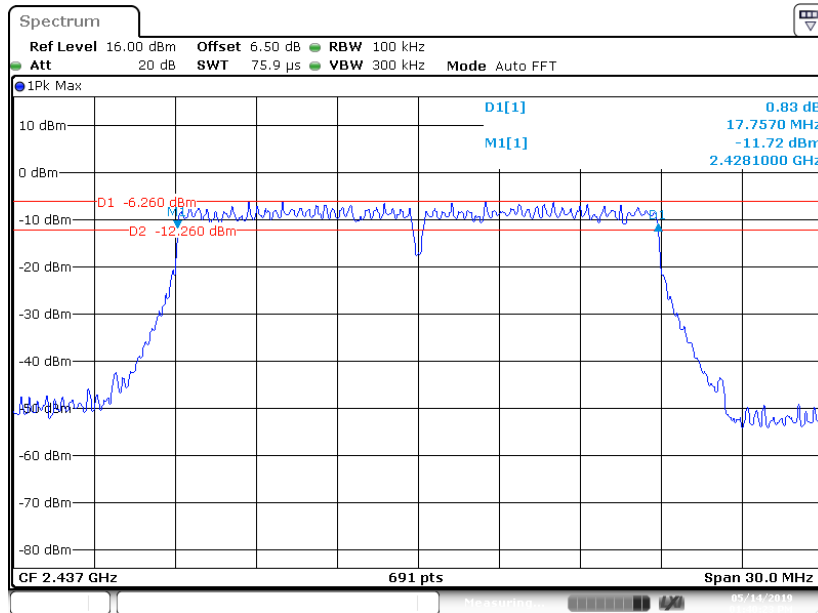

802.11n-HT20 Mode High Channel

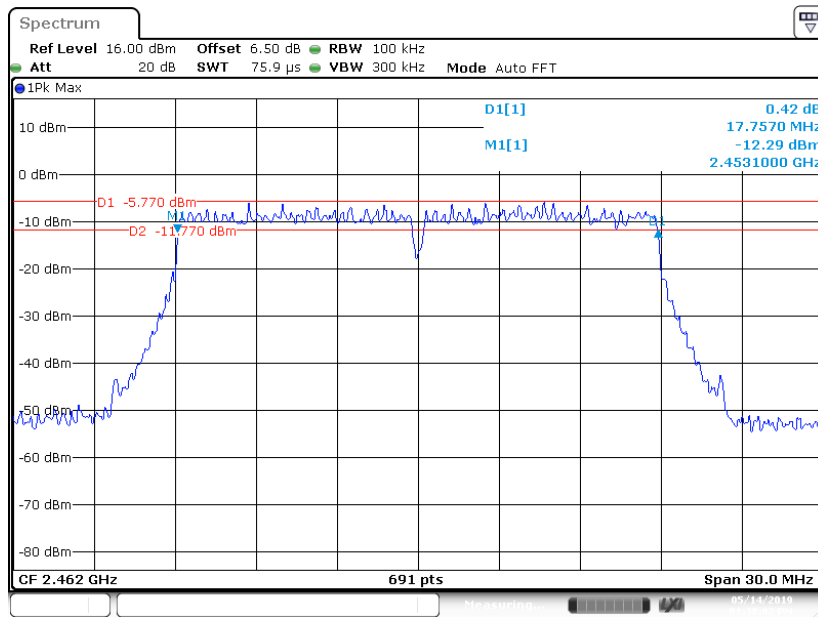

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER


Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, Compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.9.1.3

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.



Test Data

Environmental Conditions

Temperature:	23.8°C
Relative Humidity:	54 %
ATM Pressure:	101.2 kPa

The testing was performed by Hope Zhang on 2019-05-14.

Test Result: Compliant.

EUT operation mode: Transmitting

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
802.11b Mode				
Low	2412	13.27	30	Pass
Middle	2437	11.54	30	Pass
High	2462	12.14	30	Pass
802.11g Mode				
Low	2412	16.57	30	Pass
Middle	2437	14.76	30	Pass
High	2462	15.29	30	Pass
802.11n-HT20 Mode				
Low	2412	16.59	30	Pass
Middle	2437	14.72	30	Pass
High	2462	15.22	30	Pass

FCC §15.247(d) – BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013 sub-clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions


Temperature:	24.3 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa

The testing was performed by Hope Zhang on 2019-05-14.

EUT operation mode: Transmitting


Test Result: Compliant.

802.11b Mode Left Side

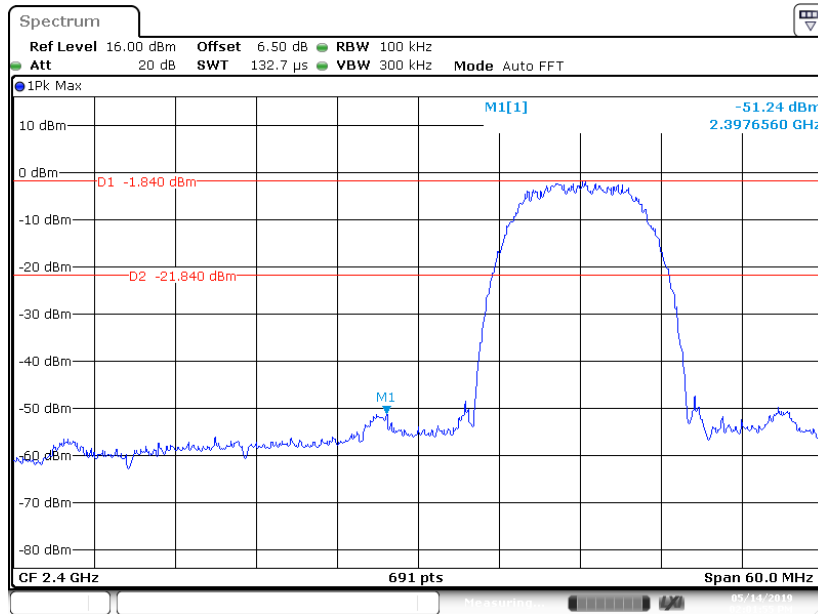


Date: 14 MAY 2019 14:01:55

802.11b Mode Right Side

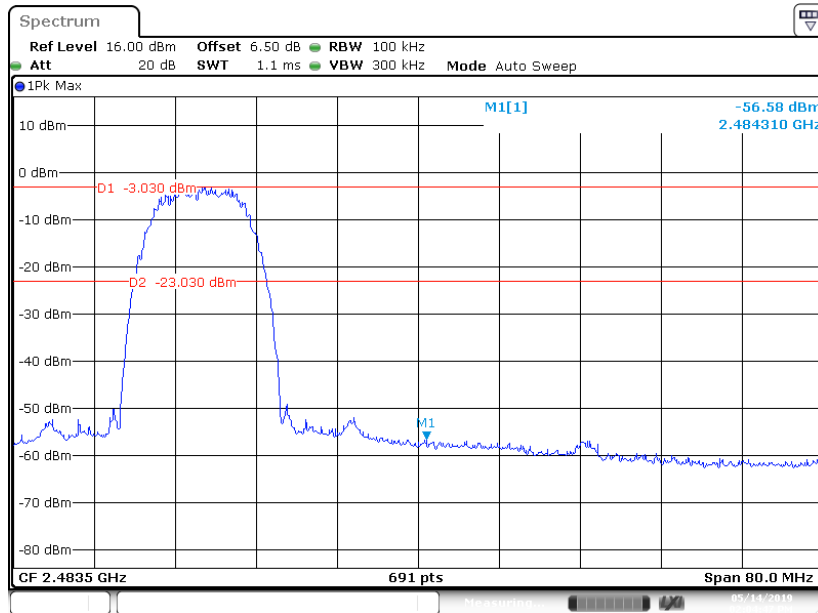


Date: 14 MAY 2019 14:04:48


802.11g Mode Left Side

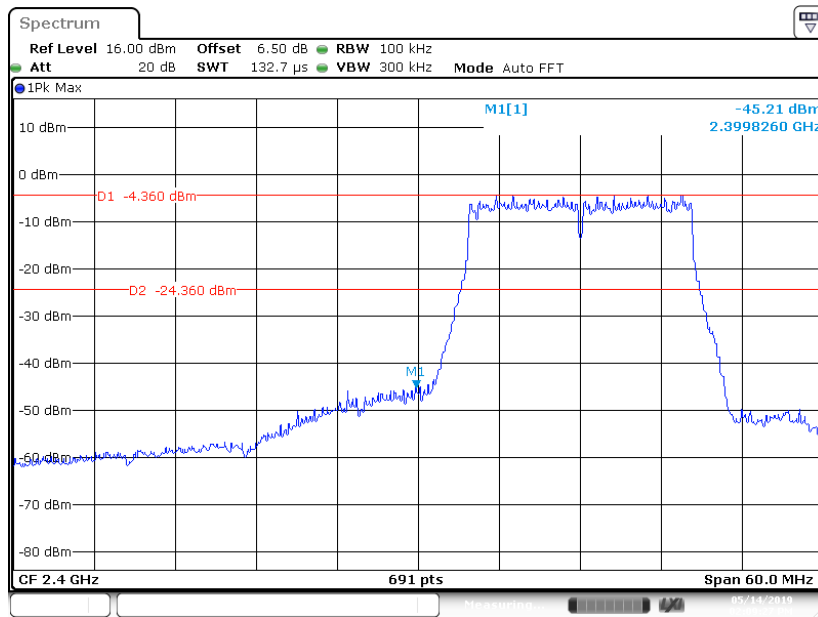


802.11g Mode Right Side

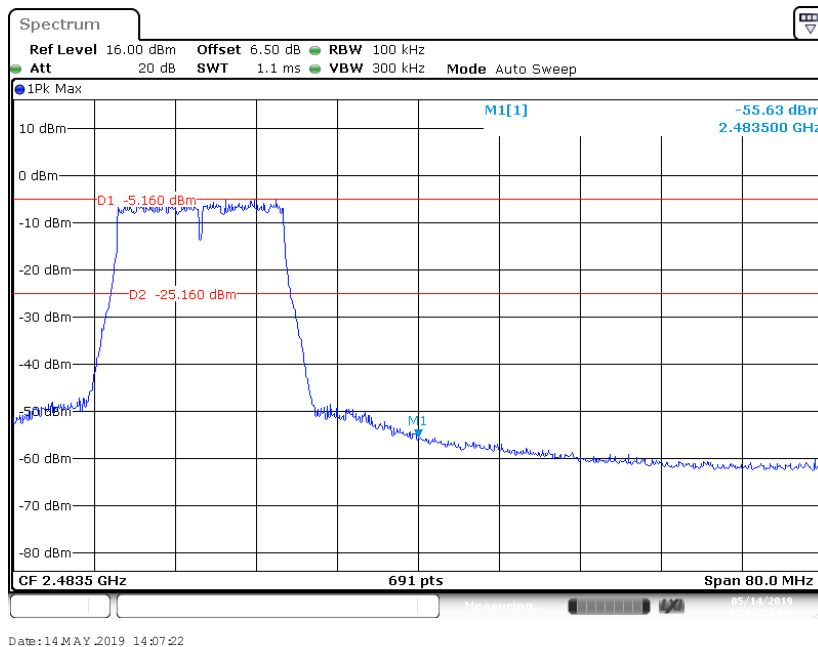

802.11n-HT20 Mode Left Side

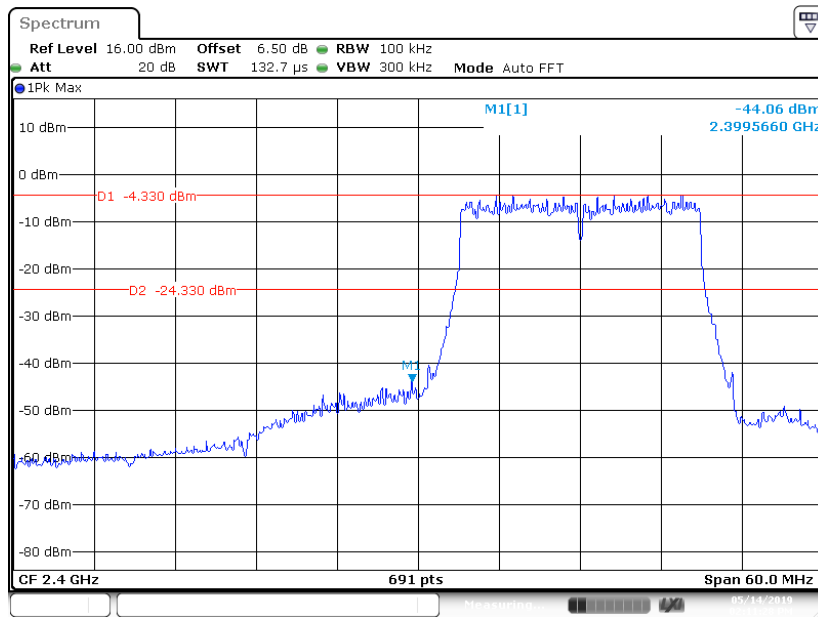

802.11n-HT20 Mode Right Side

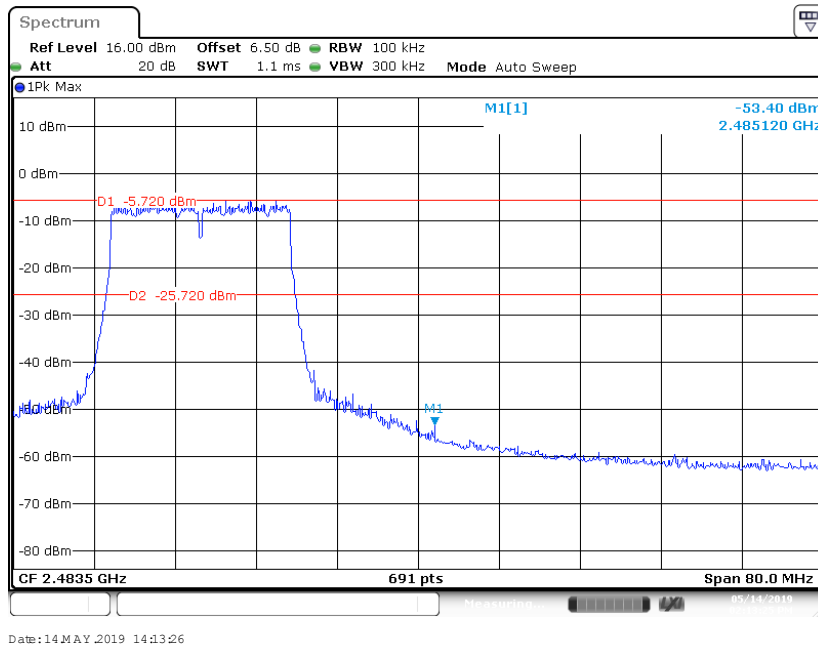

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

1. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
2. Set the VBW $\geq 3 \times \text{RBW}$.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Data

Environmental Conditions

Temperature:	24.1 °C
Relative Humidity:	50%
ATM Pressure:	101.3 kPa


The testing was performed by Hope Zhang on 2019-05-14.

EUT operation mode: Transmitting


Test Result: Compliant.

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b Mode			
Low	2412	-16.26	≤ 8
Middle	2437	-18.62	≤ 8
High	2462	-17.51	≤ 8
802.11g Mode			
Low	2412	-16.62	≤ 8
Middle	2437	-18.45	≤ 8
High	2462	-18.35	≤ 8
802.11n-HT20 mode			
Low	2412	-17.86	≤ 8
Middle	2437	-20.09	≤ 8
High	2462	-18.62	≤ 8


802.11b Mode Low Channel

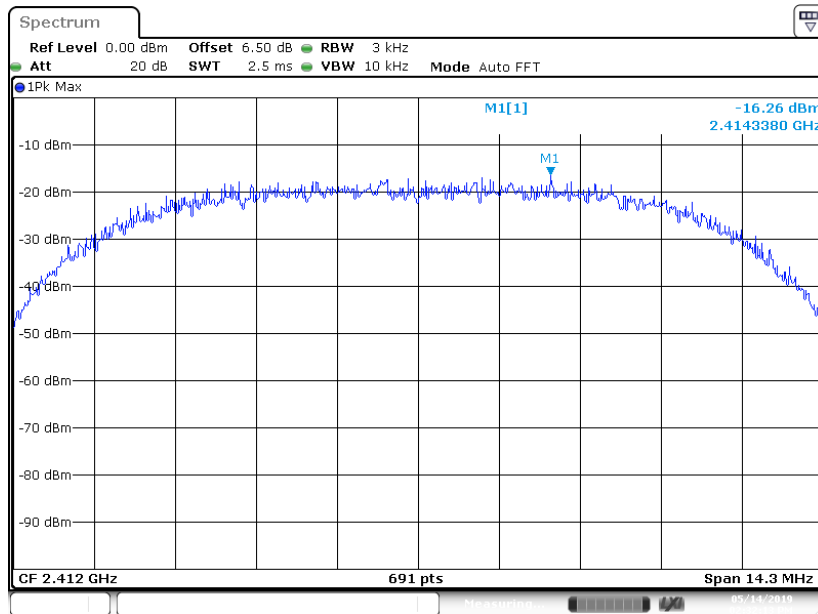


802.11b Mode Middle Channel

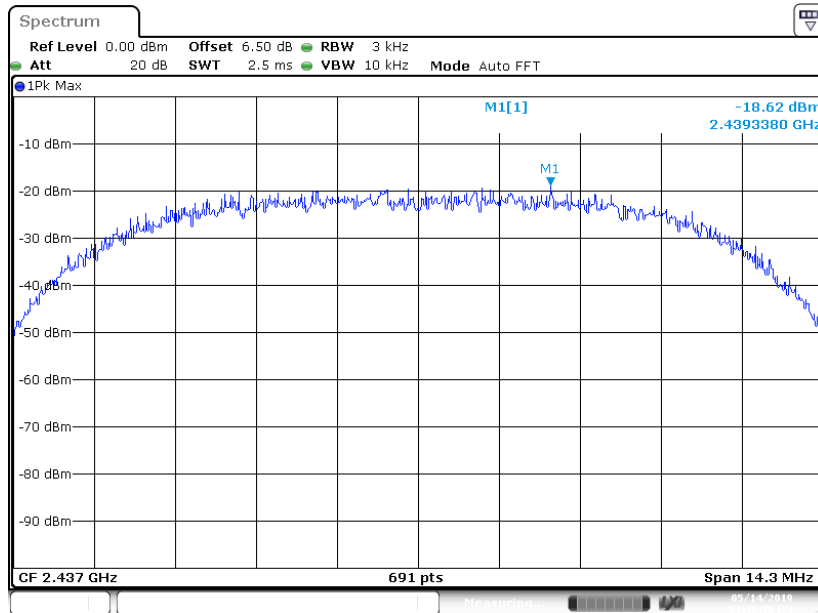


802.11b Mode High Channel

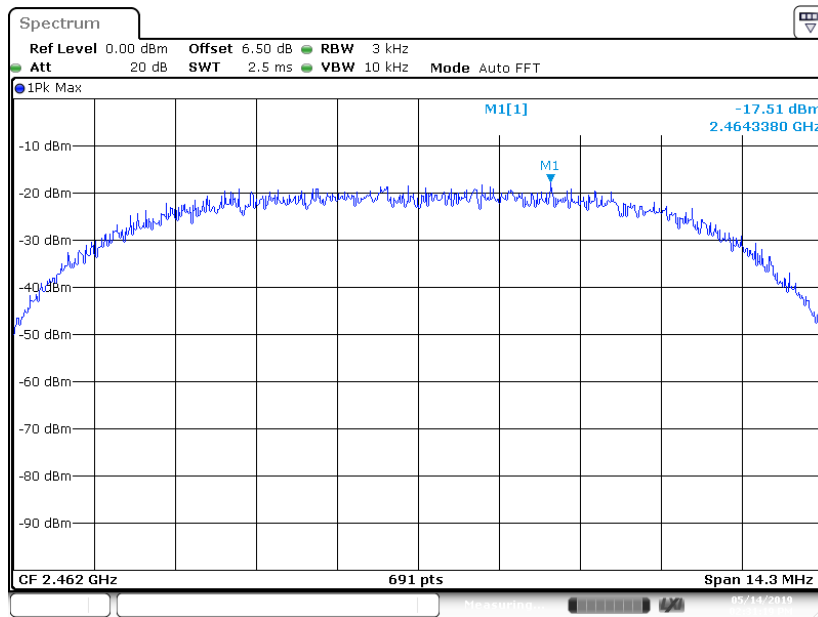


802.11g Mode Low Channel

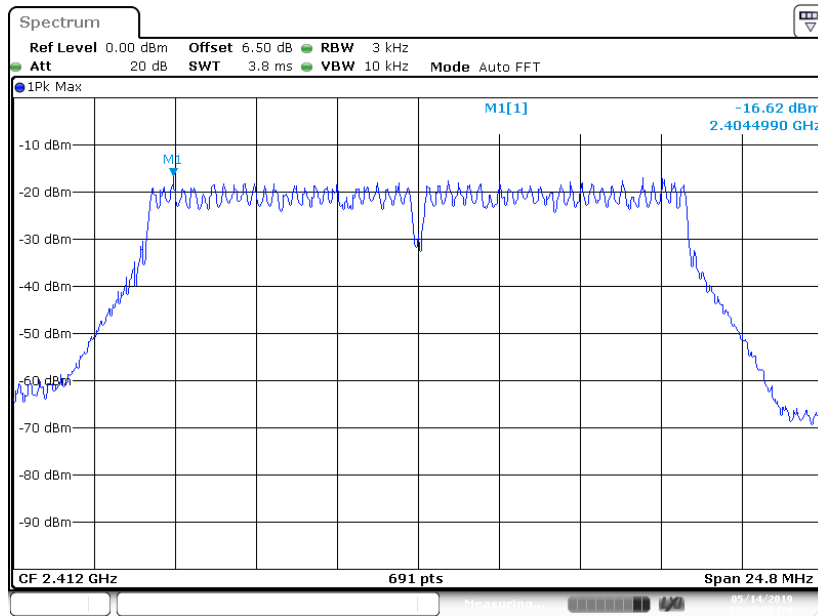


802.11g Mode Middle Channel

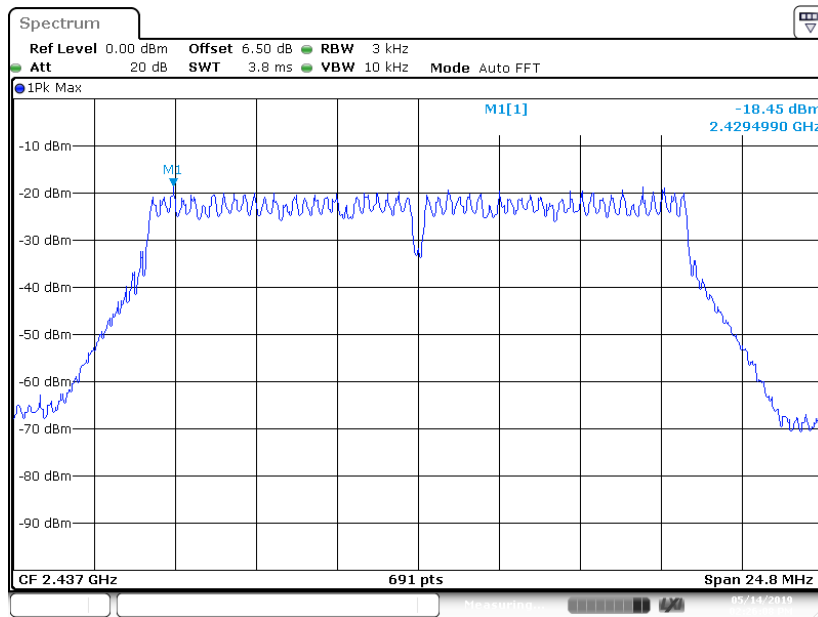


802.11g Mode High Channel

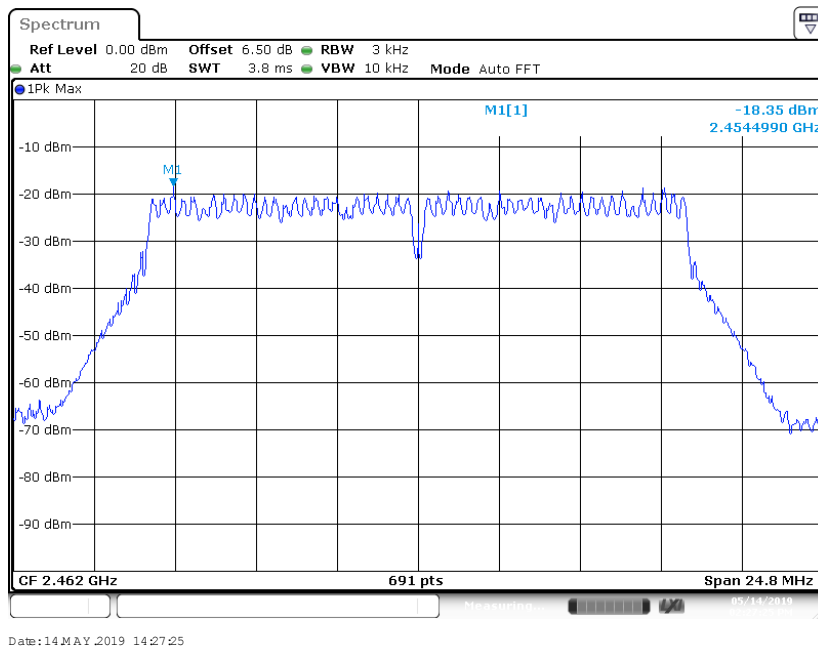


802.11n-HT20 Mode Low Channel

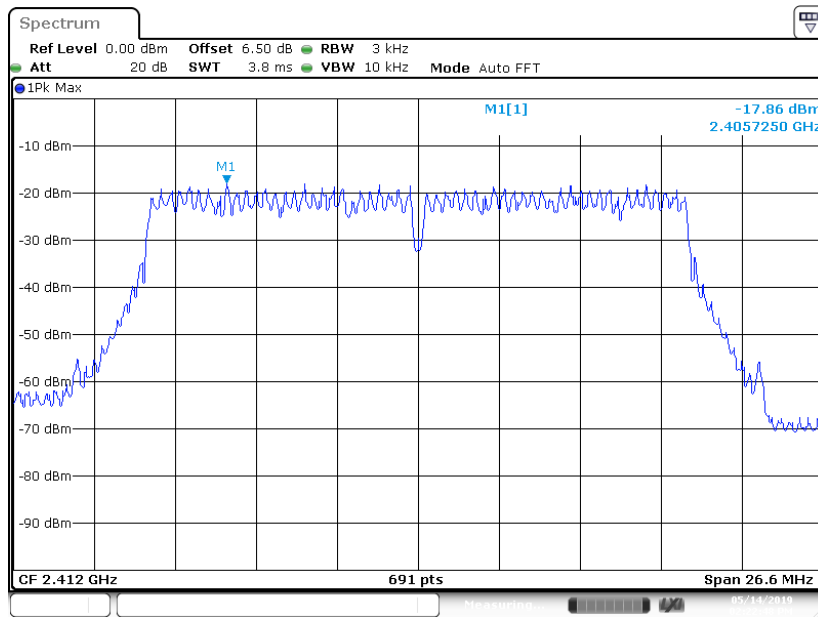

802.11n-HT20 Mode Middle Channel

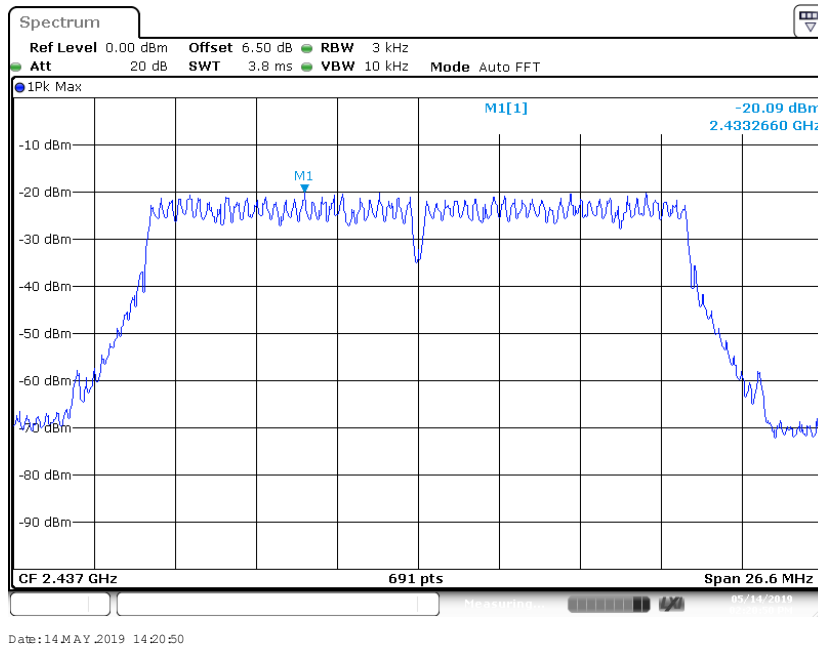

802.11n-HT20 Mode High Channel

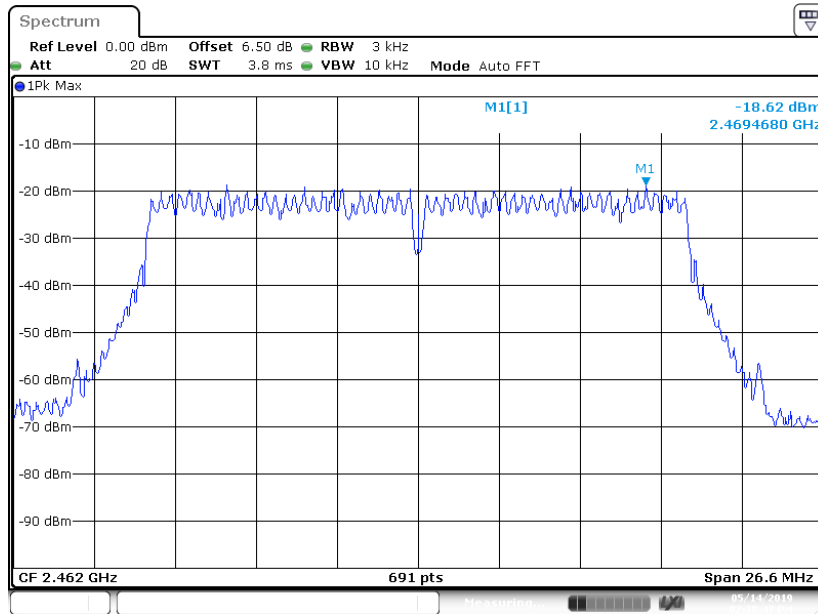

***** END OF REPORT *****