



# TEST REPORT

**APPLICANT** : Hot Pepper, Inc.  
**PRODUCT NAME** : 4G Smart Phone  
**MODEL NAME** : VLE5  
**BRAND NAME** : Hot Pepper  
**FCC ID** : 2APD4-A80C  
**STANDARD(S)** : 47 CFR Part 15 Subpart B  
**TEST DATE** : 2018-06-25 to 2018-06-26  
**ISSUE DATE** : 2018-07-16

Tested by: Wang Dalong  
Wang Dalong(Test Engineer)  
Approved by: Andy Yeh  
Andy Yeh(Technical Director)

**NOTE:** This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





# DIRECTORY

- 1. Technical Information..... 3
  - 1.1. Applicant and Manufacturer Information..... 3
  - 1.2. Equipment Under Test (EUT) Description ..... 3
- 2. Test Results ..... 5
  - 2.1. Applied Reference Documents ..... 5
  - 2.2. EUT Setup and Operating Conditions..... 6
- 3. 47 CFR Part 15B Requirements ..... 7
  - 3.1. Conducted Emission ..... 7
  - 3.2. Radiated Disturbance..... 11
- Annex A Photographs of Test Setup..... 18
- Annex B Test Uncertainty..... 20
- Annex C Testing Laboratory Information..... 21

Change History		
Issue	Date	Reason for change
1.0	2018-07-16	First edition



# 1. Technical Information

Note: Provide by applicant

## 1.1. Applicant and Manufacturer Information

<b>Applicant:</b>	Hot Pepper, Inc.
<b>Applicant Address:</b>	5151 California Ave., Suite 100, Irvine 92617, USA
<b>Manufacturer:</b>	Hot Pepper, Inc.
<b>Manufacturer Address:</b>	5151 California Ave., Suite 100, Irvine 92617, USA

## 1.2. Equipment Under Test (EUT) Description

<b>EUT Type:</b>	4G Smart Phone	
<b>Serial No:</b>	(N/A, marked #1 by test site)	
<b>Hardware Version:</b>	HXF-M 94V-0	
<b>Software Version:</b>	HPP-VLE5180706	
<b>Tx Frequency:</b>	CDMA 800MHz (BC 0): 824.7 MHz ~ 848.31 MHz CDMA 1900MHz (BC 1): 1851.25 MHz ~ 1908.75 MHz CDMA 800MHz (BC 10, Spreading Rate 1): 806.875 MHz ~ 823.100 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 41: 2496 MHz ~ 2690 MHz Bluetooth: 2402 MHz ~ 2480 MHz 802.11b/g/n-20: 2412 MHz ~ 2462 MHz 802.11n-40: 2422 MHz ~ 2452 MHz;	
<b>Rx Frequency:</b>	CDMA 800MHz (BC 0): 869.7 MHz ~ 893.31 MHz CDMA 1900MHz (BC 1): 1931.25 MHz ~ 1988.75 MHz CDMA 800MHz (BC 10, Spreading Rate 1): 851.875 MHz ~ 864.750 MHz LTE Band 25: 1930 MHz ~ 1995 MHz LTE Band 26: 859 MHz ~ 894 MHz LTE Band 41: 2496 MHz ~ 2690 MHz Bluetooth: 2402 MHz ~ 2480 MHz 802.11b/g/n-20: 2412 MHz ~ 2462 MHz 802.11n-40: 2422 MHz ~ 2452 MHz; GPS: 1575.42MHz	
<b>Ancillary Equipment:</b>	<b>Battery</b>	
	<b>Brand Name:</b>	Hot Pepper



	Model No.:	H2018VL5
	Serial No.:	HTT 180316000001
	Capacity:	2000mA
	Rated Voltage:	3.8V
	Charge Limit:	4.4V
	<b>AC Adapter</b>	
	Brand Name:	Hot Pepper
	Model No.:	TPA_46B050100UU
	Serial No.:	(N/A, marked #1 by test site)
	Rated Input:	~ 100-240V, 50/60Hz,0.2A
	Rated Output:	=5V,1.0A

**Note:**

1. The 4G Smart Phone supports CDMA800MHz (BC0), CDMA1900MHz (BC1), CDMA800MHz (BC10, Spreading Rate1), LTE Band 25/26/41, GPS, ISM 2.4GHz Bluetooth band and WIFI (802.11b/g/n) band.
2. For a more detailed description, please refer to specification or user's manual supplied by the applicant and/or manufacturer.



## 2. Test Results

### 2.1. Applied Reference Documents

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result
1	15.107	Conducted Emission	2018.06.26	Wang Dalong	PASS
2	15.109	Radiated Emission	2018.06.25	Wang Dalong	PASS

NOTE: The tests were performed according to the method of measurements prescribed in ANSI C63.4-2014.



## 2.2. EUT Setup and Operating Conditions

<b>Test Item</b>	
<b>Radiated Emission</b>	
<b>Mode 1</b>	<b>: EUT + T-Flash Card + PC + Earphone</b>
Mode 2	: EUT + Adapter + Earphone
<b>Conducted Emission</b>	
<b>Mode 1</b>	<b>: EUT + T-Flash Card + PC + Earphone</b>
Mode 2	: EUT + Adapter + Earphone
<b>Remark:</b>	
The above test modes in boldface were the worst cases of conducted emission, radiated emission tests; only the test data of these modes was reported.	

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 - 60
Atmospheric Pressure (kPa):	86 - 106

### 3. 47 CFR Part 15B Requirements

#### 3.1. Conducted Emission

##### 3.1.1. Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50μH/50Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- a) The limit subjects to the Class B digital device.
- b) The lower limit shall apply at the band edges.
- c) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

##### 3.1.2. Test Setup

Please refer to Annex A for the photographs of the Test Configuration.

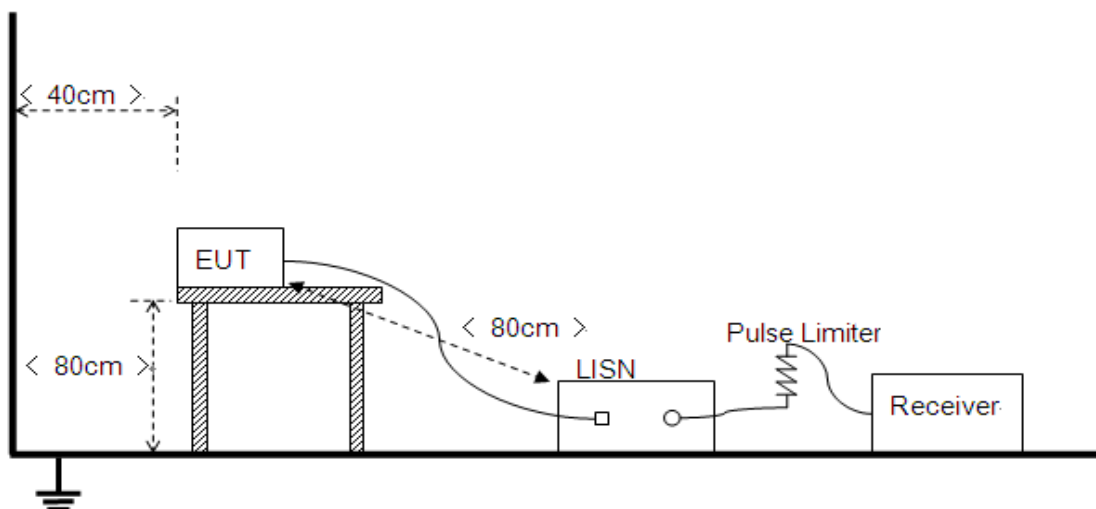



The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides  $50\Omega/50\mu\text{H}$  of coupling impedance for the measuring instrument. A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.


The power strip or extension cord has been investigated to make sure that the LISN integrity is maintained with respect to the impedance characteristics as prescribed in ANSI C63.4-2014 at Clause 4.3.

### 3.1.3. Test Result


The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.



**A. Test Plot and Suspicious Points:**

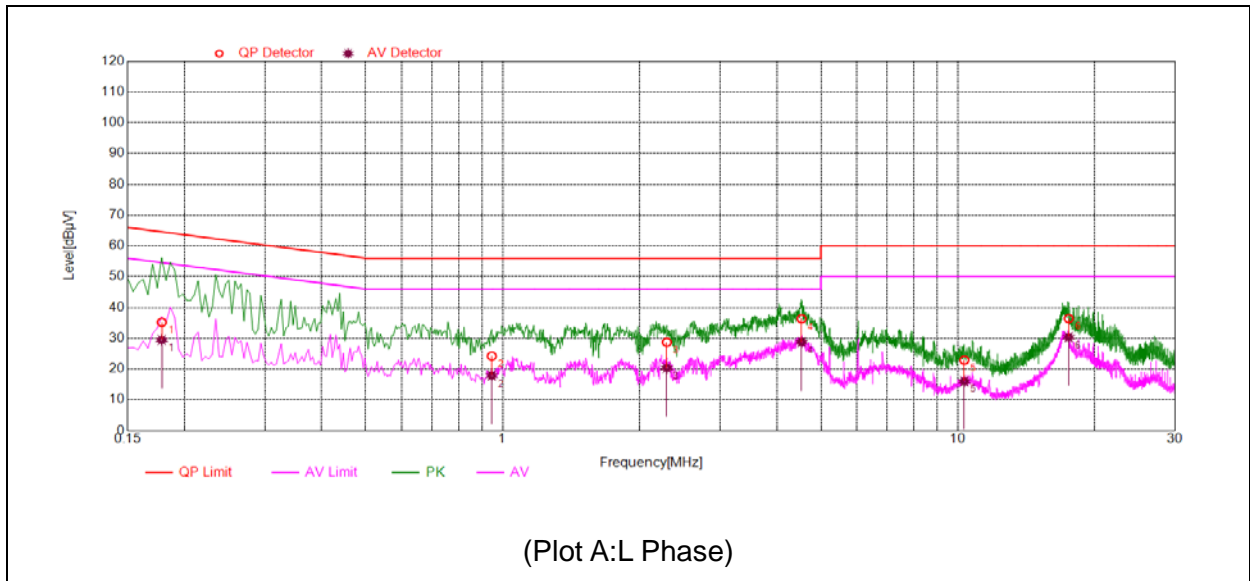

NO.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1780	35.20	29.44	64.58	54.58	Line	PASS
2	0.9456	24.22	17.86	56.00	46.00		PASS
3	2.2929	28.66	20.36	56.00	46.00		PASS
4	4.5355	36.38	28.72	56.00	46.00		PASS
5	10.331	22.92	16.05	60.00	50.00		PASS
6	17.518	36.46	30.35	60.00	50.00		PASS

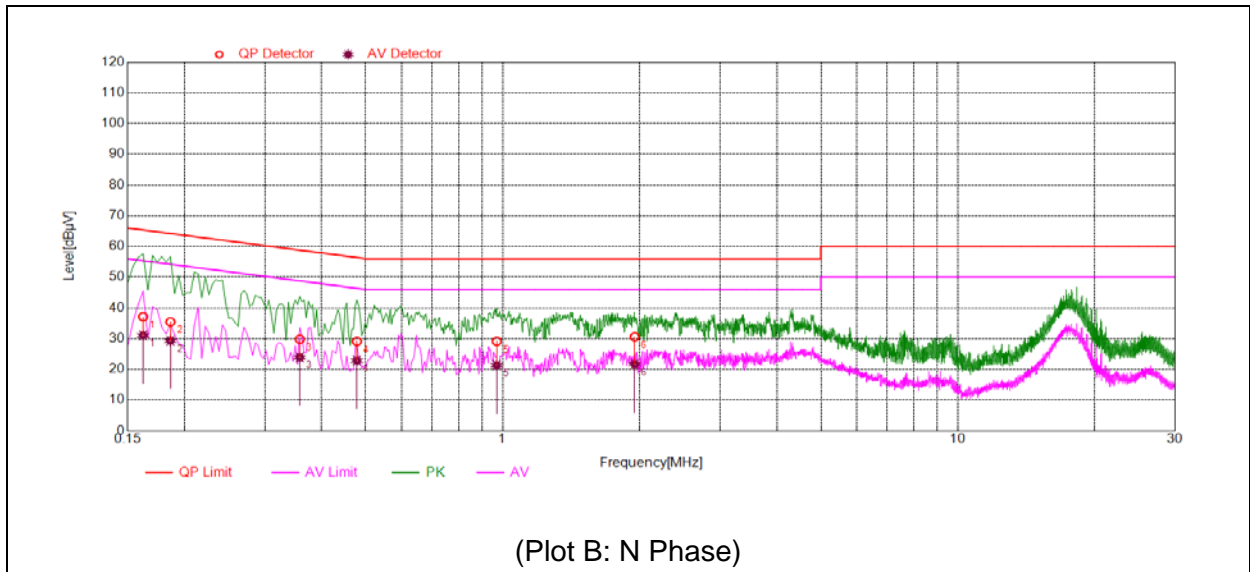

NO.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1619	37.13	31.05	65.36	55.36	Neutral	PASS
2	0.1859	35.44	29.29	64.21	54.21		PASS
3	0.3578	29.80	23.89	58.78	48.78		PASS
4	0.4777	29.07	22.84	56.38	46.38		PASS
5	0.9696	29.09	21.32	56.00	46.00		PASS
6	1.9489	30.56	21.62	56.00	46.00		PASS



### 3.2. Radiated Disturbance

#### 3.2.1. Requirement

According to FCC section 15.109 (a), the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength Limitation at 3m Measurement Dist	
	( $\mu$ V/m)	(dB $\mu$ V/m)
30.0 - 88.0	100	20log 100
88.0 - 216.0	150	20log 150
216.0 - 960.0	200	20log 200
Above 960.0	500	20log 500

As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in dB $\mu$ V/m is calculated by 20log Emission Level( $\mu$ V/m).


#### 3.2.2. Frequency range of measurement

According to 15.33(b)(1), the frequency range of radiated measurement for the EUT is listed in the following table:


Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705 .....	30.
1.705-108 .....	1000.
108-500 .....	2000.
500-1000 .....	5000.
Above 1000 .....	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

### 3.2.3. Test Setup

- 1) For radiated emissions from 30MHz to 1GHz

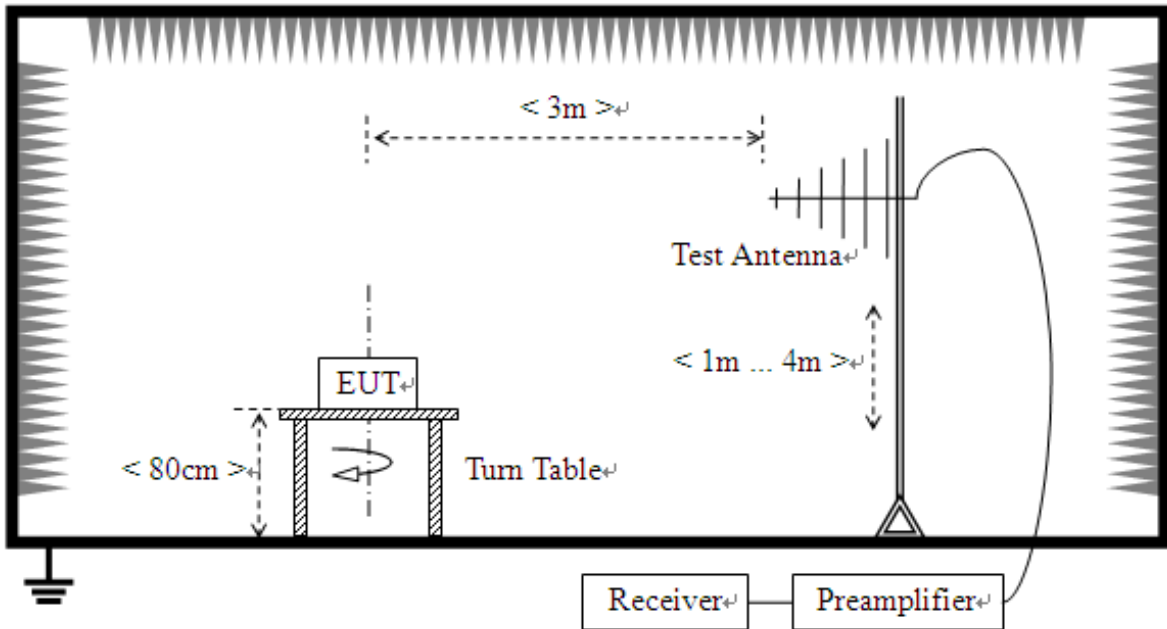

- 2) For radiated emissions above 1GHz

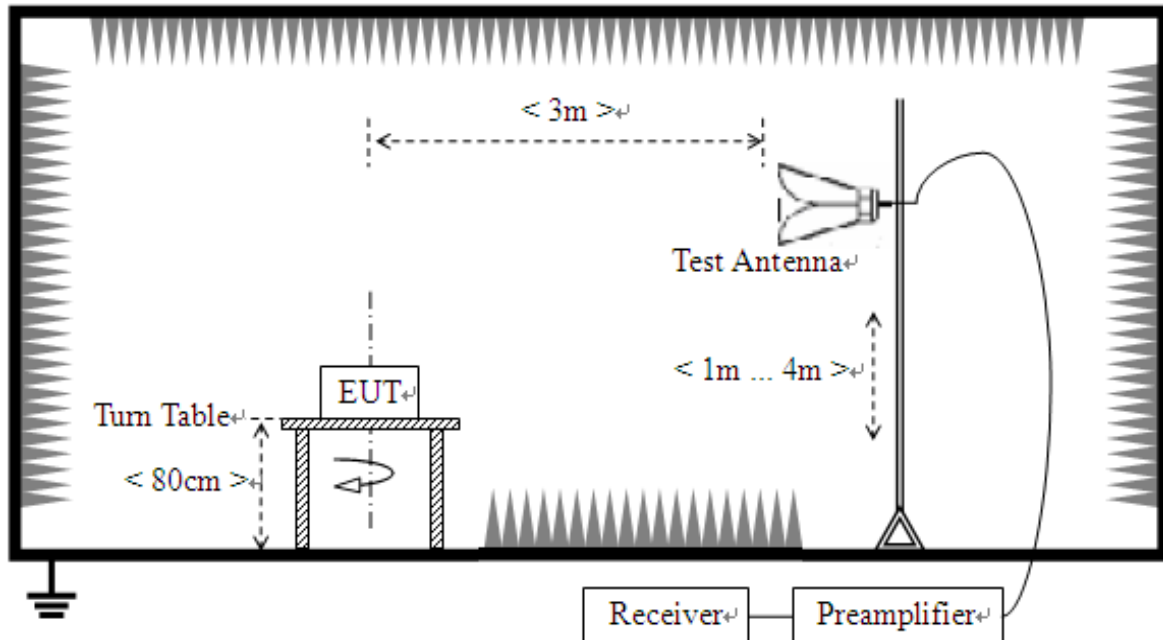



The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:


In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

### 3.2.4. Test Result


The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of emissions which (6GHz-12.5GHz) are attenuated more than 20 dB below the permissible value need not be reported.


Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.

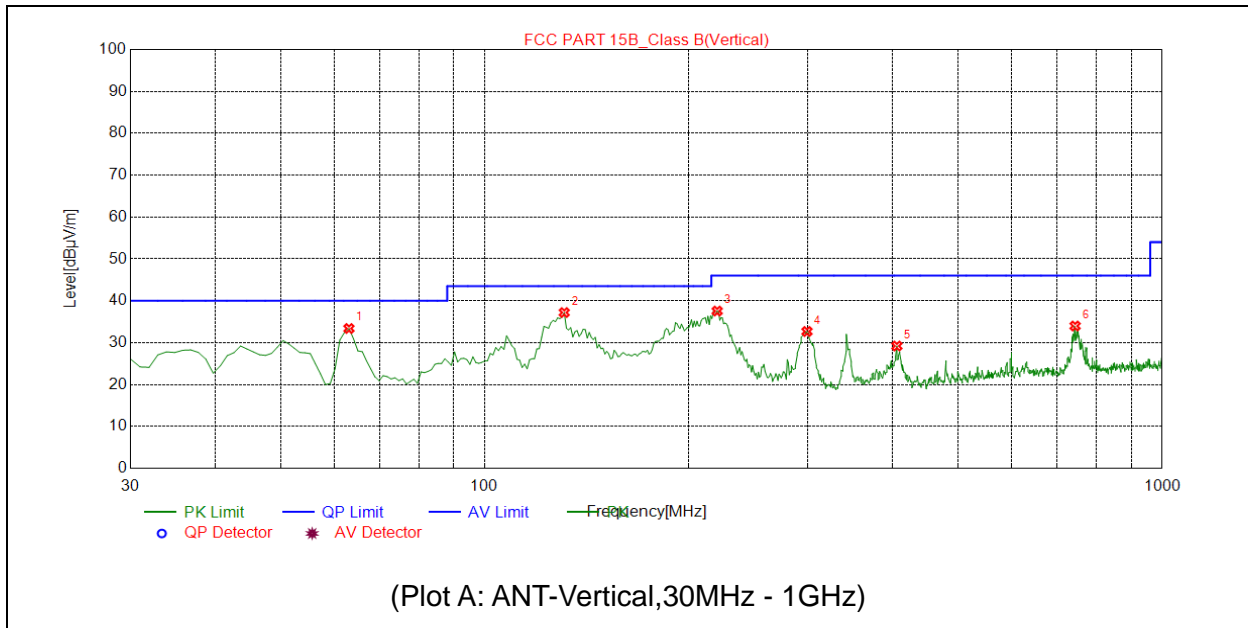

No.	Fre. MHz	Pk dBµV/m	QP dBµV/m	AV dBµV/m	Limit-PK dBµV/m	Limit-QP dBµV/m	Limit-AV dBµV/m	ANT	Verdict
1	63.0130	33.38	N.A	N.A	N.A	40.00	N.A	V	PASS
2	130.9810	37.19	N.A	N.A	N.A	43.50	N.A	V	PASS
3	220.3103	37.55	N.A	N.A	N.A	46.00	N.A	V	PASS
4	298.9590	32.67	N.A	N.A	N.A	46.00	N.A	V	PASS
5	405.7658	29.20	N.A	N.A	N.A	46.00	N.A	V	PASS
6	743.6637	33.98	N.A	N.A	N.A	46.00	N.A	V	PASS

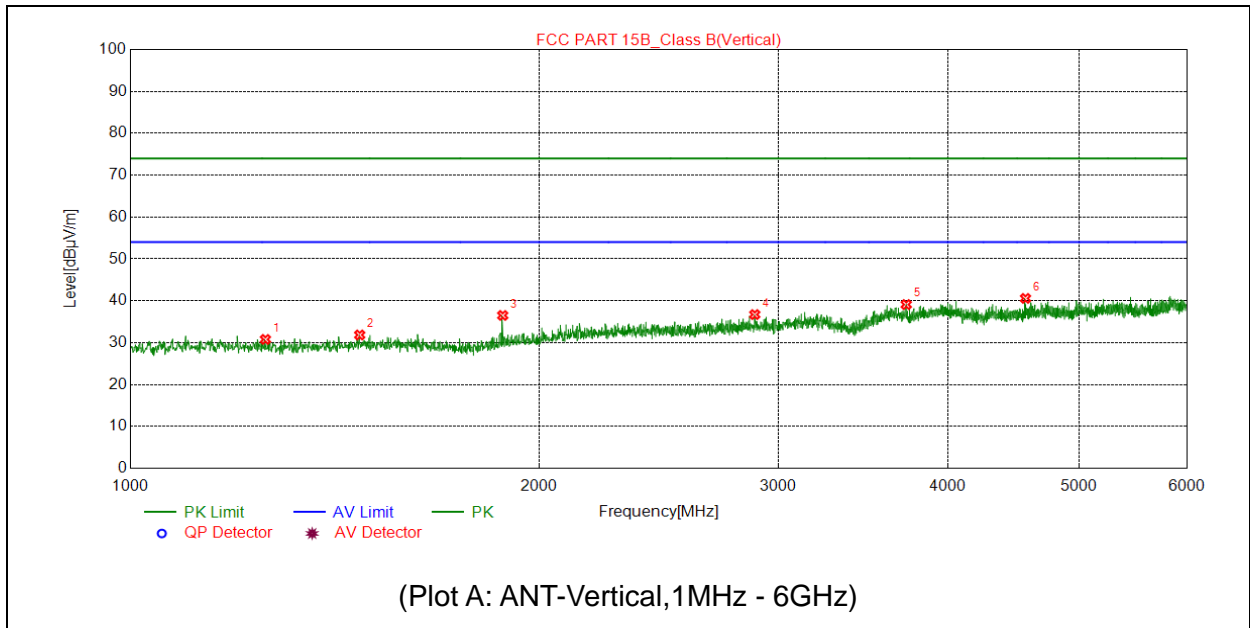


No.	Fre. MHz	Pk dBµV/m	QP dBµV/m	AV dBµV/m	Limit-PK dBµV/m	Limit-QP dBµV/m	Limit-AV dBµV/m	ANT	Verdict
1	1257.0514	30.78	N.A	N.A	74.00	N.A	54.00	V	PASS
2	1475.0950	31.84	N.A	N.A	74.00	N.A	54.00	V	PASS
3	1880.1760	36.50	N.A	N.A	74.00	N.A	54.00	V	PASS
4	2883.3767	36.71	N.A	N.A	74.00	N.A	54.00	V	PASS
5	3728.5457	39.10	N.A	N.A	74.00	N.A	54.00	V	PASS
6	4564.7129	40.57	N.A	N.A	74.00	N.A	54.00	V	PASS

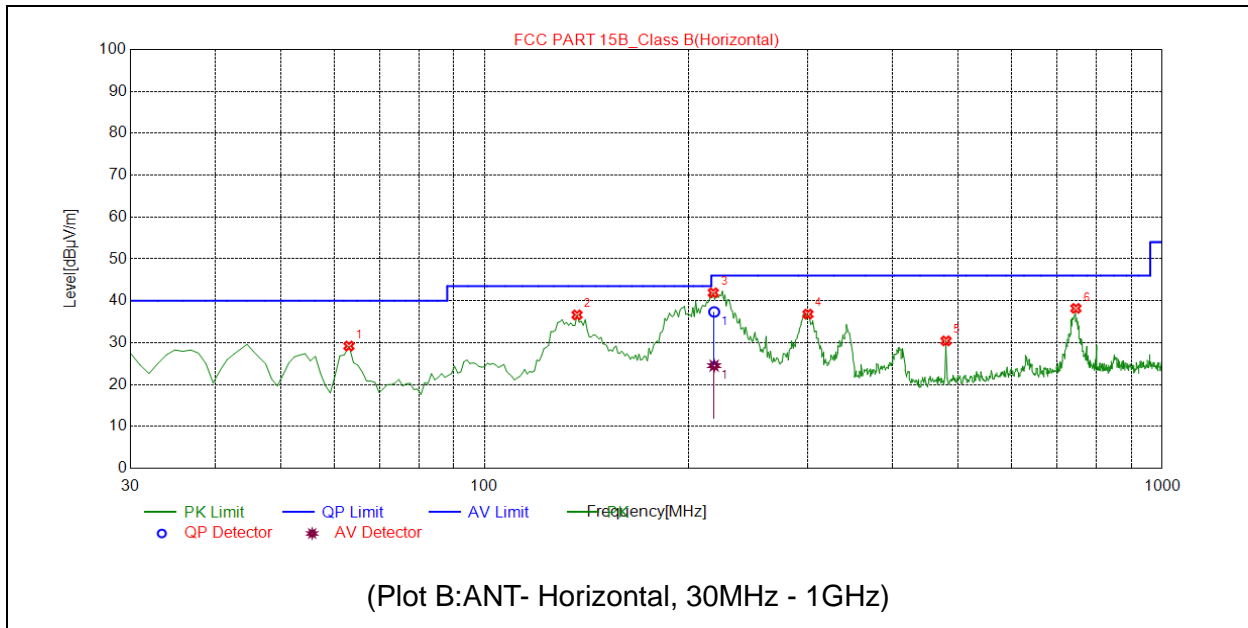

No.	Fre. MHz	Pk dBµV/m	QP dBµV/m	AV dBµV/m	Limit-PK dBµV/m	Limit-QP dBµV/m	Limit-AV dBµV/m	ANT	Verdict
1	63.0130	29.19	N.A	N.A	N.A	40.00	N.A	H	PASS
2	136.8068	36.63	N.A	N.A	N.A	43.50	N.A	H	PASS
3	217.3974	N.A	37.34	N.A	N.A	46.00	N.A	H	PASS
4	299.9299	36.82	N.A	N.A	N.A	46.00	N.A	H	PASS
5	479.5596	30.43	N.A	N.A	N.A	46.00	N.A	H	PASS
6	745.6056	38.18	N.A	N.A	N.A	46.00	N.A	H	PASS



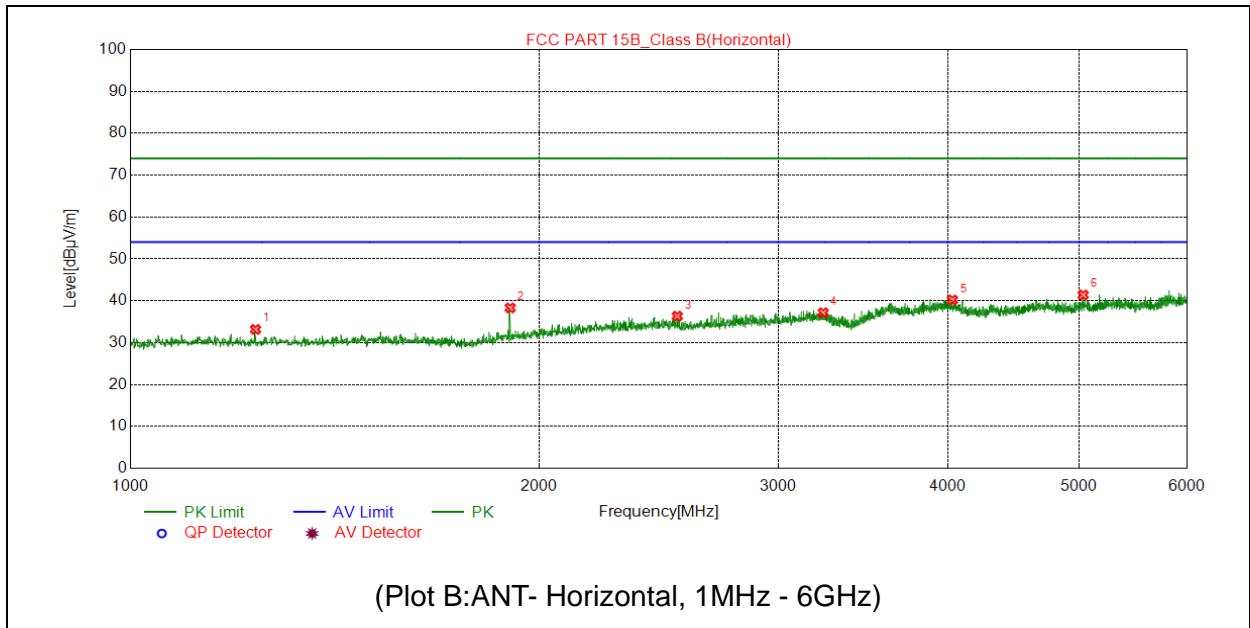


No.	Fre. MHz	Pk dBµV/m	QP dBµV/m	AV dBµV/m	Limit-PK dBµV/m	Limit-QP dBµV/m	Limit-AV dBµV/m	ANT	Verdict
1	1236.0472	33.16	N.A	N.A	74.00	N.A	54.00	H	PASS
2	1904.1808	38.31	N.A	N.A	74.00	N.A	54.00	H	PASS
3	2528.3057	36.33	N.A	N.A	74.00	N.A	54.00	H	PASS
4	3238.4477	37.16	N.A	N.A	74.00	N.A	54.00	H	PASS
5	4032.6065	40.20	N.A	N.A	74.00	N.A	54.00	H	PASS
6	5033.8068	41.39	N.A	N.A	74.00	N.A	54.00	H	PASS

## Annex A Photographs of Test Setup


### 1. Mains Terminal Disturbance Voltage Measurement




### 2. Conducted emission main's port side view

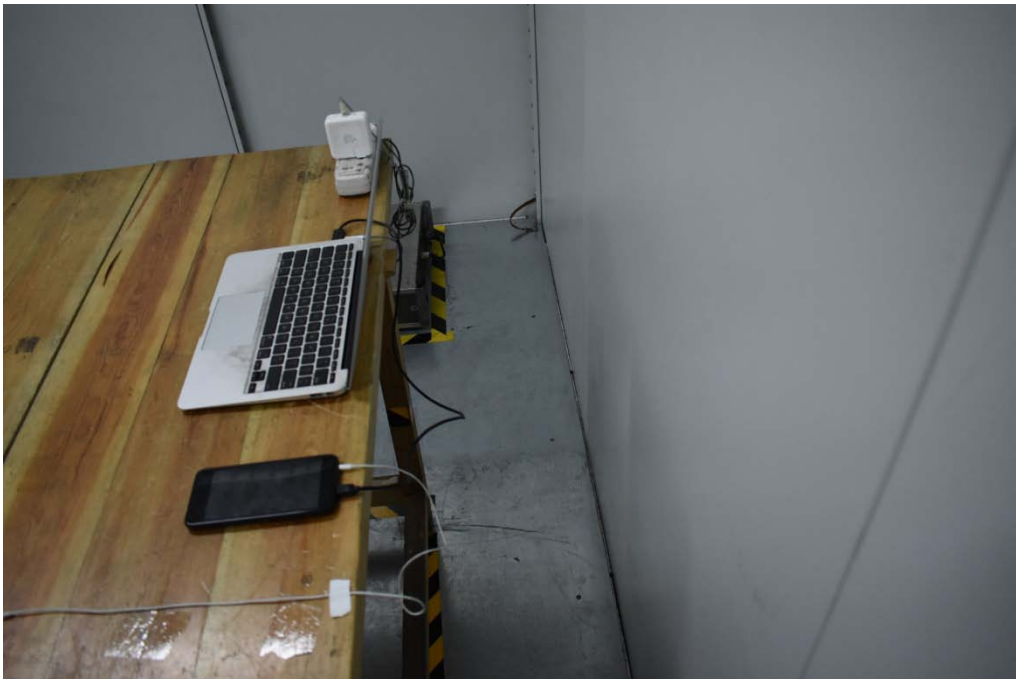

3. Radiated Field Strength Measurement(30MHz-1GHz)

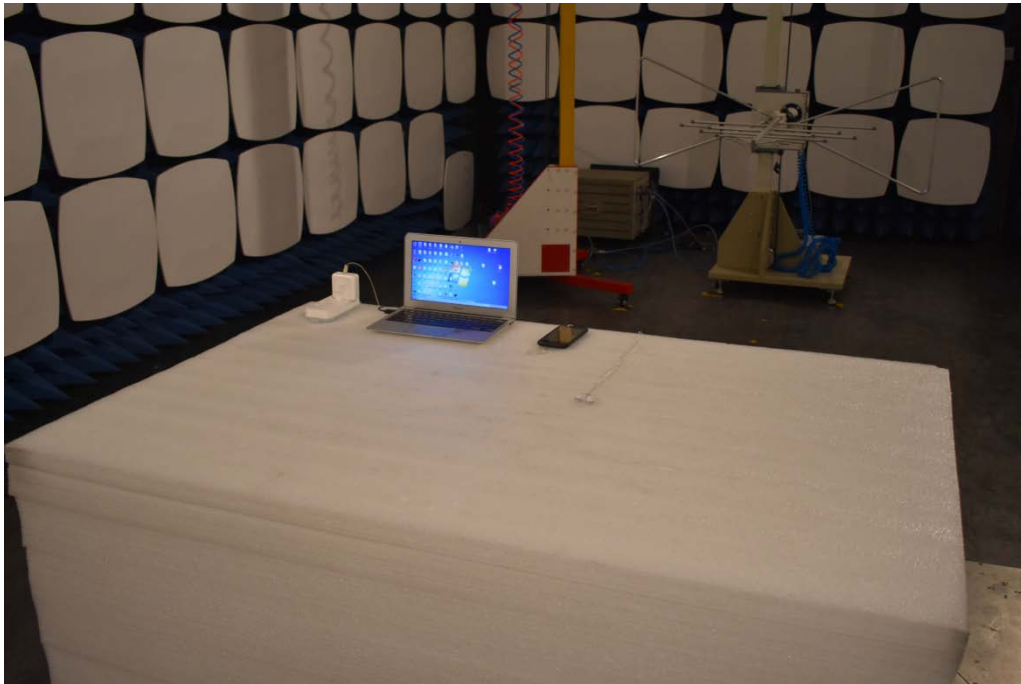

4. Radiated Field Strength Measurement(above 1GHz)

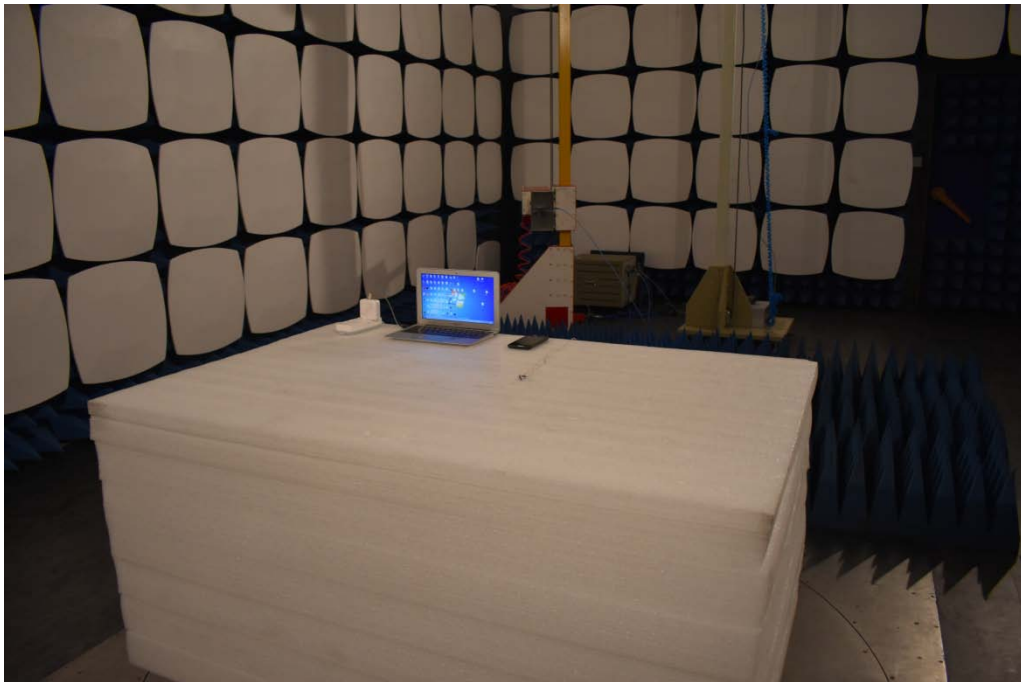



## Annex B Test Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

### Uncertainty of Conducted Emission Measurement

Measuring Uncertainty for a Level of Confidence of 95%(U=2Uc(y))	9kHz-150kHz	±4.1 dB
	150kHz-30MHz	±3.7dB

### Uncertainty of Radiated Emission Measurement

Measuring Uncertainty for a Level of Confidence of 95%(U=2Uc(y))	30MHz-200MHz	±5.06dB
	200MHz-1000MHz	±5.24dB
	1GHz-6GHz	±5.18dB
	6GHz-18GHz	±5.48dB



## Annex C Testing Laboratory Information

### 1. Identification of the Responsible Testing Laboratory

<b>Company Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd.	
<b>Department:</b>	Morlab Laboratory	
<b>Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China	
<b>Responsible Test Lab Manager:</b>	Mr. Su Feng	
<b>Telephone:</b>	+86 755 36698555	
<b>Facsimile:</b>	+86 755 36698525	

### 2. Identification of the Responsible Testing Location

<b>Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
<b>Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

### 3. Accreditation Certificate

<b>Accredited Testing Laboratory:</b>	The FCC designation number is CN1192. (Shenzhen Morlab Communications Technology Co., Ltd.)
---------------------------------------	--

### 4. Test Software Utilized

<b>Model</b>	<b>Version Number</b>	<b>Producer</b>
JS32-RE	Version 2.0.2.0	Tonscend
TS+ -[ JS32-CE]	Version2.5.0.0	Tonscend

**5. Test Equipments Utilized**

Description	Manufacturer	Model	Serial No.	Cal. Date	Due. Date
MXE EMI Receiver	Agilent	N9038A	MY54130016	2018.05.08	2019.05.07
Receiver	KEYSIGHT	N9038A	MY56400093	2018.05.08	2019.05.07
LISN	Schwarzbeck	NSLK 8127	812744	2018.05.08	2019.05.07
Pulse Limiter (20dB)	VTSD	9561D	9537	2018.05.08	2019.05.07
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-519	2018.05.08	2019.05.07
Test Antenna - Horn	Schwarzbeck	BBHA 9120D	1774	2017.09.13	2018.09.12
Test Antenna-Horn	Schwarz	BBHA9170	BBHA9170#774	2017.09.13	2018.09.12
Semi-Anechoic Chamber	CRT	9m*6m*6m 1#	N/A	2017.11.19	2020.11.18
Semi-Anechoic Chamber	CRT	9m*6m*6m 2#	N/A	2017.01.12	2020.01.11

————— END OF REPORT —————