





FCC CERTIFICATION TEST REPORT

Applicant:	Sahara Presentation Systems Ltd
Address:	Europa House, Littlebrook DC1, Shield Road, Dartford, Kent DA1 5UR, United Kingdom
Manufacturer:	Sahara Presentation Systems Ltd
Address:	Europa House, Littlebrook DC1, Shield Road, Dartford, Kent DA1 5UR, United Kingdom
Product Description:	Clevershare Hub, CleverHub
Brand Name:	CLEVERTOUCH
Tested Model:	CleverHub
FCC ID:	2APKO-WB05
Report No.:	JCF230411201-001
Received Date:	Apr. 11, 2023
Tested Date:	Apr. 11, 2023 ~ Sep. 11, 2023
Issued Date:	Sep. 11, 2023
Test Standards:	FCC Rules and Regulations Part 15 Subpart C,
Test Procedure:	ANSI C63.10:2013
Test Result:	Pass
Prepared By:	
 <u>Kennys Zhang/Engineer</u>	
Date: Sep. 11, 2023 	
Reviewed By:	
 <u>Roger Li/Engineer</u>	
Date: Sep. 11, 2023	
Approved By:	
 <u>Talent Zhang/Engineer</u>	
Date: Sep. 11, 2023	

Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Guangzhou Jingce Testing Technology Co., Ltd. the test report shall not be reproduced except in full.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Sep. 11, 2023	Original Report	/

Table of Contents

1. Test Report Declare	5
2. Summary of Test Results	6
3. Test Laboratory	6
4. Equipment Under Test	7
4.1. Description of EUT	7
4.2. Channel List	7
4.3. Packet Type Configuration	8
4.4. Test Channel Configuration	8
4.5. Test environment conditions	8
4.6. The Worse Case Power Setting Parameter	8
4.7. Description of Available Antennas	9
5. Description of Test Setup	9
5.1. Accessory	9
5.2. Support Equipment	9
5.3. Test Setup	9
5.4. Setup Diagram for Tests	9
6. Measurement Uncertainty	10
7. Measuring Instrument and Software Used	10
8. On Time and Duty Cycle	12
8.1. Block diagram of test setup	12
8.2. Limits	12
8.3. Results	12
9. 20 dB Occupied Bandwidth and 99 % Occupied Bandwidth	13
9.1. Block diagram of test setup	13
9.2. Limit	13
9.3. Test Procedure	13
9.4. Results	13
10. Conducted Output Power	14
10.1. Block diagram of test setup	14
10.2. Limits	14
10.3. Test Procedure	14
10.4. Results	14
11. Carrier Hopping Channel Separation	15
11.1. Block diagram of test setup	15
11.2. Limits	15
11.3. Test Procedure	15
11.4. Results	15
12. Number of Hopping Frequency	16
12.1. Block diagram of test setup	16
12.2. Limits	16
12.3. Test Procedure	16
12.4. Results	16
13. Time of Occupancy (Dwell Time)	17
13.1. Block diagram of test setup	17
13.2. Limits	17
13.3. Test Procedure	17
13.4. Results	17
14. Conducted Spurious Emission	18
14.1. Block diagram of test setup	18
14.2. Limits	18
14.3. Test Procedure	18
14.4. Results	18

- 15. Radiated Emission 19**
 - 15.1. Block diagram of test setup 19
 - 15.2. Limit 20
 - 15.3. Test Procedure 22
 - 15.4. Results 25
 - 15.5. Original test data 25
- 16. AC Power Line Conducted Emissions 26**
 - 16.1. Block diagram of test setup 26
 - 16.2. Limits 26
 - 16.3. Test procedure 26
 - 16.4. Test result 27
 - 16.5. Original test data 27
- 17. Antenna Requirements 28**
 - 17.1. Limits 28
 - 17.2. Result 28
- APPENDIX A – Radiated Emission Below 1GHz Test Data 29**
- APPENDIX B – Radiated Emission Above 1GHz Test Data 31**
- APPENDIX C – AC Power Line Conducted Emission Test Data 49**

1. Test Report Declare

Applicant:	Sahara Presentation Systems Ltd
Address:	Europa House, Littlebrook DC1, Shield Road, Dartford, Kent DA1 5UR, United Kingdom
Manufacturer:	Sahara Presentation Systems Ltd
Address:	Europa House, Littlebrook DC1, Shield Road, Dartford, Kent DA1 5UR, United Kingdom
Product Name:	Clevershare Hub, CleverHub
Brand Name:	CLEVERTOUCH
Model Name:	Clevershare Hub, CleverHub
Difference Description:	The products with all the models covered in this report are the same as each other, except for different model name.

We Declare:

The equipment described above is tested by Guangzhou Jingce Testing Technology Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained this test report and Guangzhou Jingce Testing Technology Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

2. Summary of Test Results

Summary of Test Results			
Clause	Test Items	FCC/ISED Rules	Test Result
1	20 dB Bandwidth and 99 % Occupied Bandwidth	FCC 15.247 (a) (1)	Pass
2	Conducted Output Power	FCC 15.247 (b) (1)	Pass
3	Carrier Hopping Channel Separation	FCC 15.247 (a) (1)	Pass
4	Number of Hopping Frequency	15.247 (a) (1) III	Pass
5	Time of Occupancy (Dwell Time)	15.247 (a) (1) III	Pass
6	Conducted Band edge	FCC 15.247 (d)	Pass
7	Radiated Band edge and Spurious	FCC 15.247 (d) FCC 15.209 FCC 15.205	Pass
8	Conducted Emission Test For AC Power Port	FCC 15.207	Pass
9	Antenna Requirement	FCC 15.203	Pass

Note: This report changes the client module's matching circuit and antenna gain on the basis of report DDT-R22112825-1E01 which does not affect RF function. So all above test items are reference report DDT-R2211285-1E01 except Clause 7 and Clause 8.

3. Test Laboratory

Guangzhou Jingce Testing Technology Co., Ltd.

Add.: No.192, Kezhu Road, Huangpu District, Guangzhou, Guangdong, China

Association for Laboratory Accreditation(A2LA). Certificate Number: 6594.01

FCC Designation Number: CN1331. Test Firm Registration Number: 360543

IC Test Firm Registration Number: 28796

Conformity Assessment Body identifier: CN0138

4. Equipment Under Test

4.1. Description of EUT

EUT Name:	Clevershare Hub, CleverHub
Model Number:	CleverHub
EUT Function Description:	Please refer the user's manual
Power Supply:	Input: 100-240V ~ 50/60Hz 1.0A Max
Hardware Version:	NA
Software Version:	NA
Radio Specification:	Bluetooth V5.0
Operation Frequency:	2402 MHz - 2480 MHz
Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Data Rate:	1Mbps, 2Mbps, 3Mbps
Antenna Type:	FPC Antenna, MAX. Gain: 2.1 dBi

Note 1: EUT is the ab. of equipment under test.

Note 2: The antenna gain is declared by the customer and the laboratory is not responsible for the accuracy of the antenna gain.

4.2. Channel List

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	/	/

4.3. Packet Type Configuration

Test Mode	Packet Type	Setting(Packet Length)
GFSK	DH1	27
	DH3	183
	DH5	339
$\pi/4$ -DQPSK	2-DH1	54
	2-DH3	367
	2-DH5	679
8DPSK	3-DH1	83
	3-DH3	552
	3-DH5	1021

4.4. Test Channel Configuration

Tested mode, channel, information		
Mode	Channel	Frequency (MHz)
GFSK hopping on Tx mode	CH0 to CH78	2402 to 2480
$\pi/4$ -DQPSK hopping on Tx mode	CH0 to CH78	2402 to 2480
8DPSK hopping on Tx mode	CH0 to CH78	2402 to 2480
GFSK hopping off Tx mode	LCH: CH0	2402
	MCH: CH39	2441
	HCH: CH78	2480
$\pi/4$ -DQPSK hopping off Tx mode	LCH: CH0	2402
	MCH: CH39	2441
	HCH: CH78	2480
8DPSK hopping off Tx mode	LCH: CH0	2402
	MCH: CH39	2441
	HCH: CH78	2480

4.5. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25 °C
Humidity range:	40-75%
Pressure range:	86-106 kPa

4.6. The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software		Secure CRT		
Modulation Type	Transmit Antenna Number	Test Software Setting Value		
		CH 0	CH 39	CH 78
GFSK	1	Default	Default	Default
$\pi/4$ -DQPSK	1	Default	Default	Default
8DPSK	1	Default	Default	Default

4.7. Description of Available Antennas

Test Mode	Transmit and Receive Mode	Description
GFSK	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
$\pi/4$ -DQPSK	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
8DPSK	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.

5. Description of Test Setup

5.1. Accessory

Description of Accessories	Manufacturer	Model Number	Description	Remark
Switching adapter	GangQi	GQ36-120300-Ax	Input: 100-240V 50/60Hz 1.0A Max Output: DC 12V3A 36.0W	/

5.2. Support Equipment

Equipment	Brand Name	Model Name	P/N
PC	Lenovo	T480	/

5.3. Test Setup

The EUT can work in Fixed Frequency mode.

5.4. Setup Diagram for Tests



6. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
AC Power Conduction emission	1.37 dB
All Radiated emissions	5.4dB
Conducted emissions	3.09 dB
Occupied Channel Bandwidth	1.1%
Conducted Output power	0.82dB
Power Spectral Density	0.82dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of $k = 2$.


7. Measuring Instrument and Software Used

TS Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9030B	MY56320512	Jul. 25, 2022	Jul. 24, 2023
<input checked="" type="checkbox"/>	Vector Signal Generator	Keysight	N5182B	MY57300334	Nov. 24, 2022	Nov. 23, 2023
<input checked="" type="checkbox"/>	Signal Generator	Keysight	N5171B	MY57280639	Nov. 24, 2022	Nov. 23, 2023
<input checked="" type="checkbox"/>	DC POWER	Keysight	E342A	MY59020356	Jul. 25, 2022	Jul. 24, 2023
<input checked="" type="checkbox"/>	Incubator thermometer	GWS	EL-02JA	21107288	Nov. 03, 2022	Nov. 02, 2023
<input checked="" type="checkbox"/>	Control unit(Power sensor)	Tonscend	JS0806-2	/	Jul. 25, 2022	Jul. 24, 2023
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9020B	MY60112206	Nov. 24, 2022	Nov. 23, 2023
<input checked="" type="checkbox"/>	Control unit(Power sensor)	Tonscend	JS0806-2	21H8060465	Nov. 25, 2022	Nov. 24, 2023
Software						
Used	Description	Manufacturer	Name		Version	
<input checked="" type="checkbox"/>	Test software	TS+	JS1120-3		V3.2.11	
RSE Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
<input checked="" type="checkbox"/>	EMI Receiver	R&S	ESW	101685	Jul. 24, 2022	Jul. 23, 2023
<input checked="" type="checkbox"/>	Bilog Antenna	Schwarzbeck	VULB 9163	01361	Aug. 05, 2022	Aug. 04, 2023
<input checked="" type="checkbox"/>	Horn Antenna 1	Schwarzbeck	BBHA 9120 D	02410	Aug. 02, 2022	Aug. 01, 2023
<input checked="" type="checkbox"/>	Horn Antenna 2	ETS	3116C	00217677	Sep. 19, 2022	Sep. 18, 2023
<input checked="" type="checkbox"/>	Signal Pre-Amplifier	Tonscend	TAP010180 50	AP21C80612 2	Aug. 08, 2022	Aug. 07, 2023
<input checked="" type="checkbox"/>	Signal Pre-Amplifier	Tonscend	TAP9K3G32	AP20K80610 4	Aug. 08, 2022	Aug. 07, 2023
<input checked="" type="checkbox"/>	Signal Pre-Amplifier	ETS	3116C-PA	00217677	Aug. 21, 2023	Aug. 20, 2023

<input checked="" type="checkbox"/>	Wideband radio communication tester	R&S	CMW500	163478	Jul. 25, 2022	Jul. 24, 2023
<input checked="" type="checkbox"/>	3m Fully-anechoic Chamber	ETS	RFD-100	/	Apr. 24, 2021	Apr. 23, 2024
Software						
Used	Description	Manufacturer	Name		Version	
<input checked="" type="checkbox"/>	Test software	TS+	TS+		V3.0.0.4	
Conducted Emission Test For AC Power Port						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
<input checked="" type="checkbox"/>	LISN	R&S	ENV216	102154	Jul. 24, 2022	Jul. 23, 2023
<input checked="" type="checkbox"/>	EMI Receiver	R&S	ESR3	102509	Jul. 24, 2022	Jul. 23, 2023
Software						
Used	Description	Manufacturer	Name		Version	
<input checked="" type="checkbox"/>	Test software	EZ	EZ-EMC		EMEC-3A1	
Other Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
<input checked="" type="checkbox"/>	Temperature & Humidity	Temperature	HTC-1	/	Nov. 25, 2022	Nov. 24, 2023

8. On Time and Duty Cycle

8.1. Block diagram of test setup

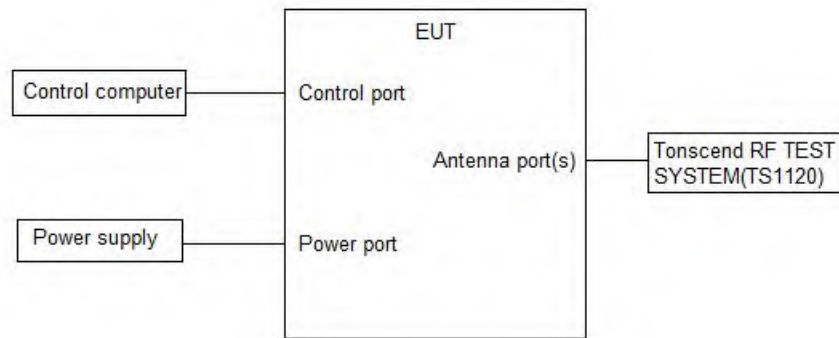

8.2. Limits

None; for reporting purposes only

8.3. Results

Reference report DDT-R2212825-1E01

9. 20 dB Occupied Bandwidth and 99 % Occupied Bandwidth

9.1. Block diagram of test setup

Same as section 8.1

9.2. Limit

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1)	20 dB Occupied Bandwidth	N/A	2400-2483.5

9.3. Test Procedure

Connect the UUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 20 dB Occupied Bandwidth: 1 % to 5 % of the 20 dB bandwidth For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 20 dB Occupied Bandwidth: approximately $3 \times \text{RBW}$ For 99 % Occupied Bandwidth: $\geq 3 \times \text{RBW}$
Span	approximately 2 to 3 times the 20 dB bandwidth
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB and 99 % relative to the maximum level measured in the fundamental emission.

9.4. Results

Reference report DDT-R2212825-1E01

10. Conducted Output Power

10.1. Block diagram of test setup

Same as section 8.1

10.2. Limits

CFR 47 FCC Part15 (15.247) , Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (b) (1)	Peak Conducted Output Power	Hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel: 1 watt or 30dBm; Hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel : 125 mW or 21dBm	2400-2483.5

10.3. Test Procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Measure the maximum output power of EUT by spectrum analyzer with PK detector and RBW=3 MHz (above 20 dB bandwidth of measured signal), VBW=8 MHz

Note: The attenuator loss was inputted into spectrum analyzer as amplitude offset.

10.4. Results

Reference report DDT-R2212825-1E01

11. Carrier Hopping Channel Separation

11.1. Block diagram of test setup

Same as section 8.1

11.2. Limits

CFR 47 FCC Part15 (15.247) , Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1)	Carrier Hopping Channel Separation	<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel.</p>	2400-2483.5

11.3. Test Procedure

Connect the UUT to the spectrum Analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Span	wide enough to capture the peaks of two adjacent channels
Detector	Peak
RBW	Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
VBW	\geq RBW
Trace	Max hold
Sweep time	Auto couple

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Compliance of an EUT with the appropriate regulatory limit shall be determined.

A plot of the data shall be included in the test report.

11.4. Results

Reference report DDT-R2212825-1E01

12. Number of Hopping Frequency

12.1. Block diagram of test setup

Same as section 8.1

12.2. Limits

CFR 47 FCC Part15 (15.247), Subpart C		
Section	Test Item	Limit
CFR 47 15.247 (a) (1) III	Number of Hopping Frequency	at least 15 hopping channels

12.3. Test Procedure

Connect the EUT to the spectrum Analyzer and use the following settings:

Detector	Peak
RBW	To identify clearly the individual channels, set the RBW to less than 30 % of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW	\geq RBW
Span	The frequency band of operation
Trace	Max hold
Sweep time	Auto couple

Set EUT to transmit maximum output power and switch on frequency hopping function. then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer.

Count the quantity of peaks to get the number of hopping channels.

FHSS Mode: 79 Channels observed.

AFHSS Mode: 20 Channels declared.

12.4. Results

Reference report DDT-R2212825-1E01

13. Time of Occupancy (Dwell Time)

13.1. Block diagram of test setup

Same as section 8.1

13.2. Limits

CFR 47 FCC Part15 (15.247), Subpart C		
Section	Test Item	Limit
CFR 47 15.247 (a) (1) III	Time of Occupancy (Dwell Time)	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed.

13.3. Test Procedure

Connect the UUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Average
RBW	1 MHz
VBW	≥ RBW
Span	zero span
Trace	Clear Write
Sweep time	As necessary to capture the entire dwell time per hopping channel

Connect the UUT to the spectrum Analyzer and use the following settings:

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
 - b. Set RBW of spectrum analyzer to 1 MHz and VBW to 3 MHz.
 - c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
 - d. Sweep Time is more than once pulse time.
 - e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
 - f. Measure the maximum time duration of one single pulse.
 - g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
 - h. Measure the maximum time duration of one single pulse.
- A Period Time = (channel number)*0.4
 For FHSS Mode (79 Channel):
 DH1 Time Slot: Reading * (1600/2)*31.6/(channel number)
 DH3 Time Slot: Reading * (1600/4)*31.6/(channel number)
 DH5 Time Slot: Reading * (1600/6)*31.6/(channel number)

13.4. Results

Reference report DDT-R2212825-1E01

14. Conducted Spurious Emission

14.1. Block diagram of test setup

Same as section 8.1

14.2. Limits

CFR 47 FCC Part15 (15.247), Subpart C		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d)	Conducted Spurious Emission	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

14.3. Test Procedure

Please refer to the ANSI C63.10 section 6.10.

For Band edge use the following settings:

Detector	Peak
RBW	100 kHz
VBW	300 kHz
Span	wide enough to fully capture the emission being measured
Trace	Max hold
Sweep time	Auto couple.

For Spurious Emission use the following settings:

Detector	Peak
RBW	100 kHz
VBW	300 kHz
Span	wide enough to fully capture the emission being measured
Trace	Max hold
Sweep time	Auto couple.

Use the peak marker function to determine the maximum amplitude level.


14.4. Results

Reference report DDT-R2212825-1E01


15. Radiated Emission

15.1. Block diagram of test setup


In 3m Anechoic Chamber, test setup diagram for 9kHz - 30MHz:

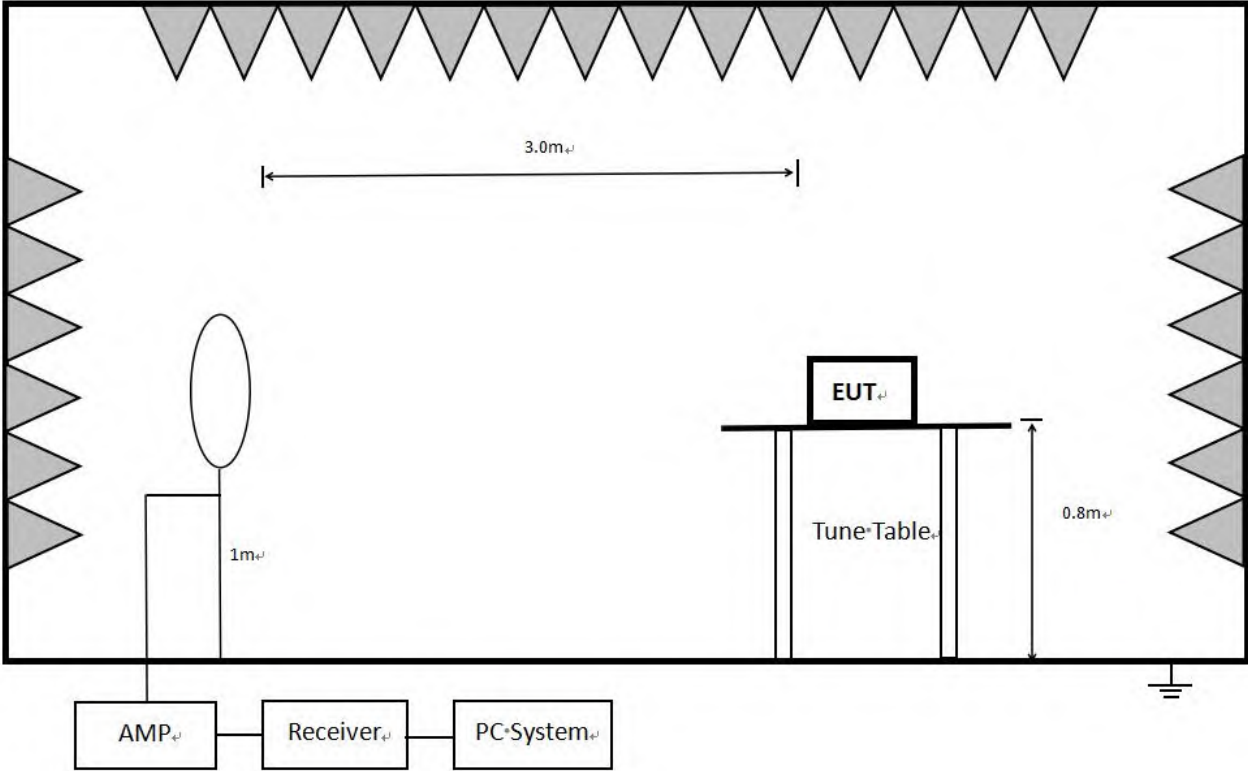

In 3m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

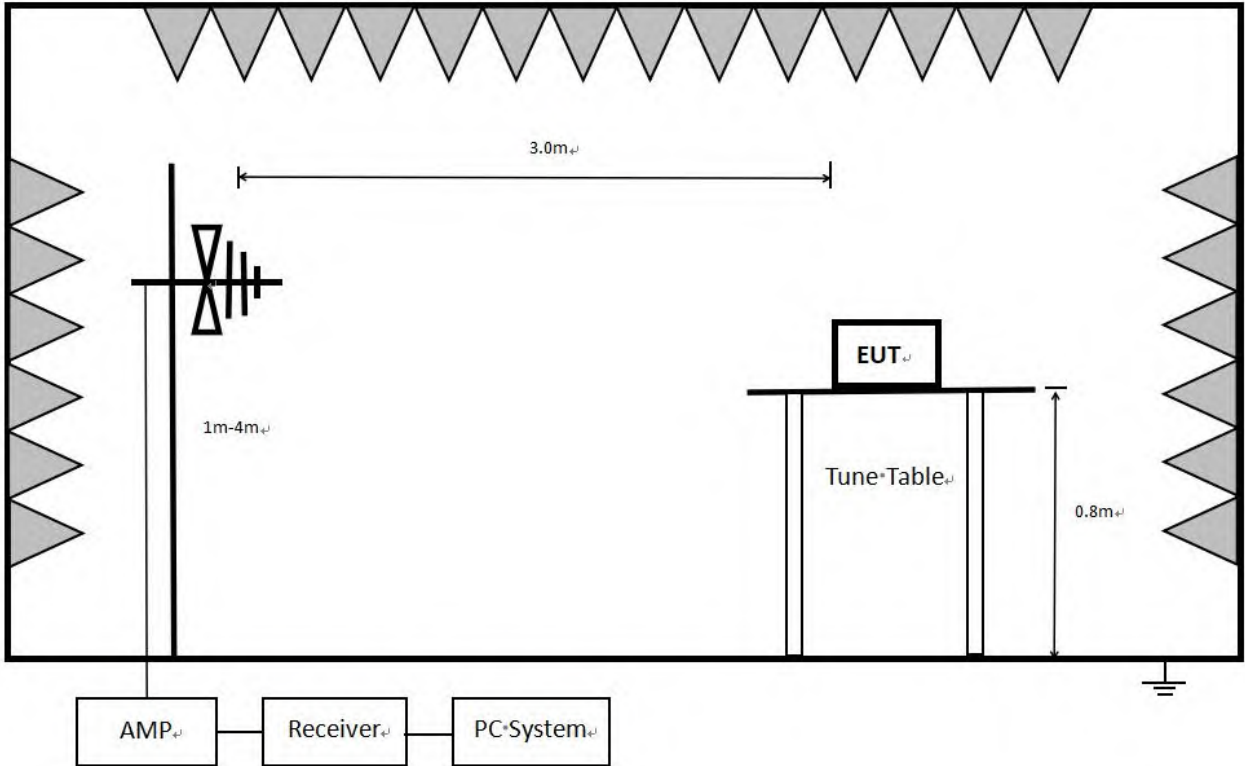

In 3m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

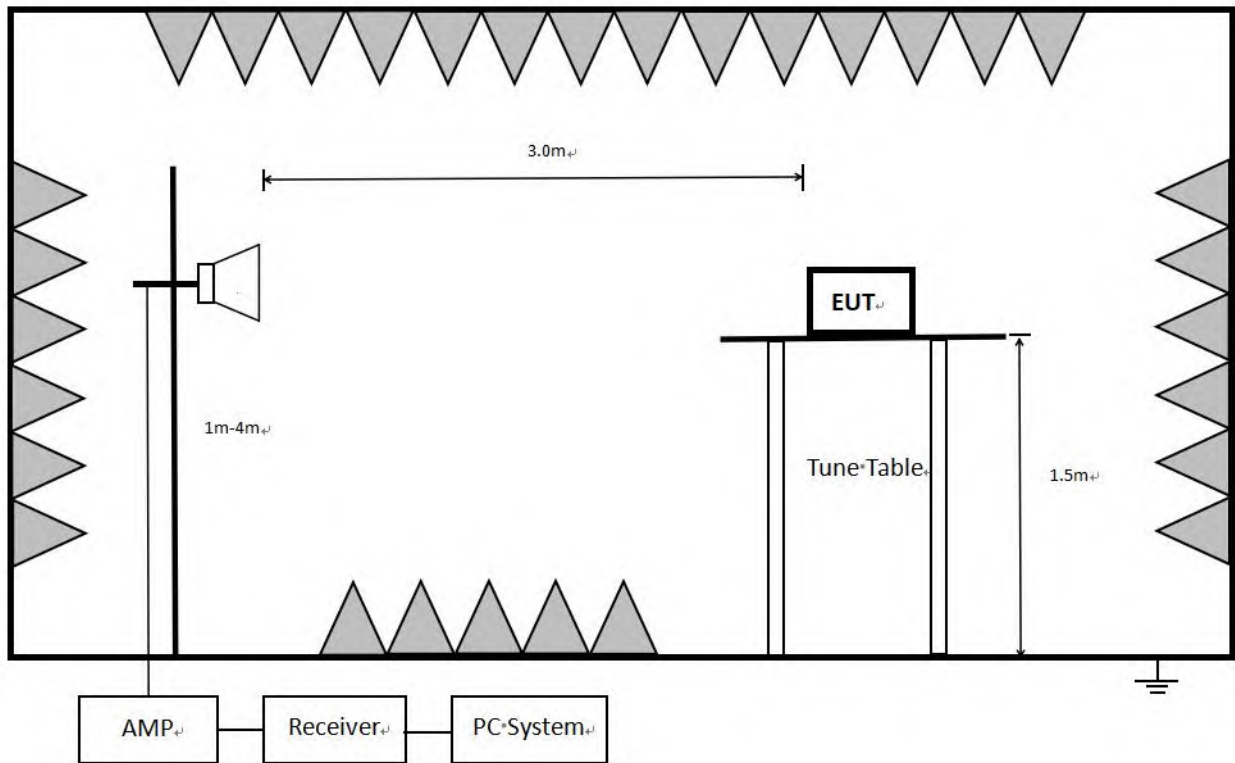

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

15.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

(2) FCC 15.209 Limit.

Frequency MHz	Distance Meters	Field Strengths Limit	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

About Restricted bands of operation please refer to FCC § 15.205 (a),

15.3. Test Procedure

Below 30 MHz:

The setting of the spectrum Analyzer

RBW	300 Hz (From 9 kHz to 0.15 MHz)/ 10 kHz (From 0.15 MHz to 30 MHz)
VBW	1 kHz (From 9 kHz to 0.15 MHz)/ 30 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of 1 meter height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore, sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

Below 1 GHz and above 30 MHz:

The setting of the spectrum Analyzer

RBW	100 kHz
VBW	300 kHz
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz:

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.

2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

3. The EUT was placed on a turntable with 1.5m above ground.

4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.

5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.

6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for AVG measurements. For the Duty Cycle please refer to clause 7.1.On Time And Duty Cycle.

7. Restriction band: Investigated frequency range from 2310 MHz to 2410 MHz and 2470MHz to 2500 MHz.

All restriction band should comply with 15.209, other emission should be at least 20 dB below the fundamental.

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: The EUT does not support simultaneous transmission.

Note 3: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

15.4. Results

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz, so the final test was performed with frequency range from 30 MHz to 26 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in DH5 mode.

Note3: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.


15.5. Original test data

Below 1 GHz and above 30 MHz test data Refer to appendix A

Above 1 GHz test data Refer to appendix B

16. AC Power Line Conducted Emissions

16.1. Block diagram of test setup

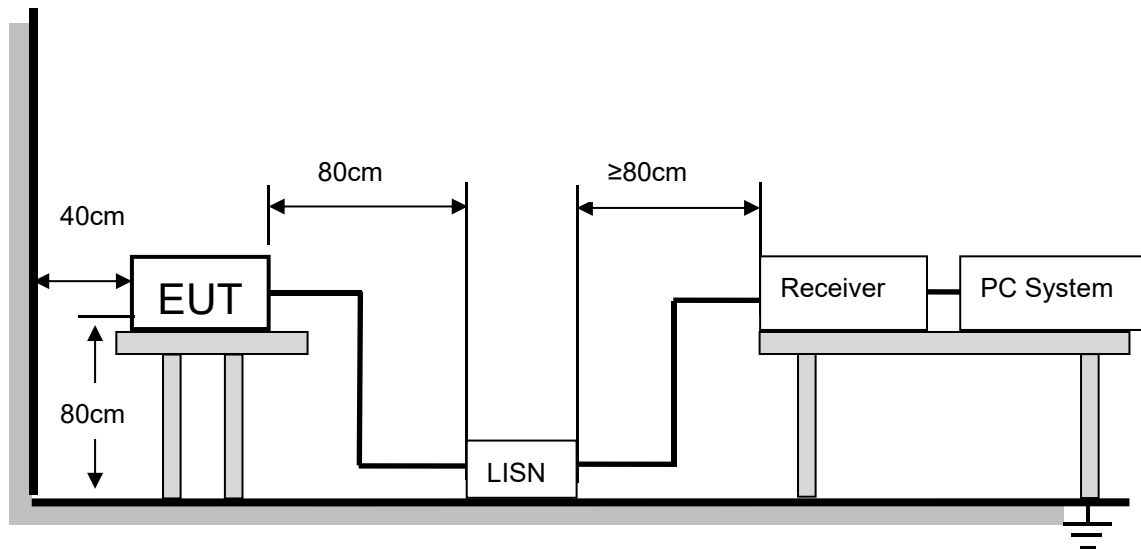

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through an Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

16.2. Limits

Please refer to CFR 47 FCC § 15.207 (a).

Frequency (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

16.3. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 10.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

16.4. Test result

Pass. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded worse case.

16.5. Original test data

AC Power Line Conducted Emission Test Data Refer to appendix C

17. Antenna Requirements

17.1. Limits

Please refer to FCC § 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC § 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

17.2. Result

The antenna used for this product is FPC antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 2.1 dBi


APPENDIX A – Radiated Emission Below 1GHz Test Data

Test Report

Project Information			
Customer:	Clevershare Hub Clever	EUT:	Clevershare Hub Clever
Model:	CleverHub	SN:	
Mode:	DH5 2402	Voltage:	120V 60Hz
Environment:	24.2°C 54%	Engineer:	roger
Remark:	power set : 1 4 5		
Test Standard:			

Start of Test: 2023-07-04 18:50:40

Test Graph

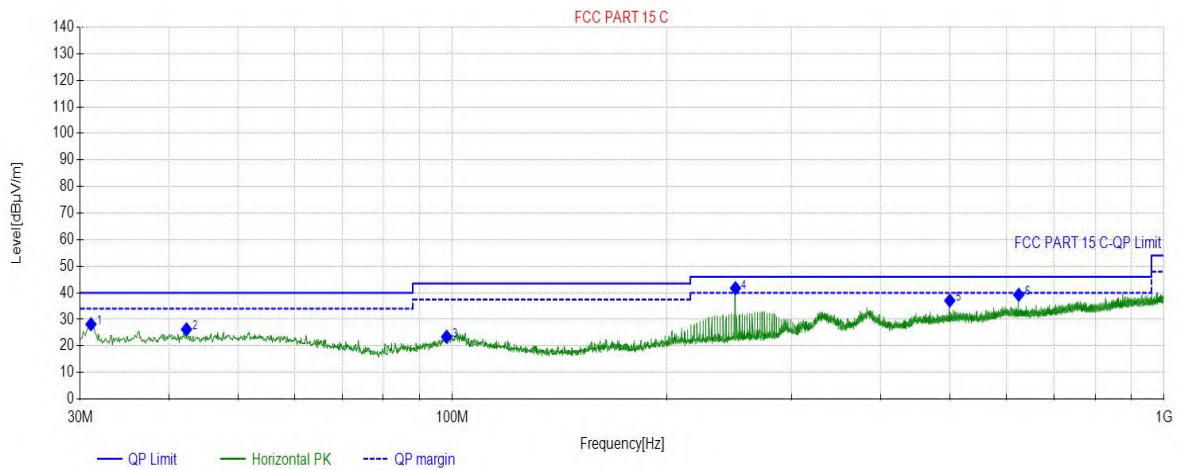


QP Final Data List								
NO.	Freq. (MHz)	Factor (dB)	QP Value (dBµV/m)	QP Limit (dBµV/m)	QP Margin (dB)	Height (cm)	Angle (°)	Polarity
1	31.0671	19.08	28.17	40.00	11.83	100	27	Horizontal
2	42.3202	21.52	26.25	40.00	13.75	100	27	Horizontal
3	98.1978	20.35	23.48	43.50	20.02	100	295	Horizontal
4	250.018	21.54	41.78	46.00	4.22	100	84	Horizontal
5	500.012	27.70	37.09	46.00	8.91	100	64	Horizontal
6	624.960	30.39	39.28	46.00	6.72	100	79	Horizontal

Test Report

Project Information			
Customer:	Clevershare Hub Clever	EUT:	Clevershare Hub Clever
Model:	CleverHub	SN:	
Mode:	DH5 2402	Voltage:	120V 60Hz
Environment:	24.2°C 54%	Engineer:	roger
Remark:	power set : 1 4 5		
Test Standard:			

Start of Test: 2023-07-04 18:51:24

Test Graph

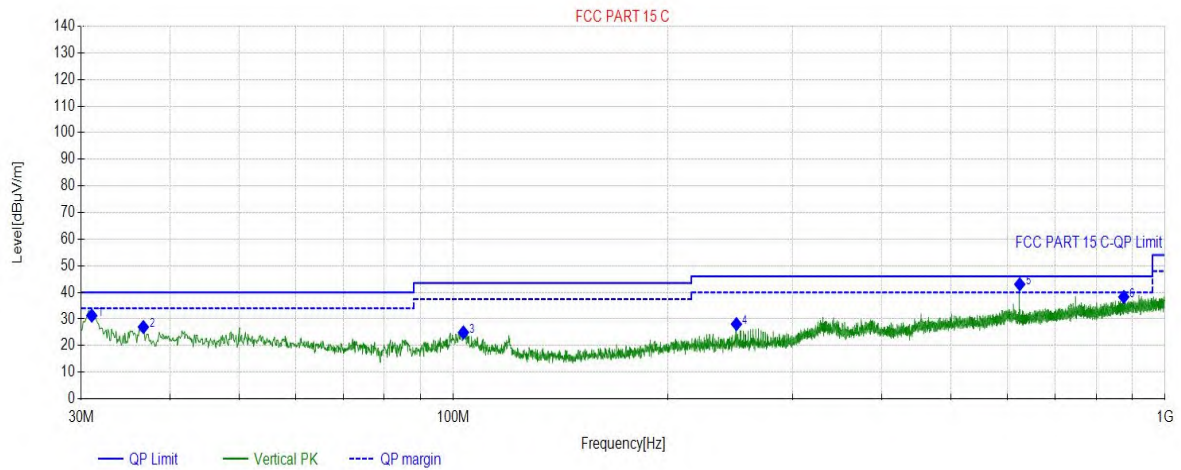

QP Final Data List

NO.	Freq. (MHz)	Factor (dB)	QP Value (dBµV/m)	QP Limit (dBµV/m)	QP Margin (dB)	Height (cm)	Angle (°)	Polarity
1	31.0540	19.01	31.28	40.00	8.72	100	232.2	Vertical
2	36.6937	20.43	27.00	40.00	13.00	100	360	Vertical
3	103.339	20.58	24.96	43.50	18.54	100	360	Vertical
4	249.921	21.54	28.11	46.00	17.89	100	360	Vertical
5	625.057	30.39	43.05	46.00	2.95	100	360	Vertical
6	875.051	33.98	38.31	46.00	7.69	100	360	Vertical


APPENDIX B – Radiated Emission Above 1GHz Test Data

Test Report

Project Information			
EUT:	Clevershare Hub Clever Hub	Environment:	24.2°C 54%
Model:	CleverHub	SN:	
Mode:	DH5_2402	Voltage:	120V 60Hz
Customer:		Engineer:	Roger
Remark:			

Start of Test: 2023-07-11 10:37:28

Test Graph

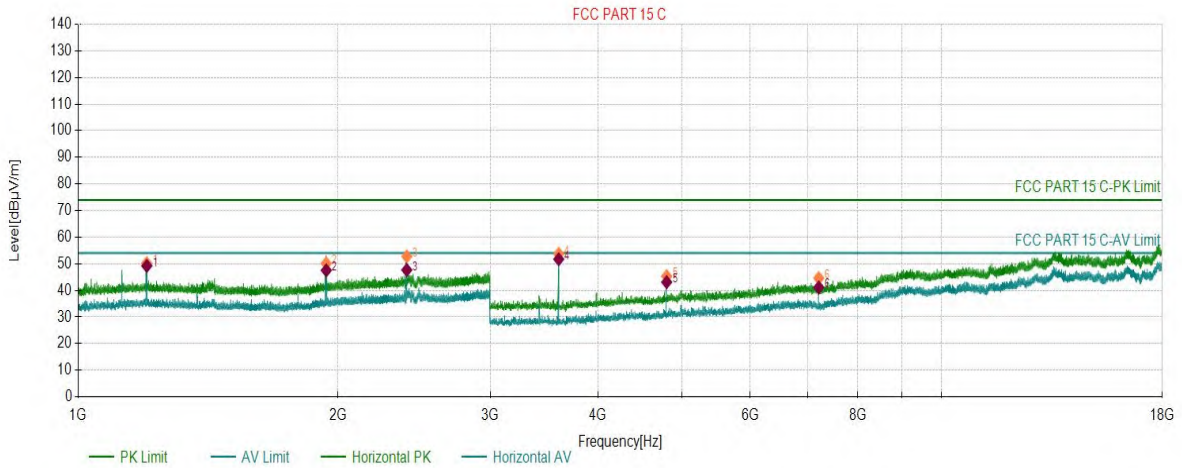

PK Final Data List								
NO.	Freq. (MHz)	Factor (dB)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1200.9100	2.58	50.19	74.00	23.81	150	22	Horizontal
2	1937.9469	4.42	50.12	74.00	23.88	150	319	Horizontal
3	2402.0701	7.43	52.77	74.00	21.23	150	289	Horizontal
4	3602.2801	-15.53	53.71	74.00	20.29	150	13	Horizontal
5	4803.8402	-9.95	45.31	74.00	28.69	150	348	Horizontal
6	7206.2103	-2.58	44.59	74.00	29.41	150	42	Horizontal


AV Final Data List								
NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1200.9100	2.58	49.21	54.00	4.79	150	22	Horizontal
2	1937.9469	4.42	47.54	54.00	6.46	150	319	Horizontal
3	2402.0701	7.43	47.67	54.00	6.33	150	289	Horizontal
4	3602.2801	-15.53	51.73	54.00	2.27	150	13	Horizontal
5	4803.8402	-9.95	43.10	54.00	10.90	150	348	Horizontal
6	7206.2103	-2.58	41.11	54.00	12.89	150	42	Horizontal

Test Report

Project Information			
EUT:	Clevershare Hub Clever Hub	Environment:	24.2°C 54%
Model:	CleverHub	SN:	
Mode:	DH5_2402	Voltage:	120V 60Hz
Customer:		Engineer:	Roger
Remark:			

Start of Test: 2023-07-11 10:39:06

Test Graph

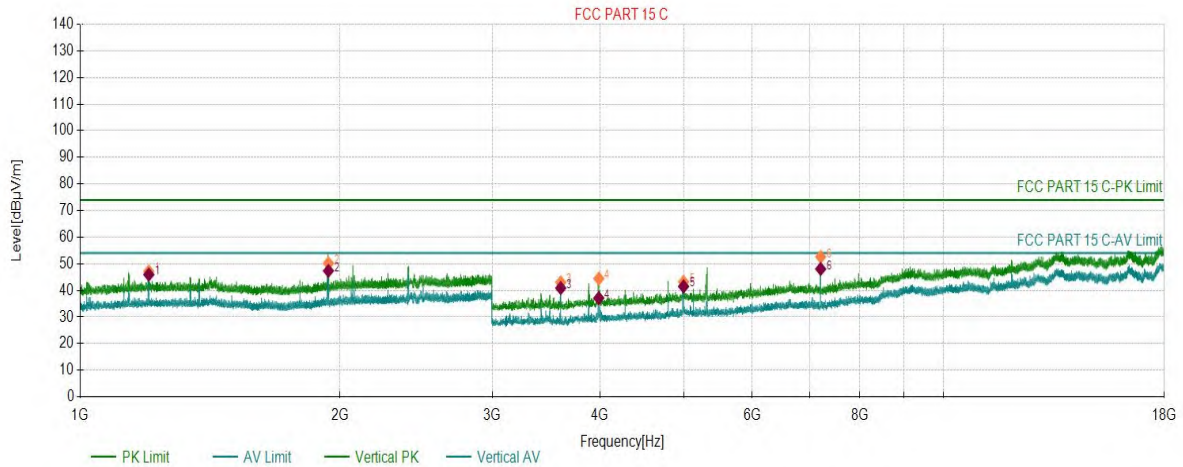

PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1201.0101	2.58	47.17	74.00	26.83	150	346	Vertical
2	1938.8469	4.62	50.18	74.00	23.82	150	197	Vertical
3	3602.2801	-15.53	43.01	74.00	30.99	150	302	Vertical
4	3987.0494	-13.24	44.44	74.00	29.56	150	172	Vertical
5	4998.0999	-8.52	43.22	74.00	30.78	150	243	Vertical
6	7205.4603	-2.61	52.62	74.00	21.38	150	34	Vertical

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1201.0101	2.58	45.93	54.00	8.07	150	346	Vertical
2	1938.8469	4.62	47.35	54.00	6.65	150	197	Vertical
3	3602.2801	-15.53	40.86	54.00	13.14	150	302	Vertical
4	3987.0494	-13.24	37.11	54.00	16.89	150	172	Vertical
5	4998.0999	-8.52	41.47	54.00	12.53	150	243	Vertical
6	7205.4603	-2.61	48.05	54.00	5.95	150	34	Vertical

Test Report

Project Information			
EUT:	Clevershare Hub Clever Hub	Environment:	24.2°C 54%
Model:	CleverHub	SN:	
Mode:	DH5_2441	Voltage:	120V 60Hz
Customer:		Engineer:	Roger
Remark:			

Start of Test: 2023-07-11 10:54:46

Test Graph

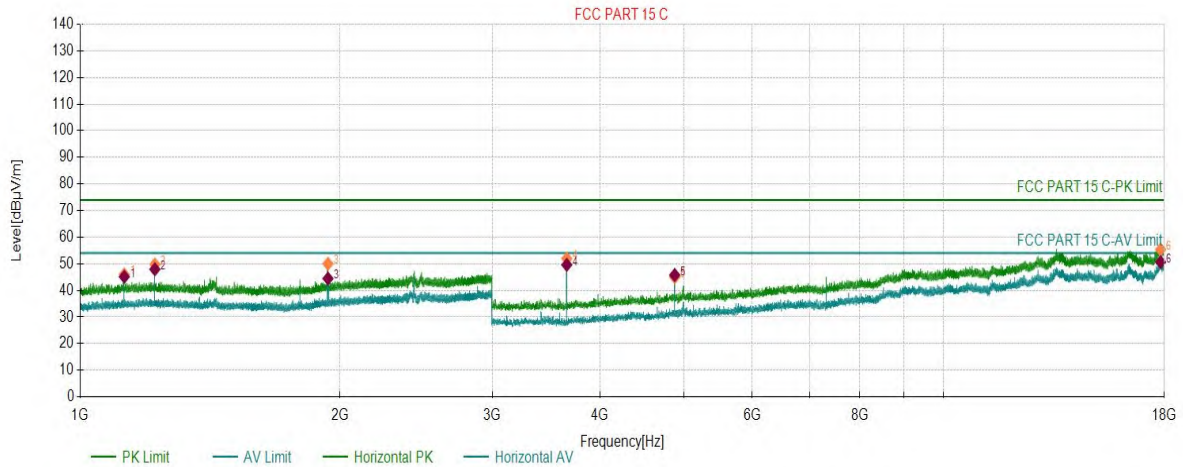

PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1125.0063	1.45	45.98	74.00	28.02	150	261	Horizontal
2	1220.5110	2.54	49.77	74.00	24.23	150	22	Horizontal
3	1936.5468	4.41	50.04	74.00	23.96	150	360	Horizontal
4	3660.7830	-14.99	51.94	74.00	22.06	150	3	Horizontal
5	4881.8441	-9.49	45.00	74.00	29.00	150	337	Horizontal
6	17833.4917	14.80	55.37	74.00	18.63	150	120	Horizontal

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1125.0063	1.45	45.12	54.00	8.88	150	261	Horizontal
2	1220.5110	2.54	47.94	54.00	6.06	150	22	Horizontal
3	1936.5468	4.41	44.45	54.00	9.55	150	360	Horizontal
4	3660.7830	-14.99	49.59	54.00	4.41	150	3	Horizontal
5	4881.8441	-9.49	45.77	54.00	8.23	150	337	Horizontal
6	17833.4917	14.80	50.65	54.00	3.35	150	120	Horizontal

Test Report

Project Information			
EUT:	Clevershare Hub Clever Hub	Environment:	24.2°C 54%
Model:	CleverHub	SN:	
Mode:	DH5_2441	Voltage:	120V 60Hz
Customer:		Engineer:	Roger
Remark:			

Start of Test: 2023-07-11 10:58:35

Test Graph

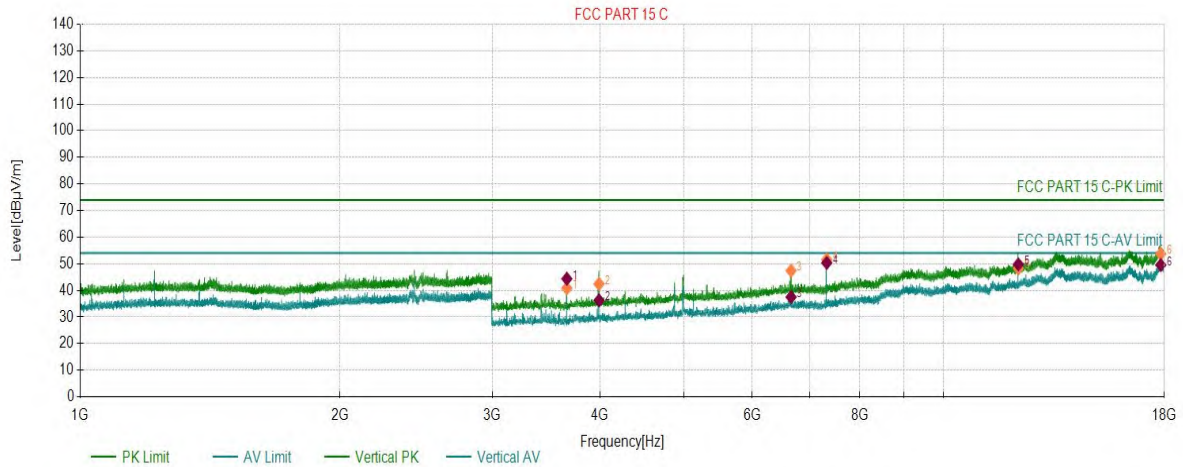

PK Final Data List

NO.	Freq. (MHz)	Factor (dB)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	3661.5331	-14.89	40.80	74.00	33.20	150	287	Vertical
2	3989.2995	-13.23	42.44	74.00	31.56	150	0	Vertical
3	6657.9329	-3.91	47.42	74.00	26.58	150	157	Vertical
4	7322.4661	-1.92	51.58	74.00	22.42	150	22	Vertical
5	12205.9603	6.39	48.25	74.00	25.75	150	22	Vertical
6	17843.2422	14.69	53.74	74.00	20.26	150	336	Vertical

AV Final Data List


NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	3661.5331	-14.89	44.36	54.00	9.64	150	287	Vertical
2	3989.2995	-13.23	36.26	54.00	17.74	150	0	Vertical
3	6657.9329	-3.91	37.49	54.00	16.51	150	157	Vertical
4	7322.4661	-1.92	50.33	54.00	3.67	150	22	Vertical
5	12205.9603	6.39	49.77	54.00	4.23	150	22	Vertical
6	17843.2422	14.69	49.53	54.00	4.47	150	336	Vertical

Test Report

Project Information			
EUT:	Clevershare Hub Clever Hub	Environment:	24.2°C 54%
Model:	CleverHub	SN:	
Mode:	DH5_2480	Voltage:	120V 60Hz
Customer:		Engineer:	Roger
Remark:			

Start of Test: 2023-07-11 11:18:17

Test Graph

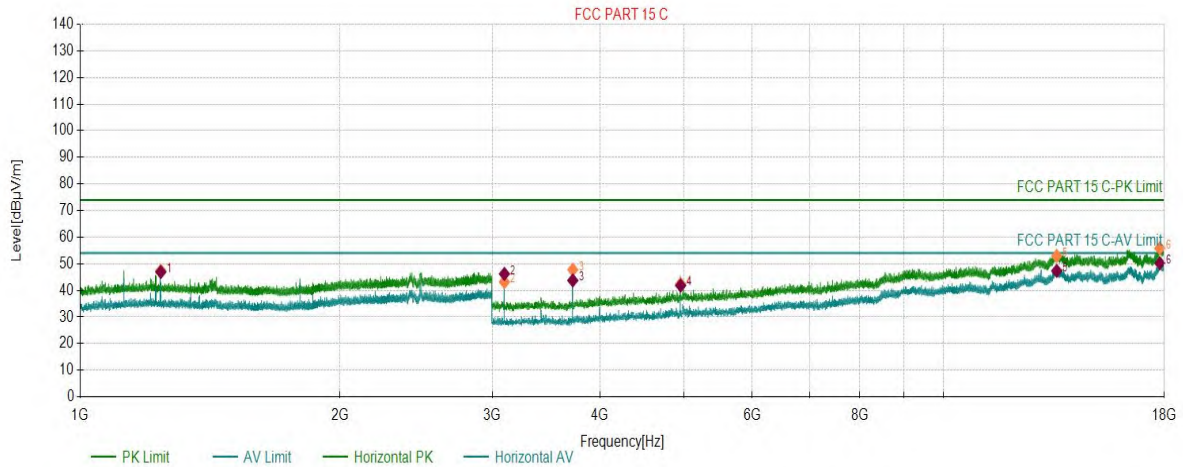

PK Final Data List								
NO.	Freq. (MHz)	Factor (dB)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1240.0120	2.51	47.40	74.00	26.60	150	33	Horizontal
2	3099.7550	-15.99	43.16	74.00	30.84	150	100	Horizontal
3	3720.0360	-14.54	47.77	74.00	26.23	150	0	Horizontal
4	4959.8480	-8.97	42.42	74.00	31.58	150	337	Horizontal
5	13520.7760	10.72	52.91	74.00	21.09	150	248	Horizontal
6	17797.4899	14.60	55.82	74.00	18.18	150	170	Horizontal


AV Final Data List								
NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	1240.0120	2.51	46.91	54.00	7.09	150	33	Horizontal
2	3099.7550	-15.99	46.21	54.00	7.79	150	100	Horizontal
3	3720.0360	-14.54	43.75	54.00	10.25	150	0	Horizontal
4	4959.8480	-8.97	41.83	54.00	12.17	150	337	Horizontal
5	13520.7760	10.72	47.35	54.00	6.65	150	248	Horizontal
6	17797.4899	14.60	50.23	54.00	3.77	150	170	Horizontal

Test Report

Project Information			
EUT:	Clevershare Hub Clever Hub	Environment:	24.2°C 54%
Model:	CleverHub	SN:	
Mode:	DH5_2480	Voltage:	120V 60Hz
Customer:		Engineer:	Roger
Remark:			

Start of Test: 2023-07-11 11:19:55

Test Graph

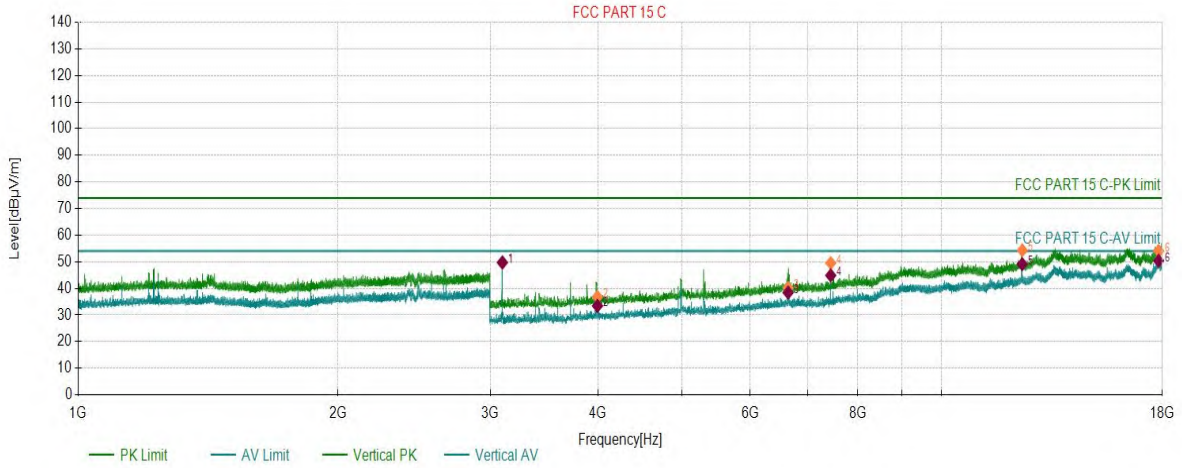

PK Final Data List								
NO.	Freq. (MHz)	Factor (dB)	PK Value (dBµV/m)	PK Limit (dBµV/m)	PK Margin (dB)	Height (cm)	Angle (°)	Polarity
1	3099.7550	-16.19	49.60	74.00	24.40	150	89	Vertical
2	3993.7997	-13.21	36.83	74.00	37.17	150	198	Vertical
3	6641.4321	-3.92	40.15	74.00	33.85	150	158	Vertical
4	7440.2220	-1.80	49.52	74.00	24.48	150	358	Vertical
5	12399.4700	7.00	54.34	74.00	19.66	150	21	Vertical
6	17834.2417	14.64	54.08	74.00	19.92	150	89	Vertical


AV Final Data List								
NO.	Freq. (MHz)	Factor (dB)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	3099.7550	-16.19	49.78	54.00	4.22	150	89	Vertical
2	3993.7997	-13.21	33.44	54.00	20.56	150	198	Vertical
3	6641.4321	-3.92	38.42	54.00	15.58	150	158	Vertical
4	7440.2220	-1.80	44.88	54.00	9.12	150	358	Vertical
5	12399.4700	7.00	49.10	54.00	4.90	150	21	Vertical
6	17834.2417	14.64	50.38	54.00	3.62	150	89	Vertical

Test Report

Project Information			
EUT:	Clevershare Hub Clever Hub	Environment:	24.2°C 54%
Model:	CleverHub	SN:	
Mode:	DH5_2402	Voltage:	120V 60Hz
Customer:		Engineer:	Roger
Remark:			

Start of Test: 2023-07-11 10:34:50

Test Graph

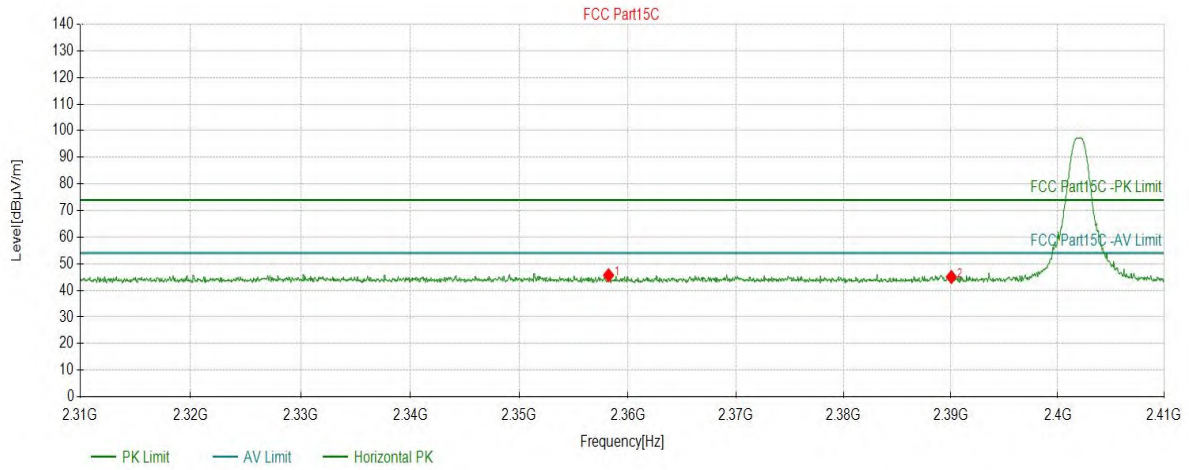


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2358.2241	45.69	5.96	74.00	28.31	150	33	PK	Horizont
2	2390.0400	45.05	5.94	74.00	28.95	150	71	PK	Horizont

Test Report

Project Information			
EUT:	Clevershare Hub Clever Hub	Environment:	24.2°C 54%
Model:	CleverHub	SN:	
Mode:	DH5_2402	Voltage:	120V 60Hz
Customer:		Engineer:	Roger
Remark:			

Start of Test: 2023-07-11 10:35:35

Test Graph

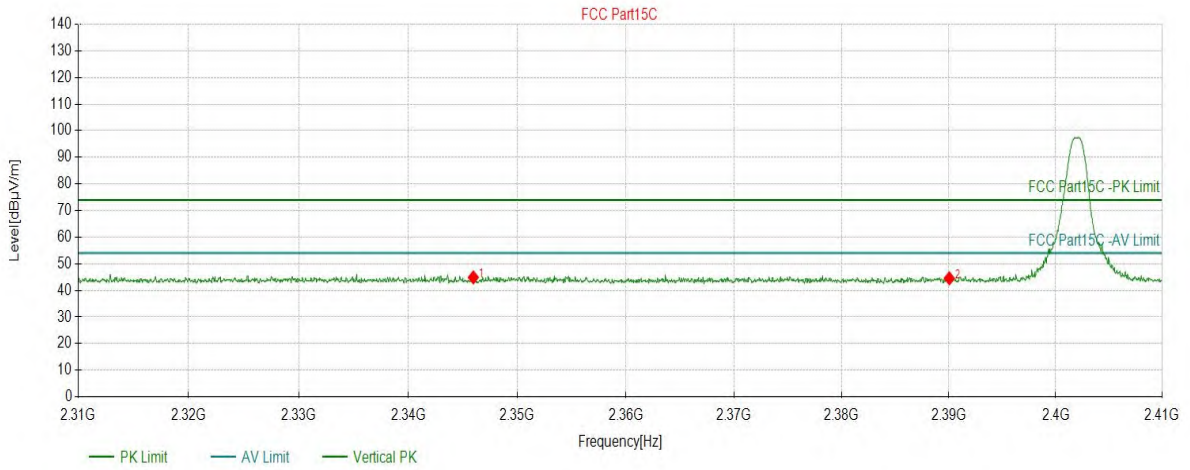

Suspected Data List


NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2345.9680	44.89	5.72	74.00	29.11	150	360	PK	Vertical
2	2390.0400	44.52	5.65	74.00	29.48	150	119	PK	Vertical

Test Report

Project Information			
EUT:	Clevershare Hub Clever Hub	Environment:	24.2°C 54%
Model:	CleverHub	SN:	
Mode:	DH5_2480	Voltage:	120V 60Hz
Customer:		Engineer:	Roger
Remark:			

Start of Test: 2023-07-11 11:07:43

Test Graph

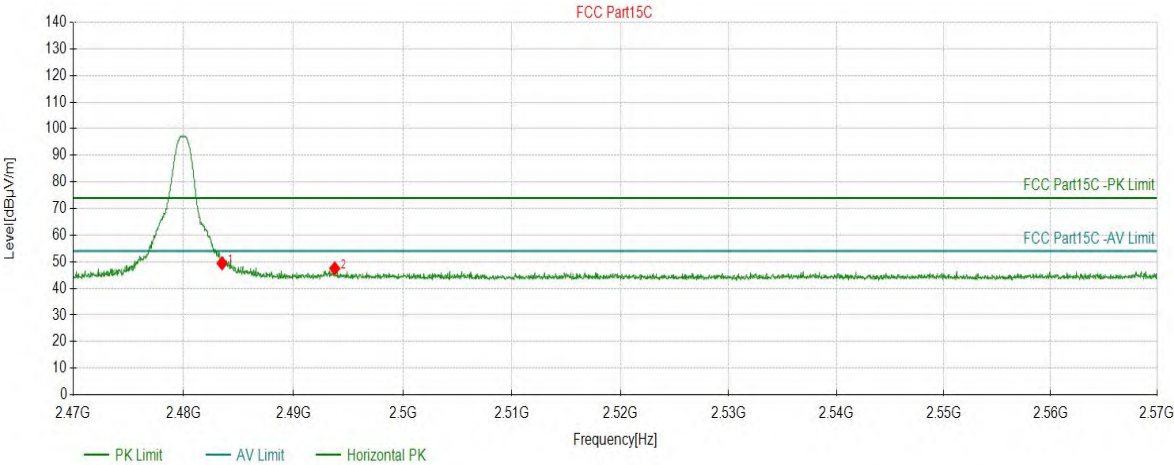


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5045	49.45	6.37	74.00	24.55	150	308	PK	Horizont
2	2493.7746	47.50	6.43	74.00	26.50	150	293	PK	Horizont

Test Report

Project Information			
EUT:	Clevershare Hub Clever Hub	Environment:	24.2°C 54%
Model:	CleverHub	SN:	
Mode:	DH5_2480	Voltage:	120V 60Hz
Customer:		Engineer:	Roger
Remark:			

Start of Test: 2023-07-11 11:08:27

Test Graph

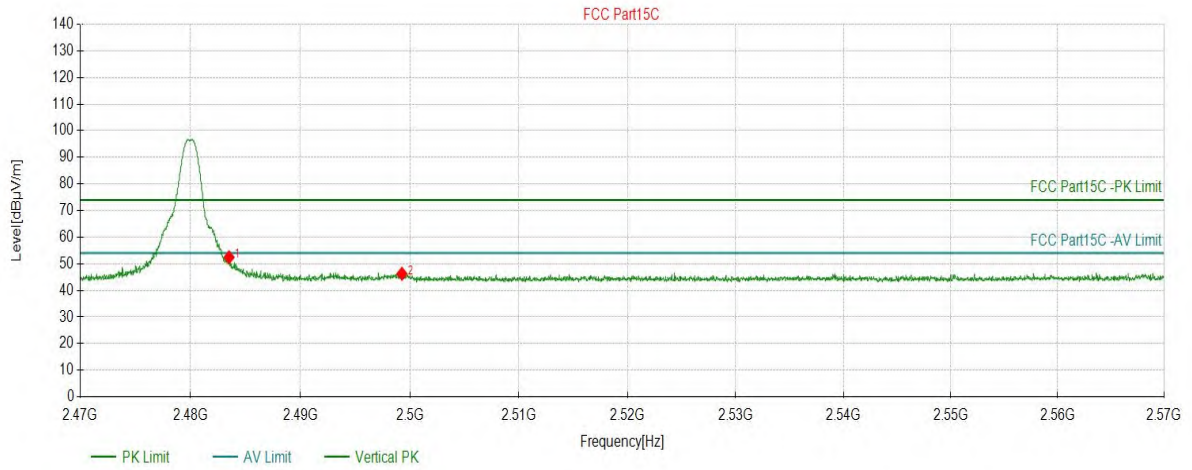

Suspected Data List


NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5045	52.44	6.28	74.00	21.56	150	33	PK	Vertical
2	2499.2764	46.27	6.40	74.00	27.73	150	37	PK	Vertical

Test Report

Project Information			
EUT:	Clevershare Hub Clever Hub	Environment:	24.2°C 54%
Model:	CleverHub	SN:	
Mode:	2DH5_2402	Voltage:	120V 60Hz
Customer:		Engineer:	Roger
Remark:			

Start of Test: 2023-07-11 11:12:32

Test Graph

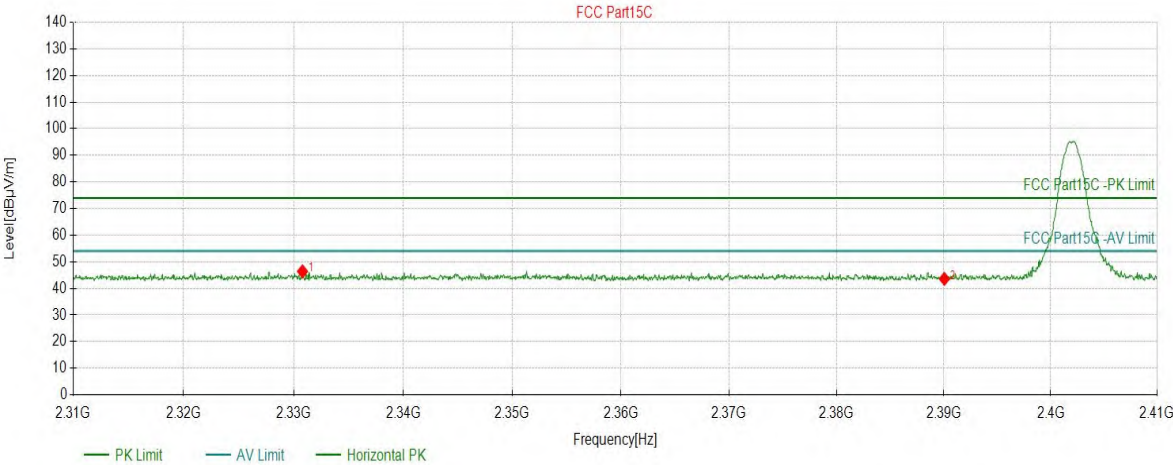


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2330.8104	46.39	5.97	74.00	27.61	150	3	PK	Horizont
2	2390.0400	43.60	5.94	74.00	30.40	150	258	PK	Horizont

Test Report

Project Information			
EUT:	Clevershare Hub Clever Hub	Environment:	24.2°C 54%
Model:	CleverHub	SN:	
Mode:	2DH5_2402	Voltage:	120V 60Hz
Customer:		Engineer:	Roger
Remark:			

Start of Test: 2023-07-11 11:13:16

Test Graph

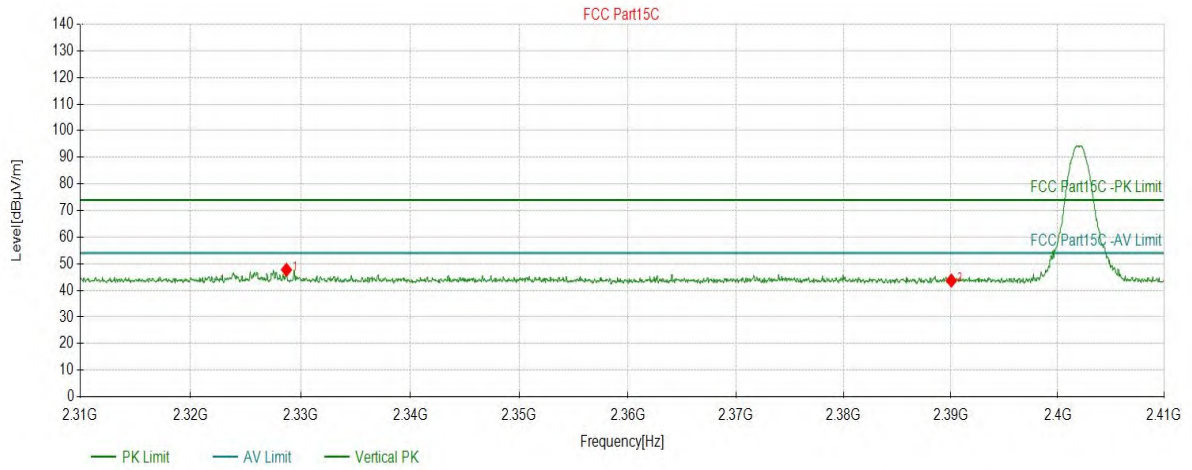

Suspected Data List


NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2328.7094	47.74	5.75	74.00	26.26	150	89	PK	Vertical
2	2390.0400	43.68	5.65	74.00	30.32	150	80	PK	Vertical

Test Report

Project Information			
EUT:	Clevershare Hub Clever Hub	Environment:	24.2°C 54%
Model:	CleverHub	SN:	
Mode:	2DH5_2480	Voltage:	120V 60Hz
Customer:		Engineer:	Roger
Remark:			

Start of Test: 2023-07-11 11:15:02

Test Graph

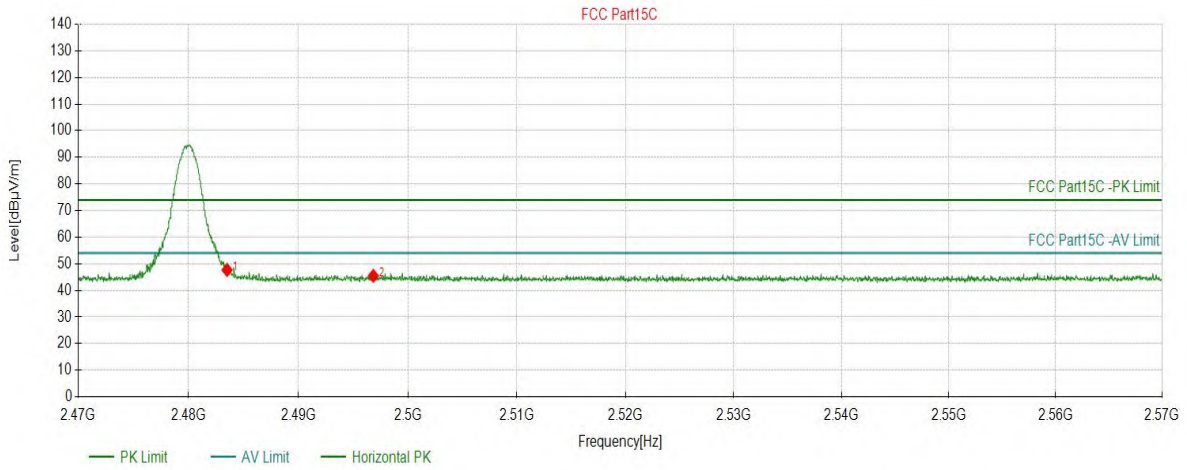


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5045	47.69	6.37	74.00	26.31	150	289	PK	Horizont
2	2496.8423	45.48	6.44	74.00	28.52	150	260	PK	Horizont

Test Report

Project Information			
EUT:	Clevershare Hub Clever Hub	Environment:	24.2°C 54%
Model:	CleverHub	SN:	
Mode:	2DH5_2480	Voltage:	120V 60Hz
Customer:		Engineer:	Roger
Remark:			

Start of Test: 2023-07-11 11:15:55

Test Graph

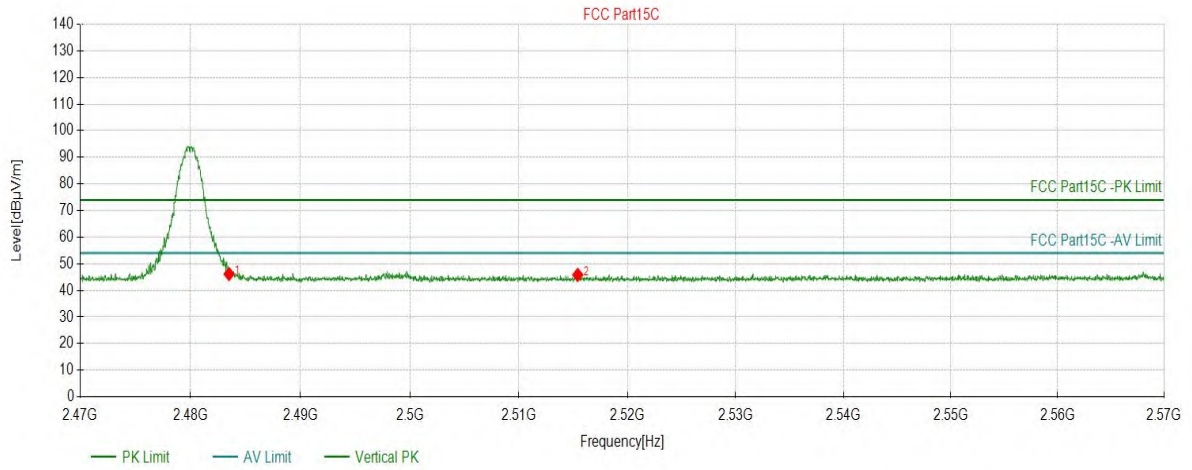


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5045	46.12	6.28	74.00	27.88	150	142	PK	Vertical
2	2515.4151	45.85	6.45	74.00	28.15	150	46	PK	Vertical

Test Report

Project Information			
EUT:	Clevershare Hub Clever Hub	Environment:	24.2°C 54%
Model:	CleverHub	SN:	
Mode:	3DH5_2402	Voltage:	120V 60Hz
Customer:		Engineer:	Roger
Remark:			

Start of Test: 2023-07-11 11:25:40

Test Graph

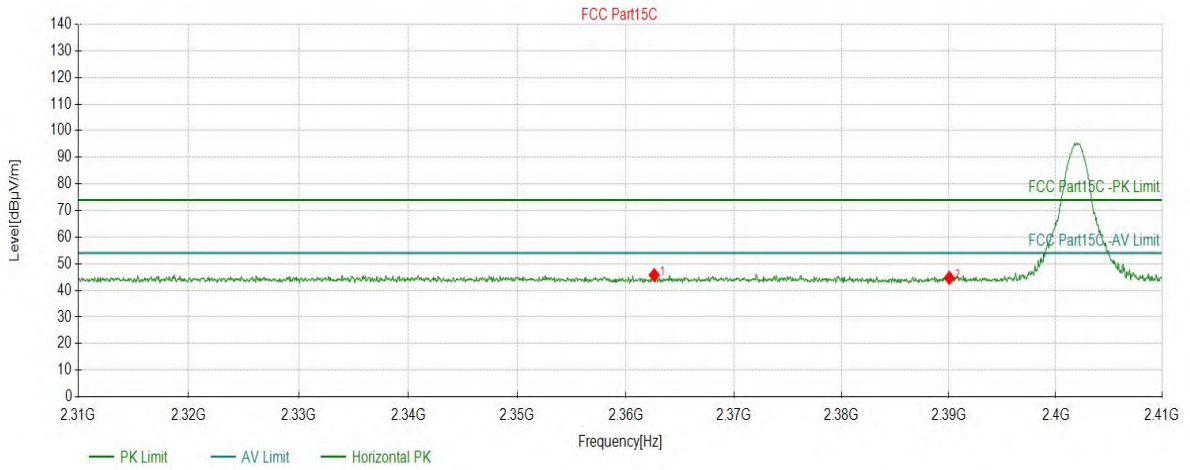

Suspected Data List


NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2362.6263	45.75	5.96	74.00	28.25	150	52	PK	Horizont
2	2390.0400	44.69	5.94	74.00	29.31	150	314	PK	Horizont

Test Report

Project Information			
EUT:	Clevershare Hub Clever Hub	Environment:	24.2°C 54%
Model:	CleverHub	SN:	
Mode:	3DH5_2402	Voltage:	120V 60Hz
Customer:		Engineer:	Roger
Remark:			

Start of Test: 2023-07-11 11:26:25

Test Graph

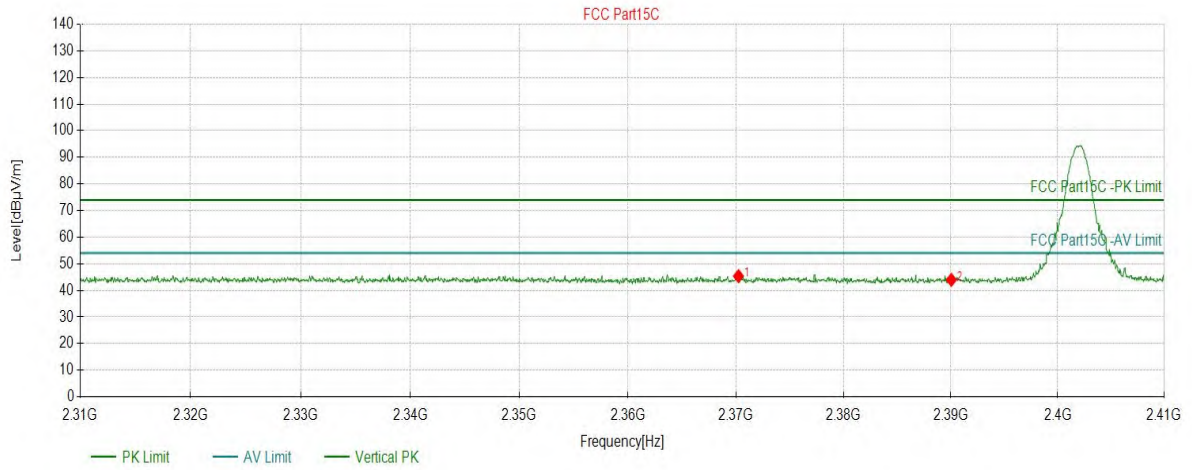


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2370.2301	45.37	5.68	74.00	28.63	150	2	PK	Vertical
2	2390.0400	43.96	5.65	74.00	30.04	150	166	PK	Vertical

Test Report

Project Information			
EUT:	Clevershare Hub Clever Hub	Environment:	24.2°C 54%
Model:	CleverHub	SN:	
Mode:	3DH5_2480	Voltage:	120V 60Hz
Customer:		Engineer:	Roger
Remark:			

Start of Test: 2023-07-11 11:28:10

Test Graph

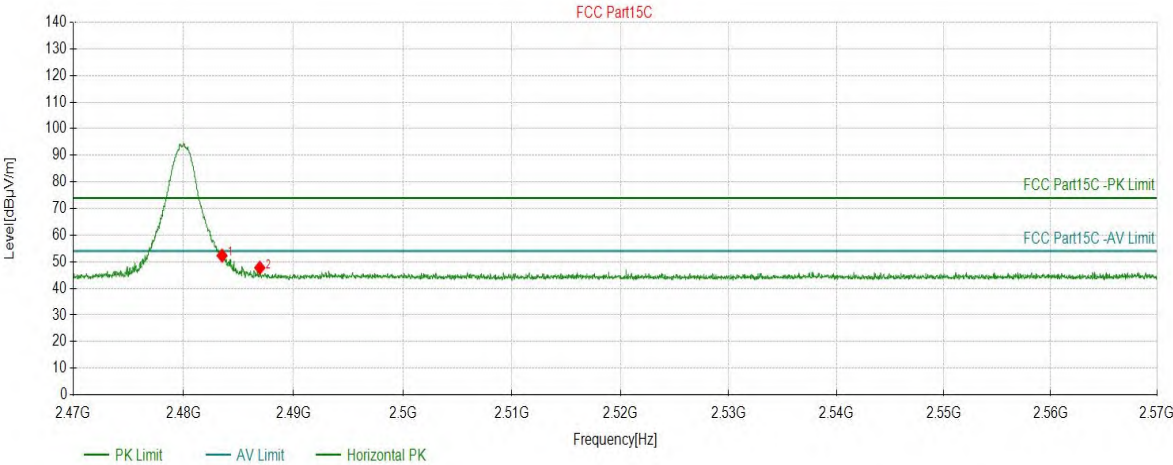


Suspected Data List									
NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5045	52.31	6.37	74.00	21.69	150	281	PK	Horizont
2	2486.9390	47.76	6.39	74.00	26.24	150	311	PK	Horizont

Test Report

Project Information			
EUT:	Clevershare Hub Clever Hub	Environment:	24.2°C 54%
Model:	CleverHub	SN:	
Mode:	3DH5_2480	Voltage:	120V 60Hz
Customer:		Engineer:	Roger
Remark:			

Start of Test: 2023-07-11 11:29:03


Test Graph

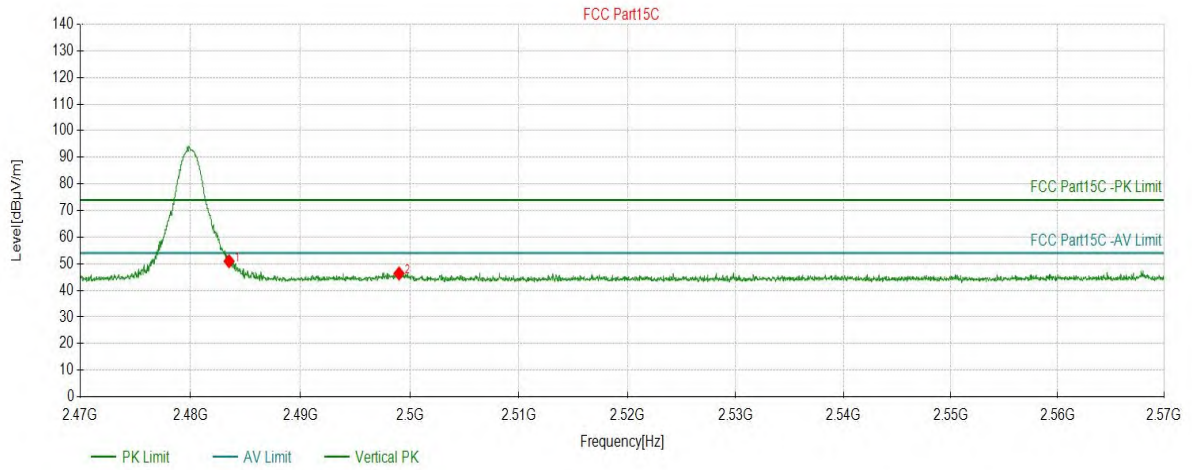

Suspected Data List

NO.	Freq. (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Detector	Polarity
1	2483.5045	50.95	6.28	74.00	23.05	150	251	PK	Vertical
2	2499.0097	46.36	6.40	74.00	27.64	150	0	PK	Vertical

APPENDIX C – AC Power Line Conducted Emission Test Data

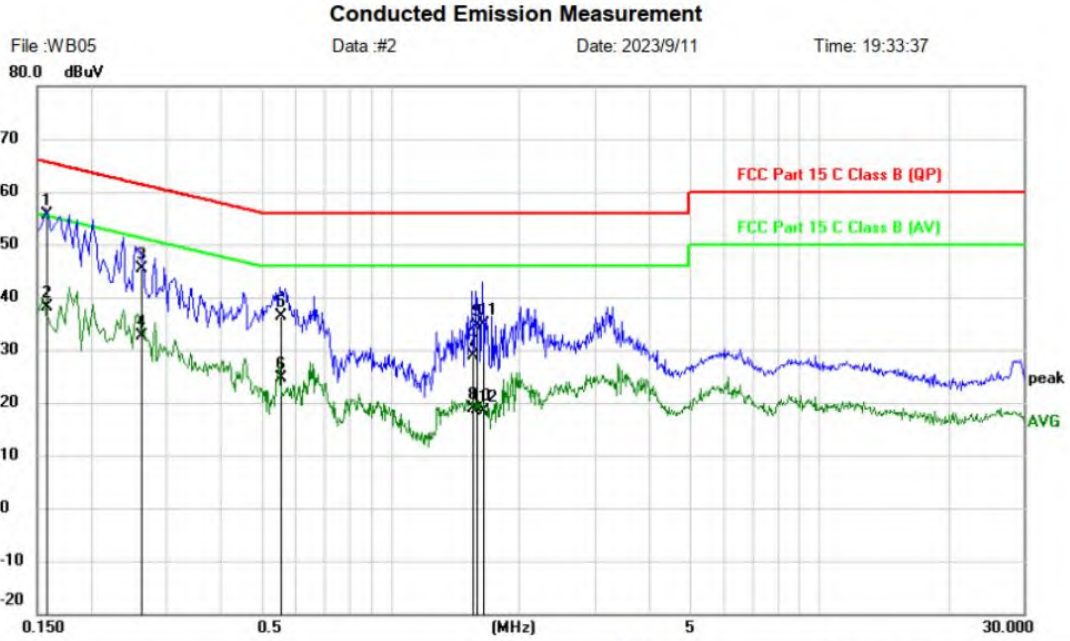

Site: _____ Phase: **L1** Temperature: 26
 Limit: FCC Part 15 C Class B (QP) Power: AC 120V/60Hz Humidity: 60 %
 EUT: Clever Hub CleverHub
 M/N: CleverHub
 Mode: BT Mode
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1580	45.92	9.64	55.56	65.57	-10.01	QP	
2		0.1580	28.56	9.64	38.20	55.57	-17.37	AVG	
3		0.2620	35.79	9.66	45.45	61.37	-15.92	QP	
4		0.2620	22.97	9.66	32.63	51.37	-18.74	AVG	
5		0.5540	26.67	9.77	36.44	56.00	-19.56	QP	
6		0.5540	14.74	9.77	24.51	46.00	-21.49	AVG	
7		1.5580	19.00	9.76	28.76	56.00	-27.24	QP	
8		1.5580	9.18	9.76	18.94	46.00	-27.06	AVG	
9		1.5900	24.84	9.76	34.60	56.00	-21.40	QP	
10		1.5900	8.90	9.76	18.66	46.00	-27.34	AVG	
11		1.6380	25.21	9.76	34.97	56.00	-21.03	QP	
12		1.6380	8.60	9.76	18.36	46.00	-27.64	AVG	

Conducted Emission Measurement



Site: _____ Phase: **N** Temperature: 26
 Limit: FCC Part 15 C Class B (QP) Power: AC 120V/60Hz Humidity: 60 %
 EUT: Clever Hub CleverHub
 M/N: CleverHub
 Mode: BT Mode
 Note: _____

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1580	45.64	9.65	55.29	65.57	-10.28	QP	
2		0.1580	28.05	9.65	37.70	55.57	-17.87	AVG	
3		0.2540	36.25	9.66	45.91	61.63	-15.72	QP	
4		0.2540	23.87	9.66	33.53	51.63	-18.10	AVG	
5		0.4500	28.03	9.71	37.74	56.88	-19.14	QP	
6		0.4500	17.46	9.71	27.17	46.88	-19.71	AVG	
7		0.6460	32.84	9.76	42.60	56.00	-13.40	QP	
8		0.6460	23.61	9.76	33.37	46.00	-12.63	AVG	
9		1.5940	23.78	9.75	33.53	56.00	-22.47	QP	
10		1.5940	5.66	9.75	15.41	46.00	-30.59	AVG	
11		1.6420	24.78	9.75	34.53	56.00	-21.47	QP	
12		1.6420	7.38	9.75	17.13	46.00	-28.87	AVG	

END OF REPORT