

## Supplemental “Transmit Simultaneously” Test Report (Spot Check)

**Report No.:** RF180830E03I-3

**FCC ID:** 2APLE18300403

**Original FCC ID:** 2APLE18300398

**Test Model:** VMB5000

**Received Date:** June 08, 2020

**Test Date:** July 18 to 20, 2020

**Issued Date:** Sep. 02, 2020

**Applicant:** Arlo Technologies, Inc.

**Address:** 2200 Faraday Ave. Suite 150, Carlsbad, CA 92008, United States

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan

**Test Location:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,  
Taiwan

**FCC Registration /  
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

<b>Release Control Record</b> .....	<b>3</b>
<b>1 Certificate of Conformity</b> .....	<b>4</b>
<b>2 Summary of Test Results</b> .....	<b>5</b>
2.1 Measurement Uncertainty.....	5
2.2 Modification Record.....	5
<b>3 General Information</b> .....	<b>6</b>
3.1 General Description of EUT.....	6
3.1.1 Test Mode Applicability and Tested Channel Detail.....	9
3.2 Description of Support Units.....	10
3.2.1 Configuration of System under Test.....	11
<b>4 Test Types and Results</b> .....	<b>12</b>
4.1 Radiated Emission and Bandedge Measurement.....	12
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	12
4.1.2 Test Instruments.....	13
4.1.3 Test Procedures.....	14
4.1.4 Deviation from Test Standard.....	14
4.1.5 Test Setup.....	15
4.1.6 EUT Operating Conditions.....	16
4.1.7 Test Results.....	17
4.2 Conducted Emission Measurement.....	20
4.2.1 Limits of Conducted Emission Measurement.....	20
4.2.2 Test Instruments.....	20
4.2.3 Test Procedures.....	21
4.2.4 Deviation from Test Standard.....	21
4.2.5 Test Setup.....	21
4.2.6 EUT Operating Conditions.....	21
4.2.7 Test Results.....	22
<b>5 Pictures of Test Arrangements</b> .....	<b>24</b>
<b>Appendix – Information of the Testing Laboratories</b> .....	<b>25</b>

### Release Control Record

Issue No.	Description	Date Issued
RF180830E03I-3	Original release.	Sep. 02, 2020

## 1 Certificate of Conformity

**Product:** Alro Gen5 Entry Hub

**Brand:** Arlo

**Test Model:** VMB5000

**Sample Status:** ENGINEERING SAMPLE

**Applicant:** Arlo Technologies, Inc.

**Test Date:** July 18 to 20, 2020

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)

47 CFR FCC Part 15, Subpart E (Section 15.407)

ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :** Phoenix Huang, **Date:** Sep. 02, 2020  
Phoenix Huang / Specialist

**Approved by :** Clark Lin, **Date:** Sep. 02, 2020  
Clark Lin / Technical Manager

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C, E (SECTION 15.247, 15.407)			
FCC Clause	Test Item	Result	Remarks
15.207 15.407(b)(6)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -13.28 dB at 0.15005 MHz.
15.205 / 15.209 / 15.247(d) 15.407(b) (1/2/3/4(i/ii)/6)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -5.5 dB at 65.50 MHz.

### Note:

Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.9 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.5 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.1 dB
	18GHz ~ 40GHz	5.3 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	Alro Gen5 Entry Hub
Brand	Arlo
Test Model	VMB5000
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	12Vdc from power adapter
Modulation Type	<b>WLAN:</b> CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode only <b>Sub-GHz:</b> O-QPSK
Modulation Technology	<b>WLAN:</b> DSSS, OFDM <b>Sub-GHz:</b> DSSS
Transfer Rate	<b>WLAN:</b> 802.11b: up to 11 Mbps 802.11a/g: up to 54 Mbps 802.11n: up to 300 Mbps 802.11ac: up to 866.7 Mbps <b>Sub-GHz:</b> 100 kbps
Operating Frequency	<b>WLAN:</b> <b>2.4GHz:</b> 2.412 ~ 2.462 GHz <b>5GHz:</b> 5.18 ~ 5.24 GHz, 5.26 ~ 5.32 GHz, 5.50 ~ 5.70 GHz, 5.745 ~ 5.825 GHz <b>Sub-GHz:</b> 915 MHz
Number of Channel	<b>WLAN:</b> <b>2.4GHz:</b> 802.11b, 802.11g, 802.11n (HT20): 11 802.11n (HT40): 7 <b>5GHz:</b> 802.11a, 802.11n (HT20), 802.11ac (VHT20): 24 802.11n (HT40), 802.11ac (VHT40): 11 802.11ac (VHT80): 2 <b>Sub-GHz:</b> 1
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x1
Data Cable Supplied	NA

Note:

- Exhibit prepared for Spot Check Verification report, the format, test items and amount of spot-check test data are decided by applicant's engineering judgment, for more details please refer to the declaration letter exhibit. (Original FCC ID: 2APLE18300398, Report No.: RF180830E03E-2)
- There are WLAN and Sub-GHz technology used for the EUT. The EUT has below radios as following table:

Radio 1	Radio 2
WLAN (2.4GHz+5GHz band)	Sub-GHz

## 3. Simultaneously transmission condition.

Condition	Technology		
1	WLAN 2.4GHz	WLAN 5GHz	Sub-GHz

## 4. The EUT must be supplied with a power adapter and following different models could be chosen as following table:

No.	Brand	Model No.	Spec.
1	Arlo	AD2076F10	Input: 100-120Vac, 0.56A, 50/60Hz Output: 12Vdc, 1.5A DC output cable (Unshielded, 1.8m)
2	Arlo	AD2067M20	Input: 100-240Vac, 1.0A, 50/60Hz Output: 12Vdc, 2.5A DC output cable (Unshielded, 1.8m)
3	Arlo	2ABB018F 1	Input: 100-120Vac, 0.6A, 50/60Hz Output: 12Vdc, 1.5A DC output cable (Unshielded, 1.8m)
4	Arlo	P030WM1251	Input: 100-240Vac, 1.0A, 50/60Hz Output: 12Vdc, 2.5A DC output cable (Unshielded, 1.8m)

Note: In original report, from the above models, the worst radiated emission and AC power conducted emission test was found in **Adapter 2**. Therefore only the test data of the modes were recorded in this report.

## 5. The antennas provided to the EUT, please refer to the following table:

Sub-GHz							
Ant No.	Brand	Model	Antenna Gain (dBi)	Frequency rang (MHz)	Antenna type	Connector type	
1	NA	902P00214N0	1.5	860~930	PIFA	NA	
WLAN							
Ant No.	Brand	Model	Antenna Net Gain (dBi)	Frequency rang (GHz)	Antenna type	Connector type	Cable Length (mm)
1	NA	9 07X01052X0	2.5	2.4~2.4835	Dipole	i-pec	75
			1.8	5.15~5.25			
			2	5.25~5.35			
			2.2	5.47~5.725			
			1.6	5.725~5.85			
2	NA	9 07X00747X19	2.5	2.4~2.4835	Dipole	i-pec	90
			2.2	5.15~5.25			
			1.2	5.25~5.35			
			3.2	5.47~5.725			
			3.5	5.725~5.85			

6. The EUT incorporates a MIMO function.

<b>2.4GHz Band</b>		
<b>MODULATION MODE</b>	<b>TX &amp; RX CONFIGURATION</b>	
<b>802.11b</b>	2TX	2RX
<b>802.11g</b>	2TX	2RX
<b>802.11n (HT20)</b>	2TX	2RX
<b>802.11n (HT40)</b>	2TX	2RX
<b>5GHz Band</b>		
<b>MODULATION MODE</b>	<b>TX &amp; RX CONFIGURATION</b>	
<b>802.11a</b>	2TX	2RX
<b>802.11n (HT20)</b>	2TX	2RX
<b>802.11n (HT40)</b>	2TX	2RX
<b>802.11ac (VHT20)</b>	2TX	2RX
<b>802.11ac (VHT40)</b>	2TX	2RX
<b>802.11ac (VHT80)</b>	2TX	2RX

7. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

8. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.



### 3.1.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO			DESCRIPTION
	RE $\geq$ 1G	RE $<$ 1G	PLC	
-	√	√	√	-

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz      **RE $<$ 1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission

#### **Radiated Emission Test (Above 1GHz):**

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
802.11b	1 to 11	6	OFDM	BPSK
+ 802.11ac (VHT20)	36 to 64, 100 to 140, 149 to 165	40	OFDM	BPSK
+ Sub-GHz	1	1	DSSS	O-QPSK

#### **Radiated Emission Test (Below 1GHz):**

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
802.11b	1 to 11	6	OFDM	BPSK
+ 802.11ac (VHT20)	36 to 64, 100 to 140, 149 to 165	40	OFDM	BPSK
+ Sub-GHz	1	1	DSSS	O-QPSK

#### **Power Line Conducted Emission Test:**

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
802.11b	1 to 11	6	OFDM	BPSK
+ 802.11ac (VHT20)	36 to 64, 100 to 140, 149 to 165	40	OFDM	BPSK
+ Sub-GHz	1	1	DSSS	O-QPSK

#### **Test Condition:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	25deg. C, 75%RH	120Vac, 60Hz	Ryan Du
RE $<$ 1G	23deg. C, 68%RH	120Vac, 60Hz	Ryan Du
PLC	25deg. C, 70%RH	120Vac, 60Hz	Sampson Chen

### 3.2 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Micro SD Card	SanDisk	8GB	NA	NA	Provided by Lab
B.	Laptop	DELL	E6420	B92T3R1	FCC DoC	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.8	No	0	Supplied by client
2.	RJ-45 Cable	1	10	No	0	Provided by Lab

### 3.2.1 Configuration of System under Test

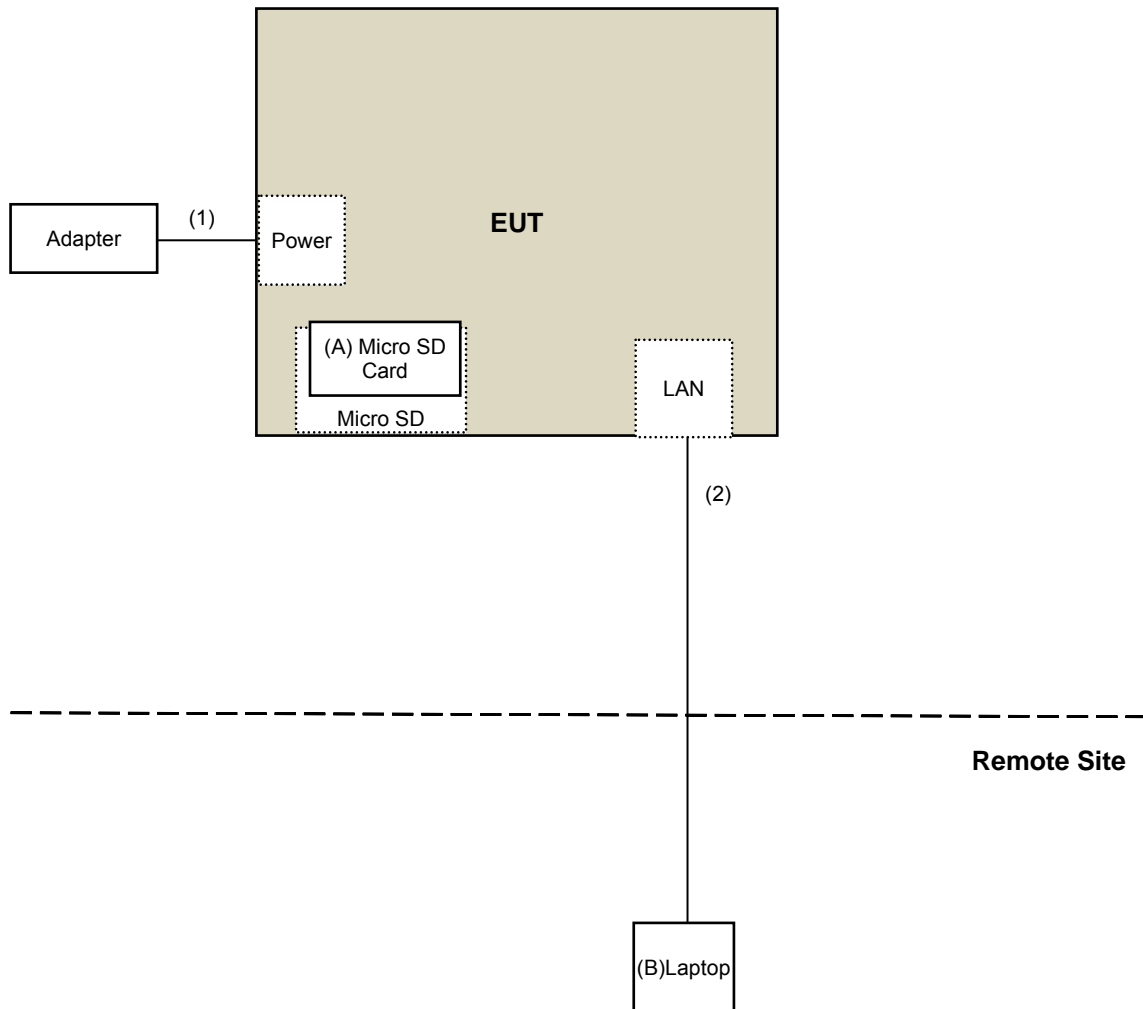

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**Note:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v02r01		Field Strength at 3m	
		PK:74 (dBµV/m)	AV:54 (dBµV/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBµV/m)
5250~5350 MHz	15.407(b)(2)		
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	15.407(b)(4)(i)	PK:-27 (dBm/MHz) <sup>*1</sup> PK:10 (dBm/MHz) <sup>*2</sup> PK:15.6 (dBm/MHz) <sup>*3</sup> PK:27 (dBm/MHz) <sup>*4</sup>	PK: 68.2(dBµV/m) <sup>*1</sup> PK:105.2 (dBµV/m) <sup>*2</sup> PK: 110.8(dBµV/m) <sup>*3</sup> PK:122.2 (dBµV/m) <sup>*4</sup>
<sup>*1</sup> beyond 75 MHz or more above of the band edge. <sup>*3</sup> below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.		<sup>*2</sup> below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above. <sup>*4</sup> from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

**Note:**

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

#### 4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY51210202	Dec. 13, 2019	Dec. 12, 2020
Pre-Amplifier EMCI	EMC001340	980142	May 25, 2020	May 24, 2021
Loop Antenna Electro-Metrics	EM-6879	264	Feb. 18, 2020	Feb. 17, 2021
RF Cable	NA	LOOPCAB-001	Jan. 08, 2020	Jan. 07, 2021
RF Cable	NA	LOOPCAB-002	Jan. 08, 2020	Jan. 07, 2021
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Oct. 23, 2019	Oct. 22, 2020
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Nov. 11, 2019	Nov. 10, 2020
RF Cable	8D	966-4-1	Mar. 18, 2020	Mar. 17, 2021
RF Cable	8D	966-4-2	Mar. 18, 2020	Mar. 17, 2021
RF Cable	8D	966-4-3	Mar. 18, 2020	Mar. 17, 2021
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Sep. 26, 2019	Sep. 25, 2020
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Nov. 24, 2019	Nov. 23, 2020
Pre-Amplifier EMCI	EMC 12630 SE	980638	Apr. 08, 2020	Apr. 07, 2021
RF Cable	EMC104-SM-SM-1200	160923	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-2000	180502	Apr. 29, 2020	Apr. 28, 2021
RF Cable	EMC104-SM-SM-6000	180418	Apr. 29, 2020	Apr. 28, 2021
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 15, 2020	Jan. 14, 2021
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
RF Cable	EMC102-KM-KM-1200	160924	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC-KM-KM-4000	200214	Mar. 11, 2020	Mar. 10, 2021
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Tested Date: July 18, 2020

#### 4.1.3 Test Procedures

##### **For Radiated emission below 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### **Note:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

##### **For Radiated emission above 30MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

##### **Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Setup


##### For Radiated emission below 30MHz

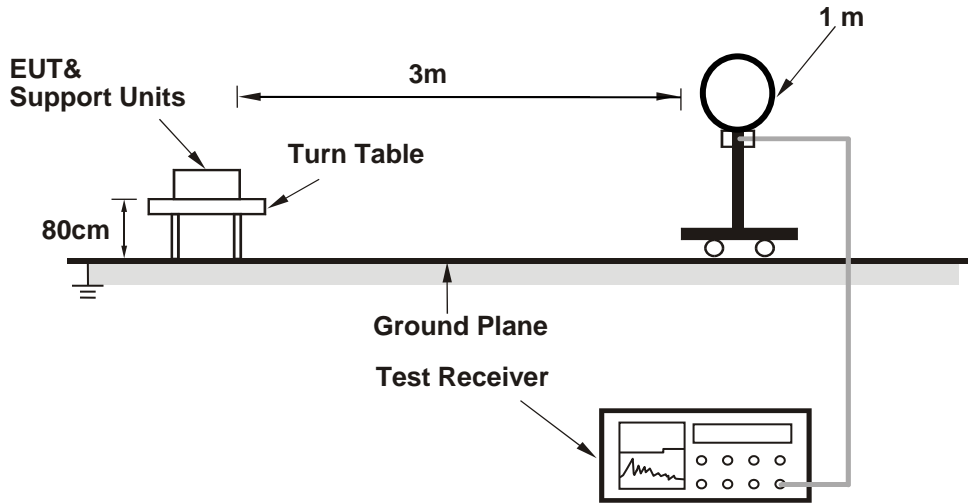

##### For Radiated emission 30MHz to 1GHz

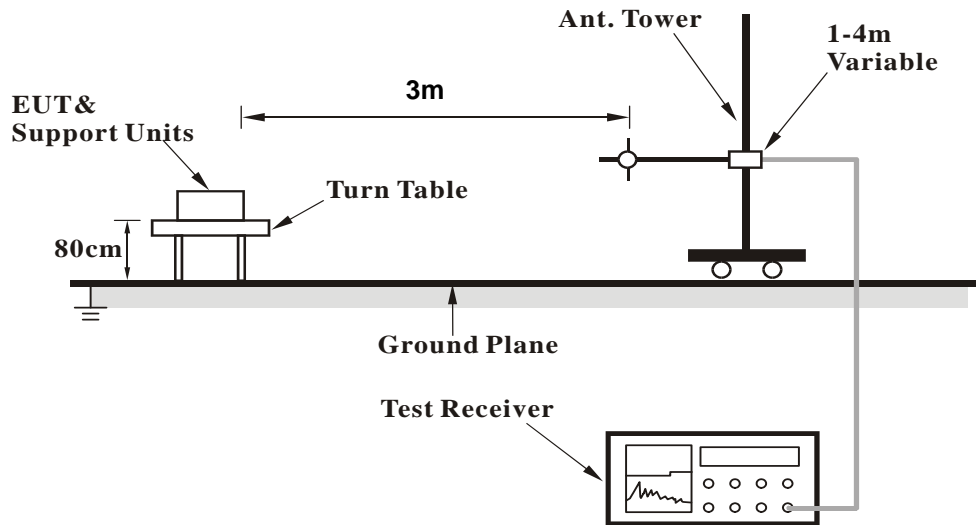

### For Radiated emission above 1GHz

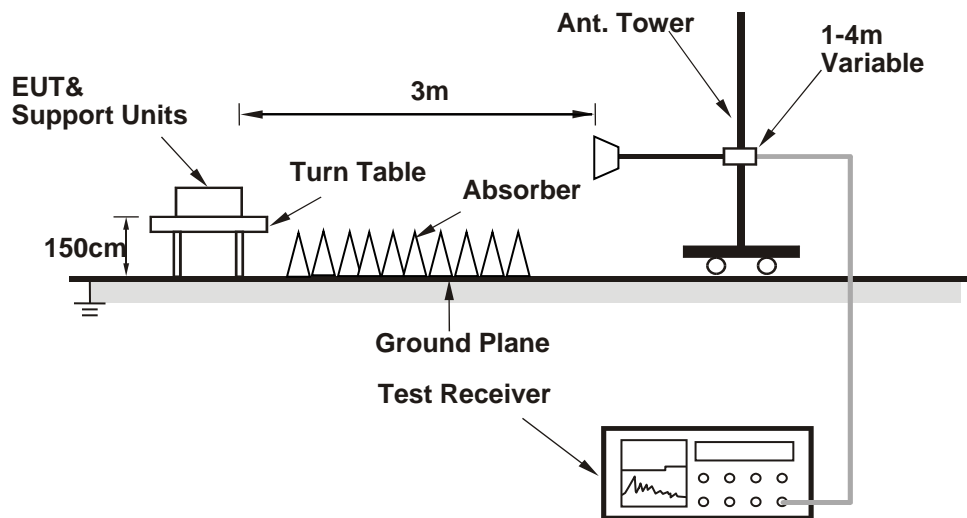

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- Connected the EUT with the Laptop which is placed on remote site.
- Controlling software (WLAN: QDART-connectivity (1.0.40) / Sub-GHz: cmd.exe paste command) has been activated to set the EUT on specific status.



## 4.1.7 Test Results

## Above 1GHz Data

<b>Frequency Range</b>	1GHz ~ 40GHz	<b>Detector Function</b>	Peak (PK) Average (AV)
------------------------	--------------	--------------------------	---------------------------

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2745.00	41.3 PK	74.0	-32.7	1.53 H	218	42.8	-1.5
2	2745.00	37.2 AV	54.0	-16.8	1.53 H	218	38.7	-1.5
3	3660.00	50.0 PK	74.0	-24.0	1.52 H	16	50.1	-0.1
4	3660.00	47.5 AV	54.0	-6.5	1.52 H	16	47.6	-0.1
5	4874.00	43.8 PK	74.0	-30.2	1.90 H	115	41.7	2.1
6	4874.00	31.5 AV	54.0	-22.5	1.90 H	115	29.4	2.1
7	7311.00	44.4 PK	74.0	-29.6	1.46 H	226	35.3	9.1
8	7311.00	33.0 AV	54.0	-21.0	1.46 H	226	23.9	9.1
9	10400.00	51.8 PK	68.2	-16.4	1.54 H	300	38.5	13.3
10	15600.00	55.4 PK	74.0	-18.6	1.69 H	183	41.5	13.9
11	15600.00	41.7 AV	54.0	-12.3	1.69 H	183	27.8	13.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2745.00	38.6 PK	74.0	-35.4	1.25 V	52	40.1	-1.5
2	2745.00	31.3 AV	54.0	-22.7	1.25 V	52	32.8	-1.5
3	3660.00	48.1 PK	74.0	-25.9	1.55 V	90	48.2	-0.1
4	3660.00	45.5 AV	54.0	-8.5	1.55 V	90	45.6	-0.1
5	4874.00	42.9 PK	74.0	-31.1	1.07 V	162	40.8	2.1
6	4874.00	30.7 AV	54.0	-23.3	1.07 V	162	28.6	2.1
7	7311.00	42.9 PK	74.0	-31.1	1.45 V	175	33.8	9.1
8	7311.00	30.8 AV	54.0	-23.2	1.45 V	175	21.7	9.1
9	10400.00	49.8 PK	68.2	-18.4	1.94 V	100	36.5	13.3
10	15600.00	55.1 PK	74.0	-18.9	1.66 V	234	41.2	13.9
11	15600.00	42.0 AV	54.0	-12.0	1.66 V	234	28.1	13.9

## Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.


### Below 1GHz Data:

<b>Frequency Range</b>	9kHz ~ 1GHz	<b>Detector Function</b>	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	64.26	29.5 QP	40.0	-10.5	2.00 H	135	38.4	-8.9
2	125.02	34.3 QP	43.5	-9.2	3.00 H	148	43.5	-9.2
3	217.67	32.3 QP	46.0	-13.7	1.50 H	187	43.0	-10.7
4	249.97	35.6 QP	46.0	-10.4	1.00 H	169	44.1	-8.5
5	347.56	27.7 QP	46.0	-18.3	1.50 H	241	33.1	-5.4
6	574.36	30.7 QP	46.0	-15.3	1.50 H	269	30.2	0.5

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

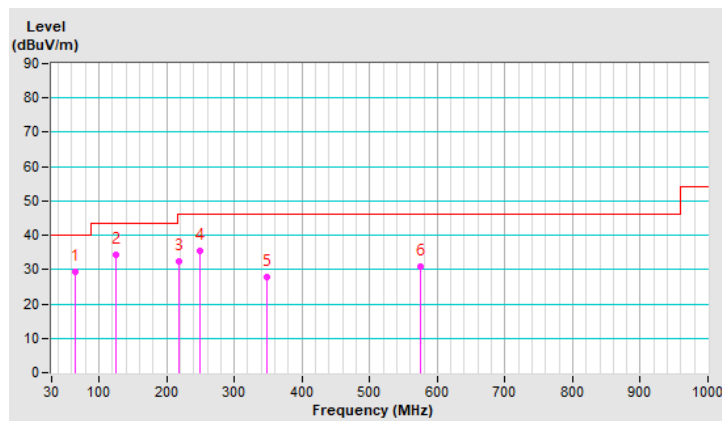


Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
-----------------	-------------	-------------------	-----------------

**Antenna Polarity & Test Distance : Vertical at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.67	33.5 QP	40.0	-6.5	1.00 V	134	41.8	-8.3
2	<b>65.50</b>	<b>34.5 QP</b>	<b>40.0</b>	<b>-5.5</b>	<b>1.00 V</b>	<b>124</b>	<b>43.8</b>	<b>-9.3</b>
3	124.98	37.2 QP	43.5	-6.3	1.00 V	139	46.4	-9.2
4	249.99	33.5 QP	46.0	-12.5	1.50 V	154	42.0	-8.5
5	302.25	28.5 QP	46.0	-17.5	1.00 V	298	34.9	-6.4
6	644.26	32.7 QP	46.0	-13.3	1.50 V	168	30.4	2.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

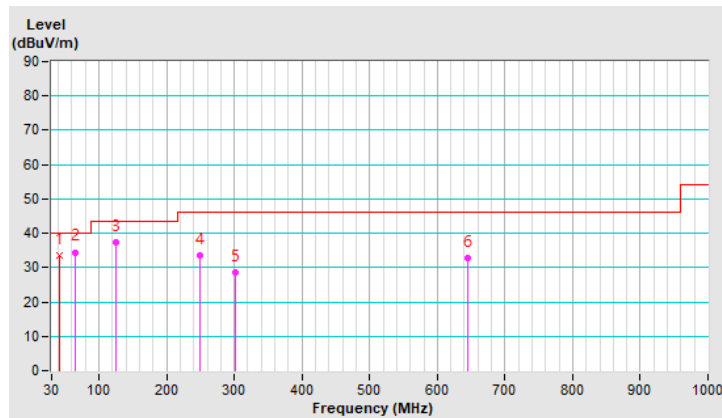

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	835239/001	Mar. 19, 2020	Mar. 18, 2021
50 ohms Terminator	50	3	Oct. 23, 2019	Oct. 22, 2020
RF Cable	5D-FB	COCCAB-001	Sep. 27, 2019	Sep. 26, 2020
Fixed attenuator EMCI	STI02-2200-10	005	Aug. 30, 2019	Aug. 29, 2020
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
- 3 Tested Date: July 20, 2020

#### 4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**Note:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

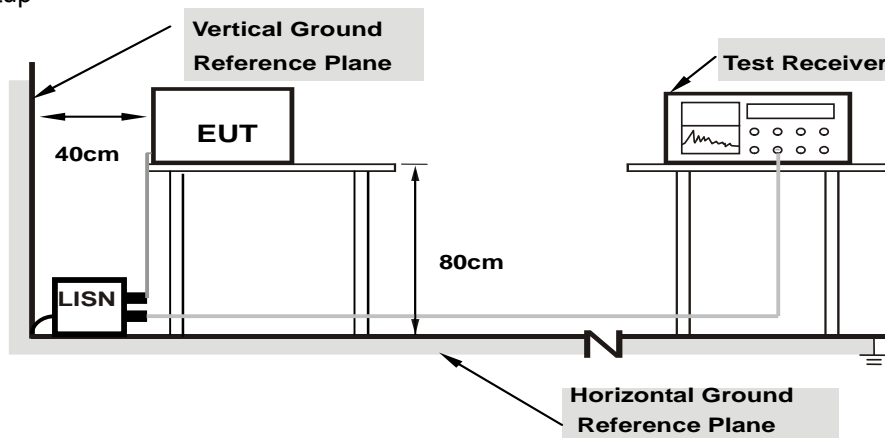

**Note:** 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

Same as 4.1.6.


#### 4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15005	9.98	42.52	25.95	52.50	35.93	66.00	56.00	-13.50	-20.07
2	0.18520	9.99	36.43	20.42	46.42	30.41	64.25	54.25	-17.83	-23.84
3	0.47415	10.01	28.31	21.50	38.32	31.51	56.44	46.44	-18.12	-14.93
4	0.91935	10.04	15.18	8.88	25.22	18.92	56.00	46.00	-30.78	-27.08
5	7.20712	10.48	24.38	19.38	34.86	29.86	60.00	50.00	-25.14	-20.14
6	11.22665	10.76	17.39	10.69	28.15	21.45	60.00	50.00	-31.85	-28.55

#### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

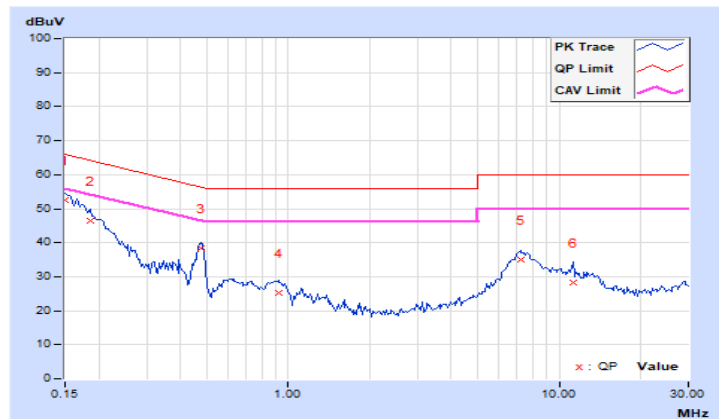


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15005	9.99	42.73	25.60	52.72	35.59	66.00	56.00	-13.28	-20.41
2	0.18505	10.00	36.89	19.73	46.89	29.73	64.26	54.26	-17.37	-24.53
3	0.37659	10.03	22.25	14.34	32.28	24.37	58.35	48.35	-26.07	-23.98
4	0.47435	10.04	29.24	22.15	39.28	32.19	56.44	46.44	-17.16	-14.25
5	3.99228	10.27	12.47	3.23	22.74	13.50	56.00	46.00	-33.26	-32.50
6	7.09385	10.44	20.75	15.92	31.19	26.36	60.00	50.00	-28.81	-23.64

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

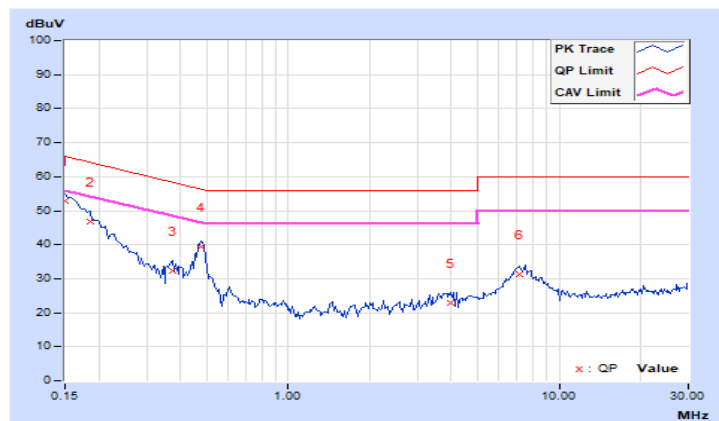

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).



## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---