

FCC CFR47 PART 22H, 24E, 27 CERTIFICATION TEST REPORT FCC ID: 2APMJBV6300PRO

Product: Smart Phone
Trade Mark: Blackview
Model Number: BV6300Pro
Family Model: N/A
Report No.: STR201102001006E

Prepared for

Shenzhen DOKE Electronic Co., Ltd
13th Floor, Weidonglong commercial building B, Meilong avenue,
Longhua New District, Shenzhen, China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street
Bao'an District, Shenzhen 518126 P.R. China
Tel. 400-800-6106, 0755-3699 5508
Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : Shenzhen DOKE Electronic Co., Ltd
Address..... : 13th Floor, Weidonglong commercial building B, Meilong avenue,
Longhua New District, Shenzhen, China
Manufacturer's Name..... : Shenzhen DOKE Electronic Co.,Ltd
Address..... : 8th floor, building 3, hanhaida science and technology innovation park,
yulv village, guangming new district, shenzhen city, guangdong province
Product name..... : Smart Phone
Model and/or type reference .. : BV6300Pro
Family Model: N/A
Standards..... : FCC CFR 47 Part 22H, Part 24E, Part 27
Test procedure ANSI C63.26:2015
ANSI/TIA-603-E-2016

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests..... 02 Nov. 2020 ~ 23 Nov. 2020

Date of Issue 23 Nov. 2020

Test Result **Pass**

Testing Engineer : Allen Liu
(Allen Liu)

Technical Manager : Jason Chen
(Jason Chen)

Authorized Signatory : Alex Li
(Alex Li)

TABLE OF CONTENTS

1.1 PRODUCT DESCRIPTION	6
1.2 RELATED SUBMITTAL(S) / GRANT (S)	7
1.3 TEST METHODOLOGY	7
1.4 TEST FACILITY	7
MEASUREMENT UNCERTAINTY	7
1.5 SPECIAL ACCESSORIES	7
1.6 WORST-CASE CONFIGURATION AND MODE	8
1.6 SUMMARY OF TEST RESULTS	8
2. SYSTEM TEST CONFIGURATION	10
2.1 EUT CONFIGURATION	10
2.2 EUT EXERCISE	10
2.3 CONFIGURATION OF EUT SYSTEM	10
2.4 TEST SETUP	11
3. TEST AND MEASUREMENT EQUIPMENT	12
4. OUTPUT POWER	14
4.1 OUTPUT POWER MEASUREMENT	14
6. BANDEDGE AND EMISSION MASK	17
7. OUT OF BAND EMISSIONS	18
7.1 MEASUREMENT METHOD	19
8. RADIATED MEASUREMENT	20
8.1. RADIATED POWER (ERP & EIRP)	20
8.2 LTE BAND 2	21
8.3 LTE BAND 4	25
8.4 LTE BAND 5	29
8.5 LTE BAND 7	31
8.5 LTE BAND 12	33

8.6 LTE BAND 17	35
9. SPURIOUS RADIATION EMISSION	37
9.1 LTE BAND 2.....	39
9.2 LTE BAND 4.....	41
9.3 LTE BAND 5.....	43
9.4 LTE BAND 7.....	45
9.5 LTE BAND 12	47
9.6 LTE BAND 17	49
10. FREQUENCY STABILITY	51
10.1 LTE BAND 2	52
10.2 LTE BAND 4	54
10.3 LTE BAND 5	56
10.4 LTE BAND 7	58
10.5 LTE BAND 12	60
10.6 LTE BAND 17	62
11. PEAK-TO-AVERAGE RATIO.....	64
11.1 Description of the PAR Measurement.....	64
11.2 Measuring Instruments.....	64
11.3 Test Procedures.....	64
11.4 Test Setup.....	64

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	Smart Phone
Trade Mark	Blackview
Model Name	BV6300Pro
Family Model	N/A
Model Difference	N/A
FCC ID:	2APMJBV6300PRO
Frequency Bands:	U.S. Bands: <input checked="" type="checkbox"/> LTE FDD Band 2, 4, 5, 7, 12, 17
Frequency Range:	LTE FDD Band 2 Uplink: 1850MHz-1910MHz, Downlink: 1930MHz-1990MHz; LTE FDD Band 4 Uplink: 1710MHz-1755MHz, Downlink: 2110MHz-2155MHz; LTE FDD Band 5 Uplink: 824MHz-849MHz, Downlink: 869MHz-894MHz; LTE-FDD Band 7 Uplink: 2500MHz-2570MHz, Downlink: 2620MHz-2690MHz; LTE FDD Band 12 Uplink: 699MHz-716MHz, Downlink: 729MHz-746MHz; LTE FDD Band 17 Uplink: 704MHz-716MHz, Downlink: 734MHz-746MHz;
Type of Modulation:	QPSK/16QAM
SIM Card	SIM 1 and SIM 2 is a chipset unit and tested as a single chipset. The SIM 1 is chosen for test.
Antenna:	PIFA Antenna
Antenna gain:	0.5dBi
power control level	LTE:Class 3
Power Supply:	<input checked="" type="checkbox"/> DC supply: DC 3.85V/4380mAh from battery or DC 5V from Adapter.
Adapter:	<input checked="" type="checkbox"/> Adapter supply: Model: HJ-FC018K7-US Input: 100-240V~50/60Hz 0.6A Output: 5V---2A , 7V---2A , 9V---2A
Extreme Vol. Limits:	DC 3.6V to DC 4.4V (Nominal DC 3.85V) (Note 1)
HW Version	TE988_MAIN_PCB_V1.1
SW Version	BV6300Pro_NEU_TE988_V1.0_20200731v3

** Note1: The High Voltage 4.4V and Low Voltage 3.6V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2APMJBV6300PRO** filing to comply with the FCC Part 22H&24E &27.

1.3 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI/TIA-603-E-2016, FCC CFR 47 Part 2, Part 22, Part 24, Part 27, ANSI C63.26:2015.

1.4 TEST FACILITY

The test site used to collect the radiated data is located at:

ShenZhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R.China.

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.26:2015& ANSI C63.4: 2014.

FCC Registration No.:463705

IC Registration No.:9270A-1,

CNAS Registration No.:L5516

MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5dB
2	Conducted Emission Test	± 1.38 dB
3	RF power, conducted	± 0.16 dB
4	Spurious emissions, conducted	± 0.21 dB
5	All emissions, radiated(<1G)	± 4.68 dB
6	All emissions, radiated(>1G)	± 4.89 dB
7	Temperature	± 0.5 °C
8	Humidity	$\pm 2\%$

1.5 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being

tested with EUT intended for FCC grant together.

1.6 WORST-CASE CONFIGURATION AND MODE

The worst-case scenario for all measurements is based on the investigation results.

The device has LTE Bands of: Band 2, Band 4, Band 5, Band 7, Band 12, Band 17

The RB Size was selected to measure for peak or average ERP and EIRP, which was based on the conducted power verification baseline data.

For the fundamental investigation of radiated emissions, the EUT is investigated for vertical and horizontal antenna orientations and X Y and Z orientations of the EUT alone. After the investigations the worst case was determined to be at X orientation for all LTE bands.

1.6 SUMMARY OF TEST RESULTS

FCC Part22, Subpart H/ FCC Part24, Subpart E, FCC Part27, Subpart L, KDB 971168 D01 Power Meas License Digital Systems v03			
FCC Rule	Test Item	Verdict	Remark
2.1046	Conducted Output Power	PASS	
22.913(d) 24.232(d) 27.50(d)(5) KDB 971168 D01 Clause 5.7	Peak-to-Average Ratio	PASS	
2.1049 22.917(b) 24.238(b) KDB 971168 D01 Clause 4.2	Occupied Bandwidth	PASS	
2.1051 22.917(a) 24.238(a) 27.53(c), (g), (h) KDB 971168 D01 Clause 6	Band Edge	PASS	
22.913(a)(2) 27.50(b)(10), (c)(10) KDB 971168 D01 Clause 5.6	Effective Radiated Power	PASS	
24.232(c) 27.50(h)(2), (d)(4) KDB 971168 D01 Clause 5.6	Equivalent Isotropic Radiated Power	PASS	

2.1053 22.917(a) 24.238(a) 27.53(c)(g)(h)(m) KDB 971168 D01 Clause 7	Field Strength of Spurious Radiation	PASS	
2.1055 22.355 24.235 27.54 KDB 971168 D01 Clause 9	Frequency Stability for Temperature & Voltage	PASS	
2.1051 22.917(a) 24.238(a) 27.53(c)(g)(h)(m) KDB 971168 D01 Clause 6	Conducted Emission	PASS	

Remark:

1. "N/A" denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.
3. No modifications are made to the EUT during all test items.

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.3 CONFIGURATION OF EUT SYSTEM


Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	Smart Phone	BV6300Pro	FCC ID: 2APMJBV6300PRO	EUT


*Note: All the accessories have been used during the test.
the following "EUT" in setup diagram means EUT system.*

2.4 TEST SETUP


For Radiated Test Cases

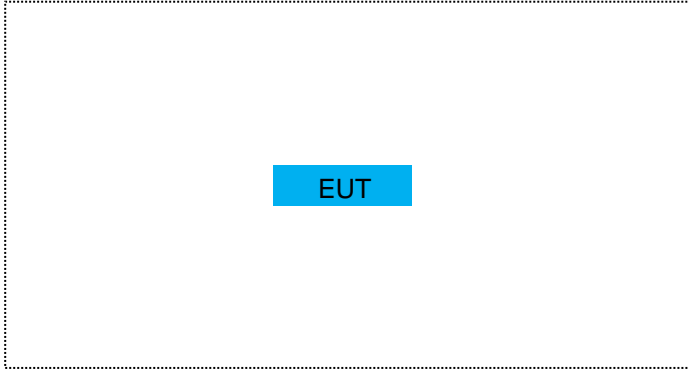


For Conducted Output Power

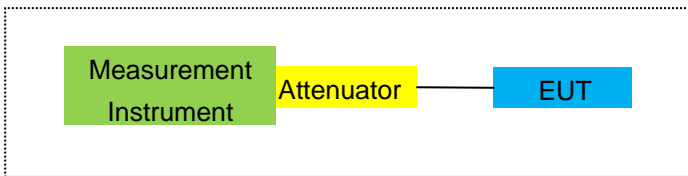

For Peak-to Average Ratio, Occupied Bandwidth, Conducted Band edge and Conducted Spurious Emission

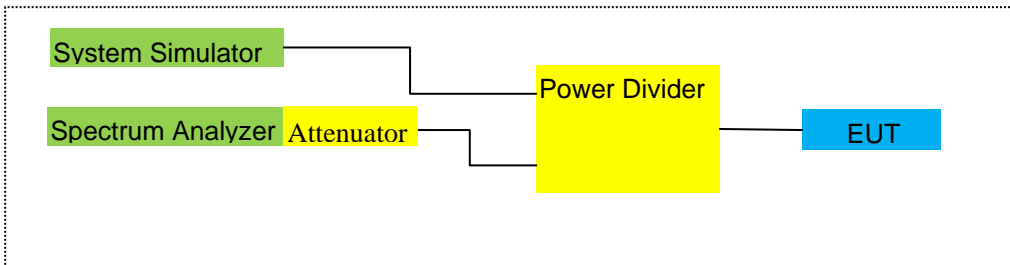

For Frequency Stability

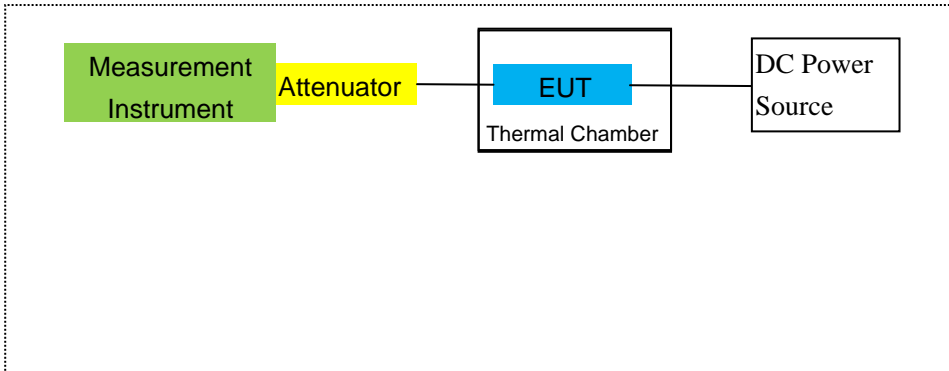

Note: EUT built-in battery-powered, the battery is fully-charged.

3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2020.05.11	2021.05.10	1 year
2	Test Receiver	R&S	ESPI	101318	2020.05.11	2021.05.10	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2020.04.11	2021.04.10	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
5	Horn Antenna	EM	EM-AH-10180	2011071402	2020.04.11	2021.04.10	1 year
6	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2019.12.10	2020.12.09	1 year
7	Amplifier	EM	EM-30180	060538	2020.7.13	2021.7.12	1 year
8	Loop Antenna	ARA	PLA-1030/B	1029	2020.05.11	2021.05.10	1 year
9	Power Meter	R&S	NRVS	100696	2020.7.13	2021.7.12	1 year
10	Power Sensor	R&S	URV5-Z4	0395.1619.05	2020.05.11	2021.05.10	1 year
11	Test Cable	N/A	R-01	N/A	2019.08.06	2022.08.05	3 year
12	Test Cable	N/A	R-02	N/A	2019.08.06	2022.08.05	3 year
13	Test Cable	N/A	R-03	N/A	2019.06.28	2022.06.27	3 year
14	Test Receiver	R&S	ESCI	101160	2020.05.11	2021.05.10	1 year
15	LISN	R&S	ENV216	101313	2020.05.11	2021.05.10	1 year
16	LISN	EMCO	3816/2	00042990	2020.05.11	2021.05.10	1 year
17	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2020.05.11	2021.05.10	1 year
18	Passive Voltage Probe	R&S	ESH2-Z3	100196	2020.04.11	2021.04.10	1 year
19	Test Cable	N/A	C01	N/A	2020.05.11	2023.05.10	3 year
20	Test Cable	N/A	C02	N/A	2020.05.11	2023.05.10	3 year
21	Test Cable	N/A	C03	N/A	2020.05.11	2023.05.10	3 year
22	Attenuator	MCE	24-10-34	BN9258	2020.05.11	2021.05.10	1 year
23	Spectrum Analyzer	agilent	e4440a	us44300399	2020.05.11	2021.05.10	1 year
24	test receiver	R&S	ESCI	a0304218	2020.05.11	2021.05.10	1 year
25	Communication Tester	R&S	CMU200	A0304247	2020.7.13	2021.7.12	1 year
26	Thermal Chamber	Ten Billion	TTC-B3C	TBN-960502	2020.05.11	2021.05.10	1 year

27	DC Power Source	N/A	PS-6005D	2017040292 3	2020.05.11	2023.05.10	3 year
28	PSG Analog Signal Generator	Agilent	E8257D	MY51110112	2020.7.13	2021.7.12	1 year
29	Communication Tester	R&S	CMW500	148500	2020.05.11	2021.05.10	1 year
30	PSG Analog Signal Generator	Agilent	E8257D	MY51110112	Jul. 13, 2020	Jul. 12,2021	1 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& DC Power Source which is scheduled for calibration every 3 years.

4. OUTPUT POWER

4.1 OUTPUT POWER MEASUREMENT

LTE Measurement Procedure:

All LTE bands conducted power peak and average are obtained from the CMW500 telecommunication test set. The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".3

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Test data reference attachment.

5. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

MODES TESTED

- LTE Band 2
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 17

RESULTS

PASS

Test data reference attachment.

6. BANDEDGE AND EMISSION MASK

RULE PART(S)

FCC: §2.1051, §22.917(a), §24.238(a), §27.53(c)(g)(h)(m)

FCC: §2.1046, §22.913, §24.232

LIMITS

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as following.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c.5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c.4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

TEST PROCEDURE

The transmitter output was connected to a CMW500Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

Set the spectrum analyzer span to include the block edge frequency

Set a marker to point the corresponding band edge frequency in each test case.

Set display line

Set resolution bandwidth to at least 1% of emission bandwidth.

MODES TESTED

- LTE Band 2/4/5/7/12/17

RESULTS

Test data reference attachment.

7. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.917(a), §24.238(a), §27.53(c)(g)(h)(m)

LIMITS

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as following.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c.5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c.4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

- Set display line
- Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

MODES TESTED

- LTE Band 2
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 17

7.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

Test data reference attachment.

8. RADIATED MEASUREMENT

8.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913(a)(2), §24.232(c) and §27.50 (h)(2), (b)(10), (c)(10), (d)(4)

LIMITS:

22.913(a) (2)- The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.
24.232 (c) Mobile and portable stations are limited to 2 watts EIRP.
27.50 (c) (10) the following power and antenna height requirements apply to stations transmitting in the 698–746 MHz band, the portable stations (hand-held devices) are limited to 3 watts ERP.
27.50 (b)(10) Portable stations (hand-held devices) transmitting in the 746–757 MHz, 758–763 MHz, 776–793 MHz, and 805–806 MHz bands are limited to 3 watts ERP.
27.50 (d)(4) The following power and antenna height requirements apply to stations transmitting in the 1710–1755 MHz and 2110–2155 MHz bands: Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.
27.50 (h)(2) Mobile and other user stations in the 2500–2570 MHz and 2620–2690 MHz bands. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

TEST PROCEDURE

ANSI/TIA-603-E Clause 2.2.17

KDB 971168 v02r01 RF power output using broadband peak and average power meter method.

KDB 971168 D01 Power Meas License Digital Systems v02r01, “Measurement Guidance for Certification of Licensed Digital Transmitters”

MODES TESTED

- LTE Band 2
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 17

RESULTS

Pass

8.2 LTE BAND 2

Radiated Power (EIRP) for Band 2									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band QPSK	1/#Mid	1850.7	-0.70	3.76	28.24	23.78	238.781	Horizontal	Pass
		1880	-0.51	3.91	28.22	23.80	239.883	Horizontal	Pass
		1909.3	-0.42	3.93	28.20	23.85	242.661	Horizontal	Pass
3.0MHz Band QPSK	1/#Mid	1851.5	-0.76	3.77	28.23	23.70	234.423	Horizontal	Pass
		1880	-0.61	3.91	28.24	23.72	235.505	Horizontal	Pass
		1908.5	-0.48	3.94	28.25	23.83	241.546	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	1852.5	-0.65	3.77	28.31	23.89	244.906	Horizontal	Pass
		1880	-0.27	3.91	28.22	24.04	253.513	Horizontal	Pass
		1907.5	-0.20	3.94	28.20	24.06	254.683	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	1855	-0.51	3.79	28.33	24.03	252.930	Horizontal	Pass
		1880	-0.21	3.95	28.22	24.06	254.683	Horizontal	Pass
		1905	-0.10	3.97	28.19	24.12	258.226	Horizontal	Pass
15.0MHz Band QPSK	1/#Mid	1857.5	-0.47	3.79	28.34	24.08	255.859	Horizontal	Pass
		1880	-0.26	3.95	28.22	24.01	251.768	Horizontal	Pass
		1902.5	-0.12	3.97	28.18	24.09	256.448	Horizontal	Pass
20.0MHz Band QPSK	1/#Mid	1860	-0.46	3.81	28.35	24.08	255.859	Horizontal	Pass
		1880	-0.13	3.96	28.22	24.13	258.821	Horizontal	Pass
		1900	-0.07	4.00	28.16	24.09	256.448	Horizontal	Pass
1.4MHz Band QPSK	1/#Mid	1850.7	-1.38	3.76	28.24	23.10	204.174	Vertical	Pass
		1880	-1.08	3.91	28.22	23.23	210.378	Vertical	Pass
		1909.3	-0.86	3.93	28.20	23.41	219.280	Vertical	Pass
3.0MHz Band QPSK	1/#Mid	1851.5	-1.24	3.77	28.23	23.22	209.894	Vertical	Pass
		1880	-1.51	3.91	28.24	22.82	191.426	Vertical	Pass
		1908.5	-1.14	3.94	28.25	23.17	207.491	Vertical	Pass
5.0MHz Band QPSK	1/#Mid	1852.5	-1.50	3.77	28.31	23.04	201.372	Vertical	Pass
		1880	-0.96	3.91	28.22	23.35	216.272	Vertical	Pass
		1907.5	-1.64	3.94	28.20	22.62	182.810	Vertical	Pass
10.0MHz Band QPSK	1/#Mid	1855	-1.97	3.79	28.33	22.57	180.717	Vertical	Pass
		1880	-0.82	3.95	28.22	23.45	221.309	Vertical	Pass
		1905	-1.36	3.97	28.19	22.86	193.197	Vertical	Pass

15.0MHz Band QPSK	1/#Mid	1857.5	-1.05	3.79	28.34	23.50	223.872	Vertical	Pass
		1880	-1.63	3.95	28.22	22.64	183.654	Vertical	Pass
		1902.5	-1.09	3.97	28.18	23.12	205.116	Vertical	Pass
20.0MHz Band QPSK	1/#Mid	1860	-1.24	3.81	28.35	23.30	213.796	Vertical	Pass
		1880	-0.93	3.96	28.22	23.33	215.278	Vertical	Pass
		1900	-1.33	4.00	28.16	22.83	191.867	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Radiated Power (EIRP) for Band 2									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band 16 QAM	1/#Mid	1850.7	-1.82	3.76	28.24	22.66	184.502	Horizontal	Pass
		1880	-1.29	3.91	28.22	23.02	200.447	Horizontal	Pass
		1909.3	-1.22	3.93	28.20	23.05	201.837	Horizontal	Pass
3.0MHz Band 16 QAM	1/#Mid	1851.5	-1.32	3.77	28.23	23.14	206.063	Horizontal	Pass
		1880	-1.40	3.91	28.24	22.93	196.336	Horizontal	Pass
		1908.5	-1.61	3.94	28.25	22.70	186.209	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mid	1852.5	-1.26	3.77	28.31	23.28	212.814	Horizontal	Pass
		1880	-1.17	3.91	28.22	23.14	206.063	Horizontal	Pass
		1907.5	-0.85	3.94	28.20	23.41	219.280	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Mid	1855	-1.31	3.79	28.33	23.23	210.378	Horizontal	Pass
		1880	-1.30	3.95	28.22	22.97	198.153	Horizontal	Pass
		1905	-0.77	3.97	28.19	23.45	221.309	Horizontal	Pass
15.0MHz Band 16 QAM	1/#Mid	1857.5	-1.29	3.79	28.34	23.26	211.836	Horizontal	Pass
		1880	-1.08	3.95	28.22	23.19	208.449	Horizontal	Pass
		1902.5	-1.04	3.97	28.18	23.17	207.491	Horizontal	Pass
20.0MHz Band 16 QAM	1/#Mid	1860	-1.18	3.81	28.35	23.36	216.770	Horizontal	Pass
		1880	-0.88	3.96	28.22	23.38	217.771	Horizontal	Pass
		1900	-0.70	4.00	28.16	23.46	221.820	Horizontal	Pass
1.4MHz Band 16 QAM	1/#Mid	1850.7	-2.74	3.76	28.24	21.74	149.279	Vertical	Pass
		1880	-2.76	3.91	28.22	21.55	142.889	Vertical	Pass
		1909.3	-2.16	3.93	28.20	22.11	162.555	Vertical	Pass
3.0MHz Band 16 QAM	1/#Mid	1851.5	-2.31	3.77	28.23	22.15	164.059	Vertical	Pass
		1880	-2.53	3.91	28.24	21.80	151.356	Vertical	Pass
		1908.5	-2.33	3.94	28.25	21.98	157.761	Vertical	Pass
5.0MHz Band 16 QAM	1/#Mid	1852.5	-2.47	3.77	28.31	22.07	161.065	Vertical	Pass
		1880	-2.60	3.91	28.22	21.71	148.252	Vertical	Pass
		1907.5	-2.60	3.94	28.20	21.66	146.555	Vertical	Pass
10.0MHz Band 16 QAM	1/#Mid	1855	-2.55	3.79	28.33	21.99	158.125	Vertical	Pass
		1880	-1.93	3.95	28.22	22.34	171.396	Vertical	Pass
		1905	-2.66	3.97	28.19	21.56	143.219	Vertical	Pass
15.0MHz Band 16	1/#Mid	1857.5	-2.39	3.79	28.34	22.16	164.437	Vertical	Pass
		1880	-2.61	3.95	28.22	21.66	146.555	Vertical	Pass

QAM		1902.5	-2.31	3.97	28.18	21.90	154.882	Vertical	Pass
20.0MHz	1/#Mid	1860	-2.85	3.81	28.35	21.69	147.571	Vertical	Pass
Band 16		1880	-1.89	3.96	28.22	22.37	172.584	Vertical	Pass
QAM		1900	-2.31	4.00	28.16	21.85	153.109	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.3 LTE BAND 4

Radiated Power (EIRP) for Band 4									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band QPSK	1/#Mid	1710.7	-0.61	3.12	27.58	23.85	242.661	Horizontal	Pass
		1732.5	-0.60	3.27	27.61	23.74	236.592	Horizontal	Pass
		1754.3	-0.58	3.29	27.63	23.76	237.684	Horizontal	Pass
3.0MHz Band QPSK	1/#Mid	1711.5	-0.78	3.13	27.61	23.70	234.423	Horizontal	Pass
		1732.5	-0.70	3.27	27.61	23.64	231.206	Horizontal	Pass
		1753.5	-0.62	3.30	27.62	23.70	234.423	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	1712.5	-0.55	3.13	27.63	23.95	248.313	Horizontal	Pass
		1732.5	-0.45	3.27	27.61	23.89	244.906	Horizontal	Pass
		1752.5	-0.33	3.30	27.60	23.97	249.459	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	1715	-0.49	3.15	27.64	24.00	251.189	Horizontal	Pass
		1732.5	-0.26	3.31	27.61	24.04	253.513	Horizontal	Pass
		1750	-0.28	3.33	27.59	23.98	250.035	Horizontal	Pass
15.0MHz Band QPSK	1/#Mid	1717.5	-0.50	3.15	27.65	24.00	251.189	Horizontal	Pass
		1732.5	-0.34	3.31	27.61	23.96	248.886	Horizontal	Pass
		1747.5	-0.28	3.33	27.57	23.96	248.886	Horizontal	Pass
20.0MHz Band QPSK	1/#Mid	1720	-0.44	3.17	27.66	24.05	254.097	Horizontal	Pass
		1732.5	-0.27	3.32	27.61	24.02	252.348	Horizontal	Pass
		1745	-0.21	3.36	27.56	23.99	250.611	Horizontal	Pass
1.4MHz Band QPSK	1/#Mid	1710.7	-1.33	3.12	27.58	23.13	205.589	Vertical	Pass
		1732.5	-1.40	3.27	27.61	22.94	196.789	Vertical	Pass
		1754.3	-1.13	3.29	27.63	23.21	209.411	Vertical	Pass
3.0MHz Band QPSK	1/#Mid	1711.5	-1.18	3.13	27.61	23.30	213.796	Vertical	Pass
		1732.5	-0.94	3.27	27.61	23.40	218.776	Vertical	Pass
		1753.5	-1.69	3.30	27.62	22.63	183.231	Vertical	Pass
5.0MHz Band QPSK	1/#Mid	1712.5	-1.56	3.13	27.63	22.94	196.789	Vertical	Pass
		1732.5	-1.12	3.27	27.61	23.22	209.894	Vertical	Pass
		1752.5	-1.54	3.30	27.60	22.76	188.799	Vertical	Pass
10.0MHz Band QPSK	1/#Mid	1715	-1.11	3.15	27.64	23.38	217.771	Vertical	Pass
		1732.5	-1.54	3.31	27.61	22.76	188.799	Vertical	Pass
		1750	-0.82	3.33	27.59	23.44	220.800	Vertical	Pass

15.0MHz Band QPSK	1/#Mid	1717.5	-1.90	3.15	27.65	22.60	181.970	Vertical	Pass
		1732.5	-1.18	3.31	27.61	23.12	205.116	Vertical	Pass
		1747.5	-1.67	3.33	27.57	22.57	180.717	Vertical	Pass
20.0MHz Band QPSK	1/#Mid	1720	-1.23	3.17	27.66	23.26	211.836	Vertical	Pass
		1732.5	-1.07	3.32	27.61	23.22	209.894	Vertical	Pass
		1745	-1.53	3.36	27.56	22.67	184.927	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Radiated Power (EIRP) for Band 4									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band 16 QAM	1/#Mid	1710.7	-1.42	3.12	27.58	23.04	201.372	Horizontal	Pass
		1732.5	-1.27	3.27	27.61	23.07	202.768	Horizontal	Pass
		1754.3	-1.27	3.29	27.63	23.07	202.768	Horizontal	Pass
3.0MHz Band 16 QAM	1/#Mid	1711.5	-1.36	3.13	27.61	23.12	205.116	Horizontal	Pass
		1732.5	-1.49	3.27	27.61	22.85	192.752	Horizontal	Pass
		1753.5	-1.71	3.30	27.62	22.61	182.390	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mid	1712.5	-1.19	3.13	27.63	23.31	214.289	Horizontal	Pass
		1732.5	-1.15	3.27	27.61	23.19	208.449	Horizontal	Pass
		1752.5	-0.84	3.30	27.60	23.46	221.820	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Mid	1715	-1.26	3.15	27.64	23.23	210.378	Horizontal	Pass
		1732.5	-1.45	3.31	27.61	22.85	192.752	Horizontal	Pass
		1750	-0.83	3.33	27.59	23.43	220.293	Horizontal	Pass
15.0MHz Band 16 QAM	1/#Mid	1717.5	-1.06	3.15	27.65	23.44	220.800	Horizontal	Pass
		1732.5	-1.12	3.31	27.61	23.18	207.970	Horizontal	Pass
		1747.5	-1.14	3.33	27.57	23.10	204.174	Horizontal	Pass
20.0MHz Band 16 QAM	1/#Mid	1720	-1.01	3.17	27.66	23.48	222.844	Horizontal	Pass
		1732.5	-1.02	3.32	27.61	23.27	212.324	Horizontal	Pass
		1745	-0.83	3.36	27.56	23.37	217.270	Horizontal	Pass
1.4MHz Band 16 QAM	1/#Mid	1710.7	-2.87	3.12	27.58	21.59	144.212	Vertical	Pass
		1732.5	-2.65	3.27	27.61	21.69	147.571	Vertical	Pass
		1754.3	-2.40	3.29	27.63	21.94	156.315	Vertical	Pass
3.0MHz Band 16 QAM	1/#Mid	1711.5	-2.29	3.13	27.61	22.19	165.577	Vertical	Pass
		1732.5	-2.38	3.27	27.61	21.96	157.036	Vertical	Pass
		1753.5	-2.44	3.30	27.62	21.88	154.170	Vertical	Pass
5.0MHz Band 16 QAM	1/#Mid	1712.5	-2.75	3.13	27.63	21.75	149.624	Vertical	Pass
		1732.5	-2.38	3.27	27.61	21.96	157.036	Vertical	Pass
		1752.5	-1.82	3.30	27.60	22.48	177.011	Vertical	Pass
10.0MHz Band 16 QAM	1/#Mid	1715	-2.21	3.15	27.64	22.28	169.044	Vertical	Pass
		1732.5	-1.92	3.31	27.61	22.38	172.982	Vertical	Pass
		1750	-2.22	3.33	27.59	22.04	159.956	Vertical	Pass
15.0MHz Band 16	1/#Mid	1717.5	-2.25	3.15	27.65	22.25	167.880	Vertical	Pass
		1732.5	-2.28	3.31	27.61	22.02	159.221	Vertical	Pass

QAM		1747.5	-1.91	3.33	27.57	22.33	171.002	Vertical	Pass
20.0MHz	1/#Mid	1720	-2.35	3.17	27.66	22.14	163.682	Vertical	Pass
Band 16		1732.5	-2.61	3.32	27.61	21.68	147.231	Vertical	Pass
QAM		1745	-1.86	3.36	27.56	22.34	171.396	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.4 LTE BAND 5

Radiated Power (ERP) for Band 5										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. ERP Average (dBm)	Max. ERP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band QPSK	3/#Mid	824.7	8.69	2.01	19.68	2.15	24.21	263.633	Horizontal	Pass
		836.5	8.57	2.01	19.77	2.15	24.18	261.818	Horizontal	Pass
		848.3	8.37	2.02	19.82	2.15	24.02	252.348	Horizontal	Pass
3.0MHz Band QPSK	1/#Mid	825.5	8.46	2.01	19.70	2.15	24.00	251.189	Horizontal	Pass
		836.5	8.36	2.01	19.77	2.15	23.97	249.459	Horizontal	Pass
		847.5	8.23	2.02	19.81	2.15	23.87	243.781	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	826.5	8.74	2.01	19.71	2.15	24.29	268.534	Horizontal	Pass
		836.5	8.62	2.01	19.77	2.15	24.23	264.850	Horizontal	Pass
		846.5	8.46	2.02	19.79	2.15	24.08	255.859	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	829	8.76	2.01	19.73	2.15	24.33	271.019	Horizontal	Pass
		836.5	8.71	2.01	19.77	2.15	24.32	270.396	Horizontal	Pass
		844	8.61	2.02	19.78	2.15	24.22	264.241	Horizontal	Pass
1.4MHz Band QPSK	1/#Mid	824.7	7.70	2.01	19.68	2.15	23.22	209.894	Vertical	Pass
		836.5	7.21	2.01	19.77	2.15	22.82	191.426	Vertical	Pass
		848.3	7.71	2.02	19.82	2.15	23.36	216.770	Vertical	Pass
3.0MHz Band QPSK	1/#Mid	825.5	7.90	2.01	19.70	2.15	23.44	220.800	Vertical	Pass
		836.5	7.69	2.01	19.77	2.15	23.30	213.796	Vertical	Pass
		847.5	7.51	2.02	19.81	2.15	23.15	206.538	Vertical	Pass
5.0MHz Band QPSK	1/#Mid	826.5	6.98	2.01	19.71	2.15	22.53	179.061	Vertical	Pass
		836.5	7.56	2.01	19.77	2.15	23.17	207.491	Vertical	Pass
		846.5	7.45	2.02	19.79	2.15	23.07	202.768	Vertical	Pass
10.0MHz Band QPSK	1/#Mid	829	7.70	2.01	19.73	2.15	23.27	212.324	Vertical	Pass
		836.5	7.81	2.01	19.77	2.15	23.42	219.786	Vertical	Pass
		844	7.82	2.02	19.78	2.15	23.43	220.293	Vertical	Pass

Radiated Power (ERP) for Band 5										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. ERP Average (dBm)	Max. ERP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band 16 QAM	3/#Mid	824.7	7.84	2.01	19.68	2.15	23.36	216.770	Horizontal	Pass
		836.5	7.77	2.01	19.77	2.15	23.38	217.771	Horizontal	Pass
		848.3	7.61	2.02	19.82	2.15	23.26	211.836	Horizontal	Pass
3.0MHz Band 16 QAM	1/#Mid	825.5	7.92	2.01	19.70	2.15	23.46	221.820	Horizontal	Pass
		836.5	7.63	2.01	19.77	2.15	23.24	210.863	Horizontal	Pass
		847.5	7.11	2.02	19.81	2.15	22.75	188.365	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mid	826.5	8.24	2.01	19.71	2.15	23.79	239.332	Horizontal	Pass
		836.5	8.01	2.01	19.77	2.15	23.62	230.144	Horizontal	Pass
		846.5	7.76	2.02	19.79	2.15	23.38	217.771	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Mid	829	8.24	2.01	19.73	2.15	23.81	240.436	Horizontal	Pass
		836.5	7.96	2.01	19.77	2.15	23.57	227.510	Horizontal	Pass
		844	7.50	2.02	19.78	2.15	23.11	204.644	Horizontal	Pass
1.4MHz Band 16 QAM	1/#Mid	824.7	6.23	2.01	19.68	2.15	21.75	149.624	Vertical	Pass
		836.5	6.88	2.01	19.77	2.15	22.49	177.419	Vertical	Pass
		848.3	7.83	2.02	19.82	2.15	23.48	222.844	Vertical	Pass
3.0MHz Band 16 QAM	1/#Mid	825.5	6.72	2.01	19.70	2.15	22.26	168.267	Vertical	Pass
		836.5	7.21	2.01	19.77	2.15	22.82	191.426	Vertical	Pass
		847.5	7.35	2.02	19.81	2.15	22.99	199.067	Vertical	Pass
5.0MHz Band 16 QAM	1/#Mid	826.5	6.85	2.01	19.71	2.15	22.40	173.780	Vertical	Pass
		836.5	6.13	2.01	19.77	2.15	21.74	149.279	Vertical	Pass
		846.5	6.85	2.02	19.79	2.15	22.47	176.604	Vertical	Pass
10.0MHz Band 16 QAM	1/#Mid	829	6.61	2.01	19.73	2.15	22.18	165.196	Vertical	Pass
		836.5	6.41	2.01	19.77	2.15	22.02	159.221	Vertical	Pass
		844	6.42	2.02	19.78	2.15	22.03	159.588	Vertical	Pass

Note:

ERP=EIRP-2.15

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.5 LTE BAND 7

Radiated Power (EIRP) for Band 7									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band QPSK	1/#Mid	2502.5	1.11	4.54	27.75	24.32	270.396	Horizontal	Pass
		2535	1.28	4.69	27.72	24.31	269.774	Horizontal	Pass
		2567.5	1.35	4.71	27.71	24.35	272.270	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	2505	1.18	4.55	27.76	24.39	274.789	Horizontal	Pass
		2535	1.37	4.69	27.72	24.40	275.423	Horizontal	Pass
		2565	1.45	4.72	27.70	24.43	277.332	Horizontal	Pass
15.0MHz Band QPSK	1/#Mid	2507.5	1.17	4.55	27.77	24.39	274.789	Horizontal	Pass
		2535	1.31	4.69	27.72	24.34	271.644	Horizontal	Pass
		2562.5	1.41	4.72	27.69	24.38	274.157	Horizontal	Pass
20.0MHz Band QPSK	1/#Mid	2510	1.23	4.57	27.78	24.44	277.971	Horizontal	Pass
		2535	1.41	4.73	27.72	24.40	275.423	Horizontal	Pass
		2560	1.45	4.75	27.68	24.38	274.157	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	2502.5	-0.30	4.54	27.75	22.91	195.434	Vertical	Pass
		2535	0.08	4.69	27.72	23.11	204.644	Vertical	Pass
		2567.5	0.11	4.71	27.71	23.11	204.644	Vertical	Pass
10.0MHz Band QPSK	1/#Mid	2505	-0.61	4.55	27.76	22.60	181.970	Vertical	Pass
		2535	0.24	4.69	27.72	23.27	212.324	Vertical	Pass
		2565	0.16	4.72	27.70	23.14	206.063	Vertical	Pass
15.0MHz Band QPSK	1/#Mid	2507.5	-0.32	4.55	27.77	22.90	194.984	Vertical	Pass
		2535	-0.48	4.69	27.72	22.55	179.887	Vertical	Pass
		2562.5	0.40	4.72	27.69	23.37	217.270	Vertical	Pass
20.0MHz Band QPSK	1/#Mid	2510	-0.63	4.57	27.78	22.58	181.134	Vertical	Pass
		2535	0.01	4.73	27.72	23.00	199.526	Vertical	Pass
		2560	0.42	4.75	27.68	23.35	216.272	Vertical	Pass

Radiated Power (EIRP) for Band 7									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band 16 QAM	1/#Mid	2502.5	0.42	4.54	27.75	23.63	230.675	Horizontal	Pass
		2535	0.73	4.69	27.72	23.76	237.684	Horizontal	Pass
		2567.5	0.65	4.71	27.71	23.65	231.739	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Mid	2505	0.53	4.55	27.76	23.74	236.592	Horizontal	Pass
		2535	0.52	4.69	27.72	23.55	226.464	Horizontal	Pass
		2565	0.25	4.72	27.70	23.23	210.378	Horizontal	Pass
15.0MHz Band 16 QAM	1/#Mid	2507.5	0.35	4.55	27.77	23.57	227.510	Horizontal	Pass
		2535	0.38	4.69	27.72	23.41	219.280	Horizontal	Pass
		2562.5	0.77	4.72	27.69	23.74	236.592	Horizontal	Pass
20.0MHz Band 16 QAM	1/#Mid	2510	0.47	4.57	27.78	23.68	233.346	Horizontal	Pass
		2535	0.80	4.73	27.72	23.79	239.332	Horizontal	Pass
		2560	0.70	4.75	27.68	23.63	230.675	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mid	2502.5	-1.31	4.54	27.75	21.90	154.882	Vertical	Pass
		2535	-0.25	4.69	27.72	22.78	189.671	Vertical	Pass
		2567.5	-1.30	4.71	27.71	21.70	147.911	Vertical	Pass
10.0MHz Band 16 QAM	1/#Mid	2505	-0.53	4.55	27.76	22.68	185.353	Vertical	Pass
		2535	-1.19	4.69	27.72	21.84	152.757	Vertical	Pass
		2565	-1.01	4.72	27.70	21.97	157.398	Vertical	Pass
15.0MHz Band 16 QAM	1/#Mid	2507.5	-0.96	4.55	27.77	22.26	168.267	Vertical	Pass
		2535	0.20	4.69	27.72	23.23	210.378	Vertical	Pass
		2562.5	0.18	4.72	27.69	23.15	206.538	Vertical	Pass
20.0MHz Band 16 QAM	1/#Mid	2510	-0.66	4.57	27.78	22.55	179.887	Vertical	Pass
		2535	-0.90	4.73	27.72	22.09	161.808	Vertical	Pass
		2560	-0.24	4.75	27.68	22.69	185.780	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.5 LTE BAND 12

Radiated Power (ERP) for Band 12											
Mode	RB/RB SIZE	Frequency	Result							Polarization Of Max. ERP	Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. ERP Average (dBm)	Max. ERP Average (mW)			
1.4MHz Band QPSK	1/#Mid	699.7	6.45	1.91	19.21	2.15	21.60	144.544	Vertical	Pass	
		707.5	6.11	1.91	19.26	2.15	21.31	135.207	Vertical	Pass	
		715.3	5.39	1.93	19.34	2.15	20.65	116.145	Vertical	Pass	
3.0MHz Band QPSK	1/#Mid	700.5	5.93	1.91	19.21	2.15	21.08	128.233	Vertical	Pass	
		707.5	5.70	1.91	19.26	2.15	20.90	123.027	Vertical	Pass	
		714.5	5.93	1.93	19.34	2.15	21.19	131.522	Vertical	Pass	
5.0MHz Band QPSK	1/#Mid	701.5	5.99	1.91	19.23	2.15	21.16	130.617	Vertical	Pass	
		707.5	6.03	1.91	19.26	2.15	21.23	132.739	Vertical	Pass	
		713.5	5.45	1.92	19.33	2.15	20.71	117.761	Vertical	Pass	
10.0MHz Band QPSK	1/#Mid	704	5.54	1.91	19.25	2.15	20.73	118.304	Vertical	Pass	
		707.5	5.87	1.91	19.26	2.15	21.07	127.938	Vertical	Pass	
		711	5.85	1.92	19.32	2.15	21.10	128.825	Vertical	Pass	
1.4MHz Band QPSK	1/#Mid	699.7	6.13	1.91	19.21	2.15	21.28	134.276	Horizontal	Pass	
		707.5	5.47	1.91	19.26	2.15	20.67	116.681	Horizontal	Pass	
		715.3	5.67	1.93	19.34	2.15	20.93	123.880	Horizontal	Pass	
3.0MHz Band QPSK	1/#Mid	700.5	5.71	1.91	19.21	2.15	20.86	121.899	Horizontal	Pass	
		707.5	5.72	1.91	19.26	2.15	20.92	123.595	Horizontal	Pass	
		714.5	6.38	1.93	19.34	2.15	21.64	145.881	Horizontal	Pass	
5.0MHz Band QPSK	1/#Mid	701.5	6.36	1.91	19.23	2.15	21.53	142.233	Horizontal	Pass	
		707.5	6.46	1.91	19.26	2.15	21.66	146.555	Horizontal	Pass	
		713.5	5.95	1.92	19.33	2.15	21.21	132.130	Horizontal	Pass	
10.0MHz Band QPSK	1/#Mid	704	6.82	1.91	19.25	2.15	22.01	158.855	Horizontal	Pass	
		707.5	5.66	1.91	19.26	2.15	20.86	121.899	Horizontal	Pass	
		711	5.86	1.92	19.32	2.15	21.11	129.122	Horizontal	Pass	

Radiated Power (EIRP) for Band 12											
Mode	RB/ RB SIZE	Freque ncy	Result							Polarizati on Of Max. ERP	Conclu sion
			SG Level (dBm)	Cable Loss (dBm)	Anten na Gain (dB)	Corre ction (dB)	Max. ERP Average (dBm)	Max. ERP Average (mW)			
			1.4MHz Band 16 QAM	1/#M id	699.7	6.23	1.91	19.21	2.15		
		707.5	5.97	1.91	19.26	2.15	21.17	130.918	Vertical	Pass	
		715.3	5.40	1.93	19.34	2.15	20.66	116.413	Vertical	Pass	
3.0MHz Band 16 QAM	1/#M id	700.5	6.17	1.91	19.21	2.15	21.32	135.519	Vertical	Pass	
		707.5	6.36	1.91	19.26	2.15	21.56	143.219	Vertical	Pass	
		714.5	6.77	1.93	19.34	2.15	22.03	159.588	Vertical	Pass	
5.0MHz Band 16 QAM	1/#M id	701.5	6.68	1.91	19.23	2.15	21.85	153.109	Vertical	Pass	
		707.5	6.43	1.91	19.26	2.15	21.63	145.546	Vertical	Pass	
		713.5	6.46	1.92	19.33	2.15	21.72	148.594	Vertical	Pass	
10.0MH z Band 16 QAM	1/#M id	704	6.99	1.91	19.25	2.15	22.18	165.196	Vertical	Pass	
		707.5	6.00	1.91	19.26	2.15	21.20	131.826	Vertical	Pass	
		711	6.66	1.92	19.32	2.15	21.91	155.239	Vertical	Pass	
1.4MHz Band 16 QAM	1/#M id	699.7	5.77	1.91	19.21	2.15	20.92	123.595	Horizontal	Pass	
		707.5	6.00	1.91	19.26	2.15	21.20	131.826	Horizontal	Pass	
		715.3	6.54	1.93	19.34	2.15	21.80	151.356	Horizontal	Pass	
3.0MHz Band 16 QAM	1/#M id	700.5	6.75	1.91	19.21	2.15	21.90	154.882	Horizontal	Pass	
		707.5	7.04	1.91	19.26	2.15	22.24	167.494	Horizontal	Pass	
		714.5	6.64	1.93	19.34	2.15	21.90	154.882	Horizontal	Pass	
5.0MHz Band 16 QAM	1/#M id	701.5	6.73	1.91	19.23	2.15	21.90	154.882	Horizontal	Pass	
		707.5	6.50	1.91	19.26	2.15	21.70	147.911	Horizontal	Pass	
		713.5	6.50	1.92	19.33	2.15	21.76	149.968	Horizontal	Pass	
10.0MH z Band 16 QAM	1/#M id	704	7.10	1.91	19.25	2.15	22.29	169.434	Horizontal	Pass	
		707.5	6.68	1.91	19.26	2.15	21.88	154.170	Horizontal	Pass	
		711	6.41	1.92	19.32	2.15	21.66	146.555	Horizontal	Pass	

Note:

ERP=EIRP-2.15

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.6 LTE BAND 17

Radiated Power (ERP) for Band 17										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. ERP Average (dBm)	Max. ERP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band QPSK	1/#Mid	706.5	6.52	1.91	19.23	2.15	21.69	147.571	Vertical	Pass
		710	6.38	1.91	19.26	2.15	21.58	143.880	Vertical	Pass
		713.5	6.28	1.92	19.33	2.15	21.54	142.561	Vertical	Pass
10.0MHz Band QPSK	1/#Mid	709	6.53	1.91	19.25	2.15	21.72	148.594	Vertical	Pass
		710	6.48	1.91	19.26	2.15	21.68	147.231	Vertical	Pass
		711	6.44	1.92	19.32	2.15	21.69	147.571	Vertical	Pass
5.0MHz Band QPSK	1/#Mid	706.5	4.40	1.91	19.23	2.15	19.57	90.573	Horizontal	Pass
		710	5.78	1.91	19.26	2.15	20.98	125.314	Horizontal	Pass
		713.5	5.46	1.92	19.33	2.15	20.72	118.032	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	709	4.40	1.91	19.25	2.15	19.59	90.991	Horizontal	Pass
		710	5.15	1.91	19.26	2.15	20.35	108.393	Horizontal	Pass
		711	5.73	1.92	19.32	2.15	20.98	125.314	Horizontal	Pass

Radiated Power (ERP) for Band 17										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. ERP Average (dBm)	Max. ERP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band 16 QAM	1/#Midd	706.5	5.87	1.91	19.23	2.15	21.04	127.057	Vertical	Pass
		710	5.78	1.91	19.26	2.15	20.98	125.314	Vertical	Pass
		713.5	5.58	1.92	19.33	2.15	20.84	121.339	Vertical	Pass
10.0MHz Band 16 QAM	1/#Midd	709	5.41	1.91	19.25	2.15	20.60	114.815	Vertical	Pass
		710	5.94	1.91	19.26	2.15	21.14	130.017	Vertical	Pass
		711	5.67	1.92	19.32	2.15	20.92	123.595	Vertical	Pass
5.0MHz Band 16 QAM	1/#Midd	706.5	4.56	1.91	19.23	2.15	19.73	93.972	Horizontal	Pass
		710	4.96	1.91	19.26	2.15	20.16	103.753	Horizontal	Pass
		713.5	4.28	1.92	19.33	2.15	19.54	89.950	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Midd	709	4.55	1.91	19.25	2.15	19.74	94.189	Horizontal	Pass
		710	4.86	1.91	19.26	2.15	20.06	101.391	Horizontal	Pass
		711	4.67	1.92	19.32	2.15	19.92	98.175	Horizontal	Pass

Note:

ERP=EIRP-2.15

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

9. SPURIOUS RADIATION EMISSION

RULE PART(S)

FCC: §2.1051, §22.917(a), §24.238(a), §27.53(c)(g)(h)(m)

LIMIT

For Band 7, the minimum permissible attenuation level of any spurious emission is $55 + \log_{10}(P)$ [Watts].

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P)$ [Watts], where P is the transmitter power in Watts.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth in the 1 MHz band immediately outside and adjacent to the channel edge of the equipment. Beyond the 1 MHz band immediately outside the channel edge of the equipment, a resolution bandwidth of 1 MHz shall be employed. A narrower resolution bandwidth is allowed to be used provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz or 1% of the occupied bandwidth as applicable.

The power of any unwanted emissions measured from the channel edge of the equipment shall be attenuated below the transmitter power, P (dBW), as follows:

- a. for base station and subscriber equipment, other than mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \text{ Log}_{10}(p)$, dB; and
- b. for mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \text{ Log}_{10}(p)$, dB at the channel edges and $55 + 10 \text{ Log}_{10}(p)$ at 5.5 MHz away and beyond the channel edges where p in (a) and (b) is the transmitter power measured in watts.

MODES TESTED

- LTE Band 2
LTE Band 4
- LTE Band 5
LTE Band 7
LTE Band 12
LTE Band 17

RESULTS

PASS

9.1 LTE BAND 2

QPSK EIRP POWER FOR LTE BAND 2 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1850.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3701.4	-48.05	4.04	33.51	-18.58	-13	-5.58	Horizontal
3701.4	-52.71	4.04	33.51	-23.24	-13	-10.24	Vertical
5552.1	-46.59	5.24	35.84	-15.99	-13	-2.99	Vertical
5552.1	-53.64	5.24	35.84	-23.04	-13	-10.04	Horizontal
189.5	-44.28	1.43	16.02	-29.69	-13	-16.69	Vertical
283.7	-37.22	1.30	17.99	-20.53	-13	-7.53	Horizontal
Test Results for Mid Channel 1880MHz							
3760.0	-44.10	4.04	33.56	-14.58	-13	-1.58	Horizontal
3760.0	-52.83	4.04	33.56	-23.31	-13	-10.31	Vertical
5640.0	-45.42	5.24	35.91	-14.75	-13	-1.75	Vertical
5640.0	-52.88	5.24	35.91	-22.21	-13	-9.21	Horizontal
210.5	-36.32	1.62	16.97	-20.97	-13	-7.97	Vertical
462.6	-37.75	1.74	15.98	-23.52	-13	-10.52	Horizontal
Test Results for High Channel 1909.3MHz							
3818.6	-48.97	4.04	34.00	-19.01	-13	-6.01	Horizontal
3818.6	-52.89	4.04	34.00	-22.93	-13	-9.93	Vertical
5727.9	-48.67	5.24	36.04	-17.87	-13	-4.87	Vertical
5727.9	-52.55	5.24	36.04	-21.75	-13	-8.75	Horizontal
194.0	-40.75	1.42	17.29	-24.88	-13	-11.88	Vertical
460.0	-38.93	1.50	17.90	-22.52	-13	-9.52	Horizontal

QPSK EIRP POWER FOR LTE BAND 2 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 1860MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3720.0	-46.21	4.07	33.54	-16.74	-13	-3.74	Horizontal
3720.0	-53.80	4.07	33.54	-24.33	-13	-11.33	Vertical
5580.0	-48.93	5.28	35.86	-18.35	-13	-5.35	Vertical
5580.0	-50.19	5.28	35.86	-19.61	-13	-6.61	Horizontal
197.0	-38.14	1.58	16.89	-22.82	-13	-9.82	Vertical
389.2	-42.31	1.76	17.26	-26.81	-13	-13.81	Horizontal
Test Results for Mid Channel 1880MHz							
3760.0	-44.23	4.04	33.56	-14.71	-13	-1.71	Horizontal
3760.0	-48.08	4.04	33.56	-18.56	-13	-5.56	Vertical
5640.0	-46.49	5.24	35.91	-15.82	-13	-2.82	Vertical
5640.0	-52.46	5.24	35.91	-21.79	-13	-8.79	Horizontal
202.9	-35.88	1.46	16.27	-21.07	-13	-8.07	Vertical
448.9	-35.68	1.59	15.15	-22.12	-13	-9.12	Horizontal
Test Results for High Channel 1900MHz							
3800.0	-48.73	4.04	34.00	-18.77	-13	-5.77	Horizontal
3800.0	-46.91	4.04	34.00	-16.95	-13	-3.95	Vertical
5700.0	-53.01	5.24	36.04	-22.21	-13	-9.21	Vertical
5700.0	-52.20	5.24	36.04	-21.40	-13	-8.40	Horizontal
180.4	-35.73	1.36	17.39	-19.69	-13	-6.69	Vertical
413.9	-44.67	1.66	15.39	-30.94	-13	-17.94	Horizontal

Note: $P_{Mea}(dBm) = Power(dBm) + ARpl (dBm)$

. Over Limit = $P_{Mea}(dBm) - Limit(dBm)$

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.2 LTE BAND 4

QPSK EIRP POWER FOR LTE BAND 4 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1710.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3421.4	-53.21	4.02	29.80	-27.43	-13	-14.43	Horizontal
3421.4	-49.90	4.02	29.80	-24.12	-13	-11.12	Vertical
5132.1	-52.77	5.24	35.84	-22.17	-13	-9.17	Vertical
5132.1	-49.09	5.24	35.84	-18.49	-13	-5.49	Horizontal
178.6	-39.83	1.68	16.04	-25.47	-13	-12.47	Vertical
371.4	-43.39	1.78	17.74	-27.43	-13	-14.43	Horizontal
Test Results for Mid Channel 1732.5MHz							
3465.0	-44.06	4.03	30.00	-18.09	-13	-5.09	Horizontal
3465.0	-52.21	4.03	30.00	-26.24	-13	-13.24	Vertical
5197.5	-44.38	5.25	35.86	-13.77	-13	-0.77	Vertical
5197.5	-53.52	5.25	35.86	-22.91	-13	-9.91	Horizontal
189.6	-39.69	1.72	17.69	-23.72	-13	-10.72	Vertical
247.6	-42.62	1.62	16.02	-28.21	-13	-15.21	Horizontal
Test Results for High Channel 1754.3MHz							
3508.6	-52.79	4.05	30.01	-26.83	-13	-13.83	Horizontal
3508.6	-50.15	4.05	30.01	-24.19	-13	-11.19	Vertical
5262.9	-50.98	5.26	35.86	-20.38	-13	-7.38	Vertical
5262.9	-51.19	5.26	35.86	-20.59	-13	-7.59	Horizontal
208.7	-42.22	1.80	16.69	-27.33	-13	-14.33	Vertical
250.8	-43.68	1.75	16.66	-28.78	-13	-15.78	Horizontal

QPSK EIRP POWER FOR LTE BAND 4 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 1720MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3440.0	-47.92	4.02	29.80	-22.14	-13	-9.14	Horizontal
3440.0	-51.26	4.02	29.80	-25.48	-13	-12.48	Vertical
5160.0	-50.52	5.24	35.84	-19.92	-13	-6.92	Vertical
5160.0	-53.52	5.24	35.84	-22.92	-13	-9.92	Horizontal
175.9	-39.63	1.57	17.26	-23.94	-13	-10.94	Vertical
360.2	-34.90	1.78	16.35	-20.33	-13	-7.33	Horizontal
Test Results for Mid Channel 1732.5MHz							
3465.0	-49.57	4.03	30.00	-23.60	-13	-10.60	Horizontal
3465.0	-44.18	4.03	30.00	-18.21	-13	-5.21	Vertical
5197.5	-44.87	5.25	35.86	-14.26	-13	-1.26	Vertical
5197.5	-51.00	5.25	35.86	-20.39	-13	-7.39	Horizontal
192.0	-44.32	1.44	17.95	-27.81	-13	-14.81	Vertical
425.7	-39.65	1.65	16.09	-25.21	-13	-12.21	Horizontal
Test Results for High Channel 1745MHz							
3490.0	-51.92	2.91	27.68	-27.15	-13	-14.15	Horizontal
3490.0	-52.94	2.91	27.68	-28.17	-13	-15.17	Vertical
5235.0	-47.64	5.26	35.86	-17.04	-13	-4.04	Vertical
5235.0	-53.90	5.26	35.86	-23.30	-13	-10.30	Horizontal
209.9	-34.62	1.61	16.85	-19.38	-13	-6.38	Vertical
359.5	-39.23	1.61	15.19	-25.65	-13	-12.65	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.3 LTE BAND 5

QPSK EIRP POWER FOR LTE BAND 5 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 824.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1649.4	-51.24	2.78	27.50	-26.52	-13	-13.52	Horizontal
1649.4	-49.92	2.78	27.50	-25.20	-13	-12.20	Vertical
2474.1	-49.80	2.90	27.80	-24.90	-13	-11.90	Vertical
2474.1	-50.47	2.90	27.80	-25.57	-13	-12.57	Horizontal
181.4	-34.51	1.76	17.59	-18.68	-13	-5.68	Vertical
335.9	-37.39	1.63	15.87	-23.15	-13	-10.15	Horizontal
Test Results For Mid Channel 836.5MHz							
1673.0	-46.30	2.80	27.48	-21.62	-13	-8.62	Horizontal
1673.0	-48.24	2.80	27.48	-23.56	-13	-10.56	Vertical
2509.5	-44.43	2.91	27.70	-19.64	-13	-6.64	Vertical
2509.5	-53.49	2.91	27.70	-28.70	-13	-15.70	Horizontal
179.7	-40.63	1.61	15.68	-26.56	-13	-13.56	Vertical
361.5	-35.85	1.59	17.52	-19.93	-13	-6.93	Horizontal
Test Results for High Channel 848.3MHz							
1696.6	-50.35	2.82	27.43	-25.74	-13	-12.74	Horizontal
1696.6	-51.25	2.82	27.43	-26.64	-13	-13.64	Vertical
2544.9	-52.24	2.92	27.74	-27.42	-13	-14.42	Vertical
2544.9	-51.51	2.92	27.74	-26.69	-13	-13.69	Horizontal
202.8	-43.54	1.69	16.67	-28.55	-13	-15.55	Vertical
266.9	-34.02	1.70	17.18	-18.54	-13	-5.54	Horizontal

QPSK EIRP POWER FOR LTE BAND 5 (10MHZ BANDWIDTH)

Test Results for Low Channel 829MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1658.0	-46.63	2.78	27.50	-21.91	-13	-8.91	Horizontal
1658.0	-47.73	2.78	27.50	-23.01	-13	-10.01	Vertical
2487.0	-52.34	2.90	27.80	-27.44	-13	-14.44	Vertical
2487.0	-51.53	2.90	27.80	-26.63	-13	-13.63	Horizontal
190.1	-44.49	1.71	15.57	-30.63	-13	-17.63	Vertical
452.1	-43.20	1.34	16.40	-28.14	-13	-15.14	Horizontal
Test Results For Mid Channel 836.5MHz							
1673.0	-47.00	2.80	27.48	-22.32	-13	-9.32	Horizontal
1673.0	-50.39	2.80	27.48	-25.71	-13	-12.71	Vertical
2509.5	-50.68	2.91	27.70	-25.89	-13	-12.89	Vertical
2509.5	-53.75	2.91	27.70	-28.96	-13	-15.96	Horizontal
210.5	-35.72	1.44	17.04	-20.12	-13	-7.12	Vertical
418.9	-40.33	1.76	17.62	-24.47	-13	-11.47	Horizontal
Test Results for High Channel 844MHz							
1688.0	-47.03	2.82	27.43	-22.42	-13	-9.42	Horizontal
1688.0	-45.83	2.82	27.43	-21.22	-13	-8.22	Vertical
2532.0	-49.45	2.92	27.74	-24.63	-13	-11.63	Vertical
2532.0	-49.23	2.92	27.74	-24.41	-13	-11.41	Horizontal
181.8	-42.32	1.74	17.70	-26.36	-13	-13.36	Vertical
274.9	-38.19	1.41	17.46	-22.13	-13	-9.13	Horizontal

Note: $P_{Mea}(dBm) = Power(dBm) + ARpl(dBm)$

. Over Limit = $P_{Mea}(dBm) - Limit(dBm)$

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.4 LTE BAND 7

QPSK EIRP POWER FOR LTE BAND 7 (5.0MHZ BANDWIDTH)

Test Results for Low Channel 2502.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5005.0	-60.56	5.23	35.81	-29.98	-25	-4.98	Horizontal
5005.0	-64.75	5.23	35.81	-34.17	-25	-9.17	Vertical
7507.5	-63.88	5.67	36.85	-32.70	-25	-7.70	Vertical
7507.5	-61.23	5.67	36.85	-30.05	-25	-5.05	Horizontal
190.5	-54.16	1.73	17.97	-37.92	-25	-12.92	Vertical
272.1	-47.71	1.38	15.11	-33.98	-25	-8.98	Horizontal
Test Results for Mid Channel 2535MHz							
5070.0	-61.81	5.23	35.82	-31.22	-25	-6.22	Horizontal
5070.0	-62.53	5.23	35.82	-31.94	-25	-6.94	Vertical
7605.0	-60.70	5.67	36.85	-29.52	-25	-4.52	Vertical
7605.0	-61.83	5.67	36.85	-30.65	-25	-5.65	Horizontal
200.8	-46.15	1.77	16.17	-31.74	-25	-6.74	Vertical
240.2	-49.12	1.63	15.21	-35.54	-25	-10.54	Horizontal
Test Results for High Channel 2567.5MHz							
5135.0	-60.15	5.24	35.83	-29.56	-25	-4.56	Horizontal
5135.0	-59.11	5.24	35.83	-28.52	-25	-3.52	Vertical
7702.5	-59.03	5.68	36.87	-27.84	-25	-2.84	Vertical
7702.5	-62.45	5.68	36.87	-31.26	-25	-6.26	Horizontal
204.7	-50.20	1.58	17.56	-34.22	-25	-9.22	Vertical
231.9	-47.15	1.45	16.58	-32.02	-25	-7.02	Horizontal

QPSK EIRP POWER FOR LTE BAND 7 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 2510MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5020.0	-63.00	5.23	35.82	-32.41	-25	-7.41	Horizontal
5020.0	-62.46	5.23	35.82	-31.87	-25	-6.87	Vertical
7530.0	-61.40	5.67	36.86	-30.21	-25	-5.21	Vertical
7530.0	-61.44	5.67	36.86	-30.25	-25	-5.25	Horizontal
208.3	-52.74	1.63	15.76	-38.61	-25	-13.61	Vertical
317.2	-51.27	1.71	15.44	-37.54	-25	-12.54	Horizontal
Test Results for Mid Channel 2535MHz							
5070.0	-59.91	5.23	35.82	-29.32	-25	-4.32	Horizontal
5070.0	-61.28	5.23	35.82	-30.69	-25	-5.69	Vertical
7605.0	-63.81	5.67	36.85	-32.63	-25	-7.63	Vertical
7605.0	-59.50	5.67	36.85	-28.32	-25	-3.32	Horizontal
189.5	-46.16	1.79	16.84	-31.10	-25	-6.10	Vertical
355.7	-48.20	1.71	17.64	-32.27	-25	-7.27	Horizontal
Test Results for High Channel 2560MHz							
5120.0	-60.13	5.24	35.83	-29.54	-25	-4.54	Horizontal
5120.0	-59.46	5.24	35.83	-28.87	-25	-3.87	Vertical
7680.0	-59.04	5.70	36.88	-27.86	-25	-2.86	Vertical
7680.0	-62.03	5.70	36.88	-30.85	-25	-5.85	Horizontal
182.1	-49.85	1.79	16.84	-34.79	-25	-9.79	Vertical
280.5	-44.68	1.71	17.64	-28.75	-25	-3.75	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ ARpl (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.5 LTE BAND 12

QPSK EIRP POWER FOR LTE BAND 12 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 699.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1399.4	-45.34	2.60	27.20	-20.74	-13	-7.74	Horizontal
1399.4	-45.04	2.60	27.20	-20.44	-13	-7.44	Vertical
2099.1	-52.12	2.85	27.54	-27.43	-13	-14.43	Vertical
2099.1	-52.47	2.85	27.54	-27.78	-13	-14.78	Horizontal
203.2	-41.20	1.49	17.78	-24.91	-13	-11.91	Vertical
463.0	-34.59	1.36	17.33	-18.62	-13	-5.62	Horizontal
Test Results For Mid Channel 707.5MHz							
1415.0	-45.50	2.61	27.28	-20.83	-13	-7.83	Horizontal
1415.0	-46.13	2.61	27.28	-21.46	-13	-8.46	Vertical
2122.5	-51.63	2.87	27.59	-26.91	-13	-13.91	Vertical
2122.5	-52.48	2.87	27.59	-27.76	-13	-14.76	Horizontal
178.6	-40.95	1.73	15.74	-26.94	-13	-13.94	Vertical
442.1	-35.51	1.62	15.79	-21.34	-13	-8.34	Horizontal
Test Results for High Channel 715.3MHz							
1430.6	-51.11	2.63	27.28	-26.46	-13	-13.46	Horizontal
1430.6	-49.82	2.63	27.28	-25.17	-13	-12.17	Vertical
2145.9	-50.26	2.88	27.60	-25.54	-13	-12.54	Vertical
2145.9	-53.27	2.88	27.60	-28.55	-13	-15.55	Horizontal
198.4	-40.02	1.61	18.00	-23.63	-13	-10.63	Vertical
387.5	-35.82	1.45	15.49	-21.79	-13	-8.79	Horizontal

QPSK EIRP POWER FOR LTE BAND 12 (10MHZ BANDWIDTH)

Test Results for Low Channel 704MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1408.0	-48.22	2.61	27.26	-23.57	-13	-10.57	Horizontal
1408.0	-51.96	2.61	27.26	-27.31	-13	-14.31	Vertical
2112.0	-49.85	2.87	27.58	-25.14	-13	-12.14	Vertical
2112.0	-52.00	2.87	27.58	-27.29	-13	-14.29	Horizontal
205.6	-44.79	1.31	16.97	-29.13	-13	-16.13	Vertical
452.1	-34.56	1.65	16.70	-19.51	-13	-6.51	Horizontal
Test Results for Mid Channel 707.5MHz							
1415.0	-53.94	2.61	27.28	-29.27	-13	-16.27	Horizontal
1415.0	-44.03	2.61	27.28	-19.36	-13	-6.36	Vertical
2122.5	-44.44	2.87	27.59	-19.72	-13	-6.72	Vertical
2122.5	-50.33	2.87	27.59	-25.61	-13	-12.61	Horizontal
197.6	-34.61	1.72	17.99	-18.34	-13	-5.34	Vertical
423.6	-34.62	1.73	17.94	-18.41	-13	-5.41	Horizontal
Test Results for High Channel 711MHz							
1422.0	-47.71	2.62	27.28	-23.05	-13	-10.05	Horizontal
1422.0	-44.76	2.62	27.28	-20.10	-13	-7.10	Vertical
2133.0	-47.54	2.87	27.60	-22.81	-13	-9.81	Vertical
2133.0	-49.66	2.87	27.60	-24.93	-13	-11.93	Horizontal
193.8	-37.63	1.58	15.93	-23.28	-13	-10.28	Vertical
361.3	-44.96	1.36	15.59	-30.73	-13	-17.73	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.6 LTE BAND 17

QPSK EIRP POWER FOR LTE BAND 17 (5MHZ BANDWIDTH)

Test Results for Low Channel 706.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1413.0	-46.68	2.61	27.28	-22.01	-13	-9.01	Horizontal
1413.0	-44.89	2.61	27.28	-20.22	-13	-7.22	Vertical
2119.5	-52.81	2.87	27.59	-28.09	-13	-15.09	Vertical
2119.5	-51.12	2.87	27.59	-26.40	-13	-13.40	Horizontal
201.5	-38.07	1.71	16.15	-23.63	-13	-10.63	Vertical
378.2	-37.46	1.41	17.32	-21.55	-13	-8.55	Horizontal
Test Results For Mid Channel 710MHz							
1420.0	-47.23	2.62	27.30	-22.55	-13	-9.55	Horizontal
1420.0	-45.55	2.62	27.30	-20.87	-13	-7.87	Vertical
2130.0	-49.77	2.87	27.62	-25.02	-13	-12.02	Vertical
2130.0	-51.15	2.87	27.62	-26.40	-13	-13.40	Horizontal
185.6	-44.52	1.42	15.25	-30.70	-13	-17.70	Vertical
405.2	-44.02	1.36	17.19	-28.19	-13	-15.19	Horizontal
Test Results for High Channel 713.5MHz							
1427.0	-51.27	2.66	27.28	-26.65	-13	-13.65	Horizontal
1427.0	-48.08	2.66	27.28	-23.46	-13	-10.46	Vertical
2140.5	-48.17	2.88	27.60	-23.45	-13	-10.45	Vertical
2140.5	-50.85	2.88	27.60	-26.13	-13	-13.13	Horizontal
197.8	-42.03	1.32	17.29	-26.06	-13	-13.06	Vertical
357.7	-41.98	1.72	16.89	-26.81	-13	-13.81	Horizontal

QPSK EIRP POWER FOR LTE BAND 17 (10MHZ BANDWIDTH)

Test Results for Low Channel 709MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1418.0	-48.29	2.62	27.30	-23.61	-13	-10.61	Horizontal
1418.0	-46.73	2.62	27.30	-22.05	-13	-9.05	Vertical
2127.0	-47.59	2.87	27.62	-22.84	-13	-9.84	Vertical
2127.0	-50.07	2.87	27.62	-25.32	-13	-12.32	Horizontal
193.2	-35.86	1.35	16.91	-20.30	-13	-7.30	Vertical
308.9	-41.83	1.62	16.31	-27.14	-13	-14.14	Horizontal
Test Results for Mid Channel 710MHz							
1420.0	-44.03	2.62	27.30	-19.35	-13	-6.35	Horizontal
1420.0	-47.82	2.62	27.30	-23.14	-13	-10.14	Vertical
2130.0	-44.35	2.87	27.62	-19.60	-13	-6.60	Vertical
2130.0	-49.38	2.87	27.62	-24.63	-13	-11.63	Horizontal
178.8	-40.61	1.51	17.14	-24.98	-13	-11.98	Vertical
463.2	-35.34	1.77	16.88	-20.23	-13	-7.23	Horizontal
Test Results for High Channel 711MHz							
1422.0	-48.85	2.62	27.30	-24.17	-13	-11.17	Horizontal
1422.0	-49.19	2.62	27.30	-24.51	-13	-11.51	Vertical
2133.0	-48.54	2.87	27.62	-23.79	-13	-10.79	Vertical
2133.0	-52.97	2.87	27.62	-28.22	-13	-15.22	Horizontal
190.2	-36.09	1.78	15.95	-21.92	-13	-8.92	Vertical
375.5	-43.88	1.34	17.95	-27.28	-13	-14.28	Horizontal

Note: $P_{Mea}(dBm) = Power(dBm) + ARpl (dBm)$

. Over Limit = : $P_{Mea}(dBm) - Limit(dBm)$

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

10. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

- Temp. = -30° to $+50^{\circ}\text{C}$
- Voltage = low voltage, DC 3.3V, Normal, DC 3.85V and High voltage, DC 4.4V.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to -30°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

- LTE Band 2
LTE Band 4
- LTE Band 5
LTE Band 7
LTE Band 12
LTE Band 17

RESULTS

See the following pages.

10.1 LTE BAND 2

QPSK, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 2 QPSK, (CH 18900 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.6	1880	12.8	0.006783	2.5
3.85	1880	13.4	0.007115	2.5
4.4	1880	13.6	0.007223	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 2 QPSK, (CH 18900 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	1880	12.2	0.006495	2.5
Extreme (50C)	1880	12.0	0.006390	2.5
Extreme (40C)	1880	13.8	0.007332	2.5
Extreme (30C)	1880	13.3	0.007064	2.5
Extreme (10C)	1880	14.3	0.007595	2.5
Extreme (0C)	1880	12.0	0.006368	2.5
Extreme (-10C)	1880	13.5	0.007162	2.5
Extreme (-20C)	1880	13.9	0.007405	2.5
Extreme (-30C)	1880	14.9	0.007923	2.5

16QAM, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 2 16QAM, (CH 18900 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.6	1880	9.8	0.005195	2.5
3.85	1880	8.4	0.004493	2.5
4.4	1880	7.7	0.004099	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 2 16QAM, (CH 18900 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	1880	9.6	0.005109	2.5
Extreme (50C)	1880	9.4	0.004977	2.5
Extreme (40C)	1880	7.8	0.004142	2.5
Extreme (30C)	1880	8.9	0.004746	2.5
Extreme (10C)	1880	8.5	0.004520	2.5
Extreme (0C)	1880	8.3	0.004402	2.5
Extreme (-10C)	1880	9.0	0.004782	2.5
Extreme (-20C)	1880	9.2	0.004881	2.5
Extreme (-30C)	1880	8.0	0.004241	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.2 LTE BAND 4

QPSK, (10MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 4 QPSK, (CH 20175 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.6	1732.5	9.3	0.005353	2.5
3.85	1732.5	8.8	0.005084	2.5
4.4	1732.5	8.3	0.004788	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 4 QPSK, (CH 20175 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	1732.5	8.6	0.004977	2.5
Extreme (50C)	1732.5	8.8	0.005057	2.5
Extreme (40C)	1732.5	6.9	0.003996	2.5
Extreme (30C)	1732.5	5.6	0.003210	2.5
Extreme (10C)	1732.5	7.5	0.004326	2.5
Extreme (0C)	1732.5	9.4	0.005410	2.5
Extreme (-10C)	1732.5	8.7	0.005021	2.5
Extreme (-20C)	1732.5	6.5	0.003745	2.5
Extreme (-30C)	1732.5	8.0	0.004636	2.5

16QAM, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 4 16QAM, (CH 20175 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.6	1732.5	9.4	0.005434	2.5
3.85	1732.5	8.7	0.005012	2.5
4.4	1732.5	8.6	0.004946	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 4 16QAM, (CH 20175 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	1732.5	9.8	0.005680	2.5
Extreme (50C)	1732.5	9.2	0.005282	2.5
Extreme (40C)	1732.5	7.7	0.004464	2.5
Extreme (30C)	1732.5	9.1	0.005248	2.5
Extreme (10C)	1732.5	9.1	0.005265	2.5
Extreme (0C)	1732.5	8.0	0.004626	2.5
Extreme (-10C)	1732.5	9.0	0.005184	2.5
Extreme (-20C)	1732.5	8.5	0.004918	2.5
Extreme (-30C)	1732.5	8.4	0.004820	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.3 LTE BAND 5

QPSK, (10MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 5 QPSK, (CH 20525 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
3.6	836.5	5.6	0.006665	2.5
3.85	836.5	6.9	0.008256	2.5
4.4	836.5	4.8	0.005705	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 5 QPSK, (CH 20525 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
Normal (25C)	836.5	6.3	0.007540	2.5
Extreme (50C)	836.5	6.3	0.007508	2.5
Extreme (40C)	836.5	6.3	0.007558	2.5
Extreme (30C)	836.5	6.7	0.008022	2.5
Extreme (10C)	836.5	5.4	0.006483	2.5
Extreme (0C)	836.5	5.7	0.006794	2.5
Extreme (-10C)	836.5	5.7	0.006801	2.5
Extreme (-20C)	836.5	6.5	0.007792	2.5
Extreme (-30C)	836.5	6.3	0.007584	2.5

16QAM, (10MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 5 16QAM, (CH 20525 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
3.6	836.5	5.5	0.006537	2.5
3.85	836.5	6.3	0.007479	2.5
4.4	836.5	4.9	0.005810	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 5 16QAM, (CH 20525 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
Normal (25C)	836.5	5.7	0.006762	2.5
Extreme (50C)	836.5	6.4	0.007604	2.5
Extreme (40C)	836.5	5.6	0.006744	2.5
Extreme (30C)	836.5	6.4	0.007706	2.5
Extreme (10C)	836.5	5.0	0.005980	2.5
Extreme (0C)	836.5	5.5	0.006519	2.5
Extreme (-10C)	836.5	5.5	0.006563	2.5
Extreme (-20C)	836.5	6.3	0.007532	2.5
Extreme (-30C)	836.5	5.9	0.007098	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.4 LTE BAND 7

QPSK, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 7 QPSK, (CH 21100 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.6	2535	10.1	0.003966	2.5
3.85	2535	9.2	0.003613	2.5
4.4	2535	8.2	0.003239	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 7 QPSK, (CH 21100 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	2535	9.1	0.003573	2.5
Extreme (50C)	2535	8.6	0.003399	2.5
Extreme (40C)	2535	8.7	0.003427	2.5
Extreme (30C)	2535	8.5	0.003349	2.5
Extreme (10C)	2535	8.6	0.003392	2.5
Extreme (0C)	2535	8.0	0.003148	2.5
Extreme (-10C)	2535	9.6	0.003775	2.5
Extreme (-20C)	2535	8.6	0.003376	2.5
Extreme (-30C)	2535	8.8	0.003487	2.5

16QAM, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 7 16QAM, (CH 21100 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.6	2535	6.9	0.002722	2.5
3.85	2535	6.9	0.002717	2.5
4.4	2535	5.4	0.002145	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 7 16QAM, (CH 21100 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	2535	6.9	0.002722	2.5
Extreme (50C)	2535	6.0	0.002370	2.5
Extreme (40C)	2535	5.8	0.002289	2.5
Extreme (30C)	2535	6.7	0.002654	2.5
Extreme (10C)	2535	5.7	0.002254	2.5
Extreme (0C)	2535	5.2	0.002059	2.5
Extreme (-10C)	2535	5.2	0.002063	2.5
Extreme (-20C)	2535	6.3	0.002470	2.5
Extreme (-30C)	2535	5.3	0.002089	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.5 LTE BAND 12

QPSK, (10MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 12 QPSK, (CH 23095 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
3.6	707.5	8.2	0.011617	2.5
3.85	707.5	9.7	0.013765	2.5
4.4	707.5	8.8	0.012453	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 12 QPSK, (CH 23095 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
Normal (25C)	707.5	8.4	0.011907	2.5
Extreme (50C)	707.5	7.1	0.010101	2.5
Extreme (40C)	707.5	7.1	0.010028	2.5
Extreme (30C)	707.5	7.8	0.011085	2.5
Extreme (10C)	707.5	7.1	0.010031	2.5
Extreme (0C)	707.5	8.8	0.012495	2.5
Extreme (-10C)	707.5	8.7	0.012292	2.5
Extreme (-20C)	707.5	9.3	0.013185	2.5
Extreme (-30C)	707.5	8.2	0.011600	2.5

16QAM, (10MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 12 16QAM, (CH 23095 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
3.6	707.5	7.3	0.010371	2.5
3.85	707.5	8.6	0.012165	2.5
4.4	707.5	7.9	0.011166	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 12 QPSK, (CH 23095 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
Normal (25C)	707.5	6.5	0.009175	2.5
Extreme (50C)	707.5	5.5	0.007765	2.5
Extreme (40C)	707.5	6.4	0.009110	2.5
Extreme (30C)	707.5	-7.7	-0.010912	2.5
Extreme (10C)	707.5	-8.2	-0.011590	2.5
Extreme (0C)	707.5	2.9	0.004100	2.5
Extreme (-10C)	707.5	-5.2	-0.007292	2.5
Extreme (-20C)	707.5	-8.7	-0.012302	2.5
Extreme (-30C)	707.5	-10.2	-0.014350	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.6 LTE BAND 17

QPSK, (10MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 17 QPSK, (CH 23790 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
3.6	710.0	10.2	0.014429	2.5
3.85	710.0	8.5	0.011920	2.5
4.4	710.0	8.5	0.011983	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 17 QPSK, (CH 23790 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
Normal (25C)	710.0	9.5	0.013341	2.5
Extreme (50C)	710.0	9.4	0.013178	2.5
Extreme (40C)	710.0	7.9	0.011069	2.5
Extreme (30C)	710.0	8.8	0.012341	2.5
Extreme (10C)	710.0	8.5	0.011943	2.5
Extreme (0C)	710.0	7.7	0.010875	2.5
Extreme (-10C)	710.0	9.2	0.013017	2.5
Extreme (-20C)	710.0	9.3	0.013161	2.5
Extreme (-30C)	710.0	8.2	0.011526	2.5

16QAM, (10MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 17 16QAM, (CH 23790 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
3.6	710.0	10.2	0.014403	2.5
3.85	710.0	8.8	0.012441	2.5
4.4	710.0	8.7	0.012305	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 17 QPSK, (CH 23790 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
Normal (25C)	710.0	9.0	0.012712	2.5
Extreme (50C)	710.0	9.0	0.012616	2.5
Extreme (40C)	710.0	8.6	0.012181	2.5
Extreme (30C)	710.0	9.0	0.012638	2.5
Extreme (10C)	710.0	8.6	0.012049	2.5
Extreme (0C)	710.0	8.3	0.011749	2.5
Extreme (-10C)	710.0	9.2	0.013025	2.5
Extreme (-20C)	710.0	8.8	0.012458	2.5
Extreme (-30C)	710.0	8.9	0.012519	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

11. Peak-to-Average Ratio

11.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


11.2 Measuring Instruments

See list of measuring instruments of this test report.

11.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. For GSM/EGPRS operating modes:
 - a. Set the RBW = 1MHz, VBW = 1MHz, Peak detector in spectrum analyzer.
 - b. Set EUT in maximum power output, and triggered the burst signal.
 - c. Measured respectively the Peak level and Mean level, and the deviation was recorded as Peak to Average Ratio.
4. For UMTS operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.

11.4 Test Setup

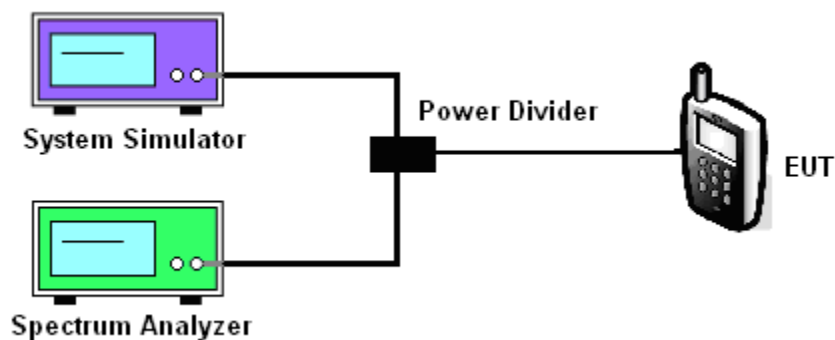

MODES TESTED

- LTE Band 2/4/5/7/12/17
-

Test data reference attachment.

----END OF REPORT----